RADIO TEST REPORT

Test Report No.: 15179707H-A-R2

Customer	**Keyence Corporation**
Description of EUT	**Level sensor**
Model Number of EUT	**FR-LW20L**
FCC ID	**RF41754H**
Test Regulation	**FCC Part 15 Subpart C**
Test Result	**Complied**
Issue Date	**June 4, 2024**
Remarks	**-**

Representative test engineer	**Approved by**
Junki Nagatomi Engineer	Ryota Yamanaka Engineer

CERTIFICATE 5107.02

☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
☒ There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 23.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
  It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided by the customer for this report is identified in SECTION 1.
- The laboratory is not responsible for information provided by the customer which can impact the validity of the results.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No.: 15179707H-A

This report is a revised version of 15179707H-A-R1. 15179707H-A-R1 is replaced with this report.

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	15179707H-A	April 26, 2024	-
1	15179707H-A-R1	May 30, 2024	Correction of the variant model description in Clause 2.3.
1	15179707H-A-R1	May 30, 2024	Correction of the Declared value in Duty Cycle, Off Time Requirement test data; Tx OFF Time: from 357.950 to 357.952 Tx ON + Tx OFF Time: from 359.998 to 360.000
2	15179707H-A-R2	June 4, 2024	Correction of Duty factor value in Duty Cycle, Off Time Requirement test; from -22.34 to 22.34, from -22.45 to 22.45
2	15179707H-A-R2	June 4, 2024	Addition of the Plot data for Spurious Emissions (Above 40 GHz).

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS PAGE

SECTION 1: Customer Information....5
SECTION 2: Equipment Under Test (EUT)....5
SECTION 3: Test specification, procedures & results....6
SECTION 4: Operation of EUT during testing....9
SECTION 5: Conducted Emission....12
SECTION 6: Radiated Emissions....13
SECTION 7: Frequency Stability....18
APPENDIX 1: Test data....19
Conducted Emission....19
Duty Cycle, Off Time Requirement....20
99 % Occupied Bandwidth....21
EIRP....23
Spurious Emissions....25
Frequency Stability....27
Group Instllation....42
APPENDIX 2: Test instruments....43
APPENDIX 3: Photographs of test setup....46
Conducted Emission....46
EIRP....47
Spurious Emissions....48
Worst Case Position....51
Frequency Stability....52

SECTION 1: Customer Information

Company Name	Keyence Corporation
Address	1-3-14, Higashinakajima Higashiyodogwa-ku, Osaka, 533-8555 Japan
Telephone Number	+81-6-6379-1111
Contact Person	Takashi Suzuki

The information provided by the customer is as follows;
- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	Level sensor
Model Number	FR-LW20L
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	February 27, 2024
Test Date	February 27 to Arpril 2, 2024

2.2 Product Description

General Specification

Rating	DC 24 V
Operating temperature	-30 deg. C to 60 deg. C

Radio Specification

Equipment Type	Transceiver
Frequency of Operation	60.5 GHz (Center) (58 GHz to 63 GHz)
Bandwidth	6.8 GHz
Type of Modulation	Frequency modulation (FMCW)
Usage location	Fixed Field disturbance sensor

2.3 Variant model(s)

Tested model: FR-LW20L has a variant model: FR-LEX20L.
The difference of these models is as follows.
- FR-LW20L: Non-ATEX Compliant
- FR-LEX20L: ATEX Compliant

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart C The latest version on the first day of the testing period
Title	FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits. Section 15.255 Operation within the band 57-71 GHz.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	**FCC:** ANSI C63.10 2020, 6. Standard test methods	**FCC:** Section 15.207	27.49 dB, 2.71200 MHz, AV Phase N	Complied	-
Duty cycle, Off Time Requirement	**FCC:** -	**FCC:** Section FCC 15.255 (c)(2)(iii)(B)	See data.	Complied	Radiated
6dB Bandwidth	**FCC:** Section 15.255(e) (2) ANSI C63.10 2020, 9. Procedures for testing millimeter-wave systems	**FCC:** Section 15.255(e) (1)	-	N/A	*1)
99 % Occupied Bandwidth	**FCC:** ANSI C 63.10:2020, 9. Procedures for testing millimeter-wave systems	**FCC:** -	See data.	Complied	Radiated *2)
EIRP	**FCC:** ANSI C63.10 2020, 9. Procedures for testing millimeter-wave systems	**FCC:** Section 15.255 (c)(2)(iii)(B)	See data.	Complied	Radiated
Spurious Emissions	**FCC:** ANSI C63.10 2020, 6. Standard test methods 9. Procedures for testing millimeter-wave systems	**FCC:** Section 15.255(d) Section 15.209	14.30 dB 56.152 GHz	Complied	Radiated
Frequency Stability	**FCC:** ANSI C63.10 2020, 9. Procedures for testing millimeter-wave systems	**FCC:** Section 15.255(f)	See data.	Complied	Radiated
Group Installation	**FCC:** -	**FCC:** Section 15.255(h)	-	N/A	*3)

Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593.
*1) The test is not applicable since the application of Section 15.255(e) is unnecessary due to the application of Section 15.255(c)(2)(iii)(B).
*2) The test was performed according to the General Measurement Guidance of TCB Workshop Part 15.255 Rules Amendment October 25, 2023.
*3) The test is not applicable since there are no external phase-locking inputs in this EUT.

FCC Part 15.31 (e)
This EUT provides the stable voltage constantly to RF Module regardless of input voltage.
Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement
The antenna is not removable from the EUT.
Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.
Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor k=2.

Conducted emission

Item	Frequency range	Unit	Calculated Uncertainty (+/-)
AMN (LISN)	0.15 MHz to 30 MHz	dB	3.3

Radiated emission

Measurement distance	Frequency range		Unit	Calculated Uncertainty (+/-)
3 m	9 kHz to 30 MHz		dB	3.3
10 m			dB	3.1
3 m	30 MHz to 200 MHz	Horizontal	dB	4.7
		Vertical	dB	4.7
	200 MHz to 1000 MHz	Horizontal	dB	4.8
		Vertical	dB	6.0
10 m	30 MHz to 200 MHz	Horizontal	dB	5.2
		Vertical	dB	5.1
	200 MHz to 1000 MHz	Horizontal	dB	5.2
		Vertical	dB	5.2
3 m	1 GHz to 6 GHz		dB	5.0
	6 GHz to 18 GHz		dB	5.2
1 m	10 GHz to 18 GHz		dB	5.3
	18 GHz to 26.5 GHz		dB	5.2
	26.5 GHz to 40 GHz		dB	4.7
0.5 m	26.5 GHz to 40 GHz		dB	4.8
>= 0.5 m	40 GHz to 50 GHz		dB	4.3
>= 0.5 m	50 GHz to 75 GHz		dB	5.9
>= 0.5 m	75 GHz to 110 GHz		dB	5.7
>= 3.8 cm	110 GHz to 170 GHz		dB	5.8
>= 2.5 cm	170 GHz to 260 GHz		dB	5.0

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 Japan
Telephone: +81-596-24-8999
A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919
ISED Lab Company Number: 2973C / CAB identifier: JP0002

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-
Large Chamber	16.9 x 22.1 x 10.17	16.9 x 22.1	-	10 m
Small Chamber	5.3 x 6.69 x 3.59	5.3 x 6.69	-	-

* Size of vertical conducting plane (for Conducted Emission test): 2.0 m × 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, RF Exposure, Test instruments, and Test set up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)

Mode	Test Item
Test mode (Tx) - Symbol Pattern A - Symbol Pattern B - Symbol Pattern C - Symbol Pattern D - Symbol Pattern E	Conducted Emission *1) Duty cycle, Off Time Requirement *2) 99 % Occupied bandwidth EIRP Spurious Emissions *1) Frequency Stability
*Power of the EUT was set by the software as follows; Power Setting: Tx 4 Software: Version: 17 (Date: 2024.02.27, Storage location: EUT memory)	
*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	

*1) The test was performed with the Symbol Pattern A as representative.
Since the Symbol Pattern A which has the widest OBW and the highest power was taken as the worst.

*2) The test data of Symbol Pattern A was shown as representative since all symbol patterns was the same logic.

4.2 Configuration and peripherals

Conducted Emission test

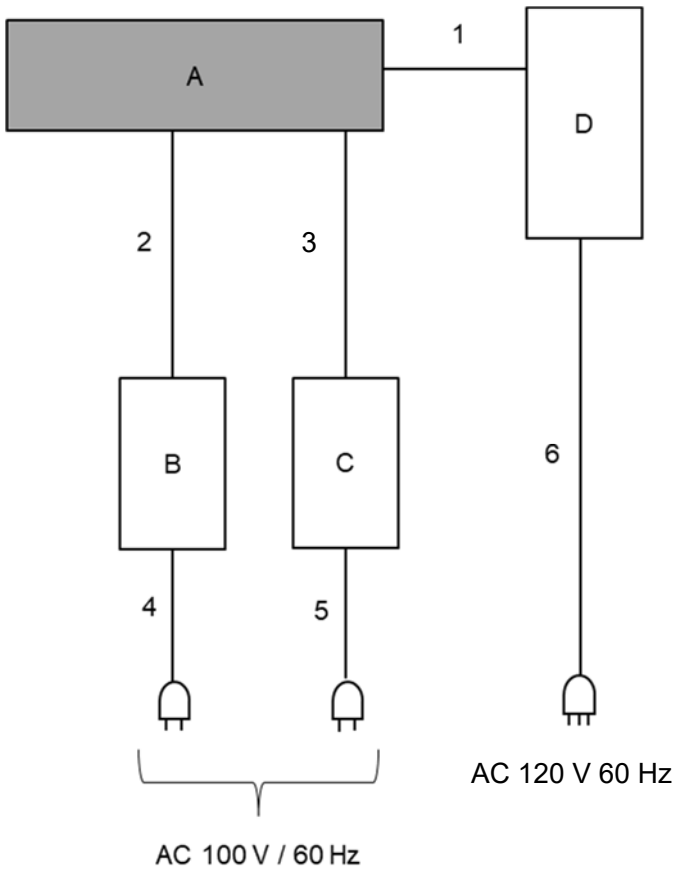

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.
* The test was performed with Items B and C at the same potential.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Level sensor	FR-LW20L	PA-54	Keyence Corporation	EUT
B	DC Power Supply	PDS-3003	001	CUSTOM	-
C	DC Power Supply	PDS-3003	002	CUSTOM	-
D	DC Power Supply	RPE-4323	824B168G2	RS COMPONENTS LTD	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	3.35	Unshielded	Unshielded	-
2	DC Cable	2.70	Unshielded	Unshielded	-
3	DC Cable	2.70	Unshielded	Unshielded	-
4	AC Cable	1.30	Unshielded	Unshielded	-
5	AC Cable	1.30	Unshielded	Unshielded	-
6	AC Cable	1.80	Unshielded	Unshielded	-

Radiated Emission test

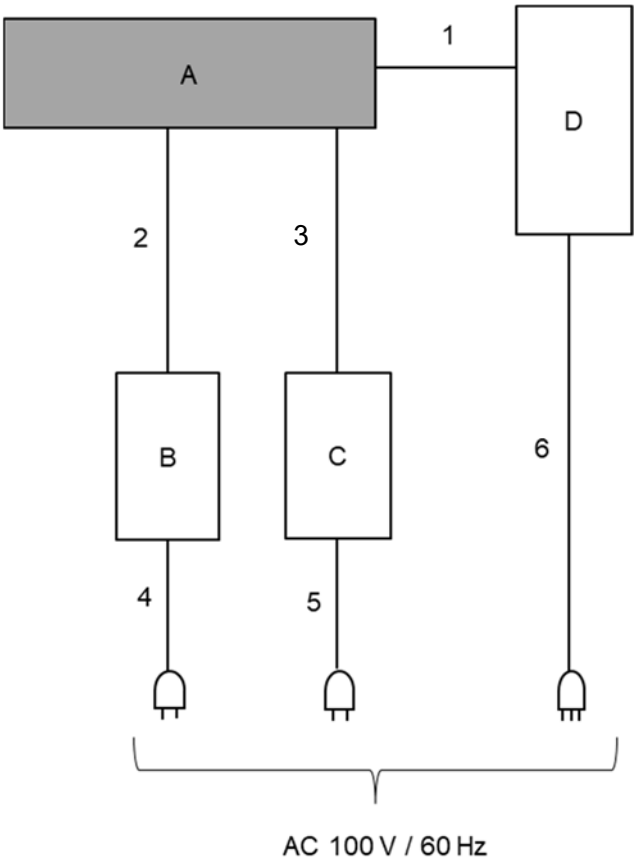

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.
* The test was performed with Items B and C at the same potential.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Level sensor	FR-LW20L	PA-54	Keyence Corporation	EUT
B	DC Power Supply	PDS-3003	001	CUSTOM	-
C	DC Power Supply	PDS-3003	002	CUSTOM	-
D	DC Power Supply	PAK35-10A	LF002314	Kikusui Electronics Corp.	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	3.35	Unshielded	Unshielded	-
2	DC Cable	2.70 *1) 4.00 *2)	Unshielded	Unshielded	-
3	DC Cable	2.70 *1) 4.00 *2)	Unshielded	Unshielded	-
4	AC Cable	1.30	Unshielded	Unshielded	-
5	AC Cable	1.30	Unshielded	Unshielded	-
6	AC Cable	2.20	Unshielded	Unshielded	-

*1) Used for below 30 MHz and above 1 GHz.
*2) Used for 30 MHz to 1000 MHz.

SECTION 5: Conducted Emission

Test Procedure and Conditions

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane.
The rear of tabletop was located 40 cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80 cm from any other grounded conducting surface. EUT was located 80 cm from a Line Impedance Stabilization Network (LISN) / Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)
I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane. All unused 50 ohm connectors of the LISN (AMN) were resistivity terminated in 50 ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber.
The EUT was connected to a LISN (AMN).
An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Detector : QP and CISPR AV
Measurement Range : 0.15 MHz to 30 MHz
Test Data : APPENDIX
Test Result : Pass

Figure 1: Test Setup

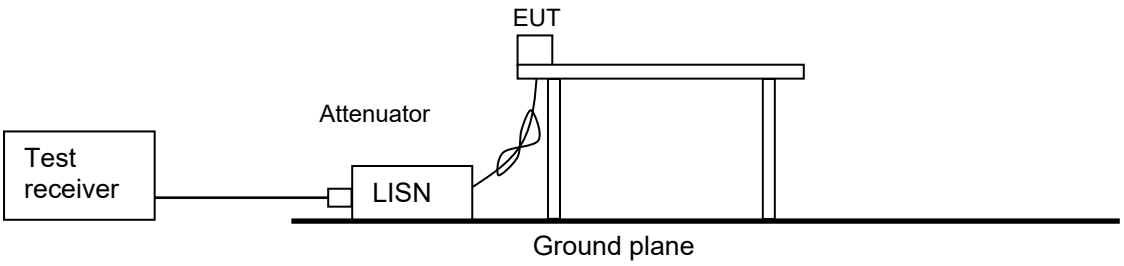

SECTION 6: Radiated Emissions

Test Procedure

[For below 30 MHz]

The EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane.
The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.
The loop antenna was fixed height at 1.0 m.
The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.
The measurements were performed for vertical polarization (antenna angle: 0 deg., 45 deg., 90 deg., 135 deg., and 180 deg.) and horizontal polarization.
*Refer to Figure 1 about Direction of the Loop Antenna.

[For above 30 MHz, up to 1 GHz]

The EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.
The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

[For above 1 GHz, up to 40 GHz]

The EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.
The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.
The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.
Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.
The measurements were made with the following detector function of the test receiver and the Spectrum analyzer.
The test was made with the detector (RBW/VBW) in the following table.

Test Antennas are used as below;

Frequency	Below 30 MHz	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Loop	Biconical	Logperiodic	Horn

Frequency	From 9 kHz to 90 kHz and From 110 kHz to 150 kHz	From 90 kHz to 110 kHz	From 150 kHz to 490 kHz	From 490 kHz to 30 MHz	From 30 MHz to 1 GHz	From 1 GHz to 40 GHz	
Instrument used	Test Receiver					Spectrum Analyzer	
Detector	PK / AV	QP	PK / AV	QP	QP	PK *a)	AV
IF Bandwidth	200 Hz	200 Hz	9 kHz	9 kHz	120 kHz	RBW: 1 MHz VBW: 3 MHz	RBW: 1 MHz VBW: 1 / T

*a) The Spectrum Analyzer was used in 3 dB resolution bandwidth.

[Test setup]

Below 1 GHz

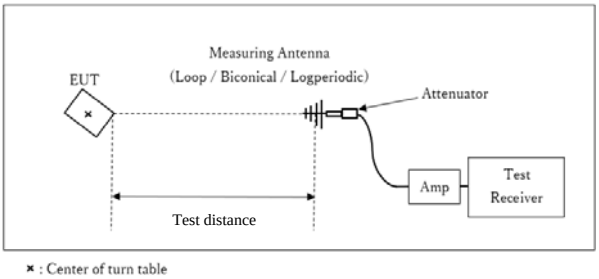

Test Distance: 3 m

1 GHz to 10 GHz

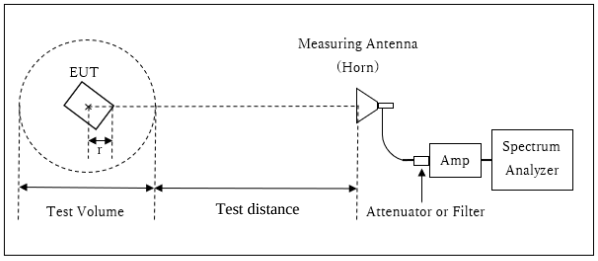

Distance Factor: 20 x log (4.0 m / 3.0 m) = 2.50 dB
* Test Distance: (3 + SVSWR Volume /2) - r = 4.0 m

SVSWR Volume : 2.0 m
(SVSWR Volume has been calibrated based on CISPR 16-1-4.)
r = 0.0 m

*The test was performed with r = 0.0 m since EUT is small and it was the rather conservative condition.

10 GHz to 40 GHz

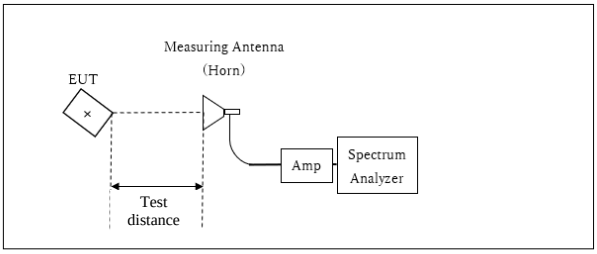

Distance Factor: 20 x log (1.0 m* / 3.0 m) = -9.5 dB
*Test Distance: 1 m

Figure 1: Direction of the Loop Antenna

Side View (Vertical)

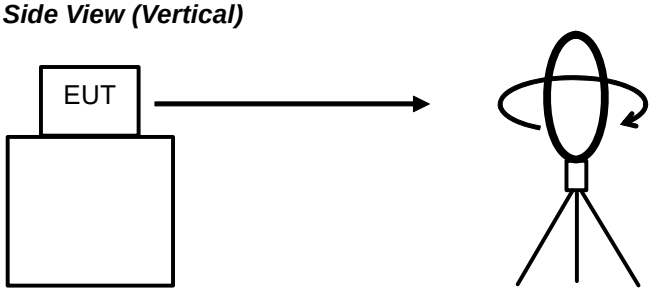

Top View (Horizontal)

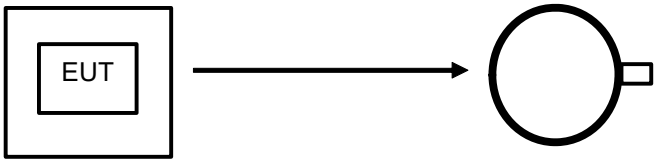

Antenna was not rotated.

Top View (Vertical)

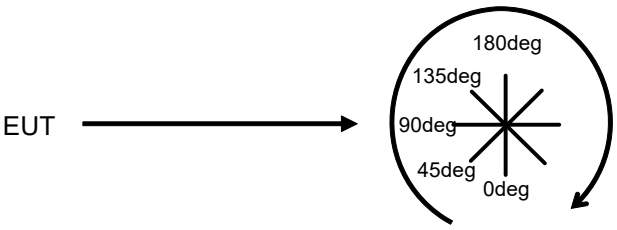

Front side: 0 deg.
Forward direction: clockwise

[Above 40 GHz]
The test was performed based on “Procedures for testing millimeter-wave systems” of ANSI C63.10-2013.
The EUT was placed on a urethane platform, raised 1.5 m above the conducting ground plane. The measurements were performed on handheld method.

Set spectrum analyzer RBW, VBW, span, etc., to the proper values. Note these values. Enable two traces—one set to “clear write,” and the other set to “max hold.” Begin hand-held measurements with the test antenna (horn) at a distance of 1 m from the EUT in a horizontally polarized position. Slowly adjust its position, entirely covering the plane 1 m from the EUT. Observation of the two active traces on the spectrum analyzer will allow refined horn positioning at the point(s) of maximum field intensity. Repeat with the horn in a vertically polarized position. If the emission cannot be detected at 1 m, reduce the RBW to increase system sensitivity. Note the value. If the emission still cannot be detected, move the horn closer to the EUT, noting the distance at which a measurement is made.

Note the maximum level indicated on the spectrum analyzer. Adjust this level, if necessary, by the antenna gain, filter loss, conversion loss of the external mixer and gain of LNA used, at the frequency under investigation. Calculate the field strength of the emission at the measurement distance from the Friis’ transmission equation.

Frequency	40 GHz to 75 GHz	75 GHz to 110 GHz	110 GHz to 200 GHz
Final measurement distance with 1 MHz Peak detector	0.75 m	0.5 m	0.01 m

[Test setup]
40 GHz to 50 GHz

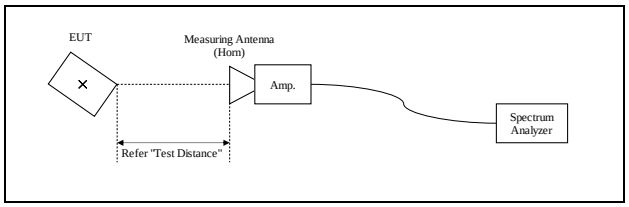

×: Center of turn table

*Test Distance: Refer to the above table.

Above 50 GHz

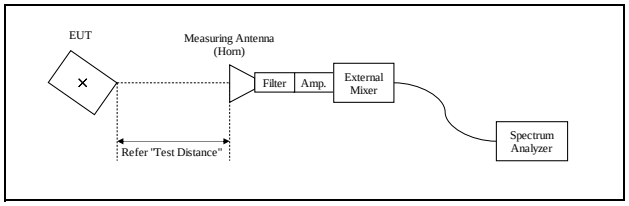

×: Center of turn table

[About fundamental measurement]
Test Procedure
The test was performed based on “Procedures for testing millimeter-wave systems” of ANSI C63.10-2020.

The carrier levels were measured in the far field. The distance of the far field was calculated from follow equation.

$$r = \frac{2D^2}{\lambda}$$

where

r is the distance from the radiating element of the EUT to the edge of the far field, in m
D is the largest dimension of both the radiating element and the test antenna (horn), in m
Lambda is the wavelength of the emission under investigation [300/f (MHz)], in m

Frequency [GHz]	Wavelength *Lambda* λ [mm]	Maximum Dimension EUT [m]	Test Antenna [m]	Maximum *D* [m]	Far Field Boundary *r* [m]	Tested Distance [m]
64	4.7	0.03710	0.03759	0.03759	0.603	0.75

The Peak Power results was applied to the desensitization correction factor.
The derivation of the FMCW Desensitization Factor is given in Keysight Application Note 5952 1039 Appendix B.
Desensitization factor was calculated from follow equation;

$$\alpha = \frac{1}{\sqrt[4]{1 + \left(\frac{2In(2)}{\pi}\right)^2 \left(\frac{Fs}{Ts\,B^2}\right)^2}}$$

and
FMCW Desensitization factor = 20 Log (α)
Where
*F*s is FMCW Sweep Width or Chirp Width, is used the actual measurement value.
*T*s is FMCW Sweep Time, is referred to the values in the specifications.
B is -3dB Bandwidth of Gaussian RBW Filter, is used the actual measurement value.

Symbol Pattern	F_s [MHz]	T_s [us]	*B* [MHz]	α	FMCW Desensitization factor [dB]
A	4995.1	1024.0	8.0	0.9997	-0.0025
B	4026.0	1024.0	8.0	0.9998	-0.0016
C	4220.5	1024.0	8.0	0.9998	-0.0018
D	3033.0	1024.0	8.0	0.9999	-0.0009
E	3571.0	1024.0	8.0	0.9999	-0.0013

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 9 kHz to 200 GHz
Test data : APPENDIX
Test result : Pass

SECTION 7: Frequency Stability

Test Procedure
The external mixer was placed in side of the temperature chamber's drain hole.

The power supply was set to nominal operating voltage (100 %), and the spectrum mask was measured at 20 deg. C. After that, EUT power supply was varied between 85 % and 115 % of nominal voltage and the frequency excursion of the EUT emission mask was recorded.

The EUT operating temperature was raised to 50 deg. C., and the frequency excursion of the EUT emission mask was recorded. Measurements were repeated at each 10 deg. C. decrement down to -20 deg. C.

Both lower and upper frequencies of the 99 % OBW were recorded.

Test data : APPENDIX
Test result : Pass

APPENDIX 1: Test data

Conducted Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No. 5
Date	March 31, 2024
Temperature / Humidity	20 deg. C / 37 % RH
Engineer	Masaya Minami
Mode	Tx Symbol Pattern A

Limit : FCC_Part 15 Subpart C(15.207)

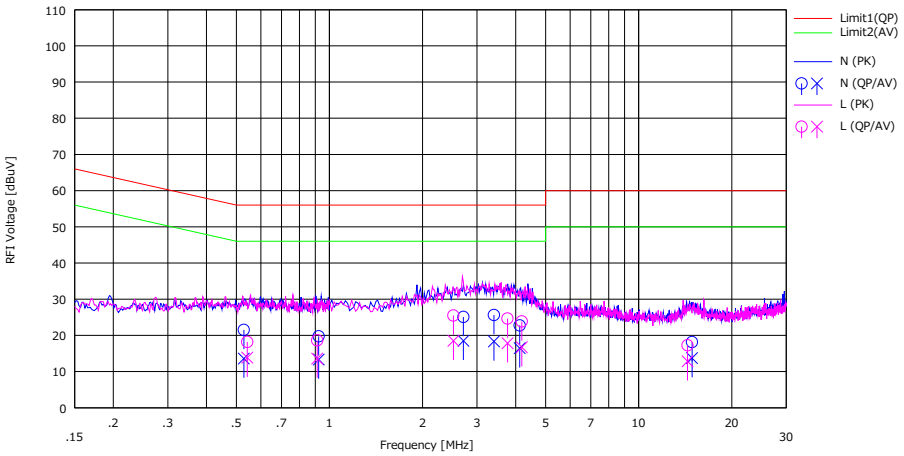

No.	Freq.	Reading		LISN	LOSS	Results		Limit		Margin		Phase	Comment
		(QP)	(AV)			(QP)	(AV)	(QP)	(AV)	(QP)	(AV)		
	[MHz]	[dBuV]	[dBuV]	[dB]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dB]	[dB]		
1	0.52853	8.40	0.50	0.06	13.04	21.50	13.60	56.00	46.00	34.50	32.40	N	
2	0.92324	6.60	0.20	0.08	13.06	19.74	13.34	56.00	46.00	36.26	32.66	N	
3	2.71200	11.90	5.30	0.10	13.11	25.11	18.51	56.00	46.00	30.89	27.49	N	
4	3.40538	12.40	5.10	0.11	13.13	25.64	18.34	56.00	46.00	30.36	27.66	N	
5	4.12384	9.50	3.20	0.12	13.14	22.76	16.46	56.00	46.00	33.24	29.54	N	
6	14.88200	4.50	0.10	0.34	13.30	18.14	13.74	60.00	50.00	41.86	36.26	N	
7	0.54256	5.10	0.80	0.04	13.04	18.18	13.88	56.00	46.00	37.82	32.12	L	
8	0.91285	5.50	0.50	0.05	13.06	18.61	13.61	56.00	46.00	37.39	32.39	L	
9	2.51692	12.30	5.30	0.08	13.11	25.49	18.49	56.00	46.00	30.51	27.51	L	
10	3.76459	11.40	4.60	0.10	13.14	24.64	17.84	56.00	46.00	31.36	28.16	L	
11	4.18829	10.60	3.50	0.11	13.14	23.85	16.75	56.00	46.00	32.15	29.25	L	
12	14.38240	3.60	-0.80	0.35	13.29	17.24	12.84	60.00	50.00	42.76	37.16	L	

CHART: WITH FACTOR Peak hold data. CALCULATION : RESULT = READING + C.F (LISN + CABLE + ATT)
Except for the above table: adequate margin data below the limits.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Duty Cycle, Off Time Requirement

Test place	Ise EMC Lab.
Semi Anechoic Chamber	Large
Date	February 27, 2024
Temperature / Humidity	20 deg. C / 46 % RH
Engineer	Nachi Konegawa
Mode	Tx Symbol Pattern A

Measured/ Declared	Tx ON +Tx OFF Time [ms]	Tx ON Time [ms]	Tx OFF Time [ms]	Duty Result [%]	Duty Factor [dB]	The ratio of Tx OFF Time Result [%]	Regulation Time [ms]	Tx OFF Time within Regulation Time Limit [ms]	The ratio of Tx OFF Time Limit [%]	Result
Measured	353.117	2.059	351.058	0.58	22.34	99.42	33.00	16.50	≧50	Pass
Declared *	360.000	2.048	357.952	0.57	22.45	99.43	-	-	-	-

Calculating formula:

Tx OFF Time = Tx ON + Tx OFF Time - Tx ON Time
Duty = (Tx ON Time / Tx ON + Tx OFF Time) * 100
Duty factor = 10 * log (Tx ON + Tx OFF Time / Tx ON Time)
The ratio of Tx OFF Time = (Tx OFF Time / Tx ON + Tx OFF Time) * 100

* See the application document.

Tx ON + Tx OFF Time

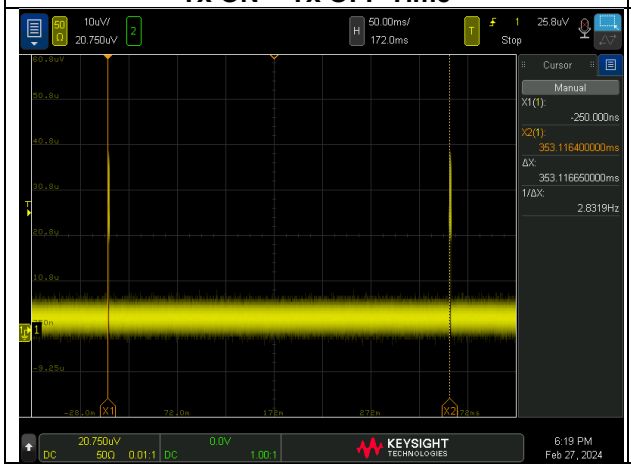

Tx ON Time

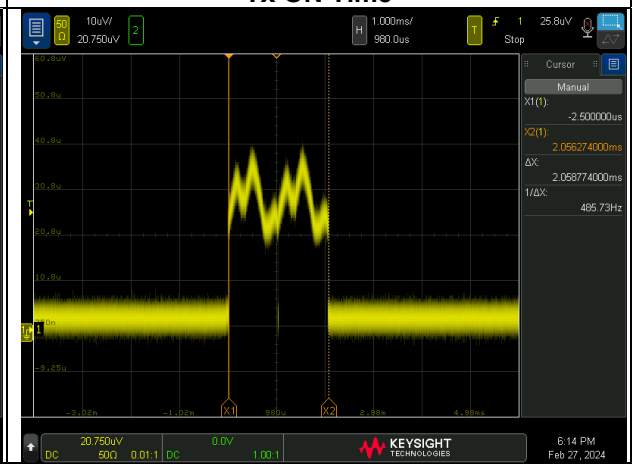

99 % Occupied Bandwidth

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	Large	No.4
Date	February 28, 2024	April 1, 2024
Temperature / Humidity	24 deg. C / 47 % RH	22 deg. C / 42 % RH
Engineer	Nachi Konegawa	Junki Nagatomi
Mode	Tx	

Symbol Pattern	Center Frequency [GHz]	Frequency error [MHz]	99% OBW [GHz]	99 % OBW The Lower frequency [GHz]	99 % OBW The Upper frequency [GHz]	Lower Limit [GHz]	Upper Limit [GHz]	Result
A	60.5	-24.528	4.9951	57.9779	62.9730	57	64	Pass
B	60.0	-14.998	4.0260	57.9720	61.9980			Pass
C	61.0	-125.516	4.2205	58.7642	62.9847			Pass
D	59.5	-16.643	3.0330	57.9669	60.9999			Pass
E	60.5	-288.193	3.5710	58.4263	61.9973			Pass

Calculation:
The Lower frequency = Center frequency + Frequency error - 99 % OBW / 2
The Upper frequency = Center frequency + Frequency error + 99 % OBW / 2

99 % Occupied Bandwidth

[Data]

Symbol Pattern A

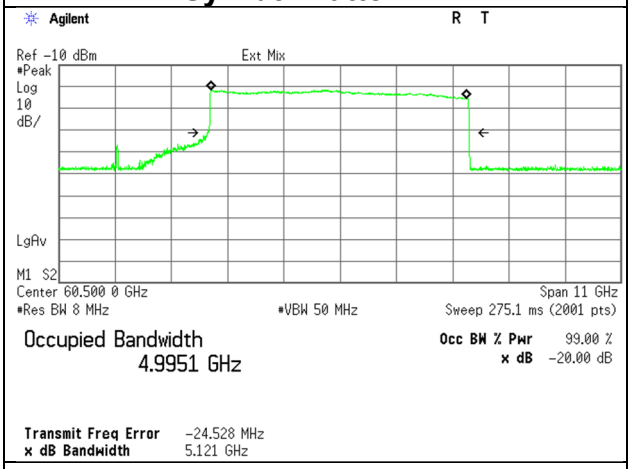

Symbol Pattern D

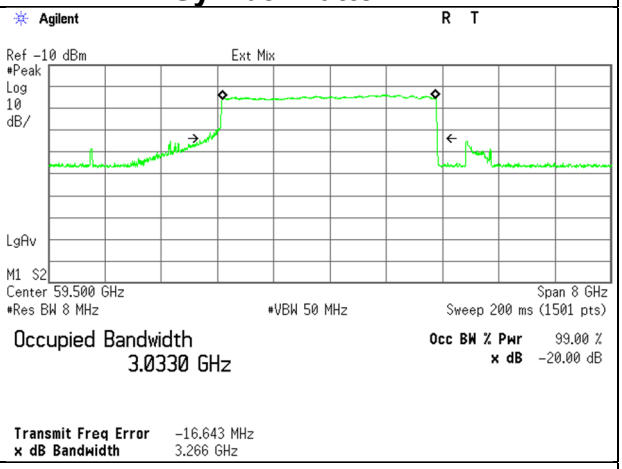

Symbol Pattern B

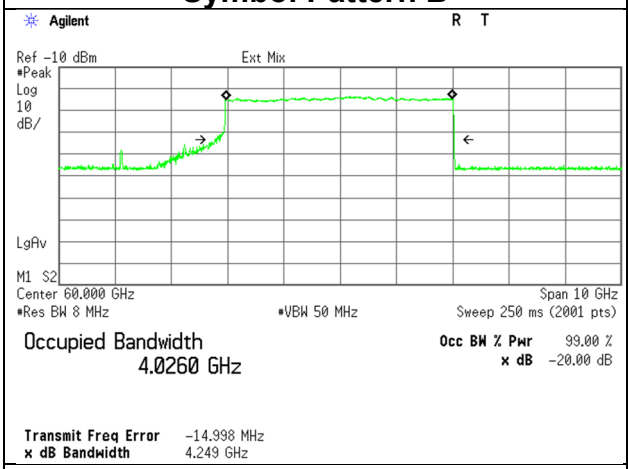

Symbol Pattern E

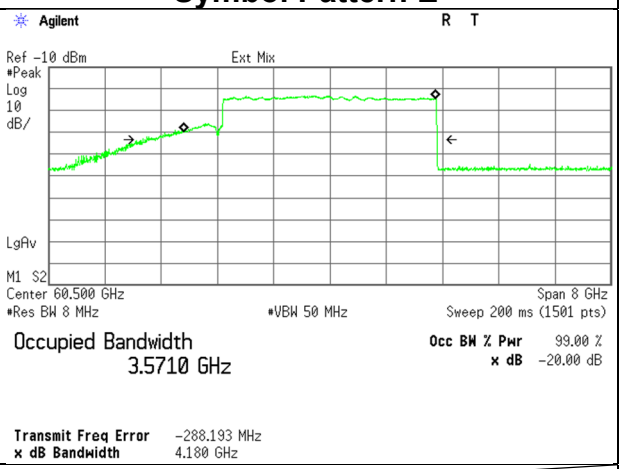

Symbol Pattern C

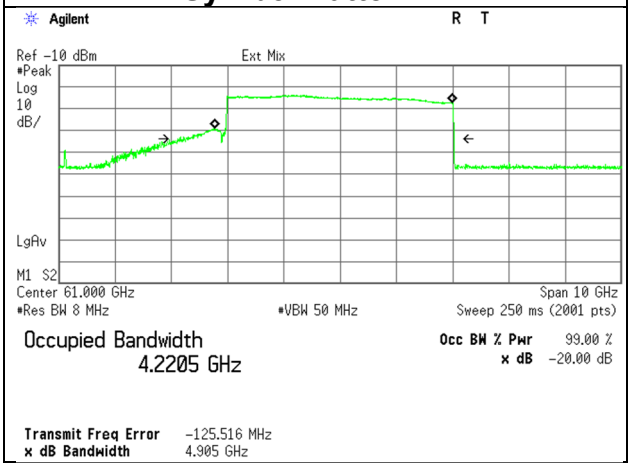

The measurement was performed with Peak detector and Max Hold since the duty cycle was not 100 %.

EIRP

Test place	Ise EMC Lab.
Semi Anechoic Chamber	Large
Date	February 29, 2024
Temperature / Humidity	20 deg. C / 44 % RH
Engineer	Junki Nagatomi
Mode	Tx

Symbol Pattern	Frequency [GHz]	Reading (Peak) [dBm]	Rx Ant. Gain [dBi]	LNA Gain [dB]	Mixer Conv. Loss [dB]	IF Amp. Gain [dB]	IF Cable Loss [dB]	Tested Distance [m]	FSL [dB]	FMCW Desensitization Factor [dB]	EIRP [dBm]	EIRP [mW]	Limit [dBm]	Margin [dB]
A	58.058	-24.12	23.58	25.97	45.97	32.03	0.10	0.75	65.22	-0.0025	5.59	3.62	20	14.41
B	58.000	-24.65	23.57	26.00	45.96	32.03	0.10	0.75	65.21	-0.0016	5.02	3.18	20	14.98
C	60.265	-25.77	23.70	25.28	45.80	32.03	0.10	0.75	65.54	-0.0018	4.67	2.93	20	15.33
D	58.005	-24.92	23.57	26.00	45.96	32.03	0.10	0.75	65.21	-0.0009	4.75	2.99	20	15.25
E	60.180	-25.05	23.69	25.31	45.77	32.03	0.10	0.75	65.53	-0.0013	5.32	3.40	20	14.68

Calculating formula:

FSL (Free Space path Loss) = 10 * log10((4 * Pi * Tested Distance / Lambda) ^2)

EIRP = Reading - Rx Ant. Gain - LNA Gain + Mixer Conv. Loss - IF Amp. gain + IF Cable loss + FSL - FMCW Desensitization Factor

EIRP

[Data]

Symbol pattern A

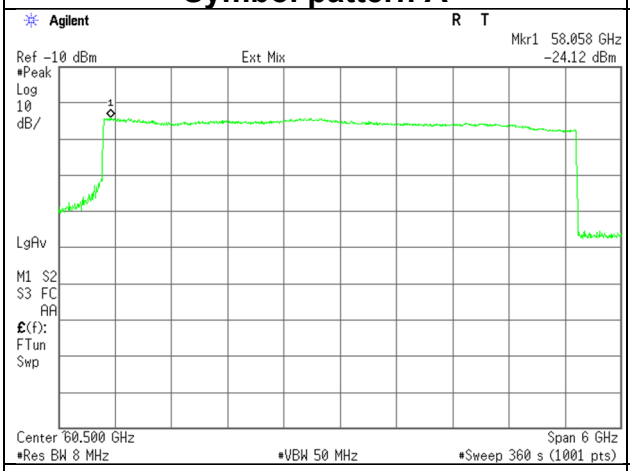

Symbol pattern D

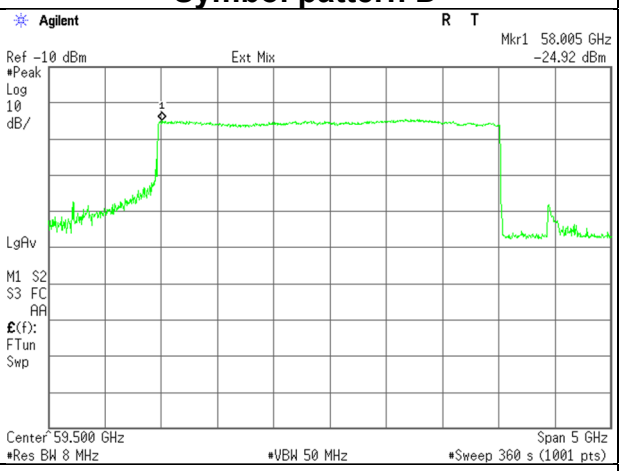

Symbol pattern B

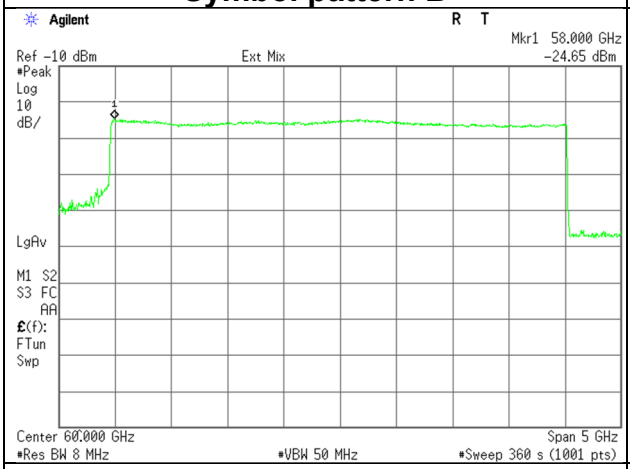

Symbol pattern E

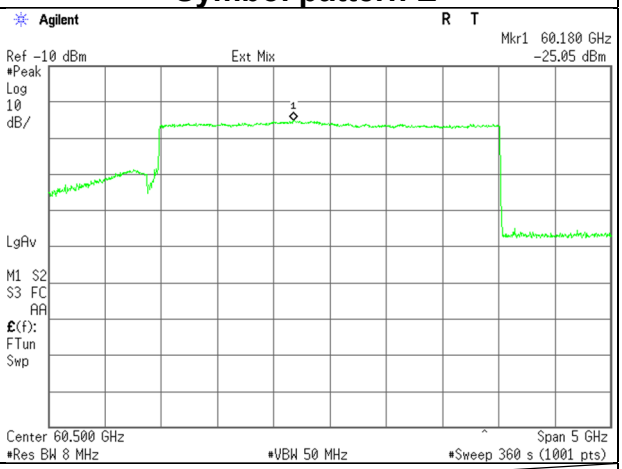

Symbol pattern C

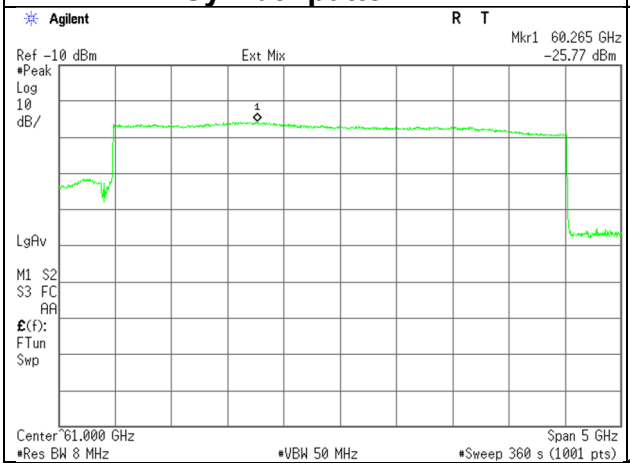

Spurious Emissions
(Below 40 GHz)

Test place	Ise EMC Lab.				
Semi Anechoic Chamber	No. 4	No. 1	No. 1	No. 4	No. 4
Date	March 4, 2024	March 5, 2024	March 5, 2024	March 6, 2024	March 7, 2024
Temperature / Humidity	22 deg. C / 48 % RH	20 deg. C / 44 % RH	23 deg. C / 47 % RH	20 deg. C / 42 % RH	21 deg. C / 49 % RH
Engineer	Nachi Konegawa	Junki Nagatomi	Nachi Konegawa	Junki Nagatomi	Nachi Konegawa
	(1 GHz to 10 GHz)	(18 GHz to 40 GHz)	(10 GHz to 18 GHz)	(9 kHz to 30 MHz)	(30 MHz to 1000 MHz)
Mode	Tx Symbol Pattern A				

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	32.3	23.3	-	17.8	7.0	32.1	-	16.0	-	68.2	-	52.2	-	
Hori.	157.7	19.7	-	15.4	8.4	32.0	-	11.4	-	68.2	-	56.8	-	
Hori.	192.3	20.3	-	16.5	8.7	32.0	-	13.5	-	68.2	-	54.7	-	
Hori.	236.0	24.6	-	11.5	9.0	32.0	-	13.1	-	46.0	-	32.9	-	
Hori.	406.5	20.3	-	15.9	10.1	32.1	-	14.2	-	68.2	-	54.0	-	
Hori.	621.3	20.1	-	19.4	11.3	32.3	-	18.6	-	68.2	-	49.7	-	
Vert.	32.3	23.3	-	17.8	7.0	32.1	-	16.0	-	68.2	-	52.2	-	
Vert.	157.7	19.7	-	15.4	8.4	32.0	-	11.4	-	68.2	-	56.8	-	
Vert.	192.3	22.9	-	16.5	8.7	32.0	-	16.1	-	43.5	-	27.5	-	
Vert.	236.0	23.2	-	11.5	9.0	32.0	-	11.7	-	46.0	-	34.3	-	
Vert.	406.5	20.3	-	15.9	10.1	32.1	-	14.2	-	68.2	-	54.0	-	
Vert.	621.3	20.1	-	19.4	11.3	32.3	-	18.6	-	68.2	-	49.7	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
*QP detector was used up to 1GHz.

Distance factor:	1 GHz - 10 GHz	20log (4 m / 3.0 m) = 2.5 dB
	10 GHz - 40 GHz	20log (1.0 m / 3.0 m) = -9.5 dB

[Plot data, Worst case]

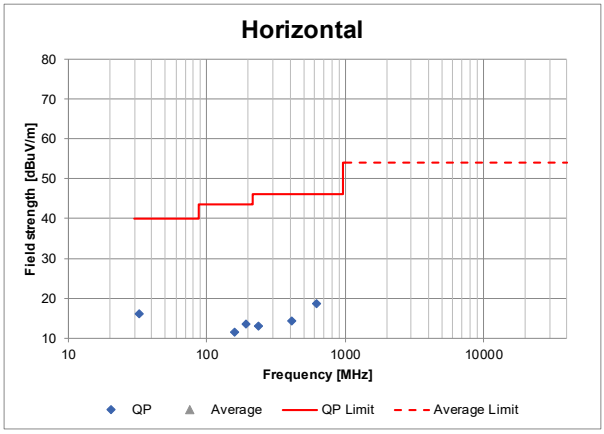

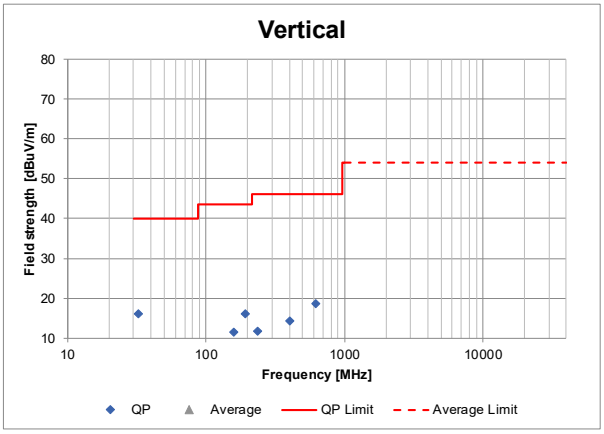

Spurious Emissions
(Above 40 GHz)

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	Large	Large	No.4
Date	February 27, 2024	March 1, 2024	April 2, 2024
Temperature / Humidity	20 deg. C / 46 % RH	20 deg. C / 45 % RH	20 deg. C / 47 % RH
Engineer	Nachi Konegawa	Yuichiro Yamazaki	Yuichiro Yamazaki
	(Above 110 GHz)	(40 GHz to 50 GHz, 71 GHz to 110 GHz)	(50 GHz to 57 GHz)
Mode	Tx Symbol Pattern A		

Freq. [GHz]	Reading (Peak) [dBm]	Rx Ant. Gain [dBi]	Filter Loss [dB]	LNA Gain [dB]	Mixer Conv. Loss [dB]	IF Amp. Gain [dB]	IF Cable Loss [dB]	Test Distance *D* [m]	FSL [dB]	EIRP [dBm]	EIRP [mW]	Power density Result at 3 m (Peak) [pW/cm^2]	Limit Average [pW/cm^2]	Margin Average [dB]	Remarks
41.217	-60.39	21.31	0.00	33.14	0.00	0.00	7.69	0.75	62.24	-44.90	0.000032	0.03	90	34.98	NS
48.261	-59.20	22.20	0.00	32.63	0.00	0.00	8.18	0.75	63.61	-42.23	0.000060	0.05	90	32.31	NS
52.033	-92.89	23.13	0.00	26.74	45.53	0.00	0.00	0.75	64.27	-32.96	0.000505	0.45	90	23.04	NS
56.152	-85.09	23.44	0.00	26.10	45.48	0.00	0.00	0.75	64.93	-24.22	0.003786	3.35	90	14.30	
72.500	-67.02	24.39	0.99	21.26	49.87	32.03	0.10	0.75	67.15	-26.59	0.002192	1.94	90	16.67	NS
80.432	-57.68	23.32	0.46	35.56	40.78	32.03	0.10	0.50	64.53	-42.72	0.000053	0.05	90	32.80	NS
86.593	-56.97	23.75	0.45	30.95	41.59	32.03	0.10	0.50	65.17	-36.39	0.000230	0.20	90	26.47	NS
95.848	-56.07	24.22	0.40	34.87	42.93	32.03	0.10	0.50	66.05	-37.71	0.000169	0.15	90	27.79	NS
97.331	-55.64	24.37	0.35	35.54	43.19	32.03	0.10	0.50	66.19	-37.75	0.000168	0.15	90	27.83	NS
108.197	-56.40	24.75	0.88	23.13	43.66	32.03	0.10	0.50	67.11	-24.57	0.003493	3.09	90	14.64	NS
110.535	-84.40	22.31	0.00	16.51	65.74	0.00	0.00	0.01	33.31	-24.17	0.003831	3.39	90	14.24	NS
119.887	-84.75	22.64	0.00	18.47	50.61	0.00	0.00	0.01	34.02	-41.23	0.000075	0.07	90	31.31	NS
121.845	-85.44	22.70	0.00	20.79	48.23	0.00	0.00	0.01	34.16	-46.54	0.000022	0.02	90	36.62	NS
129.079	-85.93	22.92	0.00	20.03	52.23	0.00	0.00	0.01	34.66	-41.99	0.000063	0.06	90	32.07	NS
132.075	-86.13	23.00	0.00	19.01	50.93	0.00	0.00	0.01	34.86	-42.35	0.000058	0.05	90	32.43	NS
141.568	-87.48	23.21	0.00	18.80	53.34	0.00	0.00	0.01	35.46	-40.69	0.000085	0.08	90	30.77	NS
151.801	-89.12	23.34	0.00	17.40	55.10	0.00	0.00	0.01	36.07	-38.69	0.000135	0.12	90	28.76	NS
159.974	-89.23	23.39	0.00	16.44	58.72	0.00	0.00	0.01	36.52	-33.82	0.000415	0.37	90	23.90	NS
166.110	-89.22	23.41	0.00	13.98	59.57	0.00	0.00	0.01	36.85	-30.19	0.000958	0.85	90	20.27	NS
173.738	-85.41	22.48	0.00	0.00	57.18	0.00	0.00	0.01	37.24	-13.47	0.044933	39.73	90	3.55	NS
178.354	-85.56	22.59	0.00	0.00	56.85	0.00	0.00	0.01	37.47	-13.83	0.041366	36.58	90	3.91	NS
188.078	-85.86	22.80	0.00	0.00	57.42	0.00	0.00	0.01	37.93	-13.31	0.046629	41.23	90	3.39	NS
195.147	-87.54	22.94	0.00	0.00	58.41	0.00	0.00	0.01	38.25	-13.82	0.041534	36.72	90	3.89	NS

Calculation:

FSL (Free Space path Loss) = 10 * log ((4 * Pi * D / λ)^2)

EIRP = Reading - Rx Ant. gain + Filter loss - LNA gain + Mixer conversion loss - IF Amp. gain + IF Cable loss + FSL

Power density Result at 3 m = EIRP / (4 * Pi * 300^2)

These calculation results are same as results which were calculated with formulas described in the Section 9 of ANSI C63.10-2013.

The equipment were not used for factor 0 dB of the data sheets.
The IF Cable loss is included in Mixer loss, so the factor of data sheet were 0 dB.

NS: No signal detected.

[Plot data, Worst case]

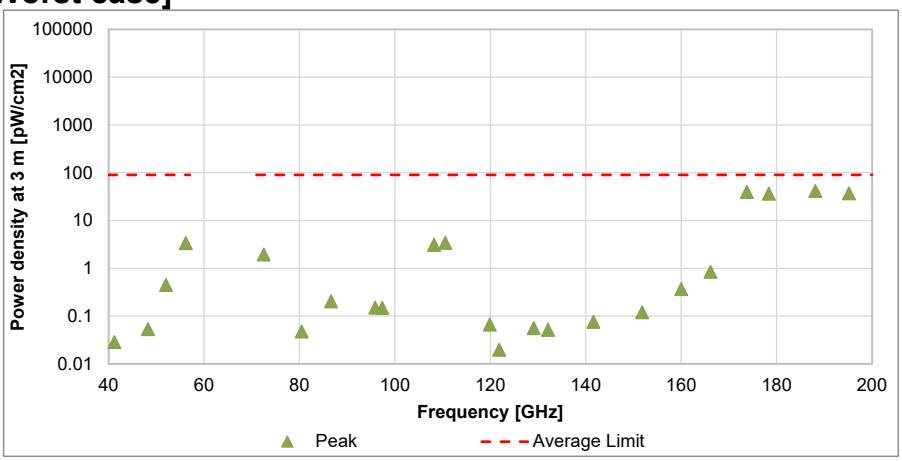

*The peak result is less than the average limit.

Frequency Stability

Test place	Ise EMC Lab. No. 6 Measurement Room	
Date	March 25, 2024	March 26, 2024
Temperature / Humidity	23 deg. C / 49 % RH	23 deg. C / 51 % RH
Engineer	Yuichiro Yamazaki	Yuichiro Yamazaki
Mode	Tx Symbol Pattern A	

Test Condition		Center	Frequency	99%	99 % OBW		Remarks
Temperature [deg. C]	Power Supply [V]	frequency [GHz]	error [MHz]	OBW [GHz]	The Lower frequency [GHz]	The Upper frequency [GHz]	
50	24.0	60.5	-21.206	5.0077	57.9749	62.9826	
40	24.0	60.5	-19.805	5.0050	57.9777	62.9827	
30	24.0	60.5	-12.901	4.9920	57.9911	62.9831	
20	24.0	60.5	-18.504	5.0041	57.9794	62.9835	
20	20.4	60.5	-19.255	5.0039	57.9788	62.9827	85 % of the rated voltage, DC 24 V * 0.85
20	27.6	60.5	-20.272	5.0041	57.9777	62.9818	115 % of the rated voltage, DC 24 V * 1.15
10	24.0	60.5	-17.628	5.0095	57.9776	62.9871	
0	24.0	60.5	-15.985	5.0021	57.9830	62.9851	
-10	24.0	60.5	-19.071	5.0010	57.9804	62.9814	
-20	24.0	60.5	-23.934	5.0154	57.9684	62.9838	

Calculation:
The Lower frequency = Center frequency + Frequency error - 99 % OBW / 2
The Upper frequency = Center frequency + Frequency error + 99 % OBW / 2

Fundamental emissions were contained within the frequency band 57 GHz to 64 GHz during all conditions of operation.

Frequency Stability

[Data]

50 deg. C, DC 24.0 V

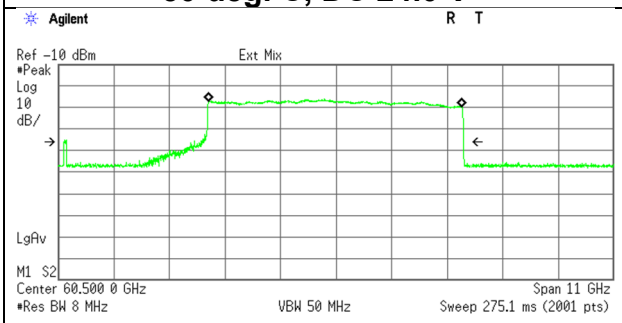

Occupied Bandwidth
5.0077 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -21.206 MHz
x dB Bandwidth 7.907 GHz

40 deg. C, DC 24.0 V

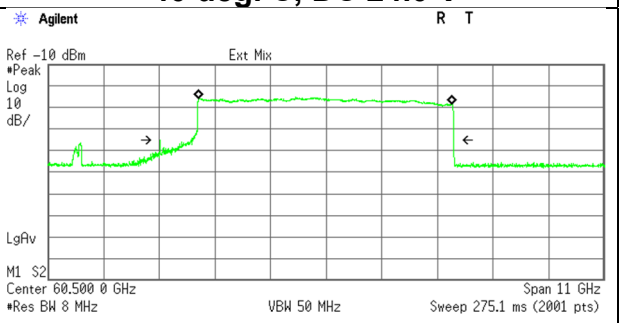

Occupied Bandwidth
5.0050 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -19.805 MHz
x dB Bandwidth 5.804 GHz

30 deg. C, DC 24.0 V

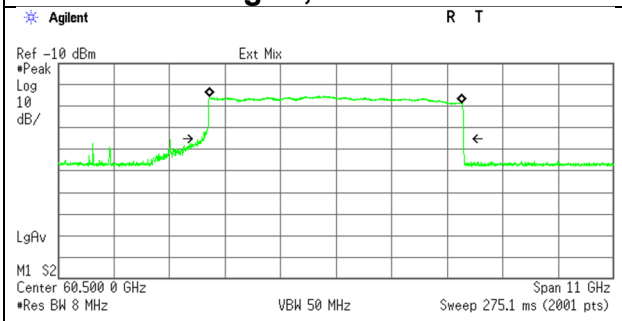

Occupied Bandwidth
4.9920 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -12.901 MHz
x dB Bandwidth 5.179 GHz

20 deg. C, DC 24.0 V

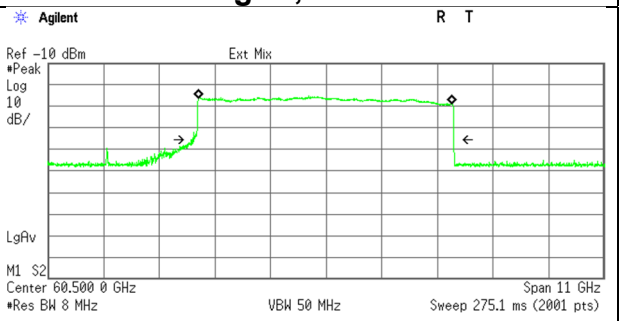

Occupied Bandwidth
5.0041 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -18.504 MHz
x dB Bandwidth 5.159 GHz

20 deg. C, DC 20.4 V

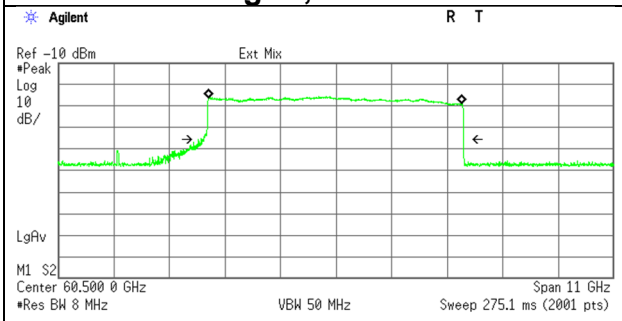

Occupied Bandwidth
5.0039 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -19.255 MHz
x dB Bandwidth 5.193 GHz

20 deg. C, DC 27.6 V

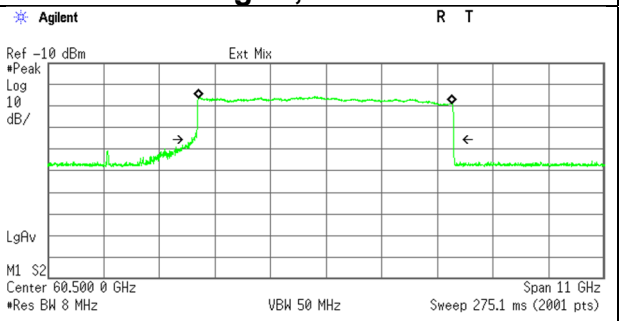

Occupied Bandwidth
5.0041 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -20.272 MHz
x dB Bandwidth 5.177 GHz

Frequency Stability

[Data]

10 deg. C, DC 24.0 V

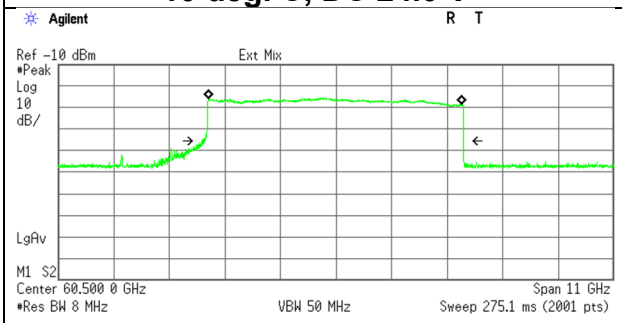

Occupied Bandwidth
5.0095 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -17.628 MHz
x dB Bandwidth 5.172 GHz

0 deg. C, DC 24.0 V

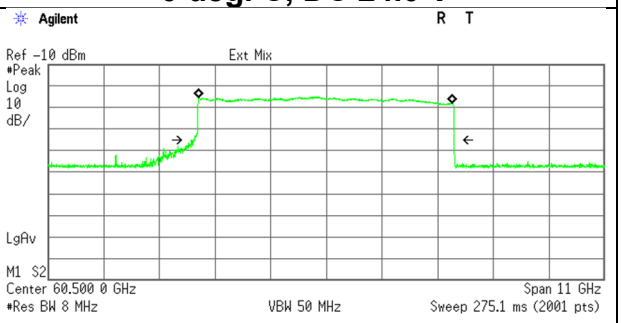

Occupied Bandwidth
5.0021 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -15.985 MHz
x dB Bandwidth 5.194 GHz

-10 deg. C, DC 24.0 V

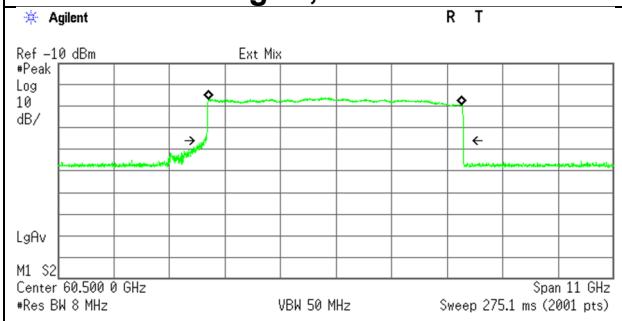

Occupied Bandwidth
5.0010 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -19.071 MHz
x dB Bandwidth 5.132 GHz

-20 deg. C, DC 24.0 V

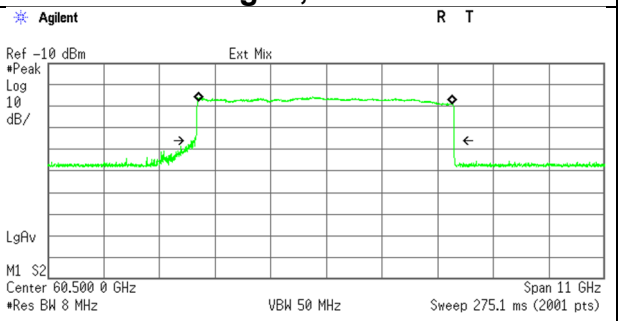

Occupied Bandwidth
5.0154 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -23.934 MHz
x dB Bandwidth 5.154 GHz

Frequency Stability

Test place	Ise EMC Lab. No. 6 Measurement Room	
Date	March 25, 2024	March 26, 2024
Temperature / Humidity	23 deg. C / 49 % RH	23 deg. C / 51 % RH
Engineer	Yuichiro Yamazaki	Yuichiro Yamazaki
Mode	Tx Symbol Pattern B	

Test Condition		Center frequency	Frequency error	99% OBW	99 % OBW		Remarks
Temperature [deg. C]	Power Supply [V]	[GHz]	[MHz]	[GHz]	The Lower frequency [GHz]	The Upper frequency [GHz]	
50	24.0	60.0	-14.733	4.0238	57.9734	61.9972	
40	24.0	60.0	-16.341	4.0261	57.9706	61.9967	
30	24.0	60.0	-15.061	4.0159	57.9770	61.9929	
20	24.0	60.0	-14.568	4.0199	57.9755	61.9954	
20	20.4	60.0	-13.643	4.0191	57.9768	61.9959	85 % of the rated voltage, DC 24 V * 0.85
20	27.6	60.0	-13.839	4.0202	57.9761	61.9963	115 % of the rated voltage, DC 24 V * 1.15
10	24.0	60.0	-14.129	4.0202	57.9758	61.9960	
0	24.0	60.0	-13.714	4.0193	57.9766	61.9959	
-10	24.0	60.0	-12.725	4.0214	57.9766	61.9980	
-20	24.0	60.0	-12.802	4.0227	57.9758	61.9985	

Calculation:
The Lower frequency = Center frequency + Frequency error - 99 % OBW / 2
The Upper frequency = Center frequency + Frequency error + 99 % OBW / 2

Fundamental emissions were contained within the frequency band 57 GHz to 64 GHz during all conditions of operation.

Frequency Stability

[Data]

50 deg. C, DC 24.0 V

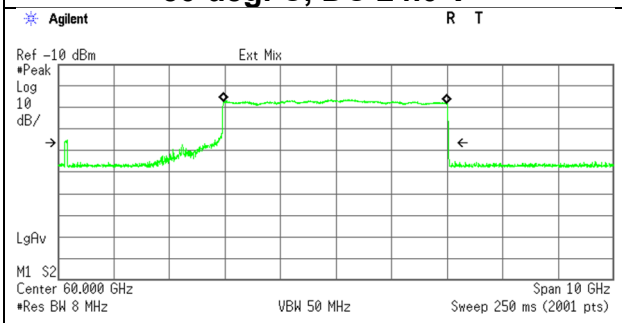

Occupied Bandwidth
4.0238 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -14.733 MHz
x dB Bandwidth 6.901 GHz

40 deg. C, DC 24.0 V

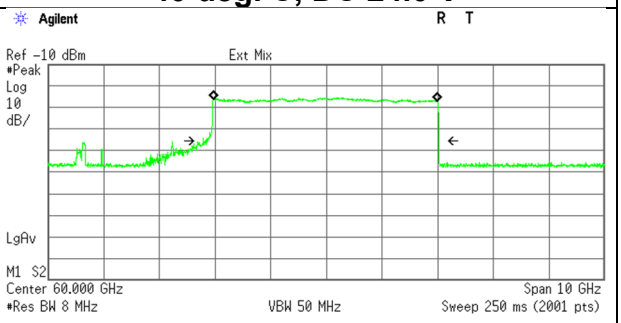

Occupied Bandwidth
4.0261 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -16.341 MHz
x dB Bandwidth 4.237 GHz

30 deg. C, DC 24.0 V

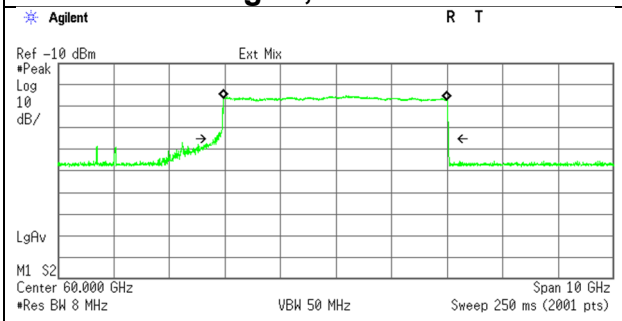

Occupied Bandwidth
4.0159 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -15.061 MHz
x dB Bandwidth 4.203 GHz

20 deg. C, DC 24.0 V

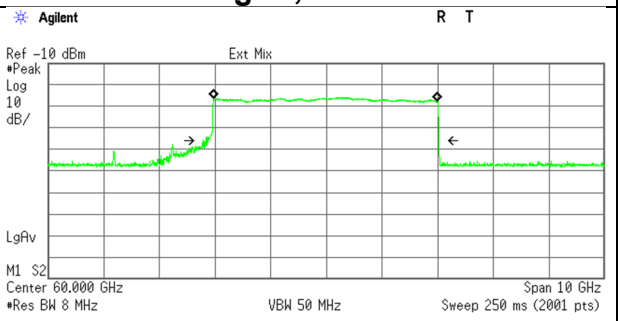

Occupied Bandwidth
4.0199 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -14.568 MHz
x dB Bandwidth 4.240 GHz

20 deg. C, DC 20.4 V

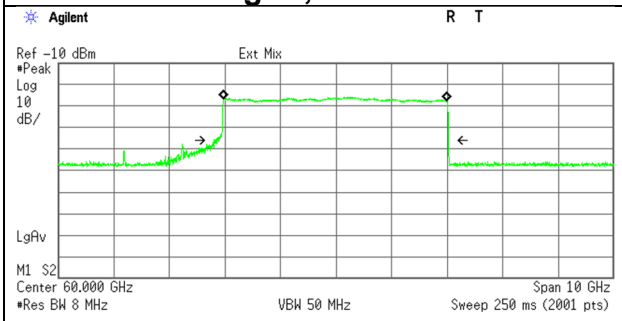

Occupied Bandwidth
4.0191 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -13.643 MHz
x dB Bandwidth 4.211 GHz

20 deg. C, DC 27.6 V

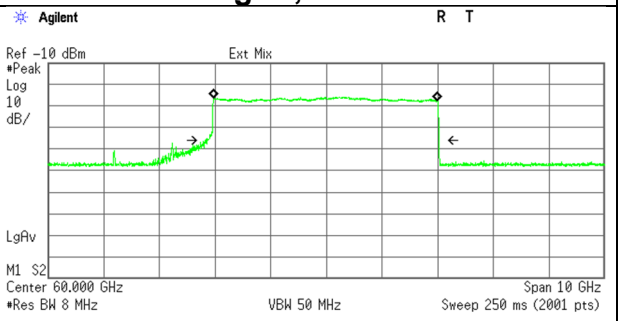

Occupied Bandwidth
4.0202 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -13.839 MHz
x dB Bandwidth 4.180 GHz

Frequency Stability

[Data]

10 deg. C, DC 24.0 V

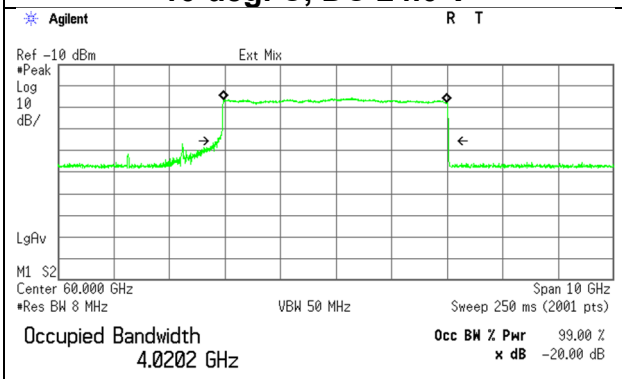

0 deg. C, DC 24.0 V

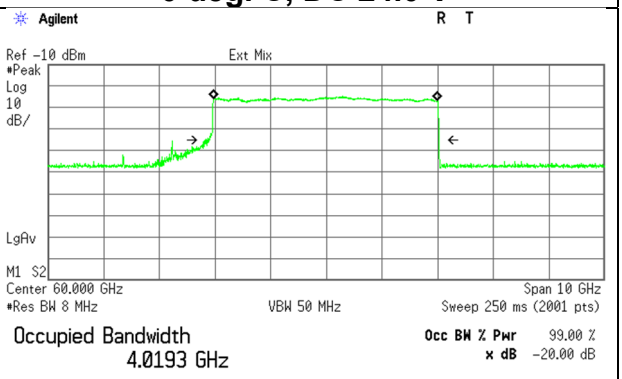

-10 deg. C, DC 24.0 V

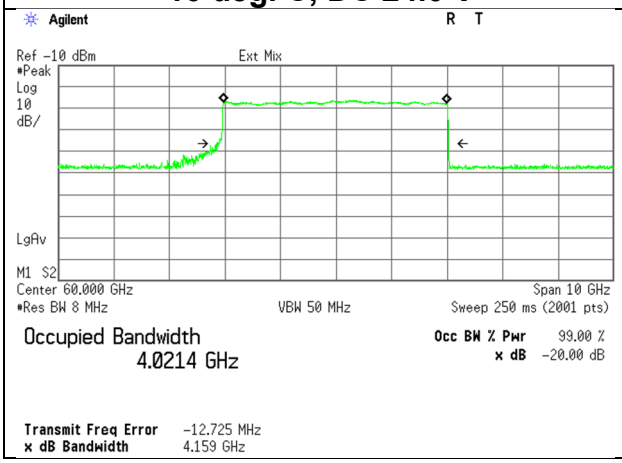

-20 deg. C, DC 24.0 V

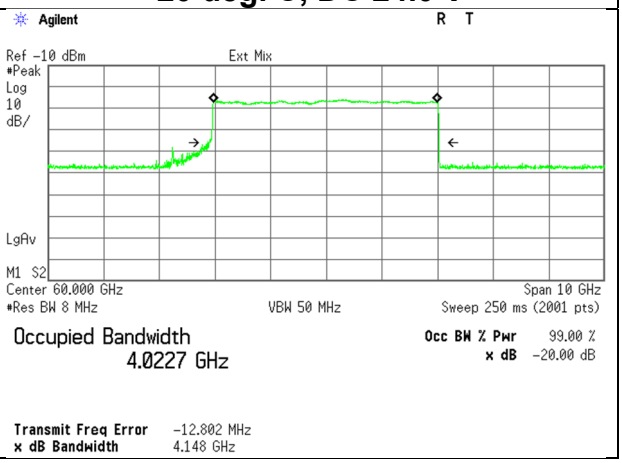

Frequency Stability

Test place	Ise EMC Lab. No. 6 Measurement Room	
Date	March 25, 2024	March 26, 2024
Temperature / Humidity	23 deg. C / 49 % RH	23 deg. C / 51 % RH
Engineer	Yuichiro Yamazaki	Yuichiro Yamazaki
Mode	Tx Symbol Pattern C	

Test Condition		Center frequency	Frequency error	99% OBW	99 % OBW		Remarks
Temperature [deg. C]	Power Supply [V]	[GHz]	[MHz]	[GHz]	The Lower frequency [GHz]	The Upper frequency [GHz]	
50	24.0	61.0	-302.986	4.5853	58.4044	62.9897	
40	24.0	61.0	-263.343	4.5053	58.4840	62.9893	
30	24.0	61.0	-242.451	4.4611	58.5270	62.9881	
20	24.0	61.0	-191.193	4.3586	58.6295	62.9881	
20	20.4	61.0	-186.276	4.3458	58.6408	62.9866	85 % of the rated voltage, DC 24 V * 0.85
20	27.6	61.0	-188.114	4.3590	58.6324	62.9914	115 % of the rated voltage, DC 24 V * 1.15
10	24.0	61.0	-162.321	4.3004	58.6875	62.9879	
0	24.0	61.0	-129.567	4.2343	58.7533	62.9876	
-10	24.0	61.0	-99.149	4.1745	58.8136	62.9881	
-20	24.0	61.0	-69.723	4.1177	58.8714	62.9891	

Calculation:
The Lower frequency = Center frequency + Frequency error - 99 % OBW / 2
The Upper frequency = Center frequency + Frequency error + 99 % OBW / 2

Fundamental emissions were contained within the frequency band 57 GHz to 64 GHz during all conditions of operation.

Frequency Stability

[Data]

50 deg. C, DC 24.0 V

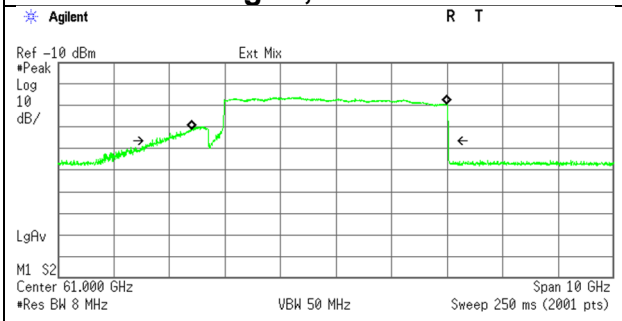

Occupied Bandwidth
4.5853 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -302.986 MHz
x dB Bandwidth 5.328 GHz

40 deg. C, DC 24.0 V

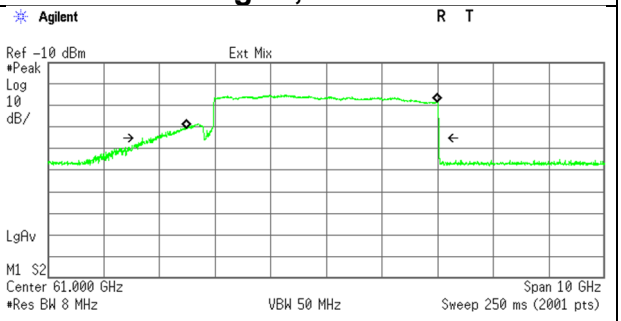

Occupied Bandwidth
4.5053 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -263.343 MHz
x dB Bandwidth 5.323 GHz

30 deg. C, DC 24.0 V

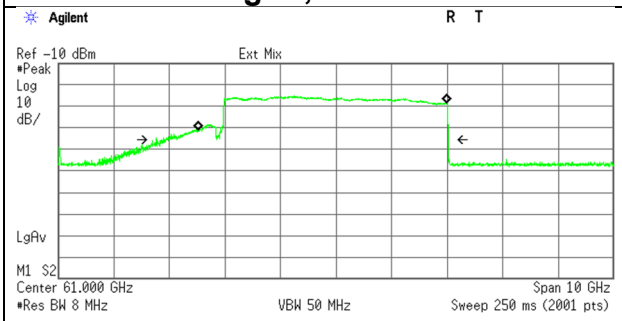

Occupied Bandwidth
4.4611 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -242.451 MHz
x dB Bandwidth 5.261 GHz

20 deg. C, DC 24.0 V

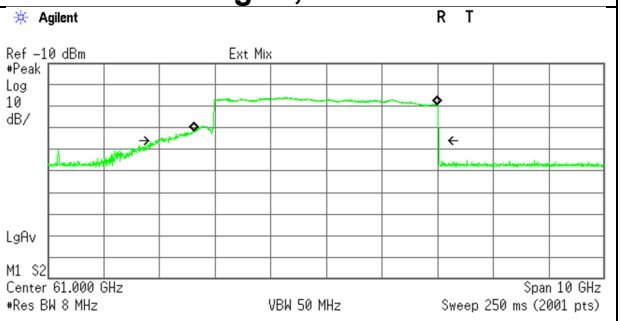

Occupied Bandwidth
4.3586 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -191.193 MHz
x dB Bandwidth 5.046 GHz

20 deg. C, DC 20.4 V

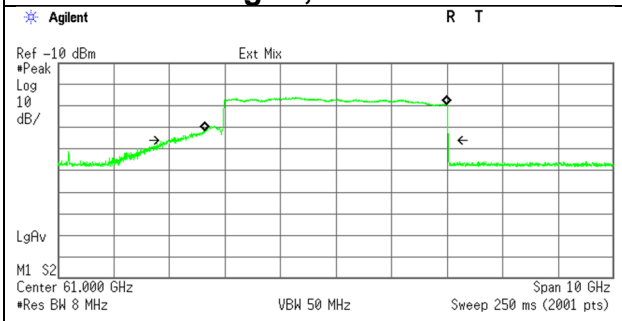

Occupied Bandwidth
4.3458 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -186.276 MHz
x dB Bandwidth 5.040 GHz

20 deg. C, DC 27.6 V

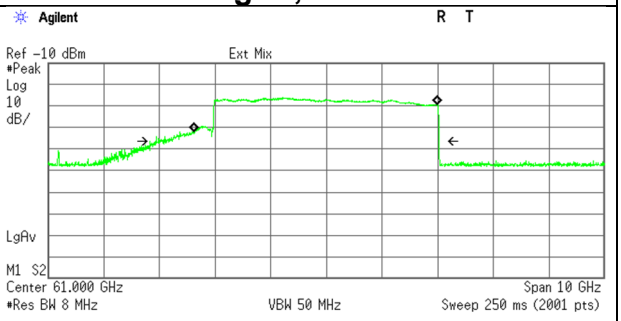

Occupied Bandwidth
4.3590 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -188.114 MHz
x dB Bandwidth 5.078 GHz

Frequency Stability

[Data]

10 deg. C, DC 24.0 V

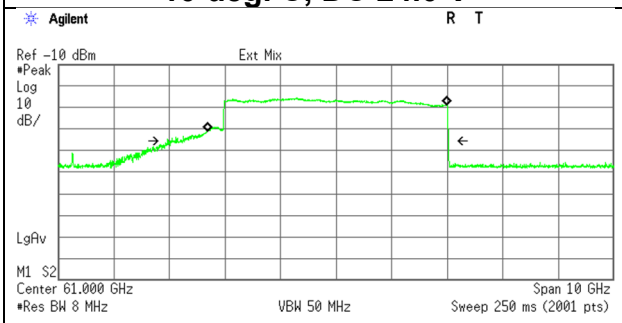

Occupied Bandwidth
4.3004 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -162.321 MHz
x dB Bandwidth 5.053 GHz

0 deg. C, DC 24.0 V

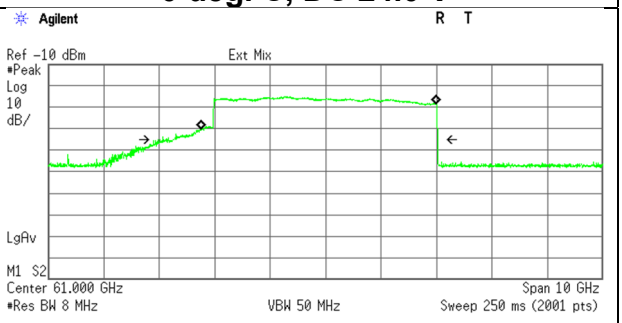

Occupied Bandwidth
4.2343 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -129.567 MHz
x dB Bandwidth 5.045 GHz

-10 deg. C, DC 24.0 V

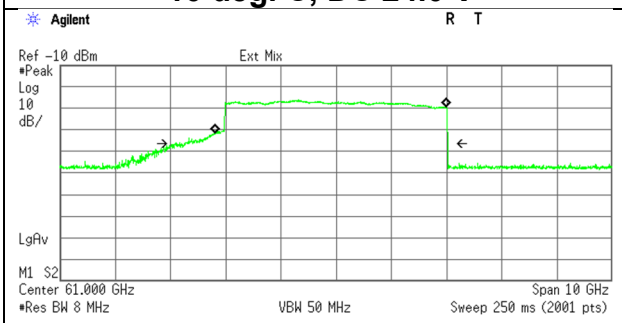

Occupied Bandwidth
4.1745 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -99.149 MHz
x dB Bandwidth 4.917 GHz

-20 deg. C, DC 24.0 V

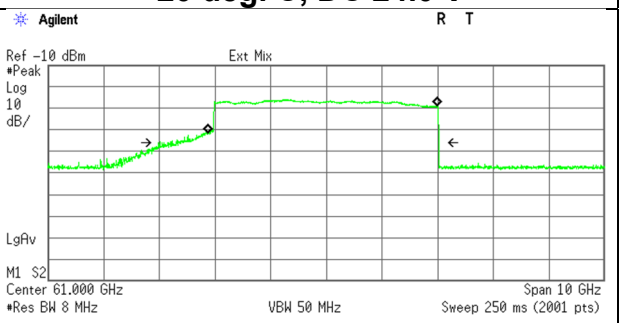

Occupied Bandwidth
4.1177 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -69.723 MHz
x dB Bandwidth 5.008 GHz

Frequency Stability

Test place	Ise EMC Lab. No. 6 Measurement Room	
Date	March 25, 2024	March 26, 2024
Temperature / Humidity	23 deg. C / 49 % RH	23 deg. C / 51 % RH
Engineer	Yuichiro Yamazaki	Yuichiro Yamazaki
Mode	Tx Symbol Pattern D	

Test Condition		Center frequency	Frequency error	99% OBW	99 % OBW		Remarks
Temperature [deg. C]	Power Supply [V]	[GHz]	[MHz]	[GHz]	The Lower frequency [GHz]	The Upper frequency [GHz]	
50	24.0	59.5	-15.978	3.0337	57.9672	61.0009	
40	24.0	59.5	-17.163	3.0301	57.9678	60.9979	
30	24.0	59.5	-10.126	3.0219	57.9789	61.0008	
20	24.0	59.5	-14.585	3.0274	57.9717	60.9991	
20	20.4	59.5	-14.206	3.0276	57.9720	60.9996	85 % of the rated voltage, DC 24 V * 0.85
20	27.6	59.5	-15.018	3.0278	57.9711	60.9989	115 % of the rated voltage, DC 24 V * 1.15
10	24.0	59.5	-15.172	3.0289	57.9704	60.9993	
0	24.0	59.5	-14.410	3.0277	57.9717	60.9994	
-10	24.0	59.5	-12.383	3.0280	57.9736	61.0016	
-20	24.0	59.5	-13.937	3.0310	57.9706	61.0016	

Calculation:
The Lower frequency = Center frequency + Frequency error - 99 % OBW / 2
The Upper frequency = Center frequency + Frequency error + 99 % OBW / 2

Fundamental emissions were contained within the frequency band 57 GHz to 64 GHz during all conditions of operation.

Frequency Stability

[Data]

50 deg. C, DC 24.0 V

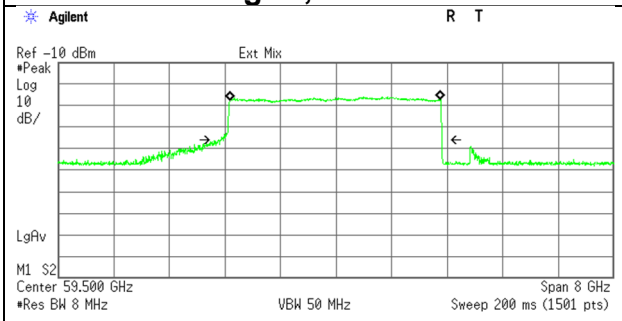

Occupied Bandwidth
3.0337 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -15.978 MHz
x dB Bandwidth 3.213 GHz

40 deg. C, DC 24.0 V

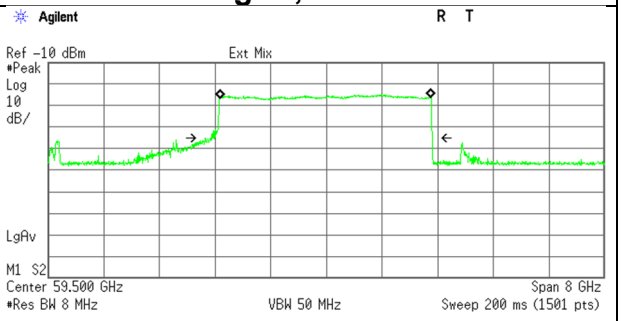

Occupied Bandwidth
3.0301 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -17.163 MHz
x dB Bandwidth 3.259 GHz

30 deg. C, DC 24.0 V

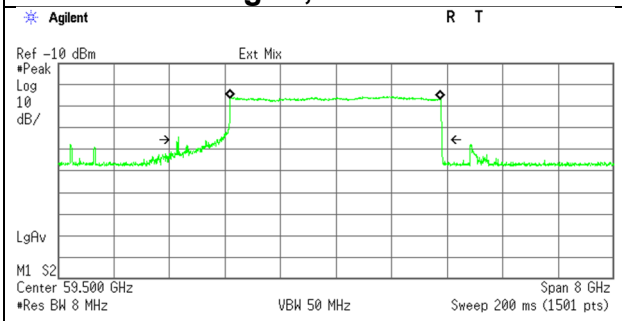

Occupied Bandwidth
3.0219 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -10.126 MHz
x dB Bandwidth 3.796 GHz

20 deg. C, DC 24.0 V

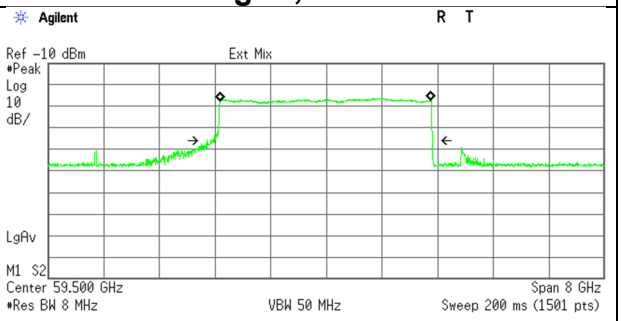

Occupied Bandwidth
3.0274 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -14.585 MHz
x dB Bandwidth 3.234 GHz

20 deg. C, DC 20.4 V

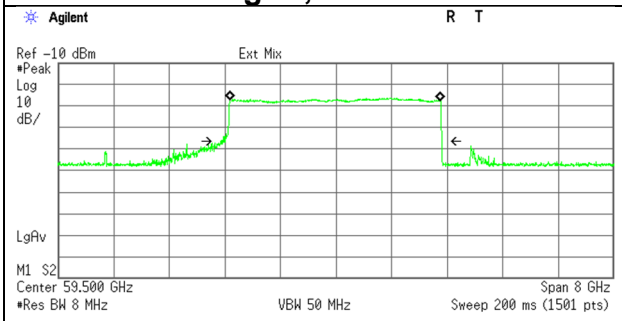

Occupied Bandwidth
3.0276 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -14.206 MHz
x dB Bandwidth 3.181 GHz

20 deg. C, DC 27.6 V

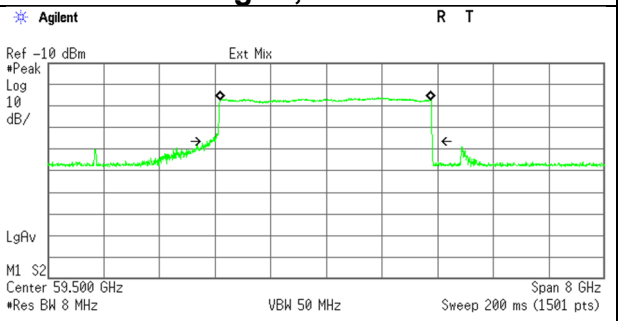

Occupied Bandwidth
3.0278 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -15.018 MHz
x dB Bandwidth 3.191 GHz

Frequency Stability

[Data]

10 deg. C, DC 24.0 V

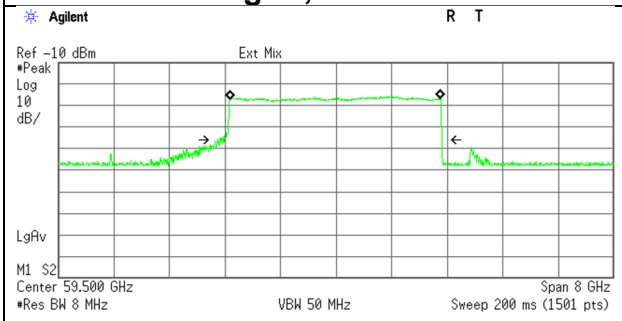

Occupied Bandwidth
3.0289 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -15.172 MHz
x dB Bandwidth 3.225 GHz

0 deg. C, DC 24.0 V

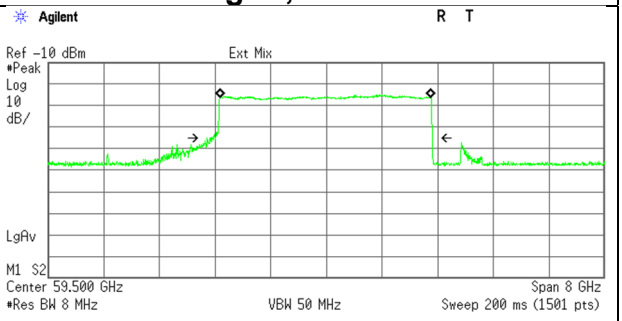

Occupied Bandwidth
3.0277 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -14.410 MHz
x dB Bandwidth 3.233 GHz

-10 deg. C, DC 24.0 V

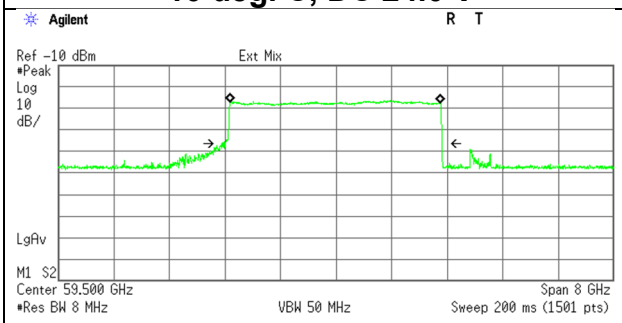

Occupied Bandwidth
3.0280 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -12.383 MHz
x dB Bandwidth 3.155 GHz

-20 deg. C, DC 24.0 V

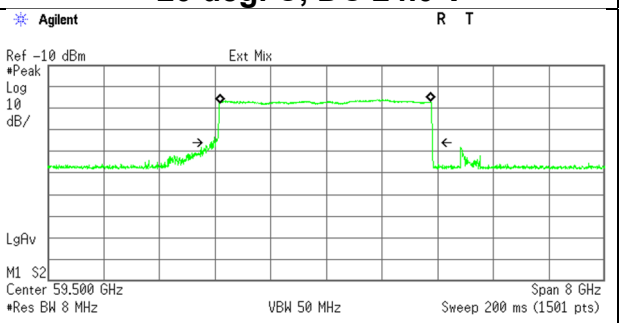

Occupied Bandwidth
3.0310 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -13.937 MHz
x dB Bandwidth 3.165 GHz

Frequency Stability

Test place	Ise EMC Lab. No. 6 Measurement Room	
Date	March 25, 2024	March 26, 2024
Temperature / Humidity	23 deg. C / 49 % RH	23 deg. C / 51 % RH
Engineer	Yuichiro Yamazaki	Yuichiro Yamazaki
Mode	Tx Symbol Pattern E	

Test Condition		Center frequency	Frequency error	99% OBW	99 % OBW		Remarks
Temperature [deg. C]	Power Supply [V]	[GHz]	[MHz]	[GHz]	The Lower frequency [GHz]	The Upper frequency [GHz]	
50	24.0	60.5	-336.956	3.6667	58.3297	61.9964	
40	24.0	60.5	-303.867	3.6006	58.3958	61.9964	
30	24.0	60.5	-300.245	3.5963	58.4016	61.9979	
20	24.0	60.5	-240.322	3.4784	58.5205	61.9989	
20	20.4	60.5	-258.432	3.5090	58.4871	61.9961	85 % of the rated voltage, DC 24 V * 0.85
20	27.6	60.5	-241.217	3.4755	58.5210	61.9965	115 % of the rated voltage, DC 24 V * 1.15
10	24.0	60.5	-220.354	3.4313	58.5640	61.9953	
0	24.0	60.5	-180.337	3.3529	58.6432	61.9961	
-10	24.0	60.5	-156.895	3.3170	58.6846	62.0016	
-20	24.0	60.5	-114.717	3.2245	58.7730	61.9975	

Calculation:
The Lower frequency = Center frequency + Frequency error - 99 % OBW / 2
The Upper frequency = Center frequency + Frequency error + 99 % OBW / 2

Fundamental emissions were contained within the frequency band 57 GHz to 64 GHz during all conditions of operation.

Frequency Stability

[Data]

50 deg. C, DC 24.0 V

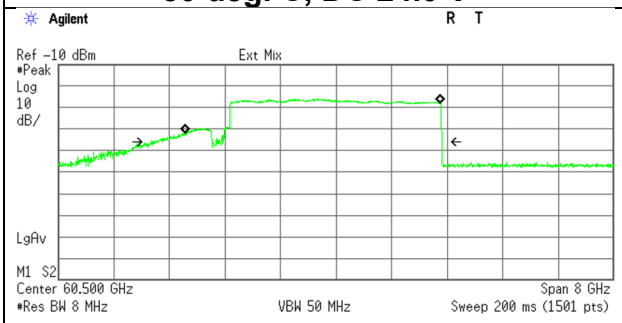

Occupied Bandwidth
3.6667 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -336.956 MHz
x dB Bandwidth 4.176 GHz

40 deg. C, DC 24.0 V

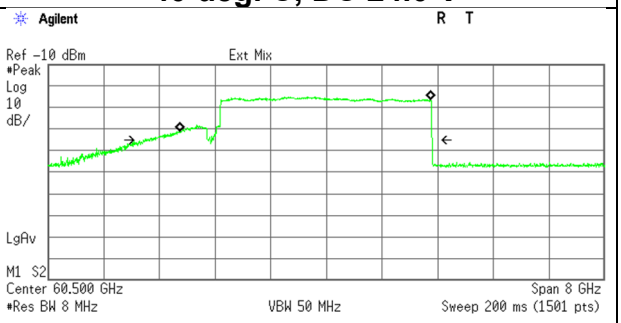

Occupied Bandwidth
3.6006 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -303.867 MHz
x dB Bandwidth 4.154 GHz

30 deg. C, DC 24.0 V

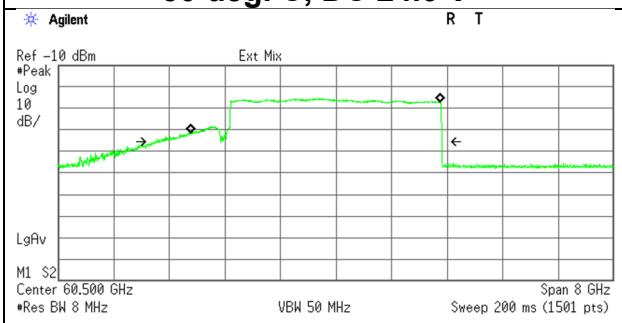

Occupied Bandwidth
3.5963 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -300.245 MHz
x dB Bandwidth 4.120 GHz

20 deg. C, DC 24.0 V

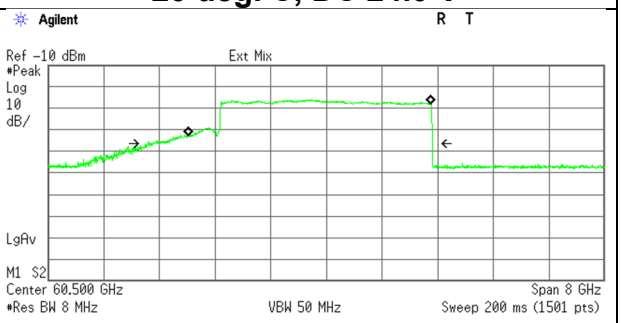

Occupied Bandwidth
3.4784 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -240.322 MHz
x dB Bandwidth 4.080 GHz

20 deg. C, DC 20.4 V

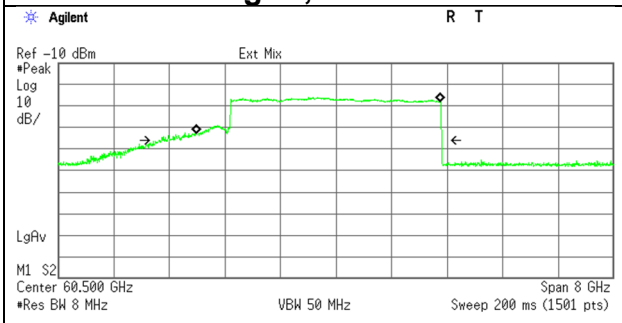

Occupied Bandwidth
3.5090 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -258.432 MHz
x dB Bandwidth 4.072 GHz

20 deg. C, DC 27.6 V

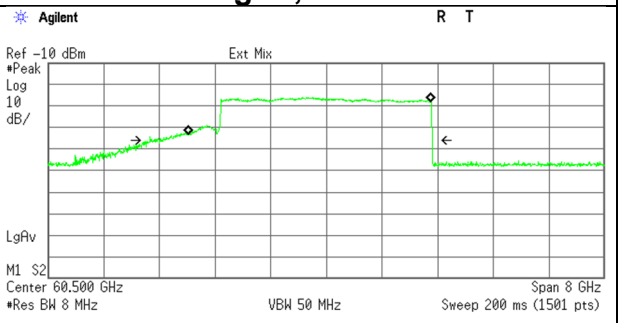

Occupied Bandwidth
3.4755 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -241.217 MHz
x dB Bandwidth 4.054 GHz

Frequency Stability

[Data]

10 deg. C, DC 24.0 V

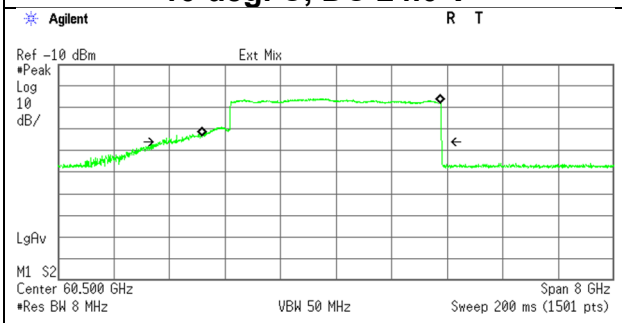

Occupied Bandwidth
3.4313 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -220.354 MHz
x dB Bandwidth 4.014 GHz

0 deg. C, DC 24.0 V

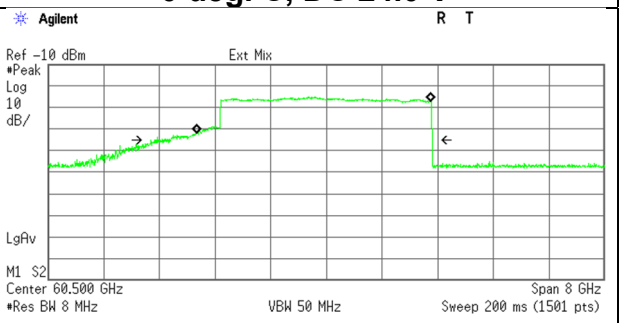

Occupied Bandwidth
3.3529 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -180.337 MHz
x dB Bandwidth 4.040 GHz

-10 deg. C, DC 24.0 V

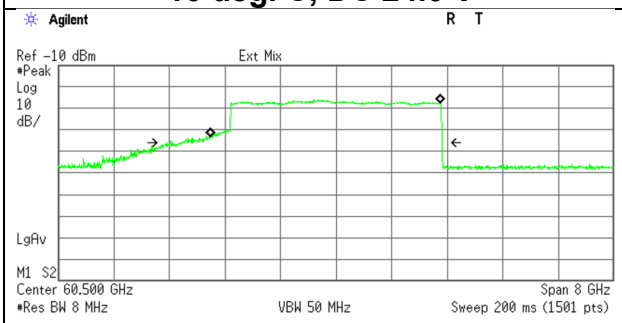

Occupied Bandwidth
3.3170 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -156.895 MHz
x dB Bandwidth 3.965 GHz

-20 deg. C, DC 24.0 V

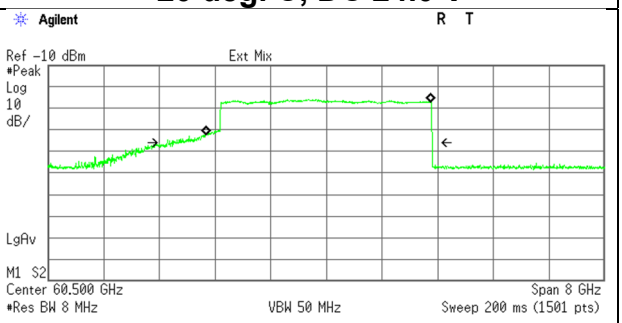

Occupied Bandwidth
3.2245 GHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -114.717 MHz
x dB Bandwidth 3.806 GHz

Group Instllation

There are no external phase-locking inputs in this EUT.
Therefore, the EUT comply this requirement.

APPENDIX 2: Test instruments

Test Equipment (1/2)

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
CE	141248	Attenuator	JFW Industries, Inc.	50FP-013H2 N	-	12/08/2023	12
CE	141357	LISN (AMN)	Schwarzbeck Mess-Elektronik OHG	NSLK8127	8127-729	07/05/2023	12
CE	141358	LISN (AMN)	Schwarzbeck Mess-Elektronik OHG	NSLK8127	8127-730	07/13/2023	12
CE	141546	Digital HiTESTER	HIOKI E.E. CORPORATION	3805	060100600	05/29/2023	12
CE	141563	Thermo-Hygrometer	CUSTOM. Inc	CTH-180	1005	01/10/2024	12
CE	141938	Terminator	TME	CT-01BP	-	12/04/2023	12
CE	141949	Test Receiver	Rohde & Schwarz	ESCI	100767	05/17/2023	12
CE	142229	Measure, Tape, Steel	KOMELON	KMC-36	-	-	-
CE	166638	Coaxial cable	UL Japan	MP4/6-5D-2W	MP4/6	12/25/2023	12
RE	141217	Coaxial cable	Fujikura/Suhner/TSJ	5D-2W/SFM141/ 421010/ sucoform141PE/ RFM-E121(SW)	-/04178	06/27/2023	12
RE	141227	Microwave Cable	Junkosha	MMX221-00500DMSDMS	1502S305	03/04/2024	12
RE	141267	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-192	09/21/2023	12
RE	141279	Microwave Cable	Junkosha	MMX221-00500DMSDMS	1502S303	03/04/2024	12
RE	141328	Microwave Cable 1G-40GHz	Suhner	SUCOFLEX102	28636/2	04/10/2023	12
RE	141331	Attenuator (6dB)	TME	UFA-01	-	02/17/2024	12
RE	141393	Microwave Cable	Junkosha	MWX221	1604S254(1 m) / 1608S088(5 m)	08/01/2023	12
RE	141397	Coaxial Cable	UL Japan	-	-	11/22/2023	12
RE	141425	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103+ BBA9106	VHA 91031302	08/10/2023	12
RE	141429	Temperature and Humidity Chamber	Espec	PL-2KP	14015723	08/09/2023	12
RE	141504	Horn Antenna 26.5-40GHz	EMCO	3160-10	1150	09/21/2023	12
RE	141508	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	557	05/17/2023	12
RE	141517	Horn Antenna 26.5-40GHz	ETS-Lindgren	3160-10	152399	11/20/2023	12
RE	141530	Digital Tester	Fluke Corporation	FLUKE 26-3	78030621	02/01/2024	12
RE	141545	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201148	02/01/2024	12
RE	141558	Digital Tester (TRUE RMS MULTIMETER)	Fluke Corporation	115	17930030	05/29/2023	12
RE	141568	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	2901	01/10/2024	12
RE	141576	Pre Amplifier	Keysight Technologies Inc	8449B	3008A01671	02/17/2024	12
RE	141581	Microwave System Amplifier	Keysight Technologies Inc	83017A	00650	10/05/2023	12
RE	141583	Pre Amplifier	SONOMA INSTRUMENT	310	260833	04/05/2023	12
RE	141588	Pre Amplifier	L3 Narda-MITEQ	AMF-6F-2600400-33-8P / AMF-4F-2600400-33-8P	1871355 / 1871328	01/22/2024	12
RE	141885	Spectrum Analyzer	Keysight Technologies Inc	E4448A	US44300523	11/29/2023	12
RE	141951	EMI Test Receiver	Rohde & Schwarz	ESR26	101408	04/10/2023	12
RE	141978	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY46180899	03/06/2023 *1)	12
RE	141994	AC1_Semi Anechoic Chamber (SVSWR)	TDK	Semi Anechoic Chamber 10m	DA-06881	09/28/2023	24
RE	141998	AC1_Semi Anechoic Chamber (NSA)	TDK	Semi Anechoic Chamber 10m	DA-06881	12/06/2023	24
RE	142011	AC4_Semi Anechoic Chamber (NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	12/13/2023	24
RE	142017	AC4_Semi Anechoic Chamber (SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-10005	10/11/2023	12

Test Equipment (2/2)

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	142026	Diplexer	OML INC.	DPL26	-	-	-
RE	142032	Microwave Cable	Huber+Suhner	SUCOFLEX102	37511/2	-	-
RE	142033	Microwave Cable	Huber+Suhner	SUCOFLEX102	37512/2	-	-
RE	142036	Horn Antenna	Custom Microwave Inc.	HO6R	-	09/05/2023	12
RE	142039	Horn Antenna	Custom Microwave Inc.	HO4R	-	09/05/2023	12
RE	142041	Horn Antenna	Oshima Prototype Engineering Co.	A16-187	1	09/05/2023	12
RE	142047	Preselected Millimeter Mixer	Keysight Technologies Inc	11974V-E01	3001A00412	11/14/2023	12
RE	142048	Harmonic Mixer	Keysight Technologies Inc	11970W	2521 A01909	09/22/2023	12
RE	142049	Harmonic Mixer	OML INC.	M06HWD	D100709-1	12/04/2023	12
RE	142053	Harmonic Mixer	OML INC.	M04HWD	Y100709-1	05/16/2023	12
RE	142055	Power Amplifier	SAGE Millimeter, Inc.	SBP-5037532015-1515-N1	11599-01	03/15/2024	12
RE	142152	Loop Antenna	Rohde & Schwarz	HFH2-Z2	836553/009	10/17/2023	12
RE	142183	Measure	KOMELON	KMC-36	-	10/20/2023	12
RE	142225	Tape Measure	ASKUL	-	-	-	-
RE	142226	Measure, Tape, Steel	KOMELON	KMC-36	-	-	-
RE	142230	Measure, Tape, Steel	KOMELON	KMC-36	-	-	-
RE	142528	Detector	Millitech	DET-15-RPFW0	34	-	-
RE	151897	Microwave Cable	Huber+Suhner	SF101EA/11PC24/ 11PC24/2.5M	SN MY1726/1EA	04/11/2023	12
RE	159670	Coaxial Cable	UL Japan	-	-	11/21/2023	12
RE	159919	Power Amplifier	SAGE Millimeter, Inc.	SBP-4035033018-2F2F-S1	12559-01	06/19/2023	12
RE	176027	D-Band Low Noise Amplifier	SAGE Millimeter, Inc.	SBL-1141741860-0606-EI	15235-01	07/11/2023	12
RE	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	180543	Horn Antenna	SAGE Millimeter, Inc.	SAZ-2410-15-S1	17343-02	06/21/2023	12
RE	180544	Horn Antenna	SAGE Millimeter, Inc.	SAZ-2410-10-S1	17343-01	06/21/2023	12
RE	180607	Power Amplifier	SAGE Millimeter, Inc.	SBP-7531142515-1010-E1	17343-01	09/22/2023	12
RE	180634	Horn Antenna	SAGE Millimeter, Inc.	SAZ-2410-15-S1	17343-01	06/20/2023	12
RE	197219	Microwave cable	Huber+Suhner	SF126E/11PC35/11 PC35/2000MM	536999/126E	03/19/2024	12
RE	199067	Digital Multimeter	SANWA	PC7000	19105100121	06/05/2023	12
RE	199242	Semi-Anechoic Chamber	Riken Environmental System	Large Chamber	1	02/09/2023	24
RE	199245	Semi-Anechoic Chamber	Riken Environmental System	Large Chamber	1	02/10/2023	24
RE	199856	WR-10 High Pass Filter	Oshima Prototype Engineering Co.	A20-110-A01	001	04/13/2023	12
RE	200415	WR-15 Band Elimination Filter 57-66GHz	Oshima Prototype Engineering Co.	A20-110-A02	001	08/28/2023	12
RE	200436	WR-15 Band Elimination Filter 57-64GHz	Oshima Prototype Engineering Co.	A20-110-A03	001	08/28/2023	12
RE	211944	Digital Storage Oscilloscope	Keysight Technologies Inc	DSOX6002A	MY59380318	12/16/2023	12
RE	221241	Thermo-Hygrometer	Mother tool	MHB-382SD	55534	07/26/2023	12
RE	238712	Double Ridge Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 C	687	08/10/2023	12
RE	244710	Thermo-Hygrometer	HIOKI E.E. CORPORATION	LR5001	231202104	01/25/2024	12
RE	244712	Thermo-Hygrometer	HIOKI E.E. CORPORATION	LR5001	231202106	01/25/2024	12

***Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.**

The expiration date of the calibration is the end of the expired month.
As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

The expiration*1) This test equipment was used for the tests before the expiration date of the calibration.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:
CE: Conducted Emission
RE: Radiated Emission