

Appendix B

Detailed Test Results

1. GSM
GSM850 for Head,Body
GSM1900 for Head,Body
2. WCDMA
WCDMA Band II for Head,Body
WCDMA Band IV for Head,Body
WCDMA Band V for Head,Body
3. LTE
LTE Band 5 for Head,Body
LTE Band 7 for Head,Body
LTE Band 12 for Head,Body
LTE Band 13 for Head,Body
LTE Band 14 for Head,Body
LTE Band 25 for Head,Body
LTE Band 41 for Head,Body
LTE Band 48 for Head,Body
LTE Band 66 for Head,Body
LTE Band 71 for Head,Body
4. 5G NR
5. WIFI
WIFI 2.4G for Head,Body
WIFI 5G for Head,Body
WIFI 6G for Head,Body
6. BT
BT for Head,Body

GSM850 GPRS 2TS 190CH Right cheek

Communication System: GSM 850; Frequency: 836.600

Medium: HSL. Medium parameters used: $f = 836.600$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 42.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.2, 9.2, 9.2); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.744 W/kg; SAR (10g) = 0.512 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.739 W/kg; SAR (10g) = 0.544 W/kg;

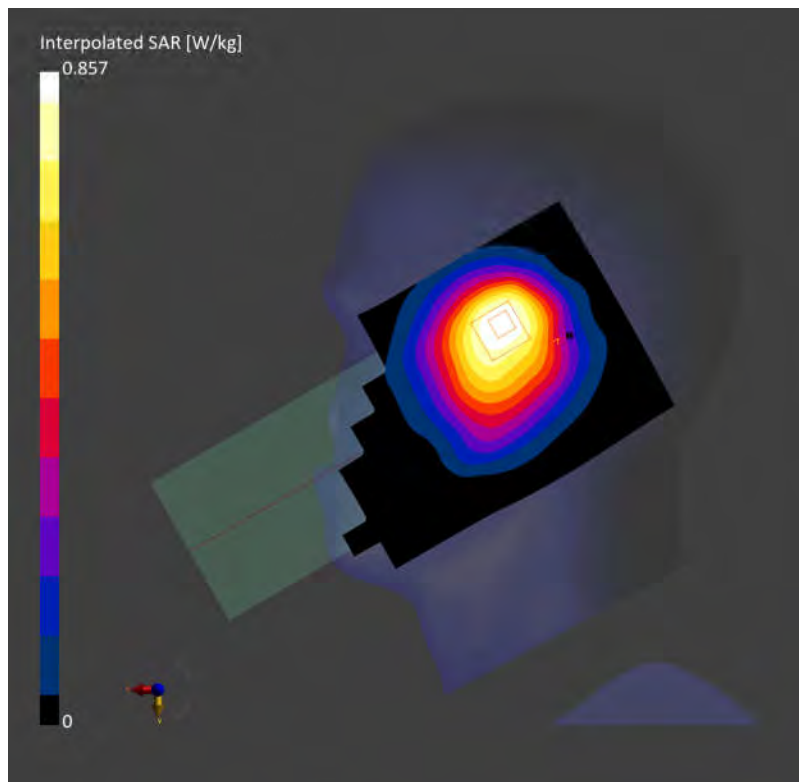

GSM850 GPRS 2TS 190CH Front side 10mm

Communication System: GSM 850; Frequency: 836.600

Medium: HSL. Medium parameters used: $f = 836.600$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 42.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.2, 9.2, 9.2); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.252 W/kg; SAR (10g) = 0.175 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.16 dB

SAR (1g) = 0.276 W/kg; SAR (10g) = 0.193 W/kg;

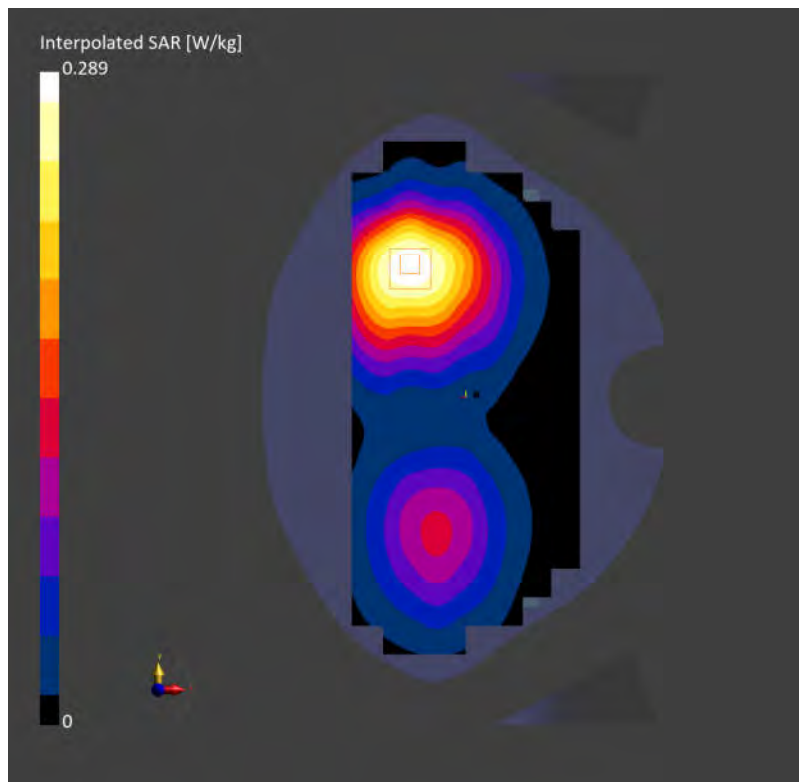

GSM850 GPRS 2TS 190CH Left side 10mm

Communication System: GSM 850; Frequency: 836.600

Medium: HSL. Medium parameters used: $f = 836.600$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 42.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.2, 9.2, 9.2); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.291 W/kg; SAR (10g) = 0.197 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.297 W/kg; SAR (10g) = 0.207 W/kg;

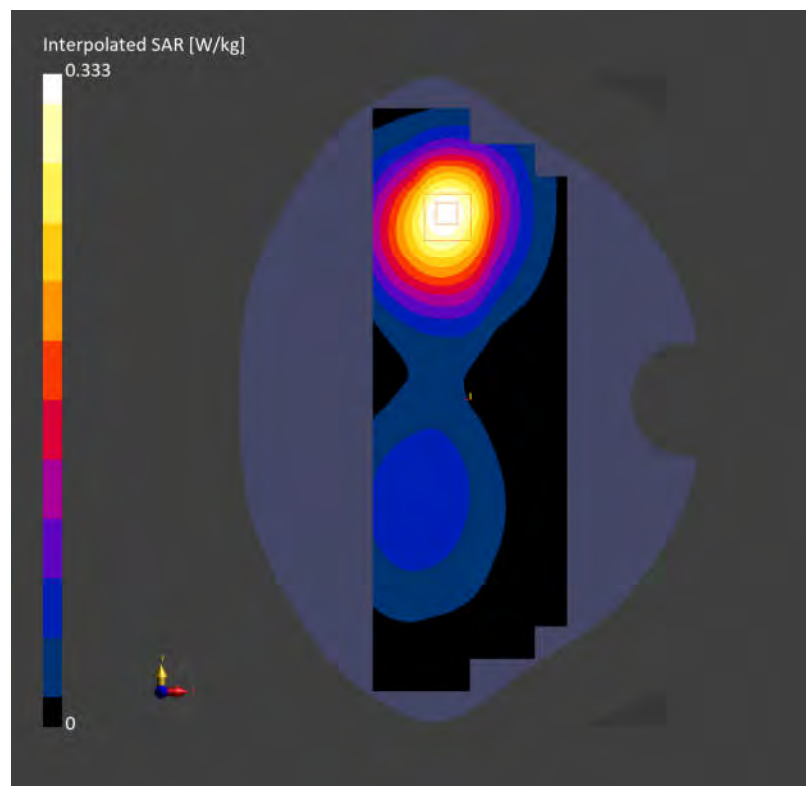

GSM850 GPRS 2TS 190CH Left side 0mm

Communication System: GSM 850; Frequency: 836.600

Medium: HSL. Medium parameters used: $f = 836.600$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 42.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.2, 9.2, 9.2); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.803 W/kg; SAR (10g) = 0.530 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.905 W/kg; SAR (10g) = 0.536 W/kg;

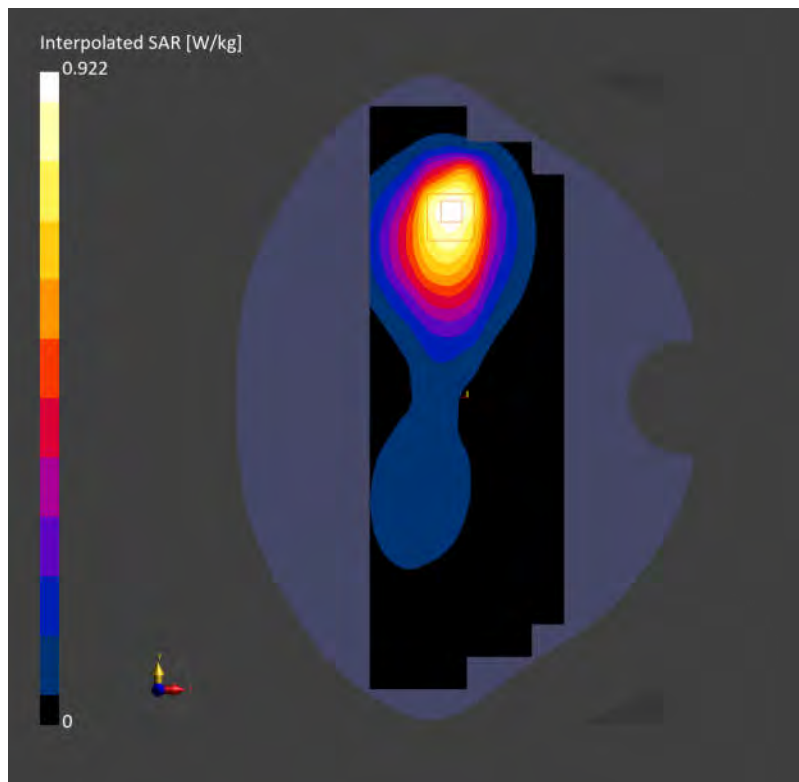

Test Laboratory: SGS-SAR Lab

E4P GSM GPRS 2TS 661CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 39.806$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.54, 7.96, 8.42); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.662 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.31 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.741 W/kg; SAR(10 g) = 0.387 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

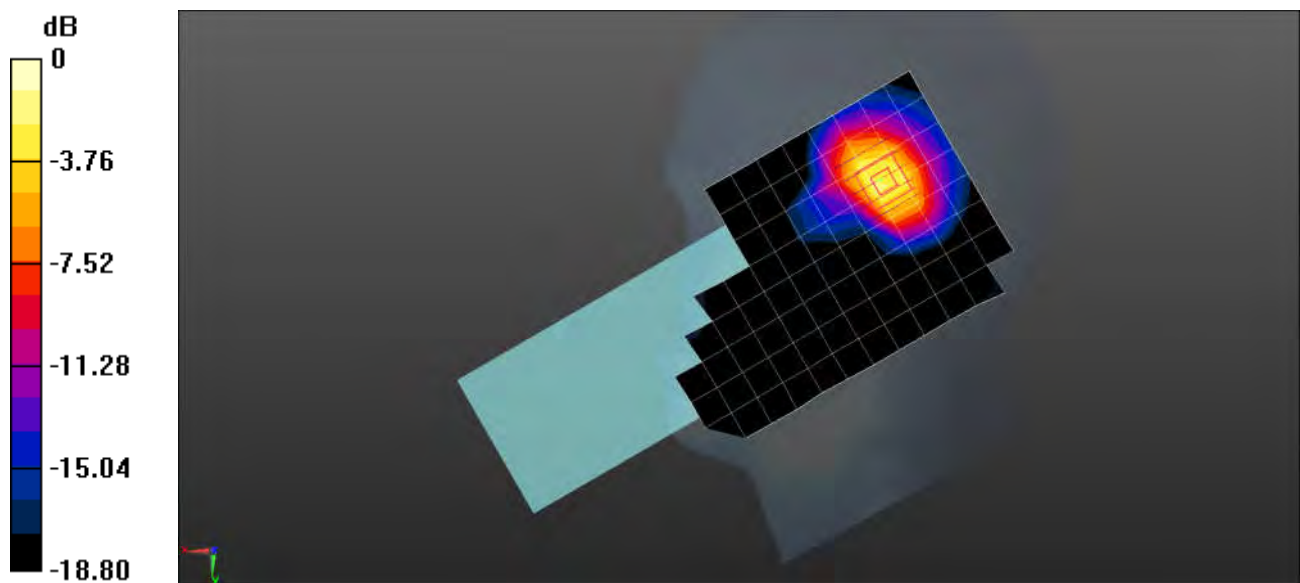

GSM1900 GPRS 2TS 661CH Front side 10mm

Communication System: DCS 1800; Frequency: 1740.000

Medium: HSL. Medium parameters used: $f = 1740.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.81, 7.81, 7.81); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.292 W/kg; SAR (10g) = 0.170 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.314 W/kg; SAR (10g) = 0.189 W/kg;

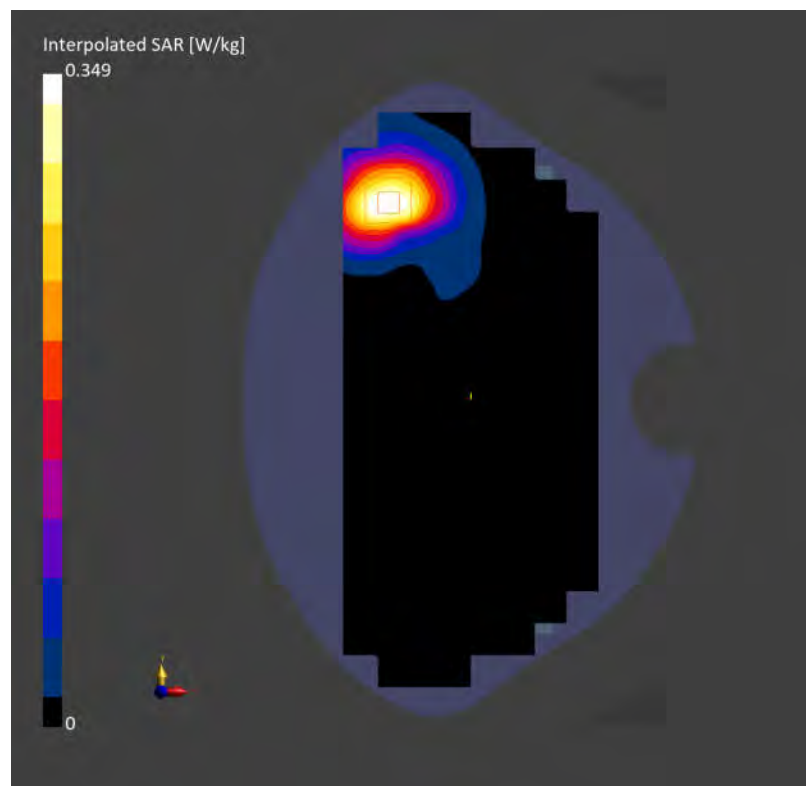

GSM1900 GPRS 2TS 661CH Top side 10mm

Communication System: PCS 1900; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.81, 7.81, 7.81); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.959 W/kg; SAR (10g) = 0.512 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 1.04 W/kg; SAR (10g) = 0.586 W/kg;

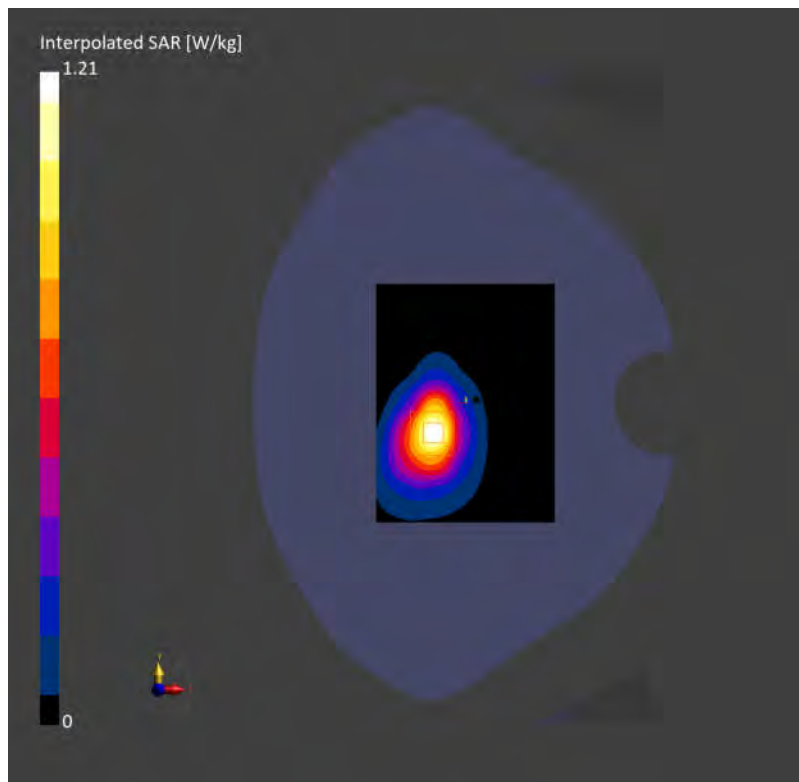

GSM1900 GPRS 2TS 661CH Top side 0mm

Communication System: PCS 1900; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.81, 7.81, 7.81); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.39 W/kg; SAR (10g) = 1.63 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 3.78 W/kg; SAR (10g) = 1.84 W/kg;

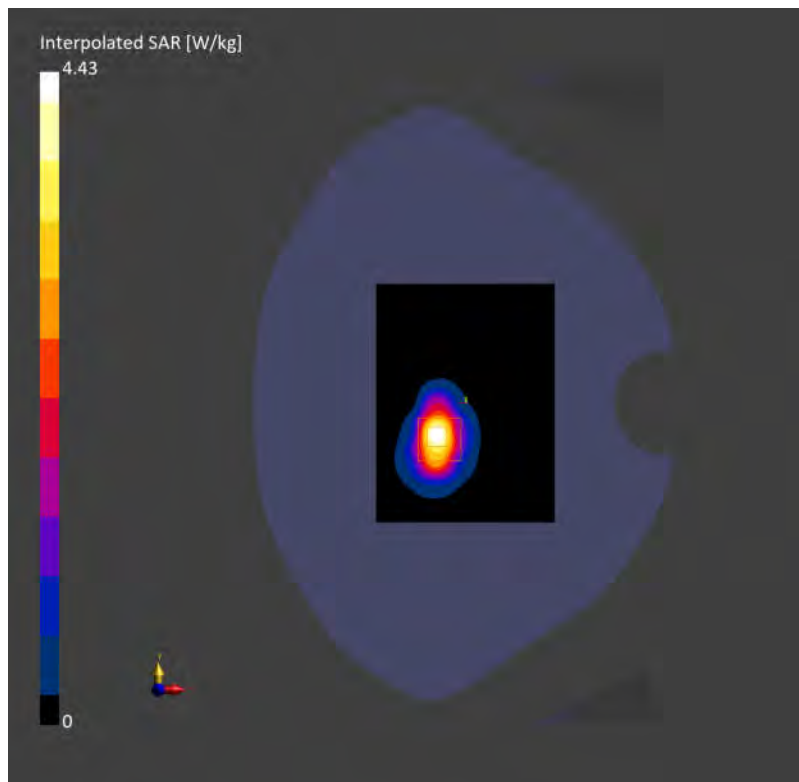

Test Laboratory: SGS-SAR Lab

E4P WCDMA II RMC 9400CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 39.806$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.54, 7.96, 8.42); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.01 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.40 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.835 W/kg; SAR(10 g) = 0.435 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

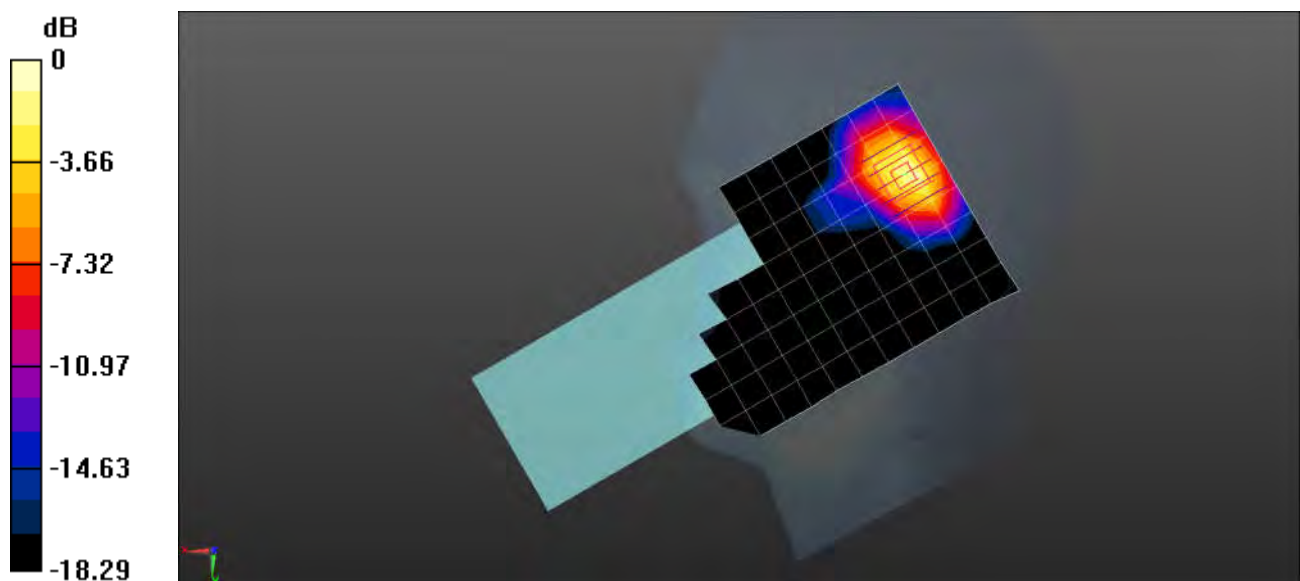

0 dB = 1.22 W/kg = 0.86 dBW/kg

WCDMA Band II RMC 9400CH Front side 10mm

Communication System: Band 2; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.81, 7.81, 7.81); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.598 W/kg; SAR (10g) = 0.351 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.648 W/kg; SAR (10g) = 0.387 W/kg;

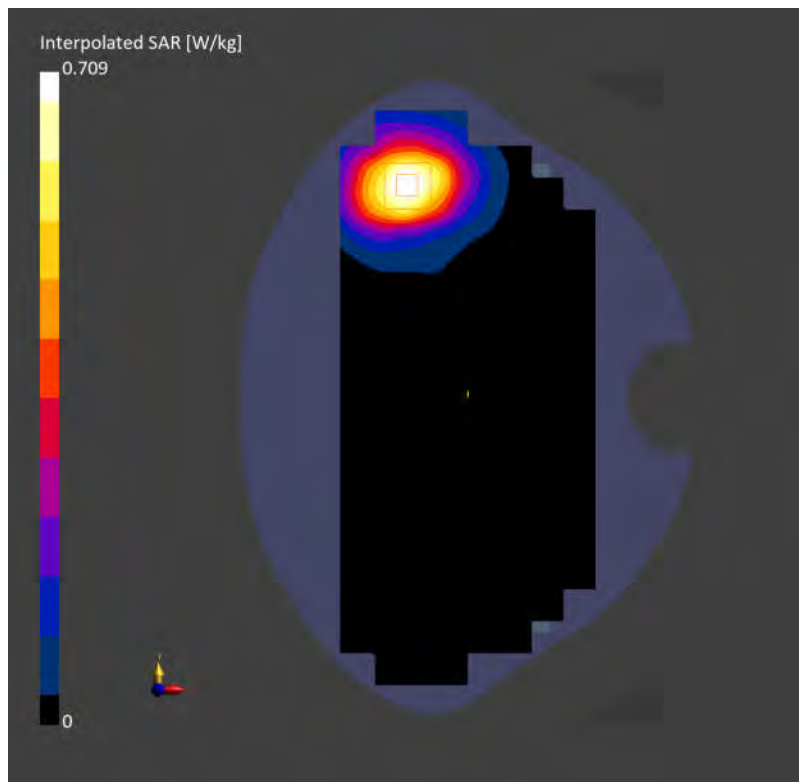

Test Laboratory: SGS-SAR Lab

E4P WCDMA II RMC 9400CH Top side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 39.806$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.54, 7.96, 8.42); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.48 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.35 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.665 W/kg

Maximum value of SAR (measured) = 1.58 W/kg

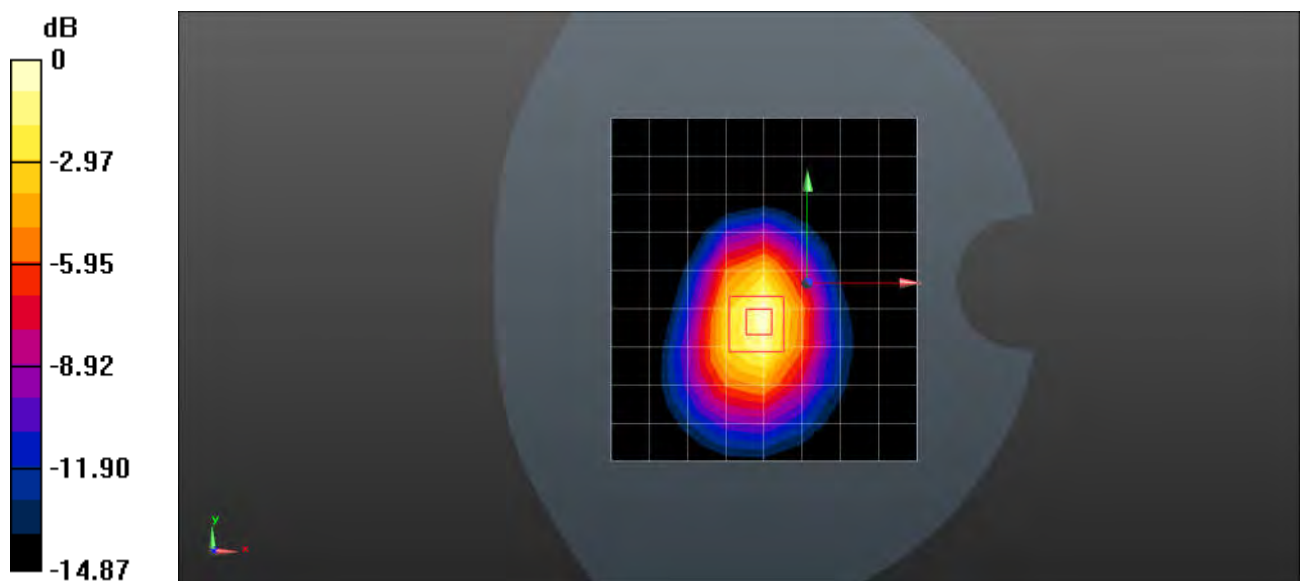

0 dB = 1.58 W/kg = 1.99 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P WCDMA II RMC 9400CH Top side 0mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 39.806$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.54, 7.96, 8.42); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 7.48 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 52.44 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 9.17 W/kg

SAR(1 g) = 4.96 W/kg; SAR(10 g) = 2.43 W/kg

Maximum value of SAR (measured) = 7.71 W/kg

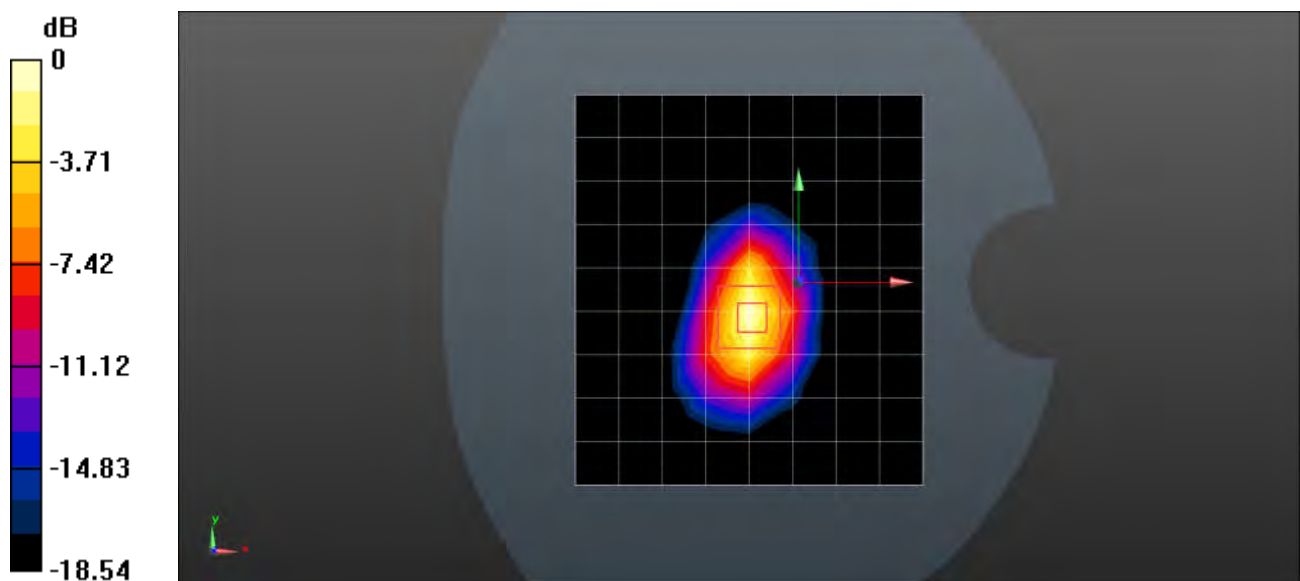

0 dB = 7.71 W/kg = 8.87 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P WCDMA IV RMC 1412CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1732.4$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 39.424$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(9.45, 8.73, 9.34); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.02 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.259 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.939 W/kg; SAR(10 g) = 0.495 W/kg

Maximum value of SAR (measured) = 1.40 W/kg

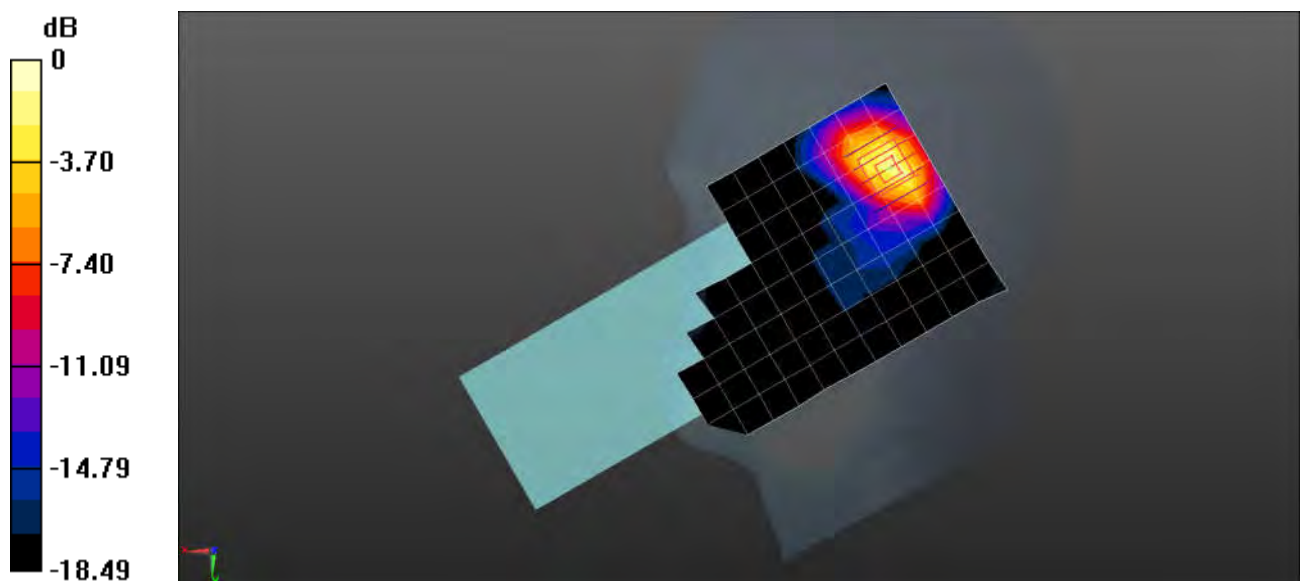

0 dB = 1.40 W/kg = 1.46 dBW/kg

WCDMA Band IV RMC 1412CH Front side 10mm

Communication System: Band 4; Frequency: 1732.400

Medium: HSL. Medium parameters used: $f = 1732.400$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(8.12, 8.12, 8.12); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.429 W/kg; SAR (10g) = 0.254 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.12 dB

SAR (1g) = 0.585 W/kg; SAR (10g) = 0.282 W/kg;

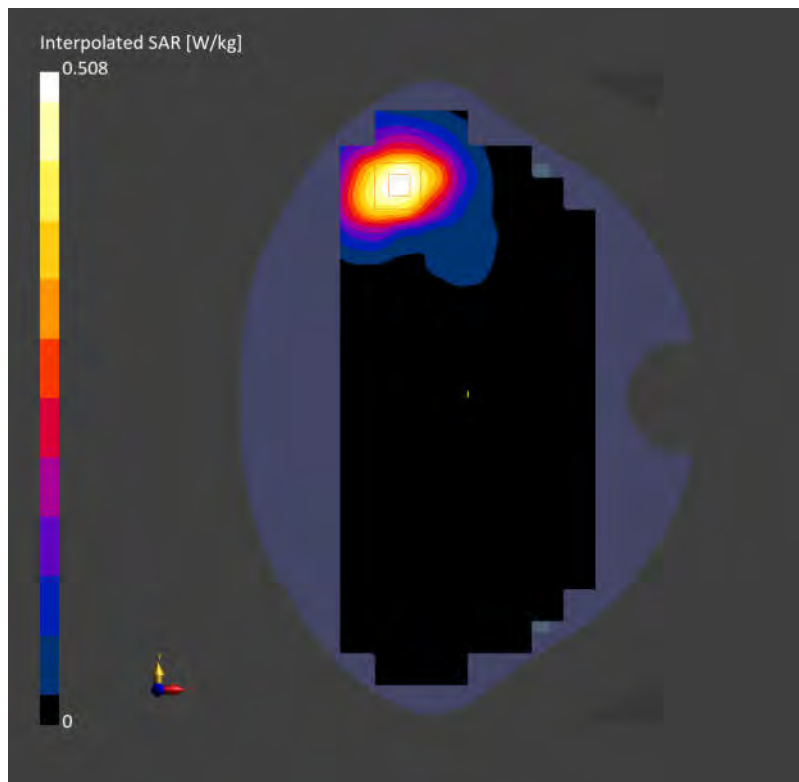

Test Laboratory: SGS-SAR Lab

E4P WCDMA IV RMC 1412CH Top side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1732.4$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 39.424$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(9.45, 8.73, 9.34); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.22 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.26 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 1 W/kg; SAR(10 g) = 0.589 W/kg

Maximum value of SAR (measured) = 1.39 W/kg

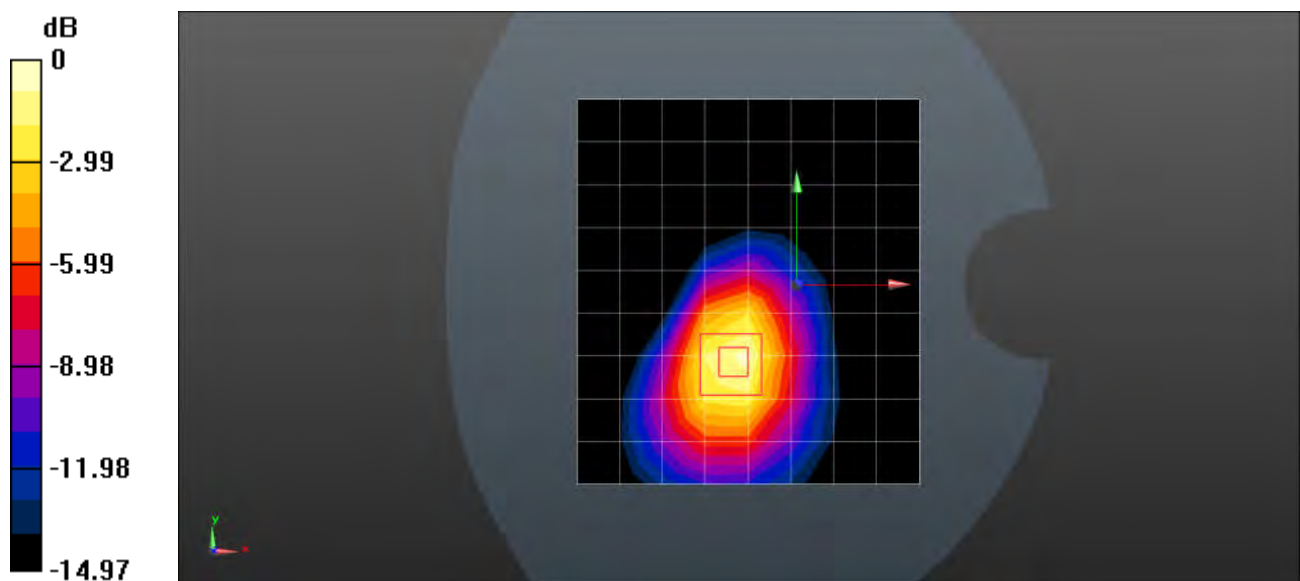

0 dB = 1.39 W/kg = 1.43 dBW/kg

WCDMA Band IV RMC 1412CH Top side 0mm

Communication System: Band 4; Frequency: 1732.400

Medium: HSL. Medium parameters used: $f = 1732.400$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(8.12, 8.12, 8.12); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 4.90 W/kg; SAR (10g) = 2.46 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 5.62 W/kg; SAR (10g) = 2.74 W/kg;

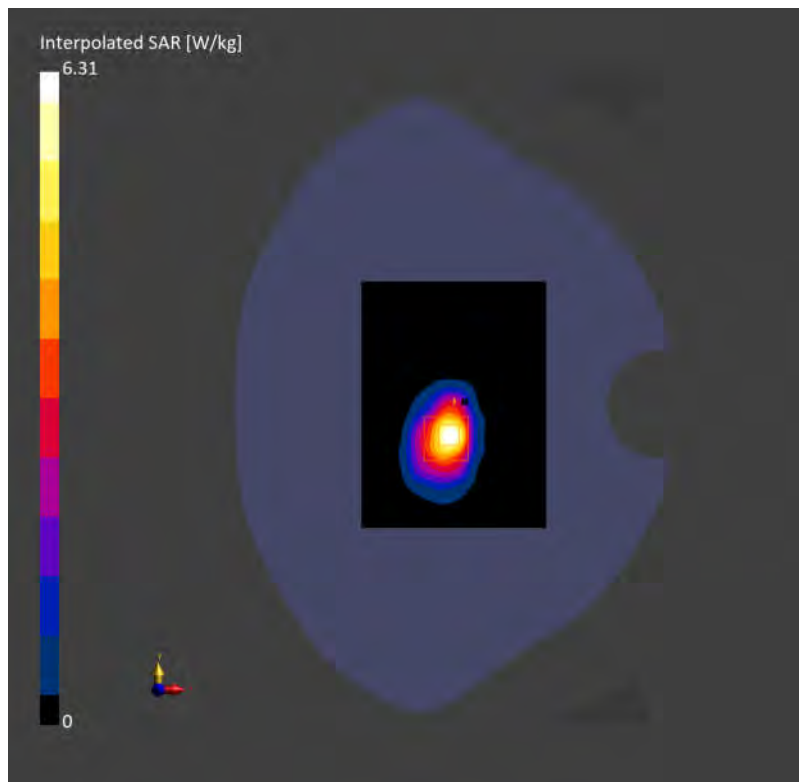

WCDMA Band V RMC 4182CH Right cheek

Communication System: Band 5; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.910$ S/m; $\epsilon_r = 42.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.2, 9.2, 9.2); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.687 W/kg; SAR (10g) = 0.472 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.703 W/kg; SAR (10g) = 0.518 W/kg;

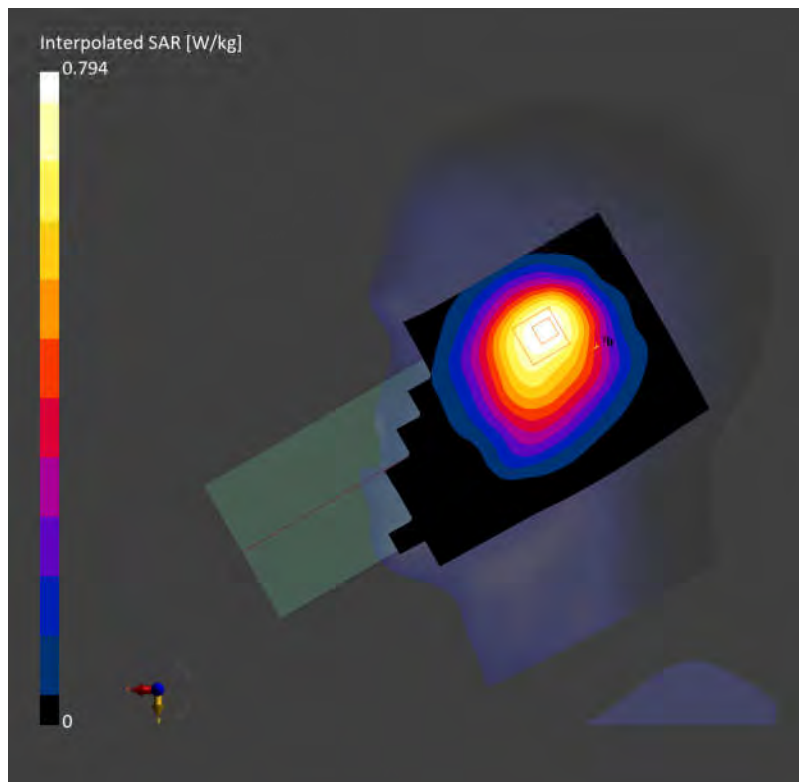

WCDMA Band V RMC 4182CH Front side 10mm

Communication System: Band 5; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.910$ S/m; $\epsilon_r = 42.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.2, 9.2, 9.2); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.249 W/kg; SAR (10g) = 0.173 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.17 dB

SAR (1g) = 0.301 W/kg; SAR (10g) = 0.190 W/kg;

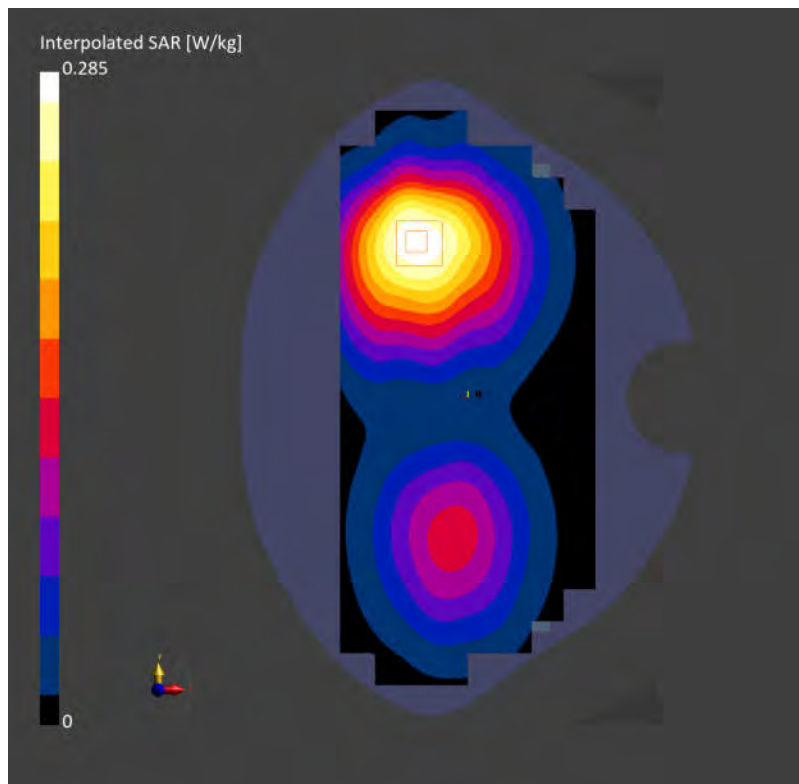

WCDMA Band V RMC 4182CH Left side 10mm

Communication System: Band 5; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.910$ S/m; $\epsilon_r = 42.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.2, 9.2, 9.2); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.312 W/kg; SAR (10g) = 0.210 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.321 W/kg; SAR (10g) = 0.223 W/kg;

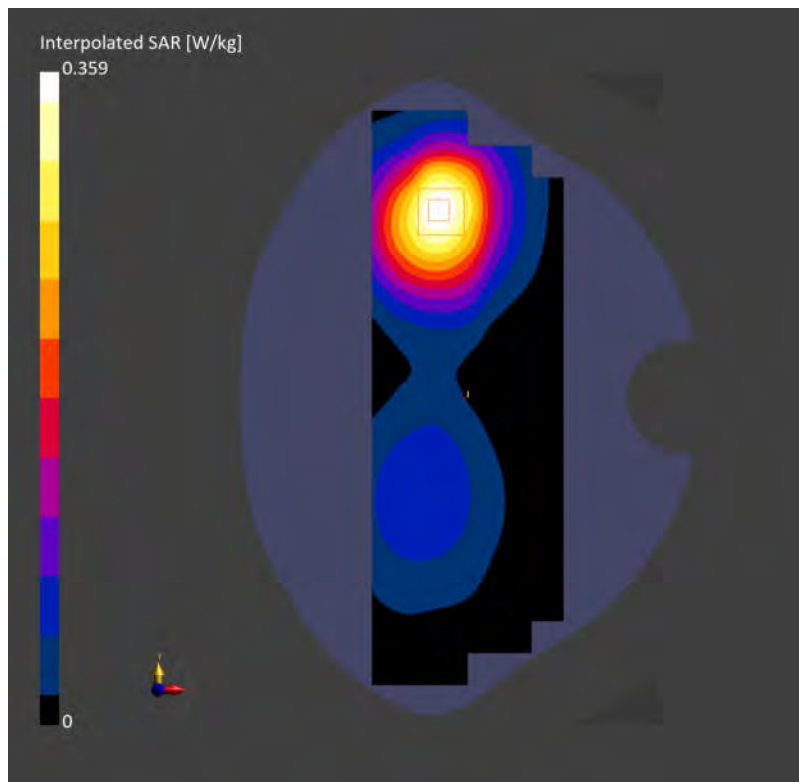

WCDMA Band V RMC 4182CH Left side 0mm

Communication System: Band 5; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.910$ S/m; $\epsilon_r = 42.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.2, 9.2, 9.2); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.857 W/kg; SAR (10g) = 0.557 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.957 W/kg; SAR (10g) = 0.563 W/kg;

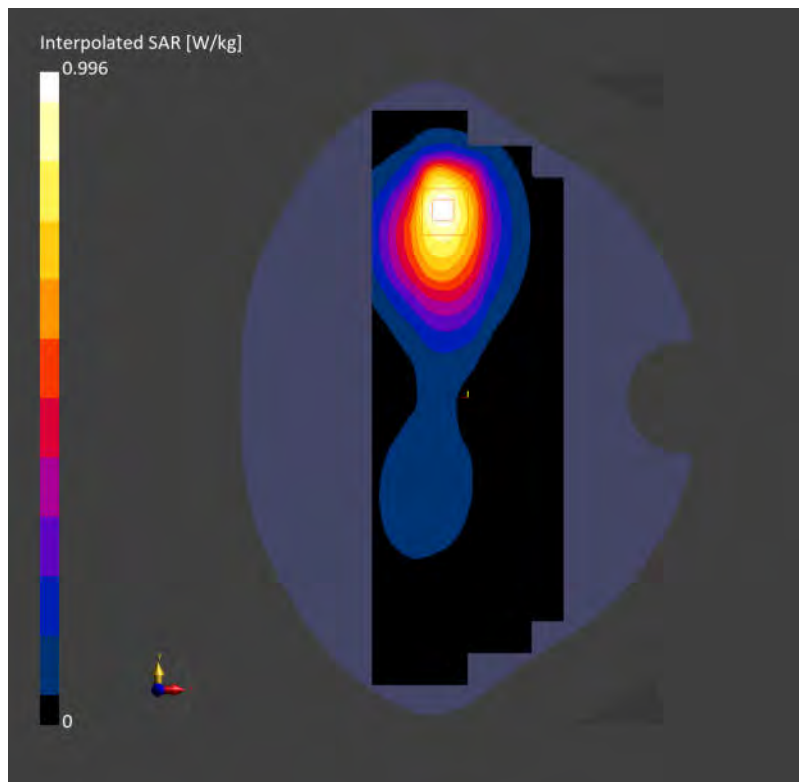

Test Laboratory: SGS-SAR Lab

E4P LTE Band 2 20M QPSK 1RB0 18900CH Left cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 39.806$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.54, 7.96, 8.42); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0940 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.292 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.0948 W/kg

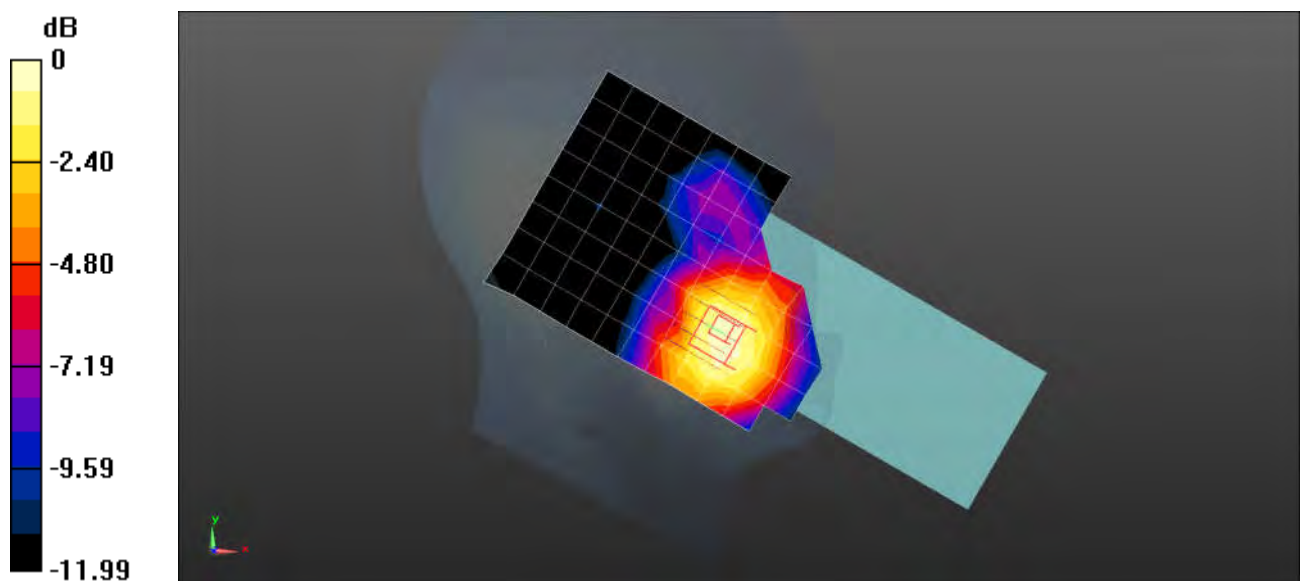

0 dB = 0.0948 W/kg = -10.23 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 2 20M QPSK 1RB0 18900CH Front side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 39.806$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.54, 7.96, 8.42); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x18x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0679 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.114 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0840 W/kg

SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0711 W/kg

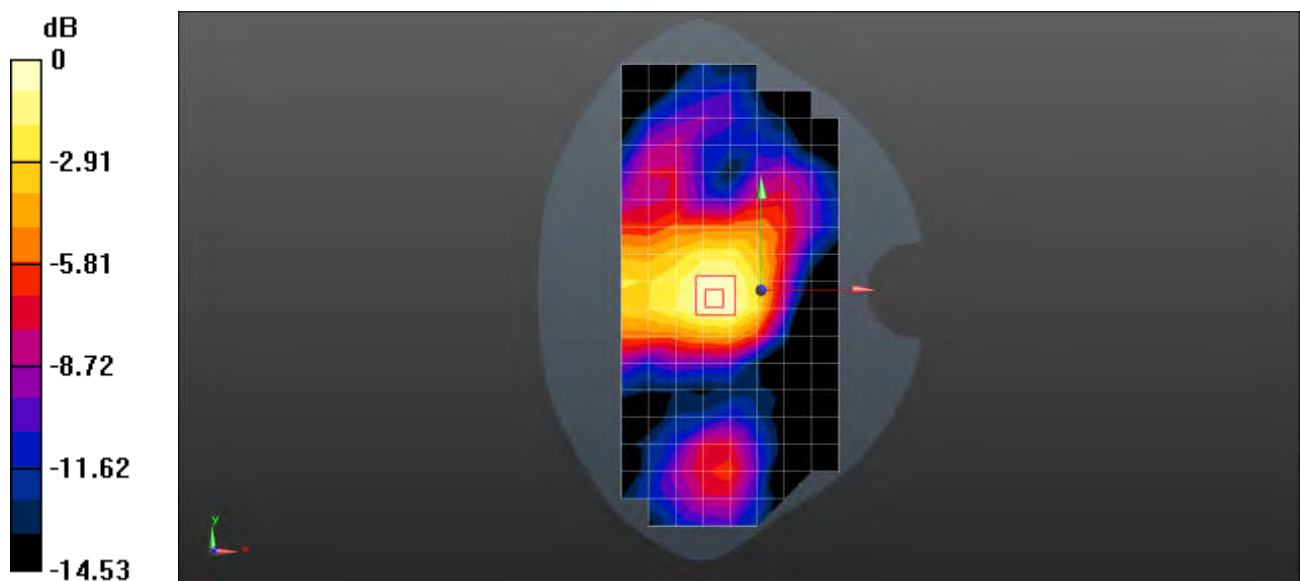

0 dB = 0.0711 W/kg = -11.48 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 2 20M QPSK 1RB0 18900CH Left side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 39.806$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.54, 7.96, 8.42); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x18x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.158 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.705 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.214 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.181 W/kg

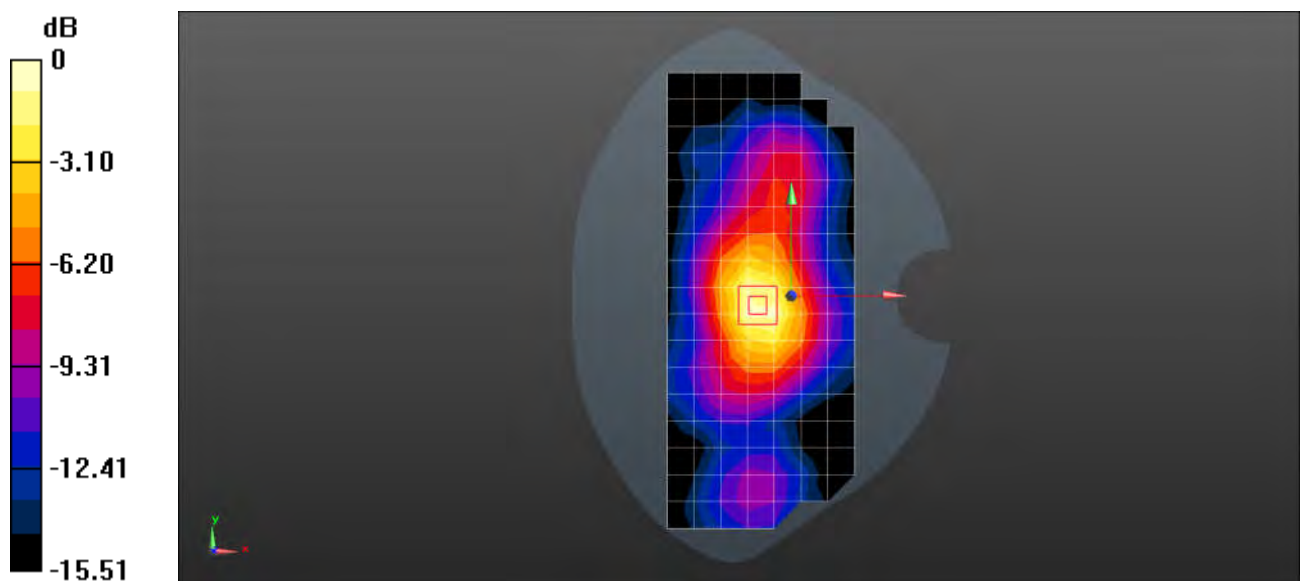

0 dB = 0.181 W/kg = -7.42 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 2 20M QPSK 1RB0 18900CH Left side 0mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 39.806$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.54, 7.96, 8.42); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x18x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.505 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.84 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.832 W/kg

SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.227 W/kg

Maximum value of SAR (measured) = 0.694 W/kg

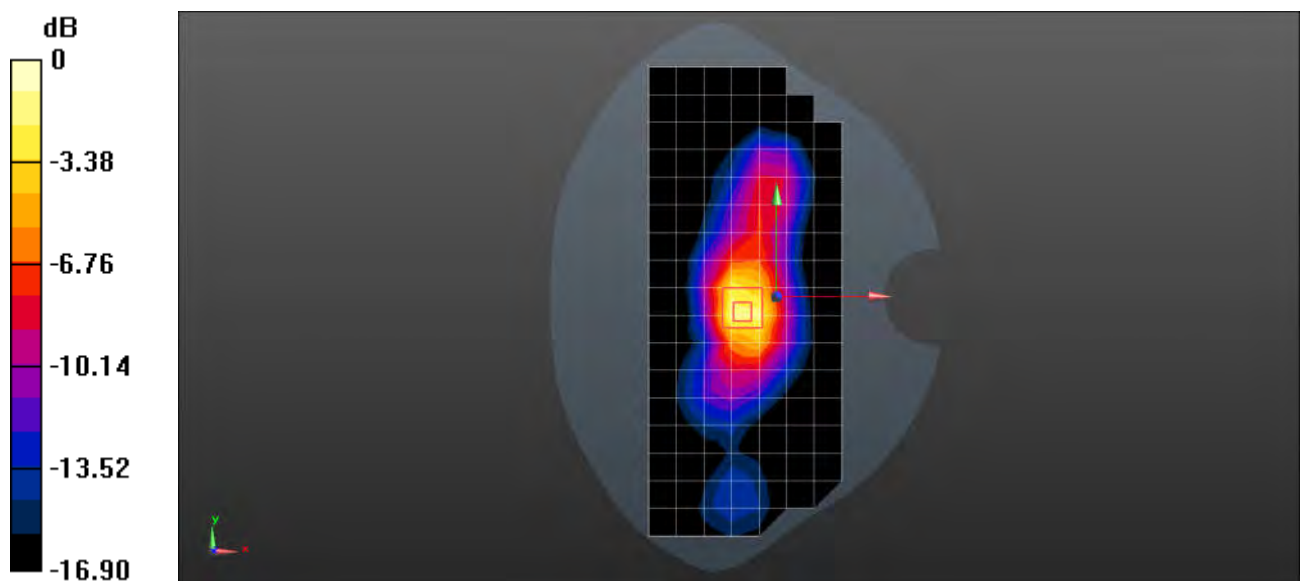

0 dB = 0.694 W/kg = -1.59 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 5 10M QPSK 1RB0 20525CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.911$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(10.39, 9.86, 10); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.522 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.03 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.597 W/kg

SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 0.550 W/kg

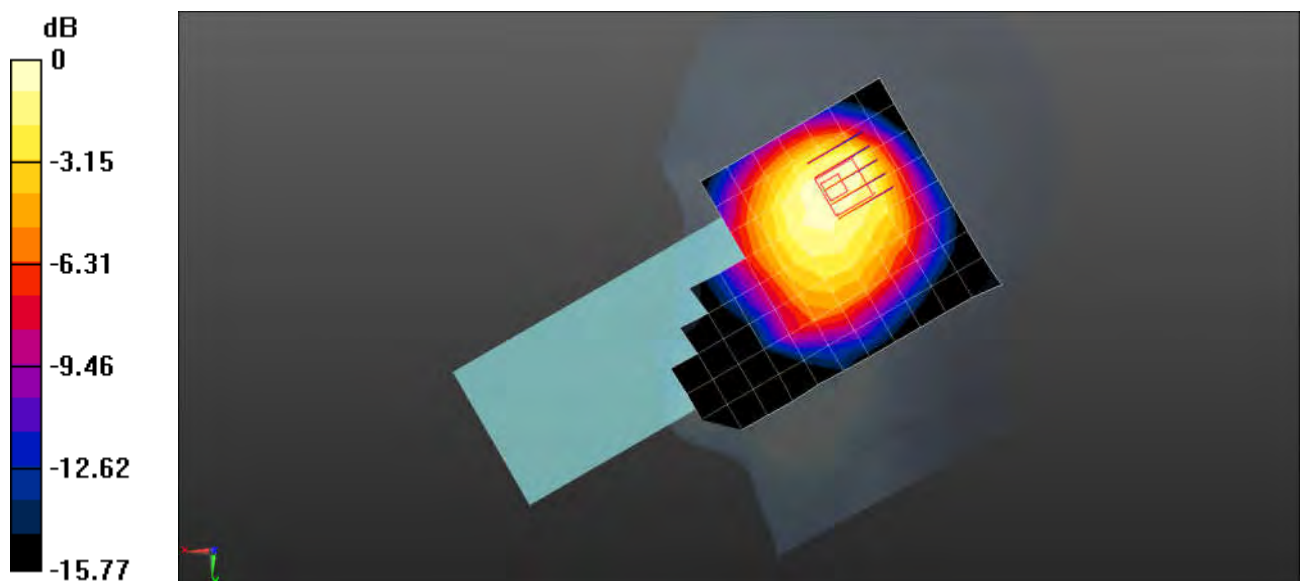

0 dB = 0.550 W/kg = -2.60 dBW/kg

LTE Band 5 QPSK 10M 1RB0 20525CH Front side 10mm

Communication System: Band 5; Frequency: 836.500

Medium: HSL. Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 42.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.2, 9.2, 9.2); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.248 W/kg; SAR (10g) = 0.172 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.15 dB

SAR (1g) = 0.279 W/kg; SAR (10g) = 0.192 W/kg;

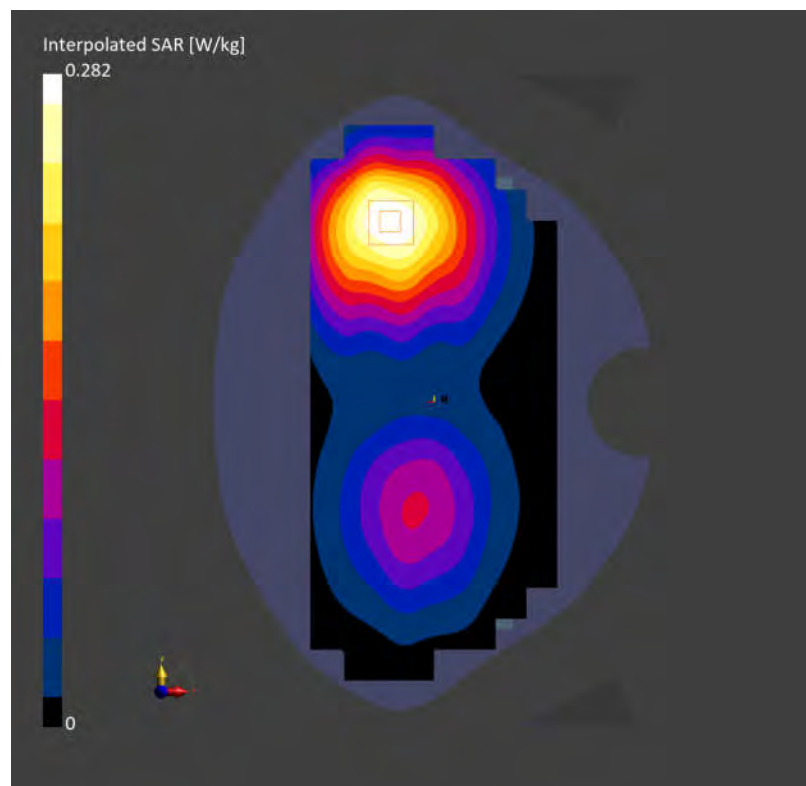

LTE Band 5 QPSK 10M 1RB0 20525CH Left side 10mm

Communication System: Band 5; Frequency: 836.500

Medium: HSL. Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 42.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.2, 9.2, 9.2); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.305 W/kg; SAR (10g) = 0.205 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.315 W/kg; SAR (10g) = 0.220 W/kg;

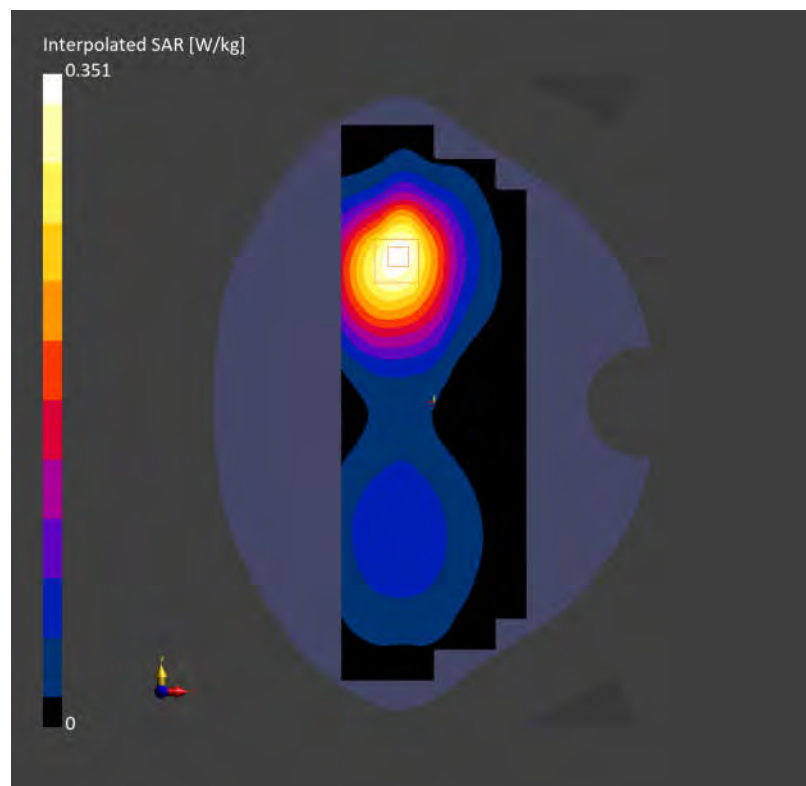

LTE Band 5 QPSK 10M 1RB0 20525CH Left side 0mm

Communication System: Band 5; Frequency: 836.500

Medium: HSL. Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 42.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.2, 9.2, 9.2); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.958 W/kg; SAR (10g) = 0.585 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.986 W/kg; SAR (10g) = 0.581 W/kg;

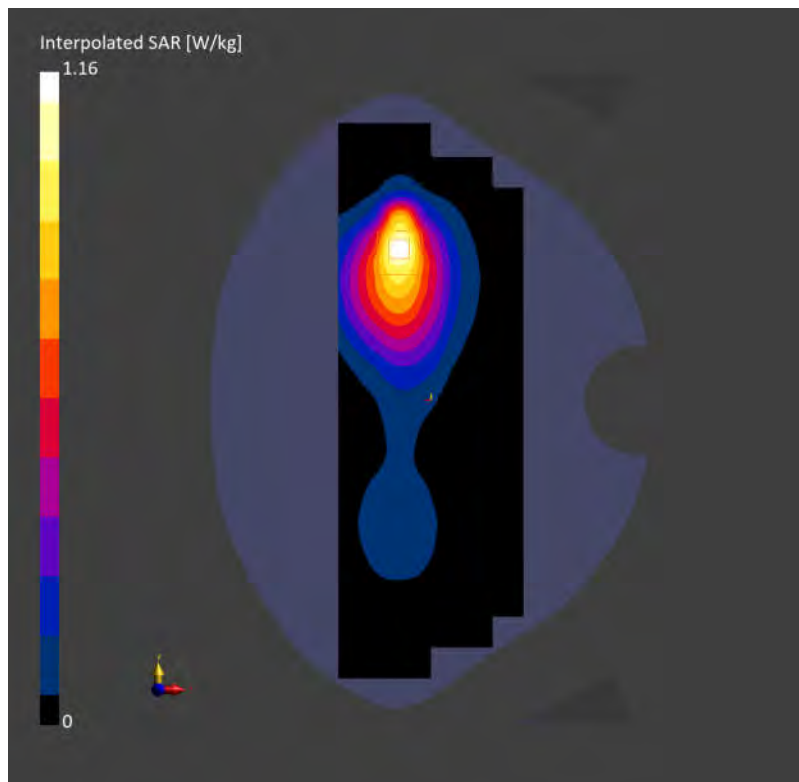

Test Laboratory: SGS-SAR Lab

E4P LTE Band 7 20M QPSK 1RB0 21100CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.913$ S/m; $\epsilon_r = 38.169$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.01, 7.49, 7.95); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.62 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.20 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.528 W/kg

Maximum value of SAR (measured) = 1.66 W/kg

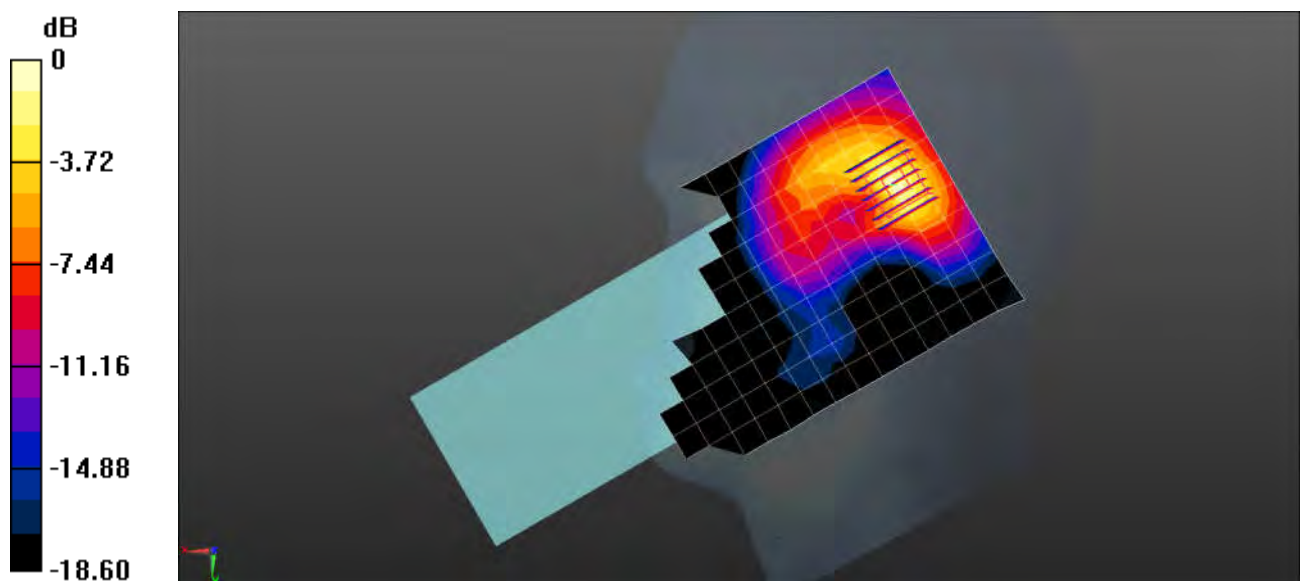

0 dB = 1.66 W/kg = 2.20 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 7 20M QPSK 1RB0 21100CH Front side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.913$ S/m; $\epsilon_r = 38.169$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.01, 7.49, 7.95); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x22x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.426 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.947 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.183 W/kg

Maximum value of SAR (measured) = 0.434 W/kg

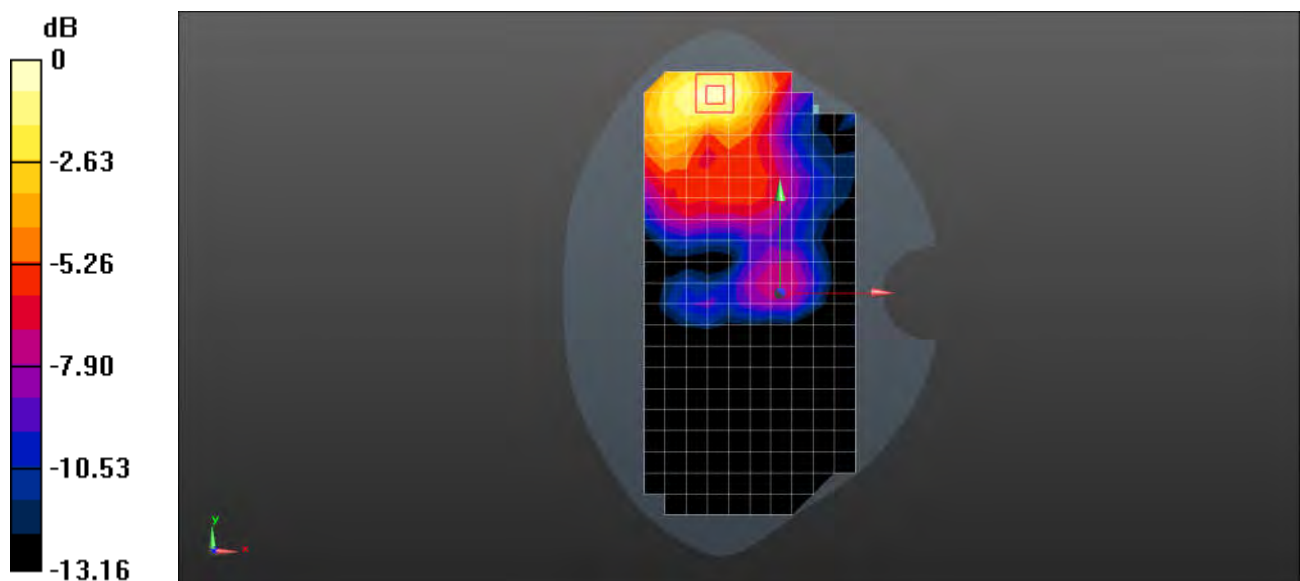

0 dB = 0.434 W/kg = -3.63 dBW/kg

LTE Band 7 QPSK 20M 1RB0 21100CH Top side 10mm

Communication System: Band 7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 39.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.16, 7.16, 7.16); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.886 W/kg; SAR (10g) = 0.456 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.952 W/kg; SAR (10g) = 0.491 W/kg;

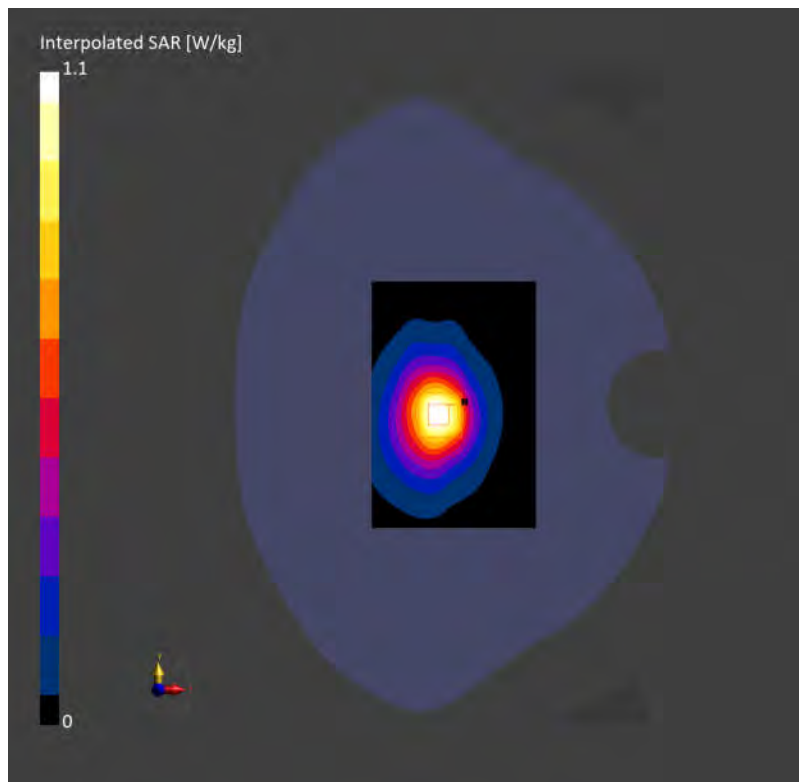

LTE Band 7 QPSK 20M 1RB0 21100CH Top side 0mm

Communication System: Band 7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 39.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.16, 7.16, 7.16); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.40 W/kg; SAR (10g) = 1.40 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 3.55 W/kg; SAR (10g) = 1.43 W/kg;

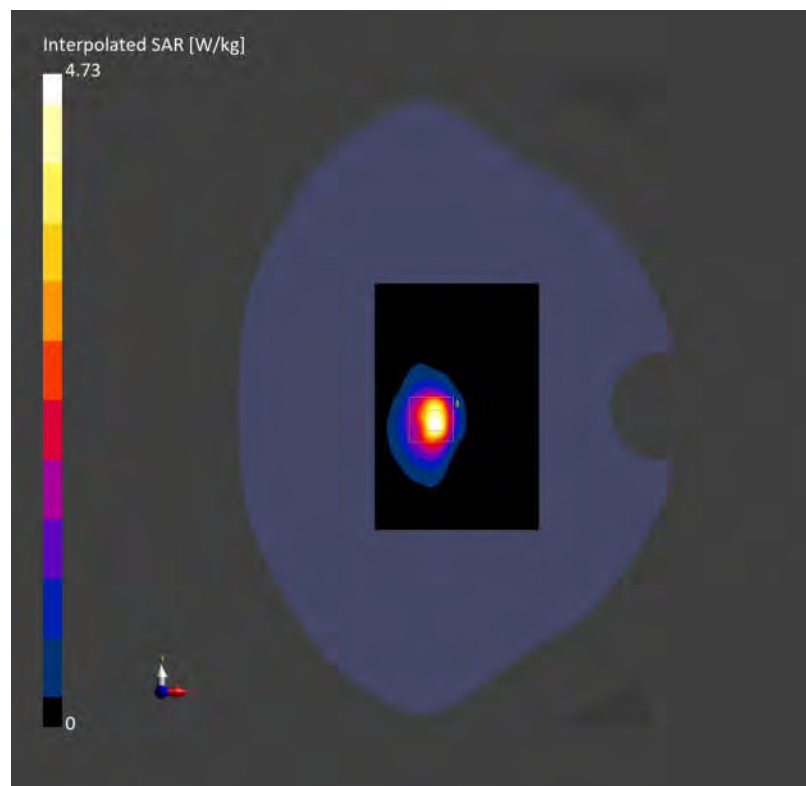

Test Laboratory: SGS-SAR Lab

E4P LTE Band 12 10M QPSK 1RB0 23095CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 42.26$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(10.54, 10.15, 10.87); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.517 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.76 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.703 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.290 W/kg

Maximum value of SAR (measured) = 0.565 W/kg

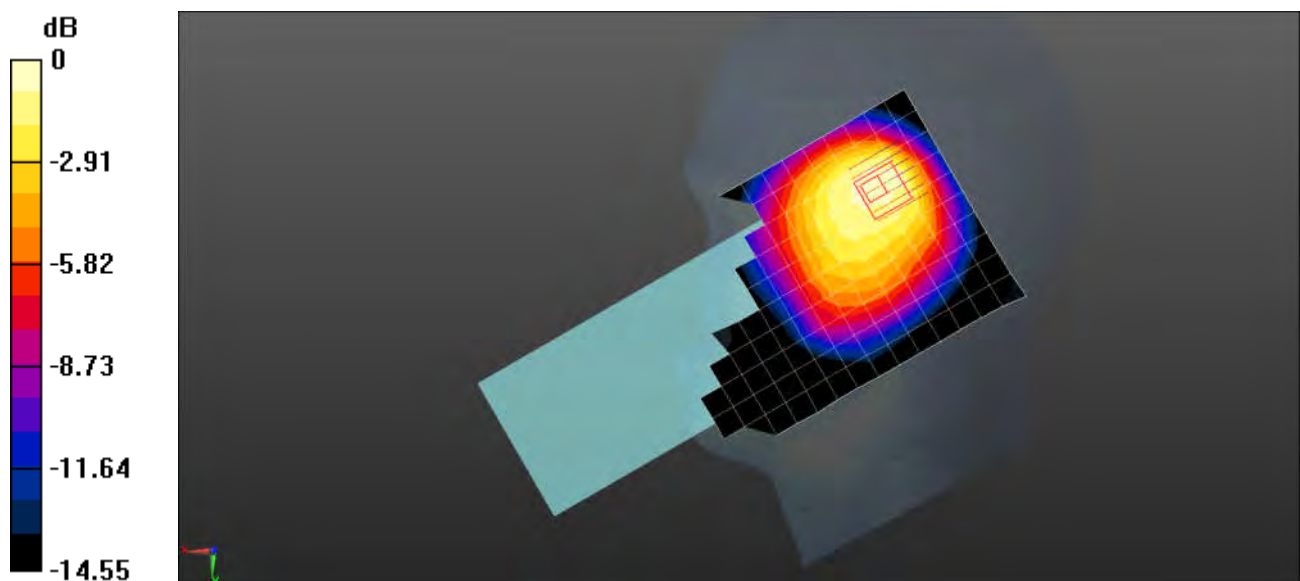

LTE Band 12 QPSK 10M 1RB0 23095CH Front side 10mm

Communication System: Band 12; Frequency: 707.500

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.851$ S/m; $\epsilon_r = 43.1$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.61, 9.61, 9.61); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.205 W/kg; SAR (10g) = 0.143 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.212 W/kg; SAR (10g) = 0.153 W/kg;

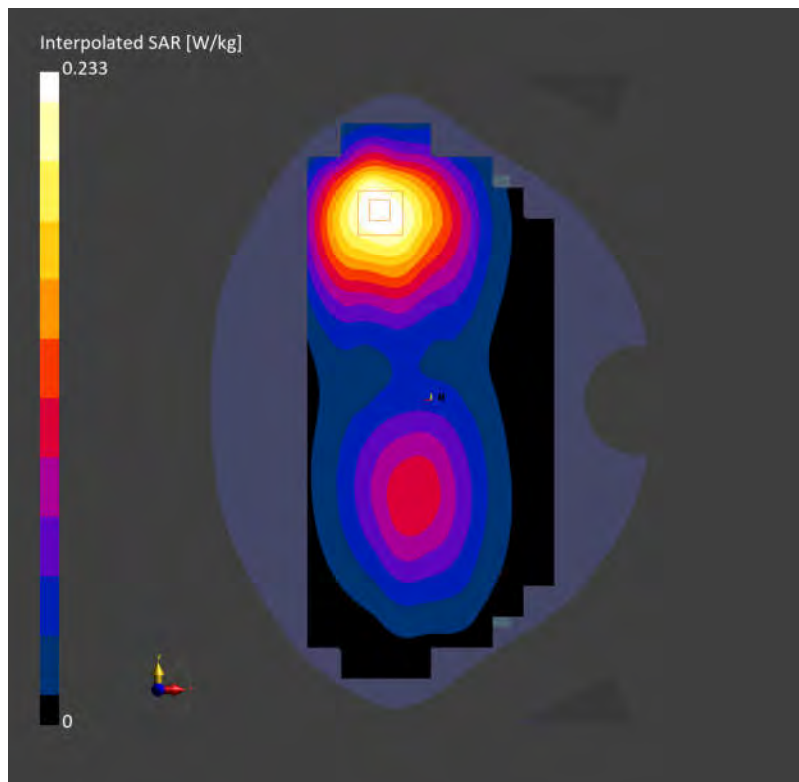

LTE Band 12 QPSK 10M 1RB0 23095CH Top side 0mm

Communication System: Band 12; Frequency: 707.500

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.851$ S/m; $\epsilon_r = 43.1$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.61, 9.61, 9.61); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.763 W/kg; SAR (10g) = 0.432 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.842 W/kg; SAR (10g) = 0.370 W/kg;

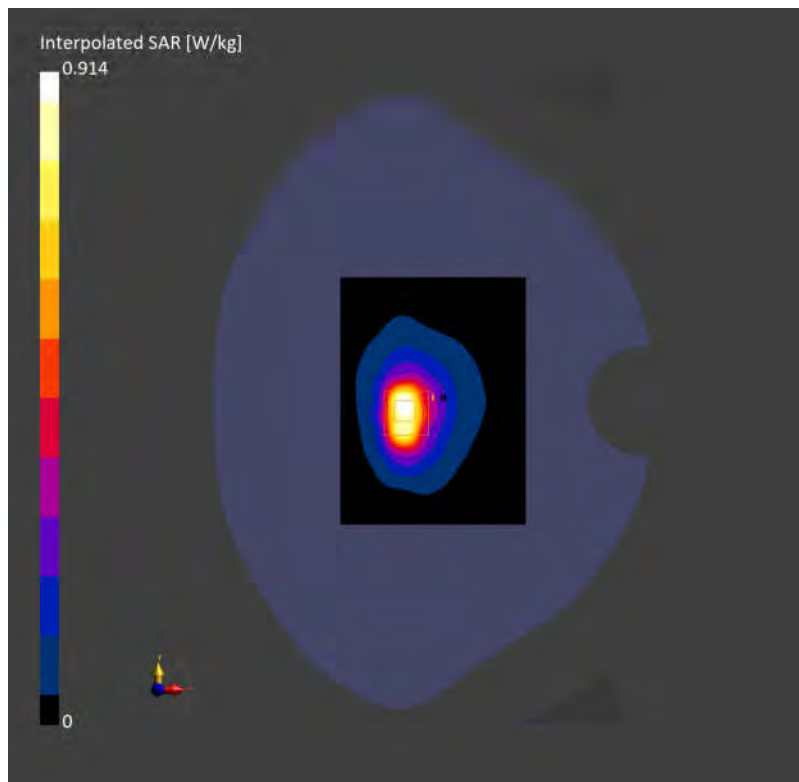

LTE Band 13 QPSK 10M 1RB0 23230CH Right cheek

Communication System: Band 13; Frequency: 782.000

Medium: HSL. Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.866$ S/m; $\epsilon_r = 42.6$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.61, 9.61, 9.61); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.389 W/kg; SAR (10g) = 0.267 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.396 W/kg; SAR (10g) = 0.288 W/kg;

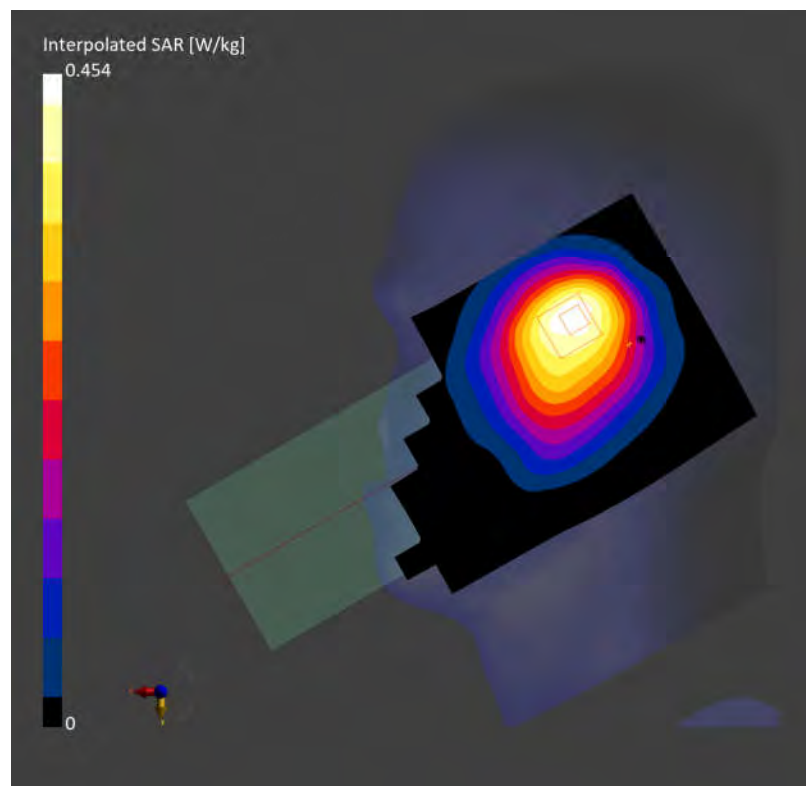

LTE Band 13 QPSK 10M 1RB0 23230CH Front side 10mm

Communication System: Band 13; Frequency: 782.000

Medium: HSL. Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.866$ S/m; $\epsilon_r = 42.6$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.61, 9.61, 9.61); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.182 W/kg; SAR (10g) = 0.126 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.187 W/kg; SAR (10g) = 0.136 W/kg;

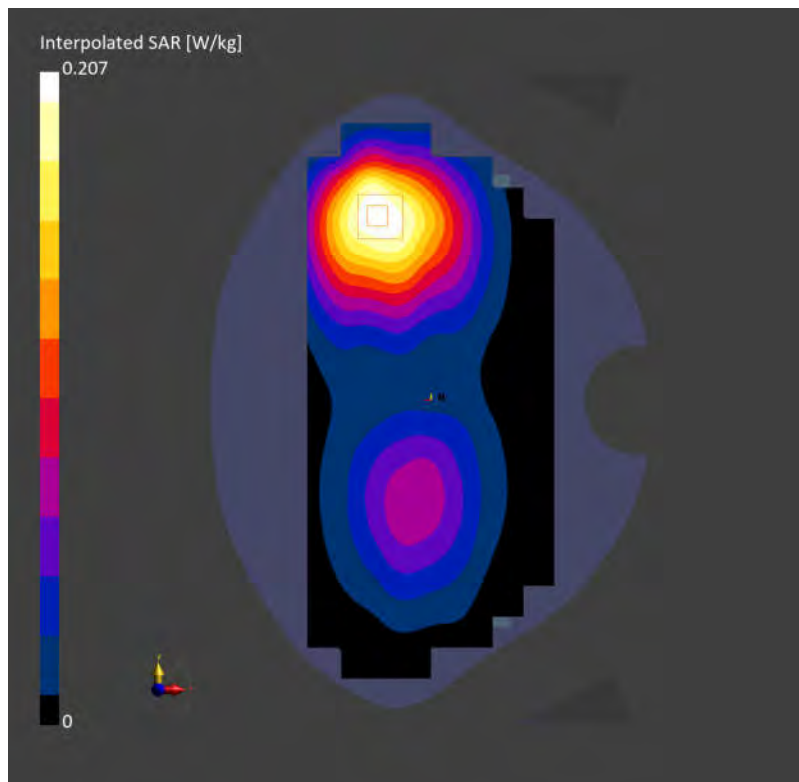

LTE Band 13 QPSK 10M 1RB0 23230CH Top side 0mm

Communication System: Band 13; Frequency: 782.000

Medium: HSL. Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.866$ S/m; $\epsilon_r = 42.6$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.61, 9.61, 9.61); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.656 W/kg; SAR (10g) = 0.334 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.692 W/kg; SAR (10g) = 0.284 W/kg;

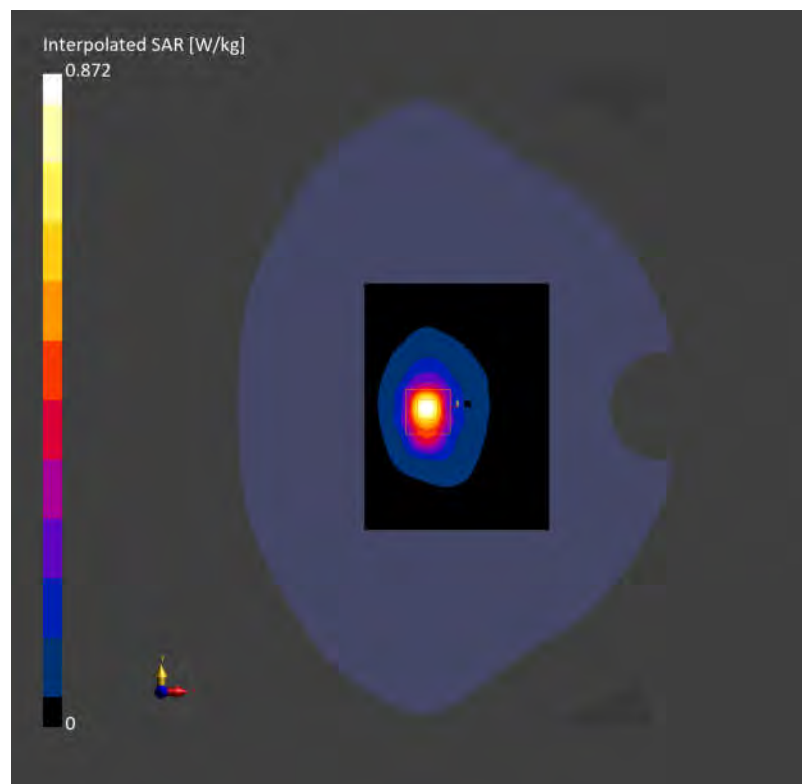

LTE Band 14 QPSK 10M 1RB0 23330CH Right cheek

Communication System: Band 14; Frequency: 793.000

Medium: HSL. Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.61, 9.61, 9.61); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.383 W/kg; SAR (10g) = 0.263 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.394 W/kg; SAR (10g) = 0.287 W/kg;

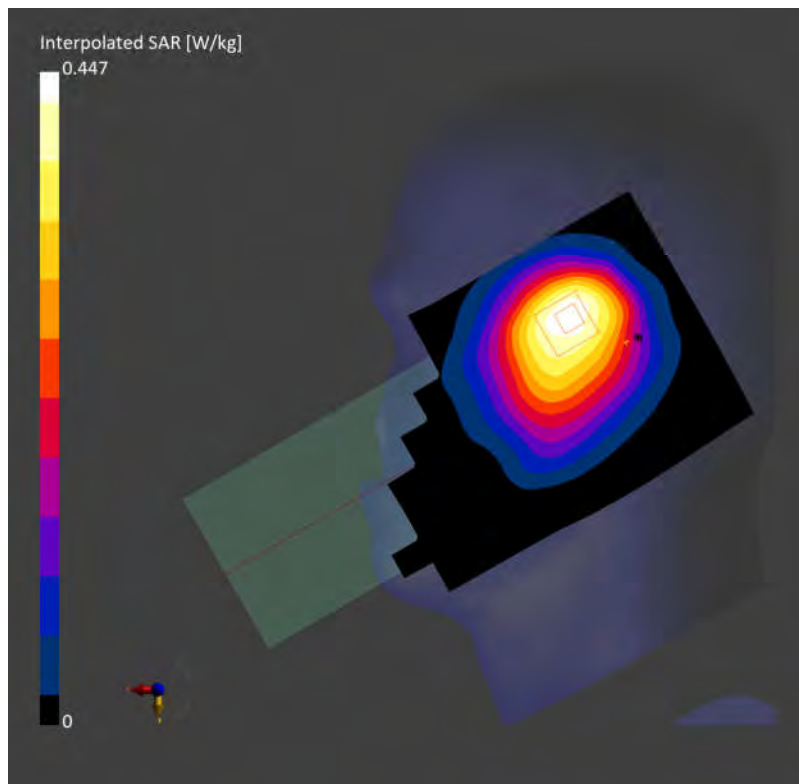

LTE Band 14 QPSK 10M 1RB0 23330CH Front side 10mm

Communication System: Band 14; Frequency: 793.000

Medium: HSL. Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.61, 9.61, 9.61); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.182 W/kg; SAR (10g) = 0.126 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.187 W/kg; SAR (10g) = 0.136 W/kg;

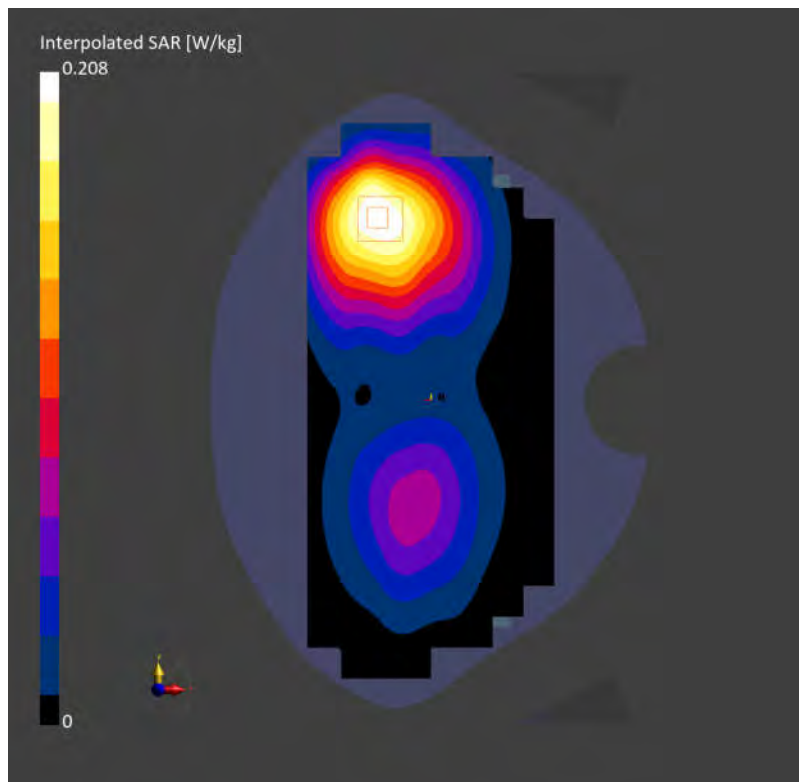

LTE Band 14 QPSK 10M 1RB0 23330CH Top side 0mm

Communication System: Band 14; Frequency: 793.000

Medium: HSL. Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.61, 9.61, 9.61); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.669 W/kg; SAR (10g) = 0.340 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.711 W/kg; SAR (10g) = 0.291 W/kg;

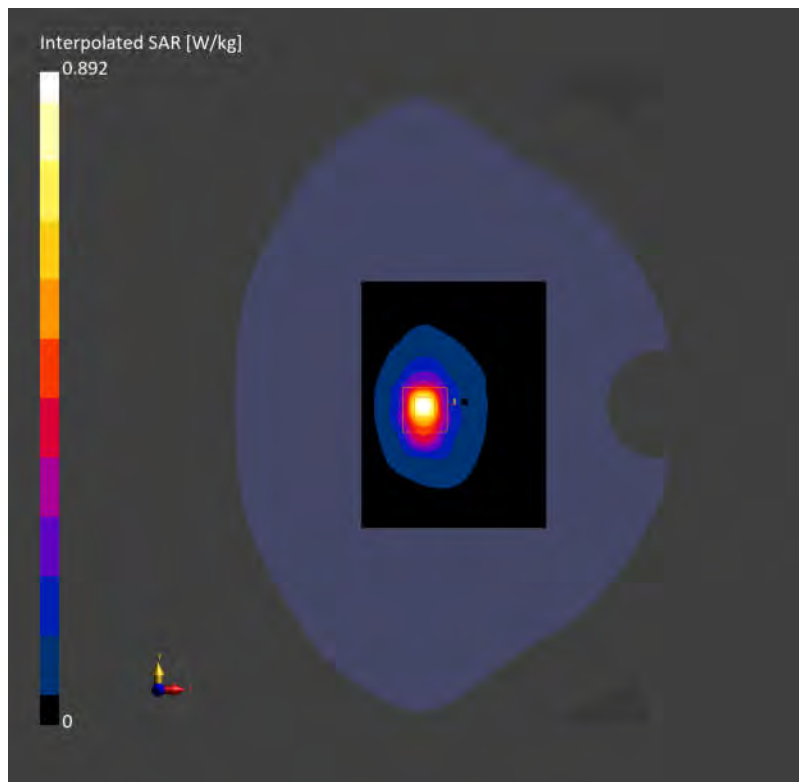

Test Laboratory: SGS-SAR Lab

E4P LTE Band 25 20M QPSK 50RB0 26365CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 39.802$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.54, 7.96, 8.42); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.625 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.609 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.780 W/kg

SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.257 W/kg

Maximum value of SAR (measured) = 0.662 W/kg

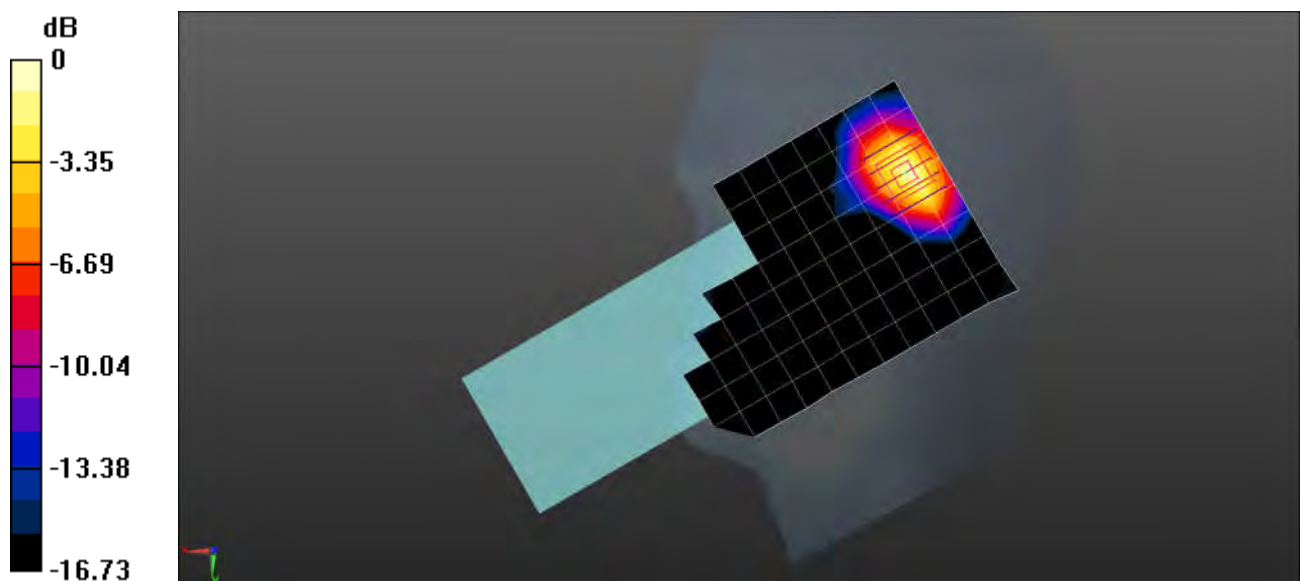

0 dB = 0.662 W/kg = -1.79 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 25 20M QPSK 1RB0 26365CH Front side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 39.802$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.54, 7.96, 8.42); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x18x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.331 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.4500 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.395 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.153 W/kg

Maximum value of SAR (measured) = 0.353 W/kg

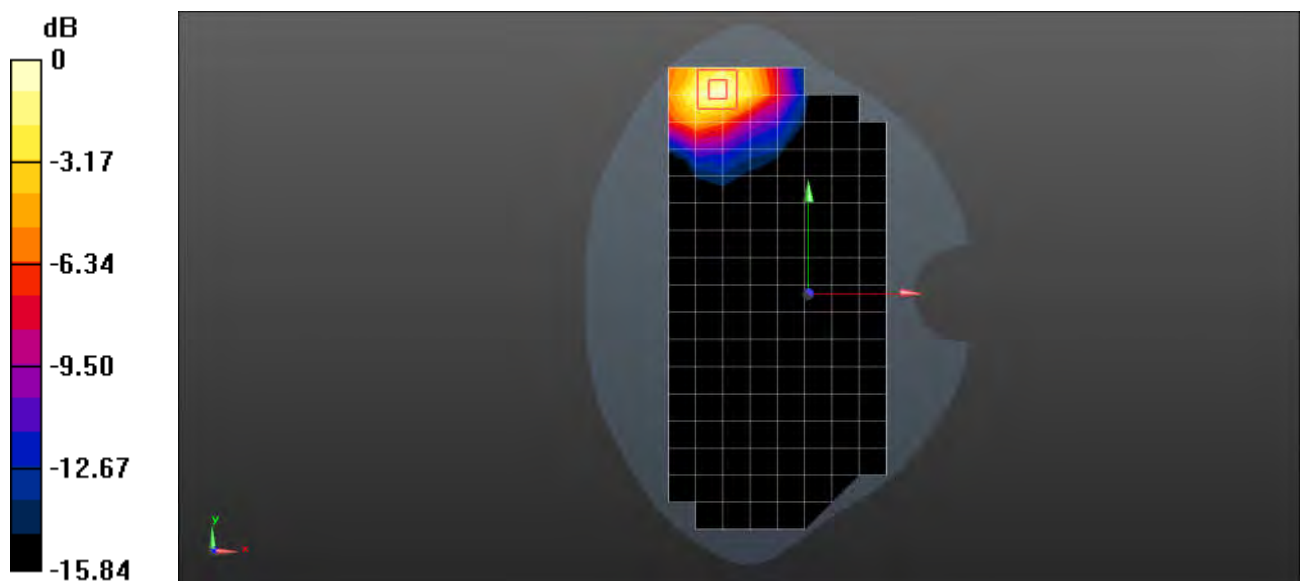

0 dB = 0.353 W/kg = -4.52 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 25 20M QPSK 1RB0 26365CH Top side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 39.802$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.54, 7.96, 8.42); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.469 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.46 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.643 W/kg

SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.243 W/kg

Maximum value of SAR (measured) = 0.570 W/kg

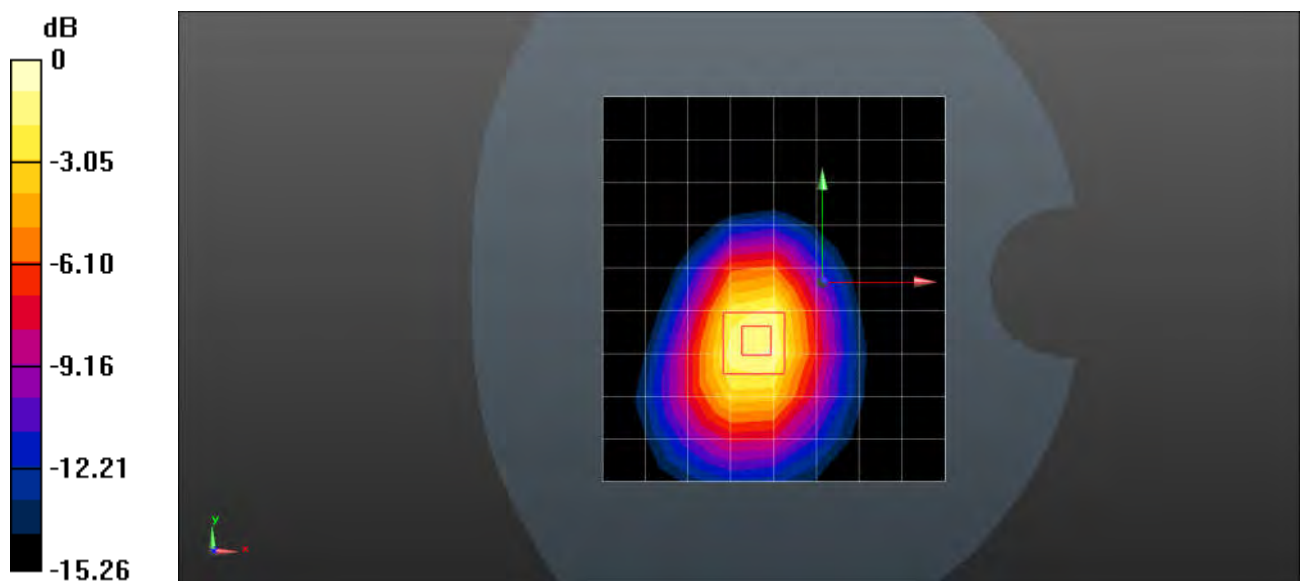

0 dB = 0.570 W/kg = -2.44 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 25 20M QPSK 50RB0 26365CH Top side 0mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 39.802$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.54, 7.96, 8.42); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.48 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.06 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 3.99 W/kg

SAR(1 g) = 2.2 W/kg; SAR(10 g) = 1.09 W/kg

Maximum value of SAR (measured) = 3.41 W/kg

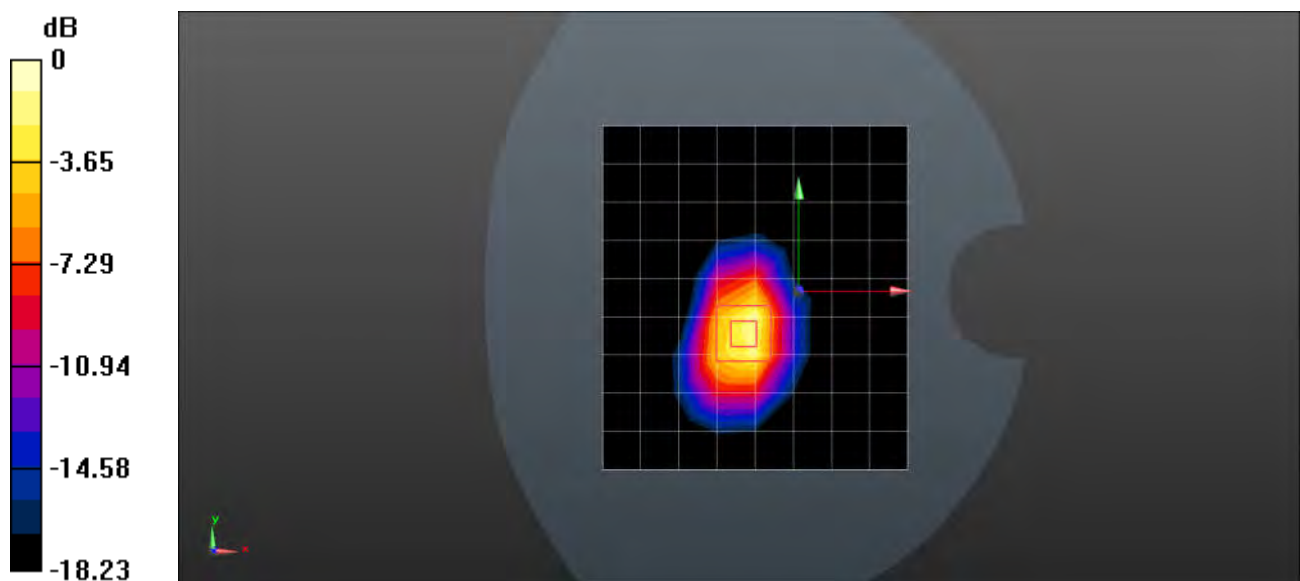

0 dB = 3.41 W/kg = 5.33 dBW/kg

LTE Band 41 QPSK 20M 1RB0 40620CH Right cheek

Communication System: Band 41; Frequency: 2593.000

Medium: HSL. Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 38.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.16, 7.16, 7.16); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.604 W/kg; SAR (10g) = 0.279 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.646 W/kg; SAR (10g) = 0.299 W/kg;

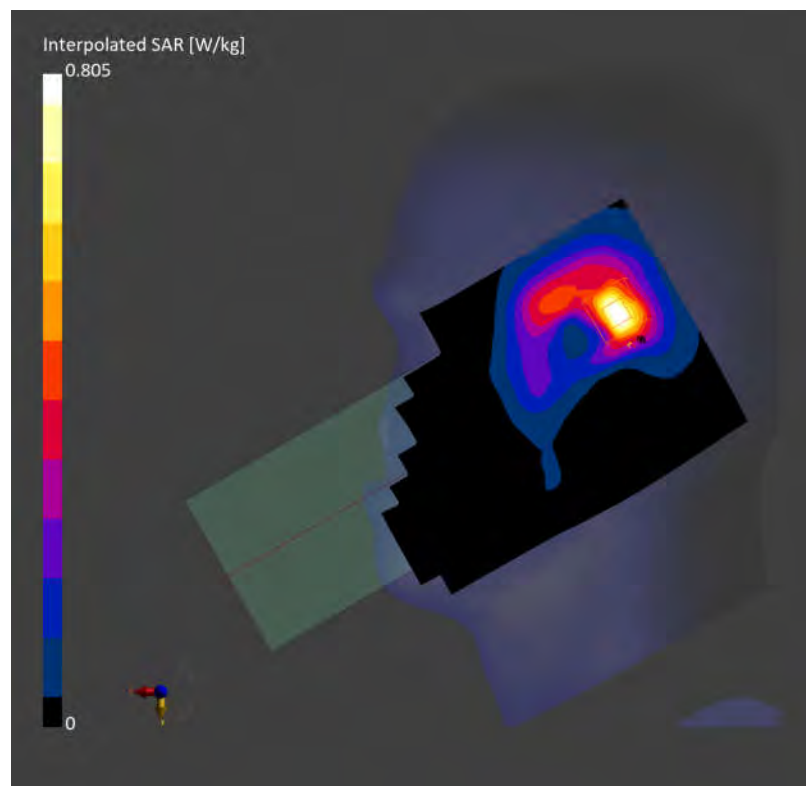

LTE Band 41 QPSK 20M 1RB0 40620CH Front side 10mm

Communication System: Band 41; Frequency: 2593.000

Medium: HSL. Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 38.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.16, 7.16, 7.16); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.136 W/kg; SAR (10g) = 0.076 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.14 dB

SAR (1g) = 0.174 W/kg; SAR (10g) = 0.081 W/kg;

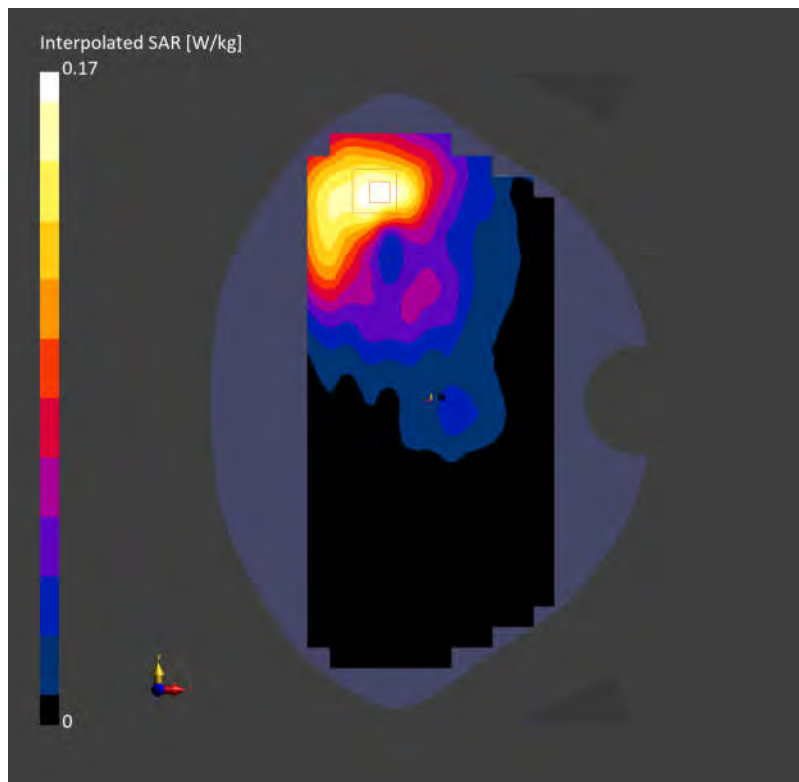

LTE Band 41 QPSK 20M 1RB0 40620CH Top side 10mm

Communication System: Band 41; Frequency: 2593.000

Medium: HSL. Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 38.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.16, 7.16, 7.16); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.485 W/kg; SAR (10g) = 0.255 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.14 dB

SAR (1g) = 0.542 W/kg; SAR (10g) = 0.293 W/kg;

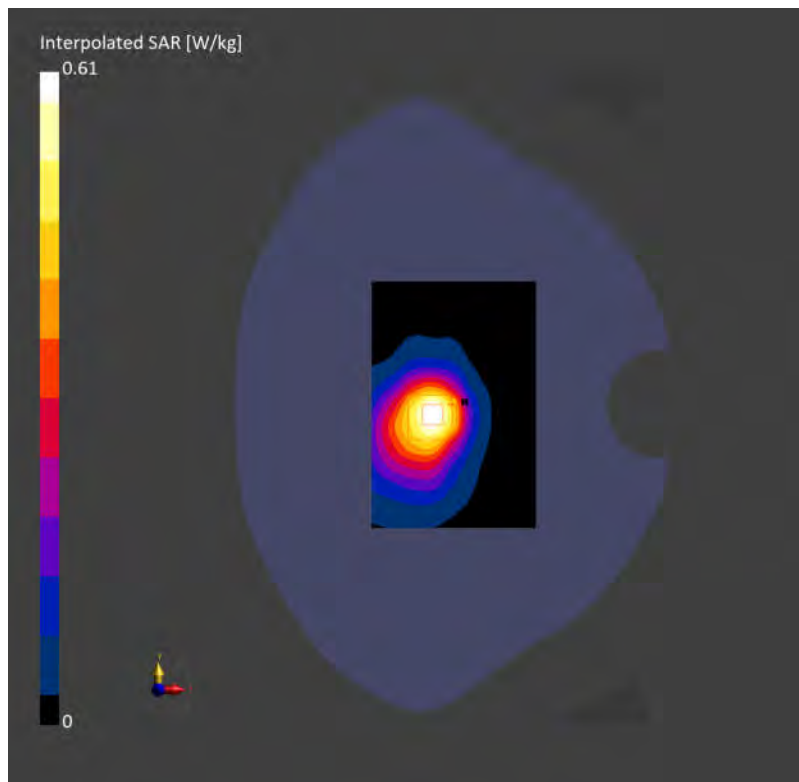

LTE Band 41 QPSK 20M 1RB0 40620CH Top side 0mm

Communication System: Band 41; Frequency: 2593.000

Medium: HSL. Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 38.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.16, 7.16, 7.16); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.34 W/kg; SAR (10g) = 0.610 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.17 dB

SAR (1g) = 1.27 W/kg; SAR (10g) = 0.582 W/kg;

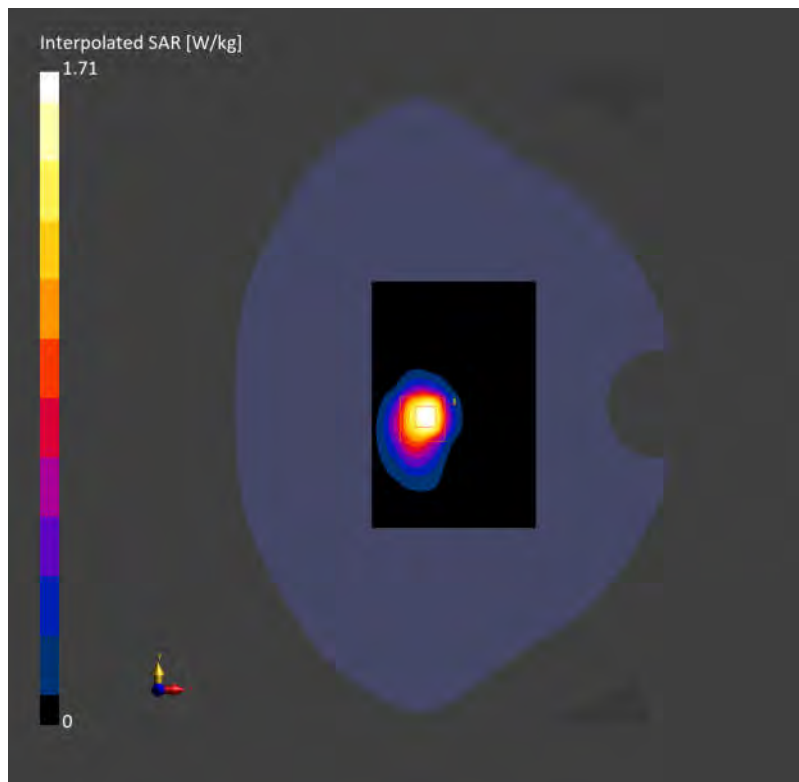

Test Laboratory: SGS-SAR Lab

E4P LTE Band 42 20M QPSK 1RB0 42190CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3460 MHz; Duty Cycle: 1:1.58

Medium: HSL3500; Medium parameters used: $f = 3460$ MHz; $\sigma = 2.953$ S/m; $\epsilon_r = 38.907$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.64, 7.02, 7.52); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (13x20x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.446 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.5460 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.559 W/kg

SAR(1 g) = 0.291 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.454 W/kg

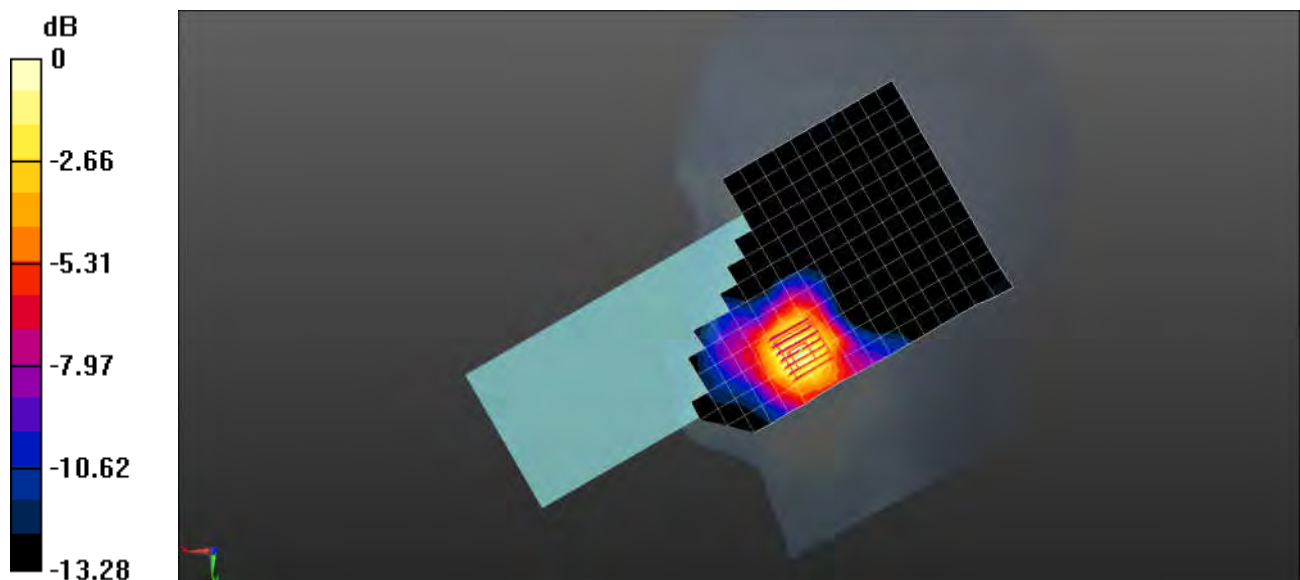

0 dB = 0.454 W/kg = -3.43 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 42 20M QPSK 1RB0 42190CH Front side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3460 MHz; Duty Cycle: 1:1.58

Medium: HSL3500; Medium parameters used: $f = 3460$ MHz; $\sigma = 2.953$ S/m; $\epsilon_r = 38.907$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.64, 7.02, 7.52); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x24x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.116 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 4.509 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

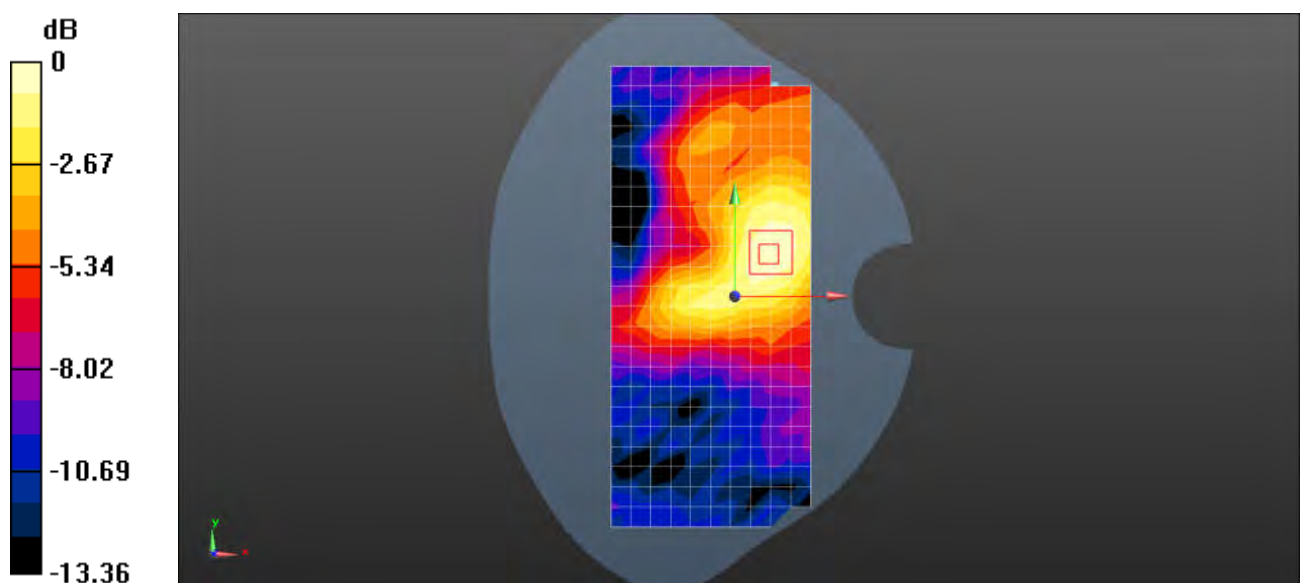

0 dB = 0.120 W/kg = -9.21 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 42 20M QPSK 1RB0 42190CH Right side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3460 MHz; Duty Cycle: 1:1.58

Medium: HSL3500; Medium parameters used: $f = 3460$ MHz; $\sigma = 2.953$ S/m; $\epsilon_r = 38.907$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.64, 7.02, 7.52); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x26x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.600 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 9.705 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.770 W/kg

SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 0.614 W/kg

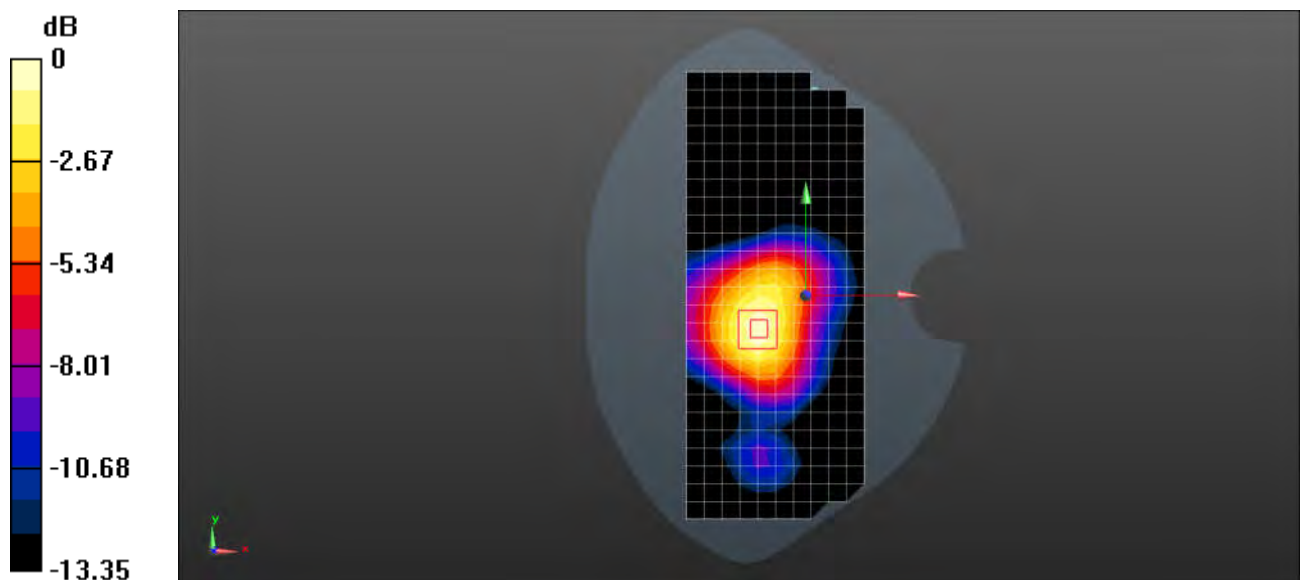

0 dB = 0.614 W/kg = -2.12 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 42 20M QPSK 1RB0 42190CH Right side 0mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3460 MHz; Duty Cycle: 1:1.58

Medium: HSL3500; Medium parameters used: $f = 3460$ MHz; $\sigma = 2.953$ S/m; $\epsilon_r = 38.907$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(6.82, 6.82, 6.82); Calibrated: 2023-10-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x26x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 3.19 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 17.29 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 4.25 W/kg

SAR(1 g) = 1.76 W/kg; SAR(10 g) = 0.705 W/kg

Maximum value of SAR (measured) = 3.21 W/kg

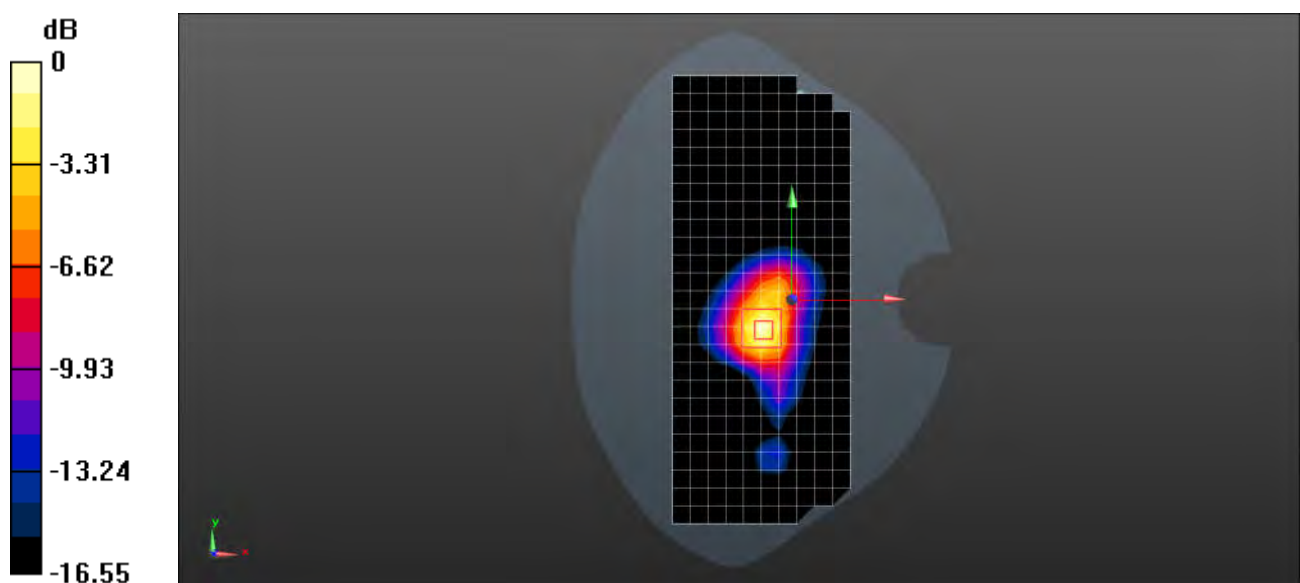

Test Laboratory: SGS-SAR Lab

E4P LTE Band 43 20M QPSK 1RB0 45090CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3750 MHz; Duty Cycle: 1:1.58

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.169$ S/m; $\epsilon_r = 37.572$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.21, 6.62, 7.1); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (13x20x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.523 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.5700 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.655 W/kg

SAR(1 g) = 0.282 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.532 W/kg

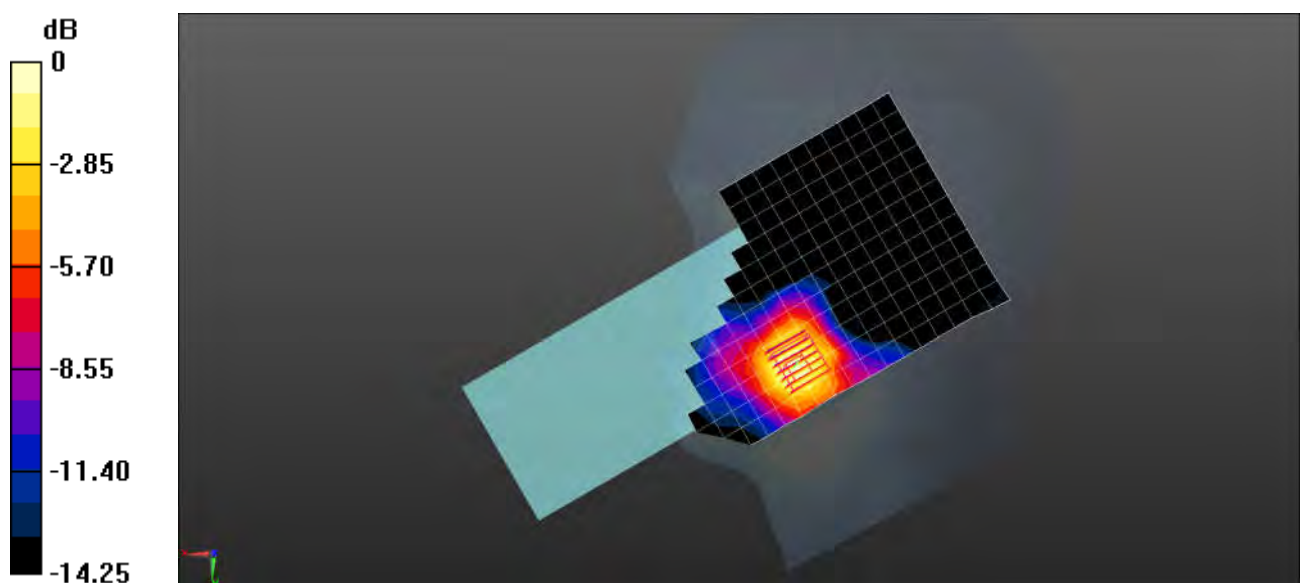

0 dB = 0.532 W/kg = -2.74 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 43 20M QPSK 1RB0 45090CH Front side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3750 MHz; Duty Cycle: 1:1.58

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.169$ S/m; $\epsilon_r = 37.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.21, 6.62, 7.1); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x24x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.136 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.711 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.177 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.141 W/kg

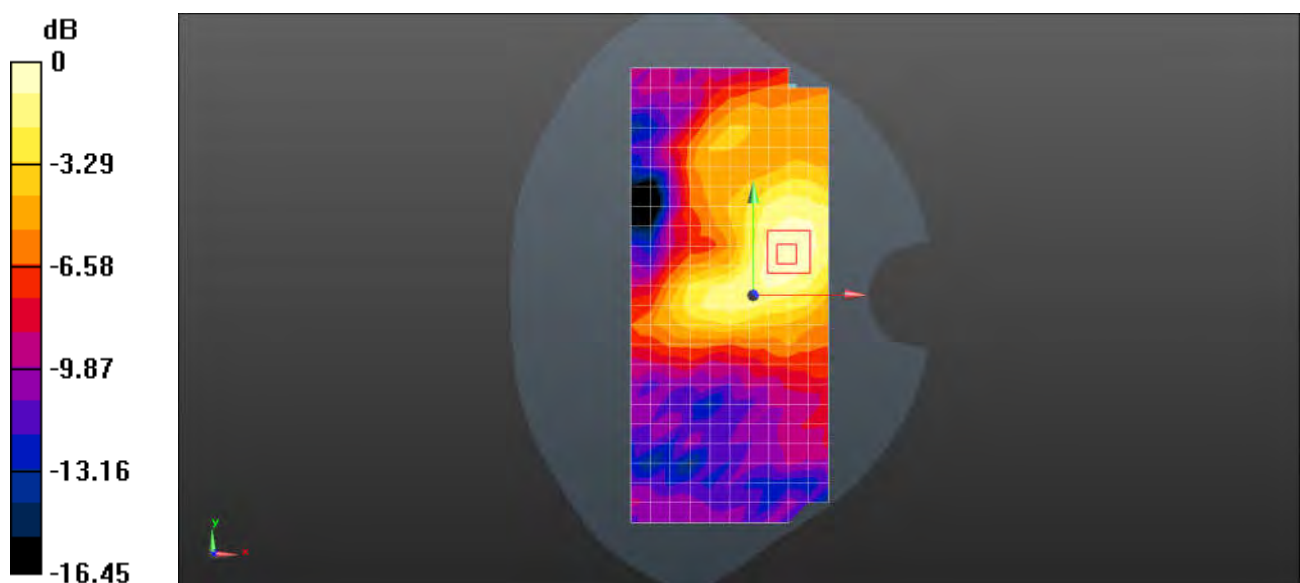

0 dB = 0.141 W/kg = -8.51 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 43 20M QPSK 50RB0 45090CH Right side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3750 MHz; Duty Cycle: 1:1.58

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.169$ S/m; $\epsilon_r = 37.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.21, 6.62, 7.1); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x26x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.703 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 10.14 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.902 W/kg

SAR(1 g) = 0.457 W/kg; SAR(10 g) = 0.237 W/kg

Maximum value of SAR (measured) = 0.719 W/kg

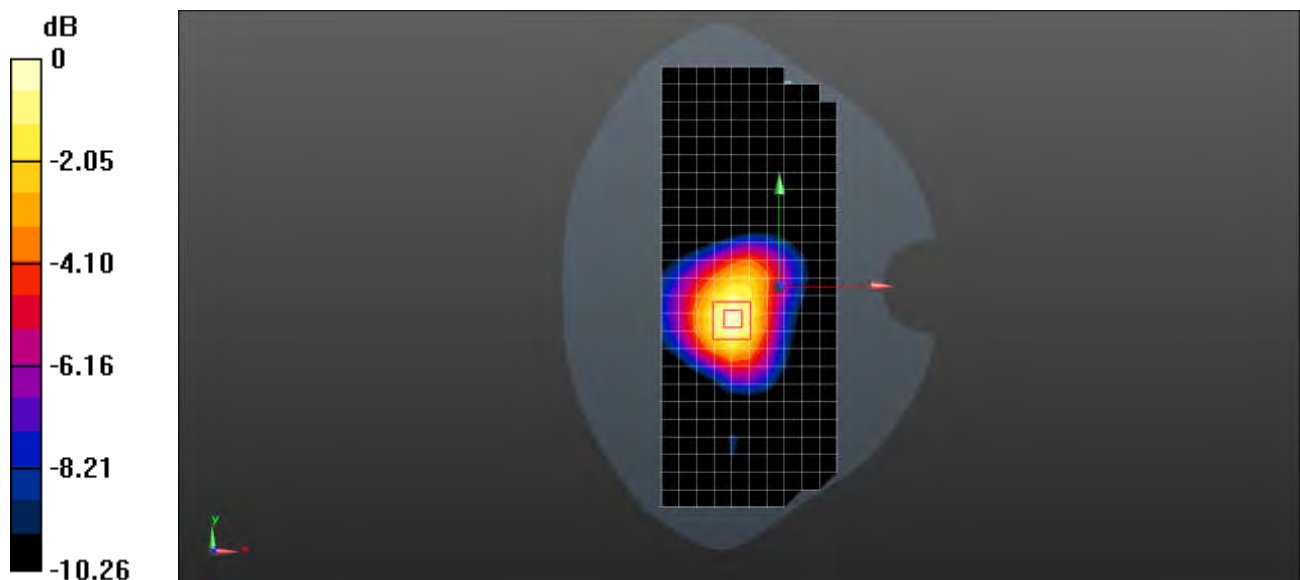

Test Laboratory: SGS-SAR Lab

E4P LTE Band 43 20M QPSK 1RB0 45090CH Right side 0mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3750 MHz; Duty Cycle: 1:1.58

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.169$ S/m; $\epsilon_r = 37.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.21, 6.62, 7.1); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x26x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 3.61 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 17.75 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 4.79 W/kg

SAR(1 g) = 1.98 W/kg; SAR(10 g) = 0.732 W/kg

Maximum value of SAR (measured) = 3.62 W/kg

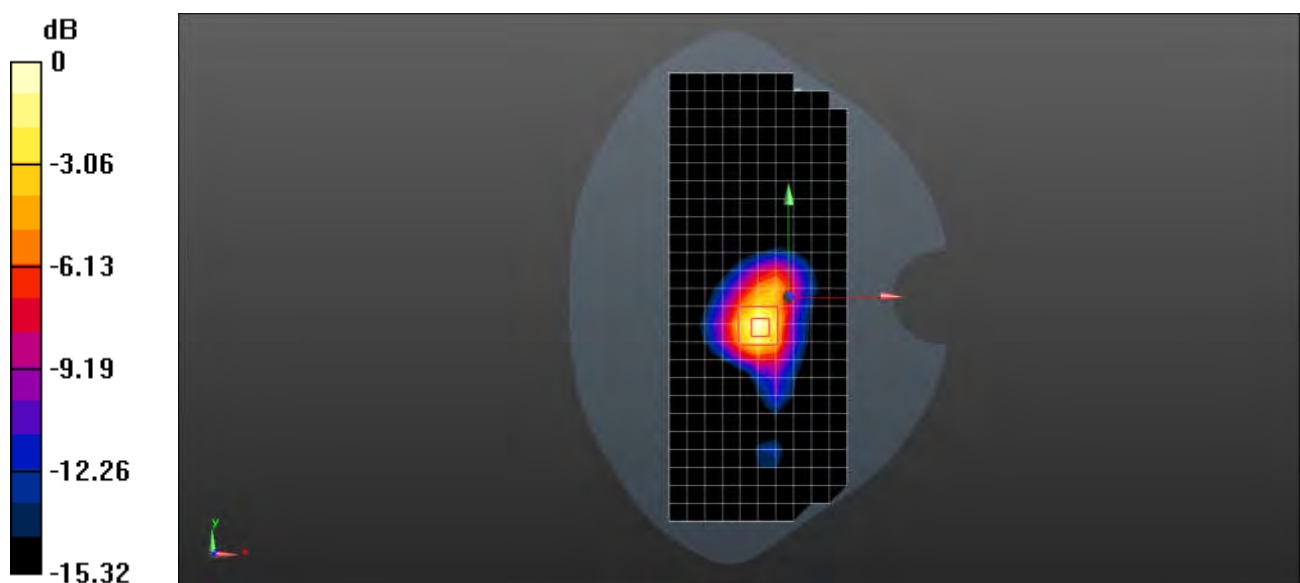

Test Laboratory: SGS-SAR Lab

E4P LTE Band 48 20M QPSK 1RB0 55830CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3609 MHz; Duty Cycle: 1:1.58

Medium: HSL3700; Medium parameters used: $f = 3609$ MHz; $\sigma = 3.014$ S/m; $\epsilon_r = 38.009$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.21, 6.62, 7.1); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (13x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.475 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.5570 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.595 W/kg

SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.149 W/kg

Maximum value of SAR (measured) = 0.483 W/kg

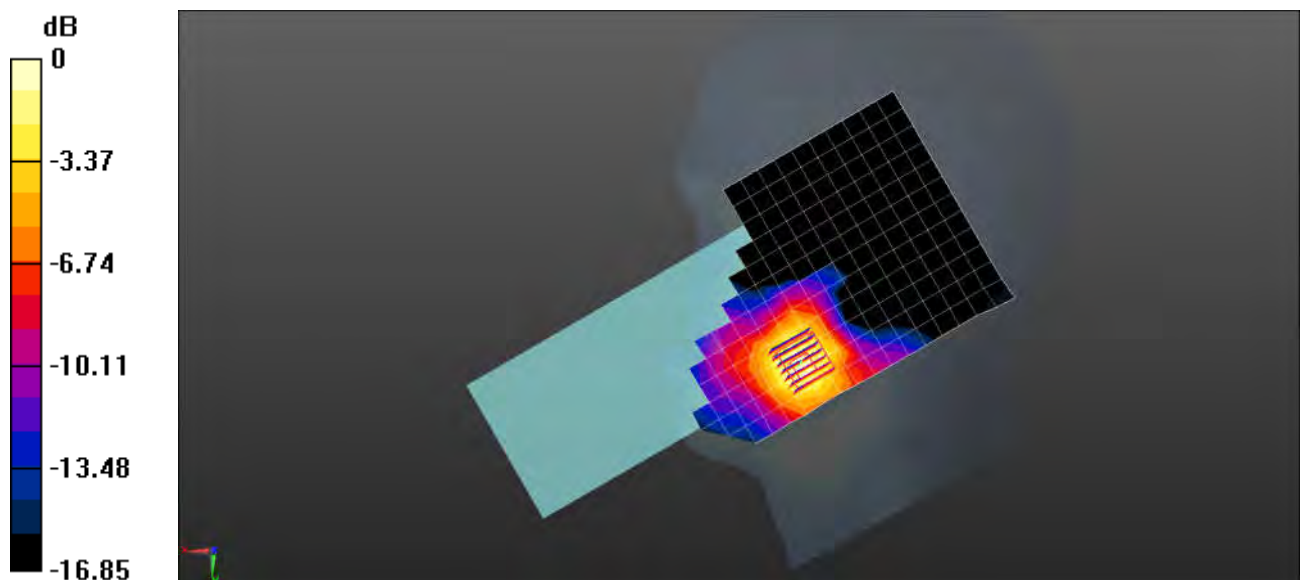

0 dB = 0.483 W/kg = -3.16 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 48 20M QPSK 1RB0 55830CH Front side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3609 MHz; Duty Cycle: 1:1.58

Medium: HSL3700; Medium parameters used: $f = 3609$ MHz; $\sigma = 3.014$ S/m; $\epsilon_r = 38.009$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.21, 6.62, 7.1); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x24x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.172 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 5.519 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.222 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.178 W/kg

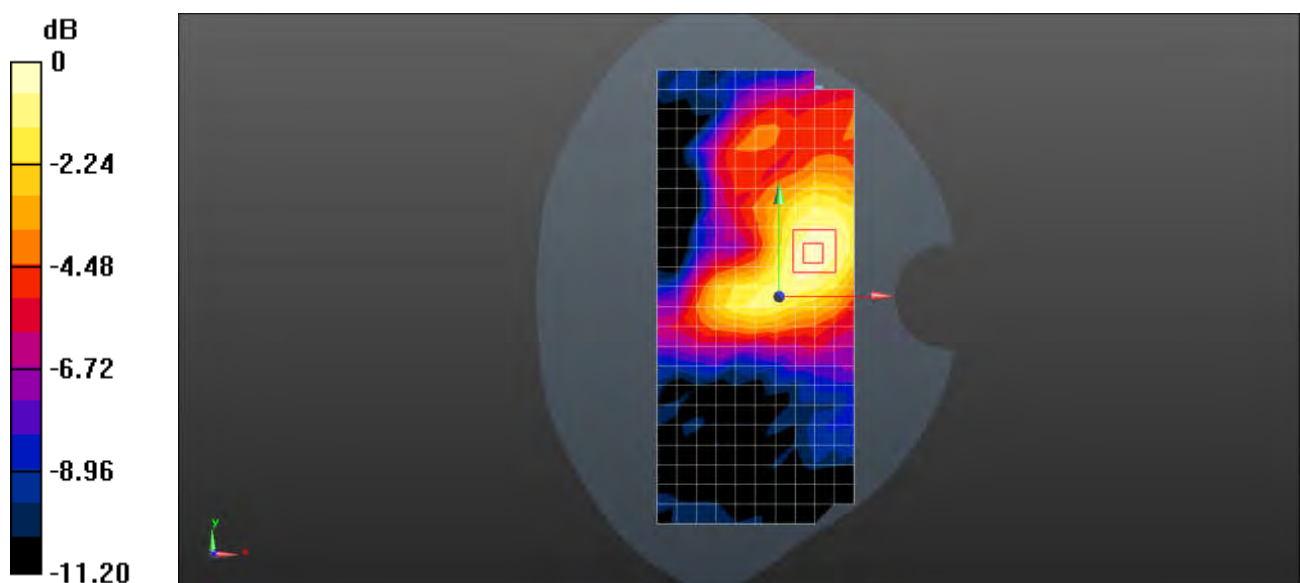

0 dB = 0.178 W/kg = -7.50 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 48 20M QPSK 1RB0 55830CH Right side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3609 MHz; Duty Cycle: 1:1.58

Medium: HSL3700; Medium parameters used: $f = 3609$ MHz; $\sigma = 3.014$ S/m; $\epsilon_r = 38.009$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.21, 6.62, 7.1); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x26x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.639 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 9.910 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.819 W/kg

SAR(1 g) = 0.415 W/kg; SAR(10 g) = 0.216 W/kg

Maximum value of SAR (measured) = 0.653 W/kg

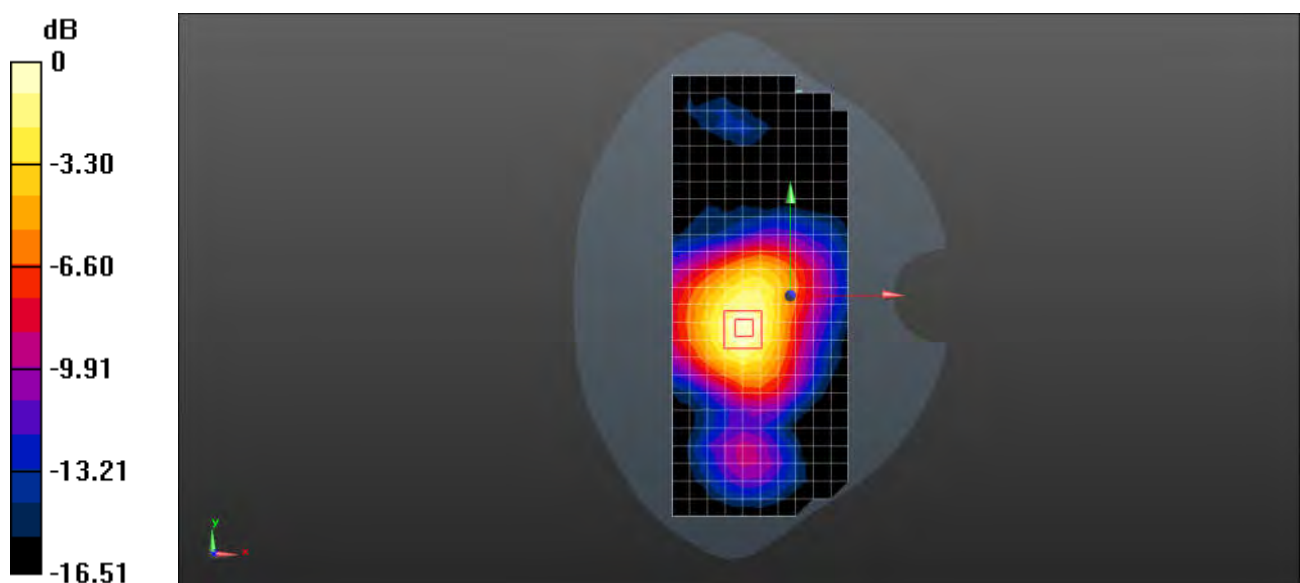

0 dB = 0.653 W/kg = -1.85 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 48 20M QPSK 1RB0 55830CH Right side 0mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3609 MHz; Duty Cycle: 1:1.58

Medium: HSL3700; Medium parameters used: $f = 3609$ MHz; $\sigma = 3.014$ S/m; $\epsilon_r = 38.009$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.21, 6.62, 7.1); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x26x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.28 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 17.34 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 4.35 W/kg

SAR(1 g) = 1.8 W/kg; SAR(10 g) = 0.753 W/kg

Maximum value of SAR (measured) = 3.29 W/kg

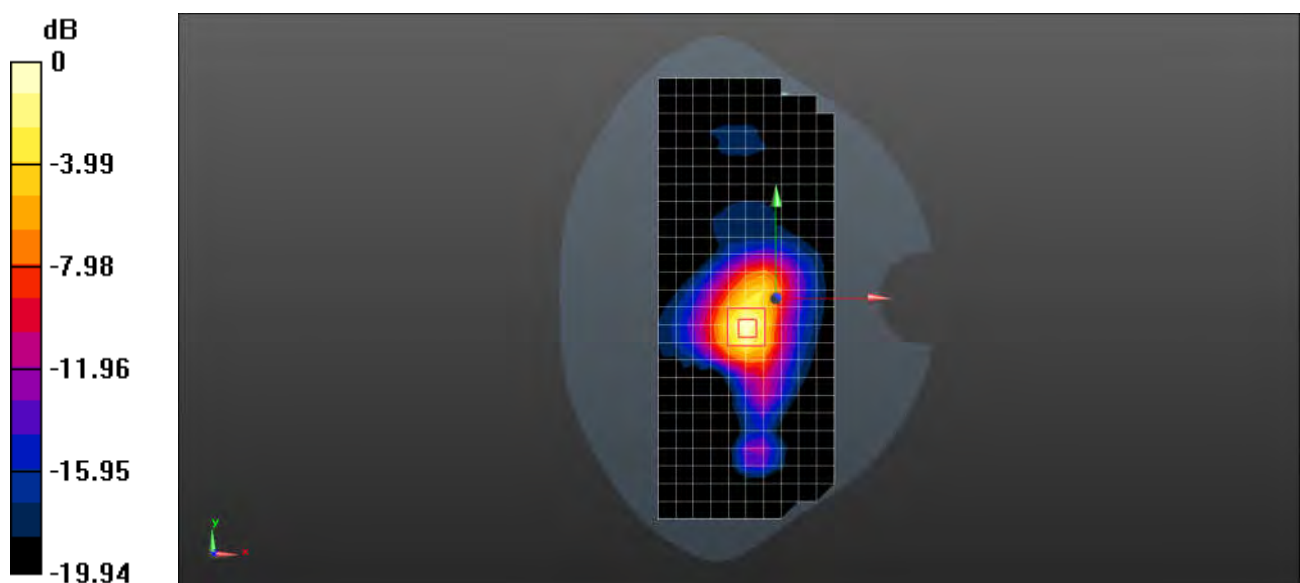

0 dB = 3.29 W/kg = 5.17 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 66 20M QPSK 1RB0 132322CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.386$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(9.45, 8.73, 9.34); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.608 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.633 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.799 W/kg

SAR(1 g) = 0.482 W/kg; SAR(10 g) = 0.265 W/kg

Maximum value of SAR (measured) = 0.679 W/kg

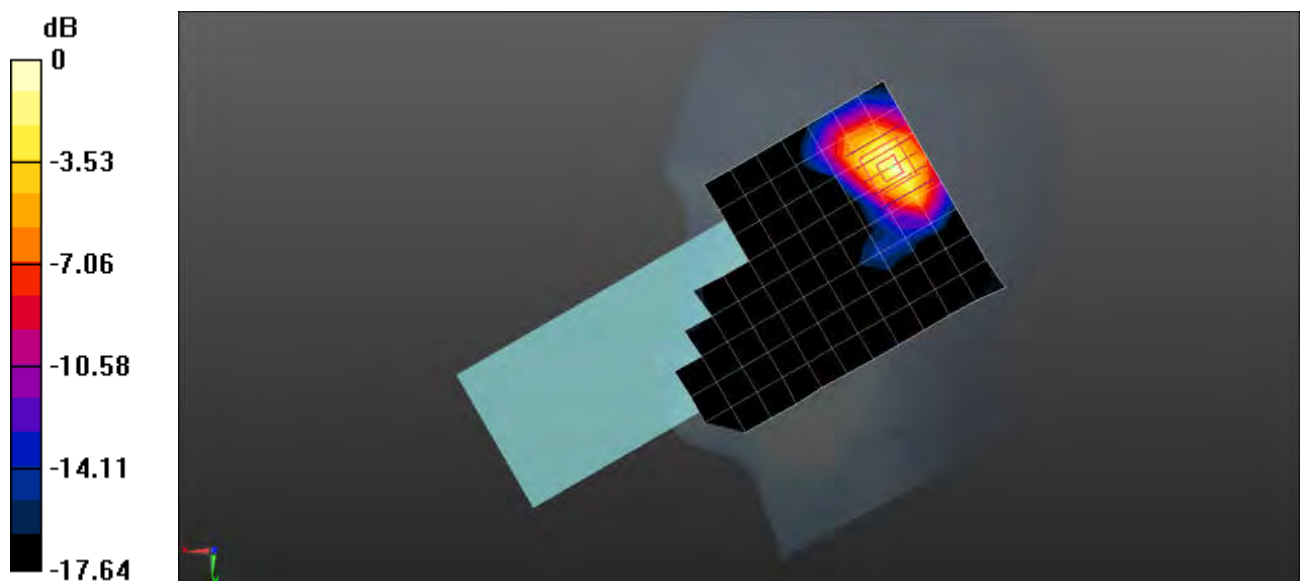

0 dB = 0.679 W/kg = -1.68 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 66 20M QPSK 1RB0 132322CH Front side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.386$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(9.45, 8.73, 9.34); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x18x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.389 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.624 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.494 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 0.434 W/kg

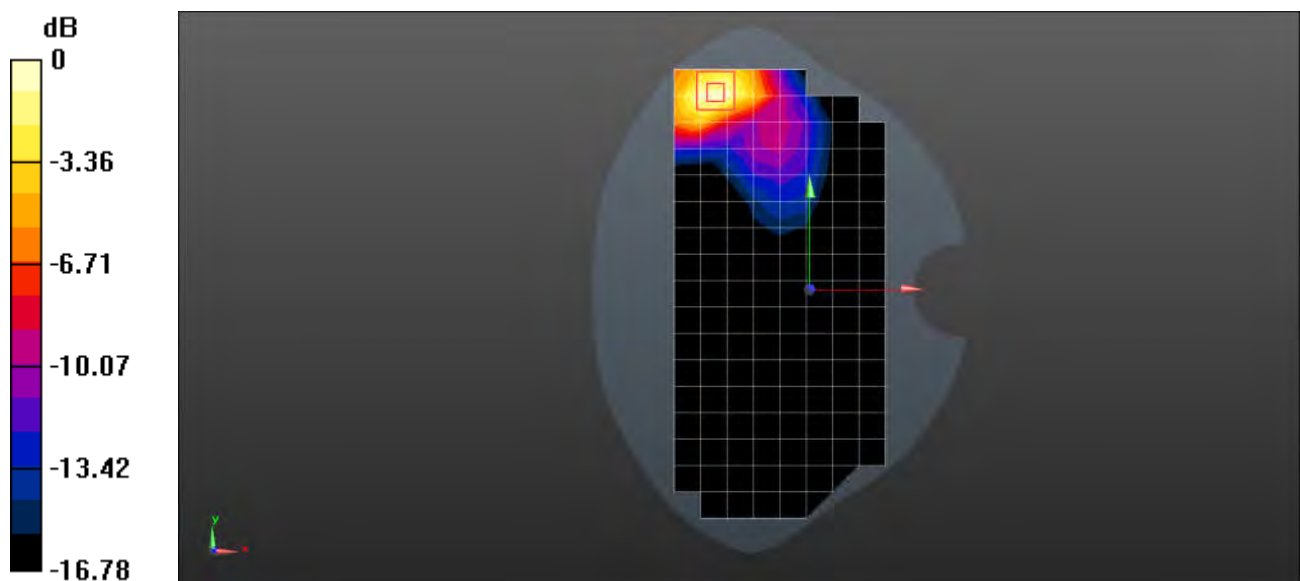

0 dB = 0.434 W/kg = -3.63 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 66 20M QPSK 1RB0 132322CH Top side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.386$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(9.45, 8.73, 9.34); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.557 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.46 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.734 W/kg

SAR(1 g) = 0.468 W/kg; SAR(10 g) = 0.275 W/kg

Maximum value of SAR (measured) = 0.650 W/kg

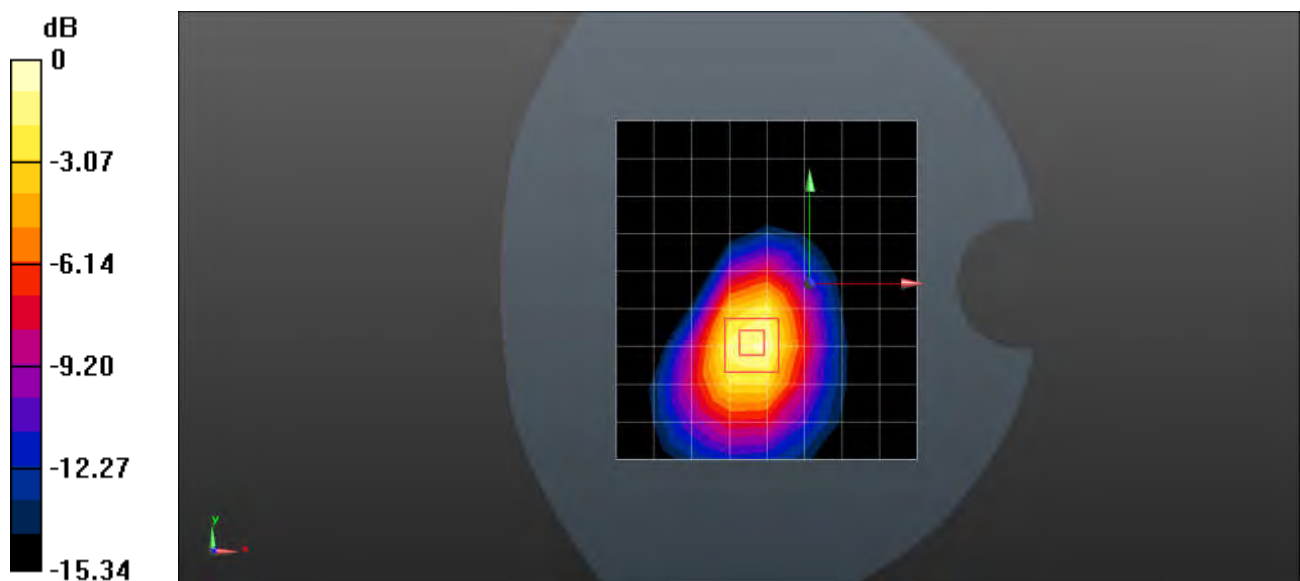

0 dB = 0.650 W/kg = -1.87 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P LTE Band 66 20M QPSK 1RB0 132322CH Top side 0mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.386$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(9.45, 8.73, 9.34); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.48 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.05 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 4.20 W/kg

SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.16 W/kg

Maximum value of SAR (measured) = 3.59 W/kg

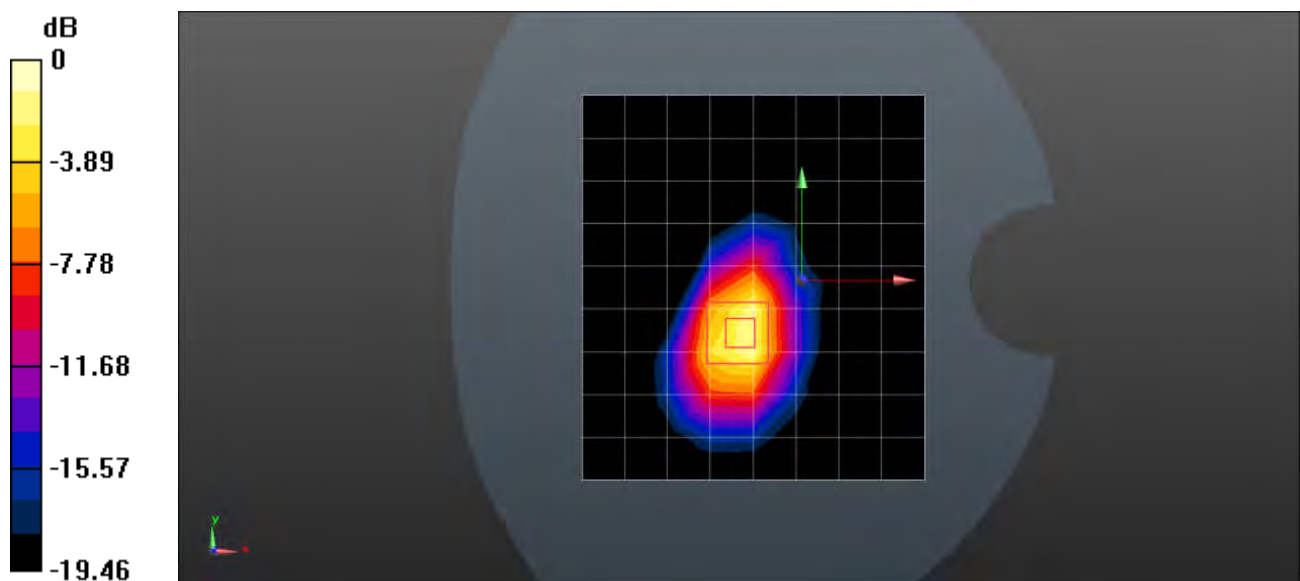

0 dB = 3.59 W/kg = 5.55 dBW/kg

LTE Band 71 QPSK 20M 1RB0 133322CH Right cheek

Communication System: Band 71; Frequency: 673.000

Medium: HSL. Medium parameters used: $f = 673.000$ MHz; $\sigma = 0.812$ S/m; $\epsilon_r = 43.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.61, 9.61, 9.61); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.106 W/kg; SAR (10g) = 0.073 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.107 W/kg; SAR (10g) = 0.075 W/kg;

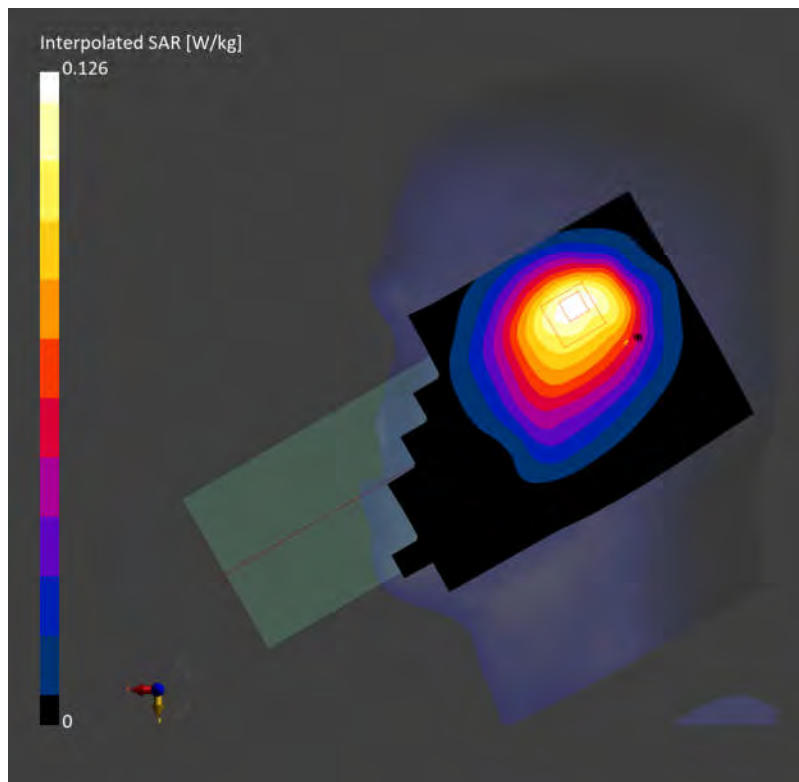

LTE Band 71 QPSK 20M 1RB0 133322CH Front side 10mm

Communication System: Band 71; Frequency: 683.000

Medium: HSL. Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.807$ S/m; $\epsilon_r = 42.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.61, 9.61, 9.61); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.022 W/kg; SAR (10g) = 0.015 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.07 dB

SAR (1g) = 0.023 W/kg; SAR (10g) = 0.016 W/kg;

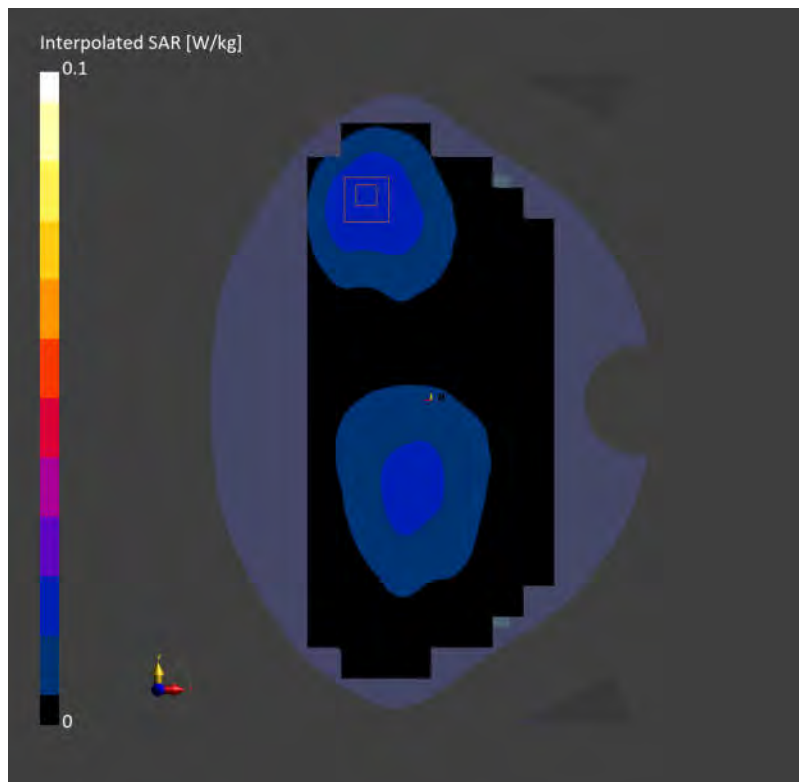

LTE Band 71 QPSK 20M 1RB0 133322CH Top side 10mm

Communication System: Band 71; Frequency: 683.000

Medium: HSL. Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.807$ S/m; $\epsilon_r = 42.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.61, 9.61, 9.61); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.035 W/kg; SAR (10g) = 0.022 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.037 W/kg; SAR (10g) = 0.020 W/kg;

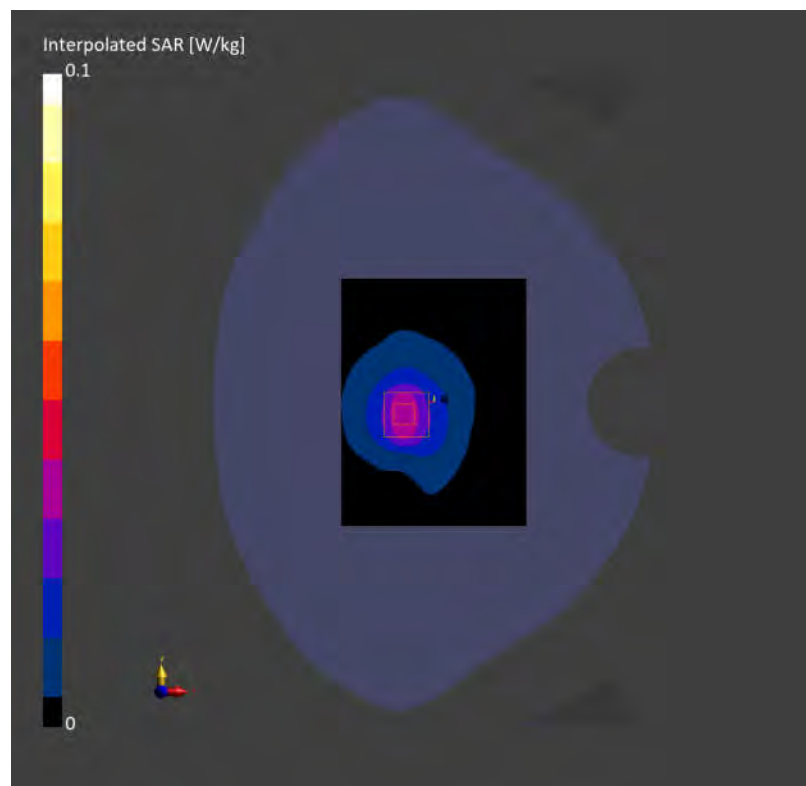

LTE Band 71 QPSK 20M 1RB0 133322CH Top side 0mm

Communication System: Band 71; Frequency: 683.000

Medium: HSL. Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.807$ S/m; $\epsilon_r = 42.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(9.61, 9.61, 9.61); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.317 W/kg; SAR (10g) = 0.157 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.337 W/kg; SAR (10g) = 0.130 W/kg;

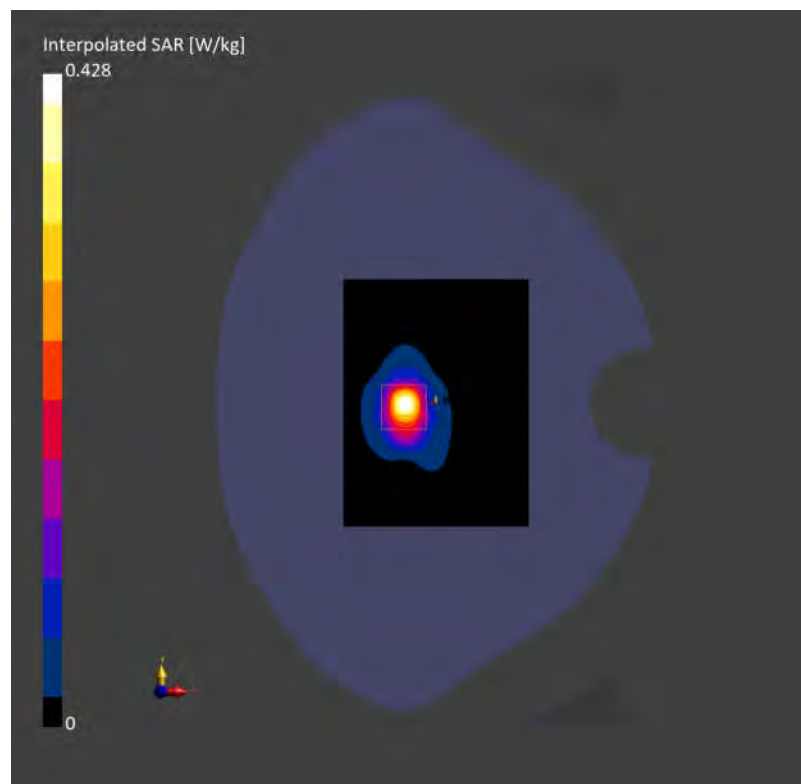

Test Laboratory: SGS-SAR Lab

E4P 5G NR n5 20M QPSK 1RB1 167300CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.911$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(10.39, 9.86, 10); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.466 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.05 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.584 W/kg

SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.276 W/kg

Maximum value of SAR (measured) = 0.503 W/kg

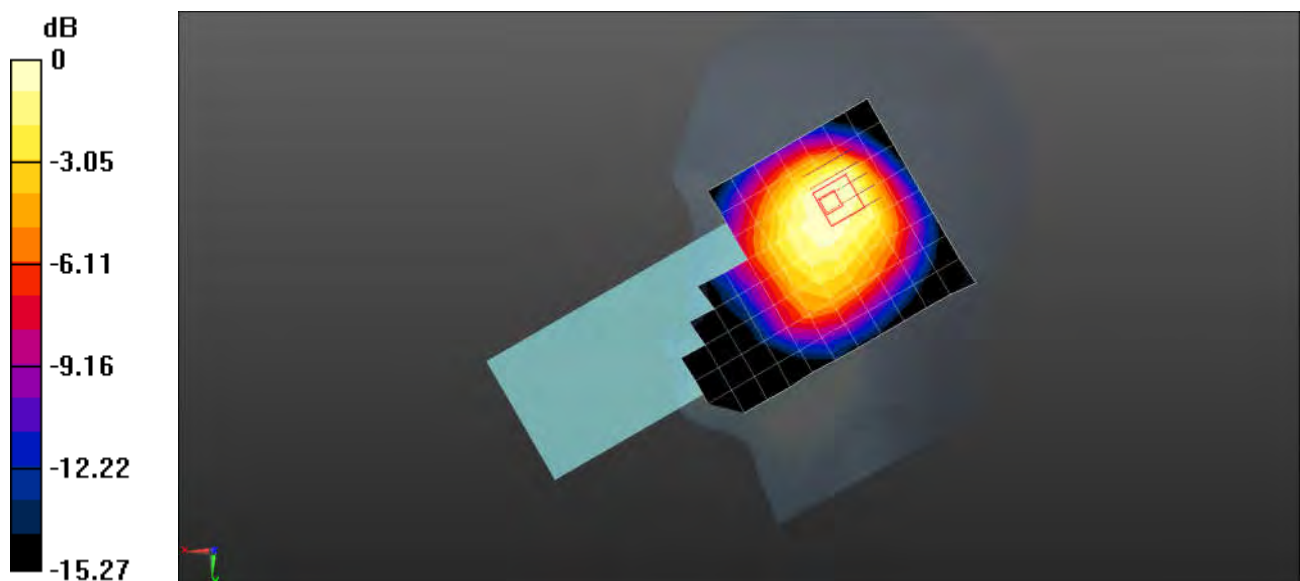

0 dB = 0.503 W/kg = -2.98 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n5 20M QPSK 1RB1 167300CH Front side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.911$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(10.39, 9.86, 10); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x18x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.323 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.459 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.336 W/kg

SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 0.320 W/kg

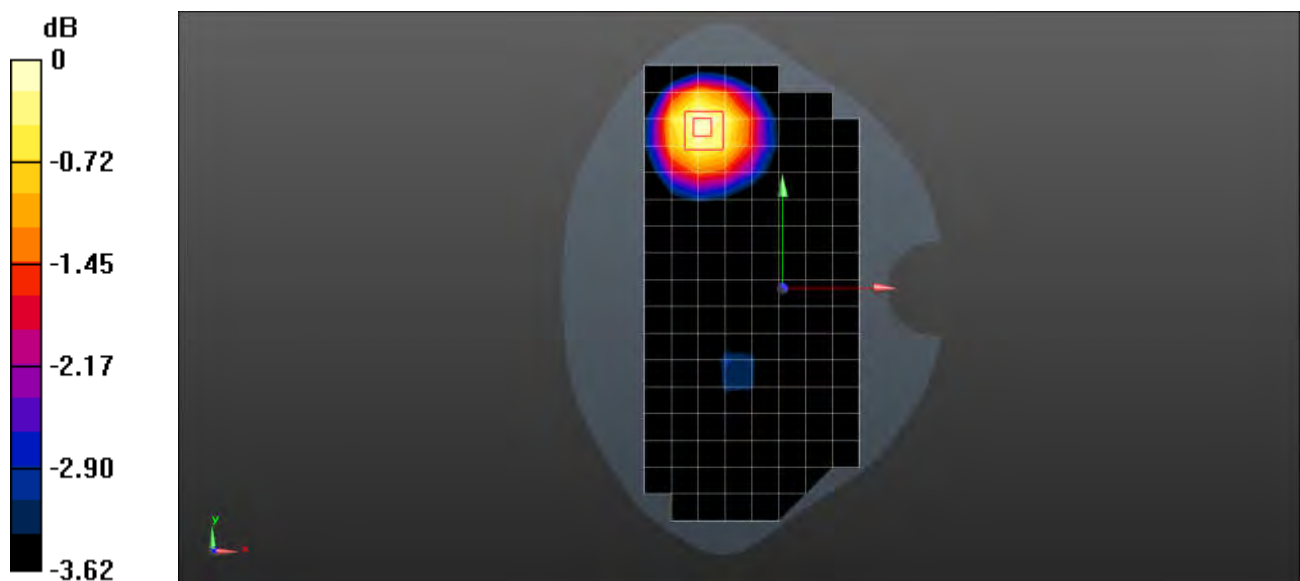

0 dB = 0.320 W/kg = -4.95 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n5 20M QPSK 1RB1 167300CH Left side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.911$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(10.39, 9.86, 10); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x19x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.356 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.354 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.412 W/kg

SAR(1 g) = 0.289 W/kg; SAR(10 g) = 0.204 W/kg

Maximum value of SAR (measured) = 0.369 W/kg

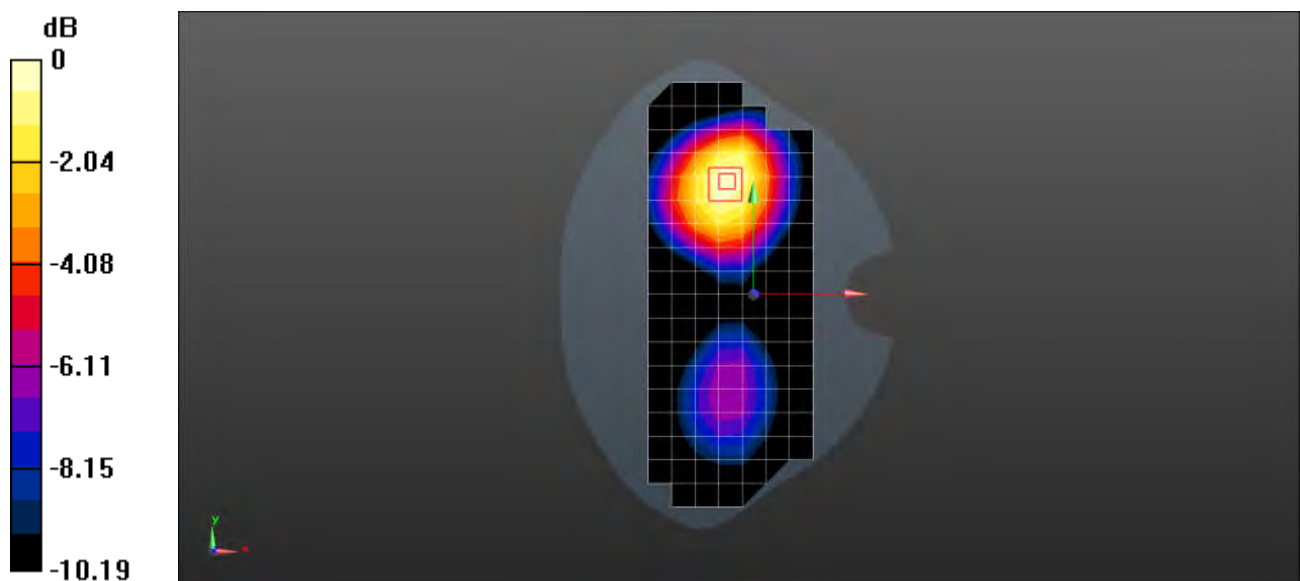

0 dB = 0.369 W/kg = -4.33 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n5 20M QPSK 1RB1 167300CH Left side 0mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.911$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(10.39, 9.86, 10); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x19x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.65 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.26 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.610 W/kg

Maximum value of SAR (measured) = 1.64 W/kg

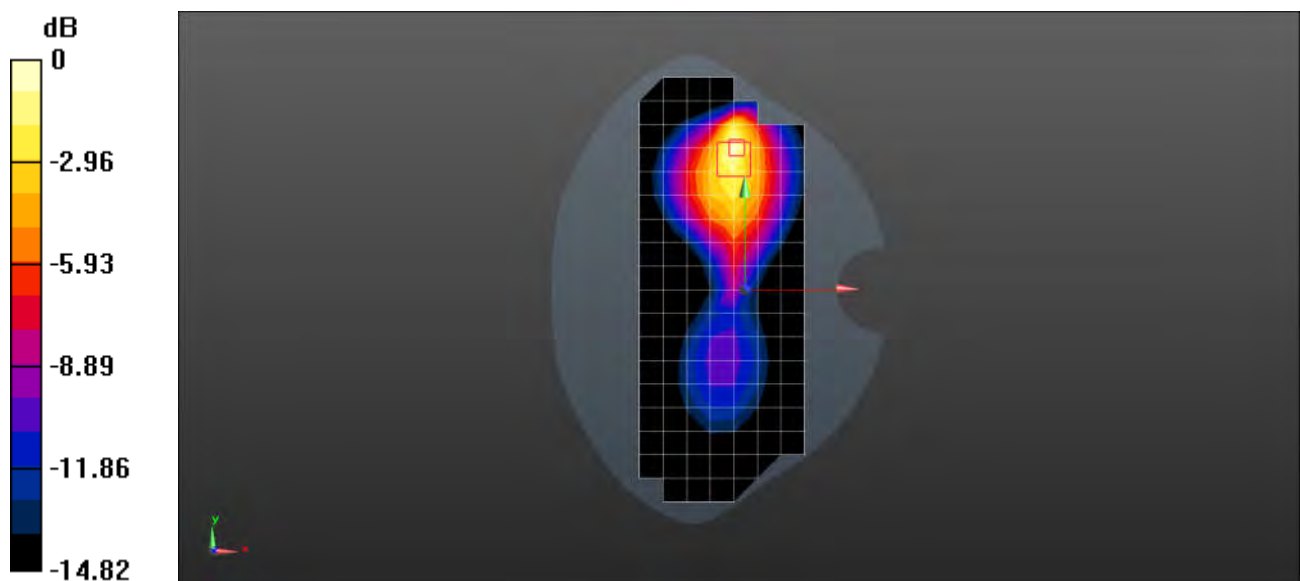

0 dB = 1.64 W/kg = 2.15 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n12 15M QPSK 36RB22 141500CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 42.26$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(10.54, 10.15, 10.87); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.561 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.73 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.766 W/kg

SAR(1 g) = 0.445 W/kg; SAR(10 g) = 0.297 W/kg

Maximum value of SAR (measured) = 0.603 W/kg

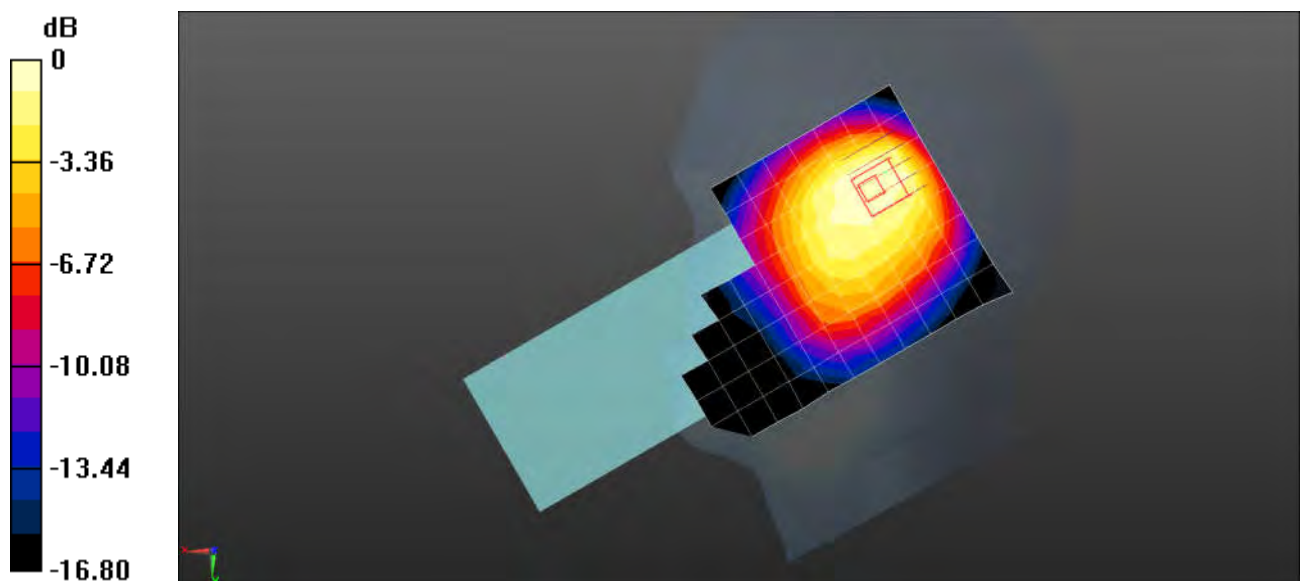

0 dB = 0.603 W/kg = -2.20 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n12 15M QPSK 36RB22 141500CH Front side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 42.26$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(10.54, 10.15, 10.87); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x18x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.321 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.974 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.355 W/kg

SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 0.320 W/kg

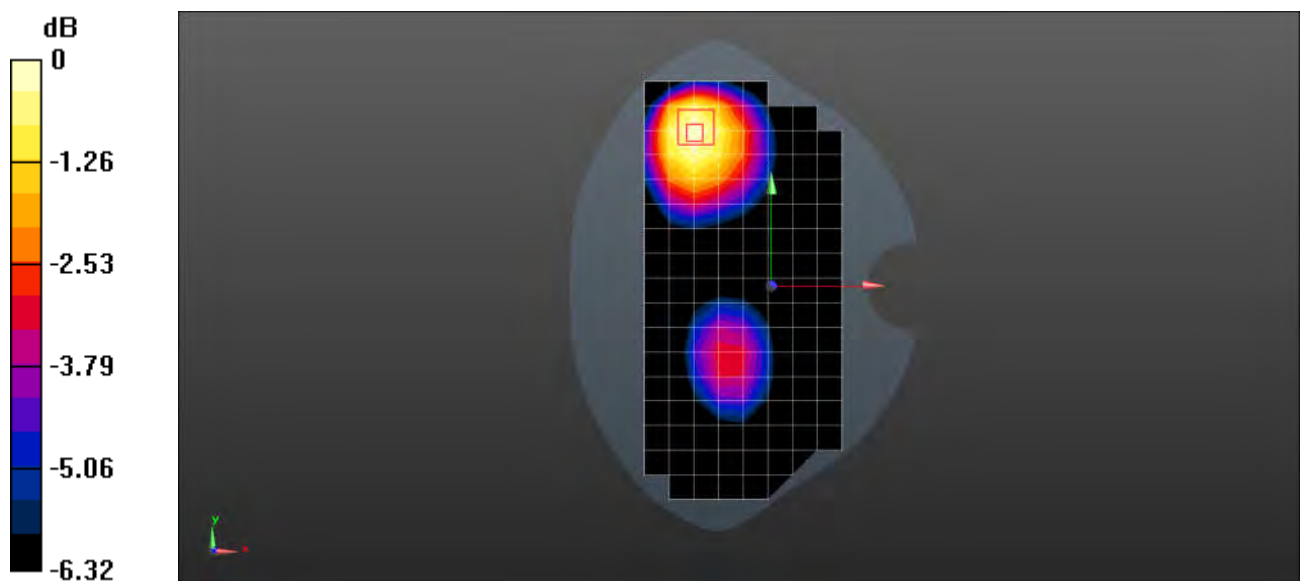

0 dB = 0.320 W/kg = -4.95 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n12 15M QPSK 36RB22 141500CH Front side 0mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 42.26$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(10.54, 10.15, 10.87); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x18x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.603 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.888 W/kg

SAR(1 g) = 0.488 W/kg; SAR(10 g) = 0.315 W/kg

Maximum value of SAR (measured) = 0.692 W/kg

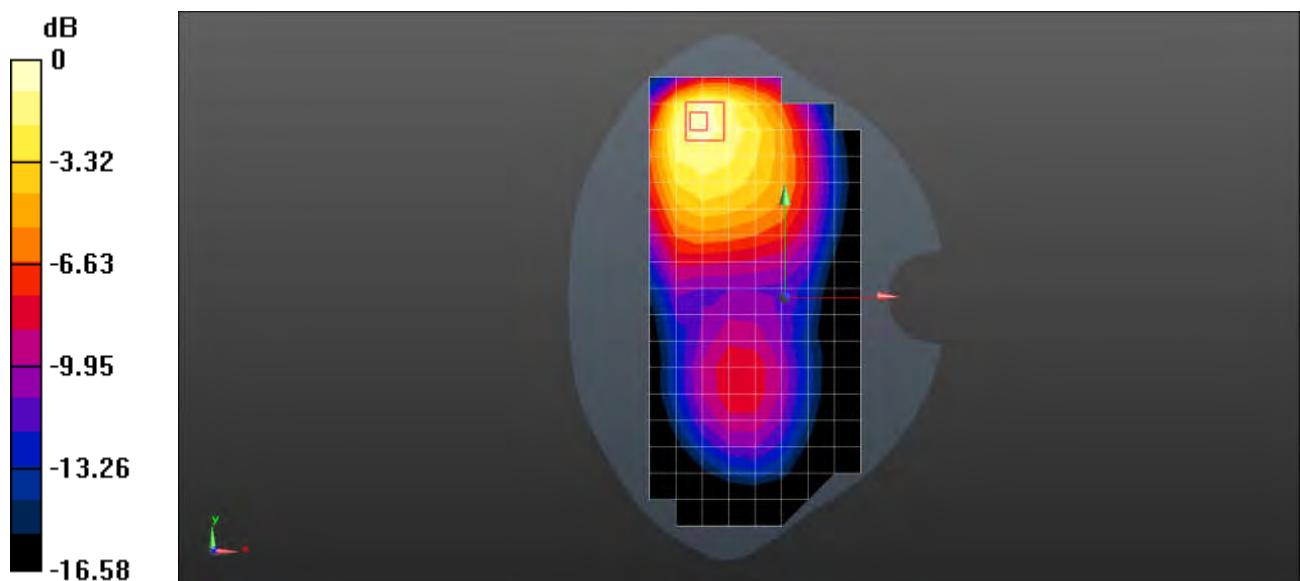

0 dB = 0.692 W/kg = -1.60 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n25 20M QPSK 50RB28 376500CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 39.802$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.54, 7.96, 8.42); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.622 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.79 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.652 W/kg; SAR(10 g) = 0.347 W/kg

Maximum value of SAR (measured) = 0.975 W/kg

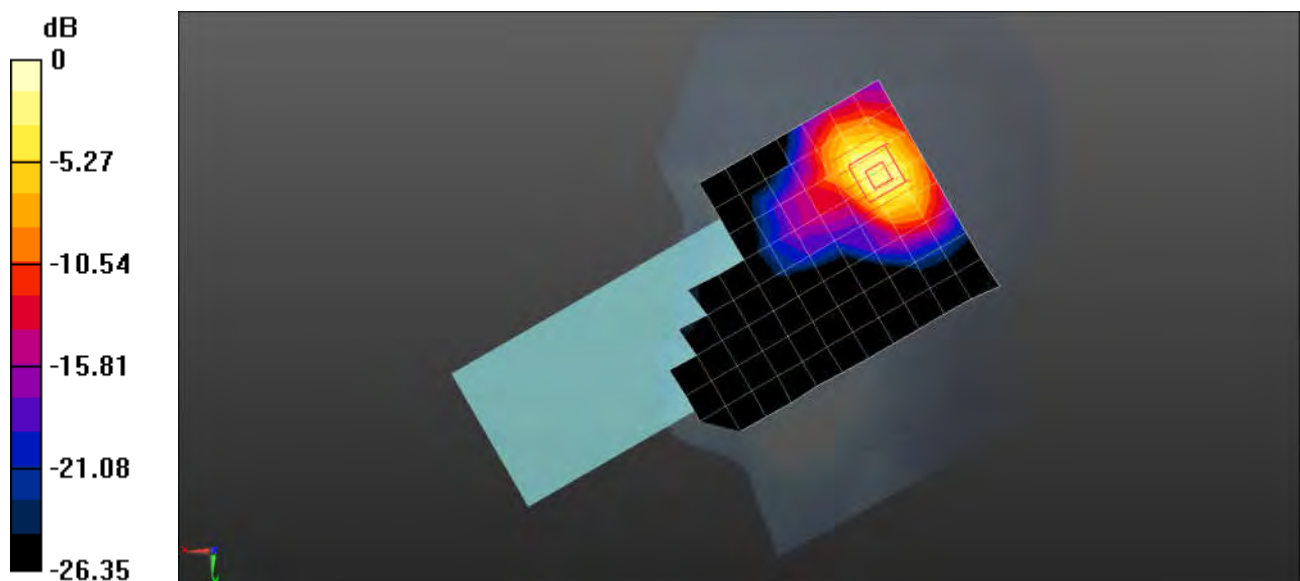

Test Laboratory: SGS-SAR Lab

E4P 5G NR n25 20M QPSK 50RB28 376500CH Front side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 39.802$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.54, 7.96, 8.42); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x18x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.424 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.842 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.518 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 0.458 W/kg

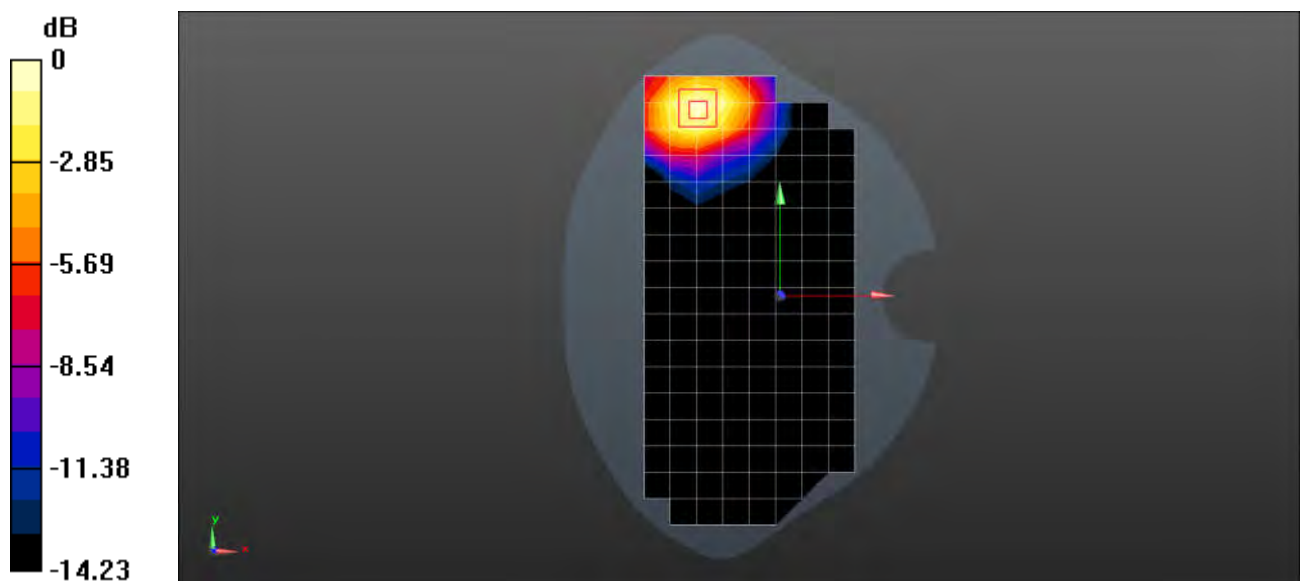

0 dB = 0.458 W/kg = -3.39 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n25 20M QPSK 50RB28 376500CH Top side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 39.802$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.54, 7.96, 8.42); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.731 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.32 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.952 W/kg

SAR(1 g) = 0.545 W/kg; SAR(10 g) = 0.311 W/kg

Maximum value of SAR (measured) = 0.797 W/kg

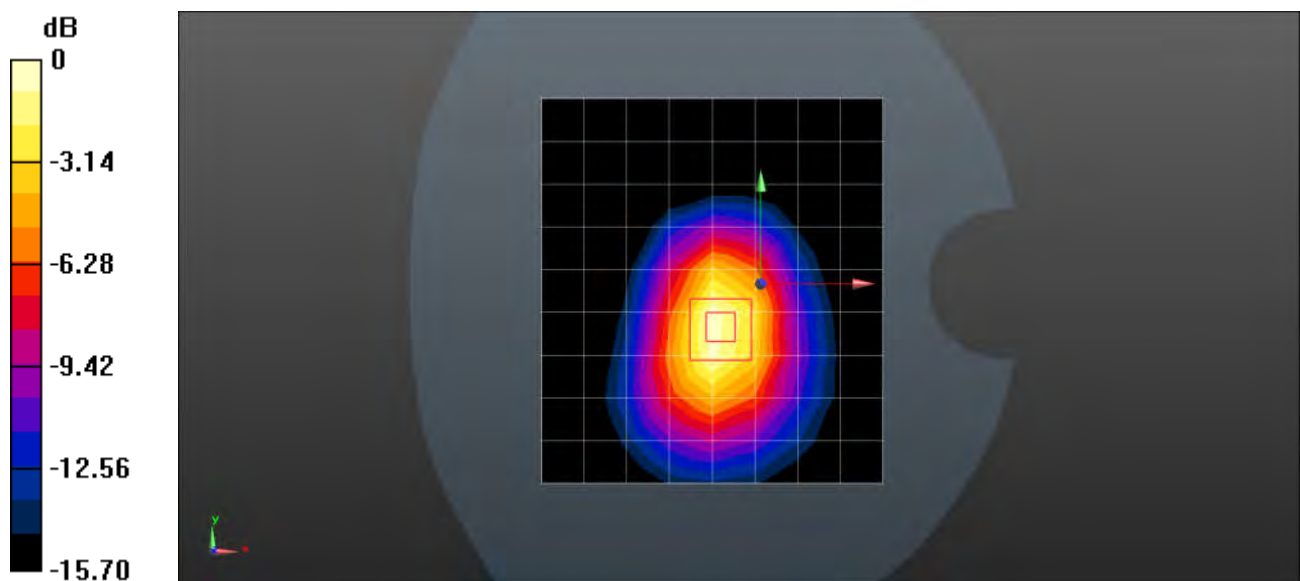

0 dB = 0.797 W/kg = -0.99 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n25 20M QPSK 50RB28 376500CH Top side 0mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 39.802$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.54, 7.96, 8.42); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 3.45 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.99 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 4.55 W/kg

SAR(1 g) = 2.27 W/kg; SAR(10 g) = 1.07 W/kg

Maximum value of SAR (measured) = 3.70 W/kg

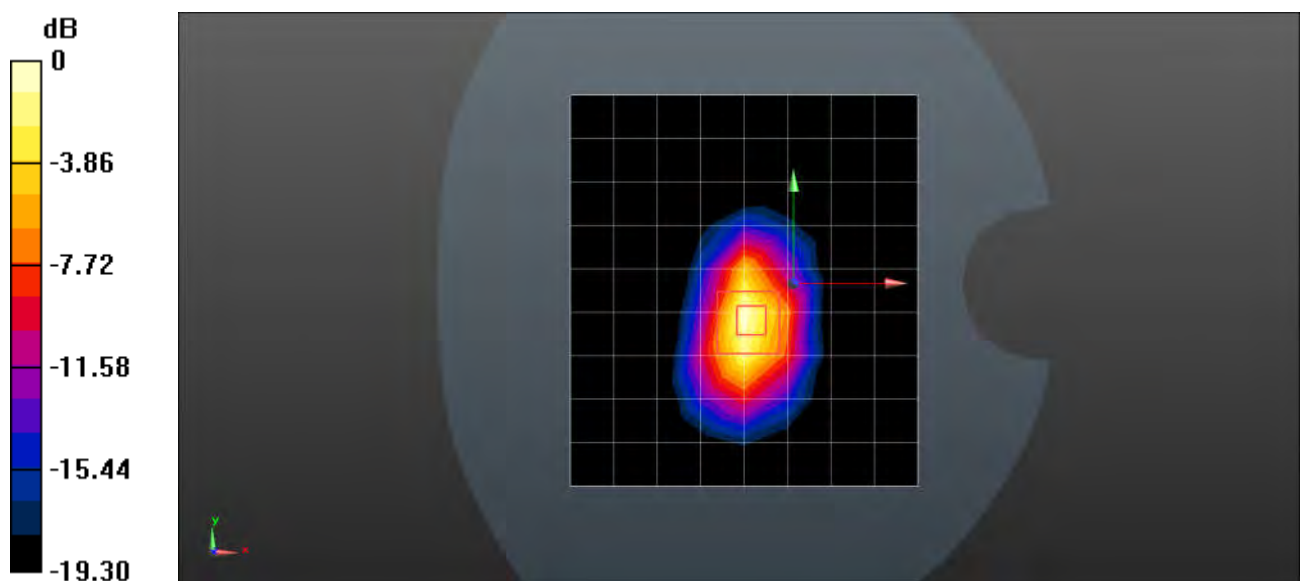

0 dB = 3.70 W/kg = 5.68 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n41 100M QPSK 135RB69 518598CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 37.943$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.01, 7.49, 7.95); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.590 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.53 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.851 W/kg

SAR(1 g) = 0.413 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 0.698 W/kg

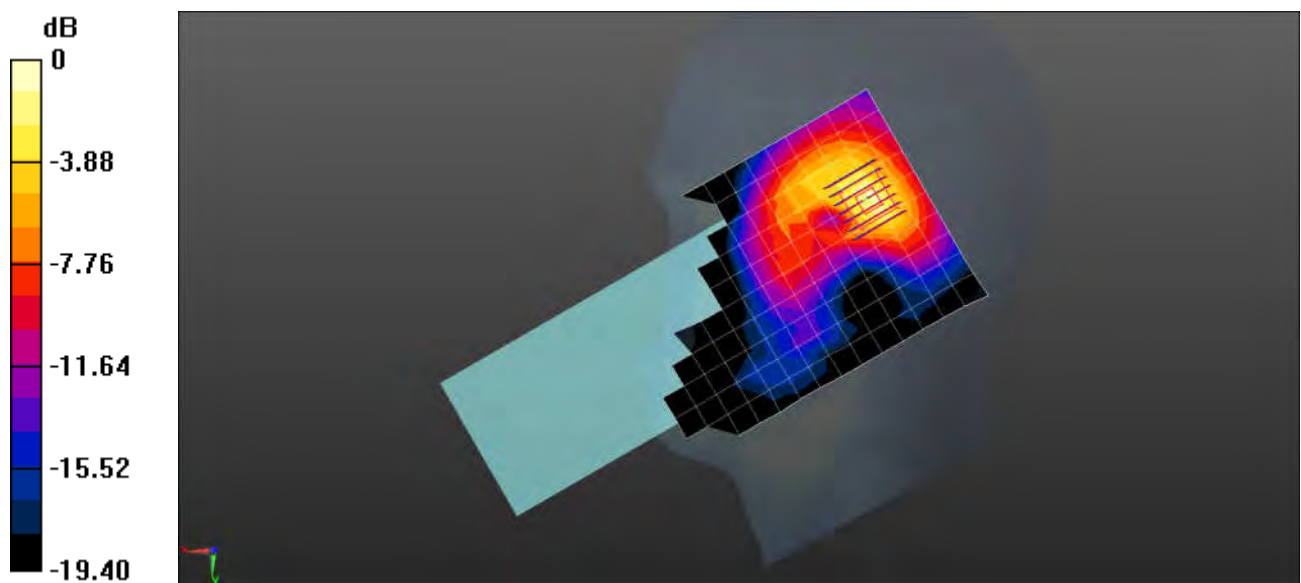

0 dB = 0.698 W/kg = -1.56 dBW/kg