

Test Laboratory: SGS-SAR Lab

E4P 5G NR n41 100M QPSK 1RB1 518598CH Front side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 37.943$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.01, 7.49, 7.95); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x22x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.426 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.947 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.308 W/kg; SAR(10 g) = 0.183 W/kg

Maximum value of SAR (measured) = 0.434 W/kg

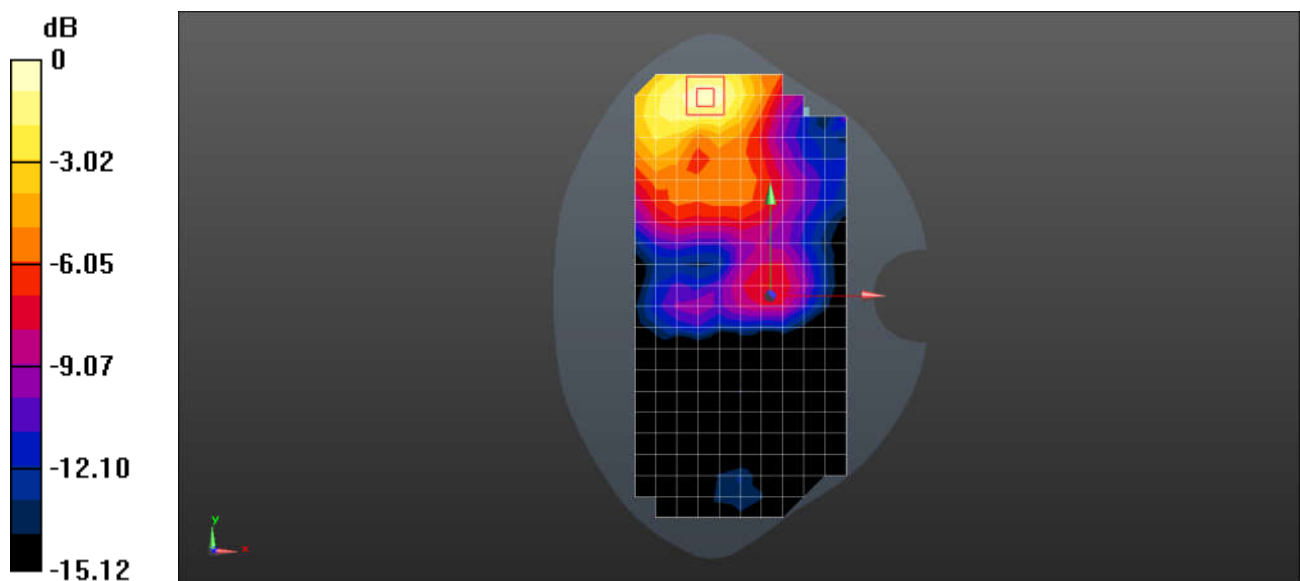

0 dB = 0.434 W/kg = -3.63 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n41 100M QPSK 1RB1 518598CH Top side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 37.943$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.01, 7.49, 7.95); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.616 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.00 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.833 W/kg

SAR(1 g) = 0.446 W/kg; SAR(10 g) = 0.238 W/kg

Maximum value of SAR (measured) = 0.682 W/kg

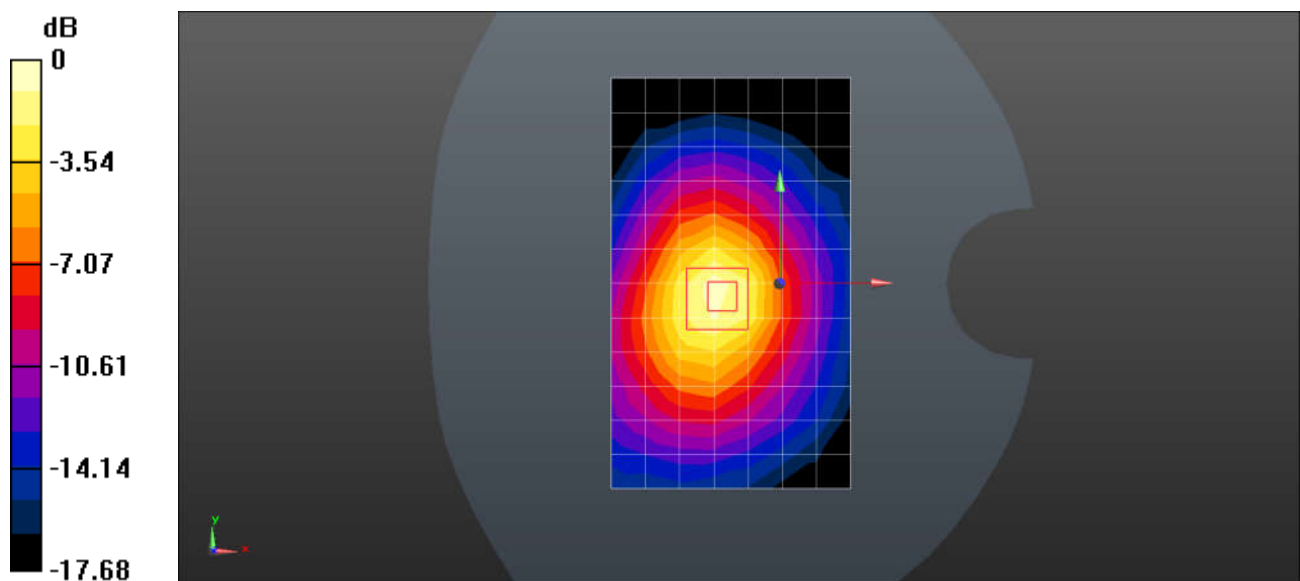

0 dB = 0.682 W/kg = -1.66 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n41 100M QPSK 1RB1 518598CH Top side 0mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 37.943$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(8.01, 7.49, 7.95); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 4.23 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.08 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 7.26 W/kg

SAR(1 g) = 3.03 W/kg; SAR(10 g) = 1.23 W/kg

Maximum value of SAR (measured) = 5.68 W/kg

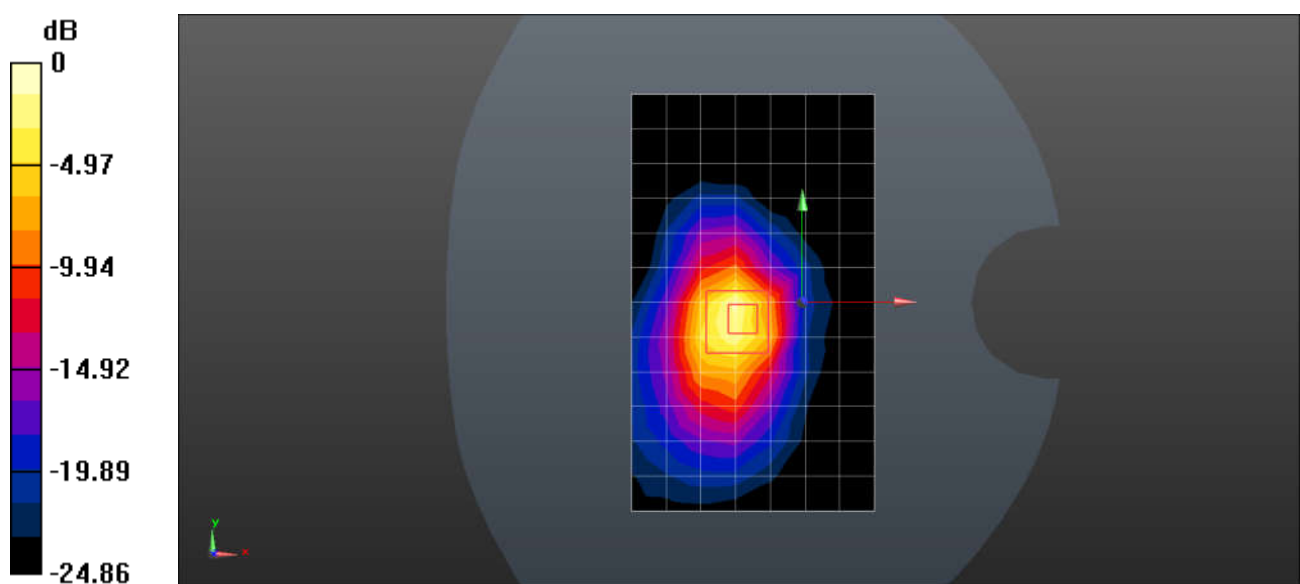

0 dB = 5.68 W/kg = 7.54 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n48 40M QPSK 50RB28 641666CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 3.032$ S/m; $\epsilon_r = 37.961$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.21, 6.62, 7.1); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (13x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.878 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.321 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 0.900 W/kg

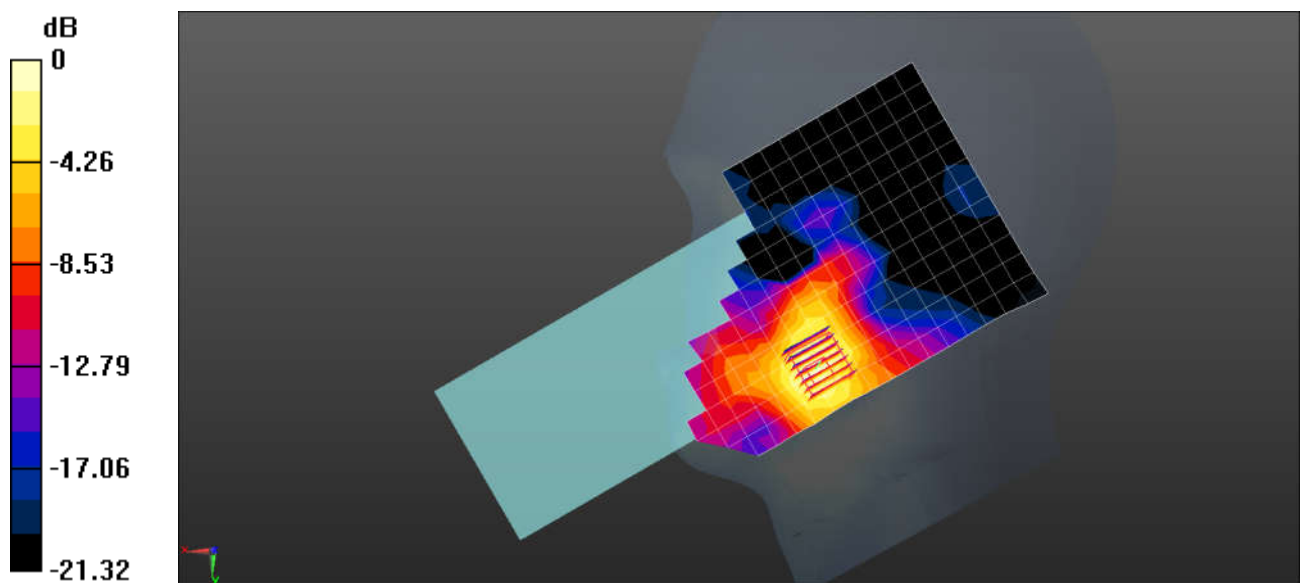

0 dB = 0.900 W/kg = -0.46 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n48 40M QPSK 50RB28 641666CH Front side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 3.032$ S/m; $\epsilon_r = 37.961$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.21, 6.62, 7.1); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x24x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.255 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.905 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.293 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.241 W/kg

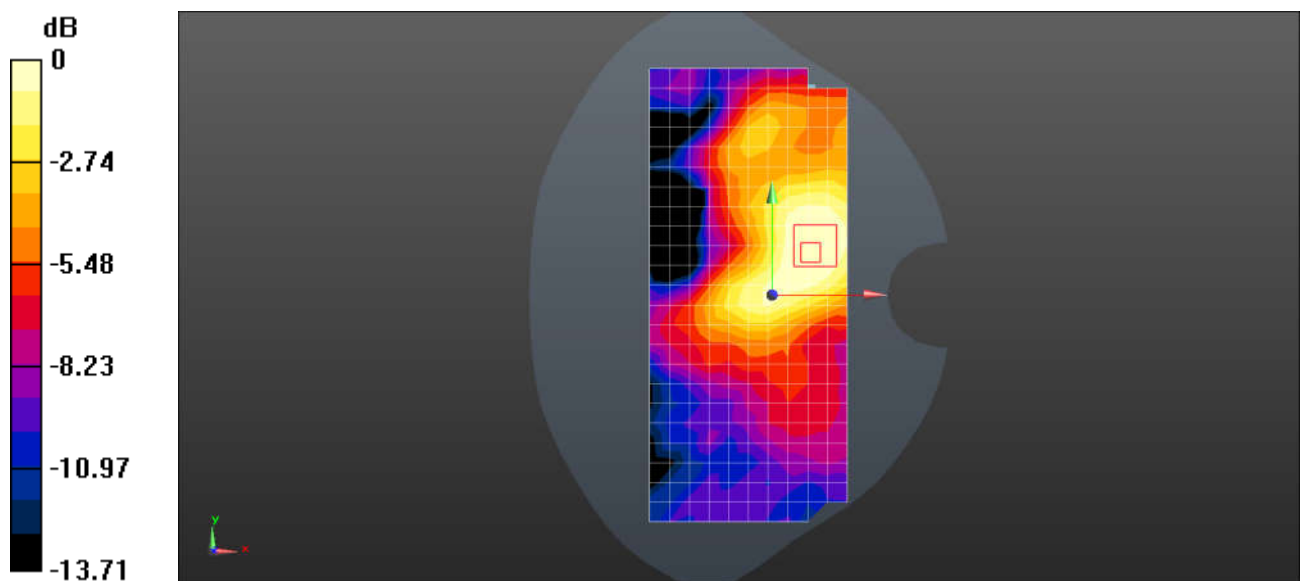

0 dB = 0.241 W/kg = -6.18 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n48 40M QPSK 50RB28 641666CH Right side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 3.032$ S/m; $\epsilon_r = 37.961$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.21, 6.62, 7.1); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x26x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.720 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.584 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.941 W/kg

SAR(1 g) = 0.489 W/kg; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 0.779 W/kg

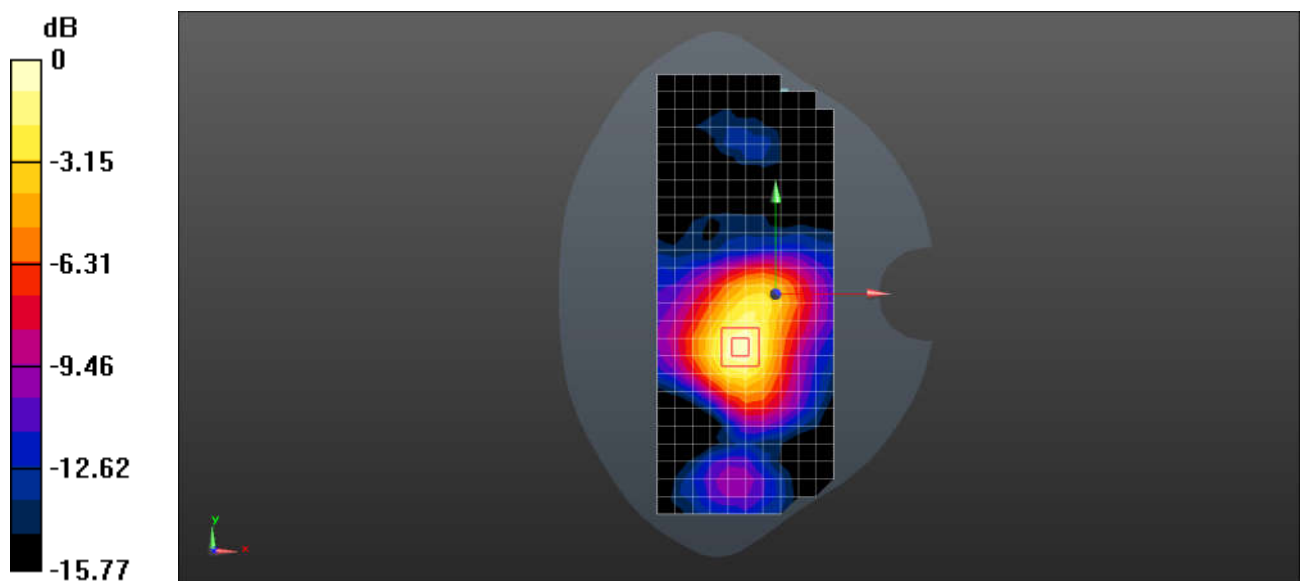

0 dB = 0.779 W/kg = -1.08 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n48 40M QPSK 50RB28 641666CH Right side 0mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 3.032$ S/m; $\epsilon_r = 37.961$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.21, 6.62, 7.1); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x26x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 4.63 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 21.99 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 5.94 W/kg

SAR(1 g) = 2.72 W/kg; SAR(10 g) = 1.11 W/kg

Maximum value of SAR (measured) = 4.82 W/kg

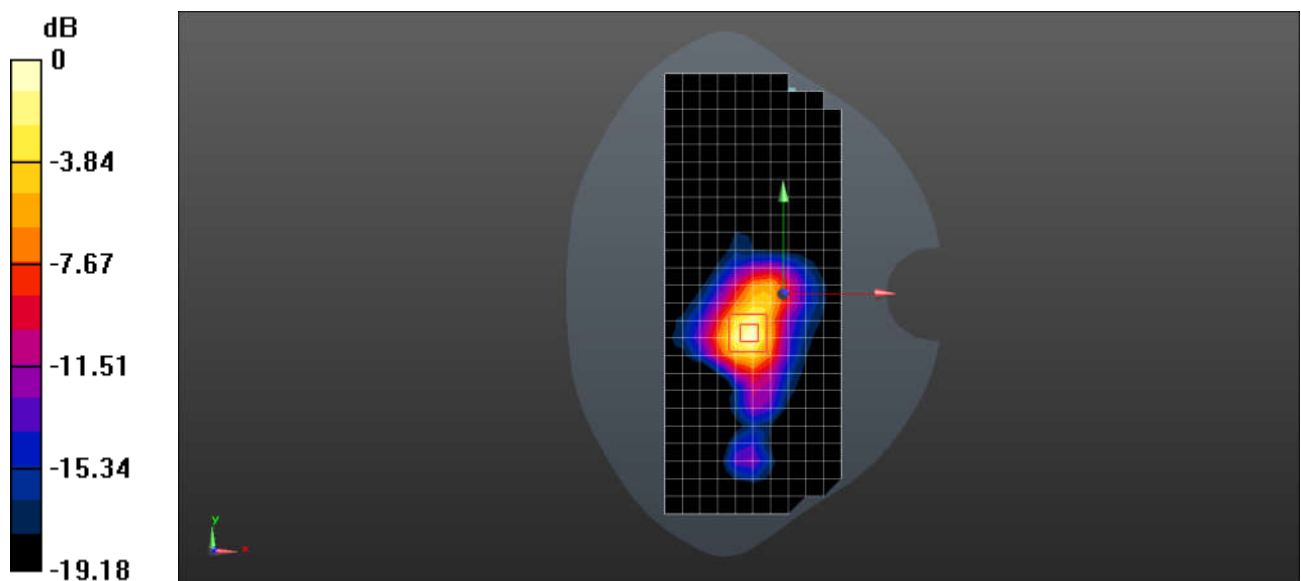

0 dB = 4.82 W/kg = 6.83 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n66 20M QPSK 50RB28 349000CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.386$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.21, 6.62, 7.1); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.460 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.738 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.714 W/kg

SAR(1 g) = 0.403 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 0.602 W/kg

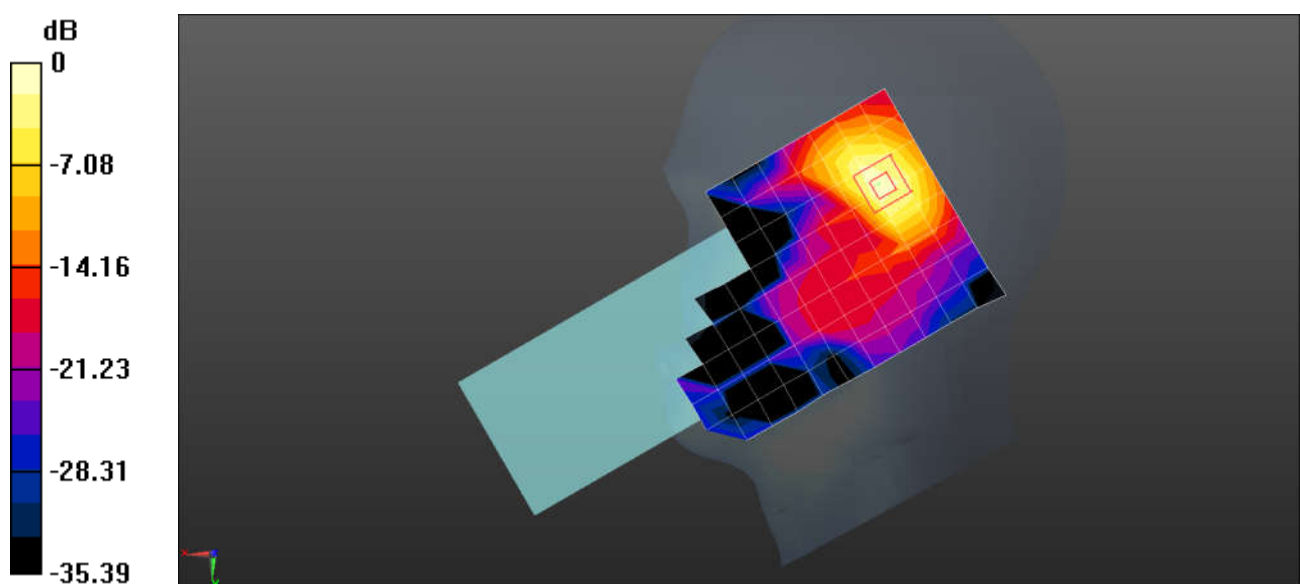

0 dB = 0.602 W/kg = -2.20 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n66 20M QPSK 50RB28 349000CH Front side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.386$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(9.45, 8.73, 9.34); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x18x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.782 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.961 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.954 W/kg

SAR(1 g) = 0.648 W/kg; SAR(10 g) = 0.401 W/kg

Maximum value of SAR (measured) = 0.853 W/kg

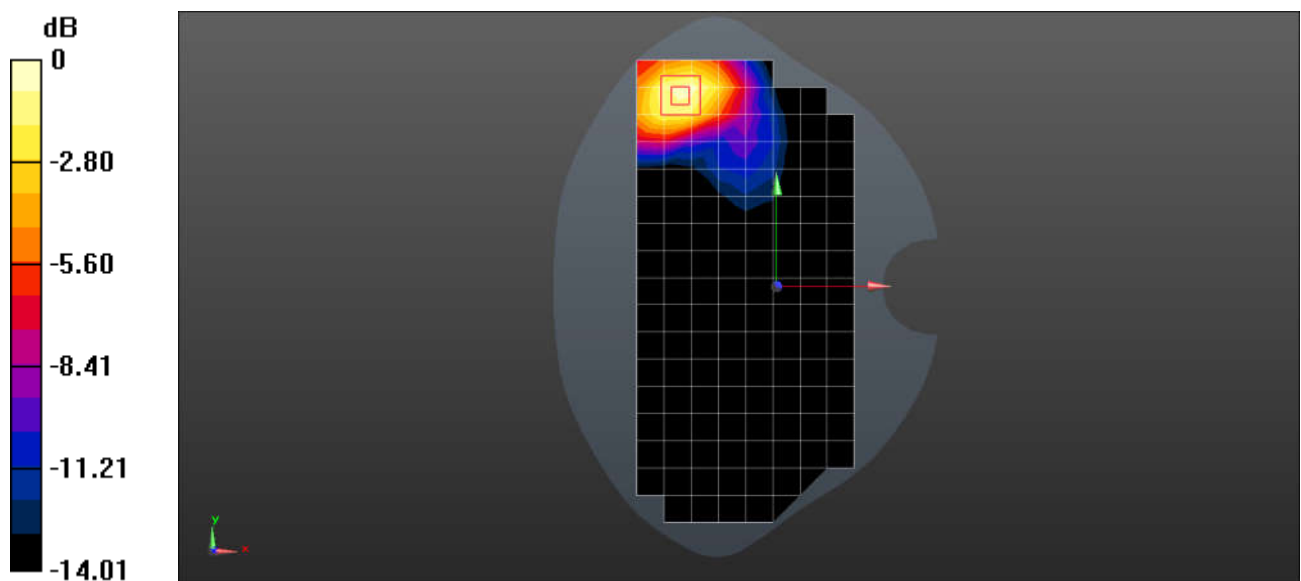

0 dB = 0.853 W/kg = -0.69 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n66 20M QPSK 50RB28 349000CH Top side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.386$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(9.45, 8.73, 9.34); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.450 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.34 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 0.436 W/kg

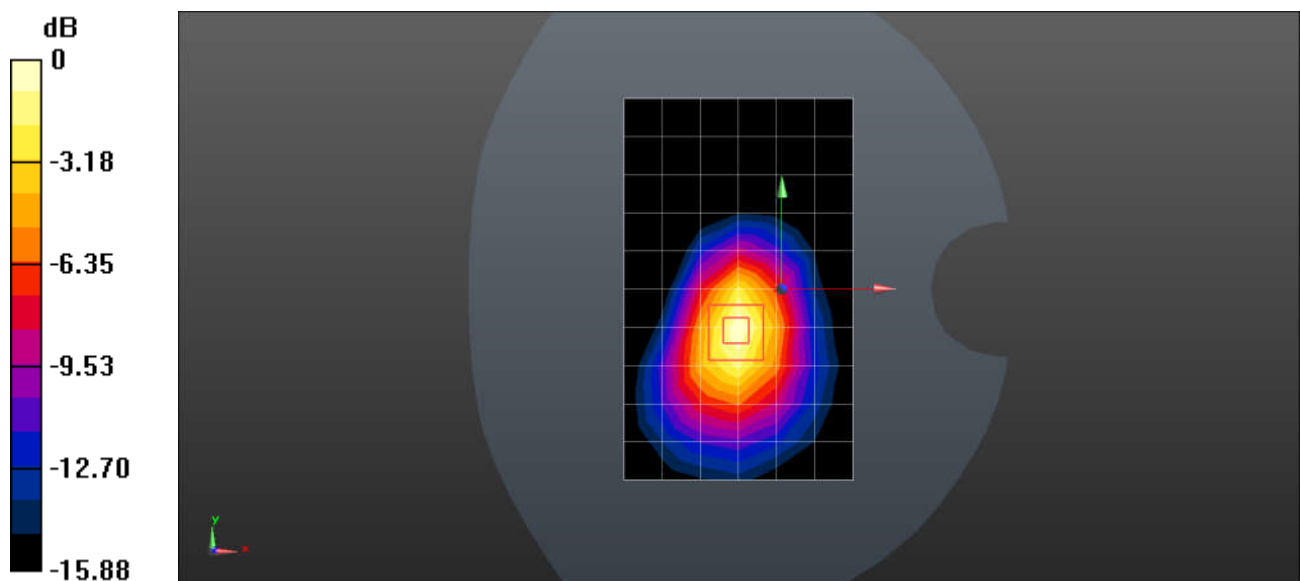

0 dB = 0.436 W/kg = -3.61 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n66 20M QPSK 50RB28 349000CH Top side 0mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.386$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(9.45, 8.73, 9.34); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 7.93 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.35 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 10.4 W/kg

SAR(1 g) = 5.35 W/kg; SAR(10 g) = 2.47 W/kg

Maximum value of SAR (measured) = 8.73 W/kg

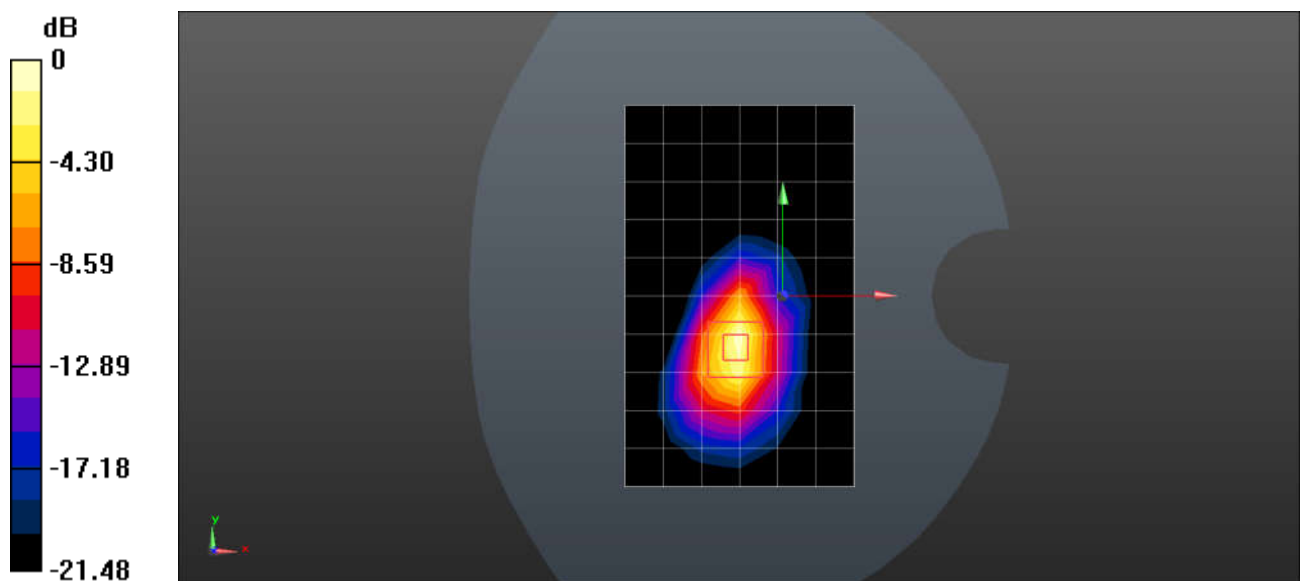

0 dB = 8.73 W/kg = 9.41 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n71 20M QPSK 50RB28 136100CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 42.385$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(10.54, 10.15, 10.87); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.126 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.744 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.172 W/kg

SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.130 W/kg

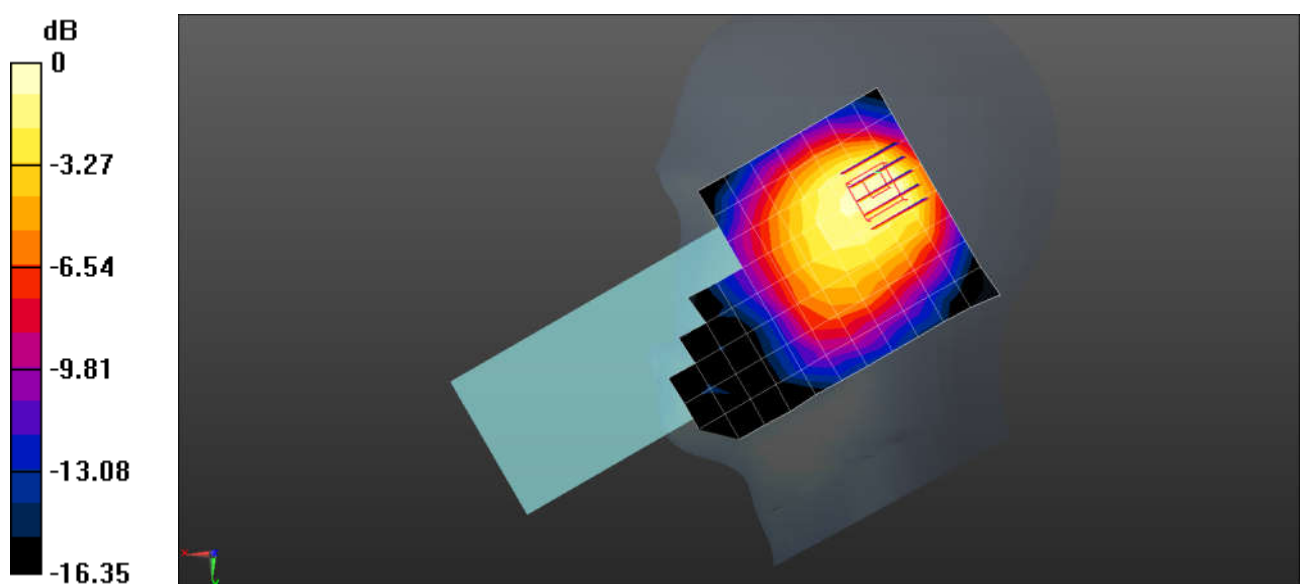

0 dB = 0.130 W/kg = -8.86 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n71 20M QPSK 50RB28 136100CH Front side 15mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 42.385$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(10.54, 10.15, 10.87); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x18x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0346 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.500 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0410 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0351 W/kg

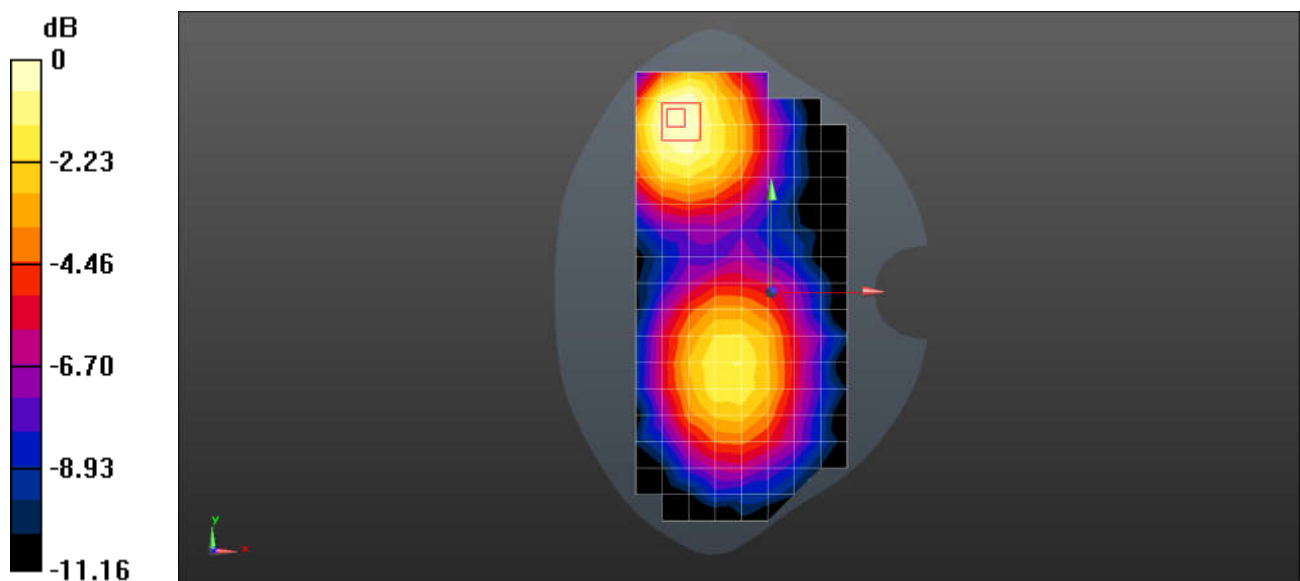

0 dB = 0.0351 W/kg = -14.55 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n71 20M QPSK 50RB28 136100CH Top side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 42.385$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(10.54, 10.15, 10.87); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0581 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.508 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0790 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0616 W/kg

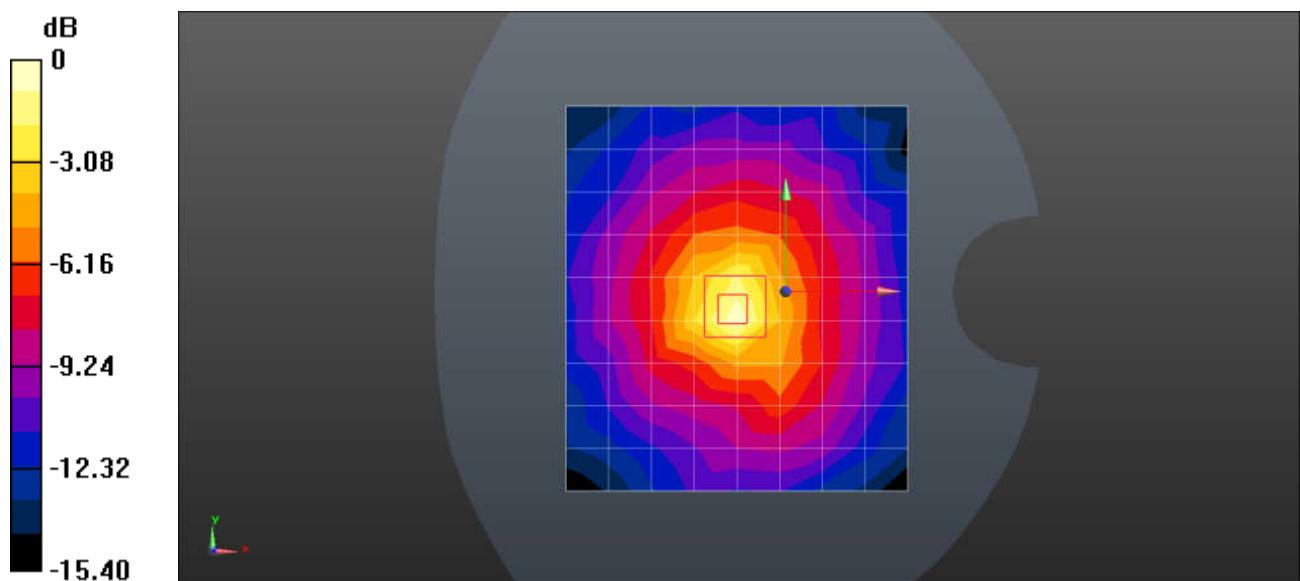

0 dB = 0.0616 W/kg = -12.10 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n71 20M QPSK 50RB28 136100CH Top side 0mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 42.385$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(10.54, 10.15, 10.87); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.581 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.31 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.823 W/kg

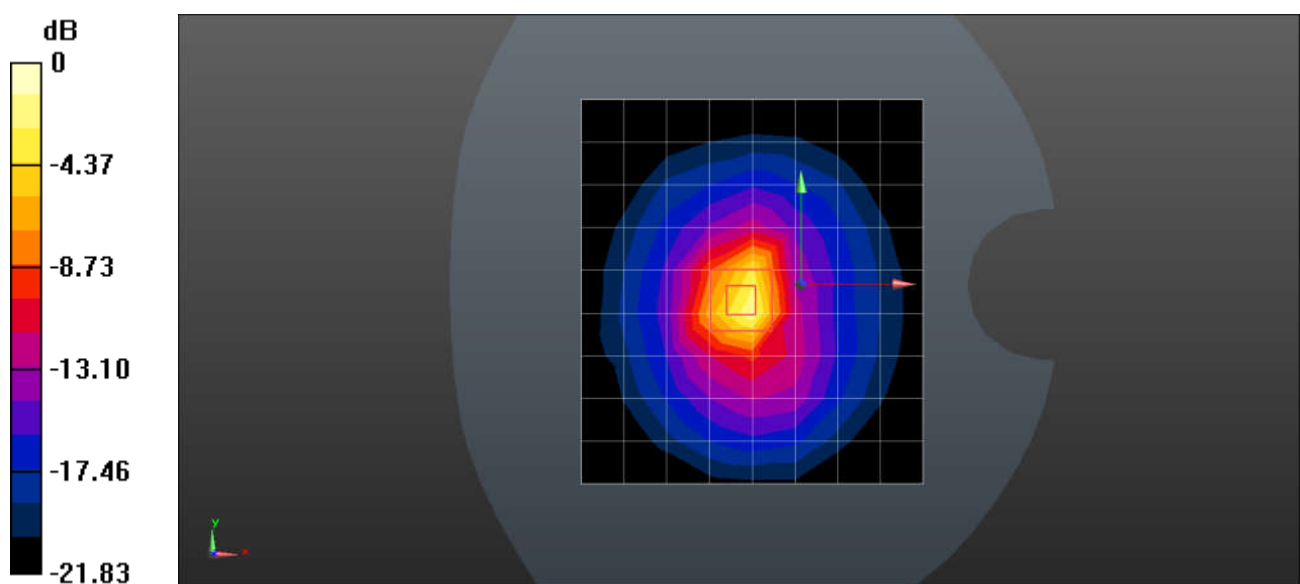

0 dB = 0.823 W/kg = -0.85 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n77 100M QPSK 135RB69 633334CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 3.001$ S/m; $\epsilon_r = 38.773$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.64, 7.02, 7.52); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (13x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.698 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.162 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.493 W/kg; SAR(10 g) = 0.256 W/kg

Maximum value of SAR (measured) = 0.776 W/kg

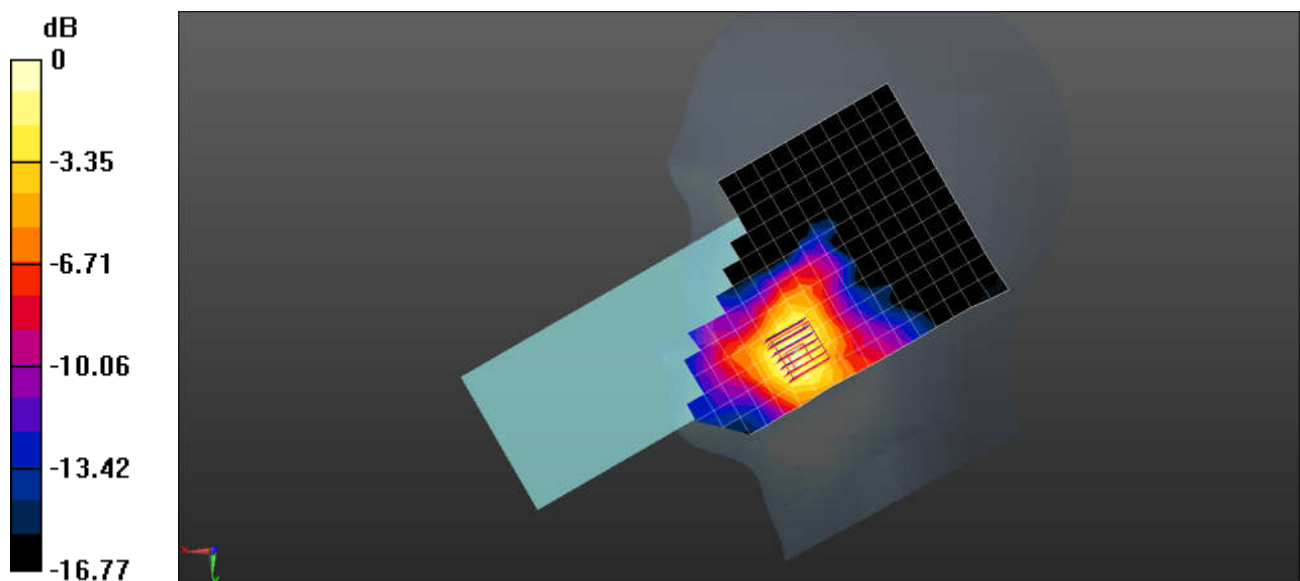

0 dB = 0.776 W/kg = -1.10 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n77 100M QPSK 135RB69 633334CH Front side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 3.001$ S/m; $\epsilon_r = 38.773$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.64, 7.02, 7.52); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x24x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.341 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.777 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.337 W/kg

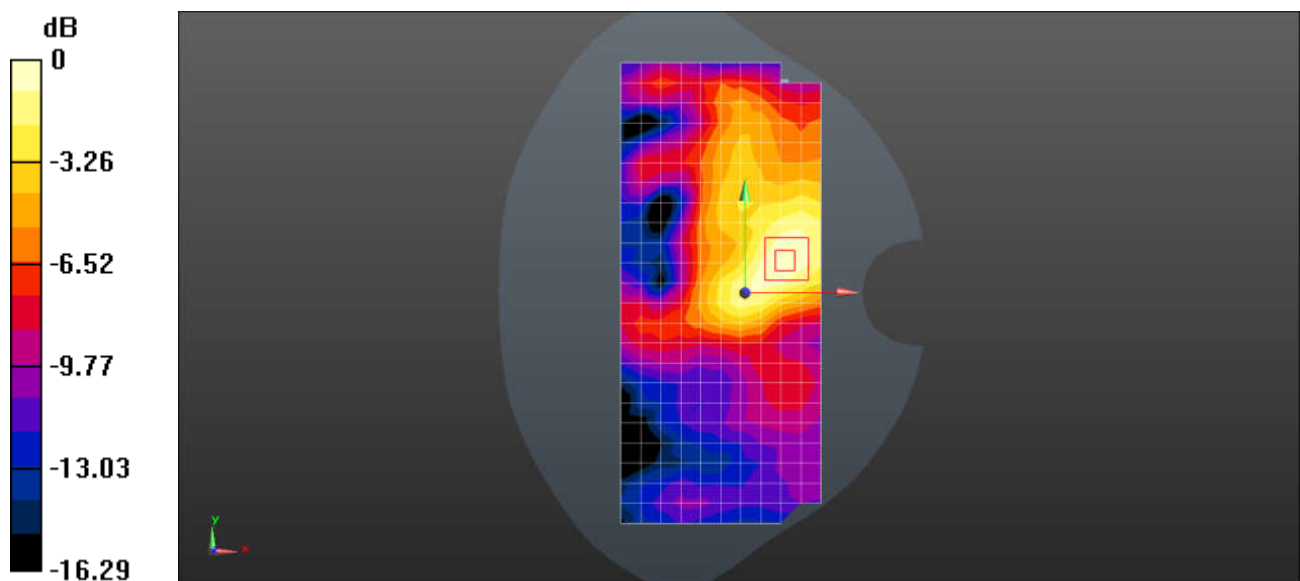

0 dB = 0.337 W/kg = -4.72 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n77 100M QPSK 135RB69 633334CH Right side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 3.001$ S/m; $\epsilon_r = 38.773$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.64, 7.02, 7.52); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x26x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.464 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.523 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.572 W/kg

SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.163 W/kg

Maximum value of SAR (measured) = 0.478 W/kg

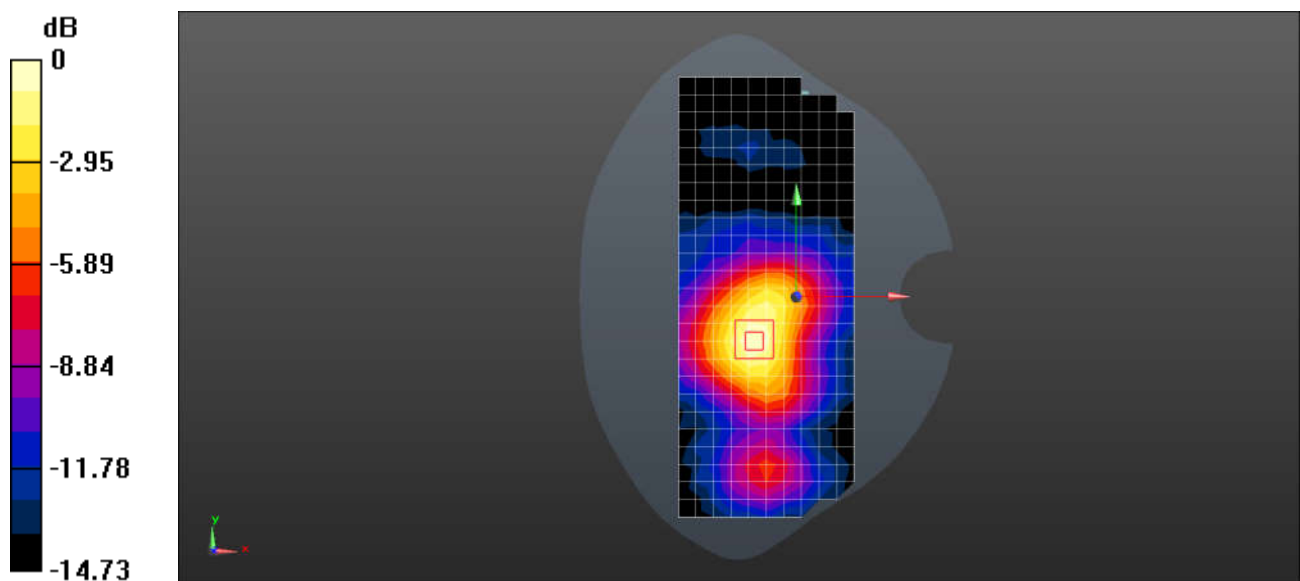

0 dB = 0.478 W/kg = -3.21 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n77 100M QPSK 135RB69 633334CH Right side 0mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 3.001$ S/m; $\epsilon_r = 38.773$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.64, 7.02, 7.52); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x26x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 5.01 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 23.88 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 7.60 W/kg

SAR(1 g) = 3.55 W/kg; SAR(10 g) = 1.5 W/kg

Maximum value of SAR (measured) = 6.22 W/kg

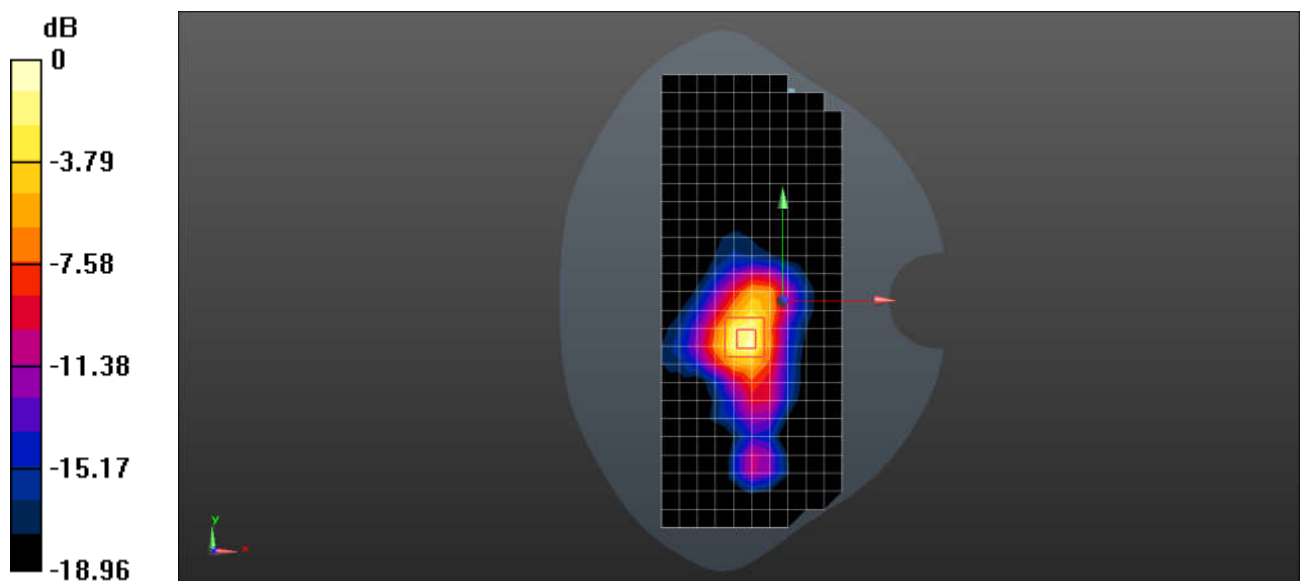

0 dB = 6.22 W/kg = 7.94 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n77 100M QPSK 135RB69 656000CH Right cheek

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1

Medium: HSL3900; Medium parameters used: $f = 3840$ MHz; $\sigma = 3.403$ S/m; $\epsilon_r = 37.289$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.17, 6.59, 7.08); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (13x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.490 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.714 W/kg

SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.153 W/kg

Maximum value of SAR (measured) = 0.553 W/kg

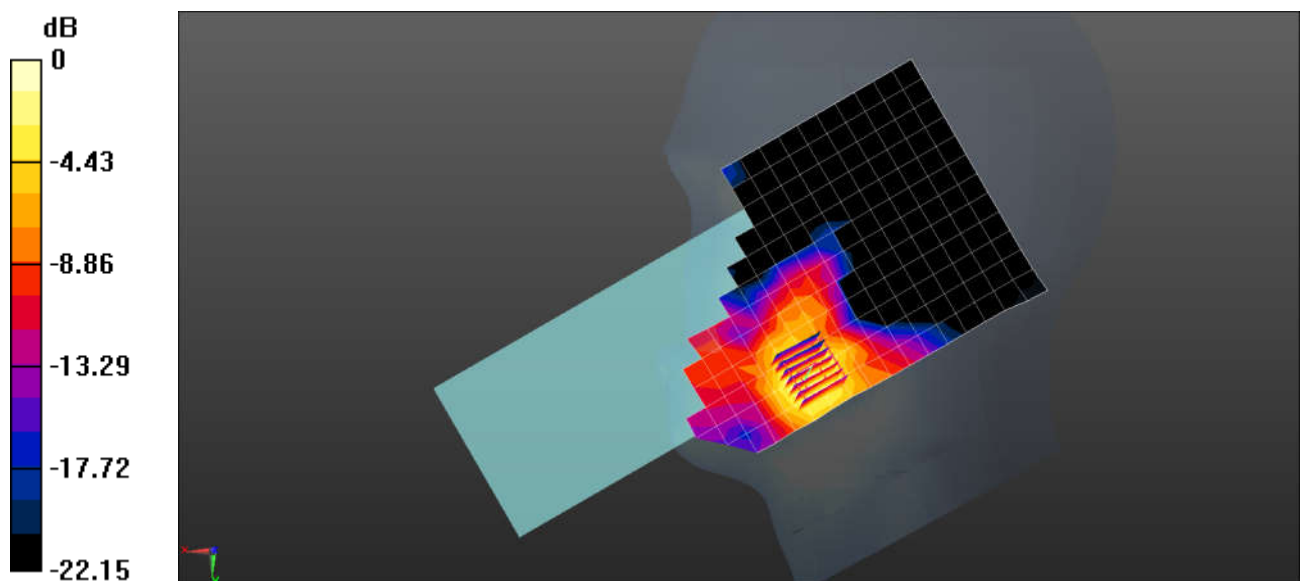

0 dB = 0.553 W/kg = -2.57 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n77 100M QPSK 1RB1 656000CH Front side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 3840 MHz;Duty Cycle: 1:1

Medium: HSL3900;Medium parameters used: $f = 3840$ MHz; $\sigma = 3.403$ S/m; $\epsilon_r = 37.289$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.17, 6.59, 7.08); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x24x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.228 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.195 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.317 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.236 W/kg

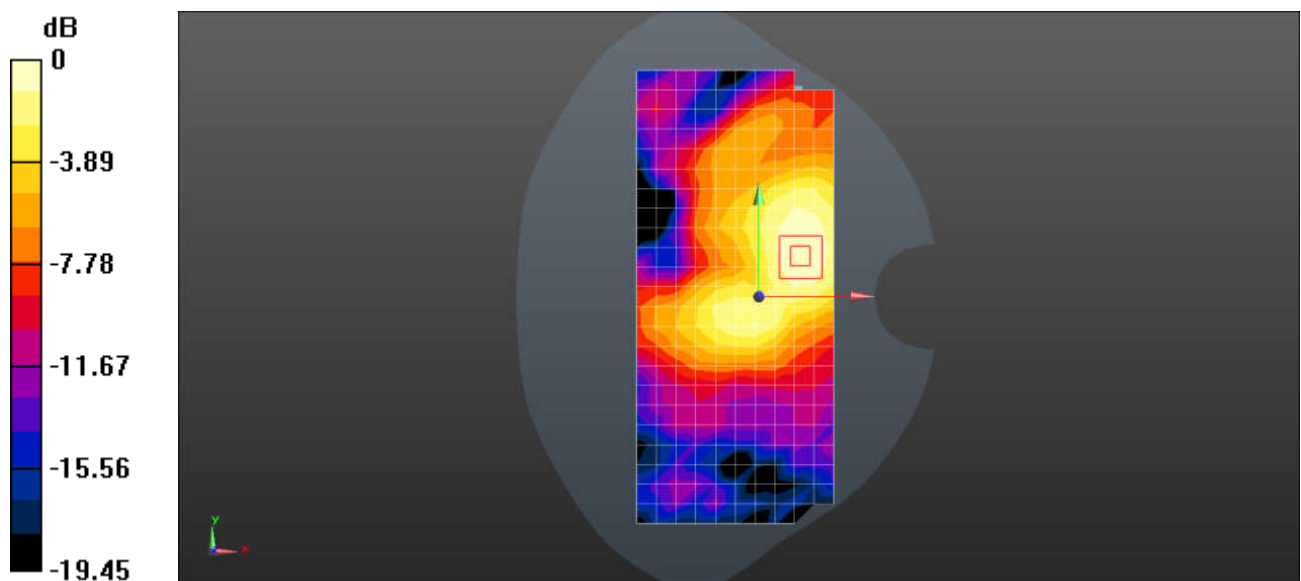

0 dB = 0.236 W/kg = -6.27 dBW/kg

Test Laboratory: SGS-SAR Lab

E4P 5G NR n77 100M QPSK 135RB69 656000CH Right side 10mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1

Medium: HSL3900; Medium parameters used: $f = 3840$ MHz; $\sigma = 3.403$ S/m; $\epsilon_r = 37.289$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.17, 6.59, 7.08); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x26x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.517 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.264 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.637 W/kg

SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.168 W/kg

Maximum value of SAR (measured) = 0.525 W/kg

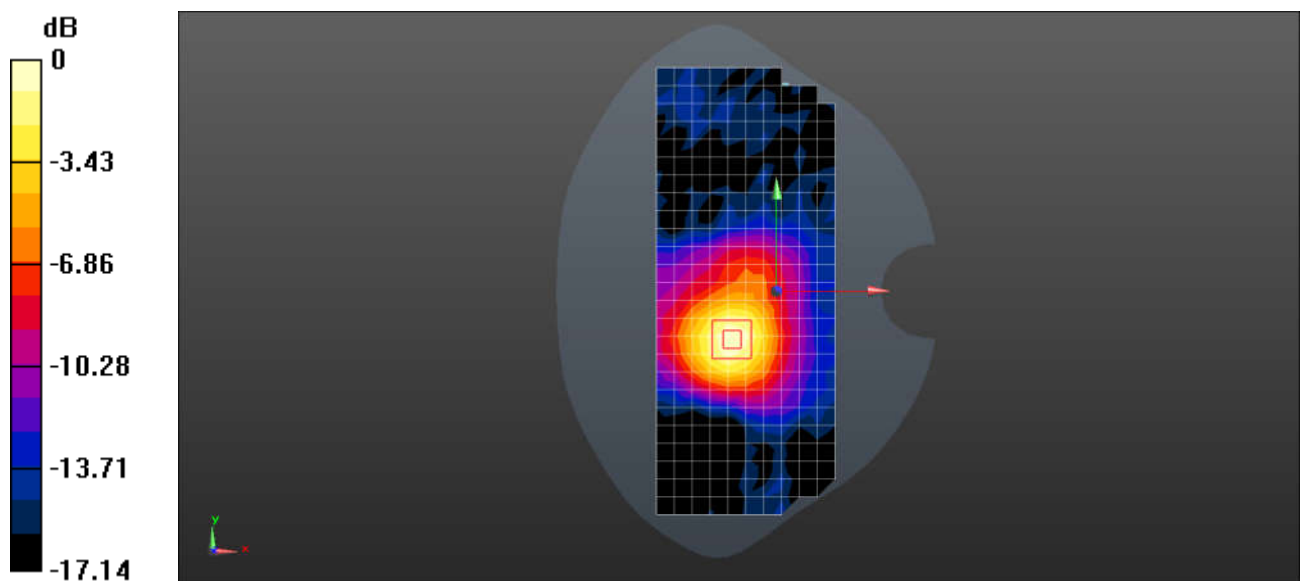

Test Laboratory: SGS-SAR Lab

E4P 5G NR n77 100M QPSK 135RB69 656000CH Right side 0mm

DUT: E4P; Type: Smart Devices; Serial: 004403170138525

Communication System: UID 0, NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1

Medium: HSL3900; Medium parameters used: $f = 3840$ MHz; $\sigma = 3.403$ S/m; $\epsilon_r = 37.289$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7767; ConvF(7.17, 6.59, 7.08); Calibrated: 2023-10-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023-11-17
- Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x26x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 5.41 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 14.41 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 6.97 W/kg

SAR(1 g) = 3.29 W/kg; SAR(10 g) = 1.37 W/kg

Maximum value of SAR (measured) = 5.72 W/kg

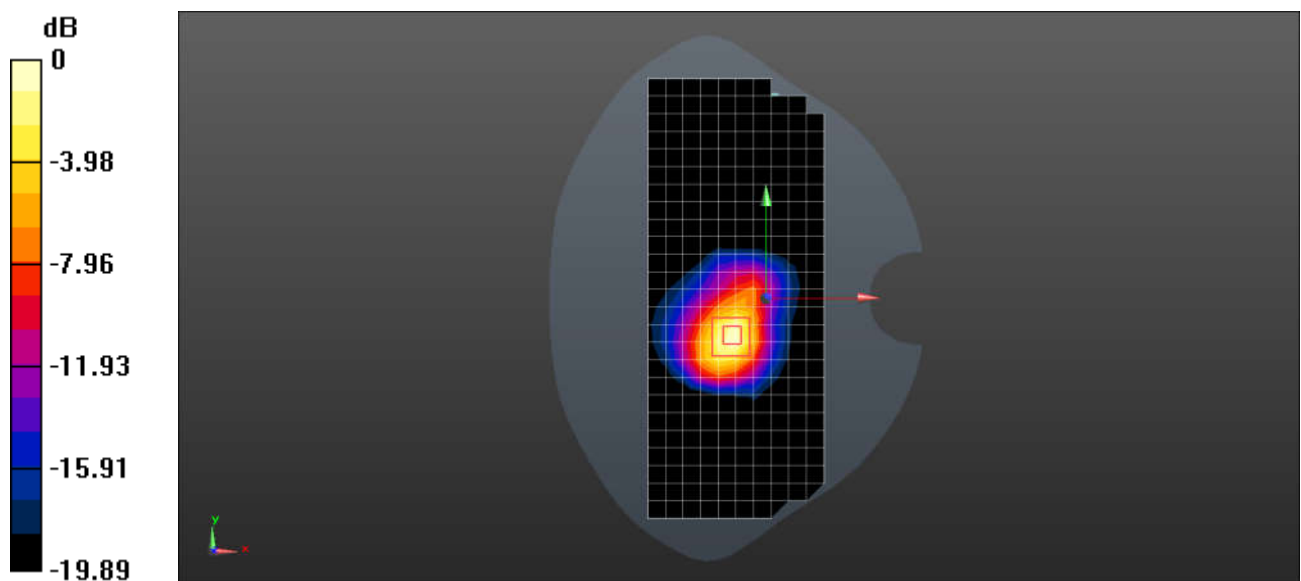

0 dB = 5.72 W/kg = 7.57 dBW/kg

WIFI2.4G 802.11b 6CH Left cheek

Communication System: WLAN 2.4GHz; Frequency: 2437.000

Medium: HSL. Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.41, 7.41, 7.41); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.252 W/kg; SAR (10g) = 0.133 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.260 W/kg; SAR (10g) = 0.144 W/kg;

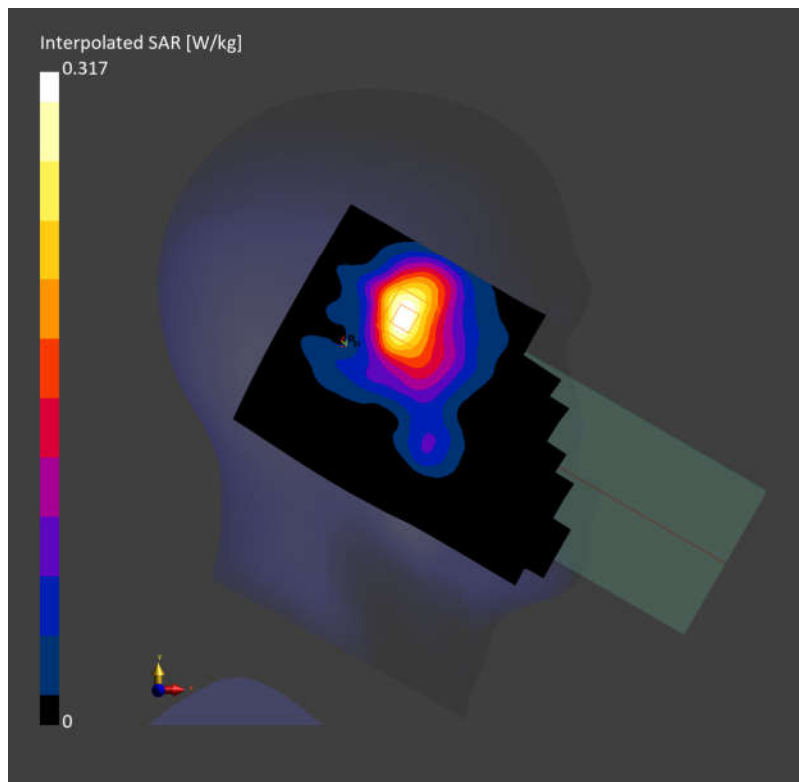

WIFI2.4G 802.11b 6CH Back side 10mm

Communication System: WLAN 2.4GHz; Frequency: 2437.000

Medium: HSL. Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.41, 7.41, 7.41); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.141 W/kg; SAR (10g) = 0.079 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.211 W/kg; SAR (10g) = 0.089 W/kg;

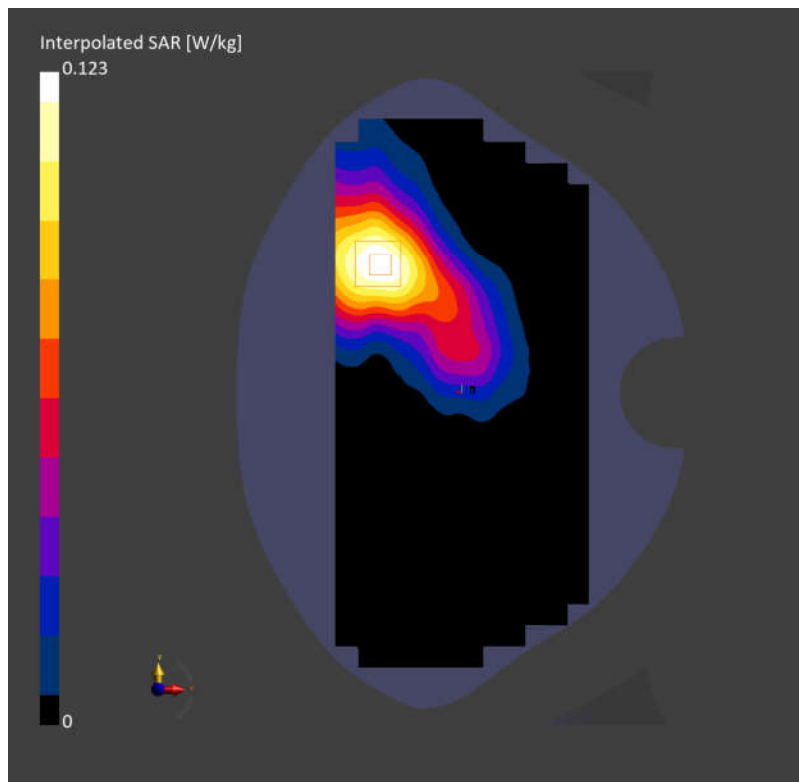

WIFI2.4G 802.11b 6CH Right side 10mm

Communication System: WLAN 2.4GHz; Frequency: 2437.000

Medium: HSL. Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.41, 7.41, 7.41); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (80.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.506 W/kg; SAR (10g) = 0.266 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.438 W/kg; SAR (10g) = 0.245 W/kg;

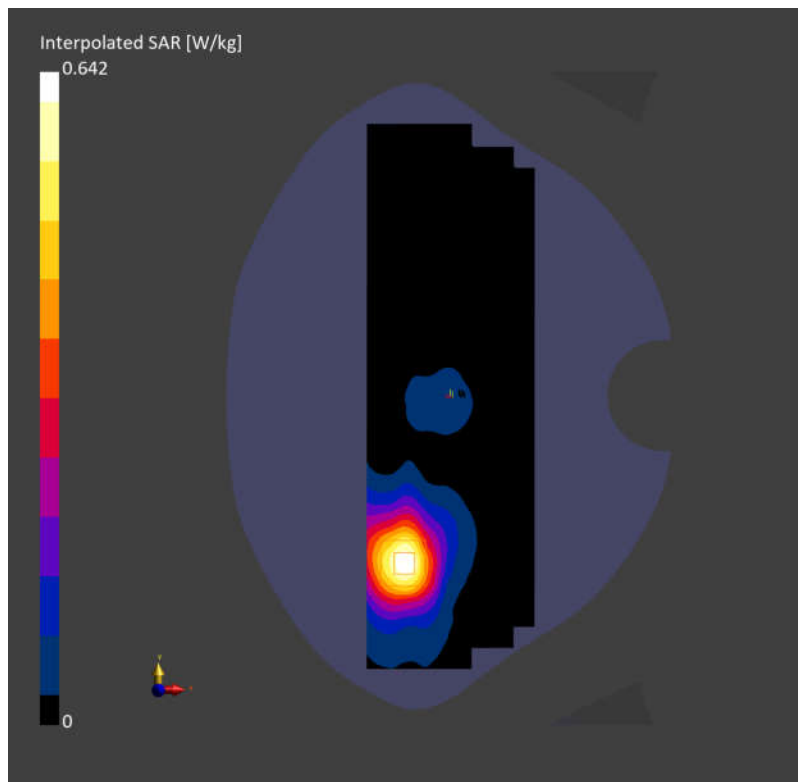

WIFI2.4G 802.11b 6CH Right side 0mm

Communication System: WLAN 2.4GHz; Frequency: 2437.000

Medium: HSL. Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.41, 7.41, 7.41); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (80.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.56 W/kg; SAR (10g) = 0.755 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 1.75 W/kg; SAR (10g) = 0.830 W/kg;

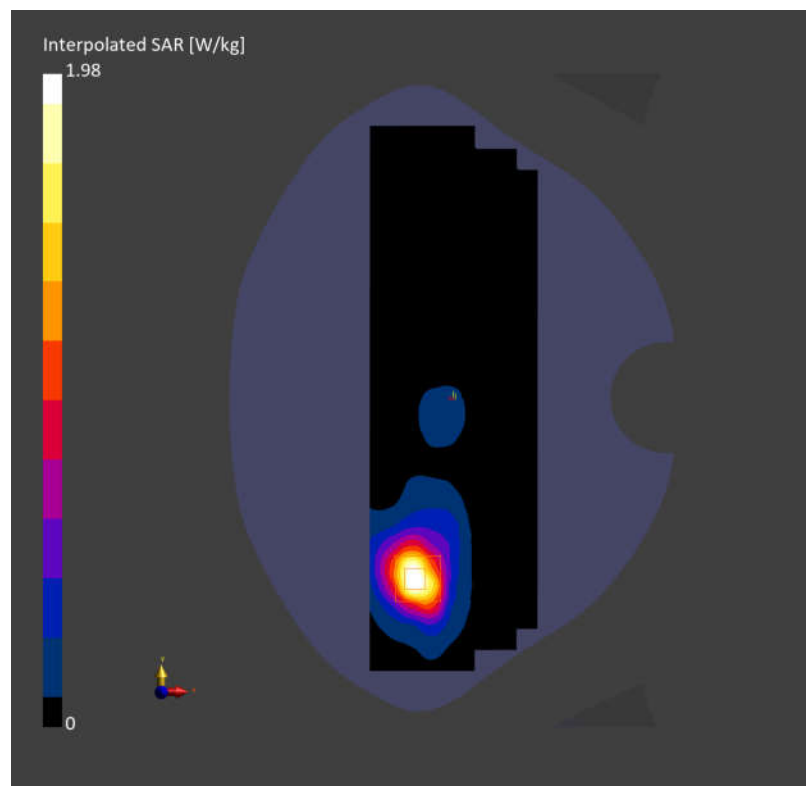

WIFI5G 802.11a 60CH Left cheek

Communication System: WLAN 5GHz; Frequency: 5300.000

Medium: HSL. Medium parameters used: $f = 5300.000$ MHz; $\sigma = 4.82$ S/m; $\epsilon_r = 35.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(5.3, 5.3, 5.3); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.103 W/kg; SAR (10g) = 0.033 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.06 dB

SAR (1g) = 0.118 W/kg; SAR (10g) = 0.066 W/kg;

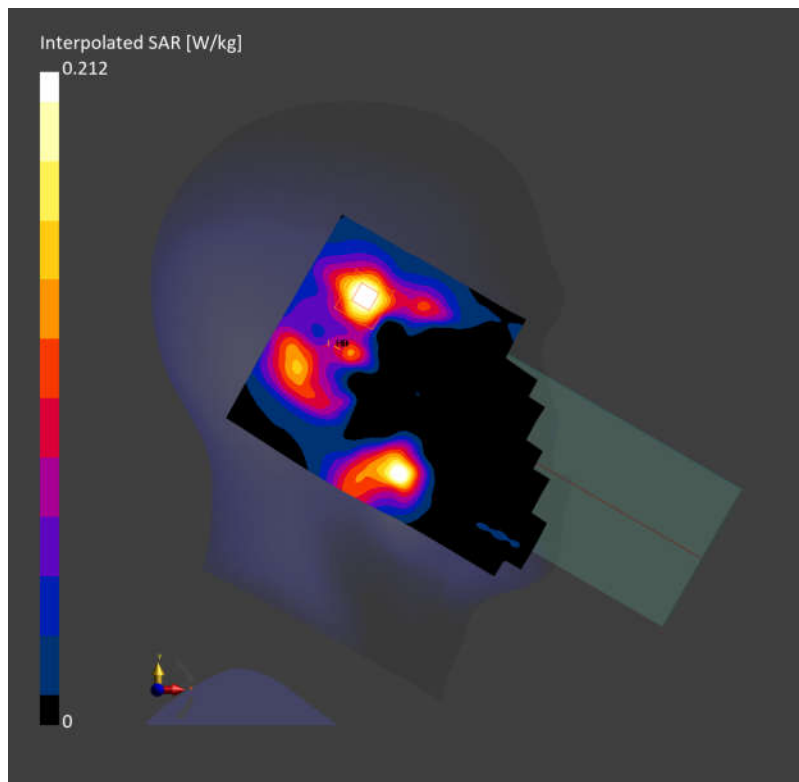

WIFI5G 802.11a 140CH Left cheek

Communication System: WLAN 5GHz; Frequency: 5700.000

Medium: HSL. Medium parameters used: $f = 5700.000$ MHz; $\sigma = 5.17$ S/m; $\epsilon_r = 35$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(4.71, 4.71, 4.71); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.202 W/kg; SAR (10g) = 0.076 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.19 dB

SAR (1g) = 0.225 W/kg; SAR (10g) = 0.122 W/kg;

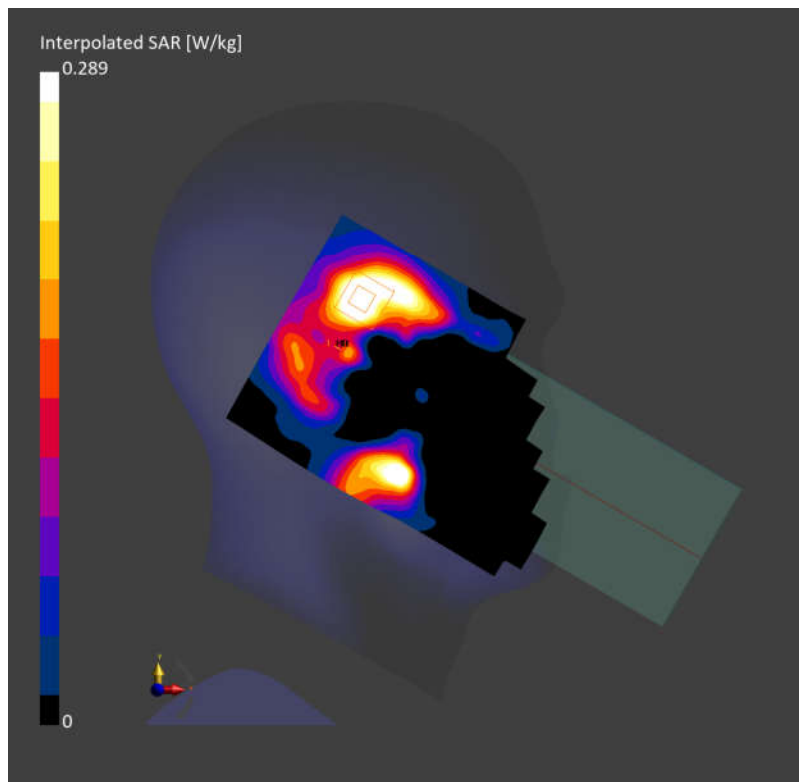

WIFI5G 802.11a 157CH Left cheek

Communication System: WLAN 5GHz; Frequency: 5785.000

Medium: HSL. Medium parameters used: $f = 5785.000$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 34.7$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(4.79, 4.79, 4.79); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.147 W/kg; SAR (10g) = 0.057 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.07dB

SAR (1g) = 0.190 W/kg; SAR (10g) = 0.087 W/kg;

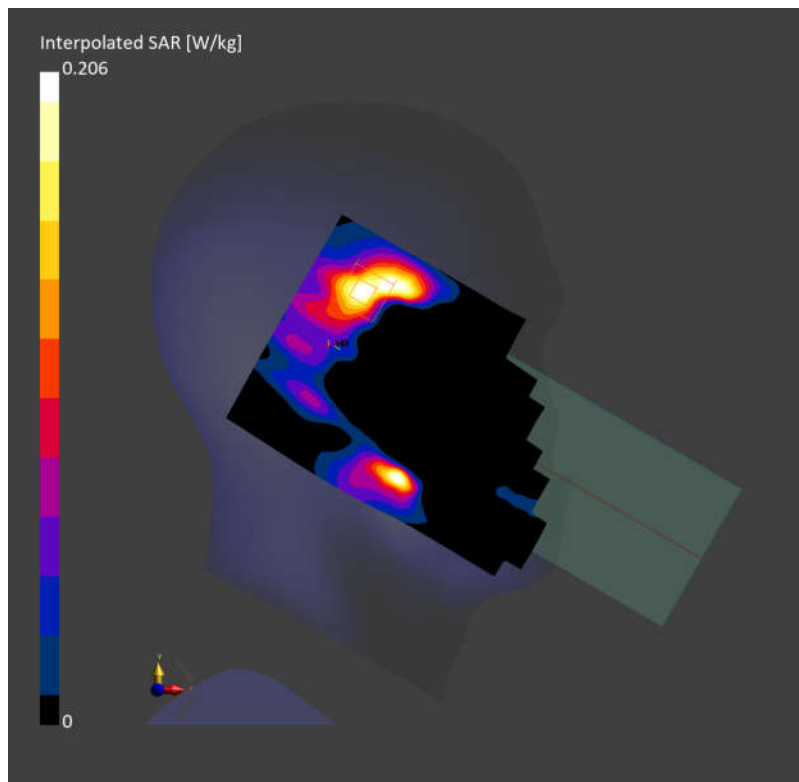

WIFI5G 802.11a 60CH Back side 10mm

Communication System: WLAN 5GHz; Frequency: 5300.000

Medium: HSL. Medium parameters used: $f=5300.000$ MHz; $\sigma=4.82$ S/m; $\epsilon_r=35.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(5.3, 5.3, 5.3); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.096 W/kg; SAR (10g) = 0.042 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.19 dB

SAR (1g) = 0.114 W/kg; SAR (10g) = 0.072 W/kg;

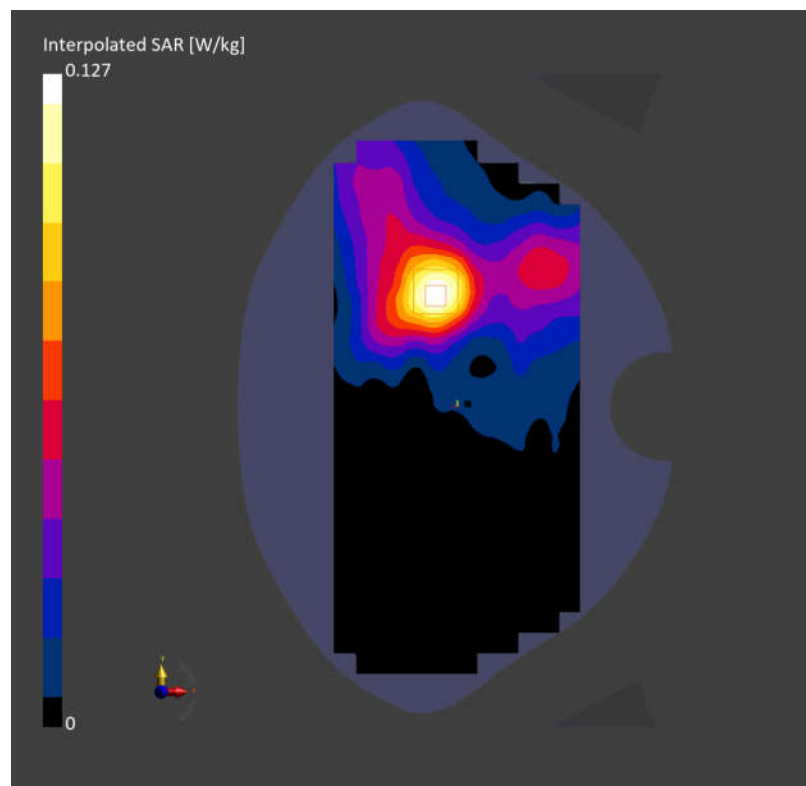

WIFI5G 802.11a 140CH Back side 10mm

Communication System: WLAN 5GHz; Frequency: 5700.000

Medium: HSL. Medium parameters used: $f=5700.000$ MHz; $\sigma=5.17$ S/m; $\epsilon_r=35$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(4.71, 4.71, 4.71); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.064 W/kg; SAR (10g) = 0.028 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.07 dB

SAR (1g) = 0.086 W/kg; SAR (10g) = 0.033 W/kg;

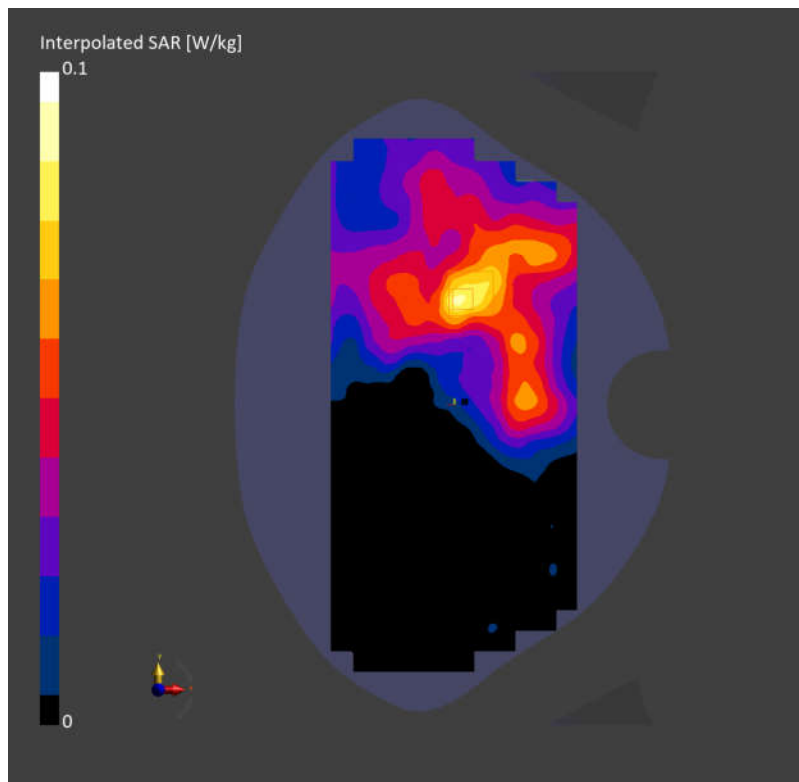

WIFI5G 802.11a 157CH Back side 10mm

Communication System: WLAN 5GHz; Frequency: 5785.000

Medium: HSL. Medium parameters used: $f = 5785.000$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 34.7$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(4.79, 4.79, 4.79); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.070 W/kg; SAR (10g) = 0.031 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.12 dB

SAR (1g) = 0.117 W/kg; SAR (10g) = 0.055 W/kg;

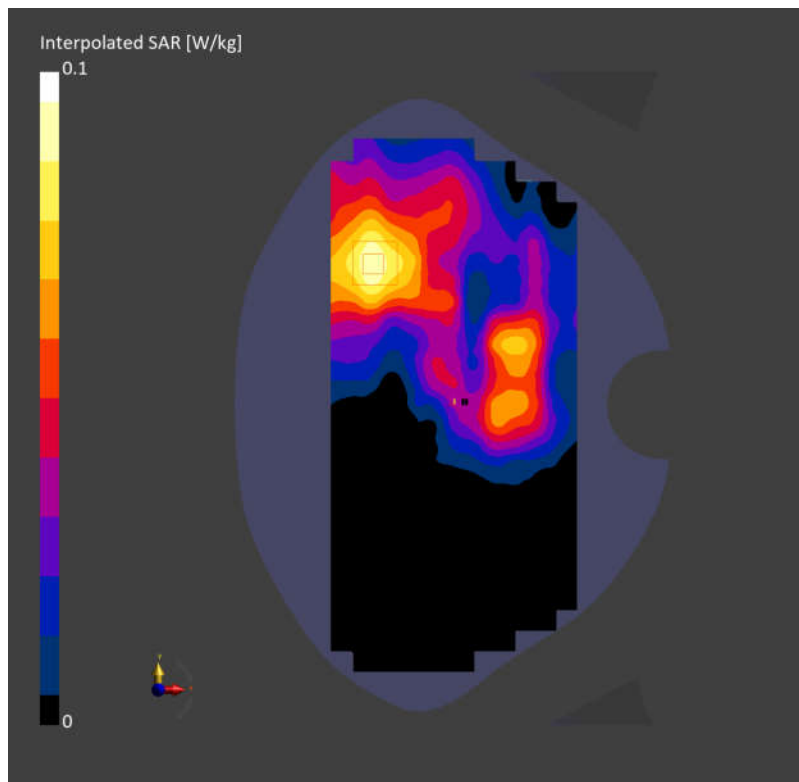

WIFI5G 802.11ac VHT80 42CH Left side 10mm

Communication System: WLAN 5GHz; Frequency: 5210.000

Medium: HSL. Medium parameters used: $f=5210.000$ MHz; $\sigma=4.65$ S/m; $\epsilon_r=36.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(5.3, 5.3, 5.3); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (80.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.316 W/kg; SAR (10g) = 0.139 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 0.218 W/kg; SAR (10g) = 0.122 W/kg;

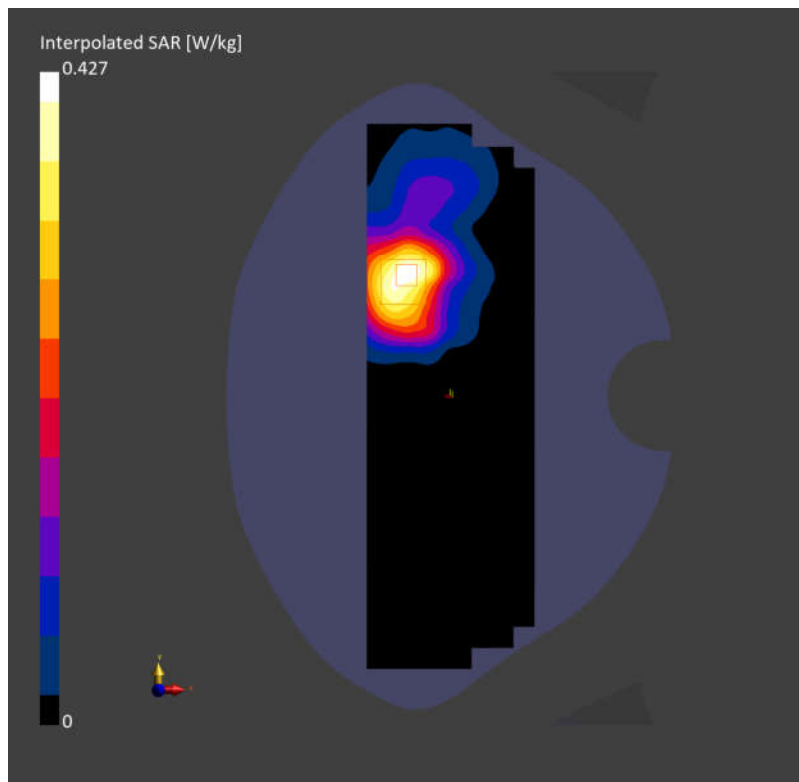

WIFI5G 802.11ac VHT80 155CH Left side 10mm

Communication System: WLAN 5GHz; Frequency: 5775.000

Medium: HSL. Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.29$ S/m; $\epsilon_r = 34.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(4.79, 4.79, 4.79); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (80.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.127 W/kg; SAR (10g) = 0.049 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.05 dB

SAR (1g) = 0.141 W/kg; SAR (10g) = 0.054 W/kg;

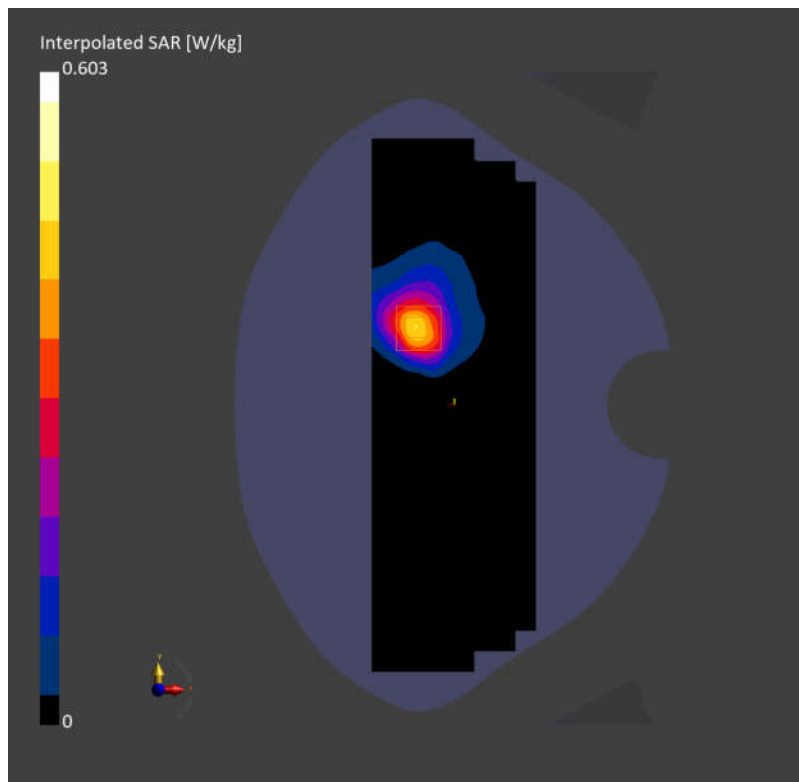

WIFI5G 802.11n HT20 60CH Left side 0mm

Communication System: WLAN 5GHz; Frequency: 5300.000

Medium: HSL. Medium parameters used: $f = 5300.000$ MHz; $\sigma = 4.82$ S/m; $\epsilon_r = 35.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(5.3, 5.3, 5.3); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (80.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.389 W/kg; SAR (10g) = 0.154 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.17 dB

SAR (1g) = 0.323 W/kg; SAR (10g) = 0.176 W/kg;

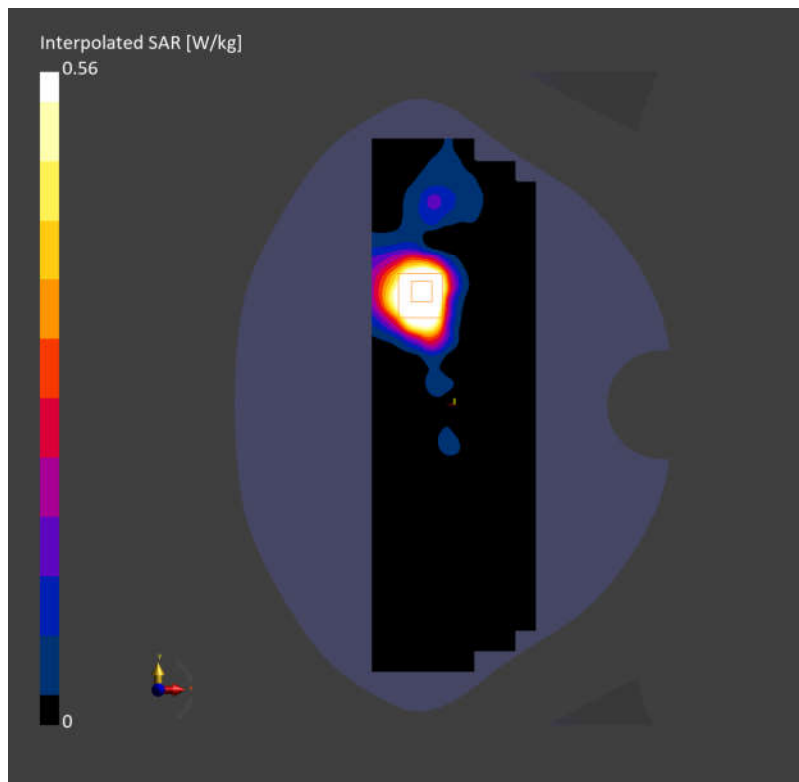

WIFI5G 802.11n HT20 116CH Right side 0mm

Communication System: WLAN 5GHz; Frequency: 5580.000

Medium: HSL. Medium parameters used: $f = 5580.000$ MHz; $\sigma = 5.12$ S/m; $\epsilon_r = 35.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(4.71, 4.71, 4.71); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (80.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.05 W/kg; SAR (10g) = 0.358 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 1.29 W/kg; SAR (10g) = 0.395 W/kg;

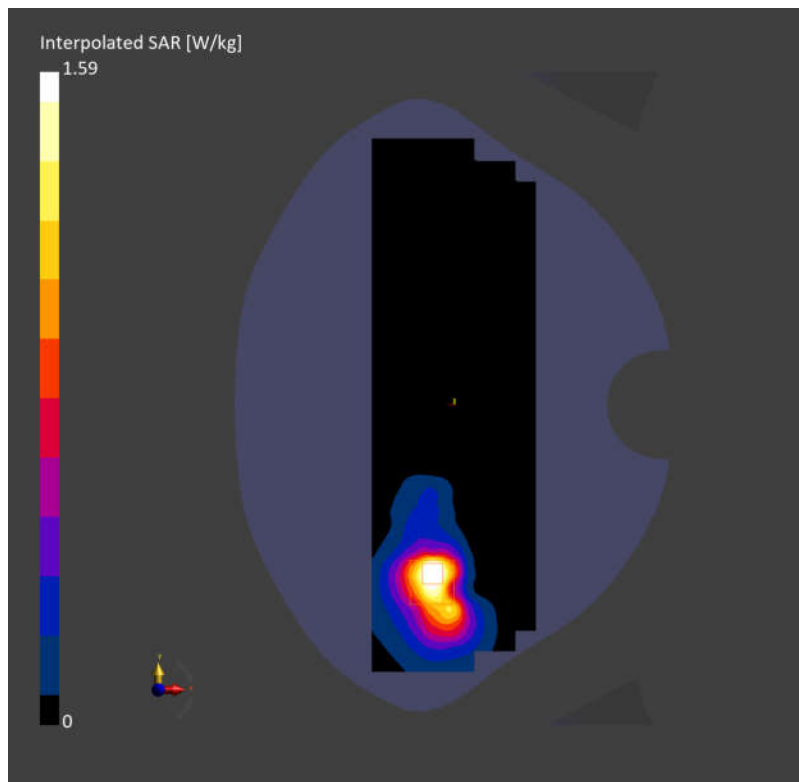

WIFI6G 802.11ax HE40 195CH Left cheek

Communication System: U-NII-8; Frequency: 6925.000

Medium: HSL. Medium parameters used: $f = 6925.000$ MHz; $\sigma = 6.73$ S/m; $\epsilon_r = 32.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(5.11, 5.28, 5.08); Calibrated: 2023-12-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (119.0 mm x 255.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.066 W/kg; SAR (10g) = 0.023 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 2.0 mm x 2.0 mm x 1.2 mm

Power Drift = -0.06 dB

SAR (1g) = 0.086 W/kg; SAR (10g) = 0.025 W/kg;

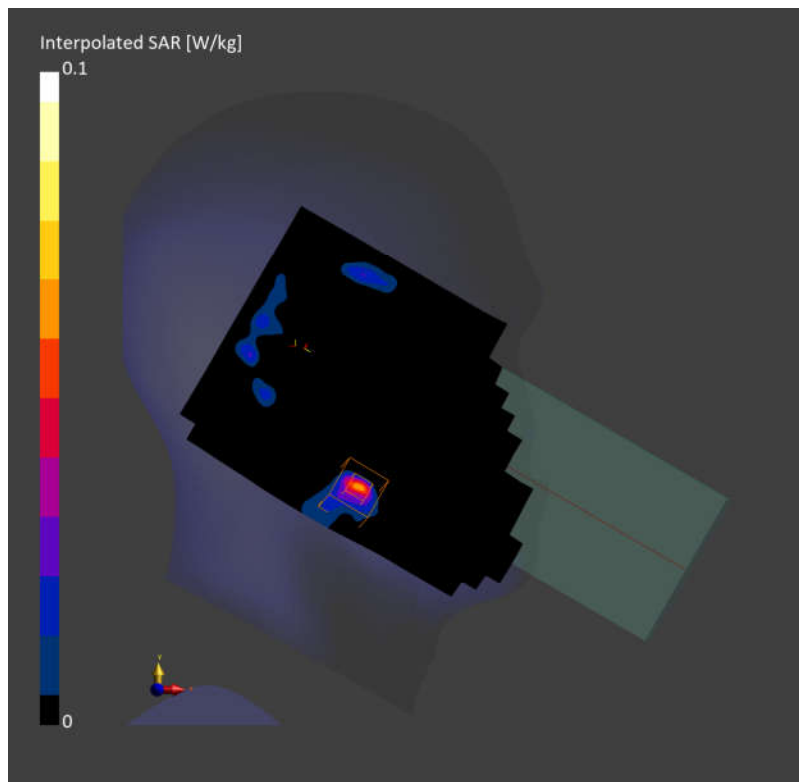

WIFI6G 802.11ax HE40 195CH Back side 10mm

Communication System: U-NII-8; Frequency: 6925.000

Medium: HSL. Medium parameters used: $f = 6925.000$ MHz; $\sigma = 6.73$ S/m; $\epsilon_r = 32.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(5.11, 5.28, 5.08); Calibrated: 2023-12-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (119.0 mm x 255.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.039 W/kg; SAR (10g) = 0.017 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.07 dB

SAR (1g) = 0.040 W/kg; SAR (10g) = 0.017 W/kg;

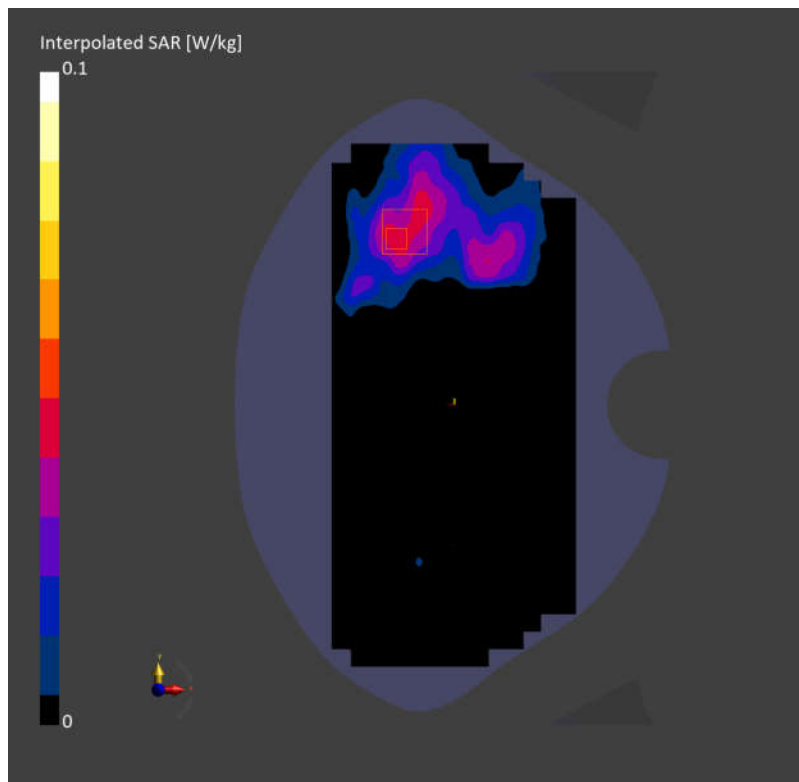

WIFI6G 802.11ax HE40 195CH Left side 0mm

Communication System: U-NII-8; Frequency: 6925.000

Medium: HSL. Medium parameters used: $f = 6925.000$ MHz; $\sigma = 6.73$ S/m; $\epsilon_r = 32.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(5.11, 5.28, 5.08); Calibrated: 2023-12-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (85.0 mm x 255.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.783 W/kg; SAR (10g) = 0.227 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.16 dB

SAR (1g) = 0.871 W/kg; SAR (10g) = 0.242 W/kg;

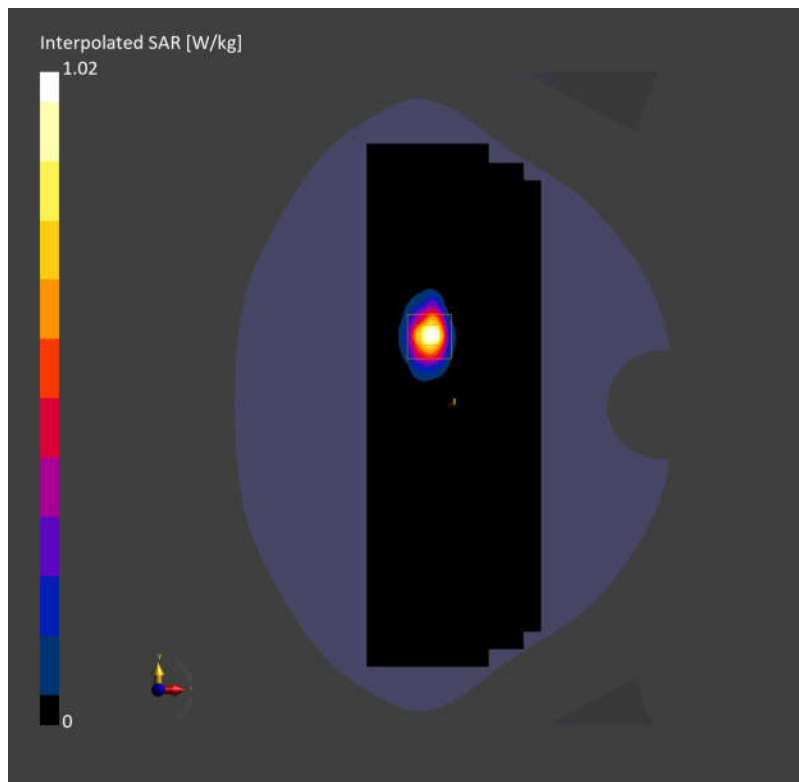

BT DH5 39CH Left cheek

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000

Medium: HSL. Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.41, 7.41, 7.41); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.043 W/kg; SAR (10g) = 0.023 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.045 W/kg; SAR (10g) = 0.025 W/kg;

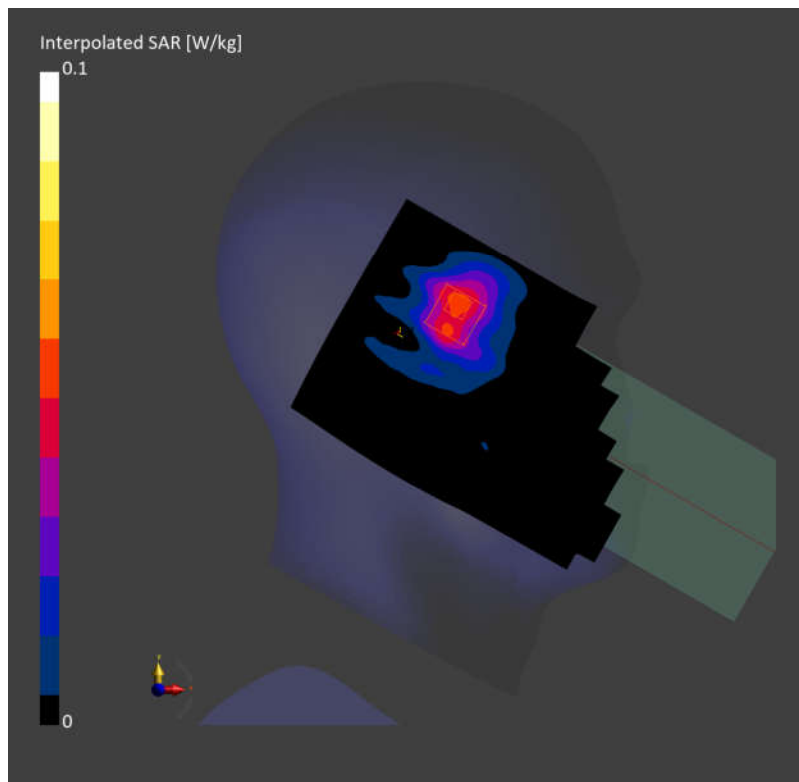

BT DH5 39CH Back side 10mm

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000

Medium: HSL. Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.41, 7.41, 7.41); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.025 W/kg; SAR (10g) = 0.014 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.17 dB

SAR (1g) = 0.025 W/kg; SAR (10g) = 0.014 W/kg;

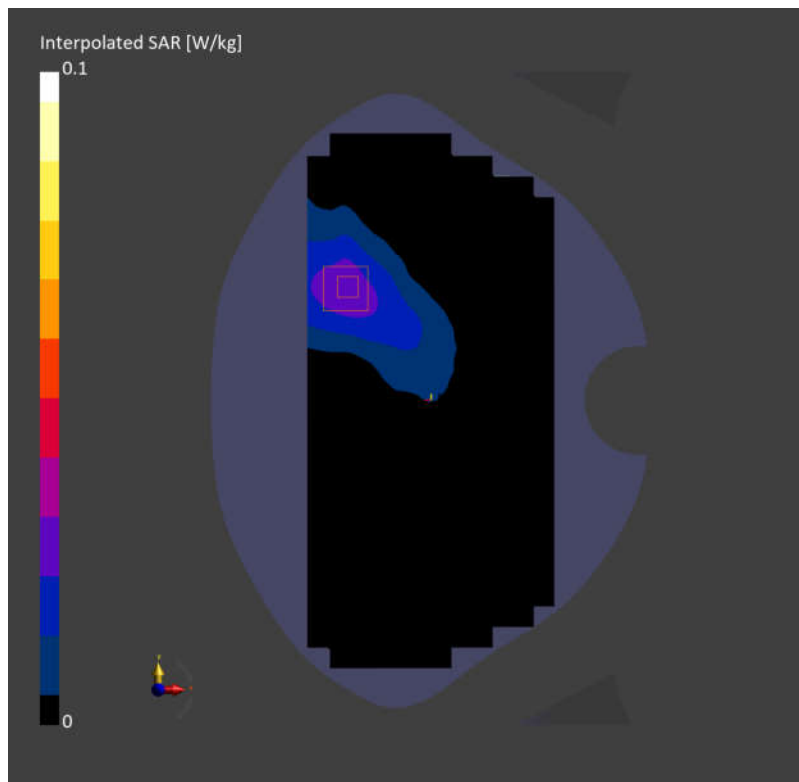

BT DH5 39CH Right side 10mm

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000

Medium: HSL. Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.41, 7.41, 7.41); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (80.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.103 W/kg; SAR (10g) = 0.054 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.108 W/kg; SAR (10g) = 0.059 W/kg;

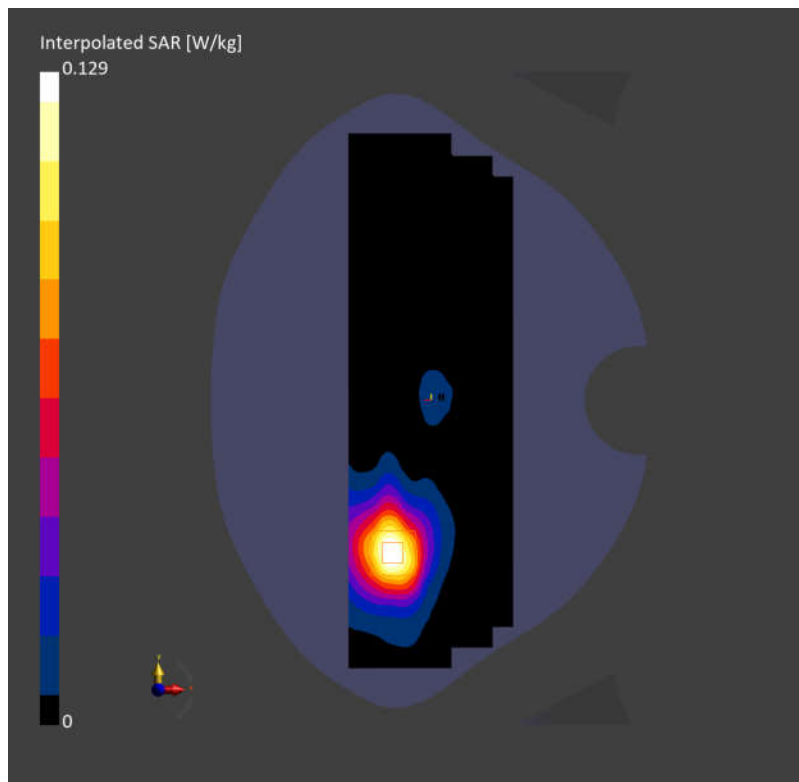

BT DH5 39CH Right side 0mm

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000

Medium: HSL. Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.41, 7.41, 7.41); Calibrated: 2023-10-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425

Area Scan (80.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.312 W/kg; SAR (10g) = 0.143 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.336 W/kg; SAR (10g) = 0.158 W/kg;

