


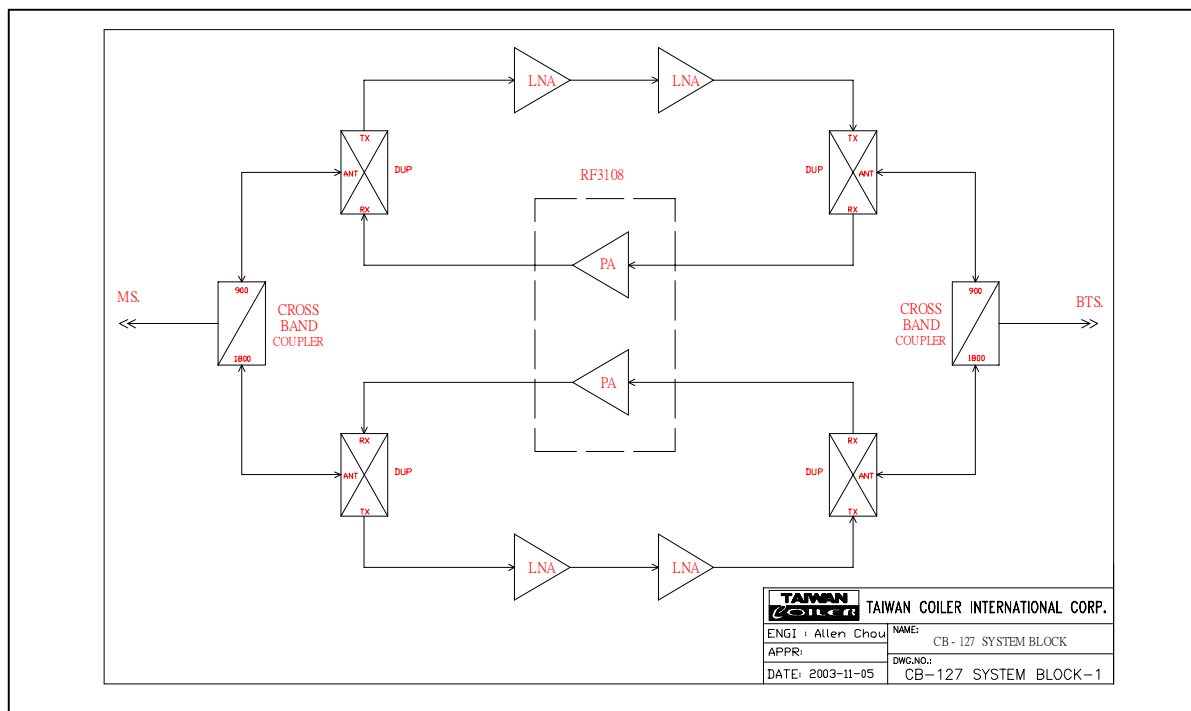

Cricuit description

- 1、To use crossband coupler feature to separate two path for both system.
- 2、To use duplexer's features to separate two path for uplink & downlink in same system
- 3、Used low noise amplifier to amplifying the downlink signal
- 4、Used power amplifer to amplifying the up link signal