

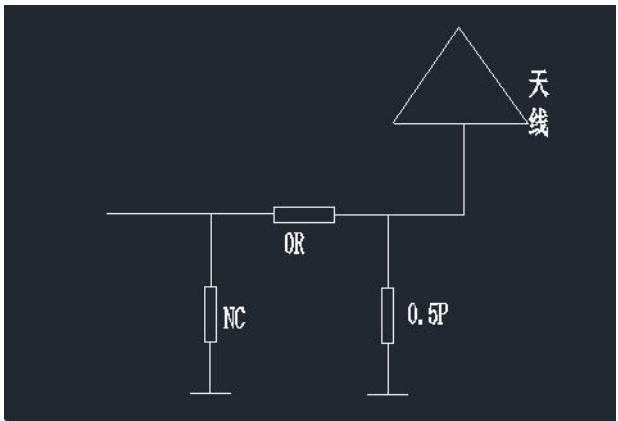
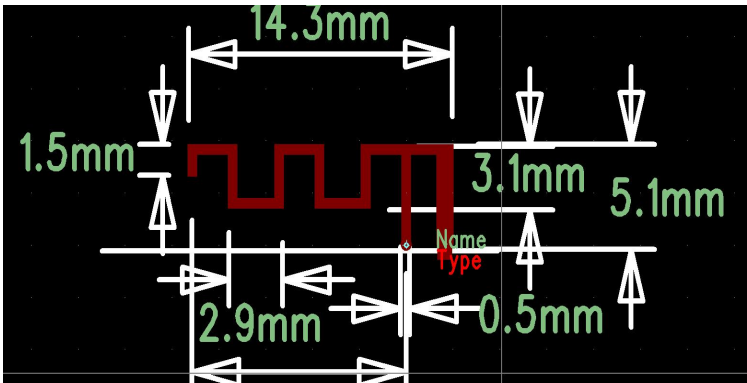


Shenzhen Helixun Technology Co., Ltd.

specifications: 2.4GHz, L=14.3mm

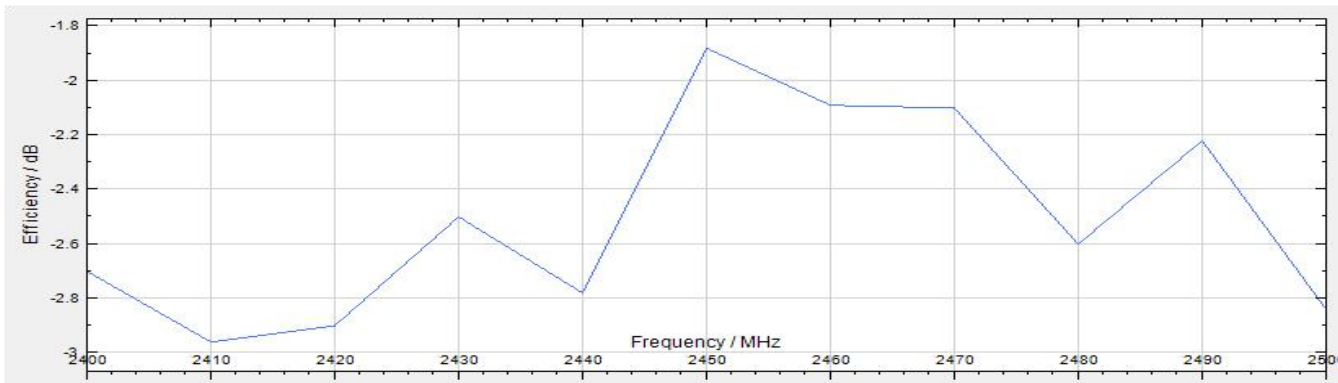



PassiveTestForBT2.4								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)
2400	53.7%	-2.7	4.53	-2.7	0	0	1.93	-13.27
2410	50.58%	-2.96	4.07	-2.7	0	0	1.47	-13.54
2420	51.29%	-2.9	4.39	-2.7	0	0	2.03	-14.14
2430	56.23%	-2.5	4.36	-2.7	0	0	2.06	-14.07
2440	52.72%	-2.78	4.72	-2.7	0	0	1.91	-14.21
2450	64.86%	-1.88	4.86	-2.7	0	0	2.86	-13.24
2460	61.8%	-2.09	5.77	-2.7	0	0	2.67	-13.53
2470	61.66%	-2.1	4.7	-2.7	0	0	3.24	-13.34
2480	54.95%	-2.6	5.21	-2.7	0	0	2.47	-14.84
2490	59.98%	-2.22	4.53	-2.7	0	0	3.3	-14.16
2500	52%	-2.84	4.86	-2.7	0	0	2.2	-13.56

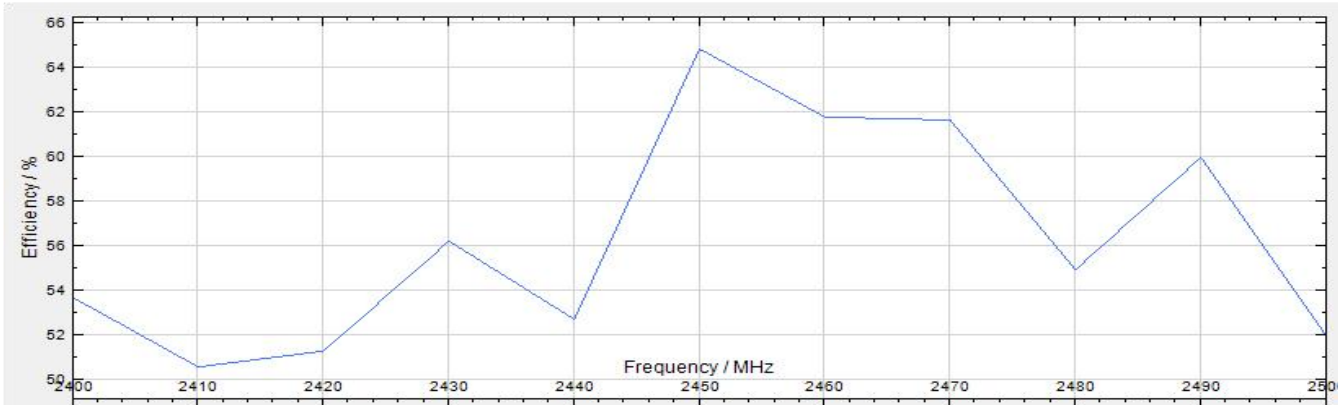



Address: Room 1004, Jinhuan Yu Building, No. 56 Tiezi Road, Xixiang Street, Bao'an District, Shenzhen

Shenzhen Helixun Technology Co., Ltd.



2400MHZ

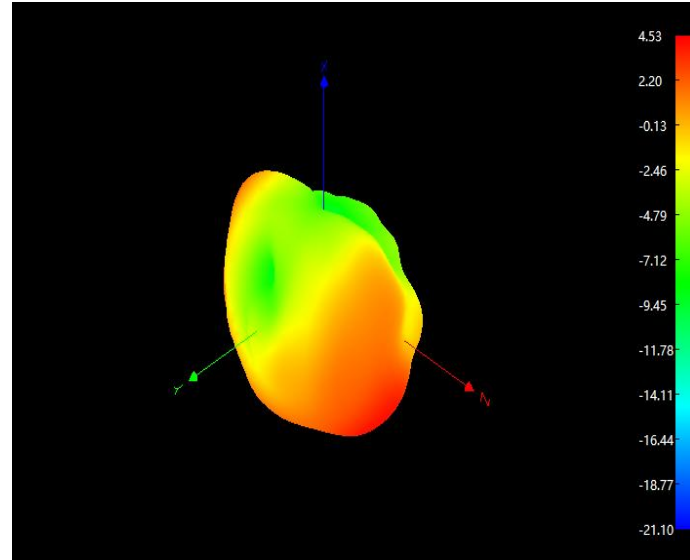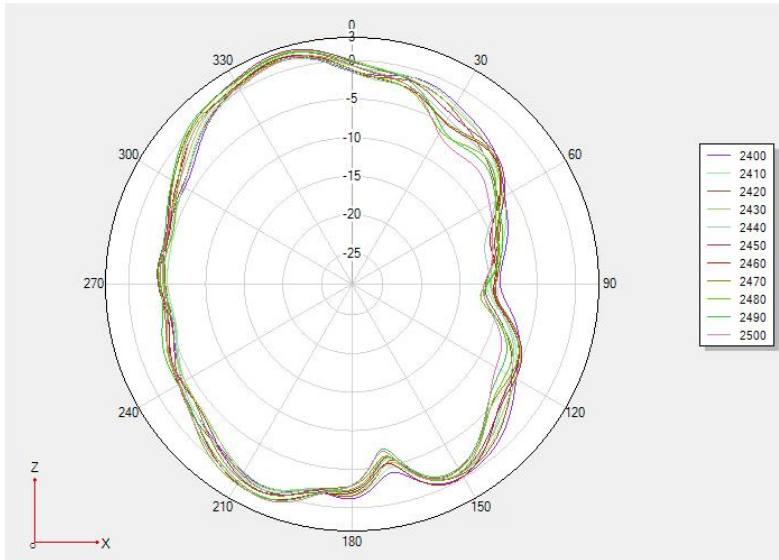

2450MHZ

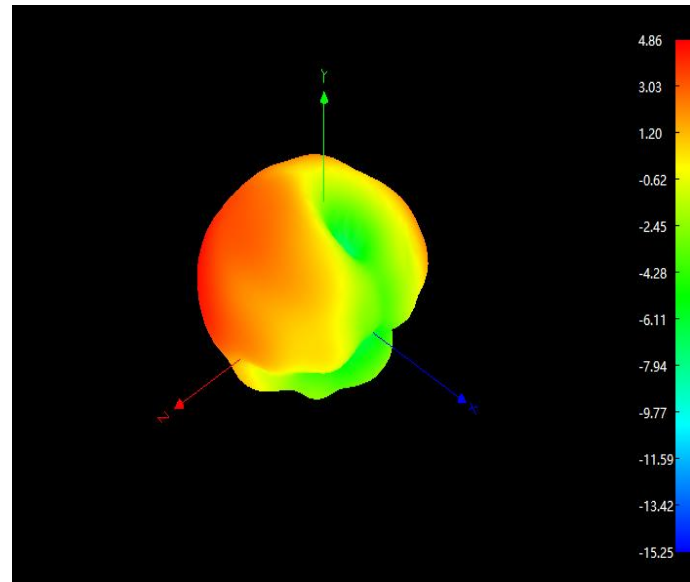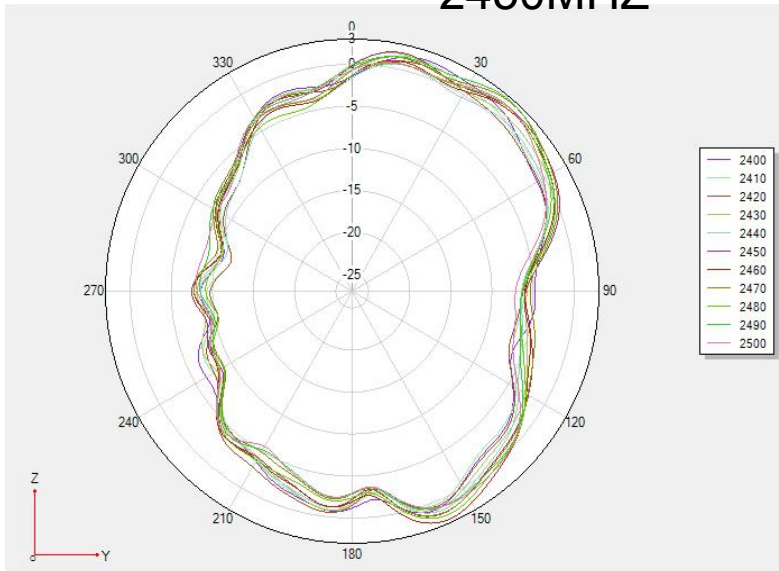

2480MHZ

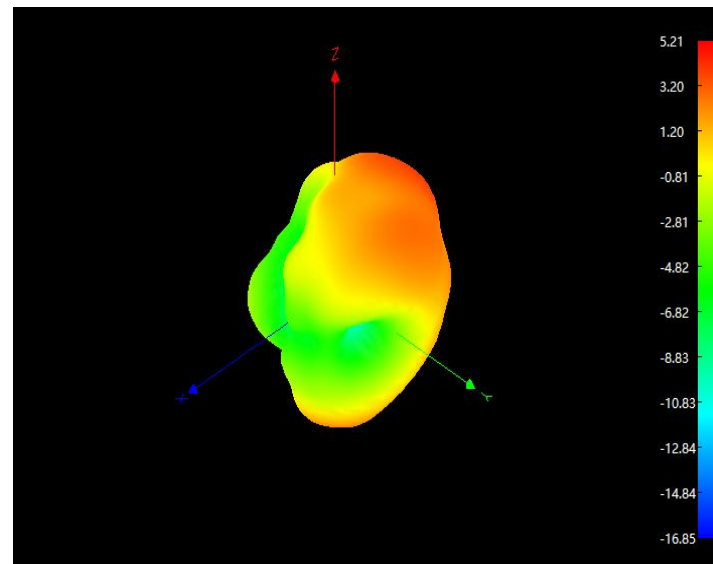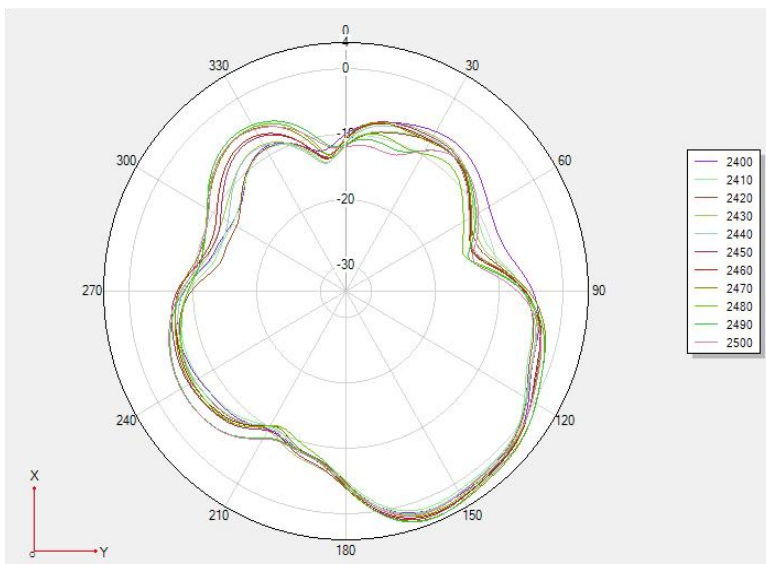

Address: Room 1004, Jinhuan Yu Building, No. 56 Tiezi Road, Xixiang Street, Bao'an District, Shenzhen

irectivity (dBi)	Beamwidth (3dB)	AttH (dB)	AttV (dB)
3.69	52	42.12	59.47
4.51	51	49.47	69.24
4.5	49	44.14	68.27
5.47	50	51.25	74.71
4.69	50	47.14	38.14
5.74	49	52.04	74.24
4.19	51	51.15	36.14
5.01	51	52.45	68.18
4.59	51	54.04	39.11
5.67	51	60.07	67.33
5.62	54	60.03	65.78

Application Information	
04Version	5.245.351
TotalTime	4h 02s 165ms
AdditionalInfor	NULL