

FCC Test Report

Product Name	Gateway
Model No.	PSC02-2/PSC01-2
FCC ID.	RHHPSC02

Applicant	Philio Technology Corporation
Address	8F.,No.653-2,Zhongzheng Rd., Xinzhuang Dist., New Taipei City 24257,Taiwan(R.O.C)

Date of Receipt	May 20, 2014
Issued Date	Jul. 02, 2014
Report No.	1450472R-RFUSP15V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

Test Report

Issued Date: Jul. 02, 2014

Report No. : 1450472R-RFUSP15V00



Product Name	Gateway
Applicant	Philio Technology Corporation
Address	8F.,No.653-2,Zhongzheng Rd., Xinzhuang Dist., New Taipei City 24257,Taiwan(R.O.C)
Manufacturer	Philio Technology Corporation
Model No.	PSC02-2/PSC01-2
FCC ID.	RHHPSC02
EUT Rated Voltage	DC 5V(Power by Adapter)
EUT Test Voltage	DC 5V(Power by Adapter)
Trade Name	
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2014 ANSI C63.10: 2009
Test Result	Complied

Documented By

:

Jinn Chen

(Senior Adm. Specialist / Jinn Chen)

Tested By

:

Vincent chu

(Engineer / Vincent Chu)

Approved By

:



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1. EUT Description	4
1.2. Operation Description	5
1.3. Tested System Details	6
1.4. Configuration of Test System.....	6
1.5. EUT Exercise Software.....	6
1.6. Test Facility	7
2. Conducted Emission	8
2.1. Test Equipment	8
2.2. Test Setup.....	8
2.3. Limits	9
2.4. Test Procedure	9
2.5. Uncertainty.....	9
2.6. Test Result of Conducted Emission	10
3. Radiated Emission	14
3.1. Test Equipment	14
3.2. Test Setup.....	15
3.3. Limits	16
3.4. Test Procedure.....	17
3.5. Uncertainty.....	17
3.6. Test Result of Radiated Emission	18
4. Band Edge.....	27
4.1. Test Equipment	27
4.2. Test Setup.....	27
4.3. Limit.....	28
4.4. Test Procedure	28
4.5. Uncertainty.....	28
4.6. Test Result of Band Edge.....	29
5. EMI Reduction Method During Compliance Testing	33
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Gateway
Trade Name	
FCC ID.	RHHPSC02
Model No.	PSC02-2/PSC01-2
Frequency Range	908.42MHz, 916MHz
Type of Modulation	FSK
Number of Channels	2
Channel Control	Auto
Antenna Type	Monopole Antenna
USB to Power Cable	Shielded, 1m
Power Adapter	MFR: ENERTRONIX, M/N: EXA1102UA Input: 100-240V, 47-63Hz, 0.5A Output: 5Vdc  1A

Center Frequency of Each Channel:

Channel	Frequency
Channel 1:	908.42MHz
Channel 2:	916MHz

Note:

1. The EUT is a Gateway with a built-in 908.42MHz, 916MHz Z-Wave transceiver.
2. The EUT is including two models. The different is PSC01 not support battery to supply voltage.
3. These tests are conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.249.
4. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode	Mode 1: Transmit
-----------	------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1. Notebook PC	DELL	PPT	N/A	Non-Shielded, 0.8m
2. USB Dongle	Transcend	JFV30	N/A	N/A

Signal Cable Type	Signal cable Description
A. RJ45 Cable	Non-shielded, 1.5m

1.4. Configuration of Test System

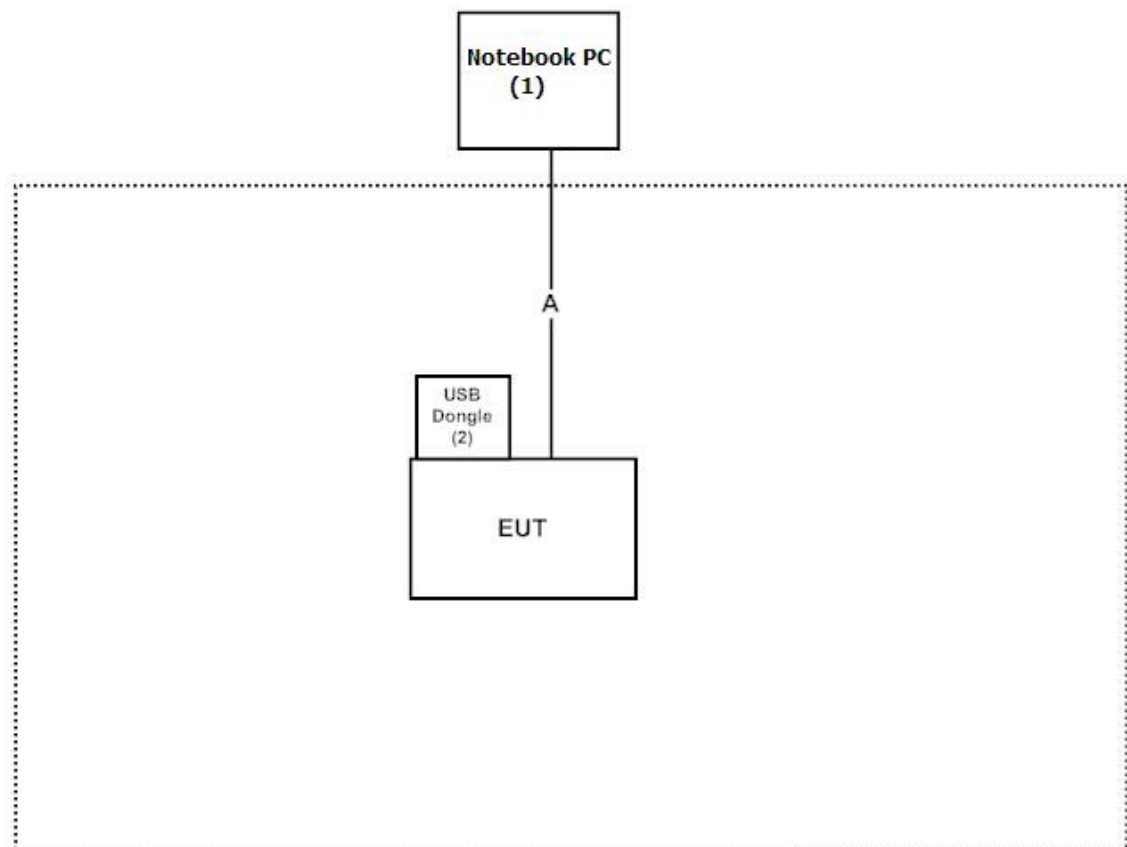

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in section 1.4.
- (2) Execute software "PuTTY (V0.63)" on the Notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Press "OK" to start the continuous Transmit.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://tw.quietek.com/modules/myalbum/>
The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Site Name: Quietek Corporation
Site Address: No.5-22, Ruishukeng Linkou Dist., New Taipei City
24451, Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2013	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2014	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2014	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2014	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2014	
	No.8 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

2.2. Test Setup

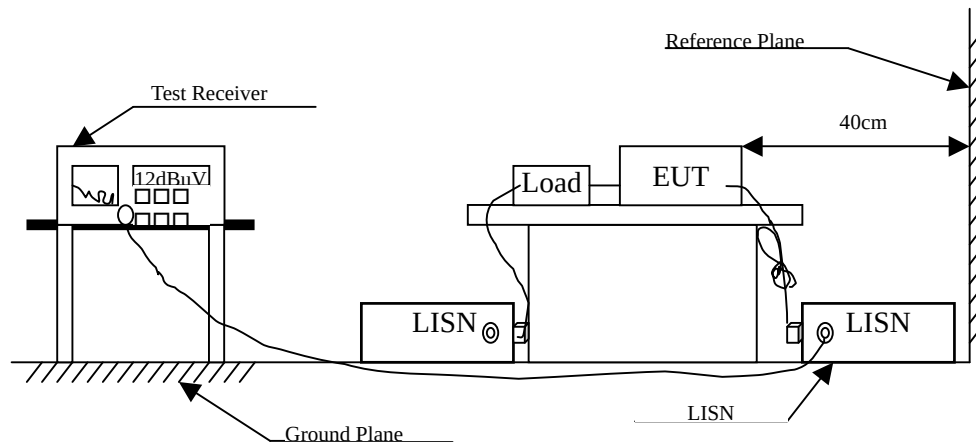

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : Gateway
Test Item : Conducted Emission Test
Power Line : Line 1
Test Mode : Mode 1: Transmit (908.42MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Line 1					
Quasi-Peak					
0.173	9.742	25.360	35.103	-30.240	65.343
0.224	9.740	23.750	33.490	-30.396	63.886
0.287	9.743	23.600	33.343	-28.743	62.086
0.556	9.755	32.790	42.545	-13.455	56.000
0.873	9.769	27.000	36.769	-19.231	56.000
2.252	9.850	29.430	39.280	-16.720	56.000
Average					
0.173	9.742	18.260	28.003	-27.340	55.343
0.224	9.740	17.100	26.840	-27.046	53.886
0.287	9.743	13.790	23.533	-28.553	52.086
0.556	9.755	24.030	33.785	-12.215	46.000
0.873	9.769	16.950	26.719	-19.281	46.000
2.252	9.850	19.080	28.930	-17.070	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Gateway
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmit (908.42MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV	dB	dBuV
Line 2					
Quasi-Peak					
0.170	9.747	29.800	39.547	-25.882	65.429
0.228	9.750	24.770	34.520	-29.251	63.771
0.353	9.746	18.790	28.536	-31.664	60.200
0.615	9.758	23.220	32.978	-23.022	56.000
0.896	9.780	24.090	33.870	-22.130	56.000
2.248	9.850	26.460	36.310	-19.690	56.000
Average					
0.170	9.747	22.800	32.547	-22.882	55.429
0.228	9.750	16.840	26.590	-27.181	53.771
0.353	9.746	8.480	18.226	-31.974	50.200
0.615	9.758	14.060	23.818	-22.182	46.000
0.896	9.780	14.540	24.320	-21.680	46.000
2.248	9.850	17.140	26.990	-19.010	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Gateway
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: Transmit (916MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV	dB	dBuV
Line 1					
Quasi-Peak					
0.162	9.548	42.130	51.678	-13.979	65.657
0.388	9.587	35.520	45.107	-14.093	59.200
0.806	9.596	25.620	35.216	-20.784	56.000
1.509	9.638	26.290	35.928	-20.072	56.000
2.912	9.700	20.370	30.070	-25.930	56.000
14.920	10.160	21.790	31.950	-28.050	60.000
Average					
0.162	9.548	31.970	41.518	-14.139	55.657
0.388	9.587	28.520	38.107	-11.093	49.200
0.806	9.596	18.990	28.586	-17.414	46.000
1.509	9.638	18.400	28.038	-17.962	46.000
2.912	9.700	11.720	21.420	-24.580	46.000
14.920	10.160	7.300	17.460	-32.540	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Gateway
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmit (916MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV	dB	dBuV
Line 2					
Quasi-Peak					
0.166	9.587	39.790	49.377	-16.166	65.543
0.197	9.589	35.690	45.279	-19.378	64.657
0.384	9.597	35.600	45.197	-14.117	59.314
0.873	9.619	27.200	36.819	-19.181	56.000
11.974	10.070	14.230	24.300	-35.700	60.000
15.045	10.230	13.250	23.480	-36.520	60.000
Average					
0.166	9.587	30.970	40.557	-14.986	55.543
0.197	9.589	26.920	36.509	-18.148	54.657
0.384	9.597	28.410	38.007	-11.307	49.314
0.873	9.619	20.420	30.039	-15.961	46.000
11.974	10.070	-0.600	9.470	-40.530	50.000
15.045	10.230	2.300	12.530	-37.470	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Radiated Emission

3.1. Test Equipment


The following test equipment are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X Loop Antenna	Teseq	HLA6120 / 26739	Jul., 2014
	X Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	X Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
	X Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2014
	X Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2014
	X Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2013
	X Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/ 925975	Mar, 2014
	X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2014
	X Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X Coaxial Cable	Quietek	QTK-CABLE/ CAB5	Feb., 2014
	X Controller	Quietek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with "X" are used to measure the final test results.

3.2. Test Setup

Below 1GHz

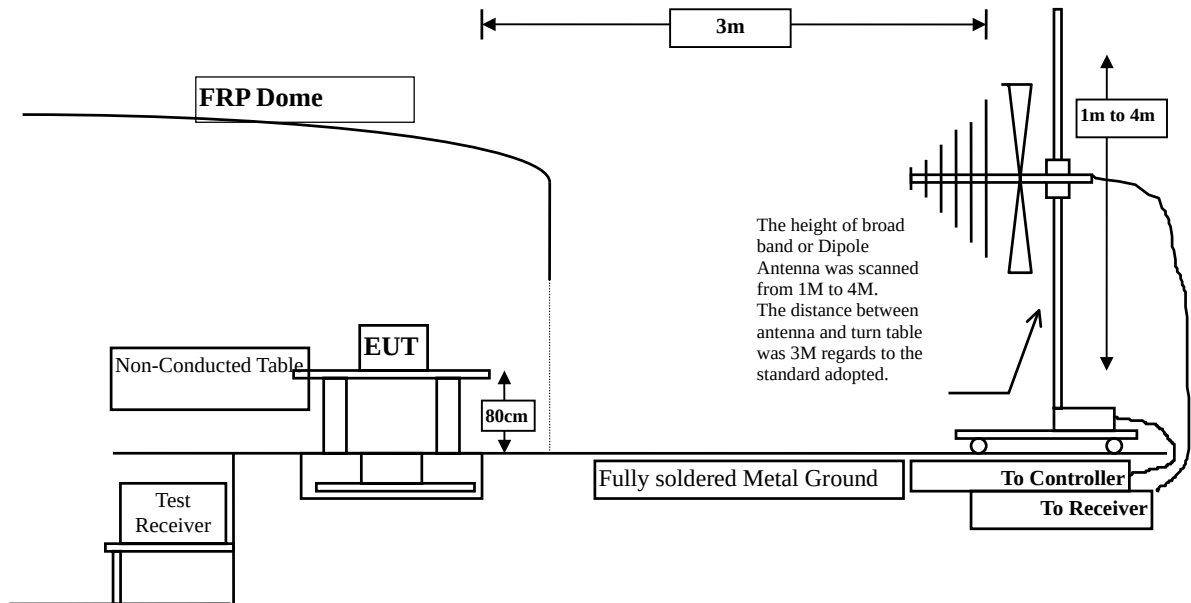

Above 1GHz

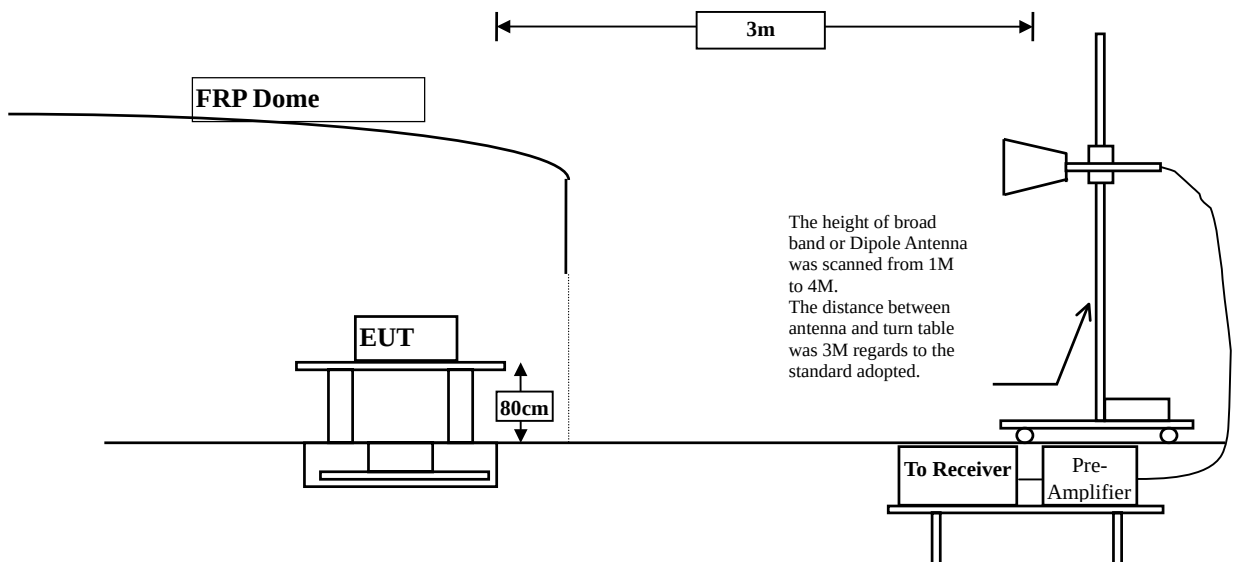

3.3. Limits

➤ Fundamental and Harmonics Emission Limits

FCC Part 15 Subpart C Paragraph 15.249 Limits				
Frequency MHz	Field Strength of Fundamental		Field Strength of Harmonics	
	(mV/m @3m)	(dBuV/m @3m)	(uV/m @3m)	(dBuV/m @3m)
902-928	50	94	500	54
2400-2483.5	50	94	500	54
5725-5875	50	94	500	54

Remarks : 1. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks : 1. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2009 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

3.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

3.6. Test Result of Radiated Emission

Product : Gateway
Test Item : Fundamental Radiated Emission
Test Site : No.3OATS
Test Mode : Mode 1: Transmit (X-axis)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
908.420	5.566	78.654	84.220	-9.780	94.000
916.000	5.654	77.556	83.210	-10.790	94.000
Vertical					
908.420	6.676	74.554	81.230	-12.770	94.000
916.000	6.710	73.300	80.010	-13.990	94.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Product : Gateway
 Test Item : Fundamental Radiated Emission
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit (Y-asix)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
908.420	5.566	77.694	83.260	-10.740	94.000
916.000	5.654	74.556	80.210	-13.790	94.000
Vertical					
908.420	6.676	74.684	81.360	-12.640	94.000
916.000	6.710	73.650	80.360	-13.640	94.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Product : Gateway
 Test Item : Fundamental Radiated Emission
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit (Z-asix)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
908.420	5.566	75.754	81.320	-12.680	94.000
916.000	5.654	73.536	79.190	-14.810	94.000
Vertical					
908.420	6.676	73.544	80.220	-13.780	94.000
916.000	6.710	71.500	78.210	-15.790	94.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Product : Gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (908.42MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
1816.840	-4.390	49.230	44.840	-29.160	74.000
2745.260	-0.942	52.020	51.077	-22.923	74.000
3633.680	-0.395	45.020	44.625	-29.375	74.000
4542.100	1.901	42.360	44.262	-29.738	74.000
5450.520	4.228	42.260	46.488	-27.512	74.000
6358.940	6.502	42.260	48.762	-25.238	74.000
7267.360	11.106	36.290	47.396	-26.604	74.000
8175.780	14.925	37.960	52.885	-21.115	74.000
9048.200	13.087	39.260	52.348	-21.652	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (908.42MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Vertical					
Peak Detector:					
1816.840	-2.613	46.260	43.647	-30.353	74.000
2725.260	-1.228	49.020	47.792	-26.208	74.000
3633.680	0.379	48.150	48.529	-25.471	74.000
4542.100	5.407	48.110	53.517	-20.483	74.000
5450.520	5.976	45.020	50.995	-23.005	74.000
6358.940	7.975	44.020	51.996	-22.004	74.000
7267.360	11.925	39.260	51.185	-22.815	74.000
8175.780	15.635	37.360	52.995	-21.005	74.000
9084.120	13.142	40.150	53.292	-20.708	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Gateway
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (916MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
1832.000	-1.292	49.260	47.968	-26.032	74.000
2748.000	-1.900	51.970	50.070	-23.930	74.000
3664.000	-1.641	44.580	42.939	-31.061	74.000
4580.000	0.670	44.570	45.241	-28.759	74.000
5496.000	4.424	41.090	45.515	-28.485	74.000
6412.000	5.944	40.580	46.525	-27.475	74.000
7328.000	10.103	37.020	47.123	-26.877	74.000
8244.000	10.591	35.680	46.271	-27.729	74.000
9160.000	11.453	37.980	49.433	-24.567	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Gateway
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (916MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Vertical					
Peak Detector:					
1832.000	-0.666	45.780	45.114	-28.886	74.000
2748.000	-2.777	47.890	45.113	-28.887	74.000
3664.000	-1.420	47.580	46.159	-27.841	74.000
4580.000	2.285	49.120	51.405	-22.595	74.000
5496.000	4.419	44.870	49.289	-24.711	74.000
6412.000	6.060	43.570	49.630	-24.370	74.000
7328.000	10.732	37.850	48.582	-25.418	74.000
8244.000	11.499	38.540	50.039	-23.961	74.000
9160.000	11.539	39.270	50.809	-23.191	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Gateway
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (908.42MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
92.080	-8.819	32.067	23.248	-20.252	43.500
173.560	-9.954	37.224	27.271	-16.229	43.500
266.680	-4.963	37.425	32.462	-13.538	46.000
412.180	-3.245	37.613	34.368	-11.632	46.000
522.760	1.786	38.306	40.092	-5.908	46.000
697.360	3.171	36.271	39.442	-6.558	46.000
Vertical					
202.660	-7.739	37.260	29.521	-13.979	43.500
324.880	-5.841	37.742	31.901	-14.099	46.000
456.800	-4.697	38.392	33.695	-12.305	46.000
602.300	-2.333	36.962	34.629	-11.371	46.000
707.060	0.089	37.091	37.180	-8.820	46.000
856.440	0.562	38.427	38.989	-7.011	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Gateway
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (916MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
134.760	-7.473	32.382	24.909	-18.591	43.500
266.680	-5.510	33.313	27.803	-18.197	46.000
412.180	-0.171	30.755	30.584	-15.416	46.000
590.660	3.331	28.158	31.489	-14.511	46.000
741.980	3.892	27.812	31.704	-14.296	46.000
965.080	7.222	31.387	38.609	-15.391	54.000
Vertical					
113.420	-3.709	32.181	28.472	-15.028	43.500
262.800	-4.944	32.785	27.841	-18.159	46.000
388.900	-0.726	29.814	29.088	-16.912	46.000
604.240	2.199	28.063	30.263	-15.737	46.000
798.240	2.629	29.557	32.185	-13.815	46.000
949.560	3.156	30.951	34.107	-11.893	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

4. Band Edge


4.1. Test Equipment

The following test equipments are used during the band edge tests:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 3	X Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2014
	X Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2014
	Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2013
	Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/ 925975	Mar, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2014
	X Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2014
	X Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A

- Note:
1. All equipments are calibrated every one year.
 2. The test equipments marked by "X" are used to measure the final test results.

4.2. Test Setup

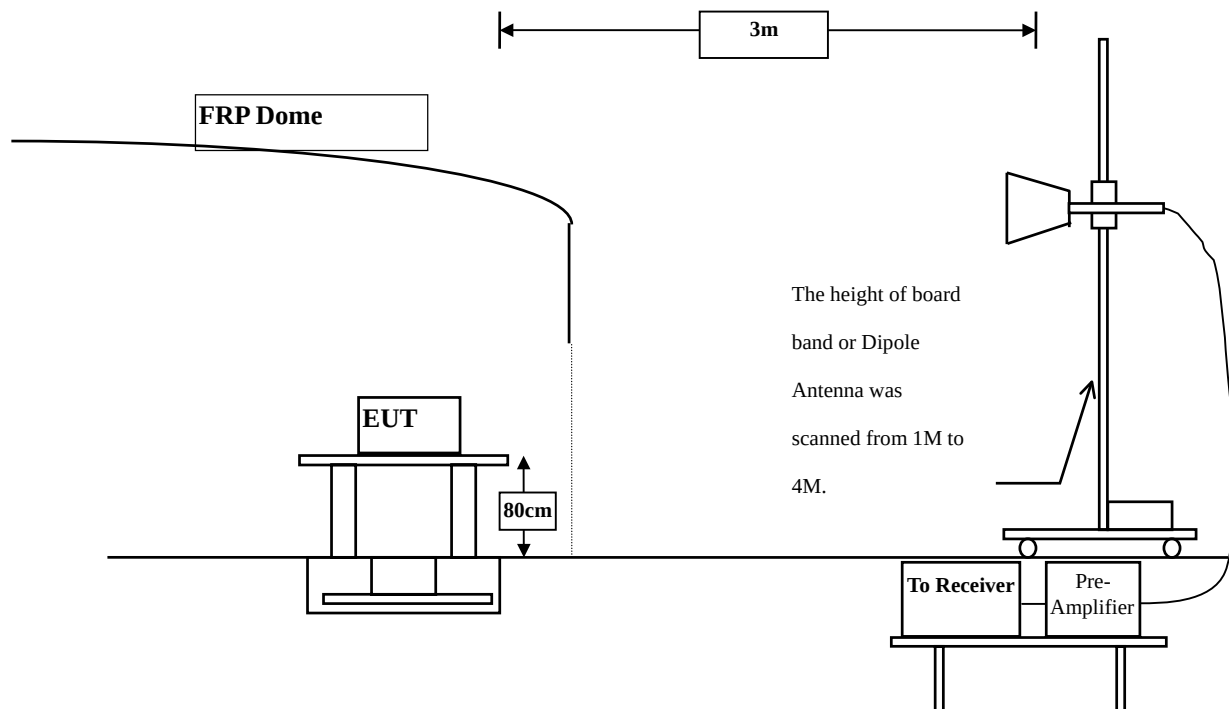

4.3. Limit

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2009 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30)is 120 kHz, above 1GHz are 1 MHz.

4.5. Uncertainty

Radiated is ± 3.9 dB.


4.6. Test Result of Band Edge

Product : Gateway
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (908.42MHz)

RF Radiated Measurement (Horizontal):

No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Quasi-Peak Limit (dBuV/m)	Result
01(Quasi-Peak)	902.000	5.500	21.891	27.390	46.000	Pass

Figure Channel 01: Horizontal (Quasi-Peak)

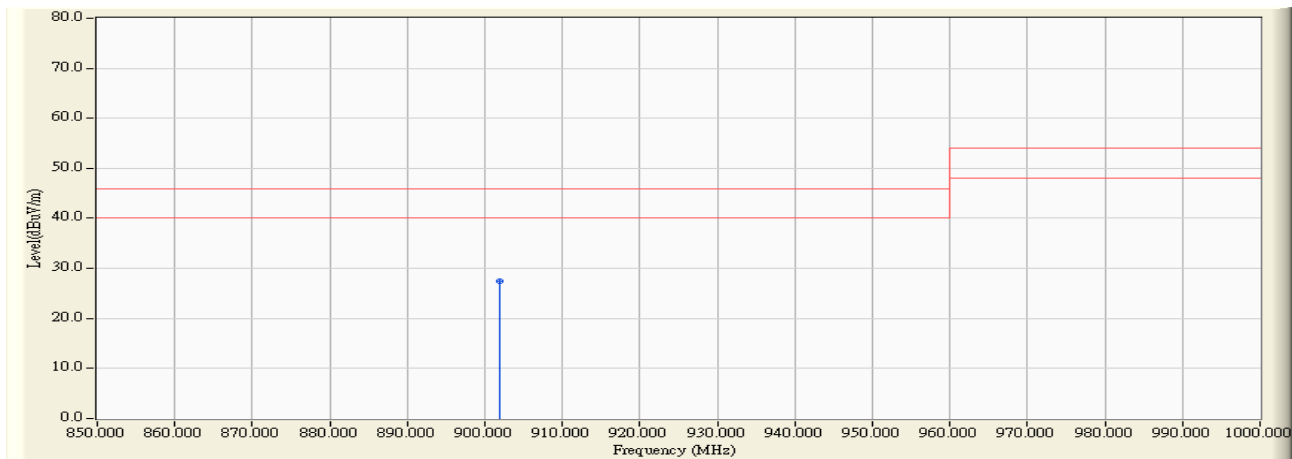

Note:


1. Quasi-Peak measurements: RBW=100kHz, VBW=1MHz, Sweep: Auto.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Product : Gateway
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (908.42MHz)

RF Radiated Measurement (Vertical):

No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Quasi-Peak Limit (dBuV/m)	Result
01(Quasi-Peak)	902.000	6.650	19.900	26.550	46.000	Pass

Figure Channel 01: Vertical (Quasi-Peak)

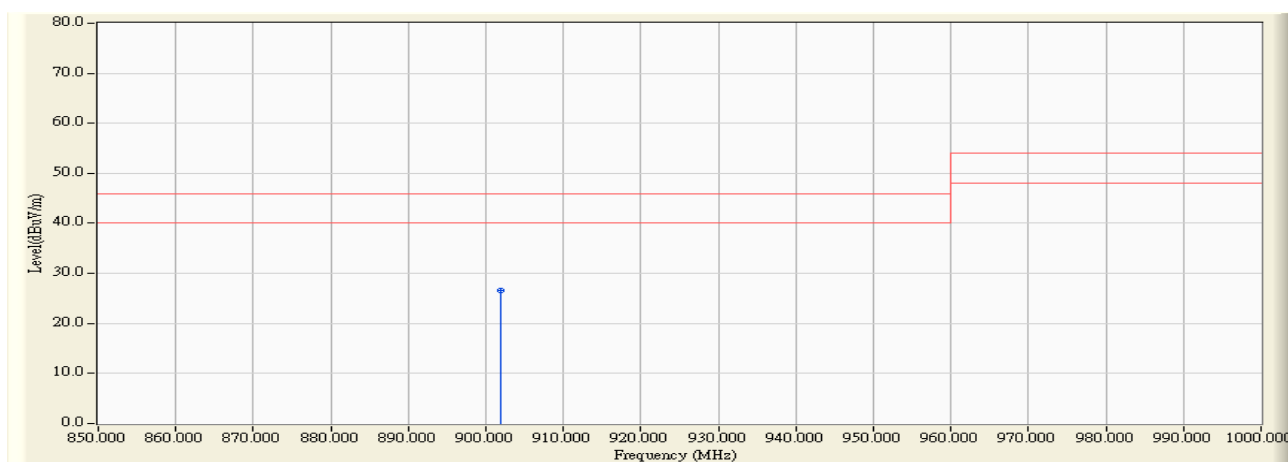

Note:

1. Quasi-Peak measurements: RBW=100kHz,VBW=1MHz,Sweep: Auto.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.


Product : Gateway
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (916MHz)

RF Radiated Measurement (Horizontal):

No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Quasi-Peak Limit (dBuV/m)	Result
02(Quasi-Peak)	928.000	5.780	18.200	23.980	46.000	Pass

Figure Channel 02:

Horizontal (Quasi-Peak)

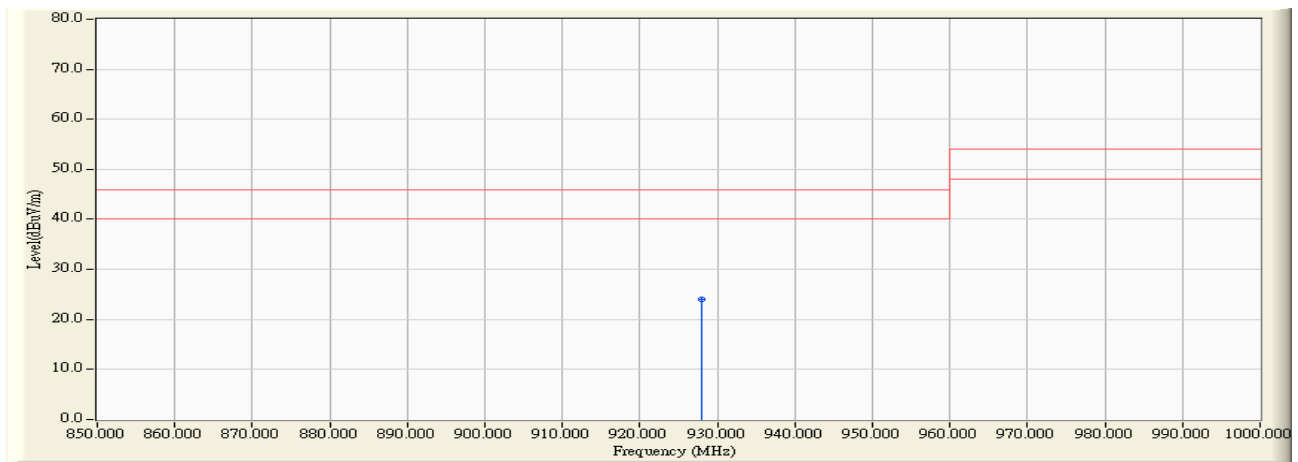

Note:


1. Quasi-Peak measurements: RBW=100kHz,VBW=1MHz,Sweep: Auto.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Product : Gateway
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (916MHz)

RF Radiated Measurement (Vertical):

No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Quasi-Peak Limit (dBuV/m)	Result
02(Quasi-Peak)	928.000	6.760	15.430	22.190	46.000	Pass

Figure Channel 02: Vertical (Quasi-Peak)

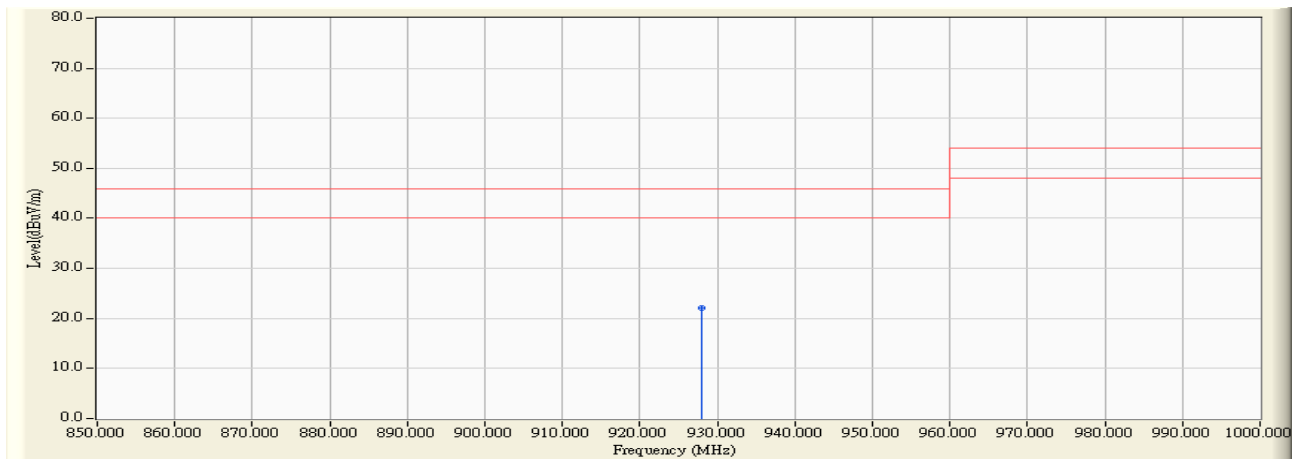

Note:

1. Quasi-Peak measurements: RBW=100kHz,VBW=1MHz,Sweep: Auto.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

5. EMI Reduction Method During Compliance Testing

No modification was made during testing.