


Test Report

EUT Information

EUT Name: DATA TERMINAL MODULE
Model: ME310G1-WW
Test Mode: TX High 3.75kHz QPSK 1@0
Test Voltage:: DC 3.8V
Remark: Temp 22 Humi:50%
Test Standard: FCC Part 22 and RSS-132 Issue 3
Tested By: Kei Zhang
Reviewed By: Terry Yin

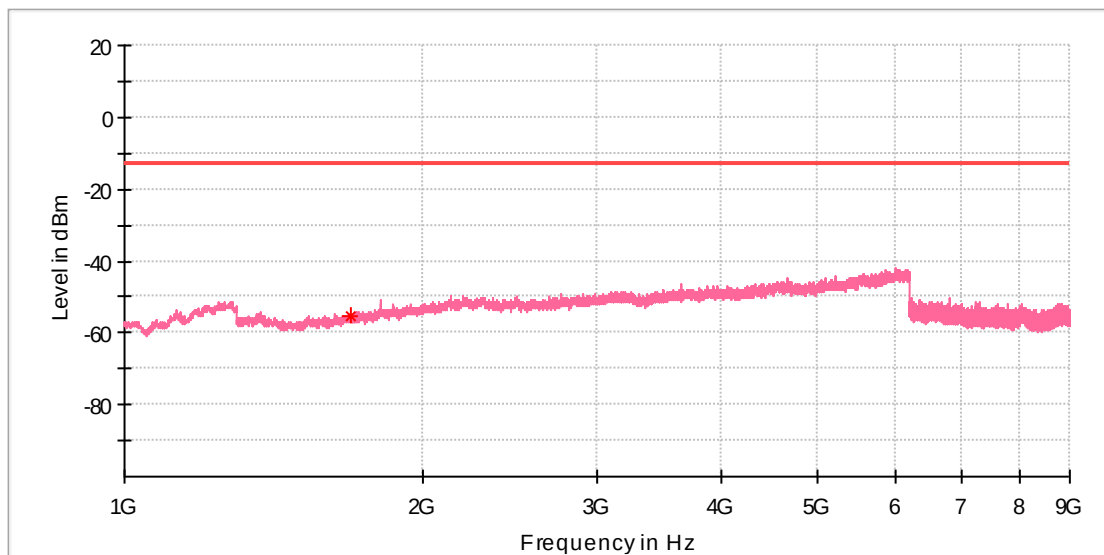

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	DET 2 (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1693.000000	-55.24	---	-13.00	42.24	100.0	V	89.0	-92.1


Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 3.75kHz QPSK 1@47
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

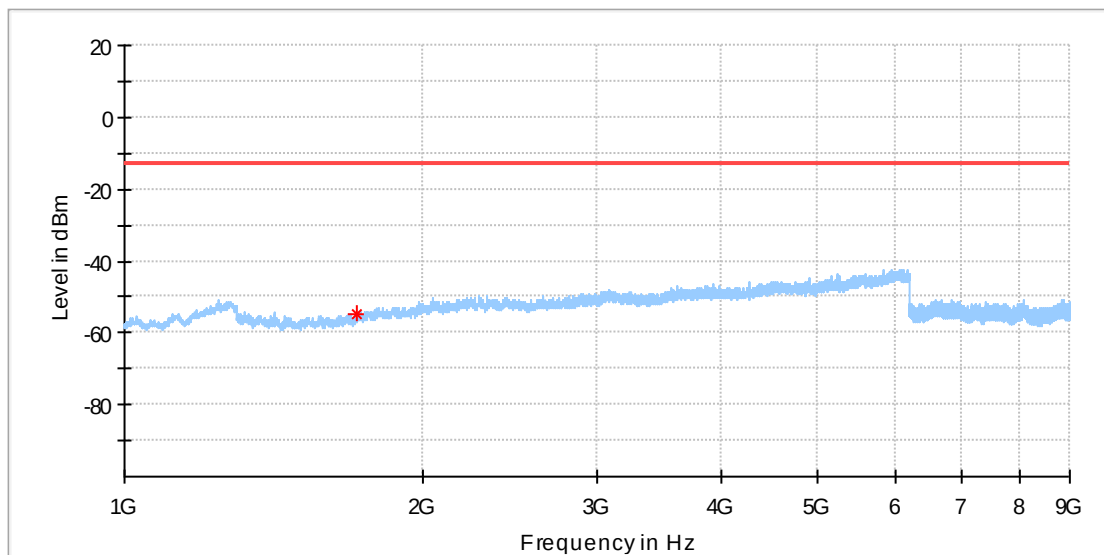

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	DET 2 (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1715.500000	-54.63	---	-13.00	41.63	100.0	H	185.0	-91.9


Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 3.75kHz QPSK 1@47
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

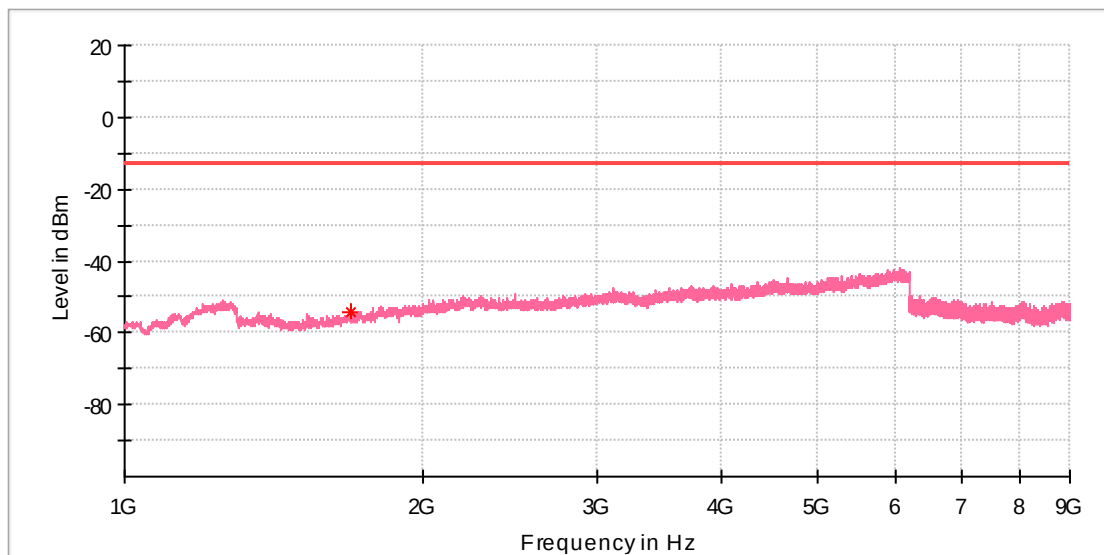

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	DET 2 (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1695.500000	-54.50	---	-13.00	41.50	100.0	V	244.0	-92.1

Final_Result


Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
---	---	---	---	---	---	---	---

15 kHz

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 15kHz BPSK 1@0
Test Voltage:	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

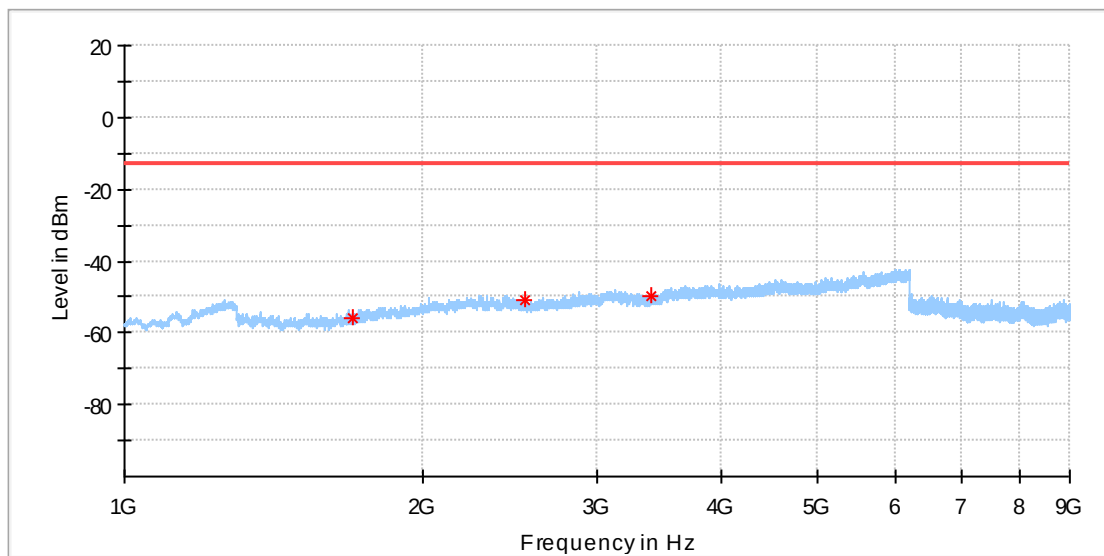


Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1698.000000	-55.88	-13.00	42.88	100.0	H	251.0	-92.4
2540.500000	-50.88	-13.00	37.88	100.0	H	258.0	-88.3
3403.500000	-49.60	-13.00	36.60	100.0	H	230.0	-87.1

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 15kHz BPSK 1@0
Test Voltage::	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

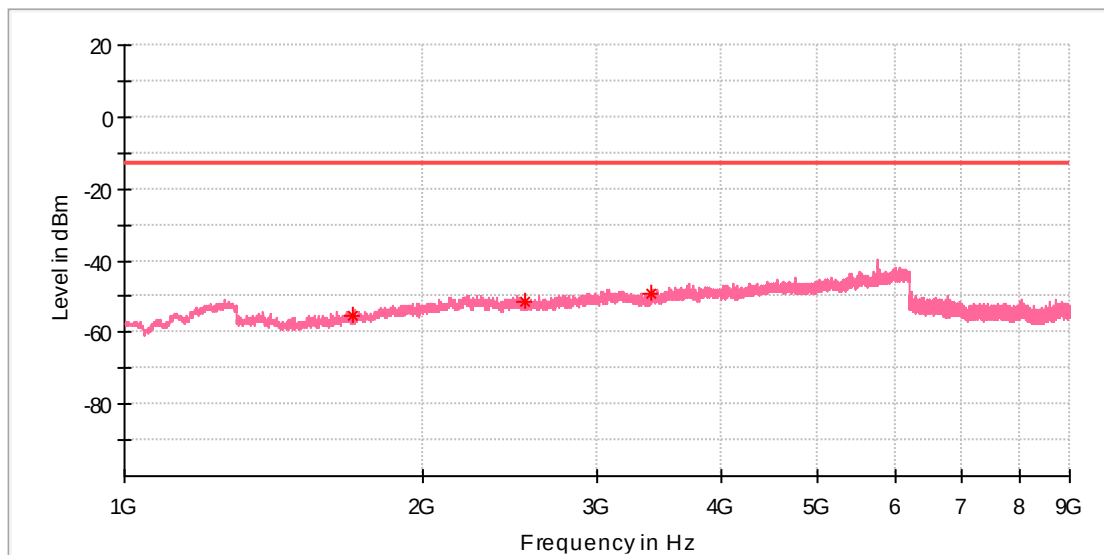


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1700.500000	-55.13	-13.00	42.13	100.0	V	351.0	-92.0
2540.500000	-51.28	-13.00	38.28	100.0	V	123.0	-88.4
3395.000000	-49.15	-13.00	36.15	100.0	V	207.0	-87.1

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 15kHz BPSK 1@11
Test Voltage::	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

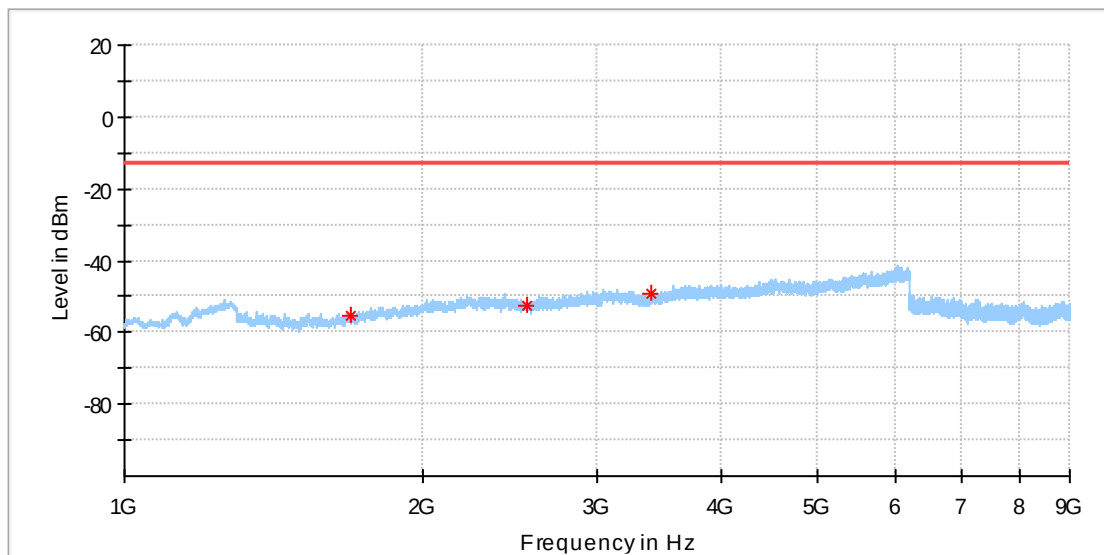


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1694.000000	-55.50	-13.00	42.50	100.0	H	81.0	-92.4
2551.000000	-52.63	-13.00	39.63	100.0	H	123.0	-88.4
3401.500000	-49.08	-13.00	36.08	100.0	H	0.0	-87.1

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 15kHz BPSK 1@11
Test Voltage::	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

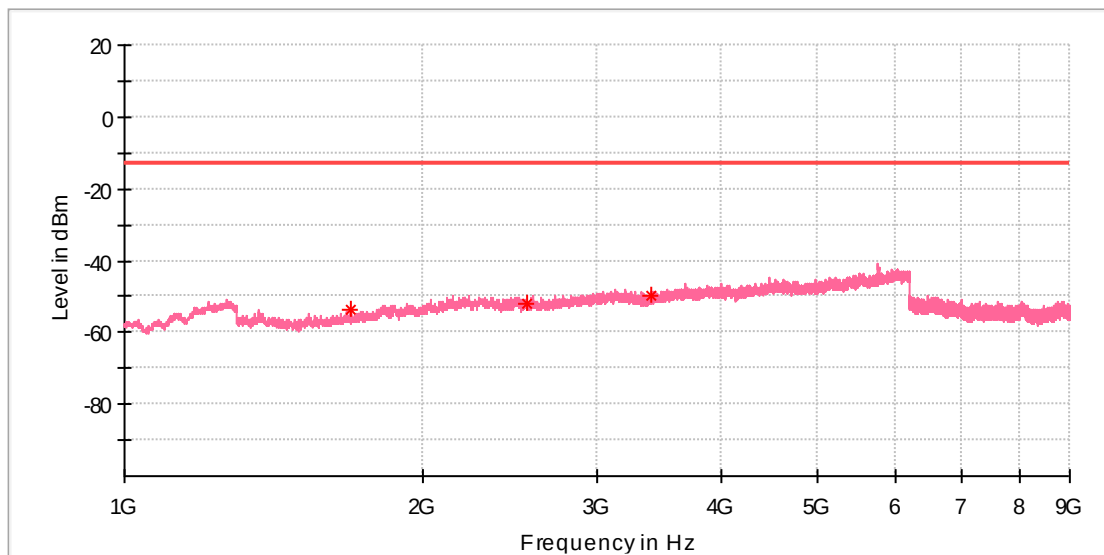


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1696.000000	-53.93	-13.00	40.93	100.0	V	64.0	-92.1
2544.000000	-51.87	-13.00	38.87	100.0	V	105.0	-88.4
3394.500000	-49.99	-13.00	36.99	100.0	V	105.0	-87.1

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 15kHz QPSK 12@0
Test Voltage::	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

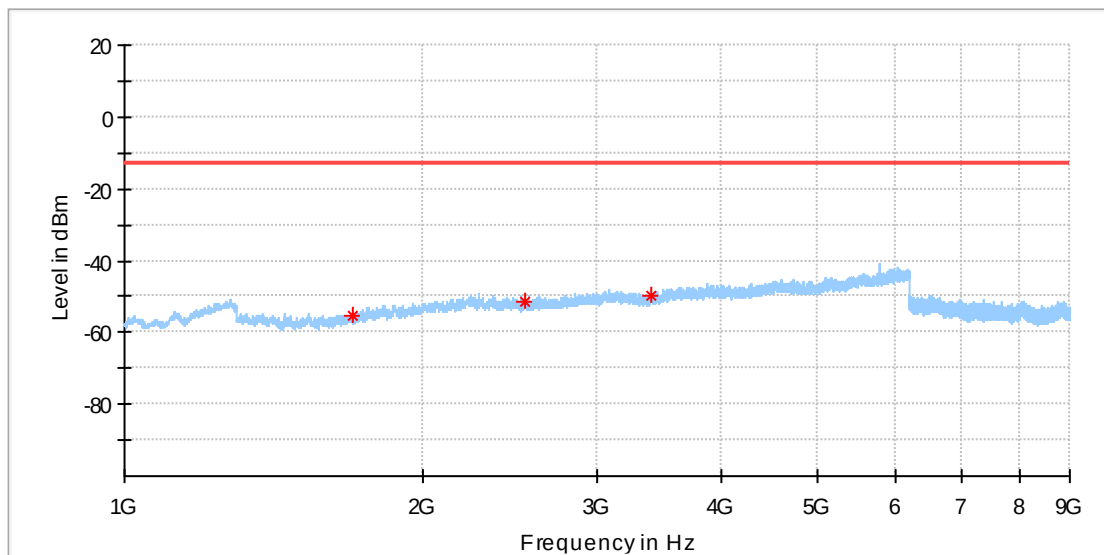


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1702.000000	-55.47	-13.00	42.47	100.0	H	78.0	-92.3
2542.500000	-51.66	-13.00	38.66	100.0	H	43.0	-88.3
3394.500000	-49.52	-13.00	36.52	100.0	H	335.0	-87.2

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-VV
Test Mode:	TX High 15kHz QPSK 12@0
Test Voltage::	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

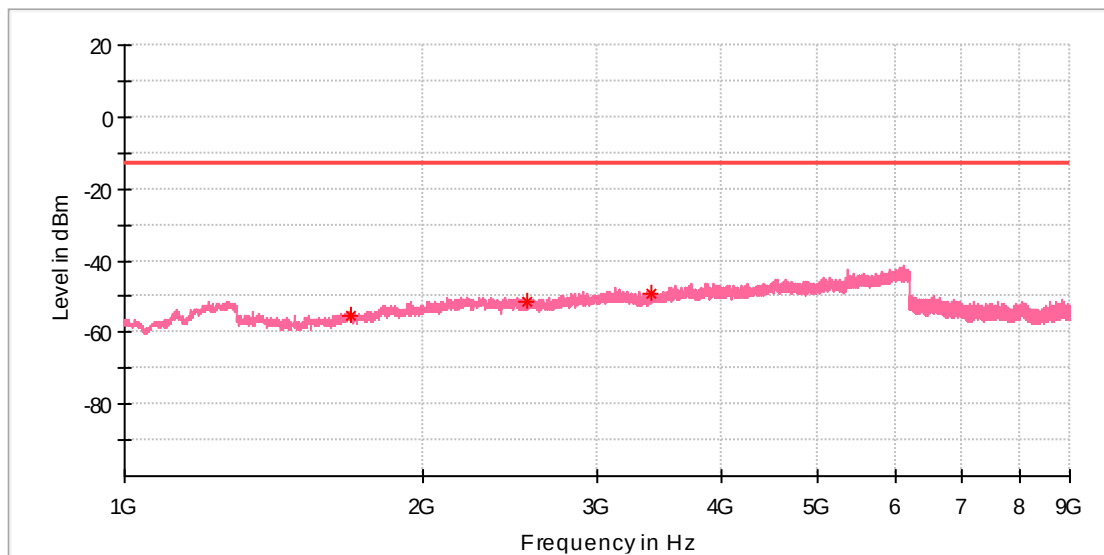

Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1696.000000	-55.31	-13.00	42.31	100.0	V	356.0	-92.1
2551.000000	-51.52	-13.00	38.52	100.0	V	275.0	-88.3
3397.500000	-49.48	-13.00	36.48	100.0	V	351.0	-87.1


Appendix L.9: Field Strength of Spurious Radiation for Band 66

Below 1 GHz
 BPSK

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX 15kHz BPSK 1@0
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

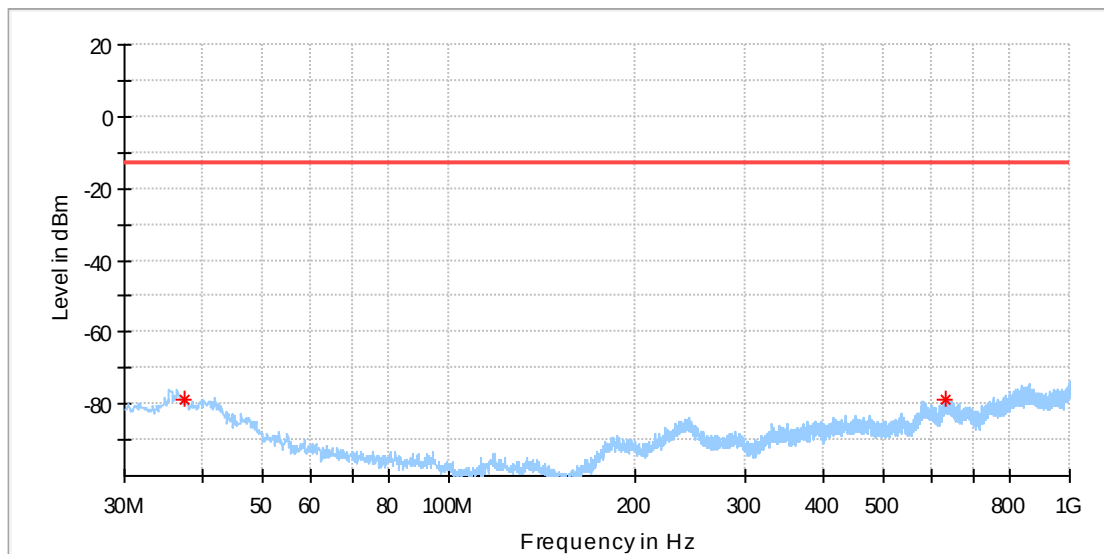


Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
37.517500	-78.72	-13.00	65.72	100.0	H	52.0	-113.7
631.036250	-79.04	-13.00	66.04	100.0	H	332.0	-105.0

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX 15kHz BPSK 1@0
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

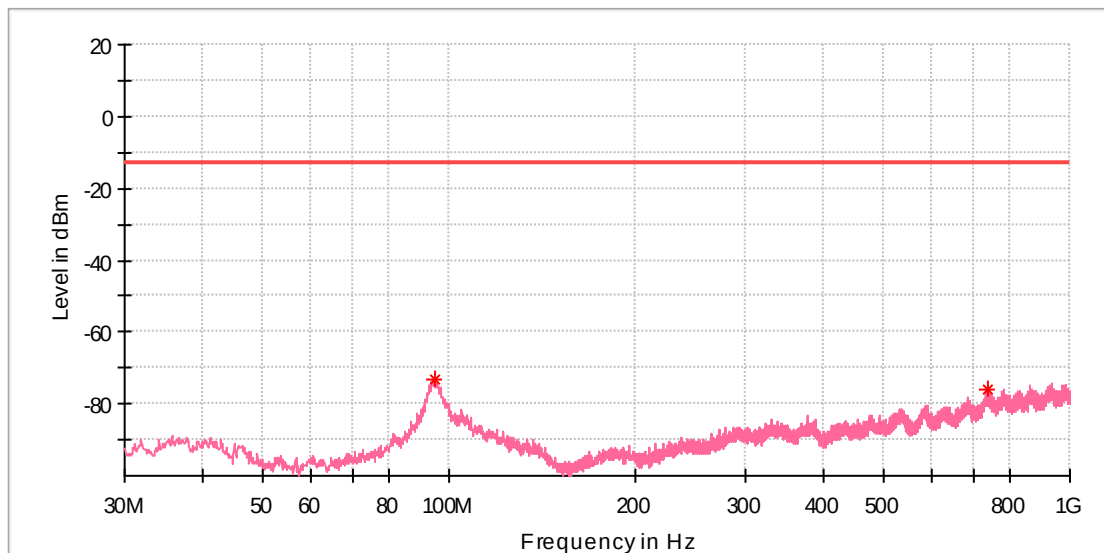

Critical Freqs


Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
95.111250	-72.98	-13.00	59.98	100.0	V	291.0	-99.6
737.251250	-76.10	-13.00	63.10	100.0	V	93.0	-102.2

QPSK

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX 15kHz BPSK 1@0
Test Voltage:	DC 3.8V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

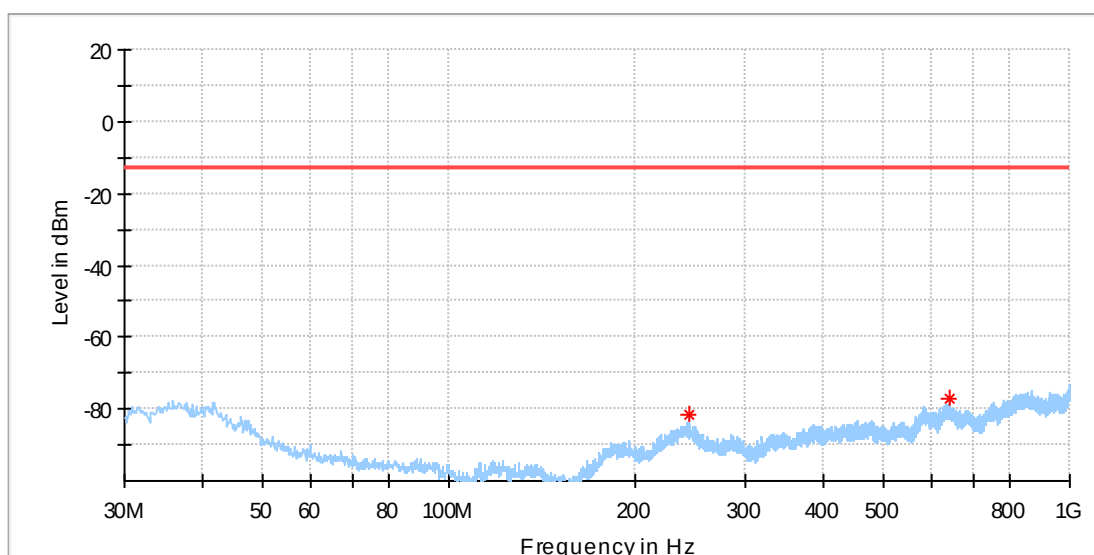


Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
243.036250	-81.71	-13.00	68.71	100.0	H	130.0	-110.0
641.463750	-77.00	-13.00	64.00	100.0	H	170.0	-104.6

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX 15kHz QPSK 1@0
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

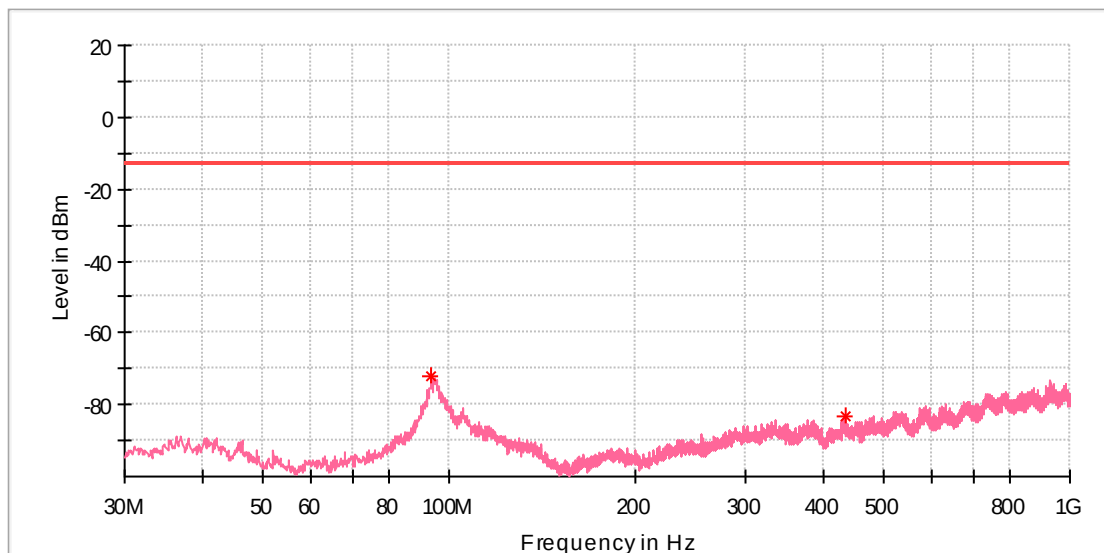

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
93.656250	-72.10	-13.00	59.10	100.0	V	0.0	-100.6
433.641250	-83.18	-13.00	70.18	100.0	V	36.0	-110.9


Frequency (MHz)	MaxPeak (dBm)	RMS (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
93.5000	93.5000	93.5000	93.5000	93.5000	93.5000		93.5000	93.5000

15 kHz

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Low 15kHz BPSK 1@0
Test Voltage::	DC 5V From Adapter
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

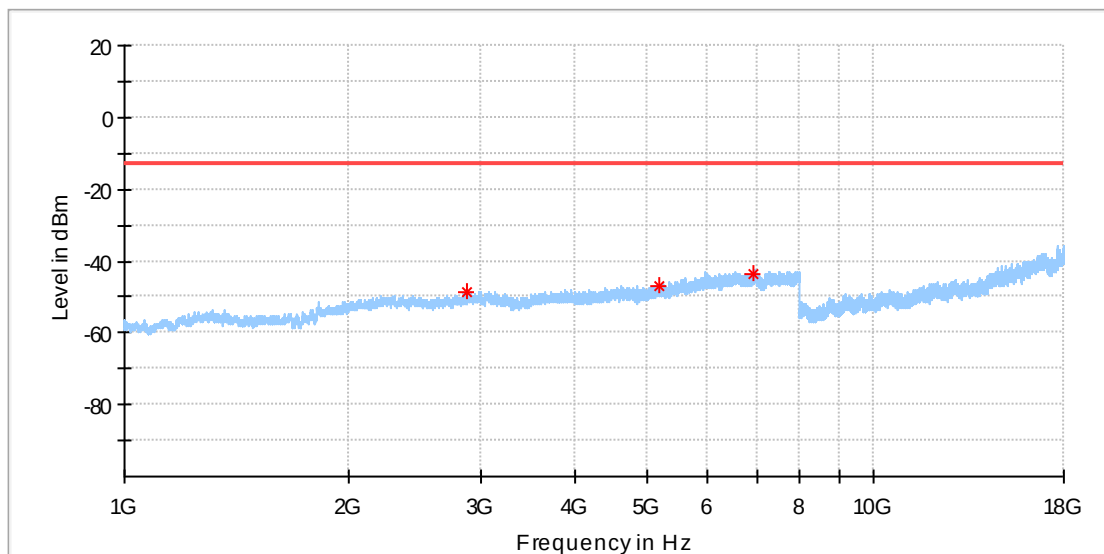


Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2874.500000	-48.60	-13.00	35.60	100.0	H	145.0	-86.8
5186.500000	-47.10	-13.00	34.10	100.0	H	78.0	-84.8
6911.000000	-43.73	-13.00	30.73	100.0	H	127.0	-81.1

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Low 15kHz BPSK 1@0
Test Voltage::	DC 5V From Adapter
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

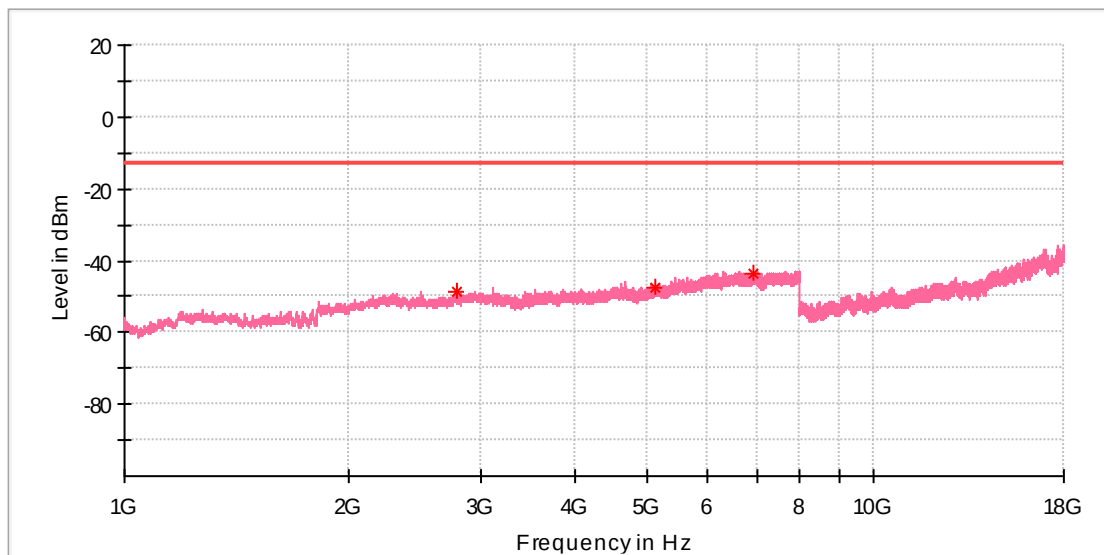


Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2776.500000	-48.61	-13.00	35.61	100.0	V	0.0	-87.3
5117.500000	-47.38	-13.00	34.38	100.0	V	73.0	-85.0
6914.000000	-43.60	-13.00	30.60	100.0	V	178.0	-81.3

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Low 15kHz BPSK 1@11
Test Voltage::	DC 5V From Adapter
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

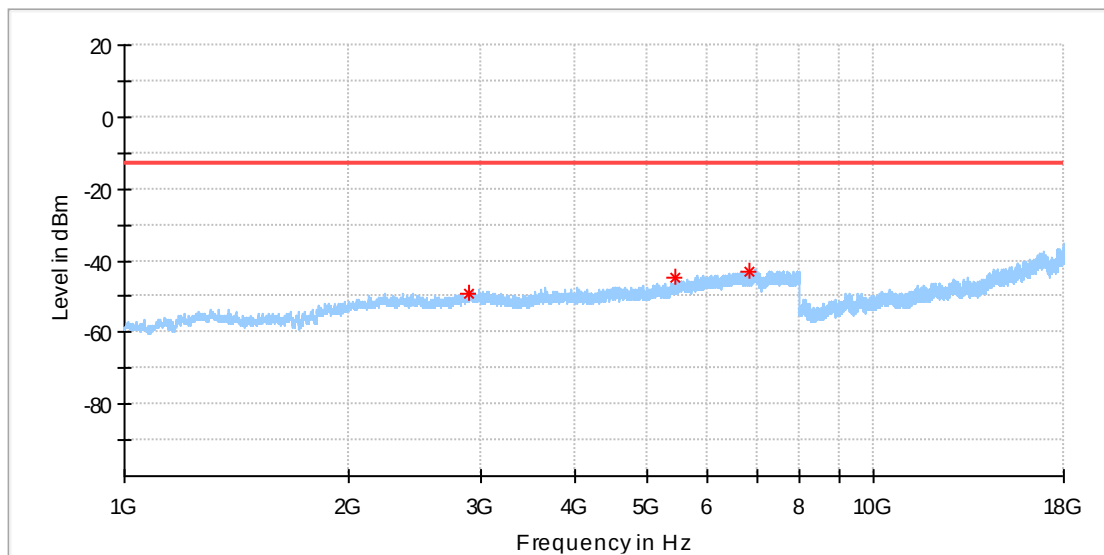


Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2885.000000	-48.99	-13.00	35.99	100.0	H	68.0	-86.8
5430.000000	-44.58	-13.00	31.58	100.0	H	309.0	-83.8
6842.000000	-43.01	-13.00	30.01	100.0	H	163.0	-81.4

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Low 15kHz BPSK 1@11
Test Voltage::	DC 5V From Adapter
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

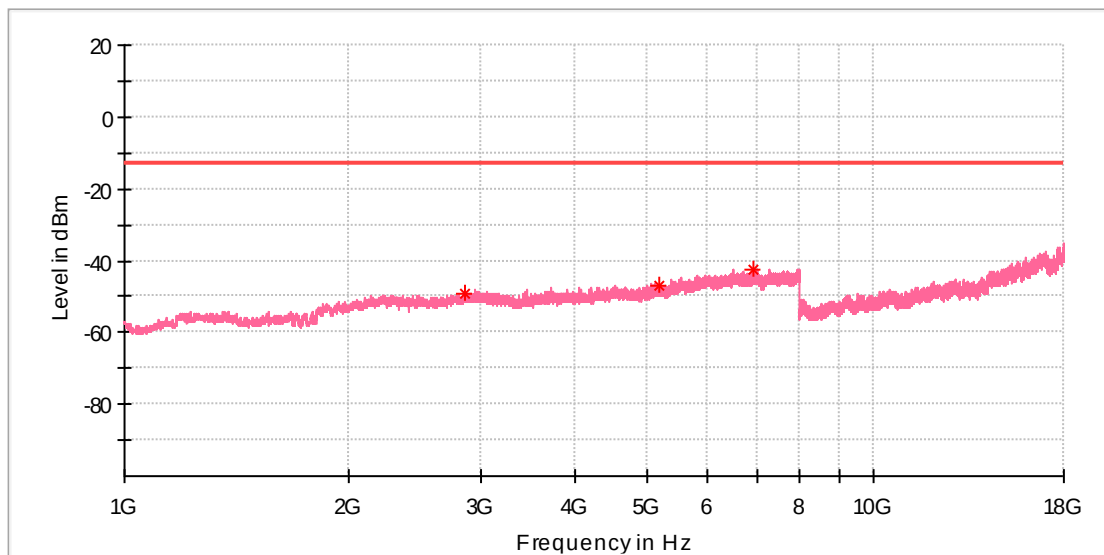


Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2854.000000	-49.36	-13.00	36.36	100.0	V	341.0	-87.1
5183.000000	-47.01	-13.00	34.01	100.0	V	23.0	-84.7
6937.500000	-42.67	-13.00	29.67	100.0	V	218.0	-81.1

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Low 15kHz QPSK 12@0
Test Voltage::	DC 5V From Adapter
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

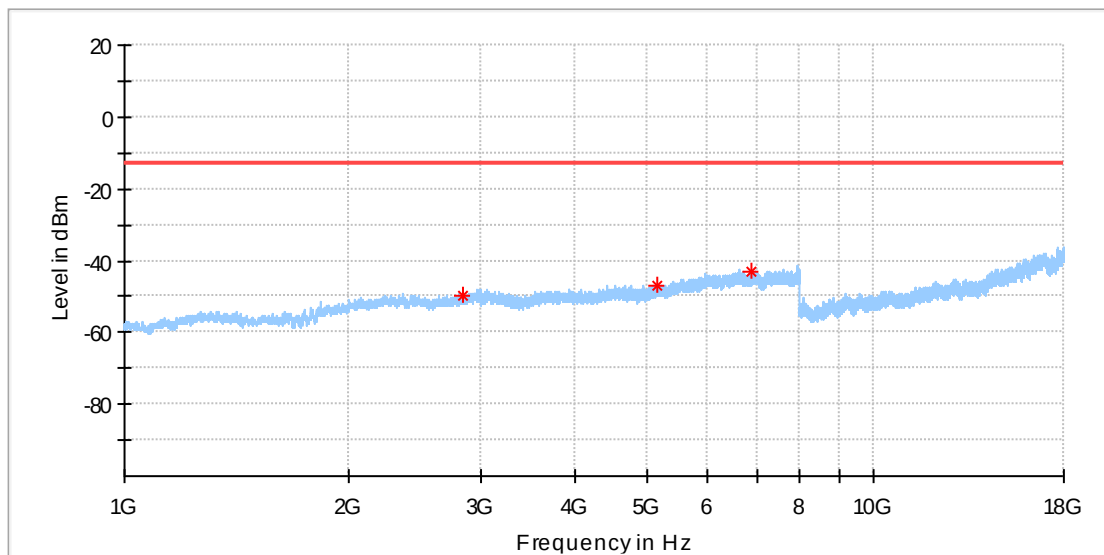


Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2832.000000	-49.50	-13.00	36.50	100.0	H	251.0	-87.6
5142.000000	-46.85	-13.00	33.85	100.0	H	208.0	-84.7
6871.500000	-42.83	-13.00	29.83	100.0	H	194.0	-81.3

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Low 15kHz QPSK 12@0
Test Voltage:	DC 5V From Adapter
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

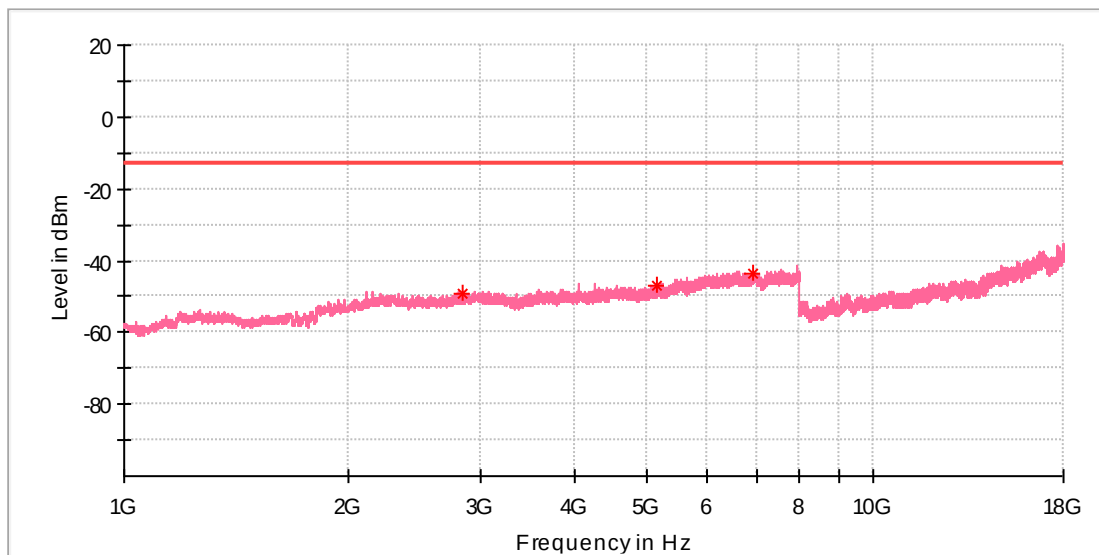

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2834.500000	-48.96	-13.00	35.96	100.0	V	161.0	-87.4
5159.000000	-46.90	-13.00	33.90	100.0	V	130.0	-84.6
6943.500000	-43.36	-13.00	30.36	100.0	V	255.0	-81.1

Frequency (MHz)	MaxPeak (dBm)	RMS (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
93.5000	93.5000	93.5000	93.5000	93.5000	93.5000		93.5000	93.5000


Frequency (MHz)	MaxPeak (dBm)	RMS (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
100.0000	-100.0000	-100.0000	-100.0000	-100.0000	-100.0000		-100.0000	-100.0000

15 kHz

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Mid 15kHz BPSK 1@0
Test Voltage::	DC 5V From Adapter
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

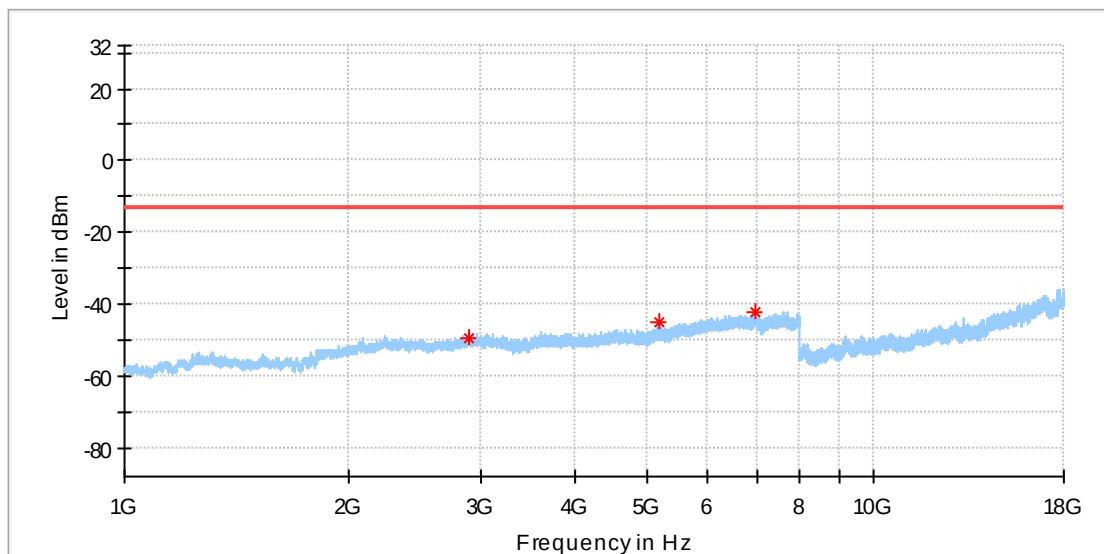


Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2894.500000	-49.48	-13.00	36.48	100.0	H	356.0	-86.9
5187.500000	-45.12	-13.00	32.12	100.0	H	102.0	-84.8
6953.500000	-42.50	-13.00	29.50	100.0	H	255.0	-80.8

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Mid 15kHz BPSK 1@0
Test Voltage::	DC 5V From Adapter
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

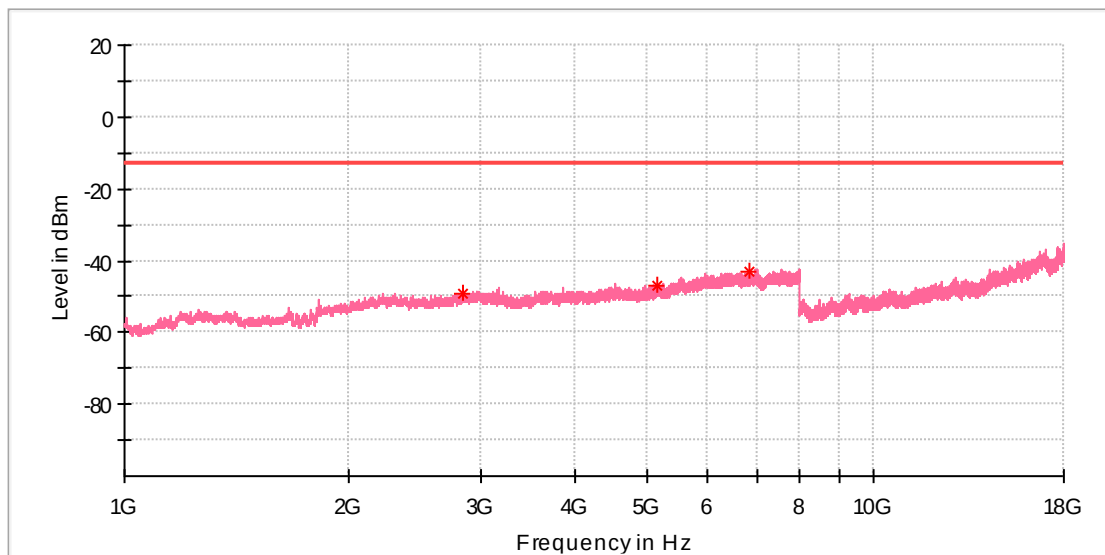


Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2833.500000	-49.26	-13.00	36.26	100.0	V	124.0	-87.4
5163.500000	-46.83	-13.00	33.83	100.0	V	294.0	-84.6
6824.000000	-43.07	-13.00	30.07	100.0	V	182.0	-81.4

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Mid 15kHz BPSK 1@11
Test Voltage::	DC 5V From Adapter
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

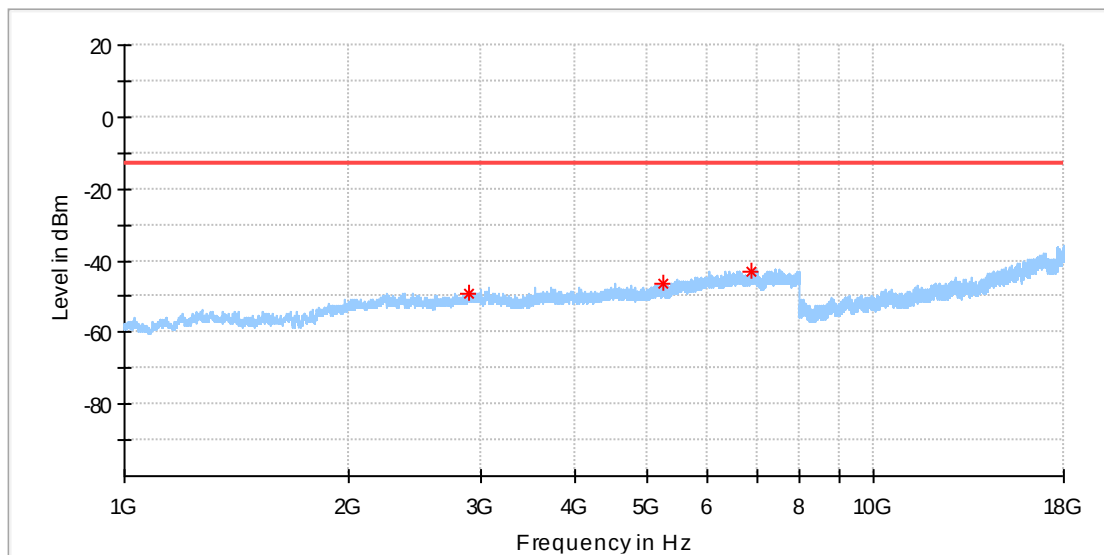


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2885.500000	-49.19	-13.00	36.19	100.0	H	282.0	-86.8
5253.000000	-46.68	-13.00	33.68	100.0	H	137.0	-85.0
6887.000000	-43.00	-13.00	30.00	100.0	H	67.0	-81.2

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Mid 15kHz BPSK 1@11
Test Voltage::	DC 5V From Adapter
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

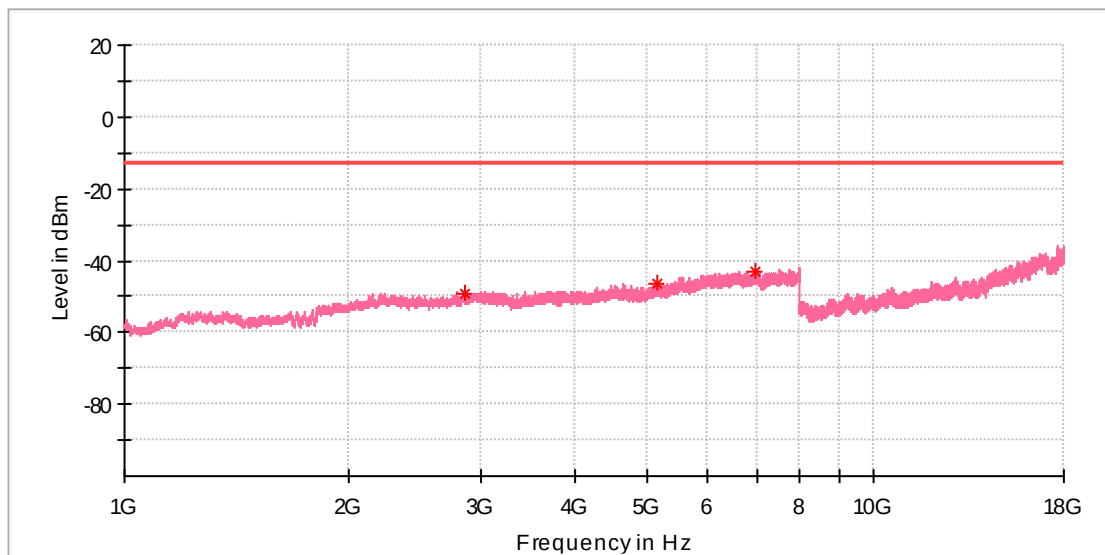


Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2843.000000	-48.97	-13.00	35.97	100.0	V	78.0	-87.4
5146.000000	-46.18	-13.00	33.18	100.0	V	269.0	-84.7
6987.500000	-43.29	-13.00	30.29	100.0	V	3.0	-80.8

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Mid 15kHz QPSK 12@0
Test Voltage::	DC 5V From Adapter
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

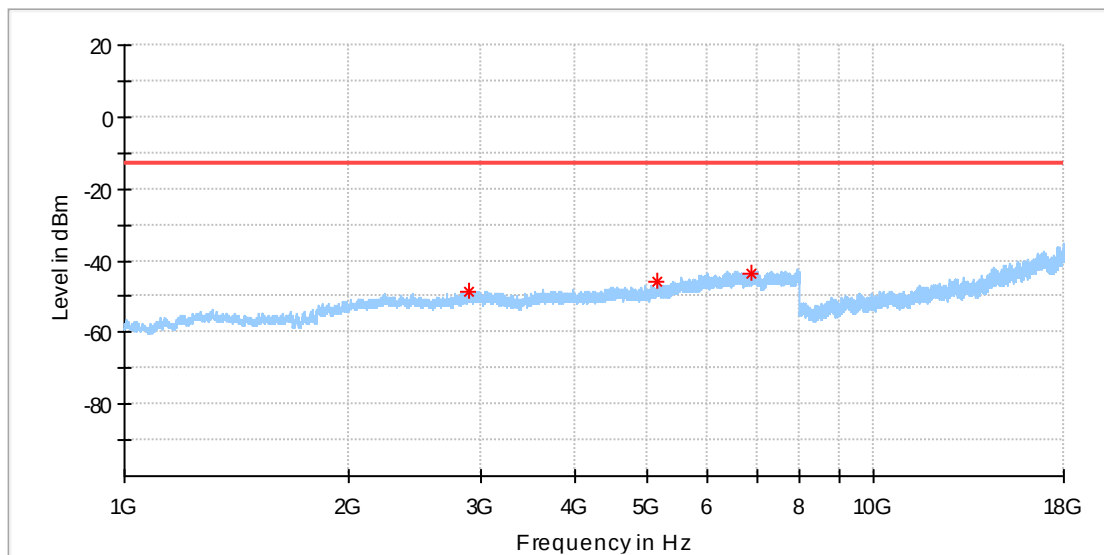


Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2879.000000	-48.63	-13.00	35.63	100.0	H	152.0	-86.8
5161.500000	-45.94	-13.00	32.94	100.0	H	97.0	-84.6
6901.000000	-43.53	-13.00	30.53	100.0	H	350.0	-81.1

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Mid 15kHz QPSK 12@0
Test Voltage::	DC 5V From Adapter
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

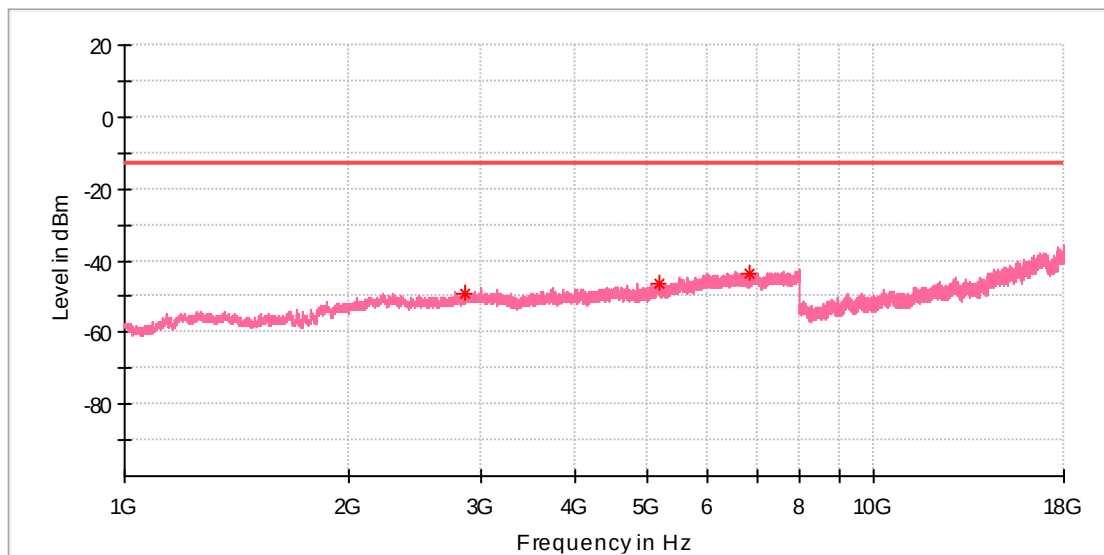

Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2845.500000	-49.26	-13.00	36.26	100.0	V	316.0	-87.3
5169.000000	-46.54	-13.00	33.54	100.0	V	0.0	-84.6
6861.000000	-43.56	-13.00	30.56	100.0	V	151.0	-81.4

Frequency (MHz)	MaxPeak (dBm)	RMS (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
93.5000	93.5000	93.5000	93.5000	93.5000	93.5000		93.5000	93.5000


Frequency (MHz)	MaxPeak (dBm)	RMS (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
100.0000	-100.0000	-100.0000	-100.0000	-100.0000	-100.0000		-100.0000	-100.0000

15 kHz

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 15kHz BPSK 1@0
Test Voltage::	DC 5V From Adapter
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

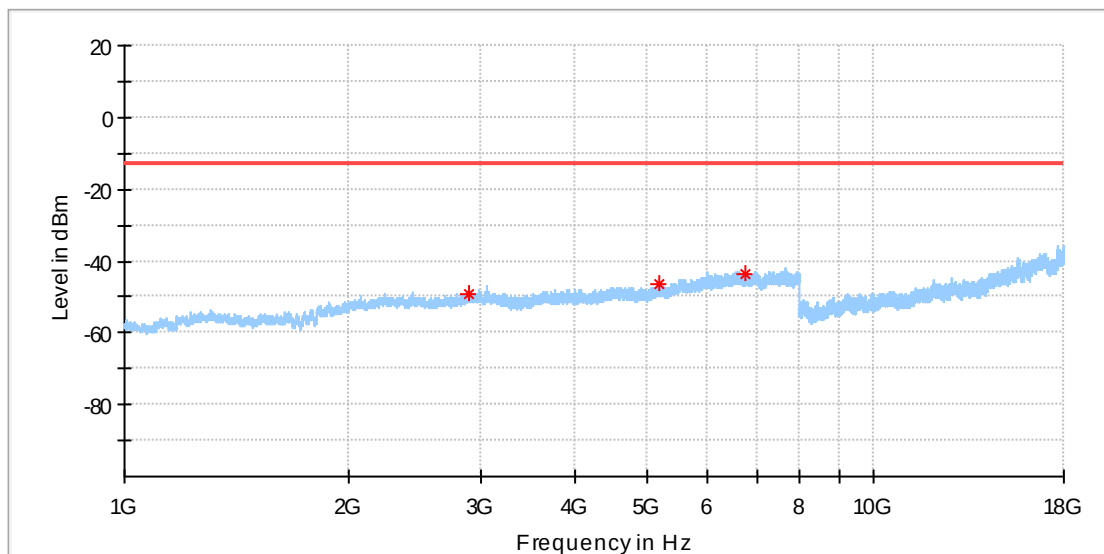


Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2879.000000	-49.07	-13.00	36.07	100.0	H	126.0	-86.8
5175.500000	-46.27	-13.00	33.27	100.0	H	4.0	-84.7
6766.500000	-43.57	-13.00	30.57	100.0	H	312.0	-81.6

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 15kHz BPSK 1@0
Test Voltage::	DC 5V From Adapter
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

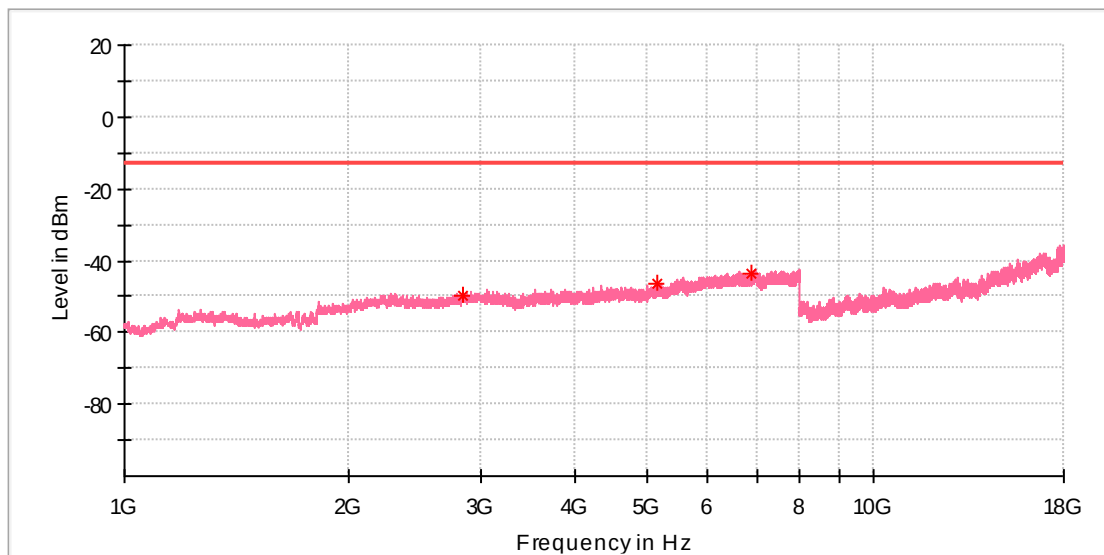


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2836.000000	-49.49	-13.00	36.49	100.0	V	88.0	-87.4
5144.500000	-46.68	-13.00	33.68	100.0	V	0.0	-84.8
6877.000000	-43.63	-13.00	30.63	100.0	V	92.0	-81.4

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 15kHz BPSK 1@11
Test Voltage::	DC 5V From Adapter
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

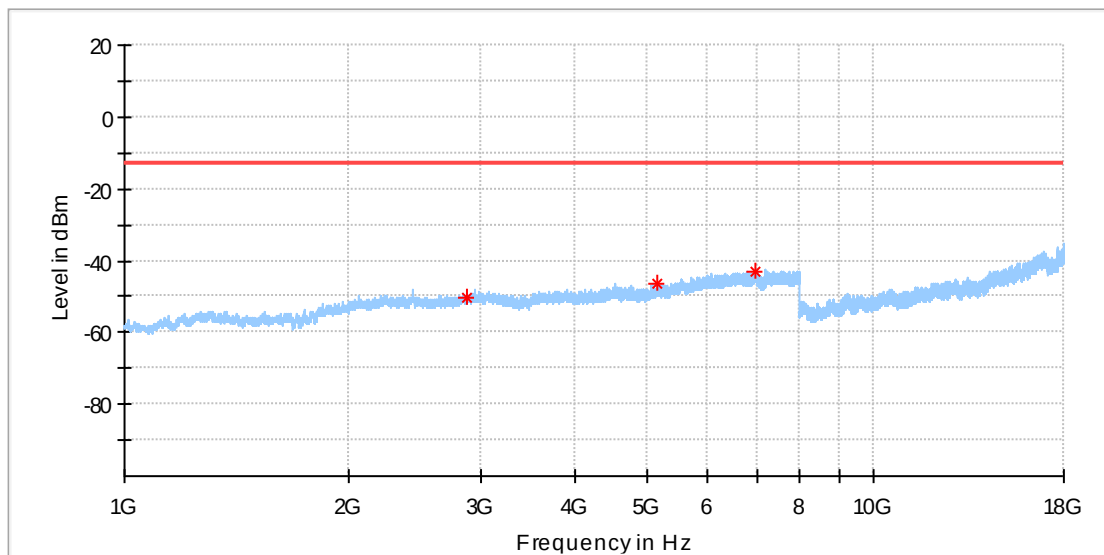


Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2869.500000	-50.33	-13.00	37.33	100.0	H	172.0	-86.8
5154.000000	-46.29	-13.00	33.29	100.0	H	302.0	-84.7
6953.500000	-43.01	-13.00	30.01	100.0	H	40.0	-80.8

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 15kHz BPSK 1@11
Test Voltage::	DC 5V From Adapter
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

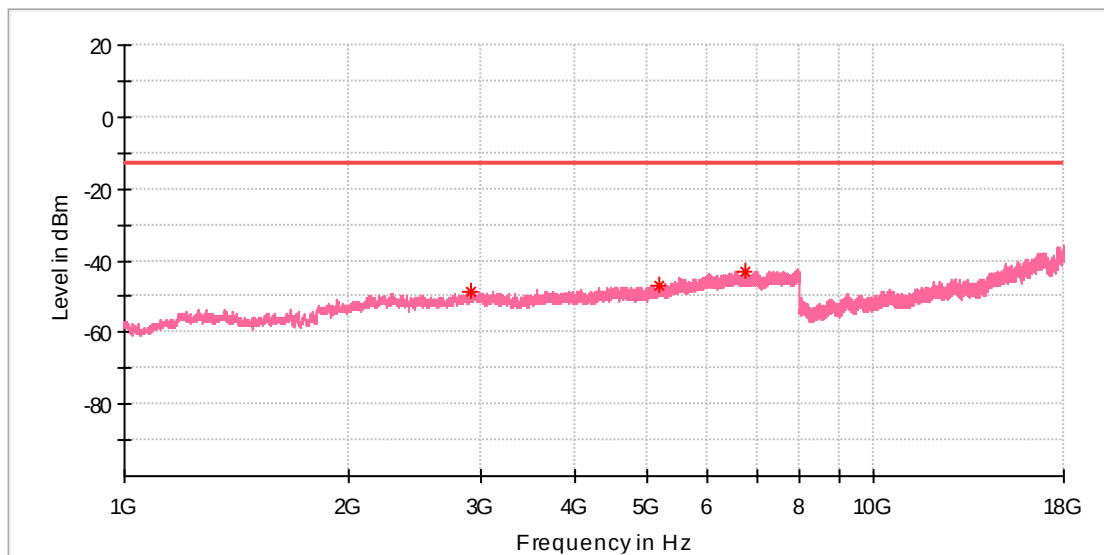


Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2898.000000	-48.92	-13.00	35.92	100.0	V	302.0	-87.2
5191.000000	-46.80	-13.00	33.80	100.0	V	0.0	-84.8
6772.000000	-43.06	-13.00	30.06	100.0	V	312.0	-81.6

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 15kHz QPSK 12@0
Test Voltage::	DC 5V From Adapter
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

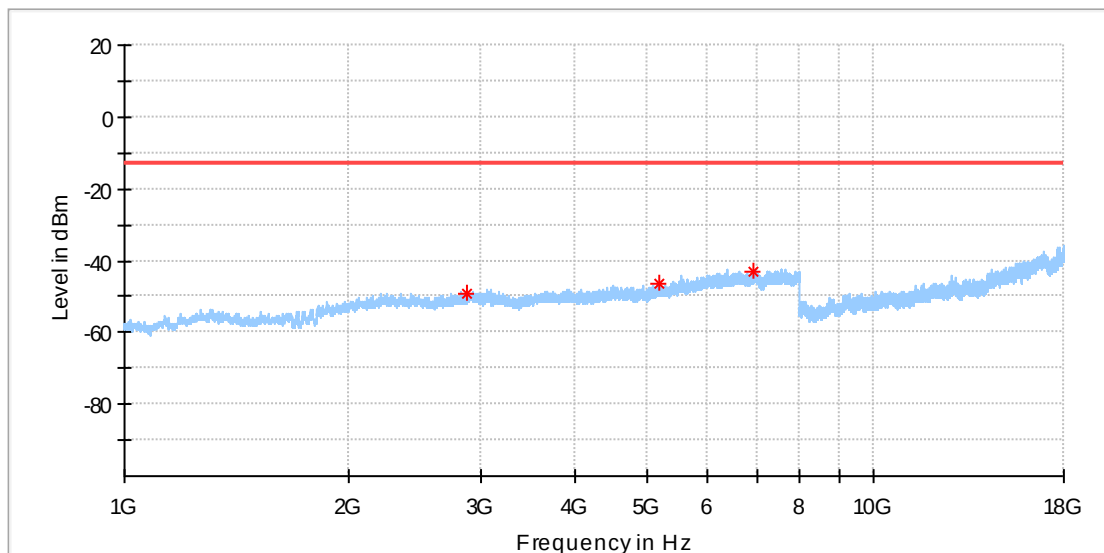


Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2860.500000	-49.10	-13.00	36.10	100.0	H	242.0	-87.1
5180.500000	-46.47	-13.00	33.47	100.0	H	191.0	-84.7
6935.500000	-42.92	-13.00	29.92	100.0	H	73.0	-80.9

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 15kHz QPSK 12@0
Test Voltage::	DC 5V From Adapter
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

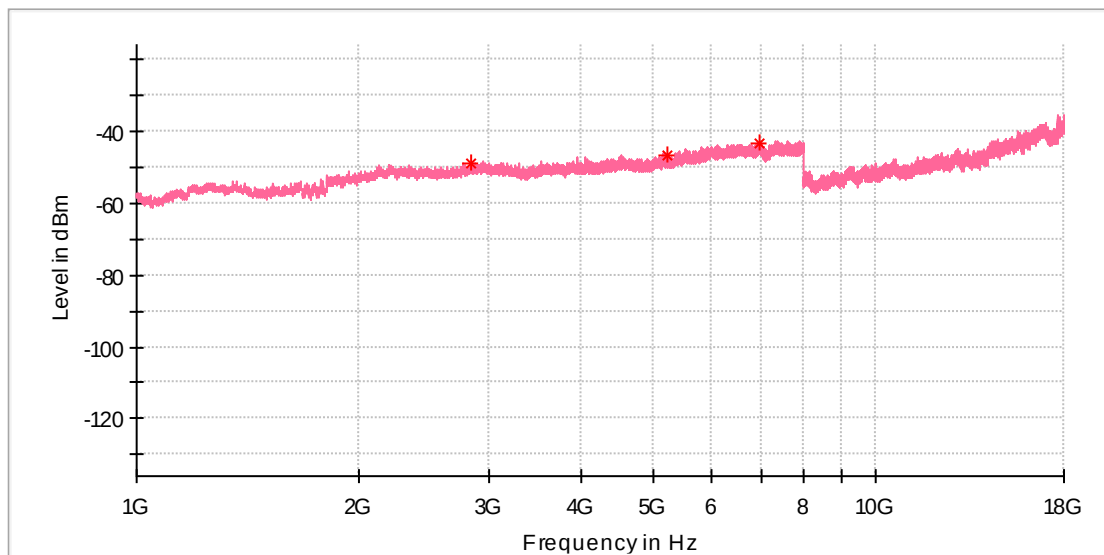

Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2832.500000	-49.09	-13.00	36.09	100.0	V	330.0	-87.4
5237.000000	-46.48	-13.00	33.48	100.0	V	126.0	-85.0
6989.000000	-43.09	-13.00	30.09	100.0	V	294.0	-80.8


Appendix L.10: Field Strength of Spurious Radiation for Band 71

Below 1 GHz
BPSK

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX 15kHz BPSK 1@0
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

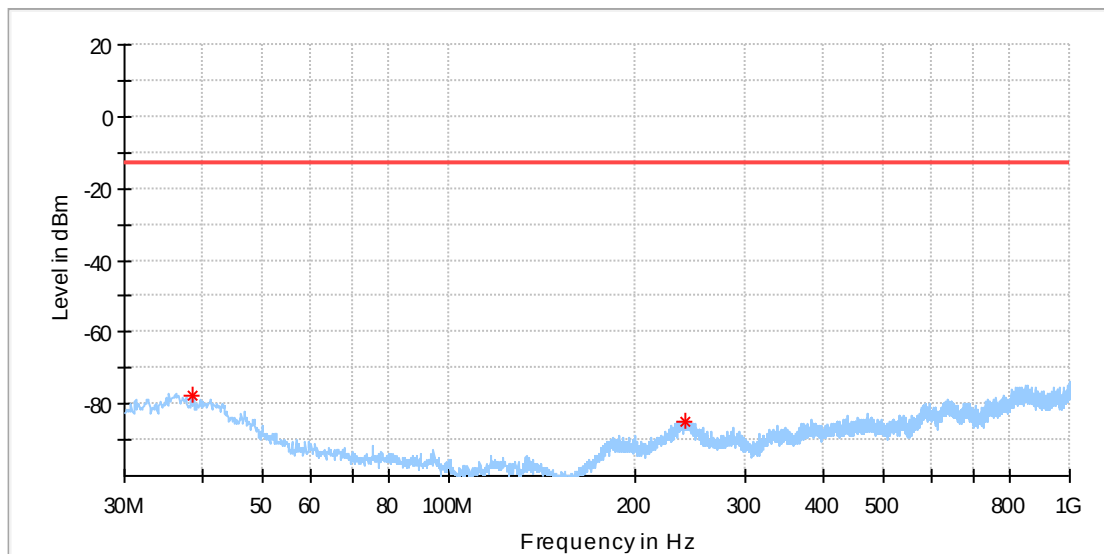


Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
38.730000	-77.47	-13.00	64.47	100.0	H	136.0	-114.3
240.853750	-84.75	-13.00	71.75	100.0	H	95.0	-110.3

Test Report

EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX 15kHz BPSK 1@0
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

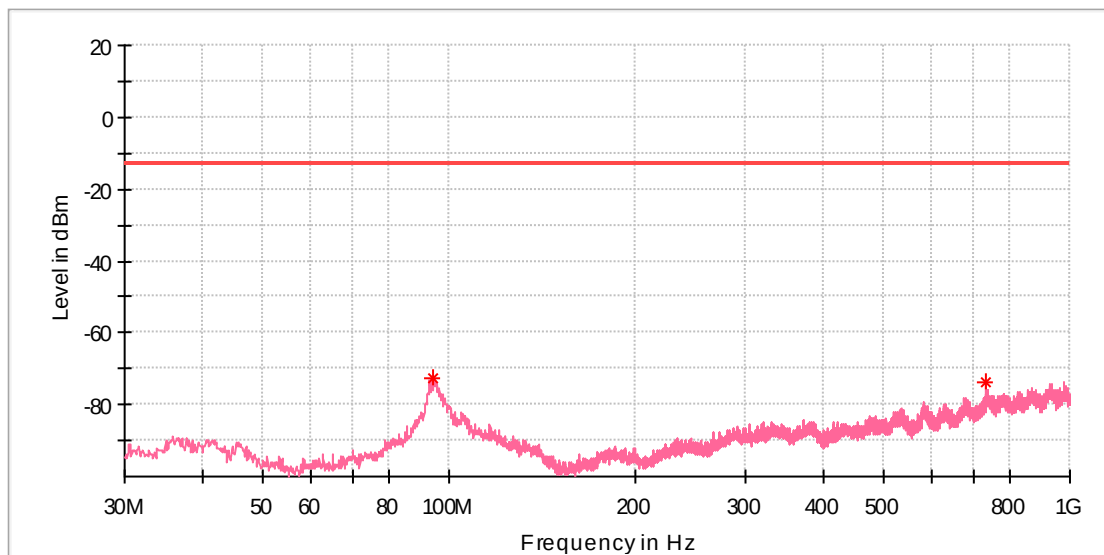

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
94.262500	-72.58	-13.00	59.58	100.0	V	193.0	-99.6
732.886250	-73.77	-13.00	60.77	100.0	V	346.0	-102.8