

VARIANT FCC TEST REPORT

(PART 24)



Applicant:	Telit Communications S.p.A.
Address:	Via Stazione di Prosecco 5/B - 34010 Sgonico (TS) - ITALY

Manufacturer or Supplier:	Telit Communications S.p.A.
Address:	Via Stazione di Prosecco 5/B - 34010 Sgonico (TS) - ITALY
Product:	ME310M1-W4
Brand Name:	Telit Cinterion
Model Name:	ME310M1-W4
FCC ID	RI7ME310M1WX
Date of tests	Jul. 23, 2026 ~ Aug. 13, 2026

The tests have been carried out according to the requirements of the following standard:

- ☒ **FCC PART 24, Subpart E**
- ☒ **FCC PART 2**
- ☒ **ANSI C63.26-2015**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Carl Xie Engineer / Mobile Department	Approved by Simon Wang Manager / Mobile Department
	
Date: Aug. 13, 2026	Date: Aug. 13, 2026

Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 SUMMARY OF TEST RESULTS.....	4
1.1 MEASUREMENT UNCERTAINTY	5
1.2 TEST SITE AND INSTRUMENTS.....	6
2 GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT.....	8
2.2 CONFIGURATION OF SYSTEM UNDER TEST	11
2.3 DESCRIPTION OF SUPPORT UNITS	12
2.4 TEST ITEM AND TEST CONFIGURATION	12
2.5 EUT OPERATING CONDITIONS.....	13
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	13
3 TEST TYPES AND RESULTS.....	14
3.1 RADIATED EMISSION MEASUREMENT	14
3.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
3.1.2 TEST PROCEDURES	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	15
3.1.5 TEST RESULTS	17
4 PHOTOGRAPHS OF THE TEST CONFIGURATION	21
5 INFORMATION ON THE TESTING LABORATORIES	22
6 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	23
7 APPENDIX: ORIGINAL REPORT	24



Test Report No.: RF260812B002

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-240204W001RF02	Original release	Apr. 26, 2024
PSU-NQN2508270215-1RF02	Based on the original product , the new product adds GPS and WiFi capabilities. The new sample verify NB-IoT Band25 HIGH RSE worse case.Other test data please refer to original report.	Sep. 05, 2025
RF260812B002	Based on the report PSU-NQN2508270215-1RF02(model: ME310M1-W1, FCC ID: RI7ME310M1WX), the differences between model ME310M1-W1 and ME310M1-W4: different chips and ME310M1-W4 GNSS is not supported, for more details please refer to The Hardware Differences Letter provided by the manufacturer. This report verify power and RSE worst case (NB-IoT B25_CH26688).	Aug. 13, 2026

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	Test lab*
§2.1053 §24.238(a)(b)	Radiated Spurious Emissions	Compliance	A

* Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.

NOTE: Based on the report PSU-NQN2508270215-1RF02(model: ME310M1-W1, FCC ID: RI7ME310M1WX), the differences between model ME310M1-W1 and ME310M1-W4: different chips and ME310M1-W4 GNSS is not supported, for more details please refer to The Hardware Differences Letter provided by the manufacturer. This report verify power and RSE worst case. The verify results of conducted power are similar or lower. So this report only update RSE worst case (NB-IoT B25_CH26688), for other data please refer to report PSU-NQN2508270215-1RF02.

*Test Lab Information Reference

Lab A:

BOOMWAVE TEST (SHENZHEN) CO., LTD.

Lab Address:

Room B38, Warehouse A5(Chiwan No.1), No.3 Chiwan 4th Road, Chiwan Community, Zhaoshang Street, Nanshan District, Shenzhen, Guangdong, P.R. CHINA

Accredited Test Lab Cert 7607.01


The FCC Site Registration No. is 646781; The Designation No. is CN1429.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions (9KHz~30MHz)	$\pm 2.68\text{dB}$
Radiated emissions & Radiated Power (30MHz~1GHz)	$\pm 4.98\text{dB}$
Radiated emissions & Radiated Power (1GHz ~6GHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GHz ~18GHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GHz ~40GHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Band Edge Measurements	$\pm 4.70\text{dB}$
Peak to average ratio	$\pm 0.76\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

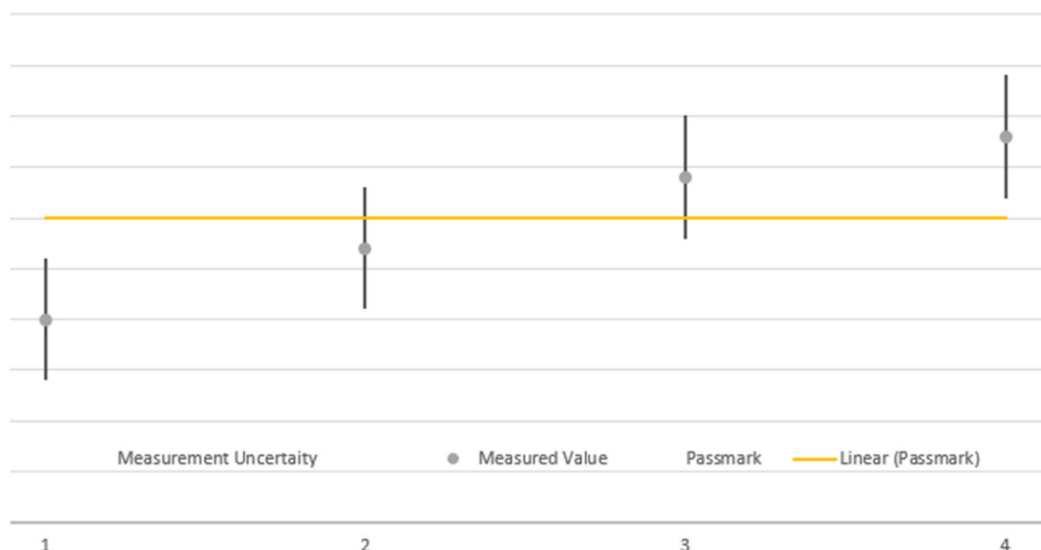

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.

1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	2025/7/3	2027/7/2
BiConiLog Antenna	ETS-LINDGREN	3143B	161965	2025/7/17	2027/7/16
Horn Antenna	SCHWARZBECK	BBHA9120D	3297	2025/9/27	2027/9/26
Horn Antenna	STEATITE	QWH-SL-18-40-K-SG QMS-00361	15433	2025/7/19	2027/7/18
Preamplifier	Tonscend	TPA184045	AP24L8060388	2025/7/3	2027/7/2
MXE EMI Receiver	keysight	N9038B	MY50018017	2025/7/1	2027/6/30
MXG Vector Signal Generator	Keysight	N5183B	MY59100137	2025/6/30	2027/6/29
Preamplifier	Tonscend	TPA001330	806JSAPO40804251015	2025/6/30	2027/6/29
Preamplifier	Tonscend	TPA011845	AP24L8060392	2025/6/30	2027/6/29
Attenuator 6DB	SHX	TS2-6-6-A	230927166	2025/6/30	2027/6/29
Attenuator 6DB	SHX	TS2-6-6-A	230927165	2025/6/30	2027/6/29
Active Receive Loop Antenna	SCHWARZBECK	FMZB 1519 B	00173	2025/6/30	2027/6/29
Temp. & Humi. Recorder	Kejian	HTC-01	157246	2025/7/2	2027/7/1
HIGH pass FILTER_1-18	EWT	EWT-57-0222	EWT-57-0222	2025/6/30	2027/6/29
HIGH pass FILTER_7-18	EWT	EWT-57-0223	EWT-57-0223	2025/6/30	2027/6/29
HIGH pass FILTER_3-18	EWT	EWT-57-0221	EWT-57-0221	2025/6/30	2027/6/29
DC~1GHz Lowpass Filter	EWT	EWT-56-0649	EWT-56-0649	2025/7/3	2027/7/2
Cable 1	N/A	N/A	N/A	2025/9/28	2027/9/27
Cable 2	N/A	N/A	N/A	2025/9/28	2027/9/27
Cable 3	N/A	N/A	N/A	2025/9/28	2027/9/27
Wireless communication integrated tester	Rohde&Schwarz	CMW500	182016	2025/6/30	2027/6/29
EXA Signal Analyzer	KEYSIGHT	N9010B	MY62170156	2025/6/30	2027/6/29
RF Control Unit	Tonscend	JS0806-1	21K8060504	2025/6/16	2027/6/15
DC Power Supply	AGILENT	HMP2020	100598	2025/7/1	2027/6/30
10dB attenuator	JFW INDUSTRIES INC	50HF-010-SMA	50HF-010-SMA-1	2025/6/30	2027/6/29
10dB attenuator	JFW INDUSTRIES INC	50HF-010-SMA	50HF-010-SMA-2	2025/6/30	2027/6/29
hygrothermograph	Anymeters	----	TH101B	2025/7/22	2027/7/21
Temperature Box	zhongkemeiqi	MA22040172	MQ-DTH50F-2	2025/7/1	2027/6/30
power divider	WOKEN	71688	204-003180-01	2025/6/30	2027/6/29



Test Report No.: RF260812B002

NOTE:

1. The calibration interval of the above test instruments is 24 months and the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 646781; The Designation No. is CN1429.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	ME310M1-W4	
BRAND NAME	Telit Cinterion	
MODEL NAME	ME310M1-W4	
NOMINAL VOLTAGE	EUT 3.8Vdc	
MODULATION TYPE	CAT-M	QPSK/16QAM
	NB-IoT	BPSK/QPSK
FREQUENCY RANGE CAT-M	LTE Band 2 Channel Bandwidth: 1.4MHz	1850.7MHz ~ 1909.3MHz
	LTE Band 2 Channel Bandwidth: 3MHz	1851.5MHz ~ 1908.5MHz
	LTE Band 2 Channel Bandwidth: 5MHz	1852.5MHz ~ 1907.5MHz
	LTE Band 2 Channel Bandwidth: 10MHz	1855.0MHz ~ 1905.0MHz
	LTE Band 2 Channel Bandwidth: 15MHz	1857.5MHz ~ 1902.5MHz
	LTE Band 2 Channel Bandwidth: 20MHz	1860.0MHz ~ 1900.0MHz
	LTE Band 25 Channel Bandwidth: 1.4MHz	1850.7MHz ~ 1914.3MHz
	LTE Band 25 Channel Bandwidth: 3MHz	1851.5MHz ~ 1913.5MHz
	LTE Band 25 Channel Bandwidth: 5MHz	1852.5MHz ~ 1912.5MHz
	LTE Band 25 Channel Bandwidth: 10MHz	1855.0MHz ~ 1910.0MHz
	LTE Band 25 Channel Bandwidth: 15MHz	1857.5MHz ~ 1907.5MHz
	LTE Band 25 Channel Bandwidth: 20MHz	1860.0MHz ~ 1905.0MHz
FREQUENCY RANGE NB-IOT	LTE Band 2 (Sub-carrier Speacing: 3.75/15KHz)	1850.2MHz ~ 1909.8MHz
	LTE Band 25 (Sub-carrier Speacing: 3.75/15KHz)	1850.2MHz ~ 1914.8MHz

Test Report No.: RF260812B002

MAX. ERP POWER CAT-M	LTE Band 2 Channel Bandwidth: 1.4MHz	335.74mW
	LTE Band 2 Channel Bandwidth: 3MHz	336.51mW
	LTE Band 2 Channel Bandwidth: 5MHz	334.97mW
	LTE Band 2 Channel Bandwidth: 10MHz	337.29mW
	LTE Band 2 Channel Bandwidth: 15MHz	336.51mW
	LTE Band 2 Channel Bandwidth: 20MHz	339.63mW
	LTE Band 25 Channel Bandwidth: 1.4MHz	338.06mW
	LTE Band 25 Channel Bandwidth: 3MHz	336.51mW
	LTE Band 25 Channel Bandwidth: 5MHz	333.43mW
	LTE Band 25 Channel Bandwidth: 10MHz	336.51mW
	LTE Band 25 Channel Bandwidth: 15MHz	334.97mW
	LTE Band 25 Channel Bandwidth: 20MHz	338.06mW
MAX. ERP POWER NB-IOT	LTE Band 2 (Sub-carrier Speacing: 3.75KHz)	328.1mW
	LTE Band 2 (Sub-carrier Speacing: 15KHz)	325.84mW
	LTE Band 25 (Sub-carrier Speacing: 3.75KHz)	322.11mW
	LTE Band 25 (Sub-carrier Speacing: 15KHz)	325.84mW
EMISSION DESIGNATOR GGN CAT-M	LTE Band 25 Channel Bandwidth: 1.4MHz	QPSK: 1M09G7D
		16QAM: 1M08W7D
	LTE Band 25 Channel Bandwidth: 3MHz	QPSK: 1M08G7D
		16QAM: 1M08W7D
	LTE Band 25 Channel Bandwidth: 5MHz	QPSK: 1M09G7D
		16QAM: 1M08W7D
	LTE Band 25 Channel Bandwidth: 10MHz	QPSK: 1M08G7D
		16QAM: 1M08W7D
	LTE Band 25 Channel Bandwidth: 15MHz	QPSK: 1M09G7D
		16QAM: 1M08W7D

Test Report No.: RF260812B002

EMISSION DESIGNATOR GOGN NB-IOT	LTE Band 25 Channel Bandwidth: 20MHz	QPSK: 1M09G7D
		16QAM: 1M09W7D
	LTE Band 25 (Sub-carrier Spacing: 3.75KHz)	BPSK: 44K5G7D
		QPSK: 49K2G7D
	LTE Band 25 (Sub-carrier Spacing: 15KHz)	BPSK: 122KG7D
		QPSK: 191KG7D
ANTENNA GAIN	☒ Provided by client	
	LTE B2	2.14dBi
	LTE B25	2.14dBi
ANTENNA TYPE	1/4 1 Antenna	
HW VERSION	0.0	
SW VERSION	M0U.400004	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	N/A	
EXTREME TEMPERATURE	-40-85 °C	
EXTREME VOLTAGE	2.5V - 4.5V	

NOTE:





- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
LTE	1TX/1RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

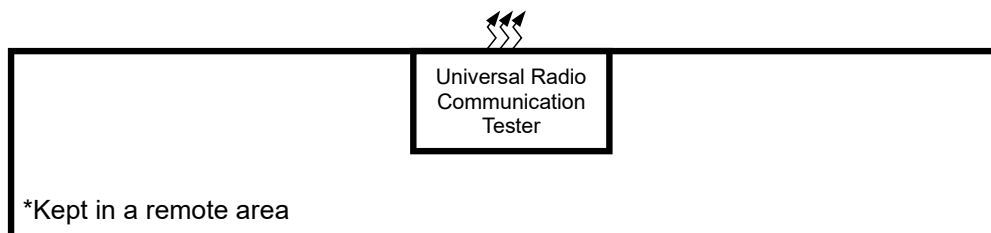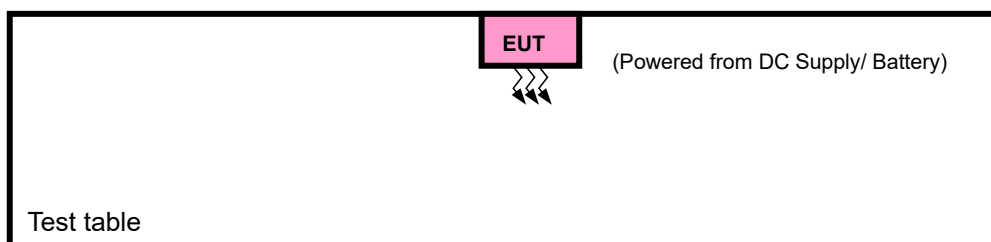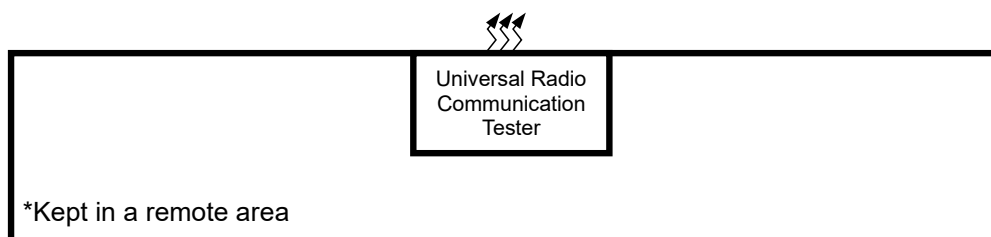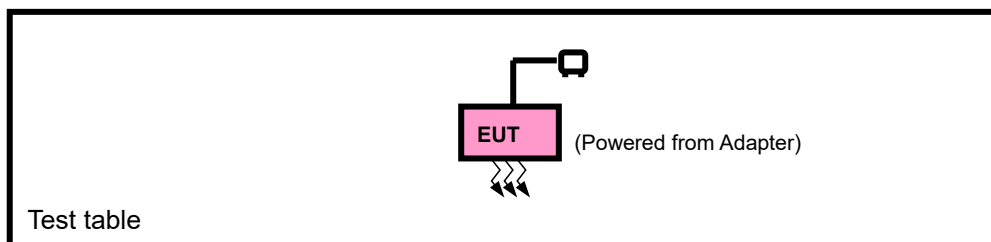

2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Adapter	XING YUAN ELECTRONICS CO., LTD	XY24S-120125Q-U	CLASS 2 POWER UNIT	N/A
2	Backplane	TELIT	CS2148	N/A	N/A
3	SIM Card	N/A	N/A	N/A	N/A
4	Antenna	N/A	T-AT305	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in EIRP and radiated emission was found when positioned on X-plane for LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter with LTE link
B	EUT + DC Supply with LTE link

NB-IOT LTE BAND 25 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	MODE
A	RADIATED EMISSION	26042 to 26688	26688	QPSK	1 RB / 0 RB offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

TEST CONDITION			
TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RADIATED EMISSION	23deg. C, 70%RH	AC 120V/60Hz	Carl Xie

2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 RADIATED EMISSION MEASUREMENT

3.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.1.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

3.1.3 DEVIATION FROM TEST STANDARD


No deviation


3.1.4 TEST SETUP

< Frequency Range below 30MHz >

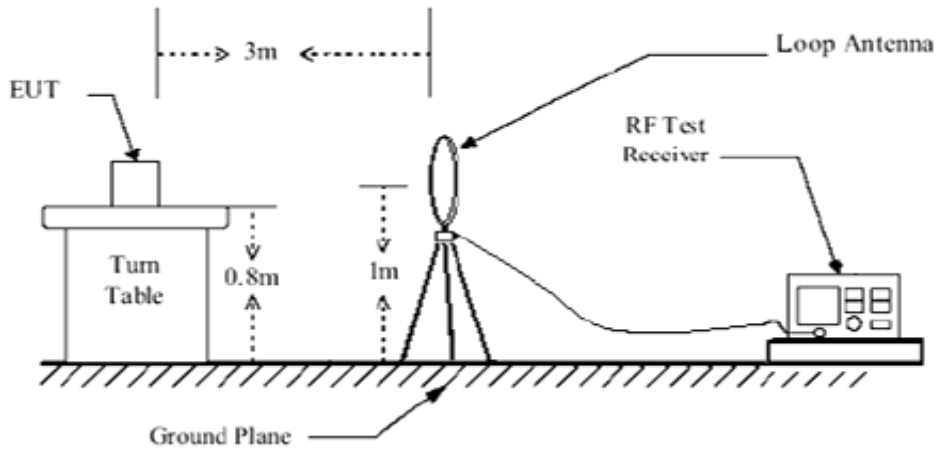

< Frequency Range 30MHz~1GHz >

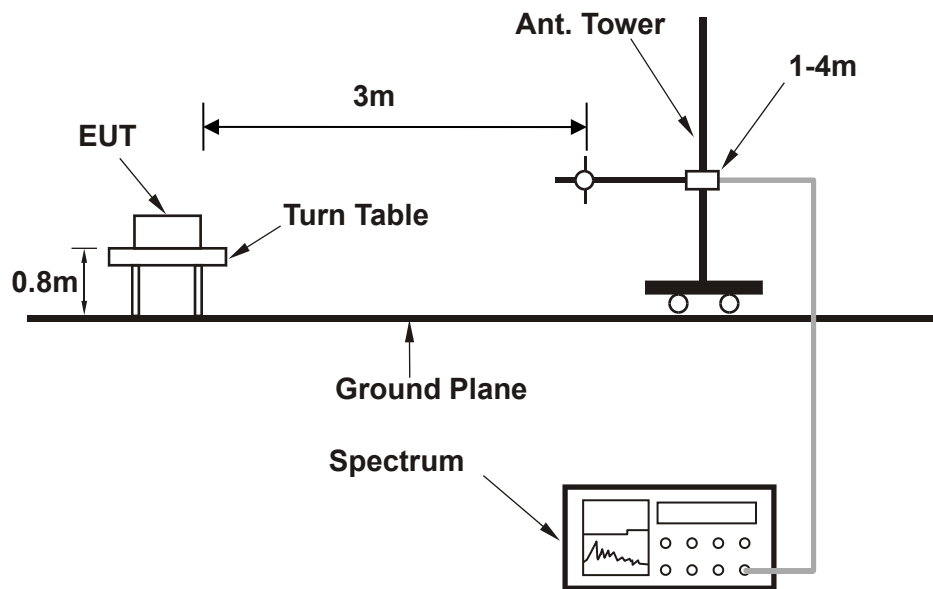

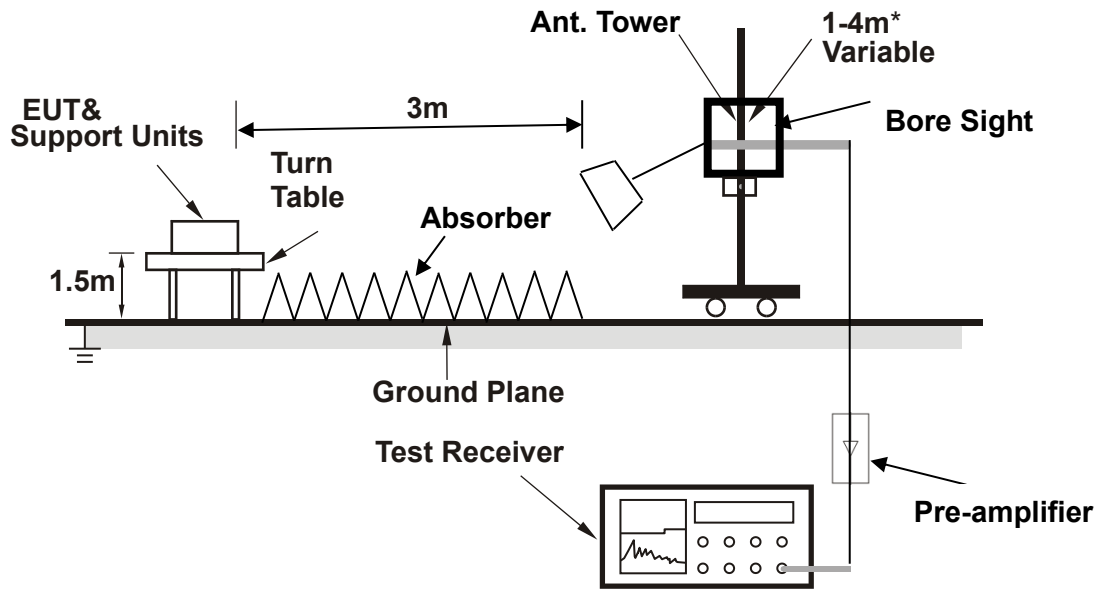

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Test Report No.: RF260812B002


3.1.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA

NB-IOT B25			
MODE	TX channel 26688	FREQUENCY RANGE	30 MHz – 1GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Carl Xie		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	44.211	-62.94	-13.00	49.94	8.92	H	47.2	1.00
1	67.297	-59.69	-13.00	46.69	6.55	H	203.8	1.00
1	108.134	-63.57	-13.00	50.57	4.86	H	359	1.00
1	174.045	-63.07	-13.00	50.07	2.91	H	208.7	2.00
1	288.893	-60.48	-13.00	47.48	10.17	H	257.6	1.00
1	467.470	-59.41	-13.00	46.41	11.28	H	156.2	2.00

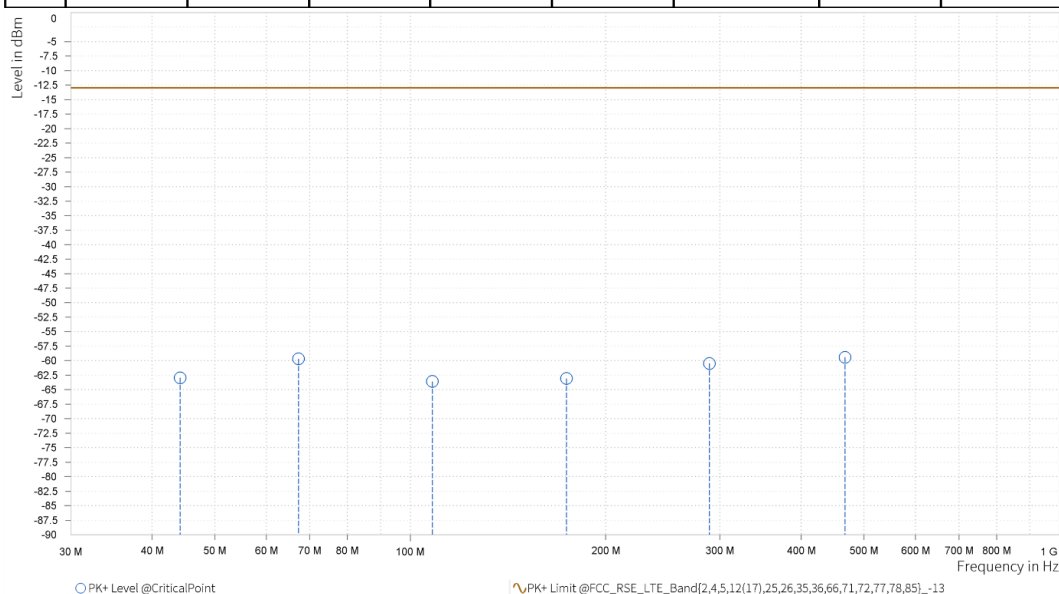

MODE	TX channel 26688	FREQUENCY RANGE	30 MHz – 1GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Carl Xie		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	44.017	-57.99	-13.00	44.99	10.67	V	359	1.00
1	65.648	-64.02	-13.00	51.02	4.96	V	7.3	2.00
1	93.875	-62.95	-13.00	49.95	7.16	V	359	2.00
1	147.516	-62.13	-13.00	49.13	3.05	V	104.8	2.00
1	230.596	-56.06	-13.00	43.06	8.32	V	203.8	1.00
1	426.439	-55.32	-13.00	42.32	12.52	V	310.3	1.00

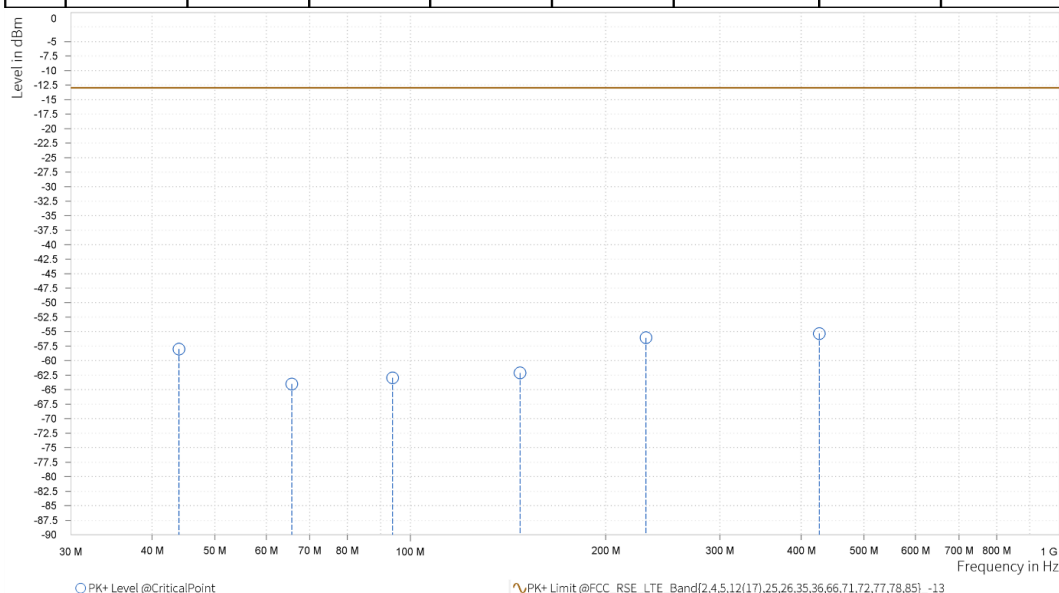

ABOVE 1GHz DATA


Note: For higher frequency, the emission is too low to be detected.

NB-IOT B25

MODE	TX channel 26688	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Carl Xie		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,765.000	-46.34	-13.00	33.34	27.96	H	123.8	2.00
4	5,647.500	-41.29	-13.00	28.29	34.28	H	123.8	2.00

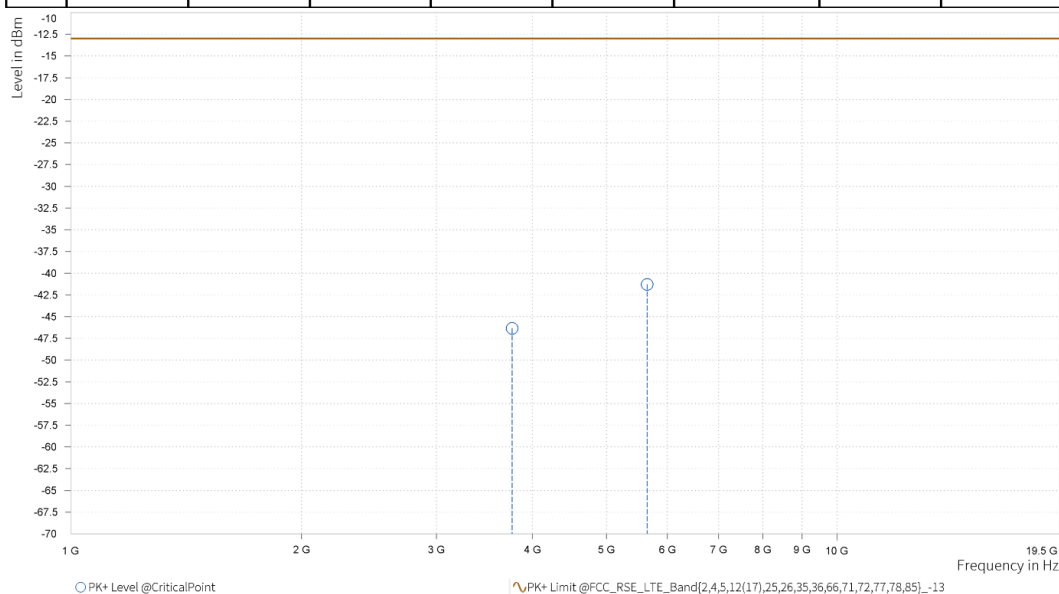

MODE	TX channel 26688	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Carl Xie		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,765.000	-46.22	-13.00	33.22	27.64	V	359.1	1.00
4	5,647.500	-38.92	-13.00	25.92	34.01	V	0.9	2.00

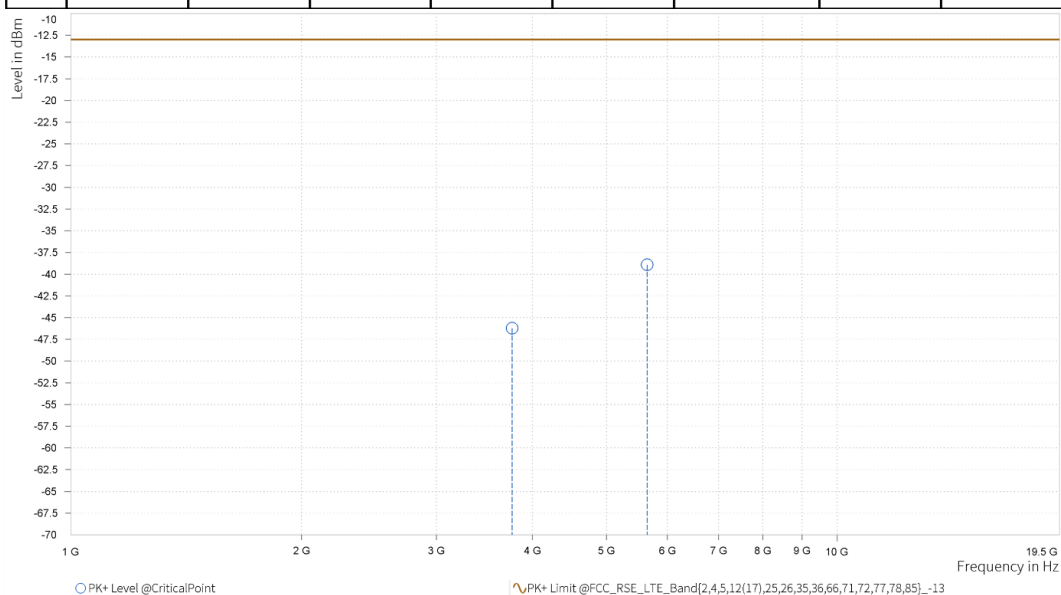



Test Report No.: RF260812B002

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF260812B002

5 INFORMATION ON THE TESTING LABORATORIES

We, BOOMWAVE TEST (SHENZHEN) CO., LTD., were founded in 2025 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

BOOMWAVE TEST (SHENZHEN) CO., LTD.

Lab Address:

Room B38, Warehouse A5(Chiwan No.1), No.3 Chiwan 4th Road, Chiwan Community, Zhaoshang Street, Nanshan District, Shenzhen, Guangdong, P.R. CHINA

Accredited Test Lab Cert 7607.01

Shenzhen EMC/RF Lab:

Mobile: +86 15118052731

Email: shimin.wang@boomwavelab.com

6 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



Test Report No.: RF260812B002

7 APPENDIX: ORIGINAL REPORT



VARIANT FCC TEST REPORT

(PART 24)

Applicant:	Telit Communications S.p.A.
Address:	Via Stazione di Prosecco 5/B - 34010 Sgonico (TS) - ITALY


Manufacturer or Supplier:	Telit Communications S.p.A.
Address:	Via Stazione di Prosecco 5/B - 34010 Sgonico (TS) - ITALY
Product:	ME310M1-W1
Brand Name:	Telit Cinterion
Model Name:	ME310M1-W1
FCC ID	RI7ME310M1WX
Date of tests	Aug. 04, 2025 - Sep. 05, 2025

The tests have been carried out according to the requirements of the following standard:

☒ **FCC PART 24, Subpart E**
☒ **FCC PART 2**
☒ **ANSI/TIA/EIA-603-D**

☒ **ANSI/TIA/EIA-603-E**
☒ **ANSI C63.26-2015**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
	
Date: Sep. 05, 2025	Date: Sep. 05, 2025

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 SUMMARY OF TEST RESULTS.....	4
1.1 MEASUREMENT UNCERTAINTY	5
1.2 TEST SITE AND INSTRUMENTS	6
2 GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 CONFIGURATION OF SYSTEM UNDER TEST	9
2.3 DESCRIPTION OF SUPPORT UNITS	10
2.4 TEST ITEM AND TEST CONFIGURATION.....	10
2.5 EUT OPERATING CONDITIONS	11
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3 TEST TYPES AND RESULTS.....	12
3.1 RADIATED EMISSION MEASUREMENT	12
3.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	12
3.1.2 TEST PROCEDURES	12
3.1.3 DEVIATION FROM TEST STANDARD	12
3.1.4 TEST SETUP	13
3.1.5 TEST RESULTS	15
4 INFORMATION ON THE TESTING LABORATORIES	19
5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	20
6 APPENDIX : ORIGINAL REPORT	21



Test Report No.: PSU-NQN2508270215-1RF02

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-240204W001RF02	Original release	Apr. 26, 2024
PSU-NQN2508270215-1RF02	Based on the original product , the new product adds GPS and WiFi capabilities. The new sample verify NB-IoT Band25 HIGH RSE worse case.Other test data please refer to original report.	Sep. 05, 2025



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	Test lab*
§2.1053 §24.238(a)(b)	Radiated Spurious Emissions	Compliance	A

* Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.

*Test Lab Information Reference

Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province, China

Accredited Test Lab Cert 6613.01

The FCC Site Registration No. is 434559; The Designation No. is CN1325.




1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions (9KHz~30MHz)	$\pm 2.68\text{dB}$
Radiated emissions & Radiated Power (30MHz~1GHz)	$\pm 4.98\text{dB}$
Radiated emissions & Radiated Power (1GHz ~6GHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GHz ~18GHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GHz ~40GHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Band Edge Measurements	$\pm 4.70\text{dB}$
Peak to average ratio	$\pm 0.76\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

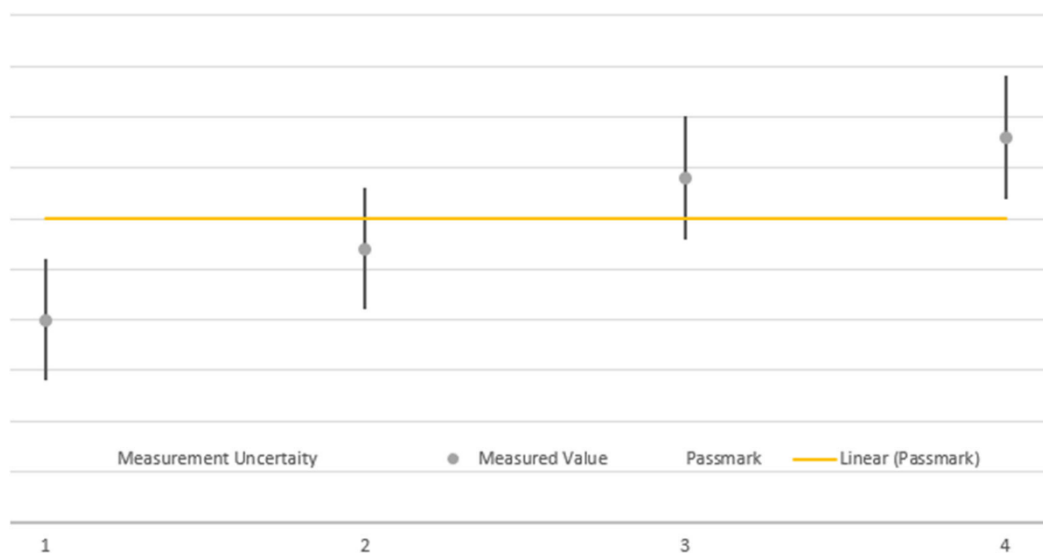

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.



1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,23	Aug.29,25
Pre-Amplifier	R&S	SCU18F1	100815	Aug.29,25	Aug.28,27
Pre-Amplifier	R&S	SCU08F1	101028	Jan.22,24	Jan.21,26
Vector Signal Generator	R&S	SMBV100B	102176	Mar.29,24	Mar.28,26
Signal Generator	R&S	SMB100A	182185	Mar.29,24	Mar.28,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Aug.20,25	Aug.19,28
EMI TEST Receiver	R&S	ESR26	101734	Mar.28,24	Mar.27,26
EMI TEST Receiver	R&S	ESW44	101973	Mar.28,24	Mar.27,26
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Jul.04,25	Jul.03,27
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.20,25	Aug.19,27
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Jul.15,24	Jul.14,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Mar.22,25	Mar.21,27
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.22,25	Feb.21,27
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.19,24	Jun.18,26
Test Software	EMC32	EMC32	N/A	N/A	N/A
6DB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	N/A	N/A
DC Source	HYELEC	HY3010B	551016	Aug.31,23	Aug.30,25
DC Source	HYELEC	HY3010B	551016	Aug.30,25	Aug.29,27
Hygrothermograph	DELI	20210528	SZ014	Mar.18,25	Mar.17,27
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.26,25	Apr.25,26
CABLE	R&S	W12.14	N/A	Apr.26,25	Apr.25,26
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.26,25	Apr.25,26
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.26,25	Apr.25,26
Temperature Chamber	votsch	VT4002	58566078100050	May.30,24	May.29,26



NOTE:

1. The calibration interval of the above test instruments is 12/24/36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 434559; The Designation No. is CN1325.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	ME310M1-W1	
BRAND NAME*	Telit Cinterion	
MODEL NAME*	ME310M1-W1	
NOMINAL VOLTAGE*	EUT 3.8Vdc	
MODULATION TYPE*	CAT-M / NB-IOT :LTE	BPSK, QPSK, 16QAM
FREQUENCY RANGE	LTE Band 25 Channel Bandwidth: 1.4MHz	1850.7MHz ~ 1914.3MHz
	LTE Band 25 Channel Bandwidth: 3MHz	1851.5MHz ~ 1913.5MHz
	LTE Band 25 Channel Bandwidth: 5MHz	1852.5MHz ~ 1912.5MHz
	LTE Band 25 Channel Bandwidth: 10MHz	1855.0MHz ~ 1910.0MHz
	LTE Band 25 Channel Bandwidth: 15MHz	1857.5MHz ~ 1907.5MHz
	LTE Band 25 Channel Bandwidth: 20MHz	1860.0MHz ~ 1905.0MHz
ANTENNA GAIN*	LTE B25	2.14dBi
ANTENNA TYPE*	1/4 1 Antenna(Model: T-AT305)	
HW VERSION*	0.0	
SW VERSION*	MOU.000003	
I/O PORTS*	Refer to user's manual	
CABLE SUPPLIED*	N/A	
EXTREME TEMPERATURE*	-40°C - +85 °C	
EXTREME VOLTAGE*	2.5V - 4.5V	

NOTE:





- *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receivers.

MODULATION MODE	TX FUNCTION
LTE	1TX/1RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



FOR RADIATION EMISSION TEST

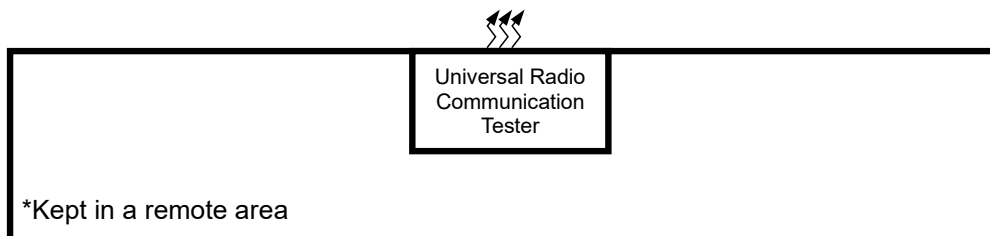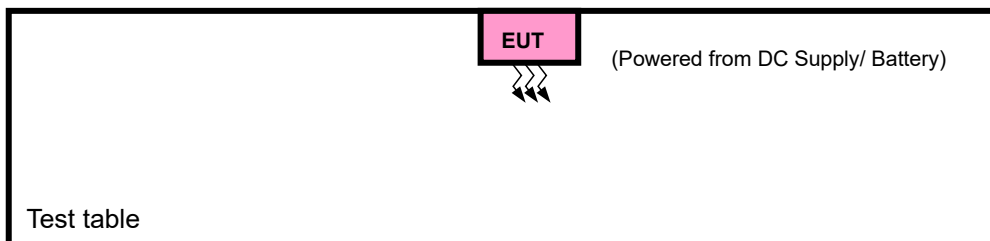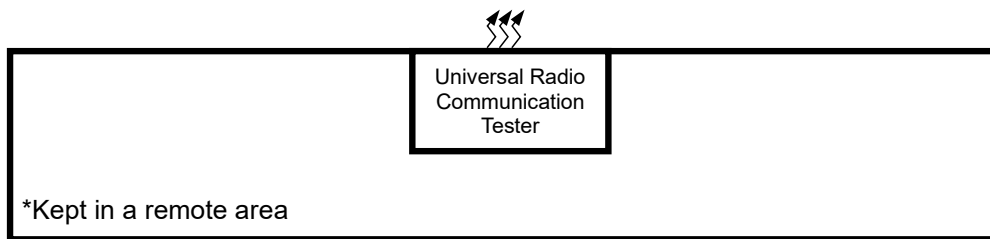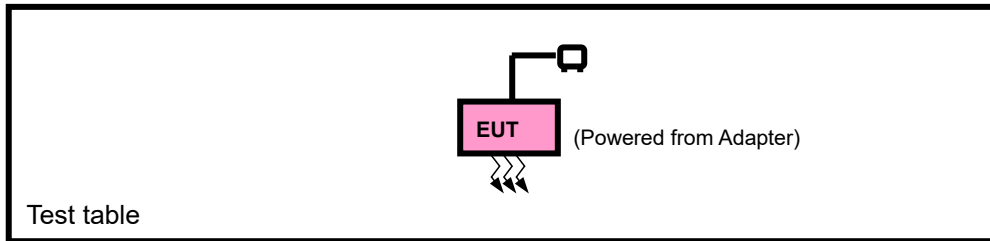



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in EIRP and radiated emission was found when positioned on X-plane for GSM/EDGE/ LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter with LTE link
B	EUT + DC Supply with LTE link

NB-IOT LTE BAND 25 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	MODE
A	RADIATED EMISSION	26365	26365	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

TEST CONDITION			
TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RADIATED EMISSION	23deg. C, 70%RH	DC 4.5V By Adapter	Hanwen Xu



2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.



3 TEST TYPES AND RESULTS

3.1 RADIATED EMISSION MEASUREMENT

3.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.1.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


3.1.3 DEVIATION FROM TEST STANDARD

No deviation





3.1.4 TEST SETUP

< Frequency Range below 30MHz >

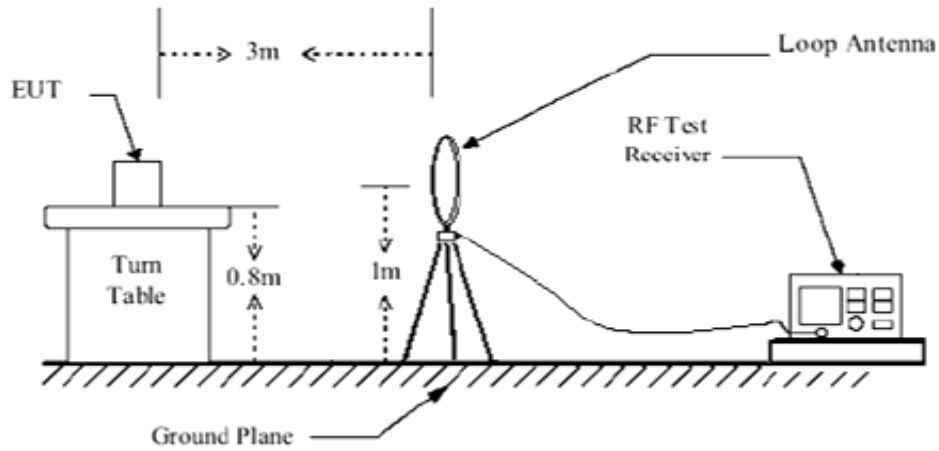

< Frequency Range 30MHz~1GHz >

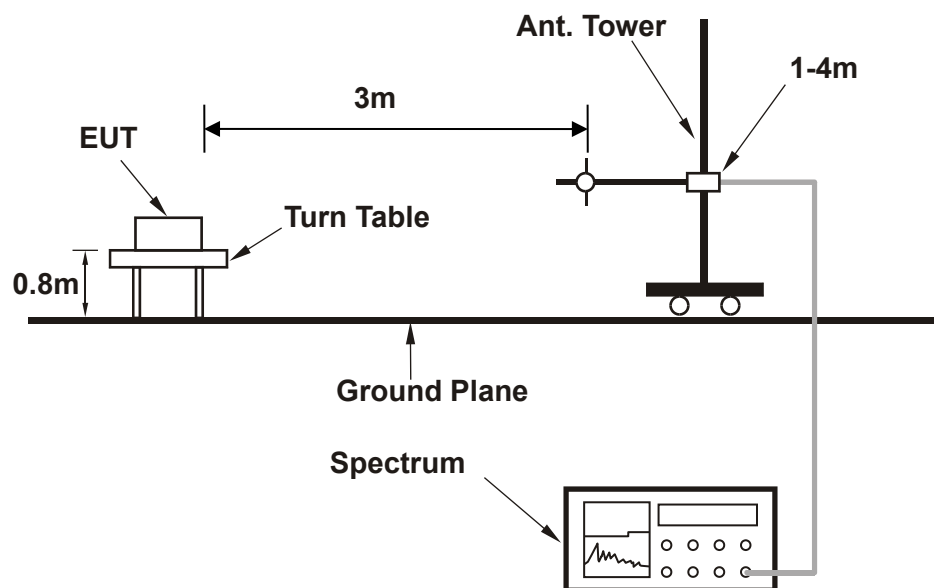

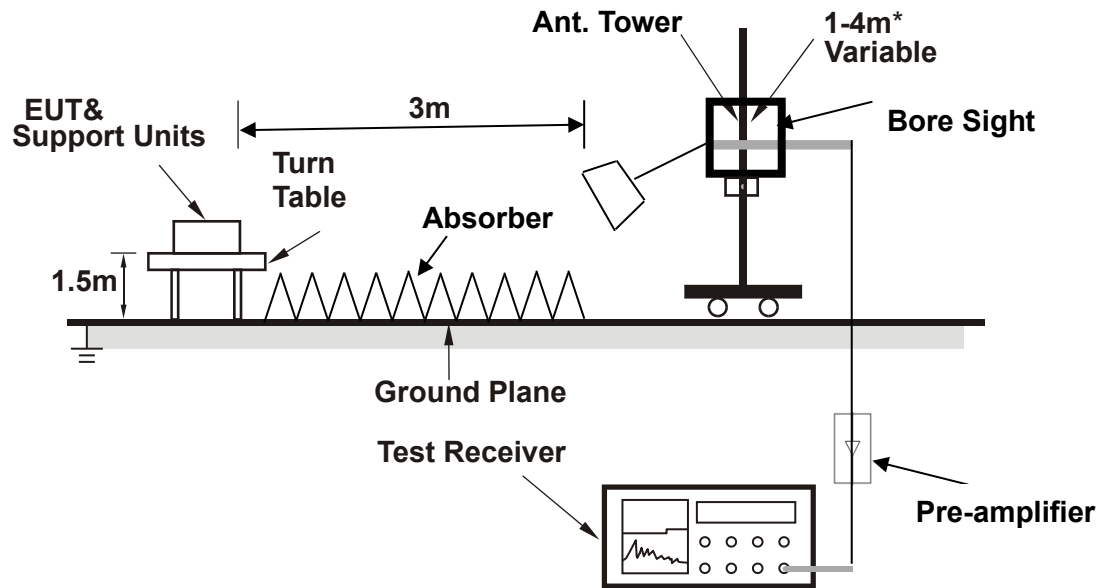

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



3.1.5 TEST RESULTS


NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA

NB-IOT B25			
MODE	TX channel 26688	FREQUENCY RANGE	30 MHz – 1GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	45.811	-56.52	-13.00	43.52	7.80	H	355.5	2.00
1	80.246	-65.68	-13.00	52.68	-0.19	H	316.3	2.00
1	118.222	-66.35	-13.00	53.35	3.99	H	94	1.00
1	196.549	-62.92	-13.00	49.92	4.99	H	1	1.00
1	300.097	-59.84	-13.00	46.84	9.72	H	215.8	2.00
1	607.199	-59.66	-13.00	46.66	14.29	H	316.3	2.00

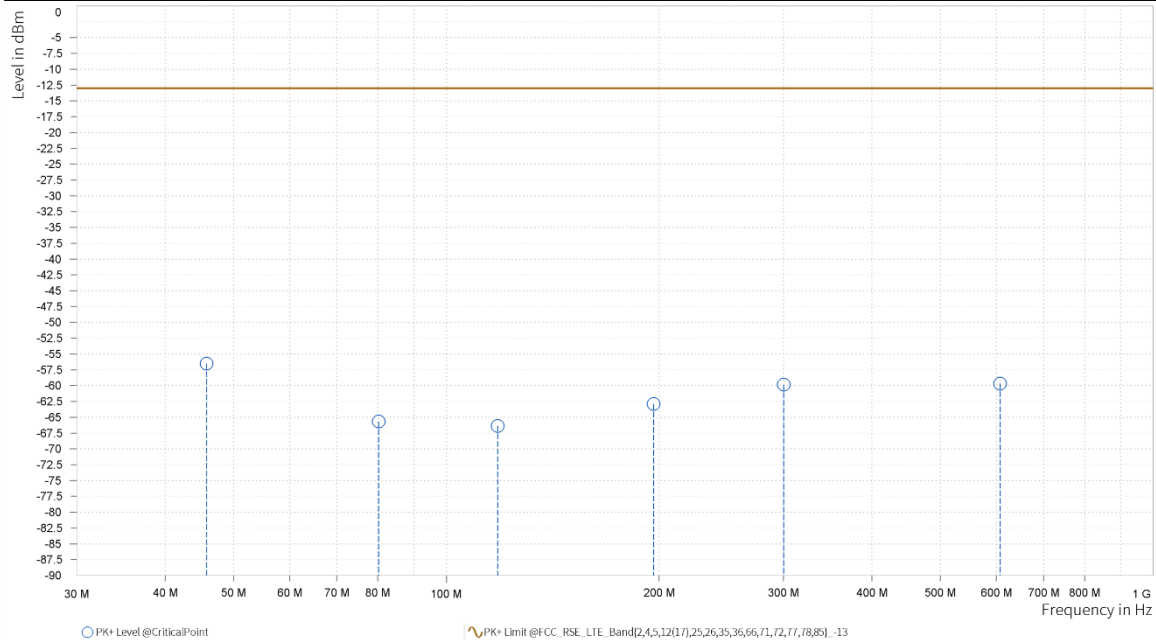




MODE	TX channel 26688	FREQUENCY RANGE	30 MHz – 1GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	43.774	-55.39	-13.00	42.39	10.92	V	359.1	1.00
1	106.727	-61.09	-13.00	48.09	9.41	V	266.1	2.00
1	197.665	-65.69	-13.00	52.69	7.19	V	165.8	2.00
1	302.376	-64.43	-13.00	51.43	9.37	V	1	1.00
1	427.167	-62.49	-13.00	49.49	12.53	V	359	2.00
1	857.362	-56.76	-13.00	43.76	19.63	V	5.2	1.00

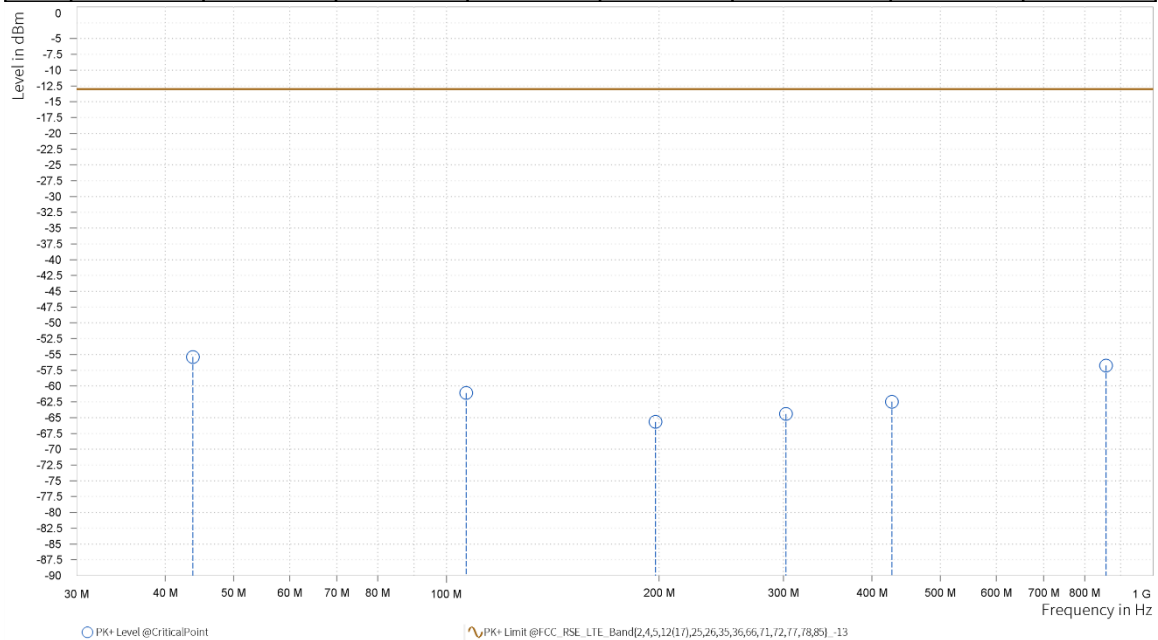



ABOVE 1GHz DATA


Note: For higher frequency, the emission is too low to be detected.

NB-IOT B25

MODE	TX channel 26688	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,829.600	-46.41	-13.00	33.41	27.84	H	1	2.00
4	5,744.400	-42.20	-13.00	29.20	34.10	H	1	1.00

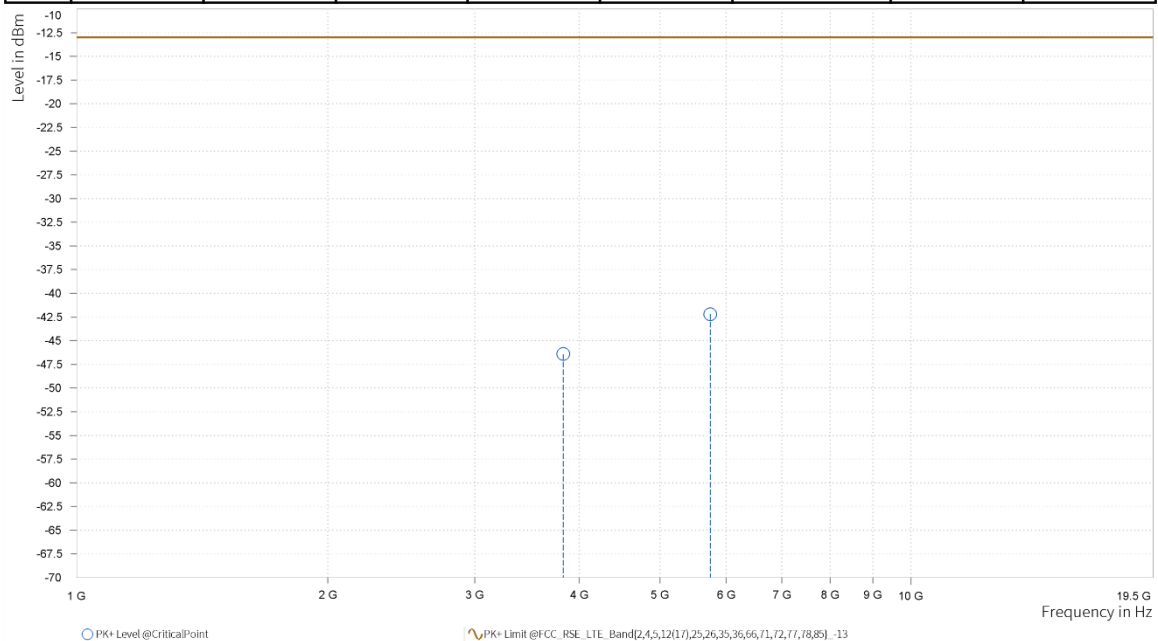




MODE	TX channel 26688	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,829.600	-43.07	-13.00	30.07	27.58	V	1	2.00
4	5,744.400	-42.48	-13.00	29.48	33.85	V	45	2.00

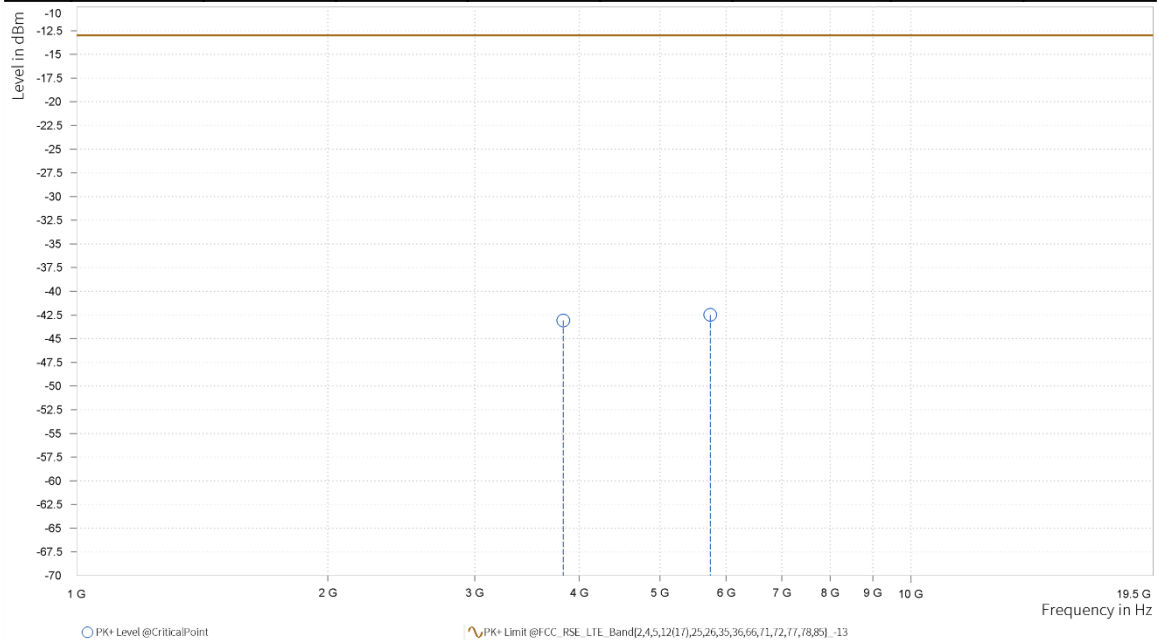



4 INFORMATION ON THE TESTING LABORATORIES

We, Huarui 7layers High Technology (Suzhou) Co., Ltd. ,were founded in 2020 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province, China

Accredited Test Lab Cert 6613.01

If you have any comments, please feel free to contact us at the following:

Suzhou EMC/RF Lab:

Tel: +86 (0557) 368 1008



5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



BUREAU Test Report No.: PSU-NQN2508270215-1RF02
VERITAS

6 APPENDIX : ORIGINAL REPORT

BUREAU
VERITAS

Test Report No.: W7L-240204W001RF02



Certificate #6613.01

FCC TEST REPORT

(PART 24)


Applicant:	Telit Communications S.p.A.
Address:	Via Stazione di Prosecco 5/b – 34010 Sgonico, Trieste – Italy

Manufacturer or Supplier:	Telit Communications S.p.A.
Address:	Via Stazione di Prosecco 5/b – 34010 Sgonico, Trieste – Italy
Product:	ME310M1-W2 / ME310M1-W1
Brand Name:	Telit Cinterion
Model Name:	ME310M1-W2 / ME310M1-W1
FCC ID	RI7ME310M1WX
Date of tests	Feb. 18, 2024 ~ Apr. 26, 2024

The tests have been carried out according to the requirements of the following standard:

☒ **FCC PART 24, Subpart E** ☒ **FCC PART 2**
☒ **ANSI/TIA/EIA-603-D** ☒ **ANSI/TIA/EIA-603-E** ☒ **ANSI C63.26-2015**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
	
Date: Apr. 26, 2024	Date: Apr. 26, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	6
1.2 TEST SITE AND INSTRUMENTS	7
2 GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 CONFIGURATION OF SYSTEM UNDER TEST	12
2.3 DESCRIPTION OF SUPPORT UNITS	13
2.4 TEST ITEM AND TEST CONFIGURATION	13
2.5 EUT OPERATING CONDITIONS	17
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	17
3 TEST TYPES AND RESULTS	18
3.1 OUTPUT POWER MEASUREMENT	18
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	18
3.1.2 TEST PROCEDURES	18
3.1.3 TEST SETUP	19
3.1.4 TEST RESULTS	19
3.2 FREQUENCY STABILITY MEASUREMENT	35
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	35
3.2.2 TEST PROCEDURE	35
3.2.3 TEST SETUP	35
3.2.4 TEST RESULTS	36
3.3 OCCUPIED BANDWIDTH MEASUREMENT	37
3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	37
3.3.2 TEST SETUP	37
3.3.3 TEST PROCEDURES	37
3.3.4 TEST RESULTS	38
3.4 BAND EDGE MEASUREMENT	39
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	39
3.4.2 TEST SETUP	39
3.4.3 TEST PROCEDURES	40
3.4.4 TEST RESULTS	41
3.5 CONDUCTED SPURIOUS EMISSIONS	42
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	42
3.5.2 TEST PROCEDURE	42
3.5.3 TEST SETUP	42
3.5.4 TEST RESULTS	43
3.6 RADIATED EMISSION MEASUREMENT	44
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	44
3.6.2 TEST PROCEDURES	44
3.6.3 DEVIATION FROM TEST STANDARD	44



3.6.4 TEST SETUP	45
3.6.5 TEST RESULTS	47
3.7 PEAK TO AVERAGE RATIO	71
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	71
3.7.2 TEST SETUP	71
3.7.3 TEST PROCEDURES	71
3.7.4 TEST RESULTS	72
4 INFORMATION ON THE TESTING LABORATORIES	73
5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	74
6 APPENDIX	75
CAT-M: LTE BAND25(INCLUDING LTE BAND2)	75
PEAK-TO-AVERAGE RATIO(CCDF).....	75
TEST RESULT	75
TEST GRAPHS	76
26DB BANDWIDTH AND OCCUPIED BANDWIDTH.....	94
TEST RESULT	94
BAND EDGE	113
TEST RESULT	113
TEST GRAPHS	114
CONDUCTED SPURIOUS EMISSION	138
TEST RESULT	138
TEST GRAPHS	138
FREQUENCY STABILITY	156
TEST RESULT	156
NB-IOT: LTE BAND25(INCLUDING LTE BAND2)	159
PEAK-TO-AVERAGE RATIO(CCDF).....	159
TEST RESULT	159
TEST GRAPHS	160
26DB BANDWIDTH AND OCCUPIED BANDWIDTH.....	162
TEST RESULT	162
BAND EDGE	171
TEST RESULT	171
TEST GRAPHS	171
CONDUCTED SPURIOUS EMISSION	177
TEST RESULT	177
TEST GRAPHS	178
FREQUENCY STABILITY	186
TEST RESULT	186



Test Report No.: W7L-240204W001RF02

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-240204W001RF02	Original release	Apr. 26, 2024

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	Test lab*
§2.1046	Coducted Output Power	Compliance	A
§24.232(c)	Equivalent Isotropic Radiated Power	Compliance	A
§2.1055 §24.235	Frequency Stability	Compliance	A
§2.1049	Occupied Bandwidth	Compliance	A
§24.232(d)	Peak to average ratio*	Compliance	A
§24.238(a)(b)	Band Edge Measurements	Compliance	A
§2.1051 §24.238(a)(b)	Conducted Spurious Emissions	Compliance	A
§2.1053 §24.238(a)(b)	Radiated Spurious Emissions	Compliance	A

* Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.

Note:

The differences between LTE NB-IoT/Cat-M1 modules ME310M1-W1 (FCC ID:RI7ME310M1WX) HW 0.0 and ME310M1-W2 (FCC ID: RI7ME310M1W2) HW0.0 are as shown in the following list. Testing has been run on parent product ME310M1-W2 and the worst cases of power and RSE have been verified also on ME310M1-W1 variant. Only the worst-case data (ME310M1-W2) have been reported.

Model	ME310M1-W1 HW0.0	ME310M1-W2 HW0.0
The PSRAM section (U403/R402/R402/C402)	NOT-mounted	Mounted
The FLASH dimensions and capacity (U401)	(Small dimensions) 8MB	(Big dimensions) 16MB

*Test Lab Information Reference

Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zhuyi Road, High-tech District, Suzhou City, Anhui Province

Accredited Test Lab Cert 6613.01


The FCC Site Registration No. is 434559; The Designation No. is CN1325.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions (9KHz~30MHz)	$\pm 2.68\text{dB}$
Radiated emissions & Radiated Power (30MHz~1GHz)	$\pm 4.98\text{dB}$
Radiated emissions & Radiated Power (1GHz ~6GHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GHz ~18GHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GHz ~40GHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Band Edge Measurements	$\pm 4.70\text{dB}$
Peak to average ratio	$\pm 0.76\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

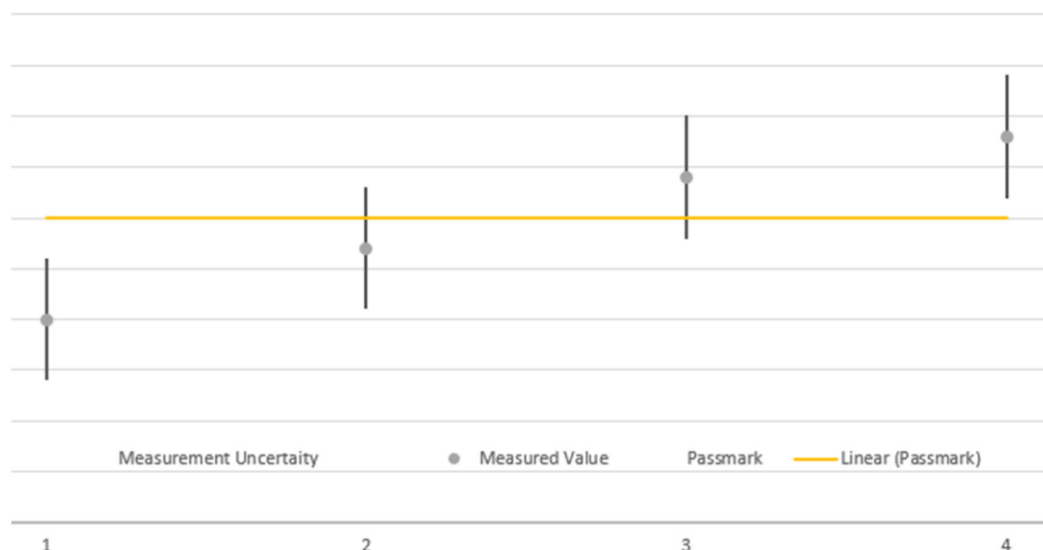

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.

**1.2 TEST SITE AND INSTRUMENTS**

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,22	Aug.29,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Vector Signal Generator	R&S	SMBV100B	102176	Feb.15,24	Feb.14,26
Signal Generator	R&S	SMB100A	182185	Feb.15,24	Feb.14,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EM C-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EM C-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESR26	101734	Feb.25,22	Feb.24,24
EMI TEST Receiver	R&S	ESR26	101734	Feb.24,24	Feb.23,26
EMI TEST Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
EMI TEST Receiver	R&S	ESW44	101973	Feb.24,24	Feb.23,26
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.28,22	Feb.27,24
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.27,24	Feb.26,26
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.23,22	Feb.22,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.22,24	Feb.21,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,22	Aug.21,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,22	Feb.22,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.22,24	Feb.21,26
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.27,22	Jun.26,24
Test Software	EMC32	EMC32	N/A	N/A	N/A
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	Oct.01,22	Sep.30,24
DC Source	HYELEC	HY3010B	551016	Aug.31,22	Aug.30,24
Hygrothermograph	DELI	20210528	SZ014	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.28,23	Apr.27,24
CABLE	R&S	W12.14	N/A	Apr.28,23	Apr.27,24
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.28,23	Apr.27,24
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.28,23	Apr.27,24
Temperature Chamber	votsch	VT4002	58566078100050	May.31,22	May.30,24



Test Report No.: W7L-240204W001RF02

- NOTE:**
1. The calibration interval of the above test instruments is 12/24/36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 434559; The Designation No. is CN1325.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	ME310M1-W2 / ME310M1-W1	
BRAND NAME*	Telit Cinterion	
MODEL NAME*	ME310M1-W2 / ME310M1-W1	
NOMINAL VOLTAGE*	EUT 3.8Vdc	
MODULATION TYPE	CAT-M / NB-IOT :LTE	BPSK, QPSK, 16QAM
FREQUENCY RANGE CAT-M	LTE Band 2 Channel Bandwidth: 1.4MHz	1850.7MHz ~ 1909.3MHz
	LTE Band 2 Channel Bandwidth: 3MHz	1851.5MHz ~ 1908.5MHz
	LTE Band 2 Channel Bandwidth: 5MHz	1852.5MHz ~ 1907.5MHz
	LTE Band 2 Channel Bandwidth: 10MHz	1855.0MHz ~ 1905.0MHz
	LTE Band 2 Channel Bandwidth: 15MHz	1857.5MHz ~ 1902.5MHz
	LTE Band 2 Channel Bandwidth: 20MHz	1860.0MHz ~ 1900.0MHz
	LTE Band 25 Channel Bandwidth: 1.4MHz	1850.7MHz ~ 1914.3MHz
	LTE Band 25 Channel Bandwidth: 3MHz	1851.5MHz ~ 1913.5MHz
	LTE Band 25 Channel Bandwidth: 5MHz	1852.5MHz ~ 1912.5MHz
	LTE Band 25 Channel Bandwidth: 10MHz	1855.0MHz ~ 1910.0MHz
	LTE Band 25 Channel Bandwidth: 15MHz	1857.5MHz ~ 1907.5MHz
	LTE Band 25 Channel Bandwidth: 20MHz	1860.0MHz ~ 1905.0MHz
FREQUENCY RANGE NB-IOT	LTE Band 2 (Sub-carrier Spacing: 3.75/15KHz)	1850.7MHz ~ 1909.3MHz
	LTE Band 25 (Sub-carrier Spacing: 3.75/15KHz)	1851.5MHz ~ 1908.5MHz
MAX. ERP POWER CAM-T	LTE Band 2 Channel Bandwidth: 1.4MHz	335.74mW
	LTE Band 2 Channel Bandwidth: 3MHz	336.51mW



	LTE Band 2 Channel Bandwidth: 5MHz	334.97mW
	LTE Band 2 Channel Bandwidth: 10MHz	337.29mW
	LTE Band 2 Channel Bandwidth: 15MHz	336.51mW
	LTE Band 2 Channel Bandwidth: 20MHz	339.63mW
	LTE Band 25 Channel Bandwidth: 1.4MHz	338.06mW
	LTE Band 25 Channel Bandwidth: 3MHz	336.51mW
	LTE Band 25 Channel Bandwidth: 5MHz	333.43mW
	LTE Band 25 Channel Bandwidth: 10MHz	336.51mW
	LTE Band 25 Channel Bandwidth: 15MHz	334.97mW
	LTE Band 25 Channel Bandwidth: 20MHz	338.06mW
MAX. ERP POWER NB-IOT	LTE Band 2 (Sub-carrier Spacing: 3.75KHz)	328.1mW
	LTE Band 2 (Sub-carrier Spacing: 15KHz)	325.84mW
	LTE Band 25 (Sub-carrier Spacing: 3.75KHz)	322.11mW
	LTE Band 25 (Sub-carrier Spacing: 15KHz)	325.84mW
EMISSION DESIGNATOR GGN CAT-M	LTE Band 25 Channel Bandwidth: 1.4MHz	QPSK: 1M09G7D 16QAM: 1M08W7D
	LTE Band 25 Channel Bandwidth: 3MHz	QPSK: 1M08G7D 16QAM: 1M08W7D
	LTE Band 25 Channel Bandwidth: 5MHz	QPSK: 1M09G7D 16QAM: 1M08W7D
	LTE Band 25 Channel Bandwidth: 10MHz	QPSK: 1M08G7D 16QAM: 1M08W7D
	LTE Band 25 Channel Bandwidth: 15MHz	QPSK: 1M09G7D 16QAM: 1M08W7D
	LTE Band 25	QPSK: 1M09G7D



	Channel Bandwidth: 20MHz	16QAM: 1M09W7D
EMISSION DESIGNATOR GOGN NB-IOT	LTE Band 25 (Sub-carrier Spacing: 3.75KHz)	BPSK: 44K51G7D
		QPSK: 49K27W7D
	LTE Band 25 (Sub-carrier Spacing: 15KHz)	BPSK: 120K6G7D
		QPSK: 190K6W7D
ANTENNA TYPE*	1/4 1 Antenna with 2.14dBi for LTE B2/ LTE B25	
HW VERSION*	0.0	
SW VERSION*	M0U.0000001	
I/O PORTS*	Refer to user's manual	
CABLE SUPPLIED*	N/A	
EXTREME TEMPERATURE*	-40-85 °C	
EXTREME VOLTAGE*	2.5V - 4.5V	

NOTE:

- *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.





MODULATION MODE	TX FUNCTION
LTE	1TX/1RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

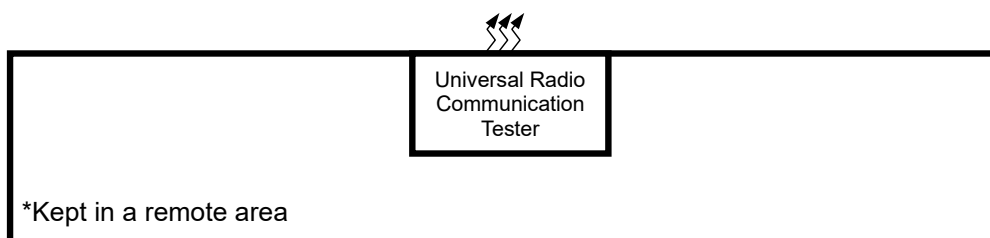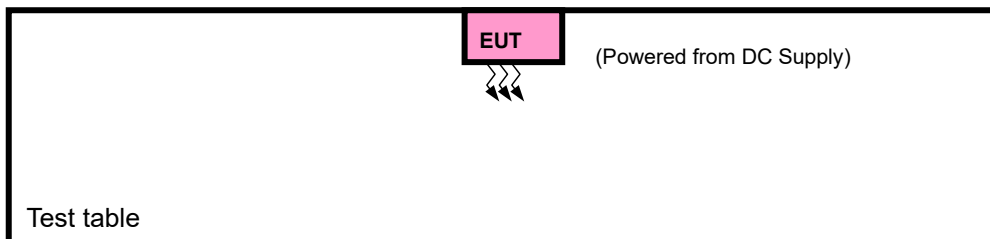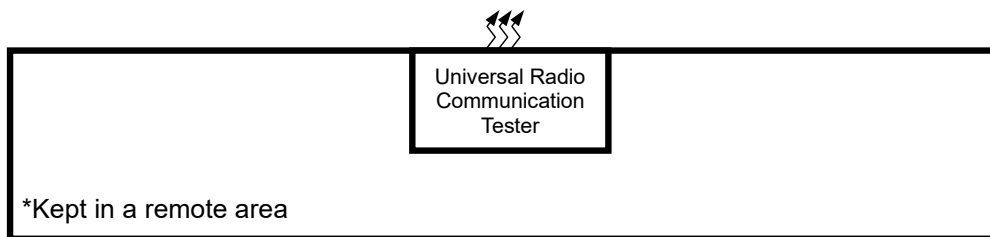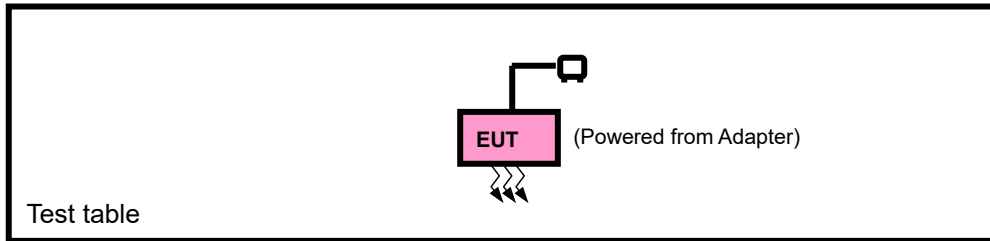



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Laptop	Lenovo	ThinkPad E14	HRSW00024	N/A
2	DC Source	HYELEC	HY3010B	551016	N/A
3	Adapter	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable, 1.0m;
2	USB Line: Unshielded, Detachable, 1.0m;

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in EIRP and radiated emission was found when positioned on X-plane for GSM/EDGE/ LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable with LTE link
B	EUT + DC Source with LTE link

LTE BAND 2 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset
B NB-IOT	ERP	18602 to 19198	18602, 20525, 19198	3.75KHz	BPSK,QPSK	1 RB / 0 RB Offset
		18602 to 19198	18602, 20525, 19198	15KHz	BPSK,QPSK	1 RB / 0 RB Offset

Note: 1.This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

2. LTE Band 2 are covered by LTE Band 25, Because it is a subset of LTE Band 25 with the same output power and supported bandwidths, So the conducted test data and RSE test data please refer to LTE Band 25

CAM-T LTE BAND 25 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365 26640	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	26140 to 26590	26140, 26365, 26590	20MHz	QPSK,16QAM, 64QAM	100 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK,16QAM, 64QAM	6 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK,16QAM, 64QAM	15 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK,16QAM, 64QAM	25 RB / 0 RB Offset
		26090 to 26640	26090, 26365 26640	10MHz	QPSK,16QAM, 64QAM	50 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK,16QAM, 64QAM	75 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK,16QAM, 64QAM	100 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	26140 to 26590	26140, 26365, 26590	20MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset
A	BAND EDGE	26047 to 26683	26047	1.4MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 6 RB / 0 RB Offset
			26683	1.4MHz	QPSK,16QAM, 64QAM	1 RB / 5 RB Offset 6 RB / 0 RB Offset
		26055 to 26675	26055	3MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 15 RB / 0 RB Offset
			26675	3MHz	QPSK,16QAM, 64QAM	1 RB / 14 RB Offset 15 RB / 0 RB Offset
		26065 to 26665	26065	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			26665	5MHz	QPSK,16QAM, 64QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		26090 to 26640	26090	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			26640	10MHz	QPSK,16QAM, 64QAM	1 RB / 49 RB Offset 50 RB / 0 RB Offset
		26115 to 26615	26115	15MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 75 RB / 0 RB Offset
			26615	15MHz	QPSK,16QAM, 64QAM	1 RB / 74 RB Offset 75 RB / 0 RB Offset



		26140 to 26590	26140	20MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
			26590	20MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
A	CONDCUETED EMISSION	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365, 26640	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	26047 to 26683	26365	1.4MHz	QPSK	1 RB / 0 RB Offset
		26055 to 26675	26365	3MHz	QPSK	1 RB / 0 RB Offset
		26065 to 26665	26365	5MHz	QPSK	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365, 26640	10MHz	QPSK	1 RB / 0 RB Offset
		26115 to 26615	26365	15MHz	QPSK	1 RB / 0 RB Offset
		26140 to 26590	26365	20MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

NB-IOT LTE BAND 25 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	MODE
A	ERP	26042 to 26688	26042, 26365, 26688	BPSK, QPSK	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	26365	26365	BPSK, QPSK	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	26042 to 26688	26042, 26365, 26688	BPSK, QPSK	6 RB / 0 RB Offset
		26365	26365	BPSK, QPSK	50 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	26365	26365	BPSK, QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
A	BAND EDGE	26042 to 26688	26042	BPSK, QPSK	1 RB / 0 RB Offset 6 RB / 0 RB Offset
			26688	BPSK, QPSK	1 RB / 5 RB Offset 6 RB / 0 RB Offset
		26365	26365	BPSK, QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
				BPSK, QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset
			26365	BPSK, QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
				BPSK, QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
A	CONDUCTED EMISSION	26042 to 26688	26042, 26365, 26688	BPSK, QPSK	1 RB / 0 RB Offset
		26365	26365	BPSK, QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	26042 to 26688	26042, 26365, 26688	QPSK	1 RB / 0 RB Offset
		26365	26365	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP	23deg. C, 70%RH	DC 4.5V By Adapter	Hanwen Xu
FREQUENCY STABILITY	23deg. C, 70%RH	DC 2.5V/ 3.8V/ 4.5V By DC Source	Hanwen Xu
OCCUPIED BANDWIDTH	23deg. C, 70%RH	DC 4.5V By Adapter	Hanwen Xu
BAND EDGE	23deg. C, 70%RH	DC 4.5V By Adapter	Hanwen Xu
CONDUCTED EMISSION	23deg. C, 70%RH	DC 4.5V By Adapter	Hanwen Xu
RADIATED EMISSION	23deg. C, 70%RH	DC 4.5V By Adapter	Hanwen Xu
PEAK TO AVERAGE RATIO	23deg. C, 70%RH	DC 4.5V By Adapter	Hanwen Xu

2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP.

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.


CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:



3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm) :

CAM-T

LTE BAND 2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18607	Mid CH 18900	High CH 19193
				Frequency 1850.7 MHz	Frequency 1880 MHz	Frequency 1909.3 MHz
2/ 1.4	QPSK	1	0	22.79	22.95	22.91
		1	5	22.82	23.00	22.92
		3	0	22.88	22.96	23.05
		3	3	22.88	23.00	23.12
		6	0	22.93	22.98	23.04
	16QAM	1	0	22.74	22.70	22.74
		1	5	22.73	22.89	22.89
		3	0	22.82	22.92	22.95
		3	3	22.95	23.01	22.94
		6	0	22.96	22.94	22.98

Band/BW	Modulation	RB Size	RB Offset	Low CH 18615	Mid CH 18900	High CH 19185
				Frequency 1851.5 MHz	Frequency 1880 MHz	Frequency 1908.5 MHz
2/ 3	QPSK	1	0	22.89	22.95	22.93
		1	5	22.73	23.01	22.96
		3	0	22.82	23.05	23.01
		3	3	22.96	23.13	23.08
		6	0	22.93	23.07	23.10
	16QAM	1	0	22.78	22.83	22.75
		1	5	22.71	22.90	22.80
		3	0	22.69	22.89	22.90
		3	3	22.91	23.02	22.90
		6	0	22.96	22.97	22.96

Band/BW	Modulation	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz
2/ 5	QPSK	1	0	22.82	22.83	22.98
		1	5	22.72	22.90	22.94
		3	0	22.85	22.98	23.07
		3	3	22.90	23.08	23.06
		6	0	22.87	23.11	23.06
	16QAM	1	0	22.73	22.74	22.83
		1	5	22.72	22.89	22.87
		3	0	22.69	22.89	22.87
		3	3	22.91	22.96	22.89
		6	0	22.90	23.01	22.98

Band/BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz
2/ 10	QPSK	1	0	22.86	22.84	22.97
		1	5	22.85	22.87	22.98
		3	0	22.81	23.06	23.10
		3	3	22.93	23.05	23.00
		6	0	22.93	23.11	23.14
	16QAM	1	0	22.71	22.76	22.78
		1	5	22.71	22.96	22.83
		3	0	22.79	22.80	22.91
		3	3	22.85	23.01	22.95
		6	0	22.90	23.01	22.95

Band/BW	Modulation	RB Size	RB Offset	Low CH 18675	Mid CH 18900	High CH 19125
				Frequency 1857.5 MHz	Frequency 1880 MHz	Frequency 1902.5 MHz
2/ 15	QPSK	1	0	22.90	22.90	22.94
		1	5	22.77	22.90	23.02
		3	0	22.86	22.99	22.98
		3	3	22.94	23.13	23.01
		6	0	22.95	22.98	23.13
	16QAM	1	0	22.80	22.84	22.83
		1	5	22.65	22.91	22.78
		3	0	22.77	22.85	22.97
		3	3	22.83	23.05	22.85
		6	0	22.91	23.01	23.06

Band/BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz
2/ 20	QPSK	1	0	22.93	22.98	23.01
		1	5	22.86	23.02	23.06
		3	0	22.94	23.09	23.11
		3	3	22.98	23.15	23.13
		6	0	23.02	23.13	23.17
	16QAM	1	0	22.83	22.85	22.87
		1	5	22.80	23.00	22.91
		3	0	22.84	22.95	23.01
		3	3	22.97	23.08	22.98
		6	0	22.98	23.09	23.07

LTE BAND 25

Band/BW	Modulation	RB Size	RB Offset	Low CH 26047	Mid CH 26365	High CH 26683
				Frequency 1850.7 MHz	Frequency 1882.5 MHz	Frequency 1914.3 MHz
25/ 1.4	QPSK	1	0	22.81	22.89	23.00
		1	5	22.74	22.97	22.97
		3	0	22.79	23.15	23.06
		3	3	22.82	22.98	22.98
		6	0	22.91	23.03	23.00
	16QAM	1	0	22.68	22.86	22.81
		1	5	22.53	22.90	23.00
		3	0	22.79	22.99	22.98
		3	3	22.71	23.07	23.00
		6	0	22.96	23.03	23.00

Band/BW	Modulation	RB Size	RB Offset	Low CH 26055	Mid CH 26365	High CH 26675
				Frequency 1851.5 MHz	Frequency 1882.5 MHz	Frequency 1913.5 MHz
25/ 3	QPSK	1	0	22.86	23.01	22.97
		1	5	22.76	23.02	22.94
		3	0	22.83	23.04	23.01
		3	3	22.92	23.01	23.06
		6	0	22.90	23.12	23.13
	16QAM	1	0	22.62	22.99	22.91
		1	5	22.57	22.86	22.92
		3	0	22.80	22.93	22.94
		3	3	22.77	22.96	23.02
		6	0	22.97	23.03	22.99

Band/BW	Modulation	RB Size	RB Offset	Low CH 26065	Mid CH 26365	High CH 26665
				Frequency 1852.5 MHz	Frequency 1882.5 MHz	Frequency 1912.5 MHz
25/ 5	QPSK	1	0	22.88	22.98	22.94
		1	5	22.78	22.99	23.01
		3	0	22.83	23.06	23.07
		3	3	22.85	23.08	23.09
		6	0	22.98	23.02	23.07
	16QAM	1	0	22.64	22.94	22.86
		1	5	22.58	22.95	22.87
		3	0	22.88	22.96	22.99
		3	3	22.75	23.02	23.01
		6	0	22.96	23.04	23.07

Band/BW	Modulation	RB Size	RB Offset	Low CH 26090	Mid CH 26365	High CH 26640
				Frequency 1855 MHz	Frequency 1882.5 MHz	Frequency 1910 MHz
25/ 10	QPSK	1	0	22.80	22.95	22.97
		1	5	22.72	23.00	23.02
		3	0	22.84	23.06	22.94
		3	3	22.85	23.06	23.05
		6	0	22.87	23.10	23.13
	16QAM	1	0	22.70	22.96	22.89
		1	5	22.63	22.91	22.92
		3	0	22.87	22.95	22.92
		3	3	22.70	23.00	22.91
		6	0	22.99	23.00	22.97

Band/BW	Modulation	RB Size	RB Offset	Low CH 26115	Mid CH 26365	High CH 26615
				Frequency 1857.5 MHz	Frequency 1882.5 MHz	Frequency 1907.5 MHz
25/ 15	QPSK	1	0	22.81	22.88	22.90
		1	5	22.80	23.02	22.93
		3	0	22.92	23.01	22.95
		3	3	22.93	23.11	23.03
		6	0	22.97	23.09	23.08
	16QAM	1	0	22.62	22.99	22.84
		1	5	22.63	22.87	23.01
		3	0	22.82	22.96	22.96
		3	3	22.83	23.07	23.02
		6	0	22.96	22.97	22.95

Band/BW	Modulation	RB Size	RB Offset	Low CH 26140	Mid CH 26365	High CH 26590
				Frequency 1860 MHz	Frequency 1882.5 MHz	Frequency 1905 MHz
25/ 20	QPSK	1	0	22.92	23.03	23.05
		1	5	22.82	23.12	23.07
		3	0	22.94	23.16	23.09
		3	3	22.96	23.12	23.13
		6	0	23.02	23.17	23.15
	16QAM	1	0	22.77	23.00	22.96
		1	5	22.68	22.97	23.02
		3	0	22.91	23.02	23.00
		3	3	22.85	23.08	23.05
		6	0	23.01	23.05	23.09

N-IOT

LTE Band 2						
Sub-carrier Spacing (KHz)	Modulation	RB Size	RB Offset	Low	Mid	High
		Channel		18602	18900	19198
		Frequency (MHz)		1850.2	1880	1909.8
3.75	BPSK	1	0	22.68	22.92	22.89
		1	47	22.74	23.02	22.91
	QPSK	1	0	22.64	23.01	22.88
		1	47	22.71	22.99	22.90
15	BPSK	1	0	22.69	22.98	22.91
		1	11	22.57	22.91	22.88
	QPSK	1	0	22.65	22.90	22.87
		1	11	22.64	22.99	22.90
		12	0	21.49	21.86	21.73

LTE Band 25						
Sub-carrier Spacing (KHz)	Modulation	RB Size	RB Offset	Low	Mid	High
		Channel		26042	26365	26688
		Frequency (MHz)		1850.2	1882.5	1914.8
3.75	BPSK	1	0	22.61	22.87	22.85
		1	47	22.62	22.89	22.88
	QPSK	1	0	22.59	22.94	22.89
		1	47	22.60	22.93	22.90
15	BPSK	1	0	22.68	22.98	22.85
		1	11	22.58	22.99	22.78
	QPSK	1	0	22.59	23.01	22.79
		1	11	22.58	22.99	22.78
		12	0	21.42	21.78	21.64



EIRP POWER (dBm)

LTE BAND 2

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	22.93	2.14	25.07	321.37	2
18900	1880	23	2.14	25.14	326.59	2
19193	1909.3	23.12	2.14	25.26	335.74	2

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	22.96	2.14	25.1	323.59	2
18900	1880	23.01	2.14	25.15	327.34	2
19193	1909.3	22.98	2.14	25.12	325.09	2

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	22.96	2.14	25.1	323.59	2
18900	1880	23.13	2.14	25.27	336.51	2
19185	1908.5	23.1	2.14	25.24	334.2	2

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	22.96	2.14	25.1	323.59	2
18900	1880	23.02	2.14	25.16	328.1	2
19185	1908.5	22.96	2.14	25.1	323.59	2



CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	22.9	2.14	25.04	319.15	2
18900	1880	23.11	2.14	25.25	334.97	2
19175	1907.5	23.07	2.14	25.21	331.89	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	22.91	2.14	25.05	319.89	2
18900	1880	23.01	2.14	25.15	327.34	2
19175	1907.5	22.98	2.14	25.12	325.09	2

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855	22.93	2.14	25.07	321.37	2
18900	1880	23.11	2.14	25.25	334.97	2
19150	1905	23.14	2.14	25.28	337.29	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855	22.9	2.14	25.04	319.15	2
18900	1880	23.01	2.14	25.15	327.34	2
19150	1905	22.95	2.14	25.09	322.85	2

**CHANNEL BANDWIDTH: 15MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	22.95	2.14	25.09	322.85	2
18900	1880	23.13	2.14	25.27	336.51	2
19125	1902.5	23.13	2.14	25.27	336.51	2

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	22.91	2.14	25.05	319.89	2
18900	1880	23.05	2.14	25.19	330.37	2
19125	1902.5	23.06	2.14	25.2	331.13	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	23.02	2.14	25.16	328.1	2
18900	1880	23.15	2.14	25.29	338.06	2
19100	1900	23.17	2.14	25.31	339.63	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	22.98	2.14	25.12	325.09	2
18900	1880	23.09	2.14	25.23	333.43	2
19100	1900	23.07	2.14	25.21	331.89	2



LTE BAND 25

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26047	1850.7	22.91	2.14	25.05	319.89	2
26365	1882.5	23.15	2.14	25.29	338.06	2
26683	1914.3	23.06	2.14	25.2	331.13	2

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26047	1850.7	22.96	2.14	25.1	323.59	2
26365	1882.5	23.07	2.14	25.21	331.89	2
26683	1914.3	23	2.14	25.14	326.59	2

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26055	1851.5	22.92	2.14	25.06	320.63	2
26365	1882.5	23.12	2.14	25.26	335.74	2
26675	1913.5	23.13	2.14	25.27	336.51	2

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26055	1851.5	22.97	2.14	25.11	324.34	2
26365	1882.5	23.03	2.14	25.17	328.85	2
26675	1913.5	23.02	2.14	25.16	328.1	2



CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26065	1852.5	22.98	2.14	25.12	325.09	2
26365	1882.5	23.08	2.14	25.22	332.66	2
26665	1912.5	23.09	2.14	25.23	333.43	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26065	1852.5	22.96	2.14	25.1	323.59	2
26365	1882.5	23.04	2.14	25.18	329.61	2
26665	1912.5	23.07	2.14	25.21	331.89	2

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26090	1855	22.87	2.14	25.01	316.96	2
26365	1882.5	23.1	2.14	25.24	334.2	2
26640	1910	23.13	2.14	25.27	336.51	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26090	1855	22.99	2.14	25.13	325.84	2
26365	1882.5	23	2.14	25.14	326.59	2
26640	1910	22.97	2.14	25.11	324.34	2



CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26115	1857.5	22.97	2.14	25.11	324.34	2
26365	1882.5	23.11	2.14	25.25	334.97	2
26615	1907.5	23.08	2.14	25.22	332.66	2

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26115	1857.5	22.96	2.14	25.1	323.59	2
26365	1882.5	23.07	2.14	25.21	331.89	2
26615	1907.5	23.02	2.14	25.16	328.1	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26140	1860	23.02	2.14	25.16	328.1	2
26365	1882.5	23.17	2.14	25.31	339.63	2
26590	1905	23.15	2.14	25.29	338.06	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26140	1860	23.01	2.14	25.15	327.34	2
26365	1882.5	23.08	2.14	25.22	332.66	2
26590	1905	23.09	2.14	25.23	333.43	2

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



**BUREAU
VERITAS**

Test Report No.: W7L-240204W001RF02

NB-IOT

LTE B2 3.75KHz

CHANNEL BANDWIDTH: BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
18602	1850.2	22.74	2.14	24.88	307.61	2
18900	1880	23.02	2.14	25.16	328.1	2
19198	1909.8	22.91	2.14	25.05	319.89	2

CHANNEL BANDWIDTH: QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
18602	1850.2	22.71	2.14	24.85	305.49	2
18900	1880	23.01	2.14	25.15	327.34	2
19198	1909.8	22.9	2.14	25.04	319.15	2

LTE B2 15KHz

CHANNEL BANDWIDTH: BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
18602	1850.2	22.69	2.14	24.83	304.09	2
18900	1880	22.98	2.14	25.12	325.09	2
19198	1909.8	22.91	2.14	25.05	319.89	2

CHANNEL BANDWIDTH: QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
18602	1850.2	22.65	2.14	24.79	301.3	2
18900	1880	22.99	2.14	25.13	325.84	2
19198	1909.8	22.9	2.14	25.04	319.15	2

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

NB-IOT

LTE B25 3.75KHz

CHANNEL BANDWIDTH: BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26042	1850.2	22.62	2.14	24.76	299.23	2
26365	1882.5	22.89	2.14	25.03	318.42	2
26688	1914.8	22.88	2.14	25.02	317.69	2

CHANNEL BANDWIDTH: QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26042	1850.2	22.6	2.14	24.74	297.85	2
26365	1882.5	22.94	2.14	25.08	322.11	2
26688	1914.8	22.9	2.14	25.04	319.15	2

LTE B25 15KHz

CHANNEL BANDWIDTH: BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26042	1850.2	22.68	2.14	24.82	303.39	2
26365	1882.5	22.99	2.14	25.13	325.84	2
26688	1914.8	22.85	2.14	24.99	315.5	2

CHANNEL BANDWIDTH: QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26042	1850.2	22.59	2.14	24.73	297.17	2
26365	1882.5	23.01	2.14	25.15	327.34	2
26688	1914.8	22.79	2.14	24.93	311.17	2

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

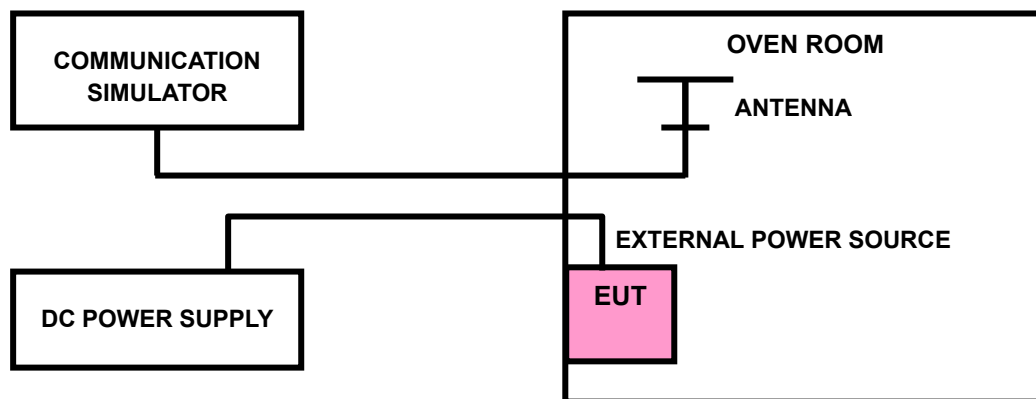



Test Report No.: W7L-240204W001RF02

3.2.4 TEST RESULTS

Please Refer to Appendix Of this test report.

Note: VL = Low voltage(2.5V); VN/NV = Normal voltage(3.8V); VH = High voltage(4.5V);
NT = Normal temperature (25°C)




3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

3.3.2 TEST SETUP

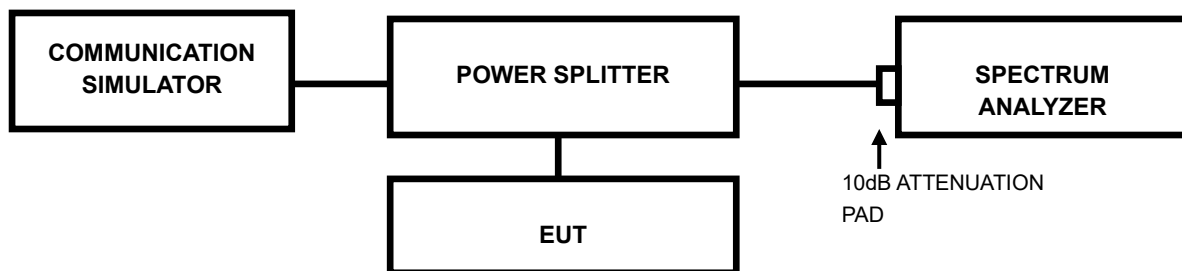

3.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



Test Report No.: W7L-240204W001RF02

3.3.4 TEST RESULTS

Please Refer to Appendix Of this test report.




3.4 BAND EDGE MEASUREMENTC

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

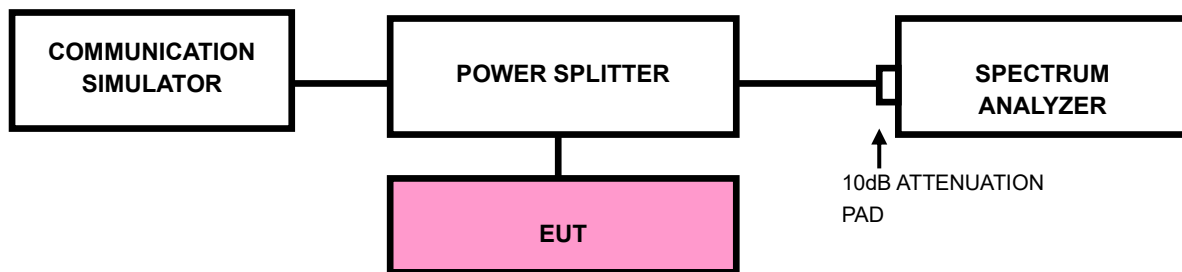

3.4.3 TEST PROCEDURES

- a) All measurements were done at low and high operational frequency range
- b) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- c) Tune the analyzer to the nominal center frequency of the emission bandwidth (EBW)
- d) .Set the resolution bandwidth (RBW) $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
- e) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- f) Set the video bandwidth (VBW) to $\geq 3 \times$ RBW.
- g) Select the average power (RMS) display detector.
- h) Set the number of measurement points to ≥ 1001 .
- i) Use auto-coupled sweep time.
- j) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- k) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- l) Record the max trace plot into the test report.



Test Report No.: W7L-240204W001RF02

3.4.4. TEST RESULTS

Please Refer to Appendix Of this test report.



3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30MHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

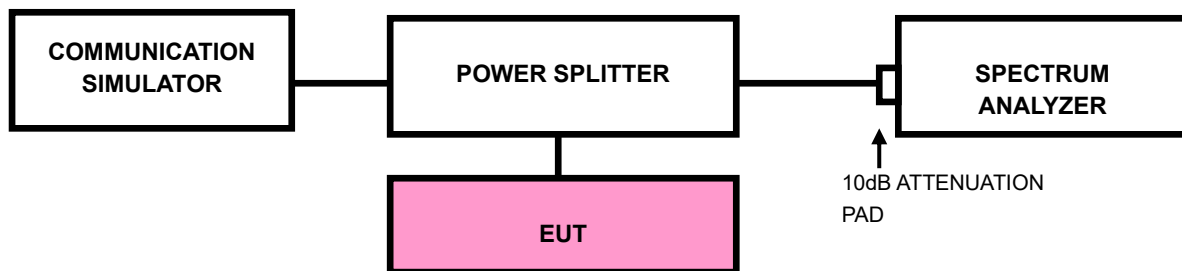



Test Report No.: W7L-240204W001RF02

3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix Of this test report.

3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

3.6.3 DEVIATION FROM TEST STANDARD


No deviation

3.6.4 TEST SETUP

< Frequency Range below 30MHz >

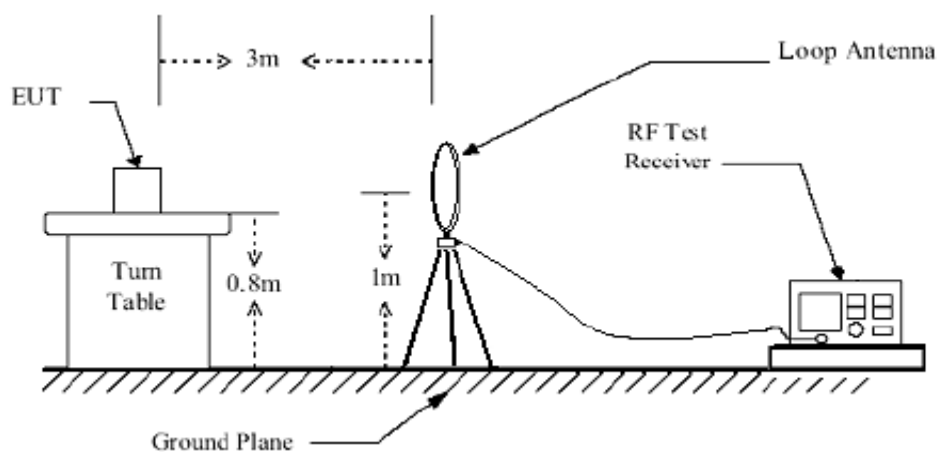

< Frequency Range 30MHz~1GHz >

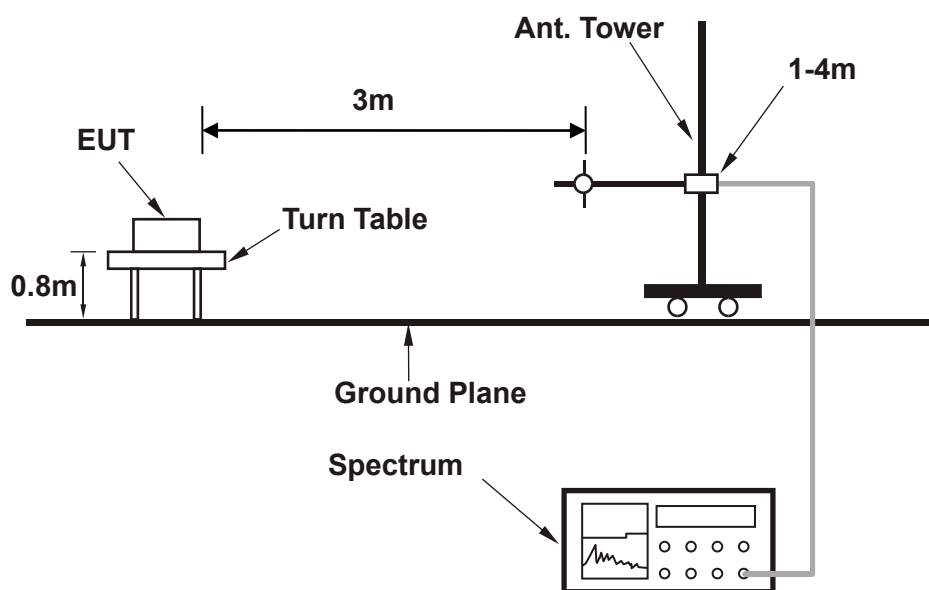




BUREAU
VERITAS

Test Report No.: W7L-240204W001RF02

<Frequency Range above 1GHz>

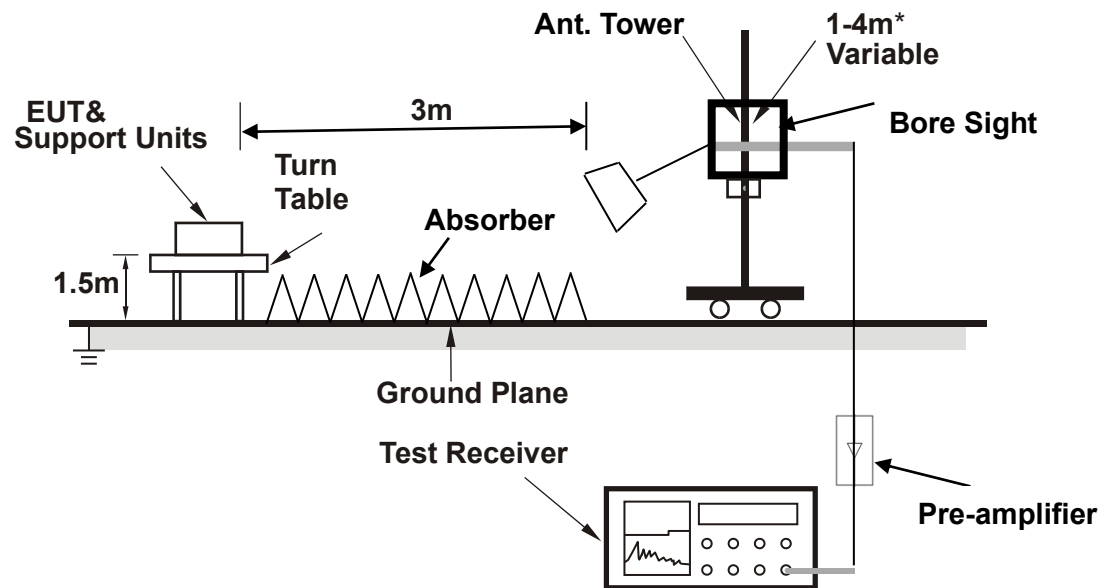

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: W7L-240204W001RF02

3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

NB-IOT LTE Band25:

CHANNEL BANDWIDTH: QPSK


MODE	TX channel 26688	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	46.500	-64.84	-13.00	51.84	2.98	H	236.2	1.00
1	82.300	-65.74	-13.00	52.74	-3.44	H	135.8	1.00
1	154.000	-64.57	-13.00	51.57	-5.49	H	123.8	2.00
1	237.400	-62.05	-13.00	49.05	2.46	H	236.2	1.00
1	301.650	-62.00	-13.00	49.00	5.43	H	236.2	1.00
1	377.850	-66.03	-13.00	53.03	6.94	H	225.5	2.00

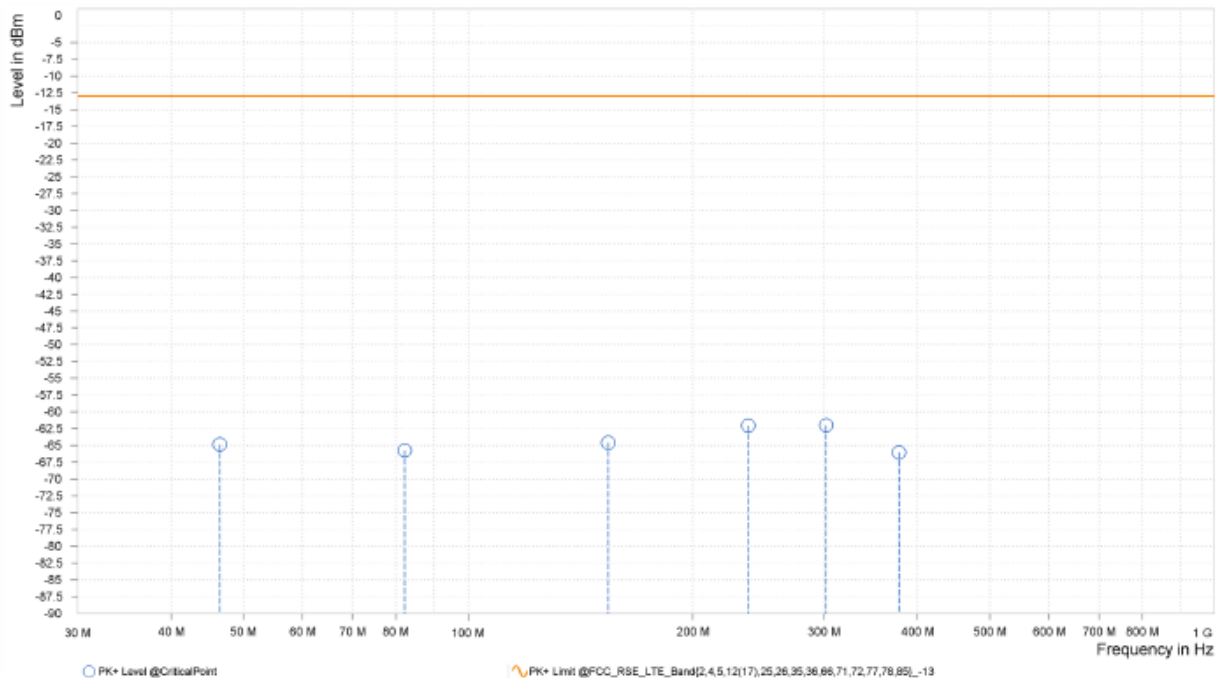

MODE	TX channel 26688	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	51.750	-64.36	-13.00	51.36	5.29	V	133.4	1.00
1	98.650	-69.15	-13.00	56.15	4.92	V	359	2.00
1	154.150	-73.24	-13.00	60.24	-2.42	V	4.5	1.00
1	198.000	-70.98	-13.00	57.98	1.59	V	236.2	1.00
1	272.800	-68.31	-13.00	55.31	2.89	V	236.2	1.00
1	340.250	-69.40	-13.00	56.40	5.72	V	183.7	2.00

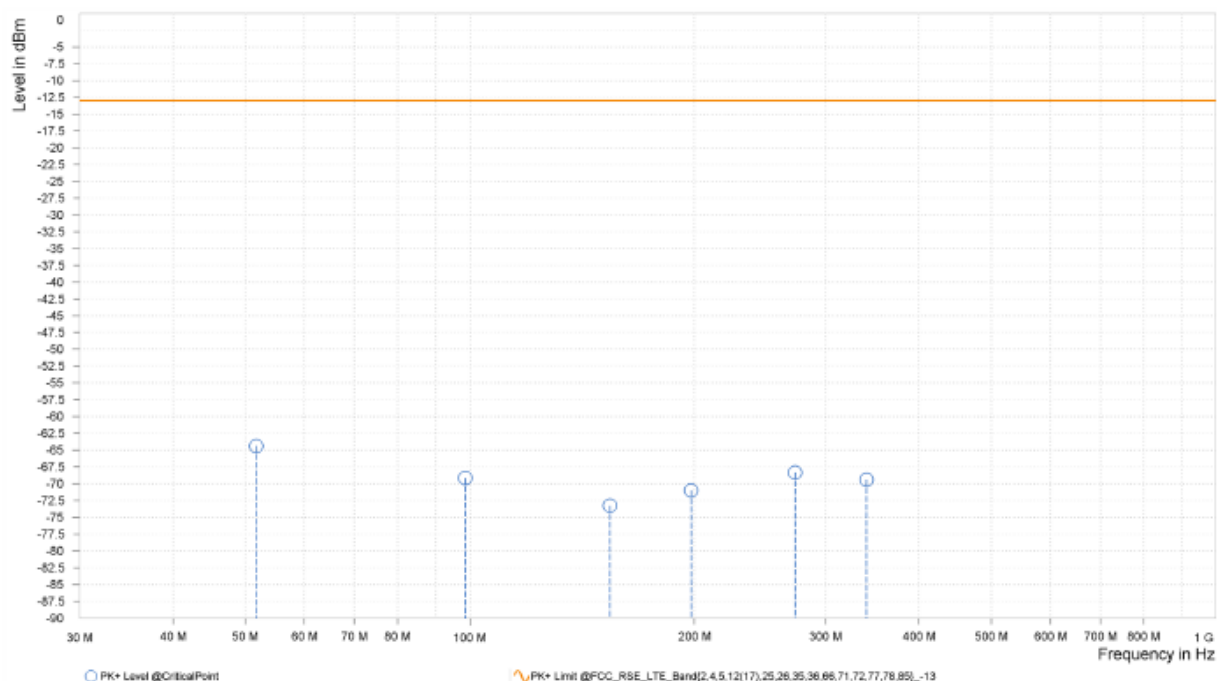



BUREAU
VERITAS

Test Report No.: W7L-240204W001RF02

ABOVE 1GHz DATA

Note: For higher frequency, the emission is too low to be detected.


WORST-CASE DATA

CAT-M LTE Band 25

CHANNEL BANDWIDTH: 1.4MHz / QPSK


MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	3,763.740	-46.28	-13.00	33.28	15.48	H	1	2.00
2	5,642.000	-35.74	-13.00	22.74	18.58	H	327.1	1.00

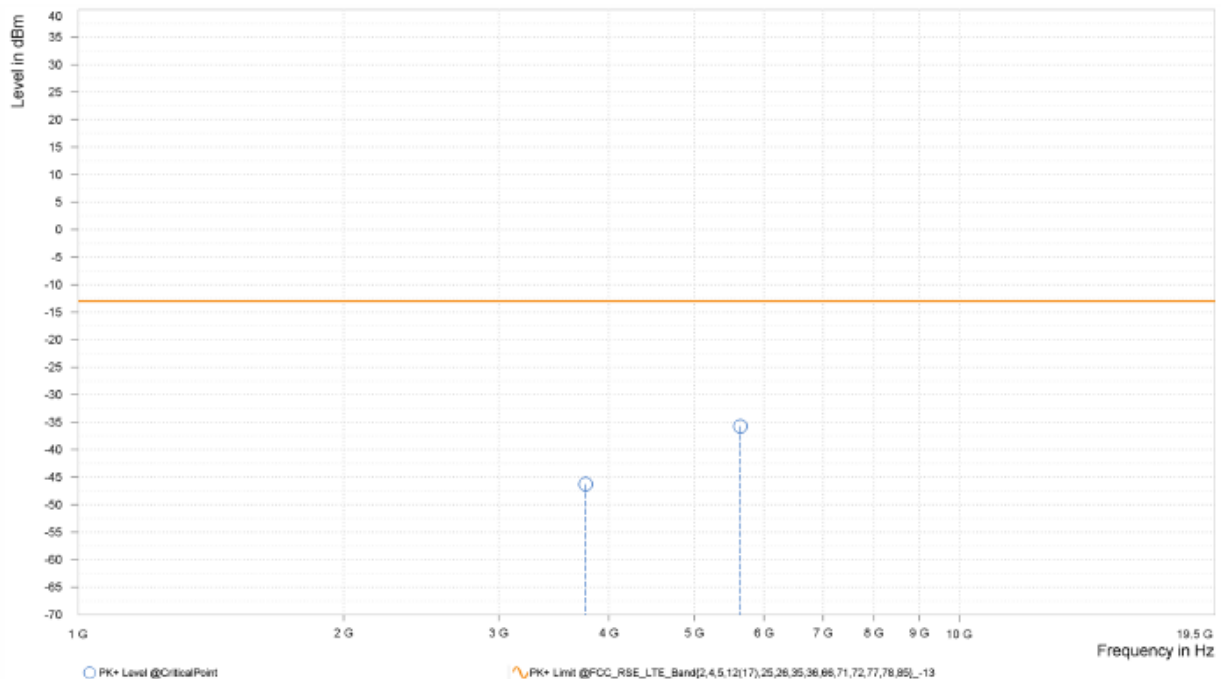

MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	3,763.740	-46.63	-13.00	33.63	15.16	V	359	2.00
2	5,642.500	-30.80	-13.00	17.80	18.32	V	50.9	2.00

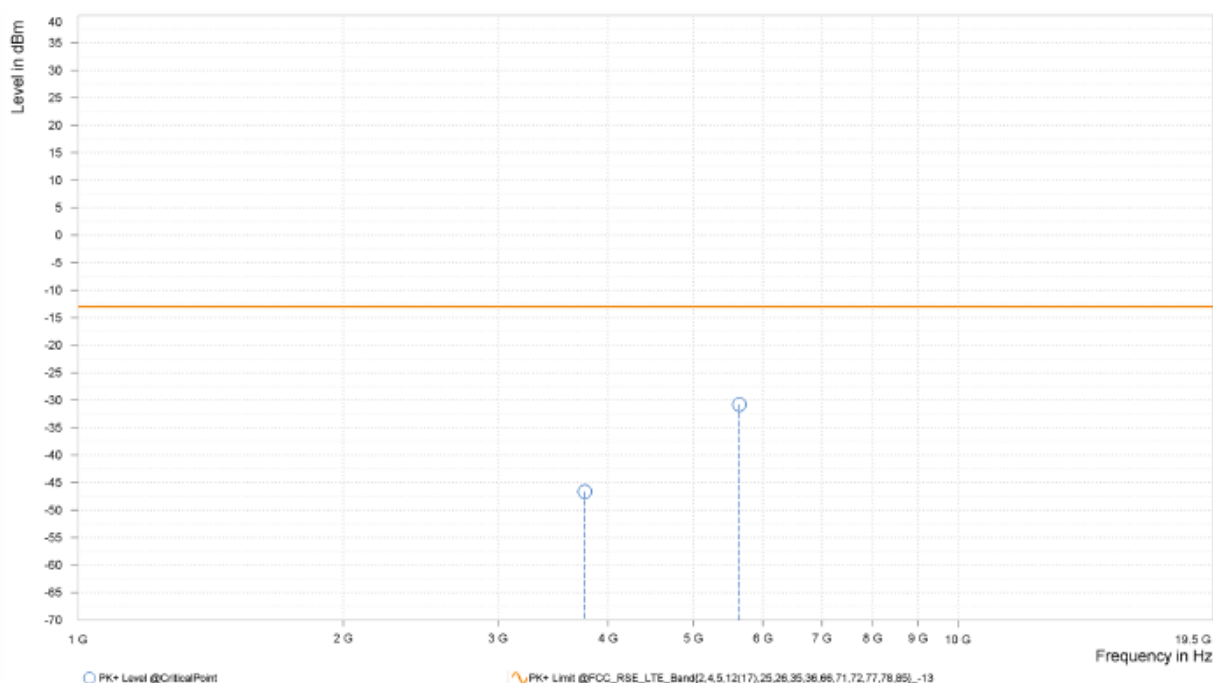




BUREAU
VERITAS

Test Report No.: W7L-240204W001RF02

CHANNEL BANDWIDTH: 3MHz / QPSK


MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	3,762.300	-46.38	-13.00	33.38	15.47	H	359	2.00
2	5,643.450	-41.91	-13.00	28.91	18.59	H	359.1	1.00

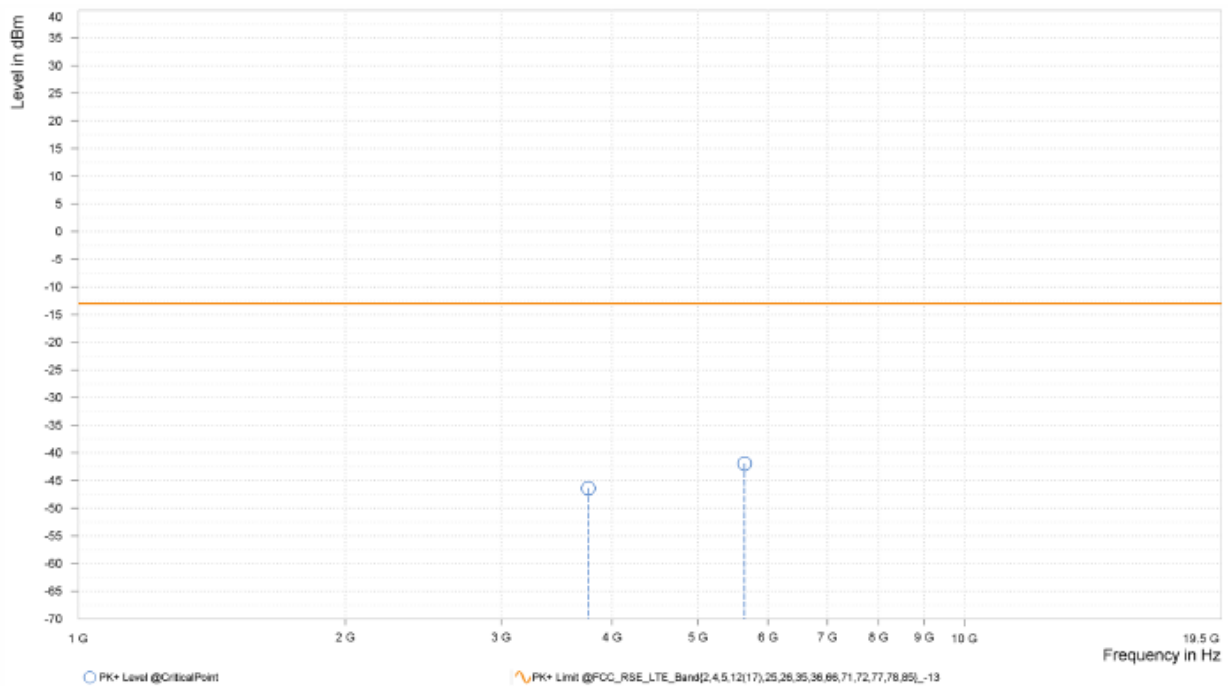

MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	3,762.300	-45.49	-13.00	32.49	15.16	V	359	2.00
2	5,654.000	-36.27	-13.00	23.27	18.38	V	304.4	1.00

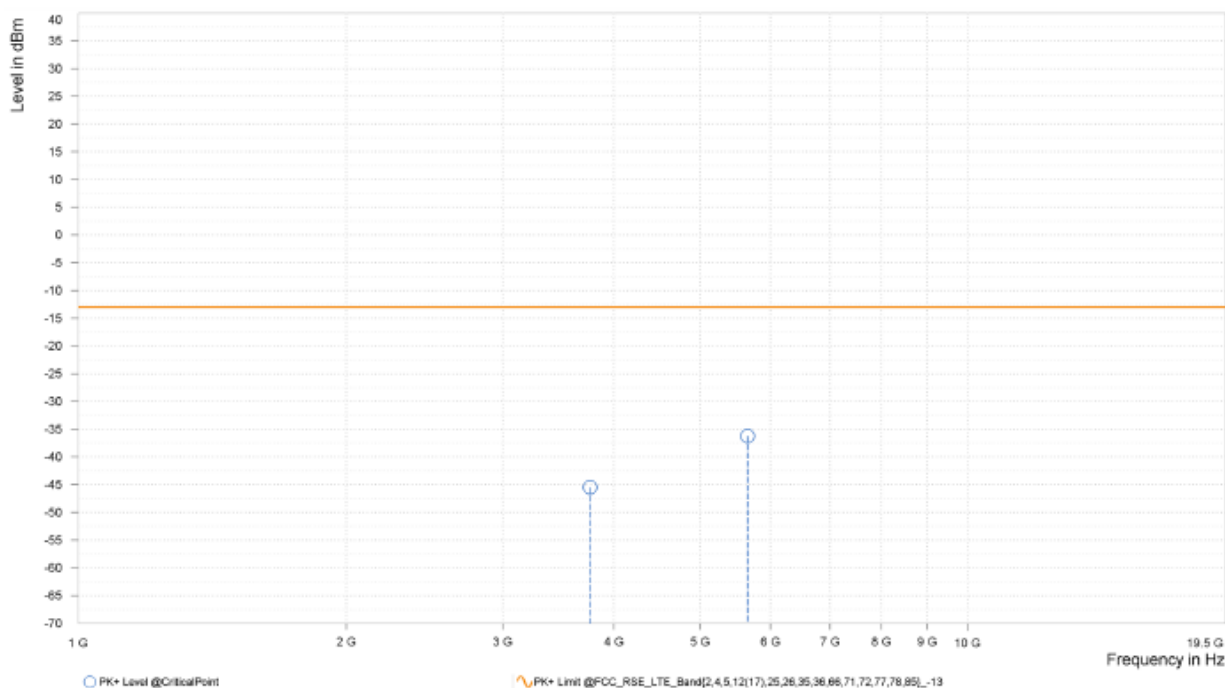


CHANNEL BANDWIDTH: 5MHz / QPSK

CH26365


MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	3,760.500	-46.92	-13.00	33.92	15.45	H	266	2.00
2	5,640.750	-42.66	-13.00	29.66	18.58	H	359	2.00

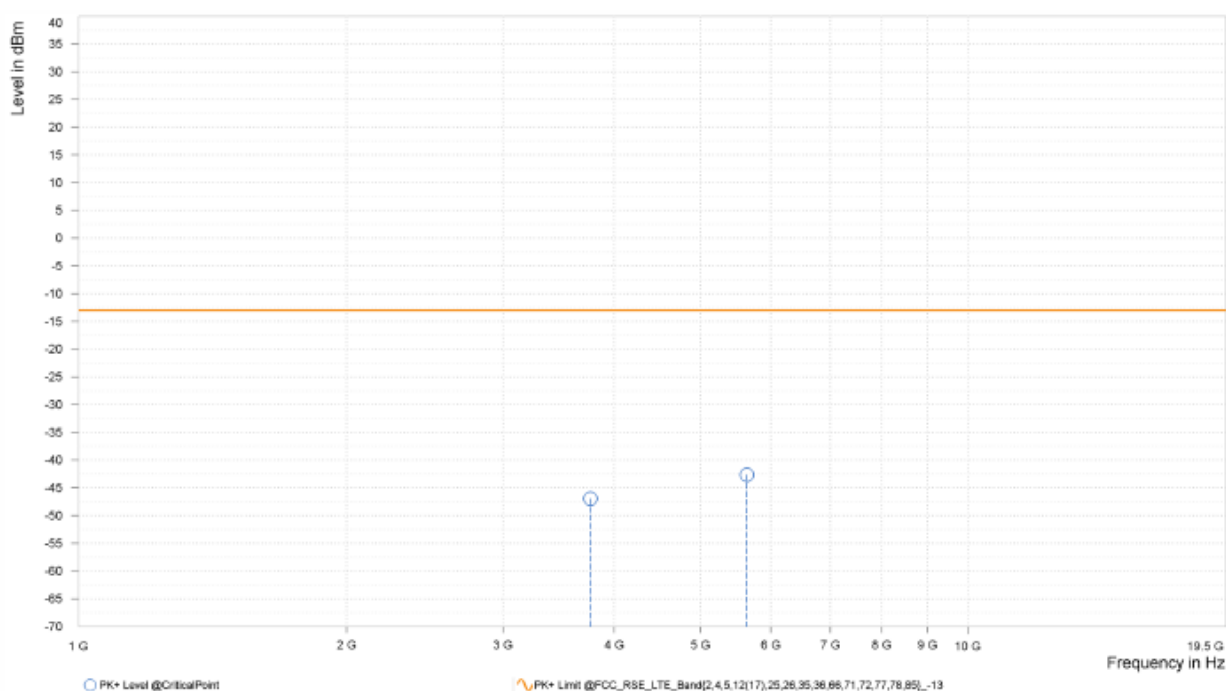

MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	3,760.500	-46.38	-13.00	33.38	15.14	V	0.9	2.00
2	5,643.500	-35.19	-13.00	22.19	18.33	V	359	1.00

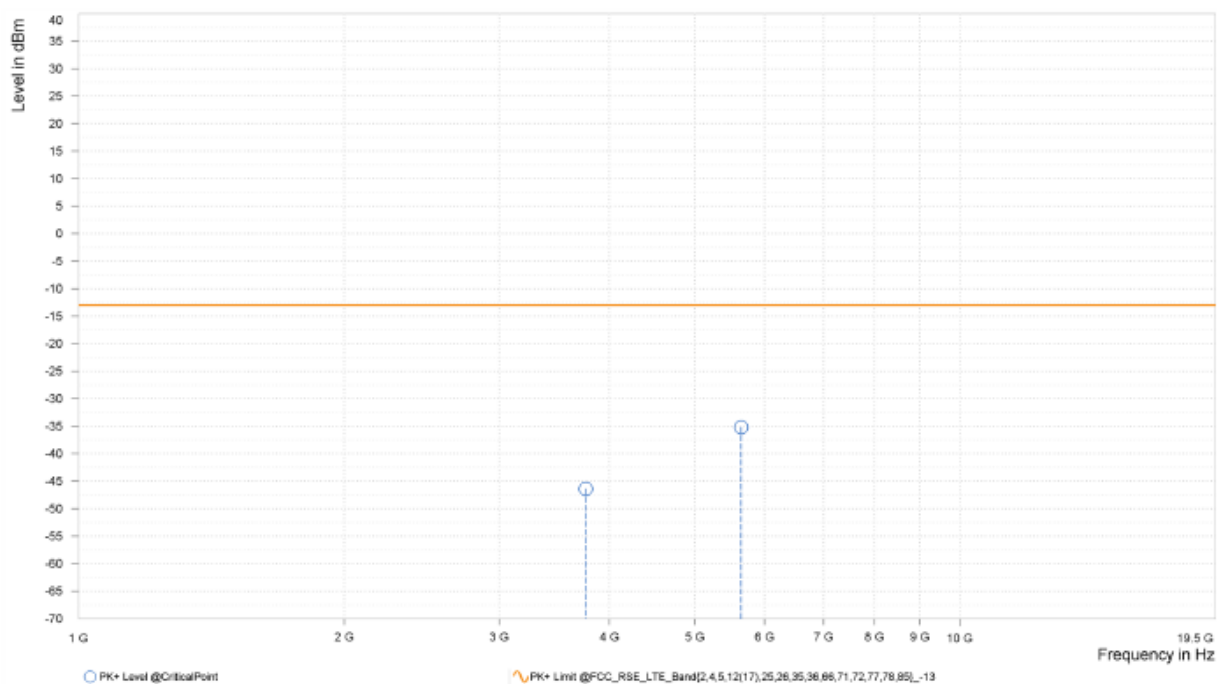


CHANNEL BANDWIDTH: 10MHz / QPSK

CH26090


MODE	TX channel 26090	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	3,701.000	-48.61	-13.00	35.61	14.88	H	1	1.00
2	5,554.000	-39.32	-13.00	26.32	18.31	H	273.3	1.00

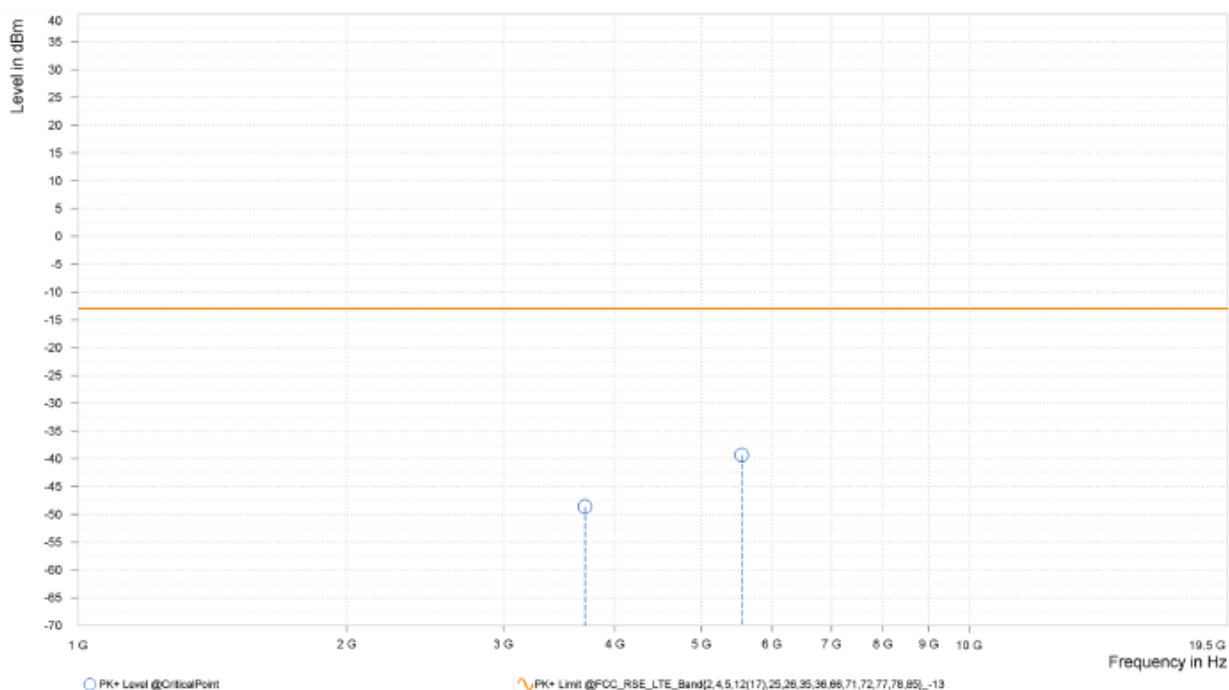


MODE	TX channel 26090	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	3,701.000	-49.21	-13.00	36.21	14.70	V	91.7	1.00
2	5,554.500	-39.83	-13.00	26.83	18.06	V	1	2.00

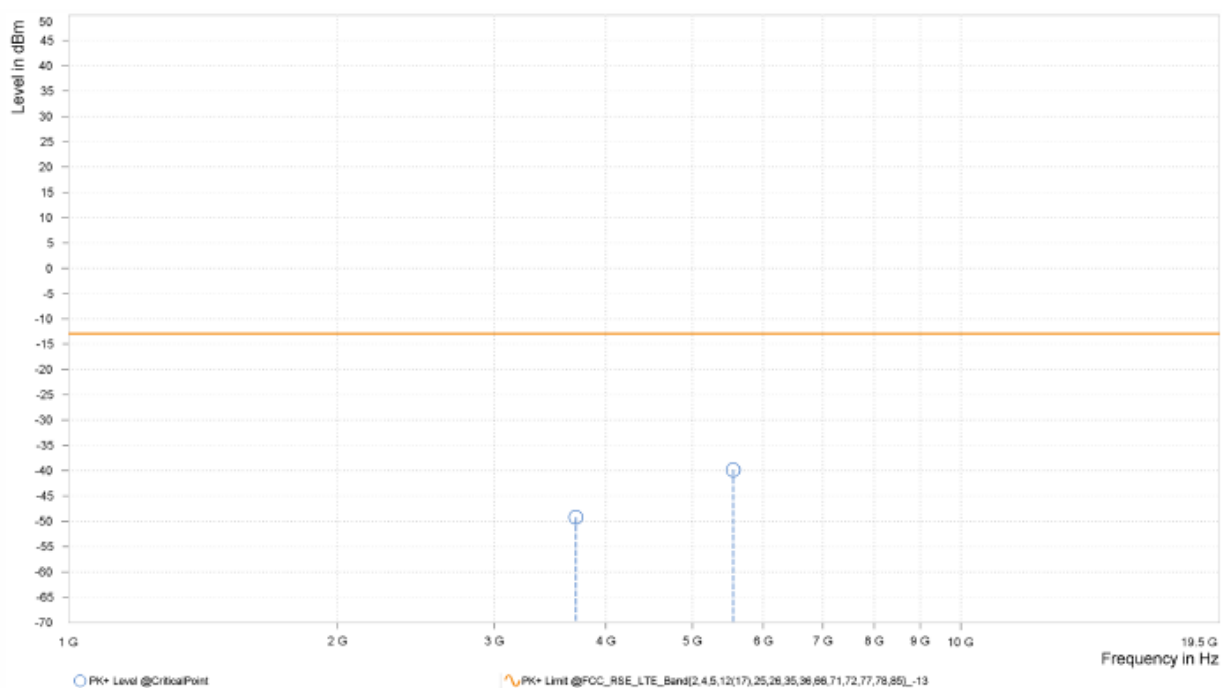


MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	3,756.000	-47.15	-13.00	34.15	15.40	H	1	2.00
2	5,634.000	-42.69	-13.00	29.69	18.54	H	94	1.00

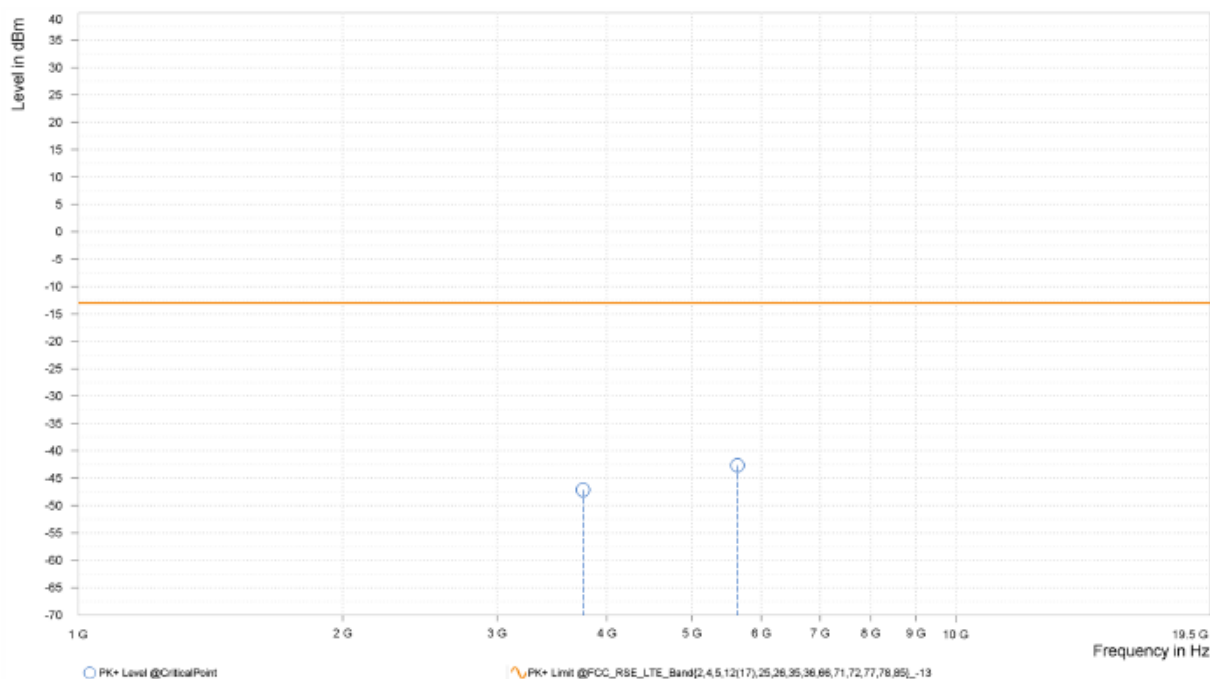

MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	3,756.000	-46.85	-13.00	33.85	15.10	V	0.9	2.00
2	5,642.500	-29.63	-13.00	16.63	18.32	V	359	2.00

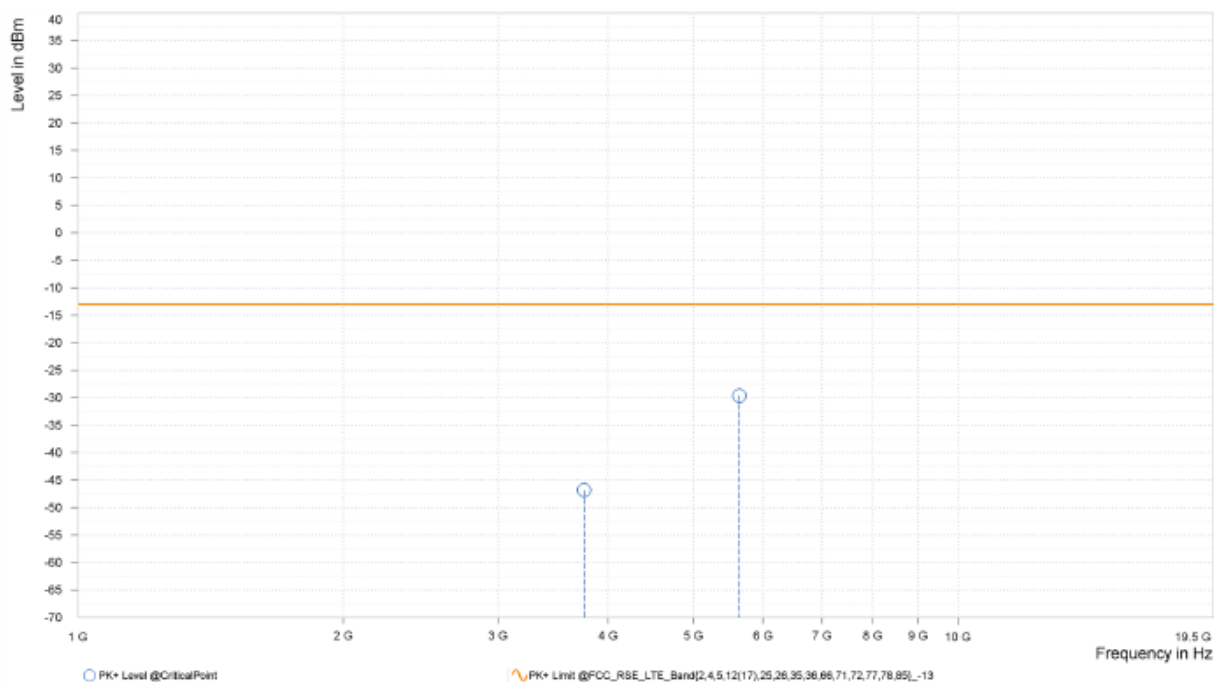




BUREAU
VERITAS

Test Report No.: W7L-240204W001RF02

CH26640


MODE	TX channel 26640	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	3,811.000	-48.52	-13.00	35.52	15.84	H	359	2.00
2	5,716.500	-42.93	-13.00	29.93	18.93	H	359	2.00

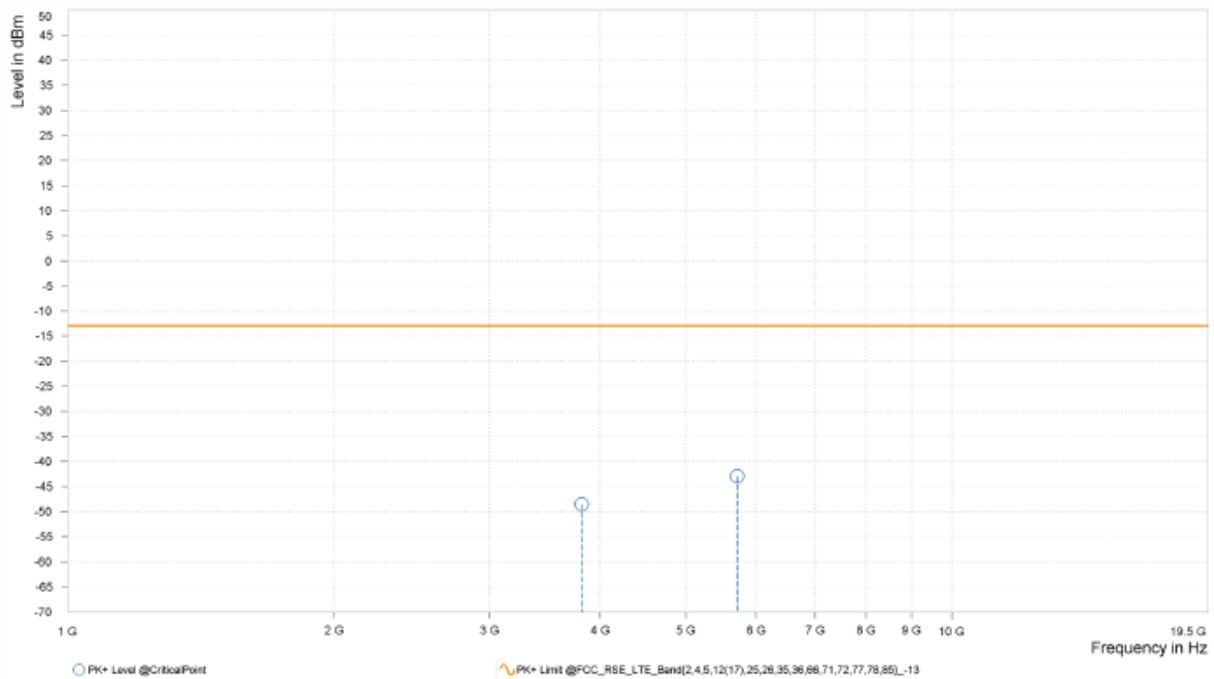

MODE	TX channel 26640	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	3,811.000	-47.40	-13.00	34.40	15.54	V	359	2.00
2	5,716.500	-44.76	-13.00	31.76	18.67	V	1	1.00

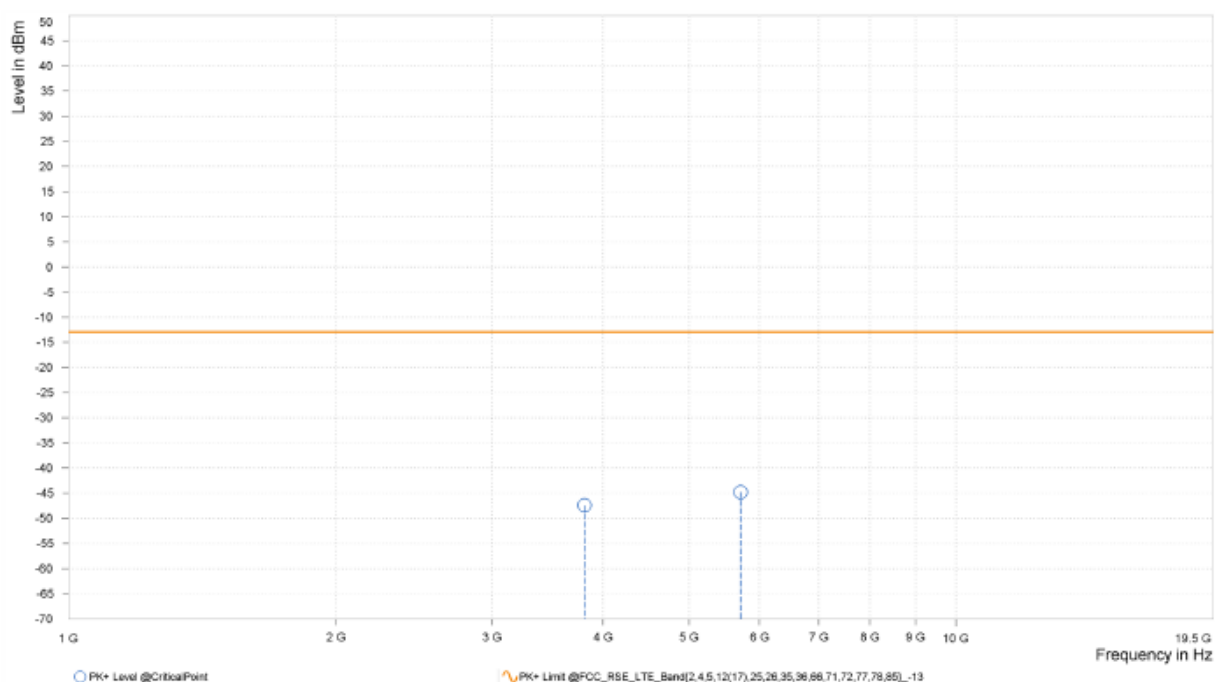

CHANNEL BANDWIDTH: 15MHz / QPSK


MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	3,751.500	-46.78	-13.00	33.78	15.35	H	359	2.00
2	5,627.250	-42.68	-13.00	29.68	18.50	H	359	2.00

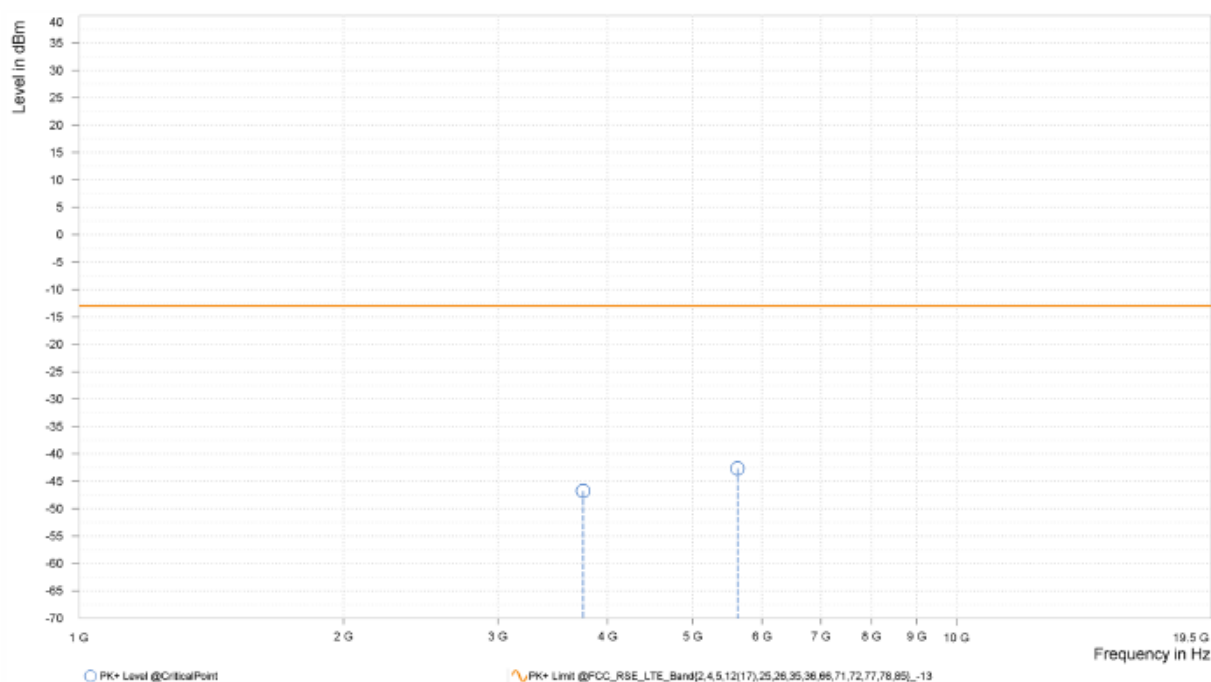

MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	3,751.500	-45.96	-13.00	32.96	15.05	V	0.9	2.00
2	5,627.250	-42.04	-13.00	29.04	18.24	V	80.8	2.00

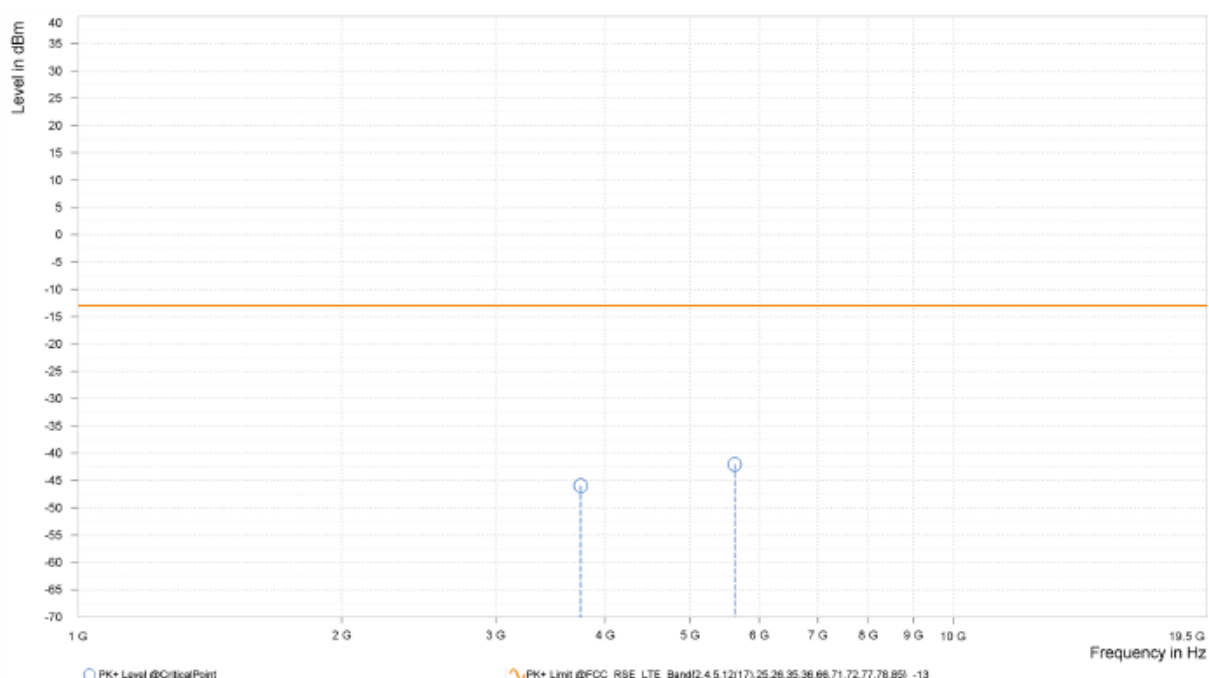

CHANNEL BANDWIDTH: 20MHz / QPSK


MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	3,747.000	-46.98	-13.00	33.98	15.29	H	0.9	2.00
2	5,623.000	-34.19	-13.00	21.19	18.48	H	79.6	2.00

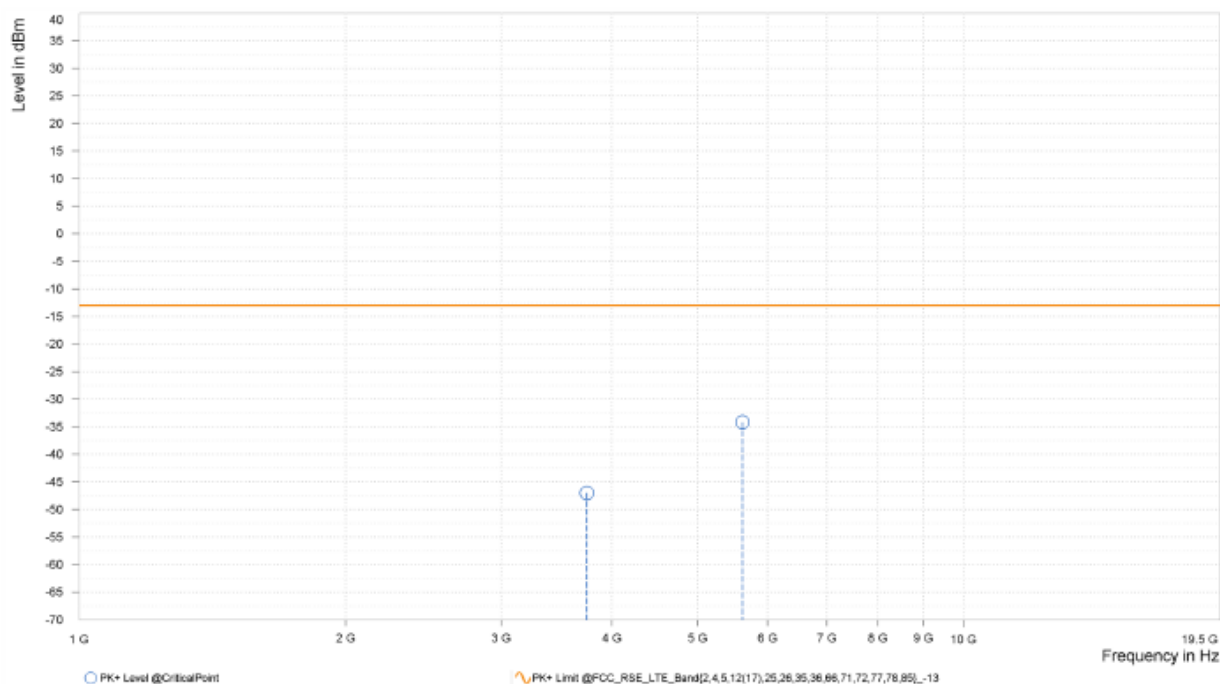

MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	3,747.000	-46.57	-13.00	33.57	15.01	V	359.1	1.00
2	5,624.500	-34.66	-13.00	21.66	18.23	V	359	2.00

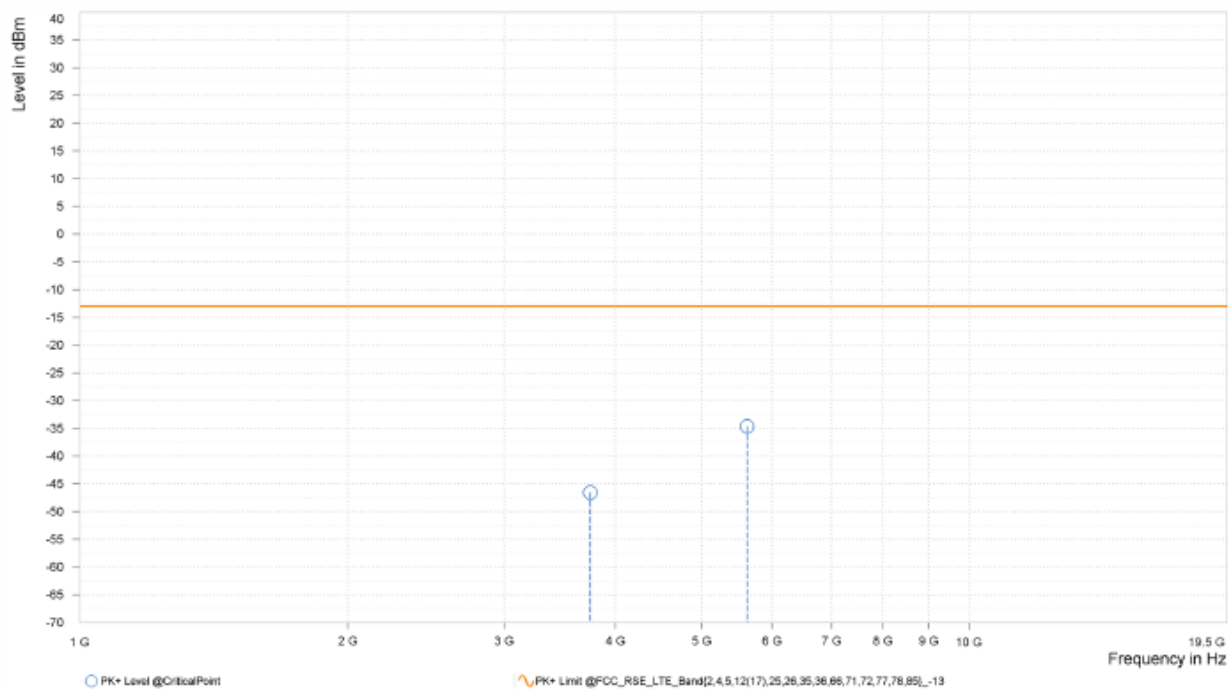


NB-IOT LTE Band 25

CHANNEL BANDWIDTH: QPSK


MODE	TX channel 26042	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,701.000	-36.27	-13.00	23.27	30.20	H	40.2	2.00
4	5,550.000	-40.42	-13.00	27.42	33.46	H	1	1.00

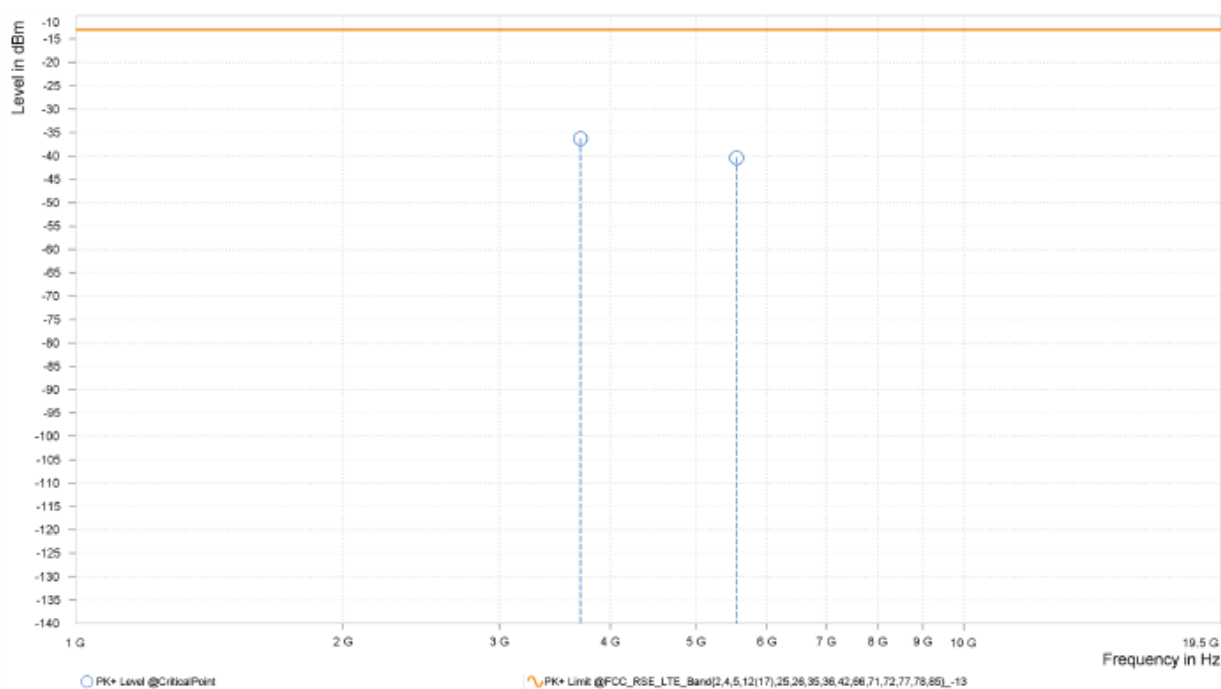

MODE	TX channel 26042	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,700.000	-41.68	-13.00	28.68	30.80	V	359	2.00
4	5,550.000	-38.12	-13.00	25.12	34.15	V	206.6	2.00

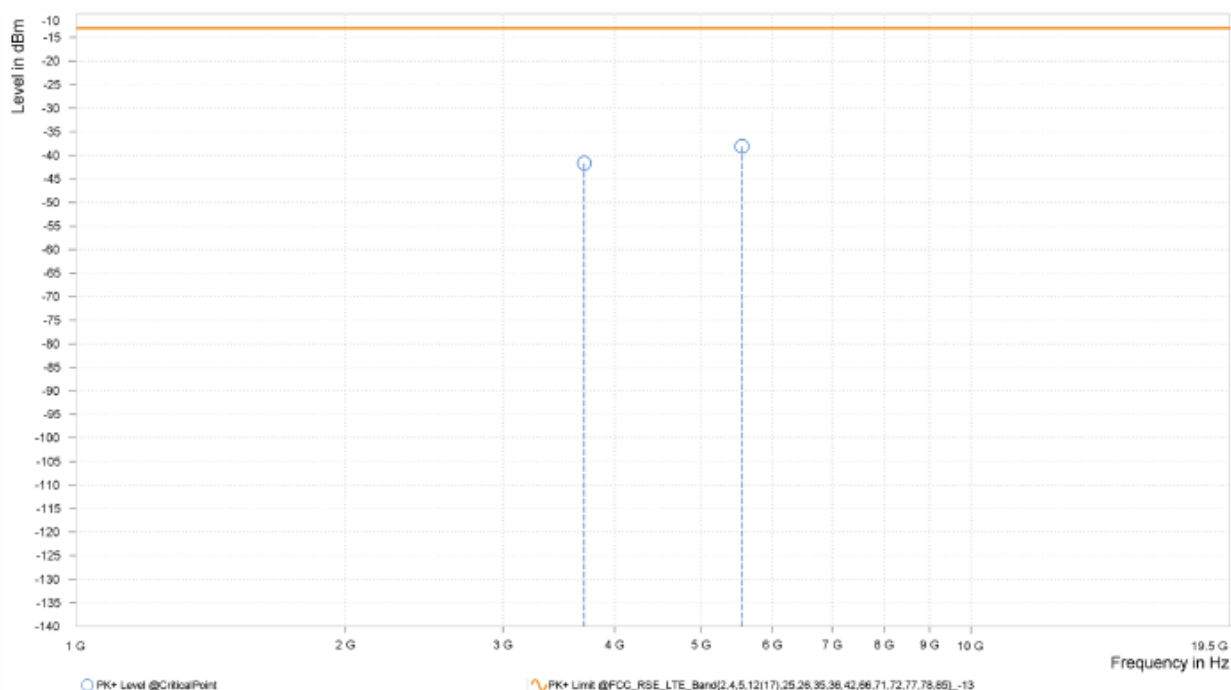




BUREAU
VERITAS

Test Report No.: W7L-240204W001RF02

CHANNEL BANDWIDTH: QPSK


MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	3,765.000	-42.44	-13.00	29.44	15.50	H	279.3	1.00
2	5,647.500	-44.93	-13.00	31.93	18.61	H	1	2.00

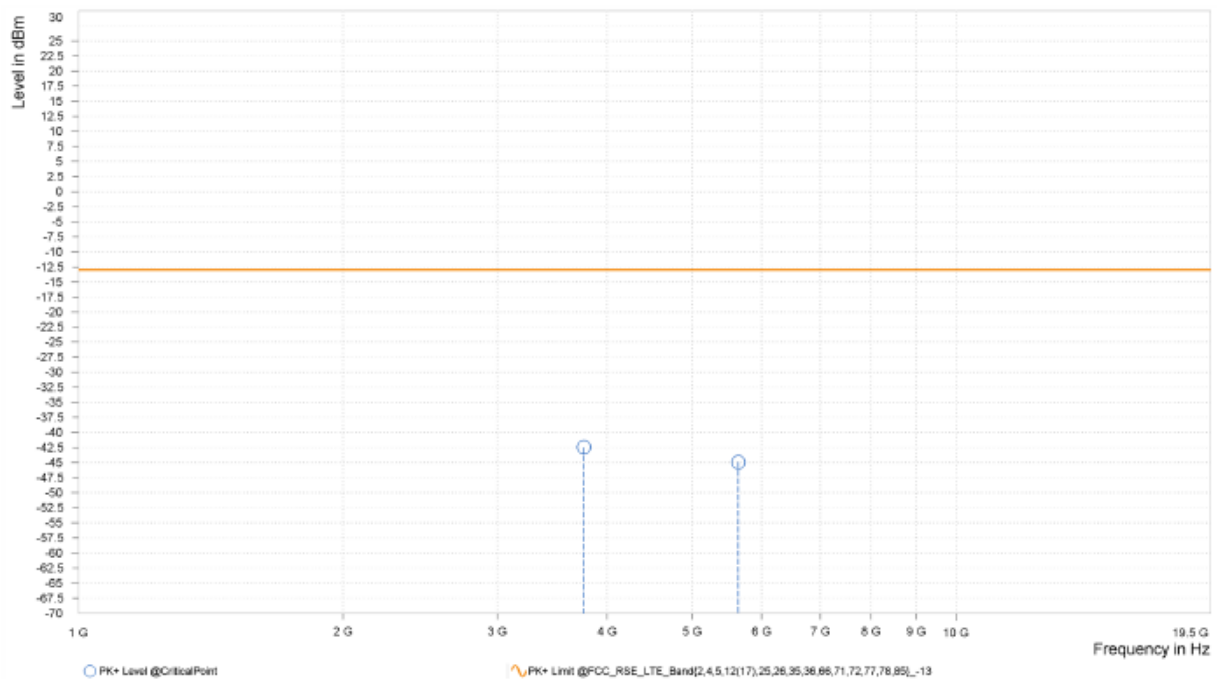

MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	3,765.000	-47.94	-13.00	34.94	15.18	V	359	2.00
2	5,647.500	-44.80	-13.00	31.80	18.35	V	267.2	2.00

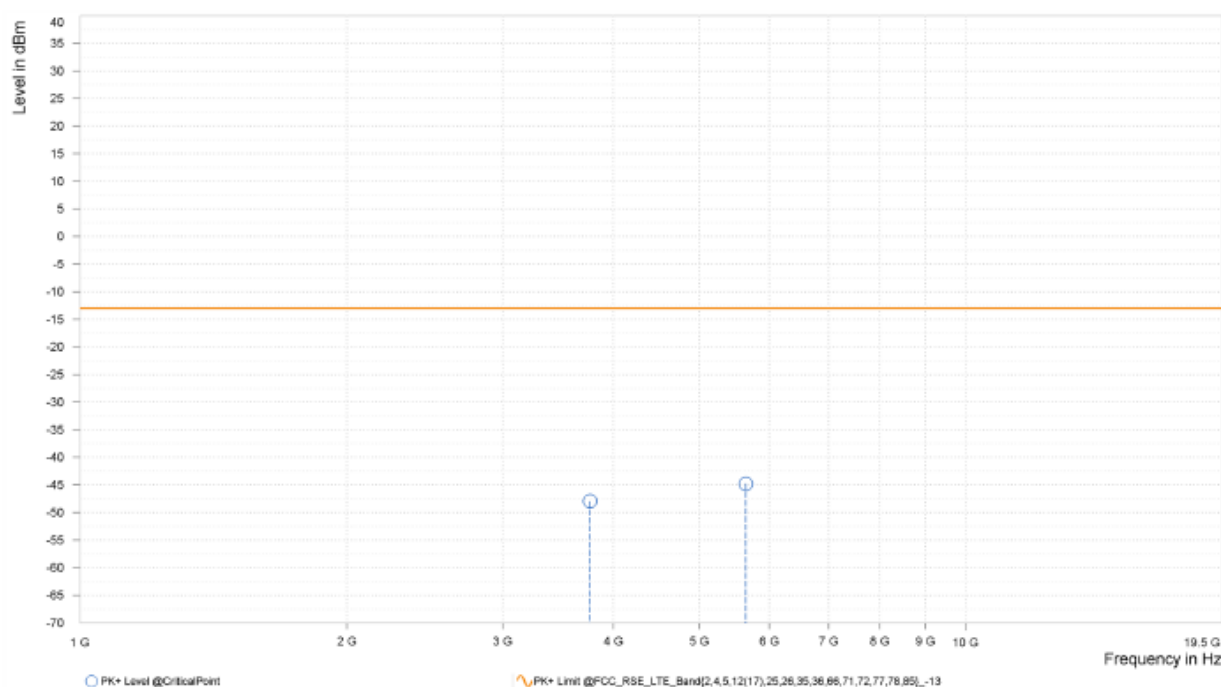


CHANNEL BANDWIDTH: QPSK

CH 26688


MODE	TX channel 26688	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,829.800	-30.09	-13.00	17.09	31.26	H	41.5	2.00
4	5,744.700	-37.25	-13.00	24.25	34.14	H	41.5	2.00

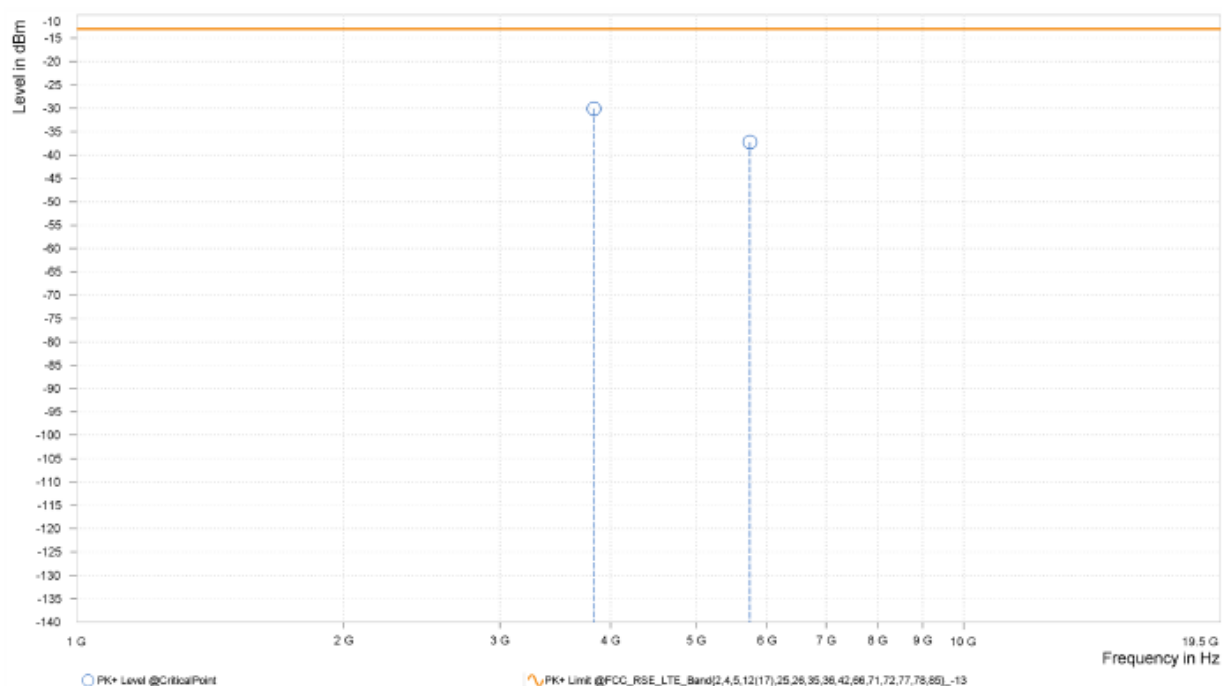

MODE	TX channel 26688	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,829.800	-40.33	-13.00	27.33	31.61	V	206.5	2.00
4	5,744.700	-37.85	-13.00	24.85	34.61	V	52.3	2.00

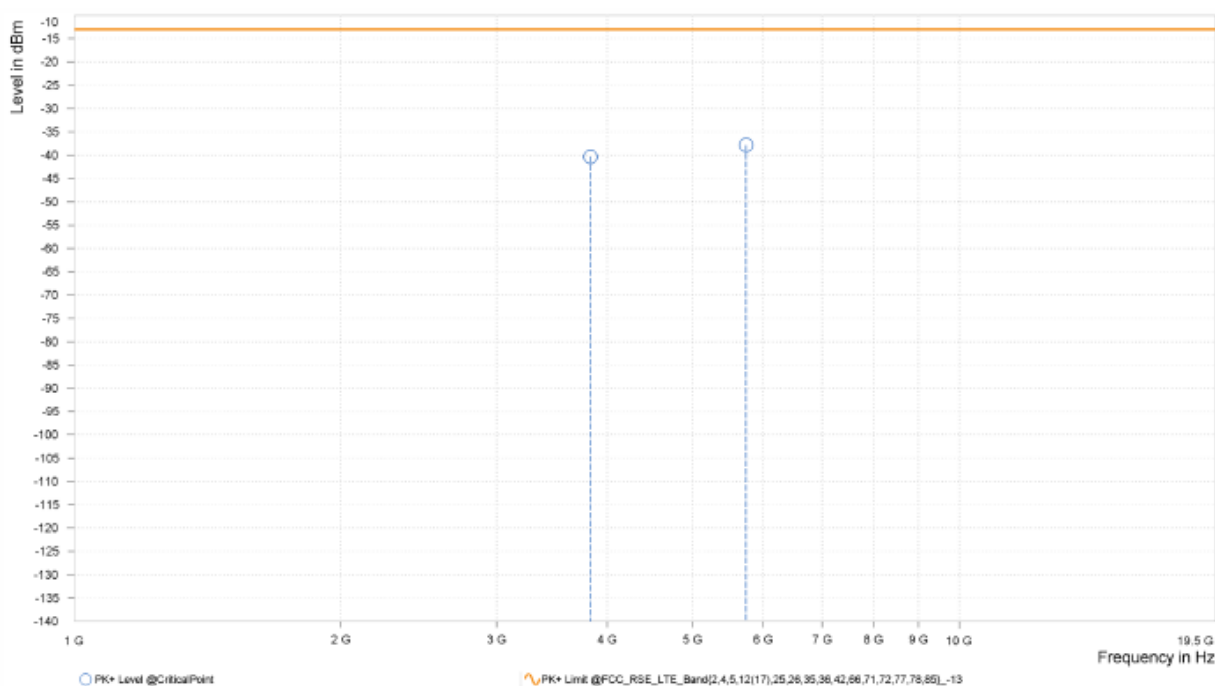


3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

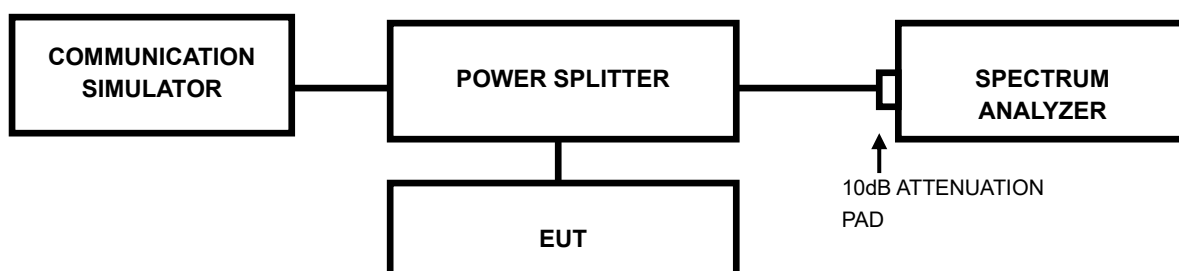

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



Test Report No.: W7L-240204W001RF02

3.7.4 TEST RESULTS

Please Refer to Appendix Of this test report.



Test Report No.: W7L-240204W001RF02

4 INFORMATION ON THE TESTING LABORATORIES

We, Huarui 7layers High Technology (Suzhou) Co., Ltd. ,were founded in 2020 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Suzhou EMC/RF Lab:

Tel: +86 (0557) 368 1008



Test Report No.: W7L-240204W001RF02

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

6 Appendix

CAT-M: LTE BAND25(INCLUDING LTE BAND2)

PEAK-TO-AVERAGE RATIO(CCDF)

Test Result

Band	Bandwidth	Modulation	Channel	Result(dB)	Limit(dB)	Verdict
Band25	1.4MHz	QPSK	26047	5.28	13	PASS
Band25	1.4MHz	QPSK	26365	5.18	13	PASS
Band25	1.4MHz	QPSK	26683	4.72	13	PASS
Band25	1.4MHz	16QAM	26047	6.24	13	PASS
Band25	1.4MHz	16QAM	26365	6.51	13	PASS
Band25	1.4MHz	16QAM	26683	6.35	13	PASS
Band25	3MHz	QPSK	26055	4.81	13	PASS
Band25	3MHz	QPSK	26365	5.75	13	PASS
Band25	3MHz	QPSK	26675	4.71	13	PASS
Band25	3MHz	16QAM	26055	6.33	13	PASS
Band25	3MHz	16QAM	26365	6.60	13	PASS
Band25	3MHz	16QAM	26675	6.47	13	PASS
Band25	5MHz	QPSK	26065	7.21	13	PASS
Band25	5MHz	QPSK	26365	6.71	13	PASS
Band25	5MHz	QPSK	26665	5.47	13	PASS
Band25	5MHz	16QAM	26065	6.16	13	PASS
Band25	5MHz	16QAM	26365	7.43	13	PASS
Band25	5MHz	16QAM	26665	7.00	13	PASS
Band25	10MHz	QPSK	26090	5.60	13	PASS
Band25	10MHz	QPSK	26365	5.33	13	PASS
Band25	10MHz	QPSK	26640	5.60	13	PASS
Band25	10MHz	16QAM	26090	6.13	13	PASS
Band25	10MHz	16QAM	26365	6.54	13	PASS
Band25	10MHz	16QAM	26640	6.34	13	PASS
Band25	15MHz	QPSK	26115	5.75	13	PASS
Band25	15MHz	QPSK	26365	5.75	13	PASS
Band25	15MHz	QPSK	26615	5.71	13	PASS
Band25	15MHz	16QAM	26115	6.42	13	PASS
Band25	15MHz	16QAM	26365	6.43	13	PASS
Band25	15MHz	16QAM	26615	6.33	13	PASS
Band25	20MHz	QPSK	26140	5.70	13	PASS
Band25	20MHz	QPSK	26365	5.98	13	PASS
Band25	20MHz	QPSK	26590	5.74	13	PASS
Band25	20MHz	16QAM	26140	6.17	13	PASS
Band25	20MHz	16QAM	26365	6.43	13	PASS
Band25	20MHz	16QAM	26590	6.45	13	PASS

Test Graphs

