
ALL RIGHTS RESERVED
REPRODUCTION AND DISCLOSURE FORBIDDEN

LAYOUT DESCRIPTION

1)	Placement of the **Telit Cinterion Logo** (2x2mm) (File TC_Logo.bmp). Offset between (ref.0) point (shield edges) and object upper left corner x=11mm y=0,8mm.
2)	Clear writing of the text reported on **row 0005** of Master BOM. Font ARIAL-Bold 3pt. Offset between (ref.0) point (shield edges) and object upper left corner x=3,4mm y=1,2mm.
3)	Clear writing of the text reported on **row 0080** of Master BOM. Font ARIAL-Bold 2,5pt. Offset between (ref.0) point (shield edges) and object upper left corner x=2mm y=3mm.
4)	Clear writing of the ID as indicated on the P32-EN Product ID number allocation document. Font ARIAL-Bold 2,5pt. Offset between (ref.0) point (shield edges) and object upper left corner x=4,4mm y=3mm.
5)	Clear writing of the text reported on **row 0085** of Master BOM. Font ARIAL-Bold 2,5pt. Offset between (ref.0) point (shield edges) and object upper left corner x=4,4mm y=4,2mm.
6)	Barcode type 2D datamatrix of 36 digits IMEI+BSN string formatted as below: **123456789012345;C1234HHPPSSMM** where: **First 15 chars** = ID number (**IMEI**) as indicated on the P32-EN Product ID number allocation document. **Next char** = ID separator **";"** **Next chars** = The string reported on "Schema ref." field on **row 0100** of MasterBOM (**C1234HHPPSS**). **Next chars** = MM where **MM** = Contract Manufacturer ID number (2 digits with leading zeros) as reported in **P32-EN ANNEX**. Barcode type 2D datamatrix ECC200 size 4,5 x 4,5 mm tolerance xy +/- 0.5mm. Barcode must be centered on the label. Tolerance xy +/- 0.5mm.
7)	Placement of the logo reported on **row 0060** of Master BOM respecting the dimensions in brackets and oriented as in figure. Offset between (ref.0) point (shield edges) and object upper left corner x=11,3mm y=10mm.
8)	Placement of the bitmap reported on **row 0062** of Master BOM respecting the dimensions in brackets. Offset between (ref.0) point (shield edges) and object upper left corner x=3mm y=4,8mm.
9)	Clear writing of text reported on **row 0036** of Master BOM. Font ARIAL-Bold 2pt. Offset between (ref.0) point (shield edges) and object upper left corner x=3,15mm y=11mm.
10)	Clear writing of text reported on **row 0015** of Master BOM. Font ARIAL-Bold 2pt. Offset between (ref.0) point (shield edges) and object upper left corner x=3,15mm y=12mm.
11)	Clear writing of text reported on **row 0030** of Master BOM. Font ARIAL-Bold 2pt. Offset between (ref.0) point (shield edges) and object upper left corner x=3,15mm y=13mm.
12)	Clear writing of text reported on **row 0035** of Master BOM. Font ARIAL-Bold 2pt. Offset between (ref.0) point (shield edges) and object upper left corner x=3,15mm y=14mm.
13)	Clear writing "**Assembled in** " followed by the name of the production Country. Font ARIAL-Bold 2pt. Offset between (ref.0) point (shield edges) and object upper left corner x=2,7mm y=15,5mm.

NOTE: If in Master BOM the lines to which reference is done on layout specification don't exist, the field on the label is not applicable and therefore must not be filled.

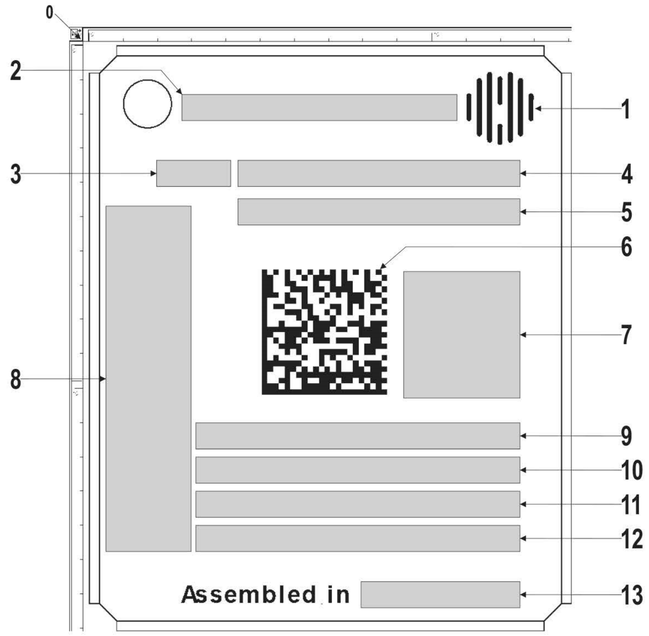

LABEL SAMPLE



LAST CHANGE LOG

Rev.0	First Release

FILE NAME: 2001702309.cdr	Telit Cinterion	**DESCRIPTION** DEVICE LABEL			
REV. : 0					
Shield dimensions: 14,1x17,1 mm	**ANNOTATION** xE310T1 - LASER MARKED				**FORM** A3
Drawn by: Ciro Duchi	2025-05-29		**SHEET N.** 1	**OF SHEETS** 1	**DRAWING CODE** 2001702309