



Engineering and Testing for EMC and Safety Compliance

CERTIFICATION APPLICATION REPORT  
FCC PART 15.247 & INDUSTRY CANADA RSS-210

|                                                                                                                                                                                                                                                         |                                                                                                                                                  |                                                                                                                                                                                                                                                  |                            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| <b>Test Lab:</b><br><br>Rhein Tech Laboratories, Inc. Phone: 703-689-0368<br>360 Herndon Parkway Fax: 703-689-2056<br>Suite 1400 Web Site: <a href="http://www.rheintech.com">www.rheintech.com</a><br>Herndon, VA 20170 E-Mail: ATCBINFO@rheintech.com |                                                                                                                                                  | <b>Applicant:</b><br><br>Luna iMonitoring Phone: 540-558-1692<br>Contact: Roger Secrest Fax: 540-951-0760<br>2851 Commerce Street E-Mail: <a href="mailto:secrestr@lunaimonitoring.com">secrestr@lunaimonitoring.com</a><br>Blacksburg, VA 24060 |                            |
| <b>FCC ID:</b>                                                                                                                                                                                                                                          | RIM-IMON                                                                                                                                         | <b>GRANTEE FRN NUMBER:</b>                                                                                                                                                                                                                       | 0009610718                 |
| <b>PLAT FORM:</b>                                                                                                                                                                                                                                       | N/A                                                                                                                                              | <b>RTL WORK ORDER NUMBER:</b>                                                                                                                                                                                                                    | 2003155                    |
| <b>MODEL NUMBER / NAME:</b>                                                                                                                                                                                                                             | iEFM, iILM -1, iWPM-T                                                                                                                            | <b>RTL QUOTE NUMBER:</b>                                                                                                                                                                                                                         | QRTL03-972A                |
| <b>DATE OF TEST REPORT:</b>                                                                                                                                                                                                                             | October 21, 2003                                                                                                                                 |                                                                                                                                                                                                                                                  |                            |
| <b>American National Standard Institute:</b>                                                                                                                                                                                                            | ANSI C63.4: Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |                                                                                                                                                                                                                                                  |                            |
| <b>FCC Classification:</b>                                                                                                                                                                                                                              | DSS – Part 15 Spread Spectrum Transmitter Frequency Hopping                                                                                      |                                                                                                                                                                                                                                                  |                            |
| <b>FCC Rule Part(s):</b>                                                                                                                                                                                                                                | Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz Frequency Hopping System                                  |                                                                                                                                                                                                                                                  |                            |
| <b>Industry Canada Standard:</b>                                                                                                                                                                                                                        | RSS-210: Low Power License-Exempt Radio Communication Devices (All Frequency Bands)                                                              |                                                                                                                                                                                                                                                  |                            |
| <b>Digital Interface Information</b>                                                                                                                                                                                                                    | Digital Interface was found to be compliant                                                                                                      |                                                                                                                                                                                                                                                  |                            |
| <b>Receiver Information</b>                                                                                                                                                                                                                             | Receiver was found to be compliant                                                                                                               |                                                                                                                                                                                                                                                  |                            |
| <b>Frequency Range (MHz)</b>                                                                                                                                                                                                                            | <b>Output Power* (W)</b>                                                                                                                         | <b>Frequency Tolerance</b>                                                                                                                                                                                                                       | <b>Emission Designator</b> |
| 902 – 928                                                                                                                                                                                                                                               | 0.059                                                                                                                                            | N/A                                                                                                                                                                                                                                              | N/A                        |

\* output power is maximum peak conducted

We, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report.

Furthermore, there was no deviation from, additions to, or exclusions from the FCC Part 2, FCC Part 15, Industry Canada RSS-210, and ANSI C63.4

Signature: 

Date: October 21, 2003

Typed/Printed Name: Desmond A. Fraser

Position: President

## TABLE OF CONTENTS

|      |                                                                                         |    |
|------|-----------------------------------------------------------------------------------------|----|
| 1    | GENERAL INFORMATION .....                                                               | 6  |
| 1.1  | SCOPE.....                                                                              | 6  |
| 1.2  | TEST FACILITY.....                                                                      | 6  |
| 1.3  | RELATED SUBMITTAL(S)/GRANT(S).....                                                      | 6  |
| 1.4  | MODIFICATIONS.....                                                                      | 6  |
| 2    | TEST INFORMATION .....                                                                  | 7  |
| 2.1  | TEST JUSTIFICATION.....                                                                 | 7  |
| 2.2  | EXERCISING THE EUT .....                                                                | 7  |
| 2.3  | TEST RESULT SUMMARY .....                                                               | 7  |
| 2.4  | TEST SYSTEM DETAILS.....                                                                | 8  |
| 2.5  | CONFIGURATION OF TESTED SYSTEM .....                                                    | 9  |
| 3    | COMPLIANCE WITH FCC §15.31(M).....                                                      | 10 |
| 4    | COMPLIANCE WITH FCC §15.203.....                                                        | 10 |
| 5    | COMPLIANCE WITH FCC §15.204.....                                                        | 10 |
| 6    | COMPLIANCE WITH FCC §15.207.....                                                        | 10 |
| 7    | COMPLIANCE WITH THE BAND EDGE – FCC §15.247(C), §15.205; IC RSS-210 §6.3 .....          | 10 |
| 7.1  | TEST PROCEDURE.....                                                                     | 10 |
| 7.2  | BAND EDGE TEST EQUIPMENT .....                                                          | 10 |
| 7.3  | RESTRICTED BAND EDGE PLOTS.....                                                         | 11 |
| 8    | RADIATED EMISSION LIMITS RECEIVER/DIGITAL INTERFACE – FCC §15.209; IC RSS-210 §7.3..... | 15 |
| 8.1  | RECEIVER/DIGITAL INTERFACE RADIATED EMISSION LIMITS TEST PROCEDURE.....                 | 15 |
| 8.2  | RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS TEST EQUIPMENT.....                       | 15 |
| 8.3  | RECEIVER/DIGITAL INTERFACE RADIATED EMISSION LIMITS TEST DATA .....                     | 15 |
| 9    | RADIATED EMISSION LIMITS; SPURIOUS AND HARMONICS – FCC §15.247; IC RSS-210 §6.3 .....   | 18 |
| 9.1  | RADIATED SPURIOUS EMISSION LIMITS TEST PROCEDURE .....                                  | 18 |
| 9.2  | RADIATED SPURIOUS TEST EQUIPMENT .....                                                  | 18 |
| 9.3  | RADIATED EMISSIONS HARMONICS/SPURIOUS TEST DATA .....                                   | 19 |
| 10   | CARRIER FREQUENCY SEPARATION - §15.247(A)(1) .....                                      | 22 |
| 11   | HOPPING CHARACTERISTICS – FCC §15.247 (A)(1)(I); IC RSS-210 §6.2.2(O).....              | 23 |
| 11.1 | NUMBER OF HOPPING FREQUENCIES.....                                                      | 23 |
| 11.2 | AVERAGE TIME OF OCCUPANCY.....                                                          | 24 |
| 11.3 | 20 DB BANDWIDTH – FCC §15.247 (A)(1)(I); IC RSS-210 §5.9.1 .....                        | 26 |
| 12   | PEAK OUTPUT POWER - FCC §15.247(B)(2); IC RSS-210 §6.2.2(O)(B) .....                    | 30 |
| 12.1 | CONDUCTED ANTENNA PORT POWER OUTPUT TEST PROCEDURE .....                                | 30 |
| 12.2 | CONDUCTED ANTENNA PORT POWER OUTPUT TEST EQUIPMENT.....                                 | 30 |
| 12.3 | CONDUCTED ANTENNA PORT POWER OUTPUT TEST DATA.....                                      | 31 |
| 13   | ANTENNA CONDUCTED SPURIOUS EMISSIONS - §15.247(C); IC RSS-210 §6.2.2(O)(E1).....        | 32 |
| 13.1 | ANTENNA CONDUCTED SPURIOUS EMISSIONS TEST PROCEDURES.....                               | 32 |
| 13.2 | ANTENNA CONDUCTED SPURIOUS TEST EQUIPMENT.....                                          | 32 |
| 13.3 | ANTENNA CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 902.4914 MHZ).....                  | 33 |
| 13.4 | ANTENNA CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 914.6038 MHZ).....                  | 34 |
| 13.5 | ANTENNA CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 927.7695 MHZ).....                  | 35 |
| 14   | CONCLUSION.....                                                                         | 36 |

## FIGURE INDEX

|                                                              |   |
|--------------------------------------------------------------|---|
| FIGURE 1: WORST CASE CONFIGURATION OF SYSTEM UNDER TEST..... | 9 |
|--------------------------------------------------------------|---|

## TABLE INDEX

|                                                                                                  |    |
|--------------------------------------------------------------------------------------------------|----|
| TABLE 2-1: TEST RESULT SUMMARY FOR FCC RULES AND REGULATIONS.....                                | 7  |
| TABLE 2-2: EQUIPMENT UNDER TEST (EUT).....                                                       | 8  |
| TABLE 2-3: SUPPORT EQUIPMENT .....                                                               | 8  |
| TABLE 7-1: BAND EDGE TEST EQUIPMENT .....                                                        | 10 |
| TABLE 8-1: RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS TEST EQUIPMENT.....                     | 15 |
| TABLE 8-2: DIGITAL INTERFACE RADIATED EMISSION (iEFM).....                                       | 15 |
| TABLE 8-3: DIGITAL INTERFACE RADIATED EMISSION (iWPM-T).....                                     | 16 |
| TABLE 8-4: DIGITAL INTERFACE RADIATED EMISSION (iILM-1).....                                     | 16 |
| TABLE 8-5: RECEIVER RADIATED EMISSION (iILM-1).....                                              | 17 |
| TABLE 9-1: RADIATED SPURIOUS EMISSIONS TEST EQUIPMENT .....                                      | 18 |
| TABLE 9-2: RADIATED EMISSIONS HARMONICS/SPURIOUS (TX FREQUENCY: 902.4914 MHZ, WHIP ANTENNA)..... | 19 |
| TABLE 9-3: RADIATED EMISSIONS HARMONICS/SPURIOUS (TX FREQUENCY: 914.6038 MHZ, WHIP ANTENNA)..... | 19 |
| TABLE 9-4: RADIATED EMISSIONS HARMONICS/SPURIOUS (TX FREQUENCY: 927.7695 MHZ, WHIP ANTENNA)..... | 20 |
| TABLE 9-5: RADIATED EMISSIONS HARMONICS/SPURIOUS (TX FREQUENCY: 902.4914 MHZ, YAGI ANTENNA)..... | 20 |
| TABLE 9-6: RADIATED EMISSIONS HARMONICS/SPURIOUS (TX FREQUENCY: 914.6038 MHZ, YAGI ANTENNA)..... | 21 |
| TABLE 9-7: RADIATED EMISSIONS HARMONICS/SPURIOUS (TX FREQUENCY: 927.7695 MHZ, YAGI ANTENNA)..... | 21 |
| TABLE 11-1: 20 DB BANDWIDTH TEST EQUIPMENT.....                                                  | 26 |
| TABLE 11-2: MODULATED BANDWIDTH TEST DATA .....                                                  | 26 |
| TABLE 12-1: CONDUCTED ANTENNA PORT POWER OUTPUT TEST EQUIPMENT .....                             | 30 |
| TABLE 12-2: CONDUCTED ANTENNA PORT POWER OUTPUT TEST DATA .....                                  | 31 |
| TABLE 12-3: CONDUCTED ANTENNA PORT POWER OUTPUT TEST DATA.....                                   | 31 |
| TABLE 13-1: ANTENNA CONDUCTED SPURIOUS TEST EQUIPMENT.....                                       | 32 |
| TABLE 13-2: CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 902.4914 MHZ).....                       | 33 |
| TABLE 13-3: CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 914.6038 MHZ).....                       | 34 |
| TABLE 13-4: CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 927.7695 MHZ).....                       | 35 |

## PLOT INDEX

|            |                                                                                      |    |
|------------|--------------------------------------------------------------------------------------|----|
| PLOT 7-1:  | LOWER BAND EDGE: MARKER-DELTA METHOD (TX FREQUENCY: 902.4914 MHZ, YAGI ANTENNA)....  | 11 |
| PLOT 7-2:  | LOWER BAND EDGE: MARKER-DELTA METHOD (TX FREQUENCY: 902.4914 MHZ, WHIP ANTENNA)...   | 12 |
| PLOT 7-3:  | UPPER BAND EDGE: MARKER-DELTA METHOD (TX FREQUENCY: 927.7695 MHZ, YAGI ANTENNA)..... | 13 |
| PLOT 7-4:  | UPPER BAND EDGE: MARKER-DELTA METHOD (TX FREQUENCY: 927.7695 MHZ, WHIP ANTENNA)..... | 14 |
| PLOT 10-1: | CARRIER FREQUENCY SEPARATION.....                                                    | 22 |
| PLOT 11-1: | NUMBER OF HOPPING FREQUENCIES .....                                                  | 23 |
| PLOT 11-2: | TIME OF OCCUPANCY (DWEIL TIME).....                                                  | 24 |
| PLOT 11-3: | 20 DB BANDWIDTH (TX FREQUENCY: 902.4914 MHZ).....                                    | 27 |
| PLOT 11-4: | 20 DB BANDWIDTH (TX FREQUENCY: 914.6038 MHZ).....                                    | 28 |
| PLOT 11-5: | 20 DB BANDWIDTH (TX FREQUENCY: 927.7695 MHZ).....                                    | 29 |

## APPENDIX INDEX

|             |                                                          |    |
|-------------|----------------------------------------------------------|----|
| APPENDIX A: | FCC PART 1.1307, 1.1310, 2.1091, 2.1093 RF EXPOSURE..... | 37 |
| APPENDIX B: | ANTENNA SPECIFICATIONS PER FCC §15.204(C).....           | 38 |
| APPENDIX C: | AGENCY AUTHORIZATION LETTER.....                         | 39 |
| APPENDIX D: | CONFIDENTIALITY REQUEST LETTER.....                      | 40 |
| APPENDIX E: | TECHNICAL OPERATIONAL DESCRIPTION.....                   | 41 |
| APPENDIX F: | FHSS DESCRIPTION FOR COMPLIANCE WITH §15.247(A).....     | 42 |
| APPENDIX G: | LABEL AND LABEL LOCATION.....                            | 43 |
| APPENDIX H: | SCHEMATICS.....                                          | 44 |
| APPENDIX I: | BLOCK DIAGRAM .....                                      | 45 |
| APPENDIX J: | MANUAL.....                                              | 46 |
| APPENDIX K: | TEST PHOTOGRAPHS .....                                   | 47 |
| APPENDIX L: | EXTERNAL PHOTOGRAPHS.....                                | 55 |
| APPENDIX M: | INTERNAL PHOTOGRAPHS.....                                | 74 |
| APPENDIX N: | PROFESSIONAL INSTALLATION.....                           | 87 |

## PHOTOGRAPH INDEX

|                |                                                         |    |
|----------------|---------------------------------------------------------|----|
| PHOTOGRAPH 1:  | iEFM FRONT – RADIATED TESTING.....                      | 47 |
| PHOTOGRAPH 2:  | iEFM REAR – RADIATED TESTING.....                       | 48 |
| PHOTOGRAPH 3:  | iILM -1 WITH WHIP ANTENNA FRONT – RADIATED TESTING..... | 49 |
| PHOTOGRAPH 4:  | iILM -1 WITH WHIP ANTENNA REAR – RADIATED TESTING.....  | 50 |
| PHOTOGRAPH 5:  | iILM -1 WITH YAGI ANTENNA REAR – RADIATED TESTING.....  | 51 |
| PHOTOGRAPH 6:  | iILM -1 WITH YAGI FRONT – RADIATED TESTING.....         | 52 |
| PHOTOGRAPH 7:  | iWPM-T FRONT – RADIATED TESTING.....                    | 53 |
| PHOTOGRAPH 8:  | iWPM-T REAR – RADIATED TESTING.....                     | 54 |
| PHOTOGRAPH 9:  | ANTENNA PORT .....                                      | 55 |
| PHOTOGRAPH 10: | WHIP ANTENNA.....                                       | 56 |
| PHOTOGRAPH 11: | YAGI ANTENNA.....                                       | 57 |
| PHOTOGRAPH 12: | iEFM LABEL.....                                         | 58 |
| PHOTOGRAPH 13: | iEFM SIDE.....                                          | 59 |
| PHOTOGRAPH 14: | iEFM SIDE.....                                          | 60 |
| PHOTOGRAPH 15: | iEFM SIDE.....                                          | 61 |
| PHOTOGRAPH 16: | iEFM SIDE.....                                          | 62 |
| PHOTOGRAPH 17: | iILM -1 BOTTOM .....                                    | 63 |
| PHOTOGRAPH 18: | iILM -1 SIDE.....                                       | 64 |
| PHOTOGRAPH 19: | iILM -1 SIDE.....                                       | 65 |
| PHOTOGRAPH 20: | iILM -1 SIDE.....                                       | 66 |
| PHOTOGRAPH 21: | iILM -1 SIDE.....                                       | 67 |
| PHOTOGRAPH 22: | iWPM-T BOTTOM.....                                      | 68 |
| PHOTOGRAPH 23: | iWPM-T SIDE.....                                        | 69 |
| PHOTOGRAPH 24: | iWPM-T LABEL.....                                       | 70 |
| PHOTOGRAPH 25: | iWPM-T SIDE.....                                        | 71 |
| PHOTOGRAPH 26: | iWPM-T SIDE.....                                        | 72 |
| PHOTOGRAPH 27: | SOLAR PANEL.....                                        | 73 |
| PHOTOGRAPH 28: | SOLAR CELL AND BATTERY CIRCUITRY (FRONT).....           | 74 |
| PHOTOGRAPH 29: | SOLAR CELL AND BATTERY CIRCUITRY (FRONT).....           | 75 |
| PHOTOGRAPH 30: | SOLAR CELL AND BATTERY CIRCUITRY (BACK).....            | 76 |
| PHOTOGRAPH 31: | iILM -1 RF SECTION TOP CLOSE-UP.....                    | 77 |
| PHOTOGRAPH 32: | iILM -1 RF SECTION BOTTOM CLOSE-UP .....                | 78 |
| PHOTOGRAPH 33: | iILM -1 TOP.....                                        | 79 |
| PHOTOGRAPH 34: | iILM -1 BOTTOM .....                                    | 80 |
| PHOTOGRAPH 35: | iILM -1 ENCLOSURE.....                                  | 81 |
| PHOTOGRAPH 36: | iEFM (FRONT).....                                       | 82 |
| PHOTOGRAPH 37: | iEFM (BACK).....                                        | 83 |
| PHOTOGRAPH 38: | iWPM-T (FRONT).....                                     | 84 |
| PHOTOGRAPH 39: | iWPM-T (BACK).....                                      | 85 |
| PHOTOGRAPH 40: | iWPM-T.....                                             | 86 |

## 1 GENERAL INFORMATION

### 1.1 SCOPE

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz. FCC DA 00-705 Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems was also used for guidance.

IC RSS-210 Section 6.2.2(o): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

The EUT utilizes a frequency hopping system operating in the 902 – 928 MHz band.

### 1.2 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).

### 1.3 RELATED SUBMITTAL(S)/GRANT(S)

This is an original application for certification: FCC ID: RIM-IMON.

### 1.4 MODIFICATIONS

Initially, transmit spurious emissions and emissions from the receiver LO were failing. The modifications described below were performed to achieve compliance. The manufacturer understands that these exact modifications must be performed on all production units.

#### Transmit Spurious

The antenna connection was broken and replaced by a pi low pass filter comprising two capacitors to ground and a series inductor. The filter roll-off nominally starts at about 1GHz thus providing some attenuation at the second harmonic and more at the third harmonic where it was most needed. Higher harmonics were present and these were found to be exacerbated by overdriving the PA stage beyond its recommended level. The correct drive level was programmed into the driver chip to rectify this problem.

#### Receive LO leakage (radiated and conducted)

The receiver power supply decoupling capacitors were found not to include low value capacitors suitable for low impedance decoupling at the receiver operating frequency. Values were reselected to include some capacitors close to self resonance at the operating frequency. The placement of one decoupling capacitor very close to the local oscillator tank was found to be coupling LO to the LNA supply rail and it was removed.

## 2 TEST INFORMATION

### 2.1 TEST JUSTIFICATION

The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. 902.4914 MHz, 914.6038 MHz and 927.7695 MHz were tested and investigated from 9 kHz to 9.3 GHz. Data for all three frequencies is presented in this report.

The RF circuitry and antenna tested in this report are utilized in three Luna iMonitoring products: the iEFM, iTLM-1, and iWPM-T. Though portions of the digital circuitry of the three products are different, the RF circuitry (including control circuitry) and layout are identical across the three products. But, because the RF circuitry and digital circuitry reside on the same PCB in each device, a modular approval approach would not be applicable. The conducted power of the three products was investigated on three frequencies each to see if any aspect of the digital circuitry influenced the intentional emissions. No significant power variation was found. The iTLM-1 was chosen for the remaining testing because of the presence of the ultrasonic transducer, and the physical length of the transducer housing.

The digital portions of the iEFM, iTLM-1, and iWPM-T are subject to verification under FCC Part 15. Additionally, the iTLM-1 has an ultrasonic section that meets the definition of 18.107(f) and is subject to verification under FCC Part 18 as a non-consumer ISM device. Verification testing was performed on all three devices, and verification reports exist for each.

Two antennas were tested and can be used with the devices: Nearson S467AH-915S whip antenna and Bluewave EDY9432 Yagi. A reduced power setting must be used with the Bluewave EDY9432 Yagi for compliance with the spurious/harmonic emissions requirements of Part 15. The manufacturer will pre-program the appropriate maximum power before shipment, and ensure that end users can not use the Yagi antenna with a device programmed for use with the whip antenna.

### 2.2 EXERCISING THE EUT

The EUT was provided with software to continuously transmit on one channel or in the hopping mode during testing. The carrier was also checked to verify that information was being transmitted.

### 2.3 TEST RESULT SUMMARY

**TABLE 2-1: TEST RESULT SUMMARY FOR FCC RULES AND REGULATIONS**

| STANDARD         | TEST                                     | PASS/FAIL<br>OR N/A |
|------------------|------------------------------------------|---------------------|
| FCC 15.205       | Compliance with the Restricted Band Edge | Pass                |
| FCC 15.207       | Conducted Emissions                      | N/A                 |
| FCC 15.209       | Radiated Emissions                       | Pass                |
| FCC 15.247(a)(2) | Modulated Bandwidth                      | Pass                |
| FCC 15.247(b)    | Power Output                             | Pass                |
| FCC 15.247(c)    | Antenna Conducted Spurious Emissions     | Pass                |

## 2.4 TEST SYSTEM DETAILS

The FCC identifiers for all applicable equipment, plus descriptions of all cables used in the tested system, are identified in Table 2-2.


**TABLE 2-2: EQUIPMENT UNDER TEST (EUT)**

| Part                      | Manufacturer     | Model          | Serial Number | FCC Identifier | Cable Description          | RTL Barcode |
|---------------------------|------------------|----------------|---------------|----------------|----------------------------|-------------|
| tank level monitor        | Luna iMonitoring | iTLM-1         | 13800023      | RIM-IMON       | N/A                        | 15426       |
| tank level monitor        | Luna iMonitoring | iTLM-1         | 13800021      | RIM-IMON       | N/A                        | 15400       |
| electronic flow monitor   | Luna iMonitoring | iEFM           | 18800005      | RIM-IMON       | N/A                        | 15399       |
| wireless pressure monitor | Luna iMonitoring | iWPM-T         | 1680003A      | RIM-IMON       | N/A                        | 15401       |
| battery                   | Luna iMonitoring | battery        | N/A           | N/A            | N/A                        | 15406       |
| battery holder            | Luna iMonitoring | battery holder | N/A           | N/A            | unshielded internal ribbon | 15444       |
| temperature probe         | Luna iMonitoring | RTD            | N/A           | N/A            | shielded                   | 15408       |
| whip antenna              | Nearson          | S467AH-915S    | N/A           | N/A            | N/A                        | 15411       |
| whip antenna              | Nearson          | S467AH-915S    | N/A           | N/A            | N/A                        | 15410       |
| whip antenna              | Nearson          | S467AH-915S    | N/A           | N/A            | N/A                        | 15409       |
| Yagi antenna              | Bluewave         | EDV9432        | CD64478       | N/A            | N/A                        | 15407       |

**TABLE 2-3: SUPPORT EQUIPMENT**

| Part      | Manufacturer     | Model           | Serial Number            | FCC Identifier | Cable Description | RTL Barcode |
|-----------|------------------|-----------------|--------------------------|----------------|-------------------|-------------|
| Pocket PC | Dell             | AXIM X5 - HC01U | TW-0W0772-70161-32N-C0CV | DoC            | N/A               | 15413       |
| CFR       | Luna iMonitoring | CFR             | 1180016                  | RIM-ICFR       | N/A               | 15412       |

## 2.5 CONFIGURATION OF TESTED SYSTEM

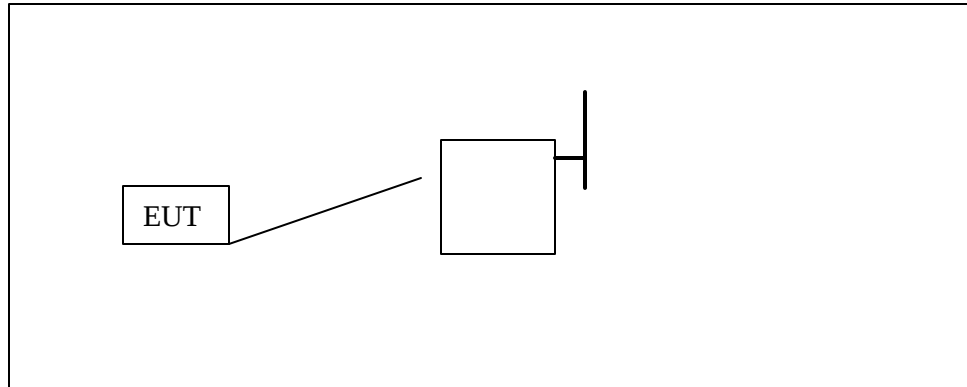

**FIGURE 1: WORST CASE CONFIGURATION OF SYSTEM UNDER TEST**

### 3 COMPLIANCE WITH FCC §15.31(m)

In accordance with FCC 15.31(m), and because the EUT utilizes an operating band greater than 10 MHz, three frequencies were investigated for those tests that required the hopping function to be disabled. The following frequencies were tested: 902.4914 MHz, 914.6038 MHz and 927.7695 MHz.

### 4 COMPLIANCE WITH FCC §15.203

The RF connector used for antenna attachment is a reverse polarity SMA style connector which is not readily available to users through retail distribution.

### 5 COMPLIANCE WITH FCC §15.204

Please see Appendix B for antenna specifications.

### 6 COMPLIANCE WITH FCC §15.207

The EUT is strictly battery operated with a solar cell for battery charging.

## 7 COMPLIANCE WITH THE BAND EDGE – FCC §15.247(c), §15.205; IC RSS-210 §6.3

### 7.1 TEST PROCEDURE

Compliance with the band edges was performed using the FCC's "Radiated Measurement at a Band Edge" guidance document. The data taken in this report represents the worst case operation.


### 7.2 BAND EDGE TEST EQUIPMENT

TABLE 7-1: BAND EDGE TEST EQUIPMENT


| RTL ASSET # | MANUFACTURER    | MODEL    | PART TYPE                           | SERIAL NUMBER | CALIBRATION DUE DATE |
|-------------|-----------------|----------|-------------------------------------|---------------|----------------------|
| 901053      | Schaffner Chase | CBL6112B | Bi-Log Antenna (20 MHz - 2 GHz)     | 2648          | 7/03/04              |
| 900930      | Hewlett Packard | 85662A   | Spectrum Analyzer Display Section   | 3144A20839    | 5/12/04              |
| 900931      | Hewlett Packard | 8566B    | Spectrum Analyzer (100 Hz - 22 GHz) | 3138A07771    | 5/12/04              |

### 7.3 RESTRICTED BAND EDGE PLOTS


**PLOT 7-1: LOWER BAND EDGE: MARKER-DELTA METHOD (TX FREQUENCY: 902.4914 MHz, YAGI ANTENNA)**

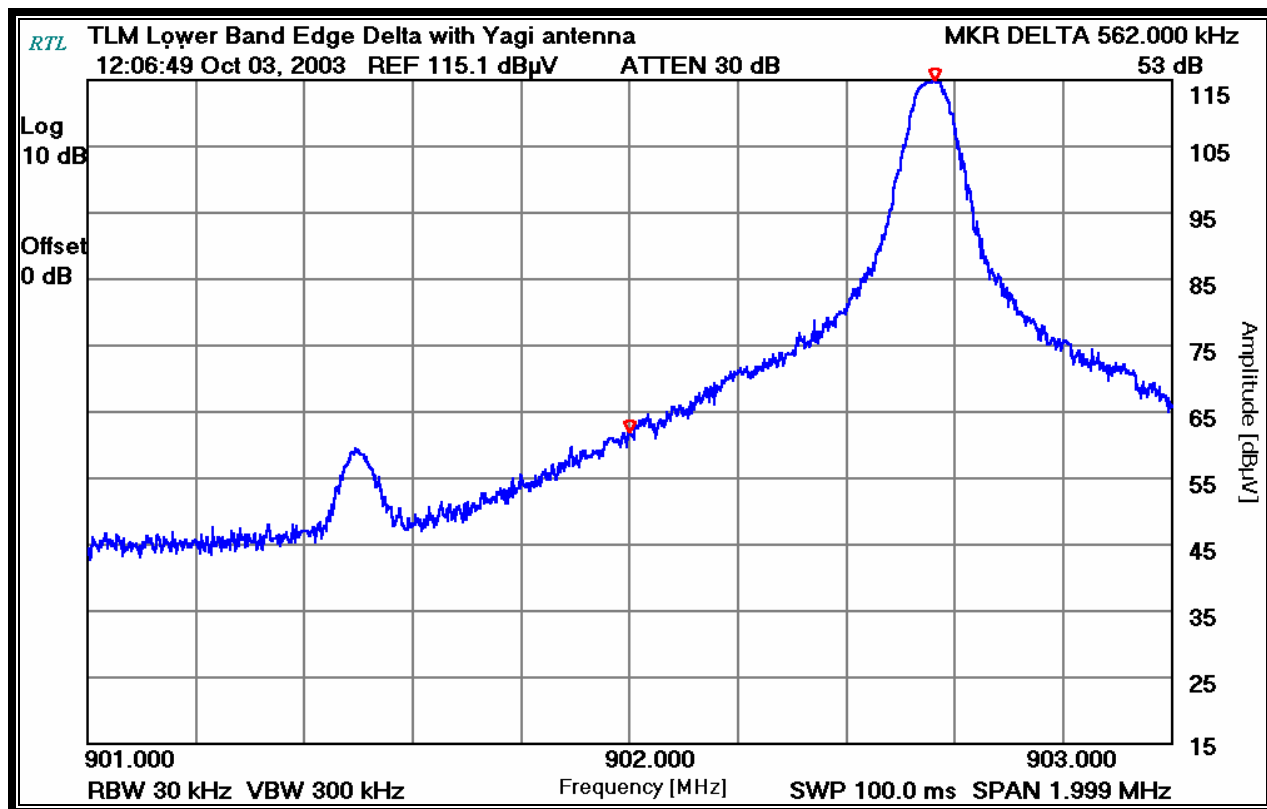


PLOT 7-2: LOWER BAND EDGE: MARKER-DELTA METHOD (TX FREQUENCY: 902.4914 MHz, WHIP ANTENNA)

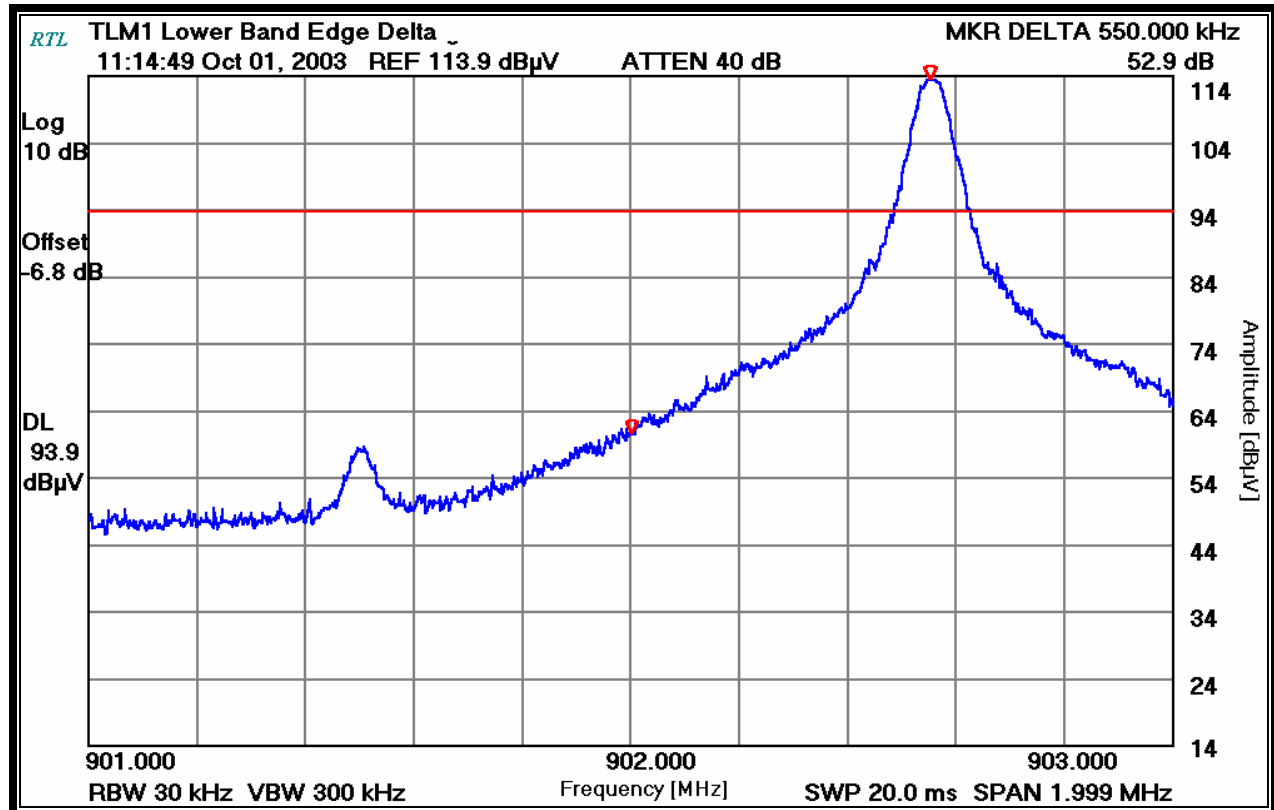

**PLOT 7-3: UPPER BAND EDGE: MARKER-DELTA METHOD (TX FREQUENCY: 927.7695 MHZ, YAGI ANTENNA)**

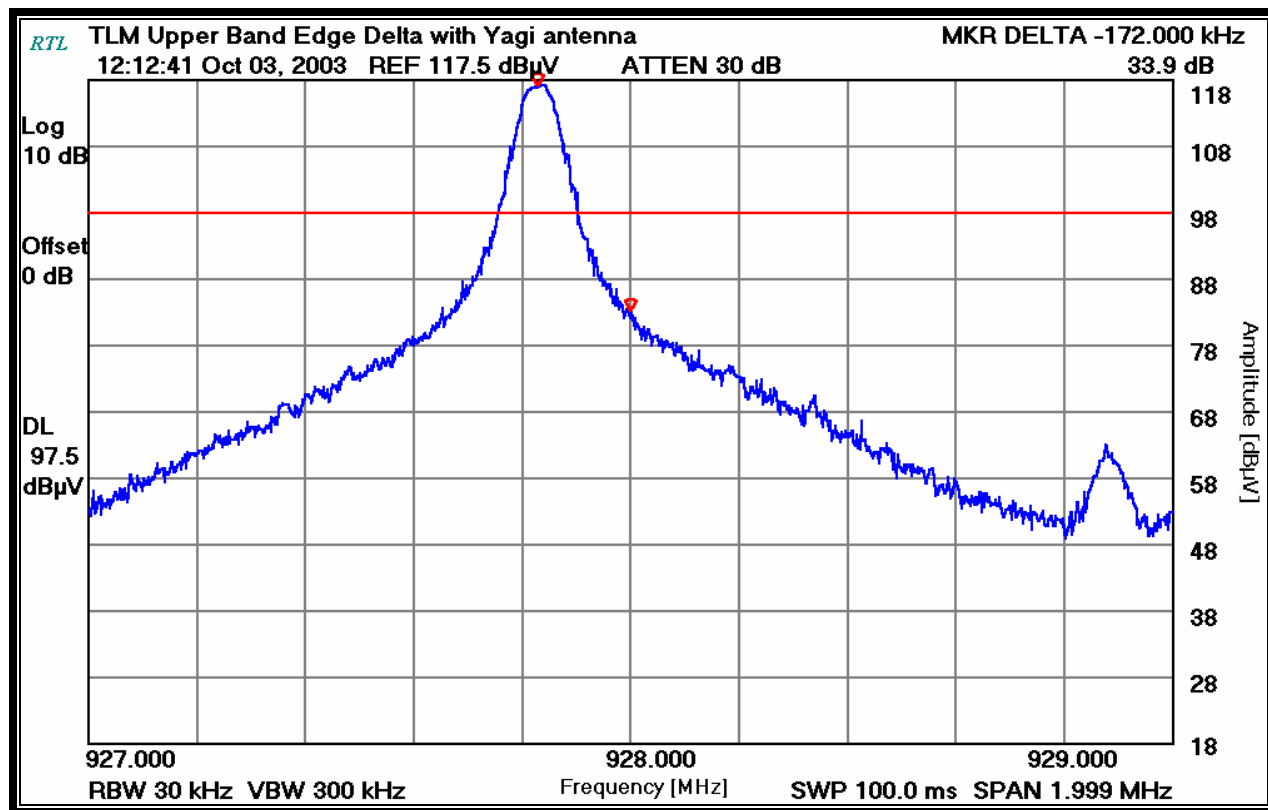

**PLOT 7-4: UPPER BAND EDGE: MARKER-DELTA METHOD (TX FREQUENCY: 927.7695 MHZ, WHIP ANTENNA)**

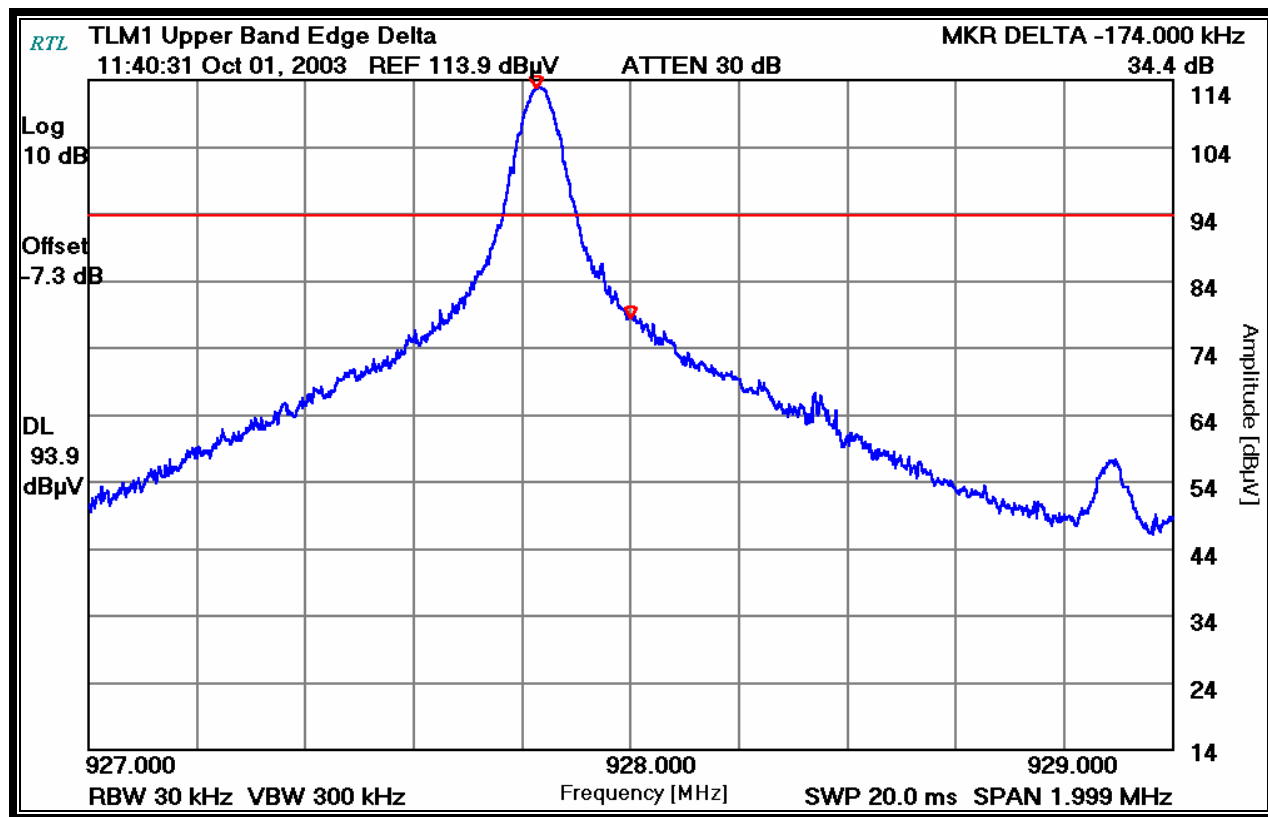

**TEST PERSONNEL:**

Daniel W. Baltzell  
 Test Engineer

*Daniel W. Baltzell*  
 Signature

October 1 and 3, 2003  
 Dates Of Test

## 8 RADIATED EMISSION LIMITS RECEIVER/DIGITAL INTERFACE – FCC §15.209; IC RSS-210 §7.3

### 8.1 RECEIVER/DIGITAL INTERFACE RADIATED EMISSION LIMITS TEST PROCEDURE

Emissions from the digital portion of the transceiver circuitry and the receiver of the EUT were tested and found to comply with the requirements of FCC Part 15.209. Digital emissions from the non-transceiver circuitry and transducer interface circuitry are subject to verification and are provided in a separate verification report held by the manufacturer and test laboratory.

### 8.2 RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS TEST EQUIPMENT

TABLE 8-1: RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS TEST EQUIPMENT

| RTL ASSET # | MANUFACTURER    | MODEL    | PART TYPE                                            | SERIAL NUMBER | CALIBRATION DUE DATE |
|-------------|-----------------|----------|------------------------------------------------------|---------------|----------------------|
| 900889      | Hewlett Packard | 85685A   | RF Preselector for HP 8566B or 8568B (20 Hz - 2 GHz) | 3146A01309    | 3/5/04               |
| 900905      | Rhein Tech Labs | PR-1040  | Amplifier                                            | 900905        | 9/15/04              |
| 900969      | Hewlett Packard | 85650A   | Quasi-Peak Adapter                                   | 2412A00414    | 5/12/04              |
| 901053      | Schaffner Chase | CBL6112B | Bi-Log Antenna (20 MHz - 2 GHz)                      | 2648          | 7/03/04              |
| 900930      | Hewlett Packard | 85662A   | Spectrum Analyzer Display Section                    | 3144A20839    | 5/12/04              |
| 900931      | Hewlett Packard | 8566B    | Spectrum Analyzer (100 Hz - 22 GHz)                  | 3138A07771    | 5/12/04              |

### 8.3 RECEIVER/DIGITAL INTERFACE RADIATED EMISSION LIMITS TEST DATA

TABLE 8-2: DIGITAL INTERFACE RADIATED EMISSION (iEFM)

| Temperature: 74°F Humidity: 43% |               |                        |                         |                    |                         |                               |                         |                |             |
|---------------------------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------------|----------------|-------------|
| Emission Frequency (MHz)        | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBuV) | Site Correction Factor (dB/m) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 403.060                         | Qp            | H                      | 0                       | 1.0                | 39.5                    | -11.6                         | 27.9                    | 46.0           | -18.1       |
| 412.890                         | Qp            | H                      | 0                       | 1.0                | 41.6                    | -10.9                         | 30.7                    | 46.0           | -15.3       |
| 427.636                         | Qp            | H                      | 0                       | 1.0                | 43.5                    | -11.0                         | 32.5                    | 46.0           | -13.5       |
| 452.228                         | Qp            | H                      | 90                      | 1.0                | 37.6                    | -10.1                         | 27.5                    | 46.0           | -18.5       |
| 462.059                         | Qp            | H                      | 0                       | 1.0                | 41.1                    | -10.1                         | 31.0                    | 46.0           | -15.0       |
| 845.443                         | Qp            | H                      | 0                       | 1.0                | 38.1                    | -4.4                          | 33.7                    | 46.0           | -12.3       |

QP: RES. =100 KHZ, VID= 100 KHZ

**TABLE 8-3: DIGITAL INTERFACE RADIATED EMISSION (iWPM-T)**

| Temperature: 77°F        |               |                        |                         |                    | Humidity: 43%           |                               |                         |                |             |
|--------------------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------------|----------------|-------------|
| Emission Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBuV) | Site Correction Factor (dB/m) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 349.010                  | Qp            | H                      | 0                       | 1.0                | 33.8                    | -13.4                         | 20.4                    | 46.0           | -25.6       |
| 388.331                  | Qp            | H                      | 0                       | 1.0                | 33.9                    | -12.3                         | 21.6                    | 46.0           | -24.4       |
| 427.653                  | Qp            | H                      | 0                       | 1.0                | 34.0                    | -11.0                         | 23.0                    | 46.0           | -23.0       |
| 462.059                  | Qp            | H                      | 355                     | 1.0                | 40.2                    | -11.2                         | 29.0                    | 46.0           | -17.0       |
| 471.889                  | Qp            | H                      | 0                       | 1.0                | 33.9                    | -10.0                         | 23.9                    | 46.0           | -22.1       |
| 511.211                  | Qp            | H                      | 0                       | 1.0                | 33.8                    | -8.8                          | 25.0                    | 46.0           | -21.0       |

QP: RES. =100 KHZ, VID= 100 KHZ

**TABLE 8-4: DIGITAL INTERFACE RADIATED EMISSION (iTLM-1)**

| Temperature: 77°F        |               |                        |                         |                    | Humidity: 43%           |                               |                         |                |             |
|--------------------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------------|----------------|-------------|
| Emission Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBuV) | Site Correction Factor (dB/m) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 250.681                  | Qp            | H                      | 30                      | 1.0                | 33.6                    | -16.1                         | 17.5                    | 46.0           | -28.5       |
| 663.574                  | Qp            | H                      | 0                       | 1.0                | 22.4                    | -6.8                          | 15.6                    | 46.0           | -30.4       |
| 707.813                  | Qp            | H                      | 0                       | 1.0                | 25.4                    | -6.2                          | 19.2                    | 46.0           | -26.8       |
| 722.559                  | Qp            | H                      | 0                       | 1.0                | 31.0                    | -6.3                          | 24.7                    | 46.0           | -21.3       |
| 840.527                  | Qp            | H                      | 0                       | 1.0                | 30.2                    | -4.6                          | 25.6                    | 46.0           | -20.4       |
| 870.020                  | Qp            | H                      | 0                       | 1.0                | 26.0                    | -4.0                          | 22.0                    | 46.0           | -24.0       |

QP: RES. =100 KHZ, VID= 100 KHZ

**TABLE 8-5: RECEIVER RADIATED EMISSION (iTLM-1)**

| Temperature: 77°F Humidity: 43% |               |                        |                         |                    |                         |                               |                         |                |             |
|---------------------------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------------|----------------|-------------|
| Emission Frequency (MHz)        | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBuV) | Site Correction Factor (dB/m) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 902.665                         | Qp            | H                      | 0                       | 1.0                | 51.0                    | -14.9                         | 36.1                    | 46.0           | -9.9        |
| 914.769                         | Qp            | H                      | 0                       | 1.0                | 52.3                    | -10.7                         | 41.6                    | 46.0           | -4.4        |
| 927.941                         | Qp            | H                      | 0                       | 1.0                | 53.8                    | -14.9                         | 38.9                    | 46.0           | -7.1        |
| 1805.330                        | Av            | H                      | 0                       | 1.0                | 44.5                    | -10.3                         | 34.2                    | 54.0           | -19.8       |
| 1829.537                        | Av            | H                      | 0                       | 1.0                | 44.3                    | -14.8                         | 29.5                    | 54.0           | -24.5       |
| 1855.882                        | Av            | H                      | 0                       | 1.0                | 39.7                    | -10.1                         | 29.6                    | 54.0           | -24.4       |

QP: RES. =100 KHZ, VID= 100 KHZ

**TEST PERSONNEL:**

|                                         |                                                                                                 |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------|
| Daniel W. Baltzell<br>EMC Test Engineer | <br>Signature | October 1, 2003<br>Date Of Test |
|-----------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------|

## 9 RADIATED EMISSION LIMITS; SPURIOUS AND HARMONICS – FCC §15.247; IC RSS-210 §6.3

### 9.1 RADIATED SPURIOUS EMISSION LIMITS TEST PROCEDURE

Radiated Spurious Emissions applies to harmonics and spurious emissions that fall in the restricted and non-restricted bands. The restricted bands are listed in Part 15.205. The maximum permitted average field strength for the restricted band is listed in Part 15.209. The EUT was tested in the 3 orthogonal planes.

### 9.2 RADIATED SPURIOUS TEST EQUIPMENT

**TABLE 9-1: RADIATED SPURIOUS EMISSIONS TEST EQUIPMENT**

| RTL<br>ASSET # | MANUFACTURER             | MODEL                 | PART TYPE                                      | SERIAL NUMBER | CALIBRATION<br>DUE DATE |
|----------------|--------------------------|-----------------------|------------------------------------------------|---------------|-------------------------|
| 900772         | EMCO                     | 3161-02               | Horn Antenna (2 - 4 GHz)                       | 9804-1044     | 3/15/04                 |
| 900323         | EMCO                     | 3160-7                | Horn Antennas (8.2 - 12.4 GHz)                 | 9605-1054     | 6/10/04                 |
| 900356         | EMCO                     | 3160-08               | Horn Antennas (12.4 – 18 GHz)                  | 9607-1044     | 6/10/04                 |
| 900321         | EMCO                     | 3161-03               | Horn Antenna (4.0 - 8.2 GHz)                   | 9508-1020     | 4/10/04                 |
| 901053         | Schaffner &<br>Chase     | CBL6112B              | Bilog Antenna<br>(20 MHz - 2 GHz)              | 2648          | 7/3/04                  |
| 900931         | Hewlett Packard          | 8566B                 | Spectrum Analyzer<br>(100 Hz - 22 GHz)         | 3138A07771    | 5/12/04                 |
| 900930         | Hewlett Packard          | 85662A                | Spectrum Analyzer<br>Display Section           | 3144A20839    | 5/12/04                 |
| 900932         | Hewlett Packard          | 8449B                 | Microwave Preamplifier<br>(1 - 26.5 GHz)       | 3008A00505    | 4/22/04                 |
| 901020         | Hewlett Packard          | 8564E                 | Portable Spectrum Analyzer<br>(9 kHz - 40 GHz) | 3943A01719    | 7/15/04                 |
| 901232         | IW Microwave<br>Products | KPW-1503-<br>2400-KPS | High Frequency RF Cables                       | 240"          | 1/30/04                 |
| 901235         | IW Microwave<br>Products | KPS-1503-360-<br>KPS  | High Frequency RF Cables                       | 36"           | 1/30/04                 |

### 9.3 RADIATED EMISSIONS HARMONICS/SPURIOUS TEST DATA

**TABLE 9-2: RADIATED EMISSIONS HARMONICS/SPURIOUS (TX FREQUENCY: 902.4914 MHZ, WHIP ANTENNA)**

| Emission Frequency (MHz) | Analyzer Reading (dBuV) Peak | Analyzer Reading (dBuV) Average | Site Correction Factor (dB/m) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|--------------------------|------------------------------|---------------------------------|-------------------------------|-------------------------|----------------|-------------|
| 1805.332                 | 42.3                         | 30.8                            | 29.5                          | 60.3                    | 97.0           | -36.7       |
| 2707.995                 | 37.0                         | 26.8                            | 10.1                          | 36.9                    | 54.0           | -17.1       |
| 3610.658                 | 37.7                         | 31.7                            | 11.1                          | 42.8                    | 54.0           | -11.2       |
| 4513.321                 | 45.0                         | 35.7                            | 14.8                          | 50.5                    | 54.0           | -3.5        |
| 5415.984                 | 45.0                         | 38.0                            | 13.5                          | 51.5                    | 54.0           | -2.5        |
| 6318.647                 | 32.7                         | 23.3                            | 13.0                          | 36.3                    | 97.0           | -60.7       |
| 7221.310                 | 32.5                         | 23.8                            | 12.1                          | 35.9                    | 97.0           | -61.1       |
| 8123.973                 | 32.5                         | 23.5                            | 11.5                          | 35.0                    | 54.0           | -19.0       |
| 9026.636                 | 33.5                         | 22.7                            | 16.8                          | 39.5                    | 54.0           | -14.5       |

PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz

**TABLE 9-3: RADIATED EMISSIONS HARMONICS/SPURIOUS (TX FREQUENCY: 914.6038 MHZ, WHIP ANTENNA)**

| Emission Frequency (MHz) | Analyzer Reading (dBuV) Peak | Analyzer Reading (dBuV) Average | Site Correction Factor (dB/m) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|--------------------------|------------------------------|---------------------------------|-------------------------------|-------------------------|----------------|-------------|
| 1829.544                 | 35.0                         | 29.3                            | 30.1                          | 59.4                    | 96.8           | -37.5       |
| 2744.316                 | 33.3                         | 25.3                            | 10.1                          | 35.4                    | 54.0           | -18.6       |
| 3659.088                 | 47.0                         | 37.8                            | 10.3                          | 48.1                    | 54.0           | -5.9        |
| 4573.860                 | 44.3                         | 36.2                            | 15.0                          | 51.2                    | 54.0           | -2.8        |
| 5488.632                 | 47.3                         | 42.0                            | 13.6                          | 55.6                    | 96.8           | -41.2       |
| 6403.404                 | 34.8                         | 23.8                            | 13.1                          | 36.9                    | 96.8           | -59.9       |
| 7318.176                 | 26.0                         | 24.0                            | 11.6                          | 35.6                    | 54.0           | -18.4       |
| 8232.948                 | 32.3                         | 22.5                            | 16.7                          | 39.2                    | 54.0           | -14.8       |
| 9147.720                 | 34.0                         | 23.2                            | 16.5                          | 39.7                    | 54.0           | -14.3       |

PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz

**TABLE 9-4: RADIATED EMISSIONS HARMONICS/SPURIOUS (TX FREQUENCY: 927.7695 MHZ, WHIP ANTENNA)**

| Emission Frequency (MHz) | Analyzer Reading (dBuV) Peak | Analyzer Reading (dBuV) Average | Site Correction Factor (dB/m) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|--------------------------|------------------------------|---------------------------------|-------------------------------|-------------------------|----------------|-------------|
| 1855.883                 | 36.3                         | 30.2                            | 30.2                          | 60.4                    | 94.9           | -34.5       |
| 2783.821                 | 34.3                         | 26.0                            | 9.3                           | 35.3                    | 54.0           | -18.7       |
| 3711.759                 | 47.8                         | 41.2                            | 10.0                          | 51.2                    | 54.0           | -2.8        |
| 4639.697                 | 36.3                         | 30.0                            | 15.0                          | 45.0                    | 54.0           | -9.0        |
| 5567.635                 | 42.7                         | 32.2                            | 14.0                          | 46.2                    | 94.9           | -48.8       |
| 6495.573                 | 31.8                         | 22.3                            | 12.8                          | 35.1                    | 94.9           | -59.8       |
| 7423.511                 | 34.5                         | 25.0                            | 12.0                          | 37.0                    | 54.0           | -17.0       |
| 8351.449                 | 33.3                         | 22.3                            | 16.8                          | 39.1                    | 54.0           | -14.9       |
| 9279.387                 | 32.0                         | 22.7                            | 16.8                          | 39.5                    | 94.9           | -55.4       |

PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz

**TABLE 9-5: RADIATED EMISSIONS HARMONICS/SPURIOUS (TX FREQUENCY: 902.4914 MHZ, YAGI ANTENNA)**

| Emission Frequency (MHz) | Analyzer Reading (dBuV) Peak | Analyzer Reading (dBuV) Average | Site Correction Factor (dB/m) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|--------------------------|------------------------------|---------------------------------|-------------------------------|-------------------------|----------------|-------------|
| 1805.332                 | 32.2                         | 23.7                            | 29.5                          | 53.2                    | 98.1           | -44.9       |
| 2707.995                 | 35.3                         | 24.2                            | 10.1                          | 34.3                    | 54.0           | -19.7       |
| 3610.658                 | 37.0                         | 32.3                            | 11.1                          | 43.4                    | 54.0           | -10.6       |
| 4513.321                 | 35.2                         | 27.5                            | 14.8                          | 42.3                    | 54.0           | -11.7       |
| 5415.984                 | 44.2                         | 36.0                            | 13.5                          | 49.5                    | 54.0           | -4.5        |
| 6318.647                 | 30.8                         | 20.8                            | 13.0                          | 33.8                    | 98.1           | -64.3       |
| 7221.310                 | 33.3                         | 23.0                            | 12.1                          | 35.1                    | 98.1           | -63.0       |
| 8123.973                 | 32.3                         | 22.5                            | 11.5                          | 34.0                    | 54.0           | -20.0       |
| 9026.636                 | 36.2                         | 22.8                            | 16.8                          | 39.6                    | 54.0           | -14.4       |

PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz

**TABLE 9-6: RADIATED EMISSIONS HARMONICS/SPURIOUS (TX FREQUENCY: 914.6038 MHZ, YAGI ANTENNA)**

| Emission Frequency (MHz) | Analyzer Reading (dBuV) Peak | Analyzer Reading (dBuV) Average | Site Correction Factor (dB/m) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|--------------------------|------------------------------|---------------------------------|-------------------------------|-------------------------|----------------|-------------|
| 1829.544                 | 33.7                         | 23.8                            | 30.1                          | 53.9                    | 98.3           | -44.4       |
| 2744.316                 | 34.2                         | 23.5                            | 10.1                          | 33.6                    | 54.0           | -20.4       |
| 3659.088                 | 46.0                         | 39.3                            | 10.3                          | 49.6                    | 54.0           | -4.4        |
| 4573.860                 | 35.0                         | 28.8                            | 15.0                          | 43.8                    | 54.0           | -10.2       |
| 5488.632                 | 38.3                         | 32.8                            | 13.6                          | 46.4                    | 98.3           | -51.9       |
| 6403.404                 | 32.7                         | 20.8                            | 13.1                          | 33.9                    | 98.3           | -64.4       |
| 7318.176                 | 36.3                         | 23.3                            | 11.6                          | 34.9                    | 54.0           | -19.1       |
| 8232.948                 | 34.3                         | 23.0                            | 16.7                          | 39.7                    | 54.0           | -14.3       |
| 9147.720                 | 32.8                         | 23.2                            | 16.5                          | 39.7                    | 54.0           | -14.3       |

PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz

**TABLE 9-7: RADIATED EMISSIONS HARMONICS/SPURIOUS (TX FREQUENCY: 927.7695 MHZ, YAGI ANTENNA)**

| Emission Frequency (MHz) | Analyzer Reading (dBuV) Peak | Analyzer Reading (dBuV) Average | Site Correction Factor (dB/m) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|--------------------------|------------------------------|---------------------------------|-------------------------------|-------------------------|----------------|-------------|
| 1855.883                 | 32.5                         | 26.2                            | 30.2                          | 56.4                    | 96.2           | -39.8       |
| 2783.821                 | 34.8                         | 23.7                            | 9.3                           | 33.0                    | 54.0           | -21.0       |
| 3711.759                 | 44.8                         | 35.0                            | 10.0                          | 45.0                    | 54.0           | -9.0        |
| 4639.697                 | 44.7                         | 35.2                            | 15.0                          | 50.2                    | 96.2           | -46.0       |
| 5567.635                 | 36.2                         | 28.8                            | 14.0                          | 42.8                    | 96.2           | -53.4       |
| 6495.573                 | 34.0                         | 22.0                            | 12.8                          | 34.8                    | 96.2           | -61.4       |
| 7423.511                 | 33.2                         | 23.2                            | 12.0                          | 35.2                    | 54.0           | -18.8       |
| 8351.449                 | 32.8                         | 22.5                            | 16.8                          | 39.3                    | 54.0           | -14.7       |
| 9279.387                 | 32.0                         | 22.7                            | 16.8                          | 39.5                    | 96.2           | -56.7       |

PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz

**TEST PERSONNEL:**

Daniel W. Baltzell  
EMC Test Engineer




Signature

September 26, 2003  
Date Of Test

## 10 CARRIER FREQUENCY SEPARATION - §15.247(a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The greatest measured 20 dB bandwidth was 144.2 kHz; since this is greater than 25 kHz, 144.2 kHz should be used as the minimum separation. As shown by the plot below, the EUT met this requirement.

PLOT 10-1: CARRIER FREQUENCY SEPARATION

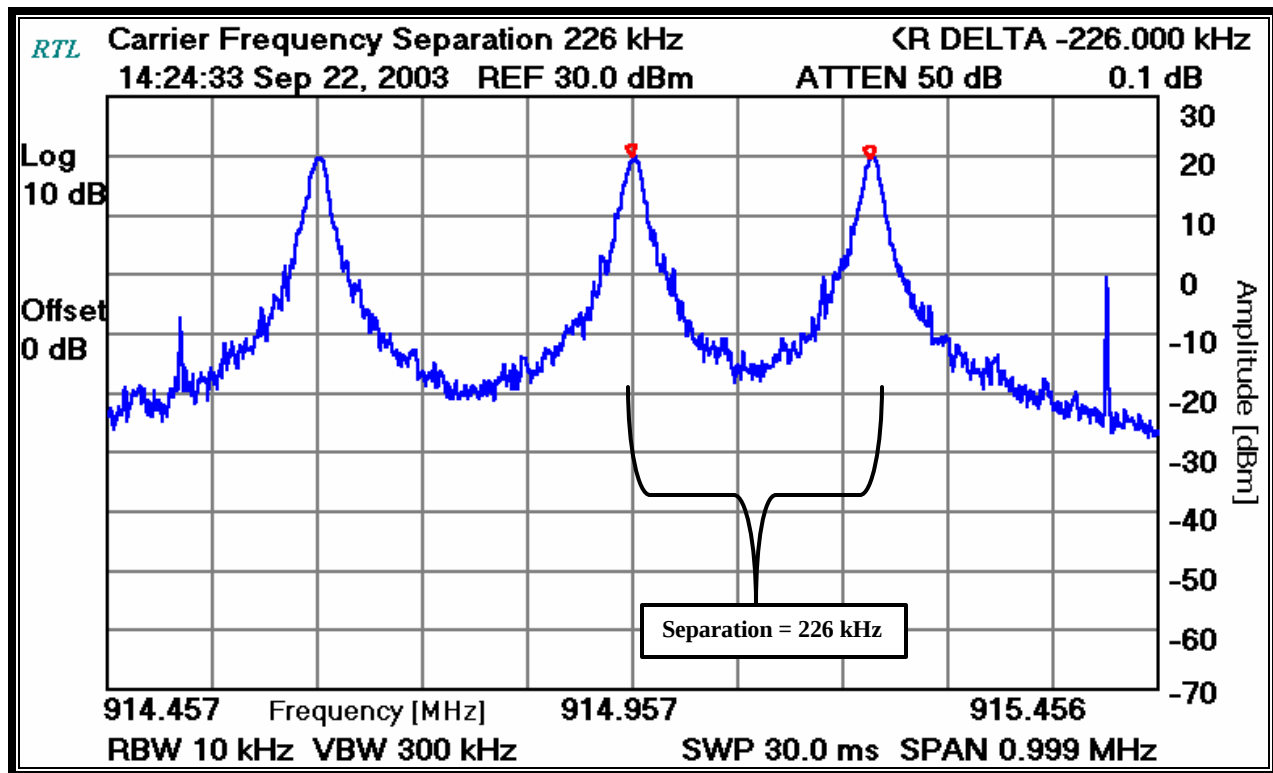

### TEST PERSONNEL:

Daniel W. Baltzell  
 EMC Test Engineer

*Daniel W. Baltzell*

Signature

September 22, 2003  
 Date Of Test


## 11 HOPPING CHARACTERISTICS – FCC §15.247 (a)(1)(i); IC RSS-210 §6.2.2(O)

For frequency hopping systems operating in the 902 - 928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

Since the 20 dB bandwidth of the EUT is less than 250 kHz, 50 hopping frequencies must be used. As shown by the plot below, the EUT met this requirement (53 hopping frequencies).

### 11.1 NUMBER OF HOPPING FREQUENCIES

PLOT 11-1: NUMBER OF HOPPING FREQUENCIES

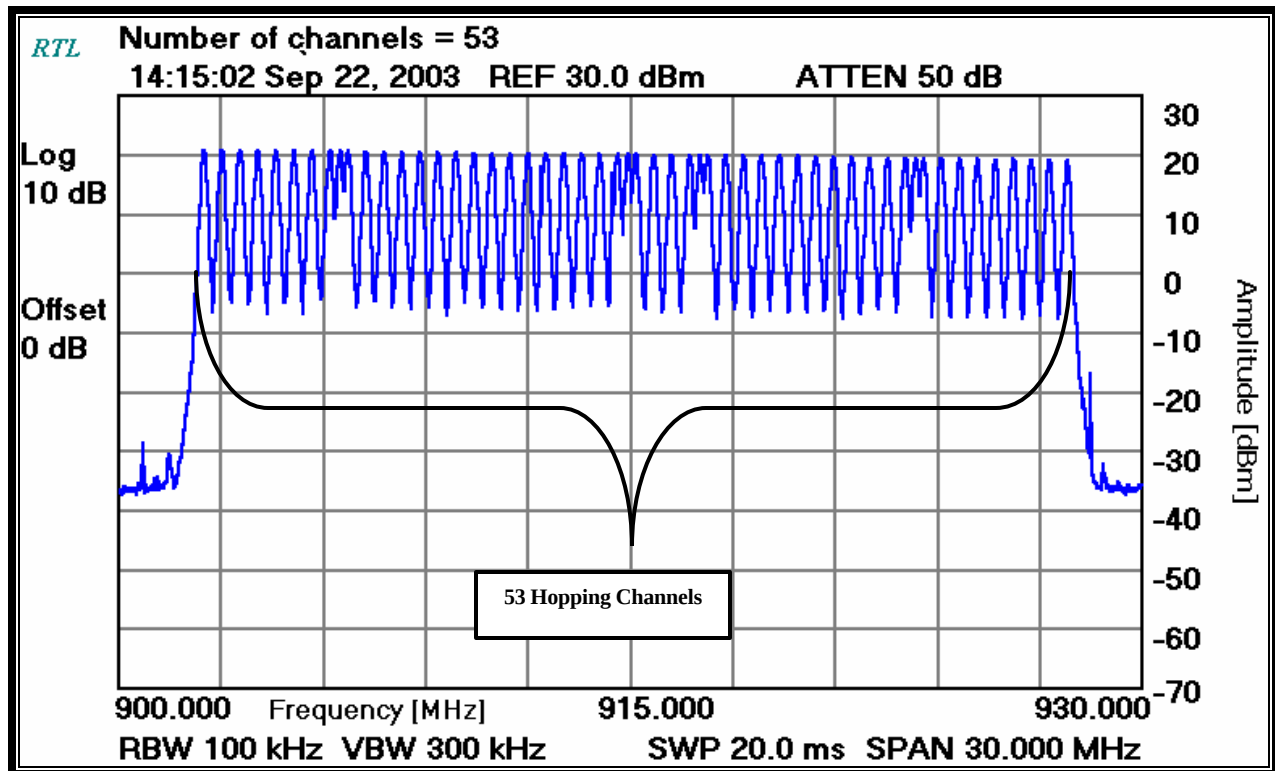

#### TEST PERSONNEL:

Daniel W. Baltzell  
EMC Test Engineer

Signature

September 22, 2003  
Date Of Test


## 11.2 AVERAGE TIME OF OCCUPANCY

Since the 20 dB bandwidth of the EUT is less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period. As shown by the plot below, the EUT met this requirement (390 ms).

Additionally, In discovery mode a transmitting device alternates between hopping with 1ms dwell time and hopping with 15ms dwell time. Transmission occurs on all 53 channels with 1ms dwell time followed by a single 15ms dwell at the next frequency. The device then stops transmission to listen for a response for approximately 8ms on the same channel and then restarts hopping with 1ms dwell time on all 53 channels followed by a 15ms dwell at the next frequency, etc. In this way the channel with 15ms dwell time advances one position in the hop sequence for each 15ms dwell occurrence (which occurs every 76ms). Thus one 15ms dwell occurs for all 53 channels in the space of 4.028 seconds, and the whole sequence then repeats, typically until discovery of any potential target receiver(s) is complete. The net result is that each channel is occupied for 69 milliseconds in any 4.028 seconds interval, and in any case not more than 400ms in any 20 second period.

In normal transmission a transmitting device channel hops in a pre-defined pseudo random sequence of 53 steps. Hopping is in synchronism with its target receiver with a hop rate of 3 hops per second. Any one channel is occupied for 333ms in this hop sequence which repeats after 53/3 seconds (17.667 seconds). In any case each channel in the hop sequence occupies no more than 400ms in any 20 second period.

PLOT 11-2: TIME OF OCCUPANCY (DWELL TIME)

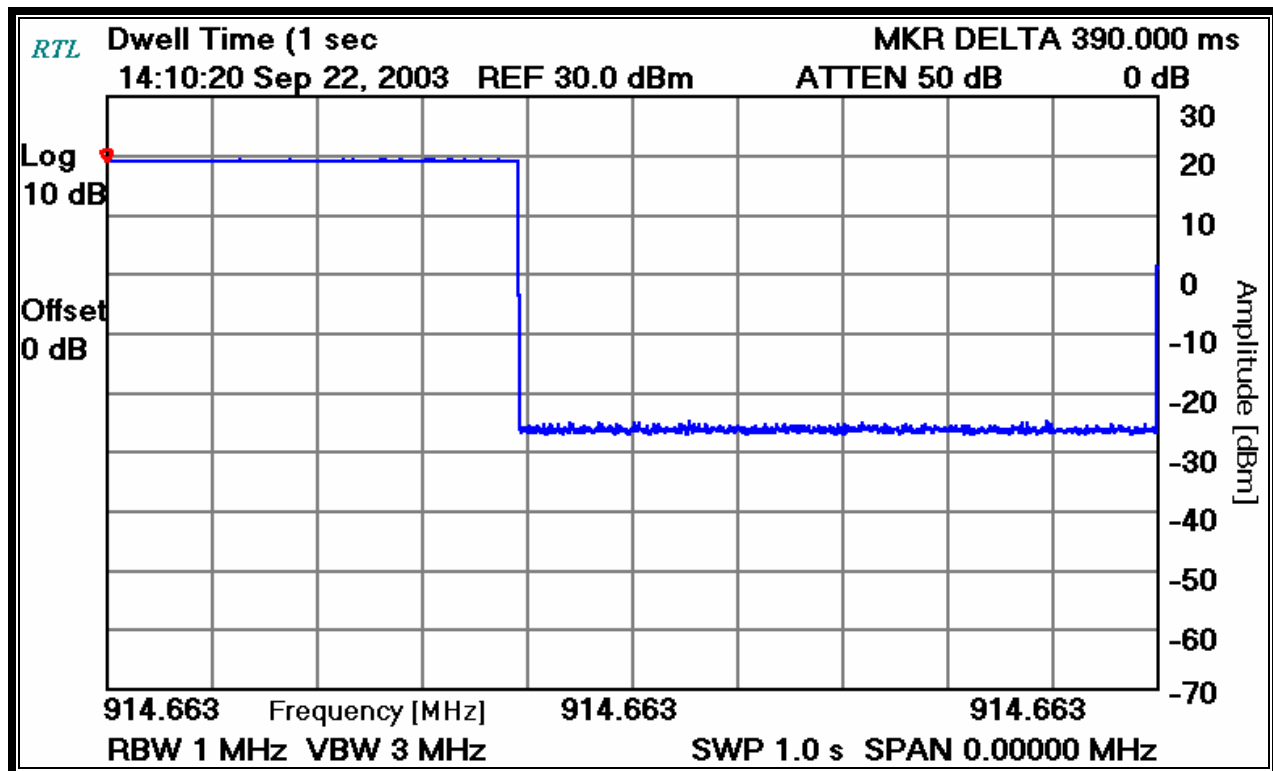

Rhein Tech Laboratories, Inc.  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: Luna iMonitoring  
Model Name/ #: iEFM, iTLM-1, iWPM-T  
FCC ID: RIM-IMON  
FCC: 15.247  
IC: RSS-210

**TEST PERSONNEL:**

Daniel W. Baltzell  
EMC Test Engineer



Signature

September 22, 2003  
Date Of Test

### 11.3 20 dB BANDWIDTH – FCC §15.247 (a)(1)(i); IC RSS-210 §5.9.1

The minimum 20 dB bandwidths were measured using a 50 ohm spectrum analyzer. The carrier was adjusted on the analyzer so that it was displayed entirely on the Spectrum Analyzer. The sweep time was set to 10 seconds and allowed through several sweeps with the max hold function used in peak detector mode. The resolution bandwidth was set to 100 kHz, and the video bandwidth set at 300 kHz. The minimum 20 dB bandwidths were measured using the spectrum analyzer delta marker set 20 dB down from the peak of the carrier.

The maximum allowed 20 dB bandwidth is 500 kHz. As shown in the following table and plots, the EUT met this requirement.

**TABLE 11-1: 20 dB BANDWIDTH TEST EQUIPMENT**

| RTL<br>ASSET<br># | MANUFACTURER    | MODEL | PART TYPE                             | SERIAL<br>NUMBER | CALIBRATION<br>DUE DATE |
|-------------------|-----------------|-------|---------------------------------------|------------------|-------------------------|
| 900931            | Hewlett Packard | 8566B | Spectrum Analyzer<br>(100Hz – 22 GHz) | 3138A07771       | 5/12/04                 |


**TABLE 11-2: MODULATED BANDWIDTH TEST DATA**

#### Minimum 20 dB bandwidths

| FREQUENCY (MHz) | 20 dB BANDWIDTH (kHz) |
|-----------------|-----------------------|
| 902.4914        | 144.2                 |
| 914.6038        | 140.8                 |
| 927.7695        | 139.3                 |

#### TEST PERSONNEL:


Daniel W. Baltzell  
 EMC Test Engineer



Signature

September 22, 2003  
 Date Of Test

PLOT 11-3: 20 DB BANDWIDTH (TX FREQUENCY: 902.4914 MHZ)

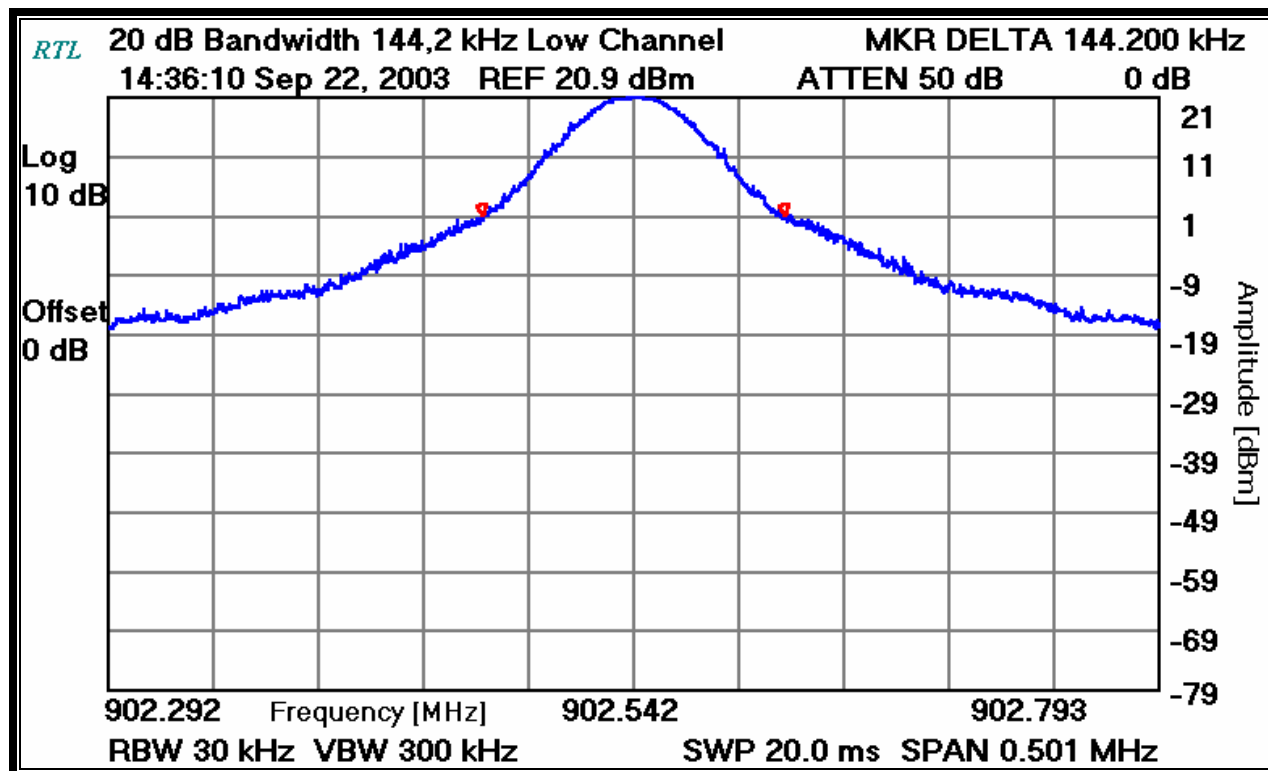


TEST PERSONNEL:

Daniel W. Baltzell  
 EMC Test Engineer

Signature

September 22, 2003  
 Date Of Test

PLOT 11-4: 20 DB BANDWIDTH (TX FREQUENCY: 914.6038 MHZ)

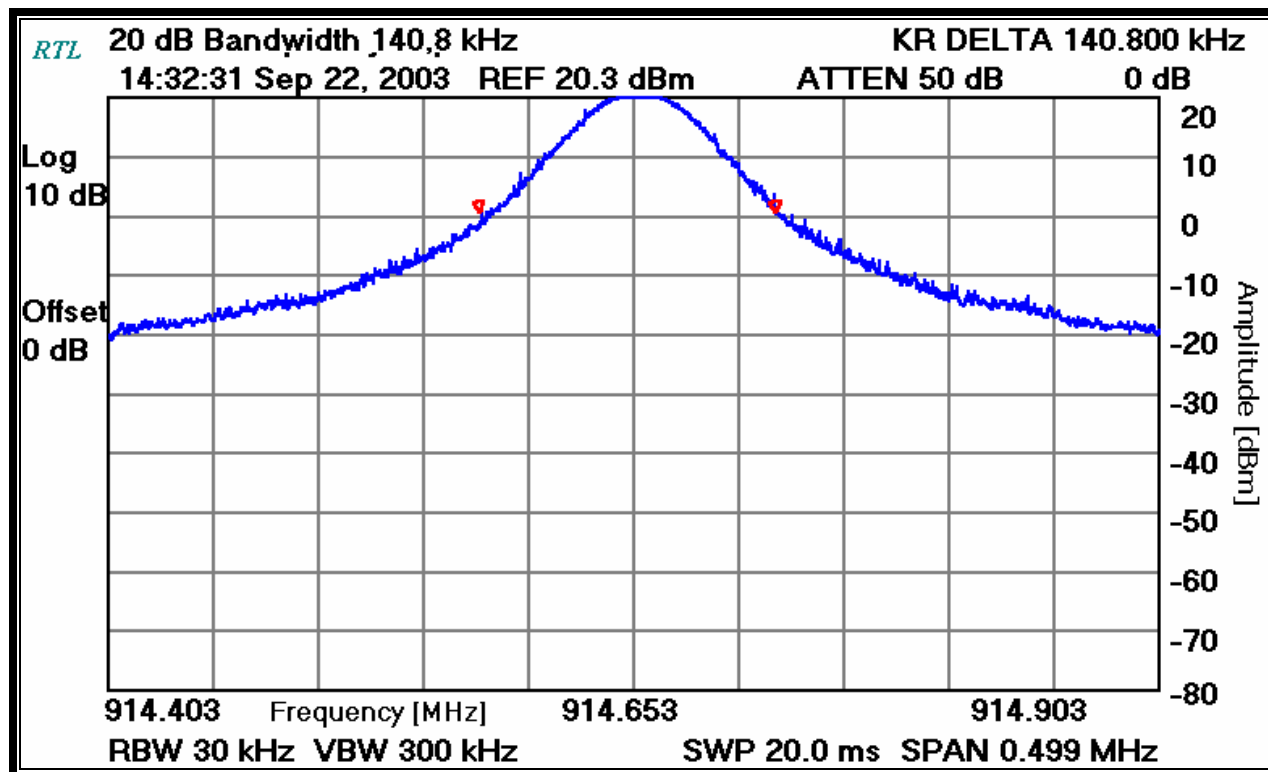


TEST PERSONNEL:

Daniel W. Baltzell  
 EMC Test Engineer

Signature

September 22, 2003  
 Date Of Test

PLOT 11-5: 20 DB BANDWIDTH (TX FREQUENCY: 927.7695 MHz)

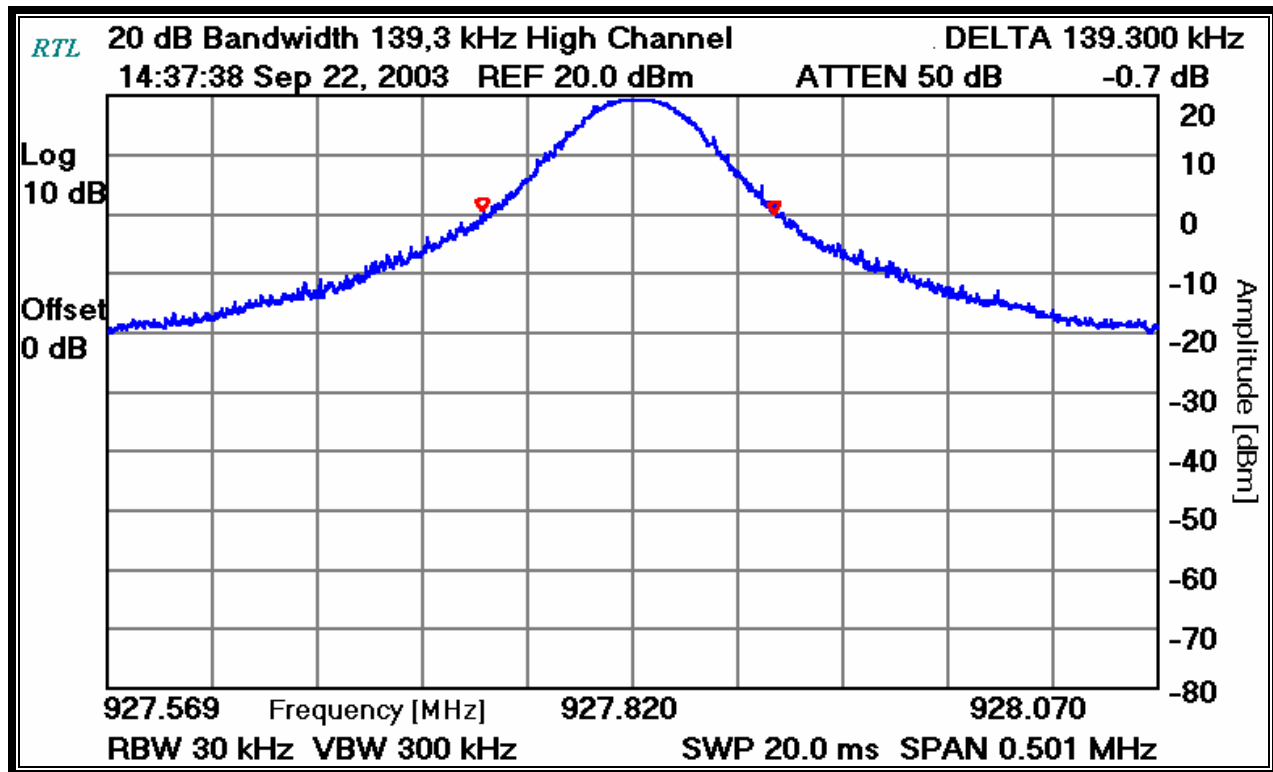

TEST PERSONNEL:

Daniel W. Baltzell  
EMC Test Engineer

Signature

September 22, 2003  
Date Of Test

## 12 PEAK OUTPUT POWER - FCC §15.247(b)(2); IC RSS-210 §6.2.2(o)(b)

For frequency hopping systems operating in the 902-928 MHz band and employing at least 50 hopping channels, the maximum peak output power is 1 watt. As shown by the table below, the EUT met this requirement.

### 12.1 CONDUCTED ANTENNA PORT POWER OUTPUT TEST PROCEDURE

A conducted power measurement of the EUT was taken using an Agilent 4416A EPM-P Series Power Meter with an E9323A Peak and Average Power Sensor.

### 12.2 CONDUCTED ANTENNA PORT POWER OUTPUT TEST EQUIPMENT

**TABLE 12-1: CONDUCTED ANTENNA PORT POWER OUTPUT TEST EQUIPMENT**

| RTL<br>ASSET<br># | MANUFACTURER            | MODEL                 | PART TYPE                                    | SERIAL<br>NUMBER | CALIBRATION<br>DUE DATE |
|-------------------|-------------------------|-----------------------|----------------------------------------------|------------------|-------------------------|
| 901186            | Agilent<br>Technologies | E9323A                | Peak & Avg. Power Sensor<br>(50 MHz - 6 GHz) | US40410380       | 7/30/04                 |
| 901184            | Agilent<br>Technologies | E4416A                | EPM-P Power Meter,<br>Single Channel         | GB41050573       | 7/30/04                 |
| 901140            | Weinschel Corp.         | 47-10-34 DC-<br>18GHz | Attenuator, 50W 10dB                         | BK6203           | 5/13/04                 |

### 12.3 CONDUCTED ANTENNA PORT POWER OUTPUT TEST DATA

**TABLE 12-2: CONDUCTED ANTENNA PORT POWER OUTPUT TEST DATA**


| <b>FREQUENCY (MHz)</b> | <b>PEAK POWER<br/>CONDUCTED OUTPUT<br/>POWER SETTING -3 FOR WHIP<br/>ANTENNA<br/>(dBm)</b> | <b>PEAK POWER<br/>CONDUCTED OUTPUT POWER<br/>SETTING -3 FOR<br/>WHIP ANTENNA<br/>(mW)</b> |
|------------------------|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| 902.4914               | 16.5                                                                                       | 44.9                                                                                      |
| 914.6038               | 17.7                                                                                       | 58.9                                                                                      |
| 927.7695               | 16.6                                                                                       | 45.2                                                                                      |

**TABLE 12-3: CONDUCTED ANTENNA PORT POWER OUTPUT TEST DATA**

| <b>FREQUENCY (MHz)</b> | <b>PEAK POWER<br/>CONDUCTED OUTPUT<br/>POWER SETTING -6 FOR YAGI<br/>ANTENNA<br/>(dBm)</b> | <b>PEAK POWER<br/>CONDUCTED OUTPUT<br/>POWER SETTING -6 FOR YAGI<br/>ANTENNA<br/>(mW)</b> |
|------------------------|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| 902.4914               | 13.4                                                                                       | 21.9                                                                                      |
| 914.6038               | 13.2                                                                                       | 20.9                                                                                      |
| 927.7695               | 12.4                                                                                       | 17.4                                                                                      |

**TEST PERSONNEL:**

Daniel W. Baltzell  
 EMC Test Engineer



Signature

October 1 and 3, 2003  
 Date Of Test

### 13 ANTENNA CONDUCTED SPURIOUS EMISSIONS - §15.247(c); IC RSS-210 §6.2.2(o)(e1)

#### 13.1 ANTENNA CONDUCTED SPURIOUS EMISSIONS TEST PROCEDURES

Antenna spurious emission per FCC 15.247(c) was measured from the EUT antenna port using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 300 kHz. The modulated carrier was identified at the following frequencies: 902.4914 MHz, 914.6038 MHz and 927.7695 MHz. No other harmonics or spurs were found within 20 dB of the carrier level from 9kHz to the carrier 10<sup>th</sup> harmonic. See the Antenna Conducted Spurious Noise Table. The low, middle, and high frequencies were investigated and tested.

#### 13.2 ANTENNA CONDUCTED SPURIOUS TEST EQUIPMENT

**TABLE 13-1: ANTENNA CONDUCTED SPURIOUS TEST EQUIPMENT**

| RTL<br>ASSET<br># | MANUFACTURER    | MODEL | PART TYPE                              | SERIAL<br>NUMBER | CALIBRATION<br>DUE DATE |
|-------------------|-----------------|-------|----------------------------------------|------------------|-------------------------|
| 900931            | Hewlett Packard | 8566B | Spectrum Analyzer<br>(100 Hz – 22 GHz) | 3138A07771       | 5/12/04                 |

### 13.3 ANTENNA CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 902.4914 MHz)


Operating Frequency (MHz): 902.4914  
 Measured Level at 100kHz (dBm): 16.4  
 Limit (dBm): -3.6

TABLE 13-2: CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 902.4914 MHz)

| Frequency (MHz) | Measured Level (dBm) | Measured Level (dBc) | Limit (dBc) | Margin (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|
| 677.160         | -48.0                | 64.4                 | 20.0        | -44.4       |
| 789.846         | -46.0                | 62.4                 | 20.0        | -42.4       |
| 991.030         | -47.5                | 63.9                 | 20.0        | -43.9       |
| 1804.983        | -37.1                | 53.5                 | 20.0        | -33.5       |
| 2707.474        | -53.6                | 70.0                 | 20.0        | -50.0       |
| 3609.966        | -39.4                | 55.8                 | 20.0        | -35.8       |
| 4512.457        | -51.0                | 67.4                 | 20.0        | -47.4       |
| 5414.948        | -40.5                | 56.9                 | 20.0        | -36.9       |
| 6317.440        | -58.8                | 75.2                 | 20.0        | -55.2       |
| 7219.931        | -73.7                | 90.1                 | 20.0        | -70.1       |
| 8122.423        | -48.0                | 64.4                 | 20.0        | -44.4       |
| 9024.914        | -46.0                | 62.4                 | 20.0        | -42.4       |

#### TEST PERSONNEL:

Daniel W. Baltzell  
 EMC Test Engineer



Signature

October 1, 2003  
 Date Of Test

### 13.4 ANTENNA CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 914.6038 MHz)


Operating Frequency (MHz): 914.6038  
 Measured Level at 100kHz (dBm): 17.6  
 Limit (dBm): -2.4

TABLE 13-3: CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 914.6038 MHz)

| Frequency (MHz) | Measured Level (dBm) | Measured Level (dBc) | Limit (dBc) | Margin (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|
| 228.562         | -59.4                | 77.0                 | 20.0        | -57.0       |
| 686.097         | -51.9                | 69.5                 | 20.0        | -49.5       |
| 799.855         | -46.2                | 63.8                 | 20.0        | -43.8       |
| 1003.138        | -48.0                | 65.6                 | 20.0        | -45.6       |
| 1829.208        | -34.7                | 52.3                 | 20.0        | -32.3       |
| 2743.811        | -54.7                | 72.3                 | 20.0        | -52.3       |
| 3658.415        | -39.1                | 56.7                 | 20.0        | -36.7       |
| 4573.019        | -50.2                | 67.8                 | 20.0        | -47.8       |
| 5487.623        | -43.1                | 60.7                 | 20.0        | -40.7       |
| 6402.227        | -60.7                | 78.3                 | 20.0        | -58.3       |
| 7316.830        | -73.5                | 91.1                 | 20.0        | -71.1       |
| 8231.434        | -79.5                | 97.1                 | 20.0        | -77.1       |
| 9146.038        | -80.0                | 97.6                 | 20.0        | -77.6       |

#### TEST PERSONNEL:

Daniel W. Baltzell  
 EMC Test Engineer



Signature

October 1, 2003  
 Date Of Test

### 13.5 ANTENNA CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 927.7695 MHz)

Operating Frequency (MHz): 927.7695  
Measured Level at 100kHz (dBm): 16.4  
Limit (dBm): -3.6

TABLE 13-4: CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 927.7695 MHZ)

| Frequency (MHz) | Measured Level (dBm) | Measured Level (dBc) | Limit (dBc) | Margin (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|
| 696.109         | -44.6                | 61.0                 | 20.0        | -41.0       |
| 754.037         | -50.0                | 66.4                 | 20.0        | -46.4       |
| 811.961         | -43.8                | 60.2                 | 20.0        | -40.2       |
| 986.812         | -50.5                | 66.9                 | 20.0        | -46.9       |
| 1016.292        | -54.6                | 71.0                 | 20.0        | -51.0       |
| 1043.688        | -57.7                | 74.1                 | 20.0        | -54.1       |
| 1855.539        | -39.1                | 55.5                 | 20.0        | -35.5       |
| 2783.309        | -57.9                | 74.3                 | 20.0        | -54.3       |
| 3711.078        | -38.2                | 54.6                 | 20.0        | -34.6       |
| 4638.848        | -48.7                | 65.1                 | 20.0        | -45.1       |
| 5566.617        | -47.2                | 63.6                 | 20.0        | -43.6       |
| 6494.387        | -68.3                | 84.7                 | 20.0        | -64.7       |
| 7422.156        | -75.3                | 91.7                 | 20.0        | -71.7       |
| 8349.926        | -80.6                | 97.0                 | 20.0        | -77.0       |
| 9277.695        | -81.0                | 97.4                 | 20.0        | -77.4       |

#### TEST PERSONNEL:

Daniel W. Baltzell  
EMC Test Engineer



Signature

October 1, 2003  
Date Of Test

Rhein Tech Laboratories, Inc.  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: Luna iMonitoring  
Model Name/ #: iEFM, iTLM-1, iWPM-T  
FCC ID: RIM-IMON  
FCC: 15.247  
IC: RSS-210

## 14 CONCLUSION

The data in this measurement report shows that the EUT as tested, FCC ID: RIM-IMON, when used with the Nearson S467AH-915S and Bluewave EDY9432 Yagi antennas, complies with all the applicable requirements of Parts 2 and 15 of the FCC Rules and Regulations, and Industry Canada RSS-210.