

FCC PART 15.247


TEST REPORT

For

ZODIAC POOL SYSTEMS LLC

2882 Whiptail Loop # 100, Carlsbad, California 92010, United States

FCC ID: RIRWT000354

Report Type: Original Report	Product Name: WT000354 (IWCLC300W2.0)
Report Number: <u>RKSB250416001-00A</u>	
Report Date: <u>2026-04-10</u>	
Reviewed By: <u>Bard Liu</u>	
Approved By: <u>Kyle Xu</u>	
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S. Government. This report contains data that are not covered by the NVLAP accreditation.

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	8
SUPPORT EQUIPMENT LIST AND DETAILS	11
EXTERNAL I/O CABLE.....	11
BLOCK DIAGRAM OF TEST SETUP	11
SUMMARY OF TEST RESULTS.....	13
TEST EQUIPMENT LIST	14
FCC §1.1310 & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	15
APPLICABLE STANDARD	15
CALCULATED FORMULARY	15
CALCULATED DATA:.....	15
FCC §15.203 - ANTENNA REQUIREMENT.....	16
APPLICABLE STANDARD	16
ANTENNA CONNECTOR CONSTRUCTION	16
FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS	17
APPLICABLE STANDARD	17
TEST SYSTEM SETUP.....	17
EMI TEST RECEIVER SETUP.....	17
TEST PROCEDURE	18
TEST RESULTS SUMMARY	18
TEST DATA: SEE APPENDIX	18
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	19
APPLICABLE STANDARD	19
TEST SYSTEM SETUP.....	19
EMI TEST RECEIVER SETUP.....	20
TEST PROCEDURE	20
TEST RESULTS SUMMARY	21
TEST DATA: SEE APPENDIX	21
FCC §15.247(A) (2) - 6 DB EMISSION BANDWIDTH.....	22
APPLICABLE STANDARD	22
TEST PROCEDURE	22
TEST DATA: SEE APPENDIX	22
FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER	23
APPLICABLE STANDARD	23
TEST PROCEDURE	23
TEST DATA: SEE APPENDIX	23
FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE & CONDUCTED SPURIOUS EMISSION	24
APPLICABLE STANDARD	24

TEST PROCEDURE	24
TEST DATA: SEE APPENDIX	25
FCC §15.247(E) - POWER SPECTRAL DENSITY.....	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST DATA: SEE APPENDIX	26
APPENDIX - TEST DATA.....	27
AC LINE CONDUCTED EMISSIONS	27
SPURIOUS EMISSIONS	32
6 dB EMISSION BANDWIDTH	81
MAXIMUM CONDUCTED OUTPUT POWER.....	87
CONDUCTED SPURIOUS EMISSION.....	90
100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....	94
POWER SPECTRAL DENSITY	98
EUT PHOTOGRAPHS	103
TEST SETUP PHOTOGRAPHS	104

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	RKSB250416001-00A	R1V1	2026-04-10	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	ZODIAC POOL SYSTEMS LLC
Tested Model	IWC2 (300W),CONTROLLER/TRANSFORMER
Product Name	WT000354 (IWCLC300W2.0)
Power Supply	AC 120V
RF Function:	2.4G Wi-Fi; BLE
Operating Band/Frequency:	2.4G Wi-Fi: 2412~2462 MHz(802.11b/g/n20), 2422~2452 MHz(802.11n40) BLE(1 Mbps)/ BLE(2 Mbps): 2402-2480 MHz
Maximum Peak Output Power:	2.4G Wi-Fi: 802.11b: 18.532 dBm 802.11g: 15.017 dBm 802.11n20: 12.114 dBm 802.11n40: 9.862 dBm BLE(1 Mbps): 16.21 dBm BLE(2 Mbps): 16.04 dBm
Channel Number:	2.4G Wi-Fi: 11(802.11b/g/n20), 7(802.11n40) BLE(1 Mbps/2 Mbps): 40
Channel Separation:	2.4G Wi-Fi: 5 MHz BLE: 2 MHz
Modulation Type:	2.4G Wi-Fi: DSSS, OFDM BLE: GFSK
★Maximum Antenna Gain:	ANT 1 (W1038x): 4.71 dBi ; ANT 2 (AANE-WH-0209): 2.4 dBi

Note:

- 1. The maximum antenna gain was declared by the manufacturer.*
- 2. ANT1 and ANT2 are of the same antenna type. Choose ANT 1 with a larger antenna gain for full testing.*

All measurement and test data in this report was gathered from production sample serial number: RKSB250416001-1 (Assigned by the BACL (Kunshan). The EUT supplied by the applicant was received on 2025-04-16.)

Objective

This report is prepared for *ZODIAC POOL SYSTEMS LLC* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions' rules.

The tests were performed in order to determine Compliant with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024[▲], American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices and FCC 558074 D01 15.247 Meas Guidance v05r02.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	9 kHz~150 kHz	3.8dB
	150 kHz~30 MHz	3.4dB
	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu Province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No.: CN5055.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel List for BLE mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454	/	/
13	2428	27	2456	/	/

EUT was tested with channel 0, 19 and 39.

Channel List for Wi-Fi Mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g and 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40 mode, EUT was tested with Channel 3, 6 and 9.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

RF test software: EspRFTTestTool_v3.6_Manual

Pre-scan with all the data rates, and the worst case was performed as below:

Mode	Data Rate	★Power Level
802.11b	1 Mbps	25
802.11g	6 Mbps	40
802.11n-HT20	MCS0	40
802.11n-HT40	MCS0	50
BLE(1Mbps)	1Mbps	14
BLE(2Mbps)	2Mbps	14

Note: The power level was declared by the applicant.

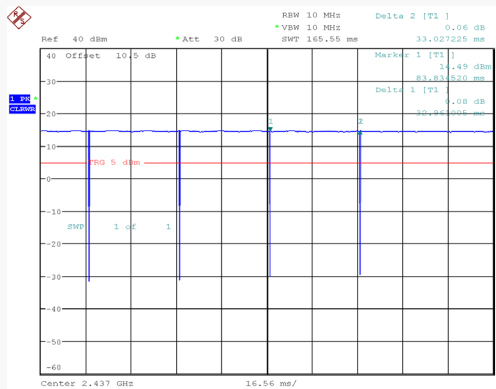
Environmental Conditions & Test Information

Test Date:	2025-05-17~ 2026-03-25
Temperature:	21.3 °C ~ 25.5 °C
Relative Humidity:	37 % - 55 %
ATM Pressure:	100.3kPa - 101.7kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

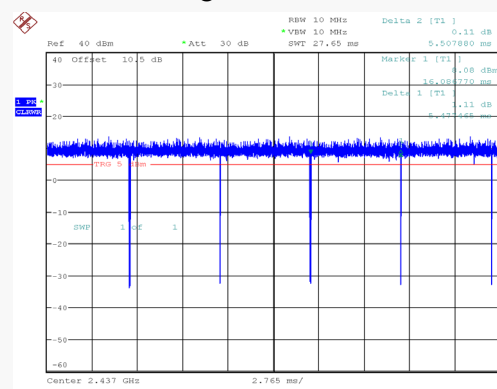
Mode	Duty Cycle (%)	Ton(ms)	Ton+off(ms)	10log(1/x) (dB)
802.11b	99.80	32.961	33.027	/
802.11g	99.44	5.477	5.508	/
802.11n-HT20	99.41	5.079	5.109	/
802.11n-HT40	98.00	2.445	2.495	/
BLE(1Mbps)	100	100	100	/
BLE(2Mbps)	100	100	100	/

Note:

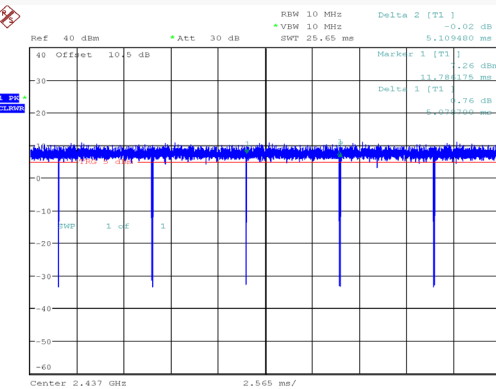
1. “x” means the Duty Cycle.
2. Offset (10.5dB) = Attenuator (10dB) + Cable Loss (0.5dB)

Duty Cycle:**802.11b Mode Middle Channel**

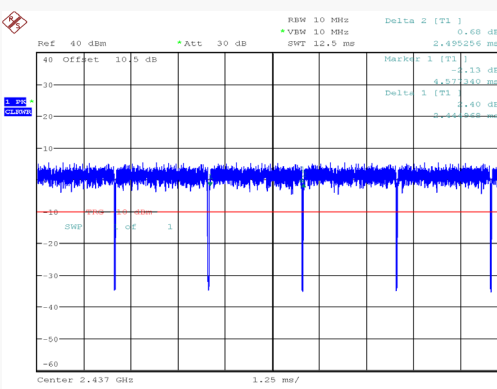
ProjectNo.:RKSB250416001 Tester:Neil Zhou
Date: 17.MAY.2025 15:06:45

802.11g Mode Middle Channel

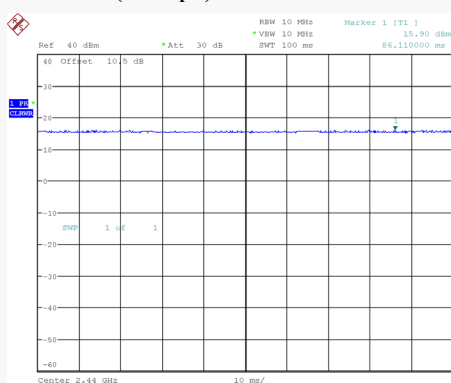
ProjectNo.:RKSB250416001 Tester:Neil Zhou
Date: 17.MAY.2025 15:43:44

802.11n-HT20 Mode Middle Channel

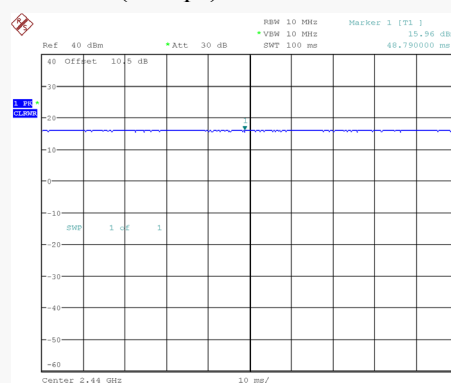
ProjectNo.:RKSB250416001 Tester:Neil Zhou
Date: 17.MAY.2025 16:26:15

802.11n-HT40 Mode Middle Channel

ProjectNo.:RKSB250416001 Tester:Neil Zhou
Date: 17.MAY.2025 17:16:49

BLE(1Mbps) Mode Middle Channel

ProjectNo.:RKSB250416001 Tester:Neil Zhou
Date: 25.MAR.2026 10:10:46

BLE(2Mbps) Mode Middle Channel

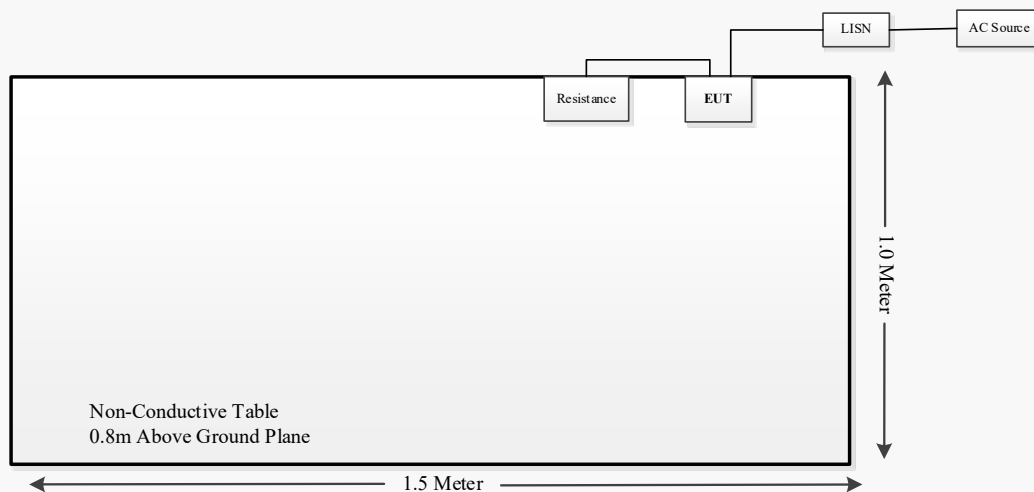
ProjectNo.:RKSB250416001 Tester:Neil Zhou
Date: 25.MAR.2026 10:11:35

Support Equipment List and Details

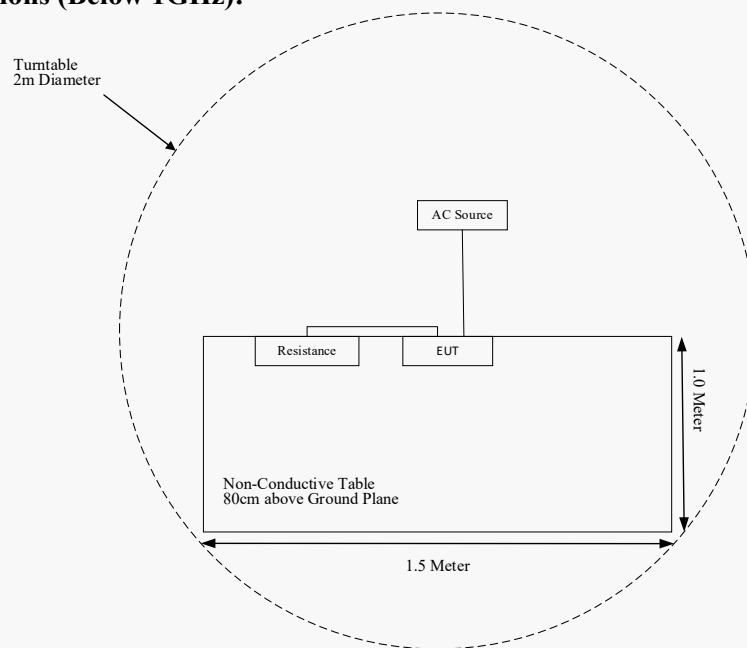
Manufacturer	Description	Model	Serial Number
/	Resistance	/	/

External I/O Cable

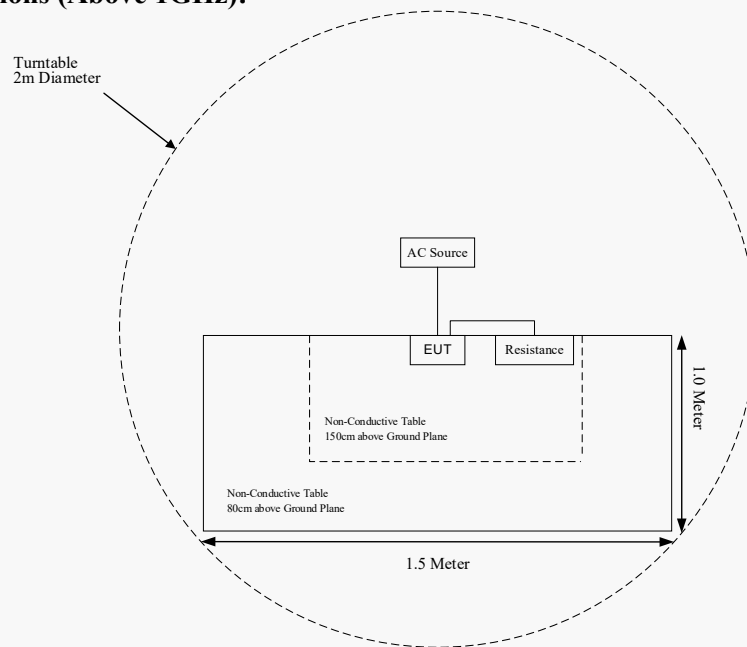
Cable Description	Length (m)	From Port	To Port
Power Cable 1	1.5	EUT	AC Source/LISN
Power Cable 2	0.5	Resistance	EUT

Block Diagram of Test Setup**For Conducted Emissions:**

For Radiated Emissions (Below 1GHz):



For Radiated Emissions (Above 1GHz):



SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310, §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge & Conducted Spurious Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber #1)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2025-04-09	2026-04-08
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2024-11-08	2027-11-07
Narda	6dB Attenuator	773-6	10690812-2-1	2024-10-29	2027-10-28
BACL	Active Loop Antenna	1313-1A	4041511	2024-11-22	2027-11-21
Sonoma Instrument	Pre-amplifier	310N	171205	2025-04-09	2026-04-08
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-9	009	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-10	010	2025-04-09	2026-04-08
Radiated Emission Test (Chamber #2)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2025-04-09	2026-04-08
ETS-LINDGREN	Horn Antenna	3115	9311-4159	2024-12-02	2027-12-01
ETS-LINDGREN	Horn Antenna	3116	2516	2024-12-12	2027-12-11
A.H.Systems, inc	Amplifier	PAM-0118P	512	2025-04-09	2026-04-08
SELECTOR	Amplifier	EM18G40G	060726	2025-04-09	2026-04-08
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2025-04-08	2026-04-07
Narda	Attenuator	10dB	010	2025-04-09	2026-04-08
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-11	011	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-12	012	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-13	013	2025-04-09	2026-04-08
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSU26	200103	2025-04-09	2026-04-08
Narda	Attenuator	10dB	010	2025-04-09	2026-04-08
XHFDZ	RG316 Coaxial Cable	SMA-316	XHF-1175	Each time	N/A
Anritsu	Power Sensor	MA24418A	12621	2025-04-09	2026-04-08
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2025-07-27	2026-07-26
Rohde & Schwarz	LISN	ENV216	101115	2025-04-08	2026-04-07
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	Pulse limiter	ESH3-Z2	100552	2025-04-08	2026-04-07
MICRO-COAX	Coaxial Cable	Cable-15	015	2025-04-08	2026-04-07

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		★Tune-up Output Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
2.4G Wi-Fi	2412-2462	4.71	2.96	19.00	79.43	20	0.0468	1.0
BLE	2402-2480	4.71	2.96	16.50	44.67	20	0.0263	1.0

Note:

1. For the above tune up power were declared by the manufacturer.
2. 2.4G Wi-Fi and BLE cannot transmit simultaneously.

Result: The device meet FCC MPE at 20 cm distance.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliant with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT have a rod antenna use a unique type of connector to attach to the EUT. fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.

Test Procedure

ANSI C63.10-2020 clause 6.2

During the conducted emission test, the EUT was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

If the maximum peak value of the emissions is below the average limit, the QP value and average value measurement will not need to be performed and only record the maximum peak measured value to meet the requirements.

Level & Over Limit Calculation

The Level is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

Level (dBμV) = Read level (dBμV) + Factor (dB)

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

Over Limit (dB) = Level (dBμV) - Limit (dBμV)

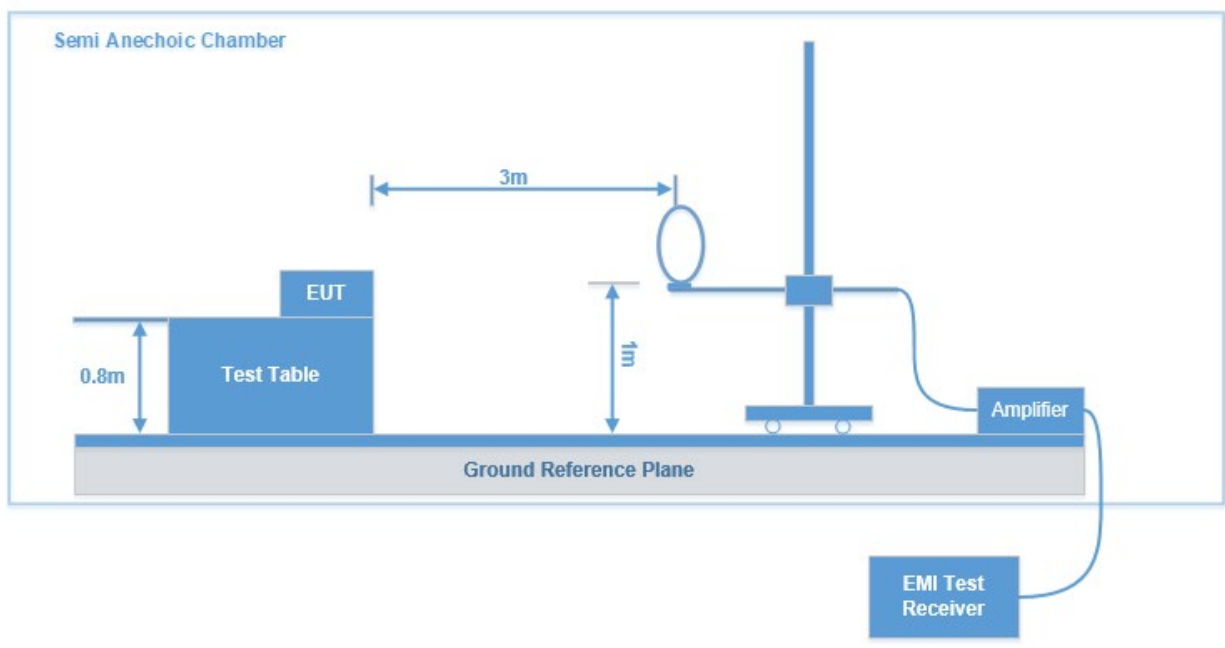
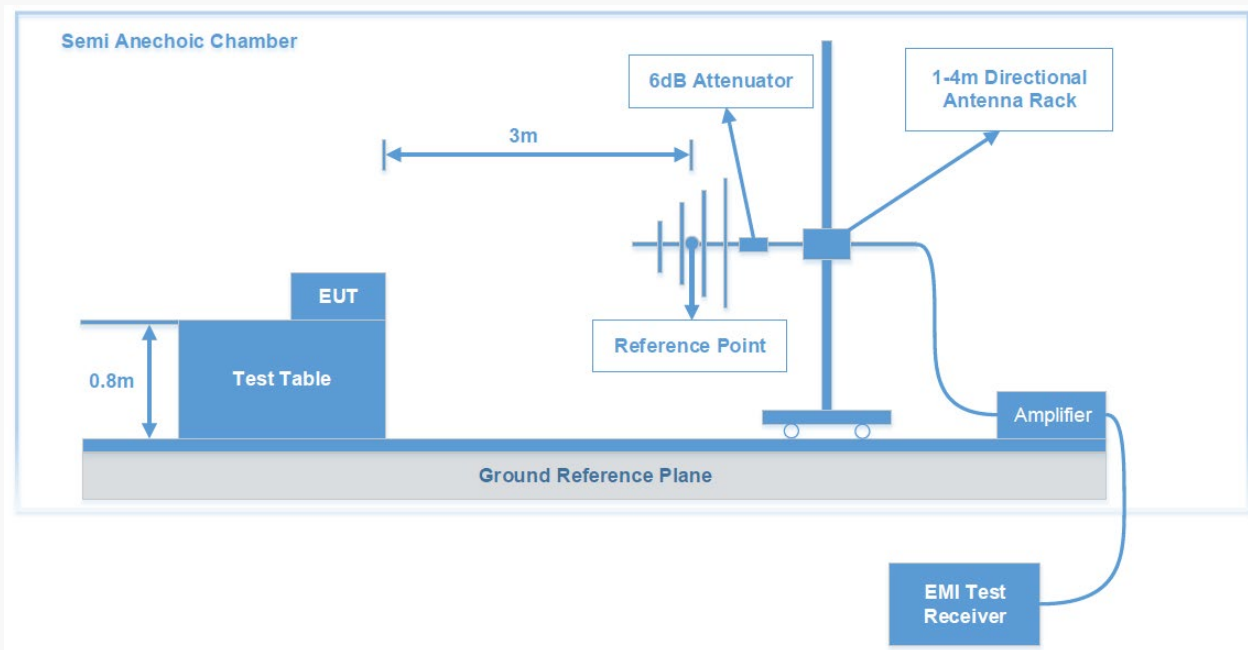
Test Results Summary

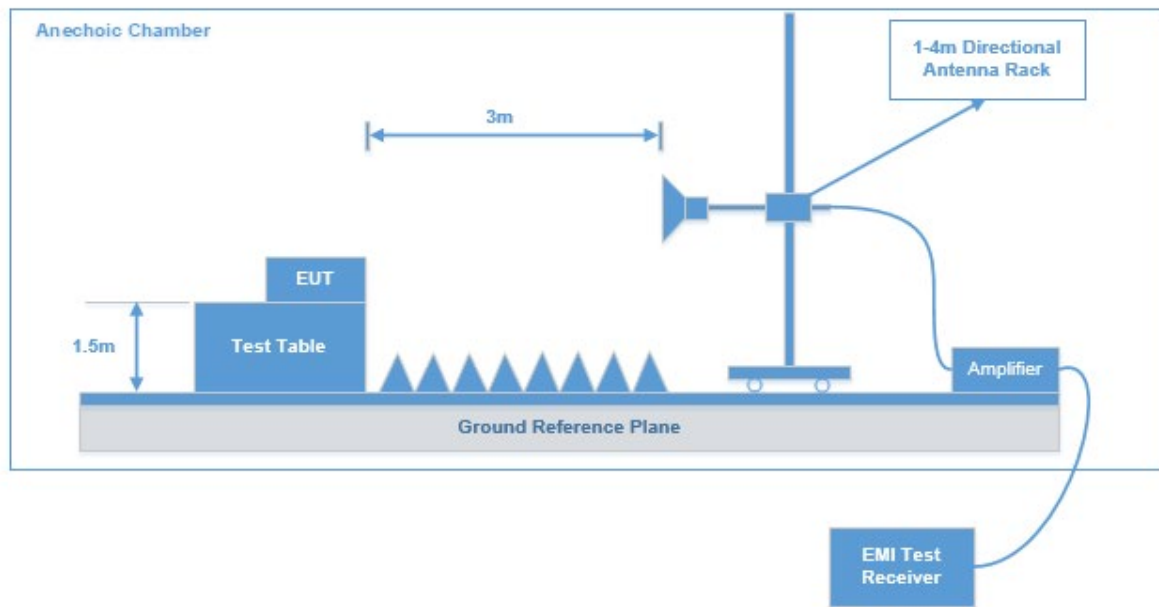
According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data: See Appendix

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

Test System Setup**9 kHz-30 MHz:****30 MHz-1 GHz:**

Above 1 GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	VBW	IF B/W	Measurement	Detector
9 kHz - 150 kHz	200 or 300 Hz	1 kHz	200 Hz	QP/Peak/Average	QP/Peak/Average
150 kHz - 30 MHz	9 or 10 kHz	30 kHz	9 kHz	QP/Peak/Average	QP/Peak/Average
30 MHz - 1000 MHz	100 kHz	300 kHz	/	Peak	Peak
	/	/	120 kHz	QP	QP
Above 1GHz	1MHz	3 MHz	/	Peak	Peak
	1MHz	3 MHz	/	Average	Average

Test Procedure

According to ANSI C63.10-2020 clause 6.4, 6.5 and 6.6.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

For 9 kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dBμV/m) = Meter Reading (dBμV) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, and Subpart C, section 15.205, 15.209 and 15.247.

Test Data: See Appendix

FCC §15.247(A) (2) - 6 DB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2020 sub-clause 11.8.1

- a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “– 6 dB down amplitude”. If a marker is below this “– 6 dB down amplitude” value, then it shall be as close as possible to this value.



Note: Offset (10.5 dB) = Attenuator (10 dB) + Cable loss (0.5 dB)

Test Data: See Appendix

FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliant with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.


Test Procedure

According to ANSI C63.10-2020 sub-clause 11.9.1.2

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

11.9.2.3.2 Method AVGPM-G


Method AVGPM-G is a measurement using a gated RF average power meter. Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.



For BLE:

According to ANSI C63.10-2020 sub-clause 11.9.1.1

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW $\geq$ $[3 \times \text{RBW}]$.
- c) Set span $\geq$ $[3 \times \text{RBW}]$.
- d) Sweep time = No faster than coupled (auto) time.
- e) Detector = peak.
- f) Trace mode = max-hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.



Note: Offset (10.5dB) = Attenuator (10dB) + Cable Loss (0.5dB)

Test Data: See Appendix

FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE & CONDUCTED SPURIOUS EMISSION

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliant with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2020 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Note: Offset (10.5 dB) = Attenuator (10 dB) + Cable loss (0.5 dB)

Conducted Spurious Emission

Applicable Standard


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2020 Section 11.11

- a) Set the center frequency and span to encompass frequency range to be measured
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = No faster than coupled (auto) time.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.



Note: the offset=Attenuator (10dB) + Cable loss (0.5dB) has been added in Spectrum Analyzer.

Test Data: See Appendix

FCC §15.247(E) - POWER SPECTRAL DENSITY

Applicable Standard


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2020 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine Compliant, and it is optional if the maximum conducted (average) output power was used to determine Compliant:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span >1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = No faster than coupled (auto) time.
- g) Trace mode = max-hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.



Note: Offset (10.5 dB) = Attenuator (10 dB) + Cable loss (0.5 dB)

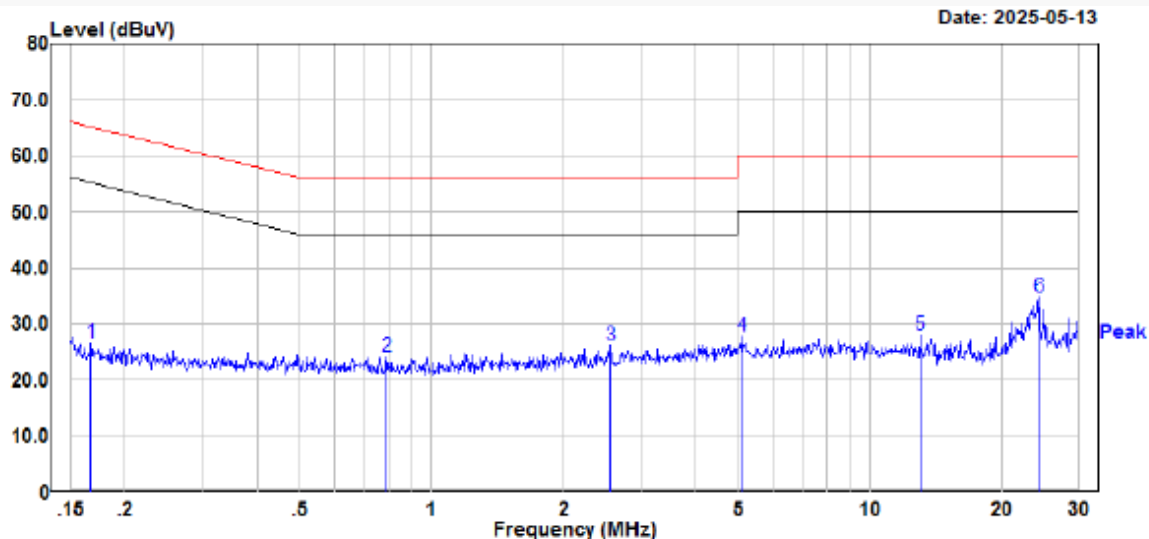
Test Data: See Appendix

APPENDIX - TEST DATA

AC LINE CONDUCTED EMISSIONS

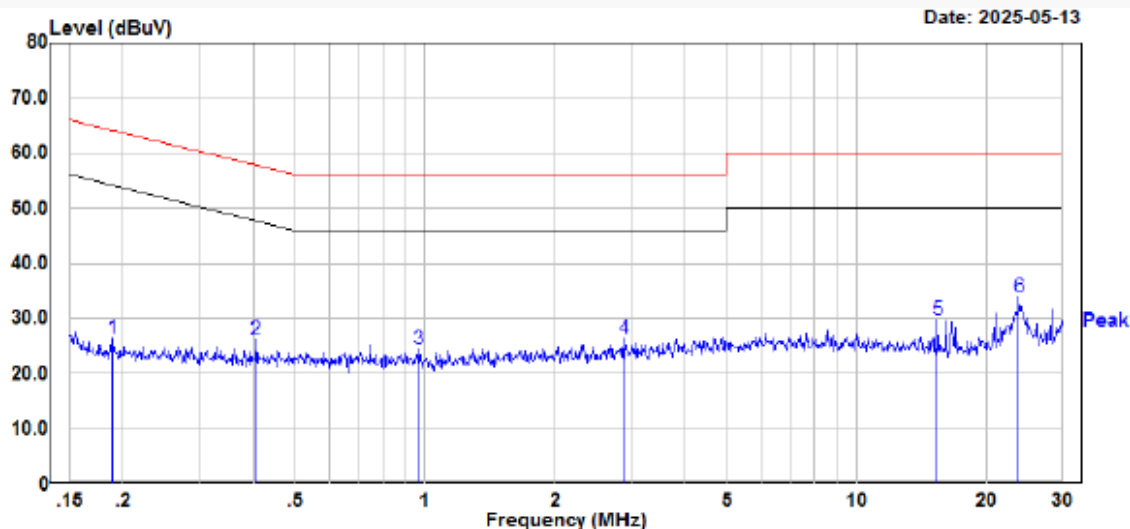
Environmental Conditions & Test Information

Test Date:	2025-05-13	2026-04-01
Temperature:	23.1 °C	18.8 °C
Relative Humidity:	35 %	57 %
ATM Pressure:	101.4 kPa	101.8 kPa
Test Result:	Pass	Pass
Test Engineer:	Myles Miao	Aiden Feng

For Wi-Fi Mode:*EUT operation mode: Transmitting in maximum output power mode and channel 802.11b mode high channel***Line:**

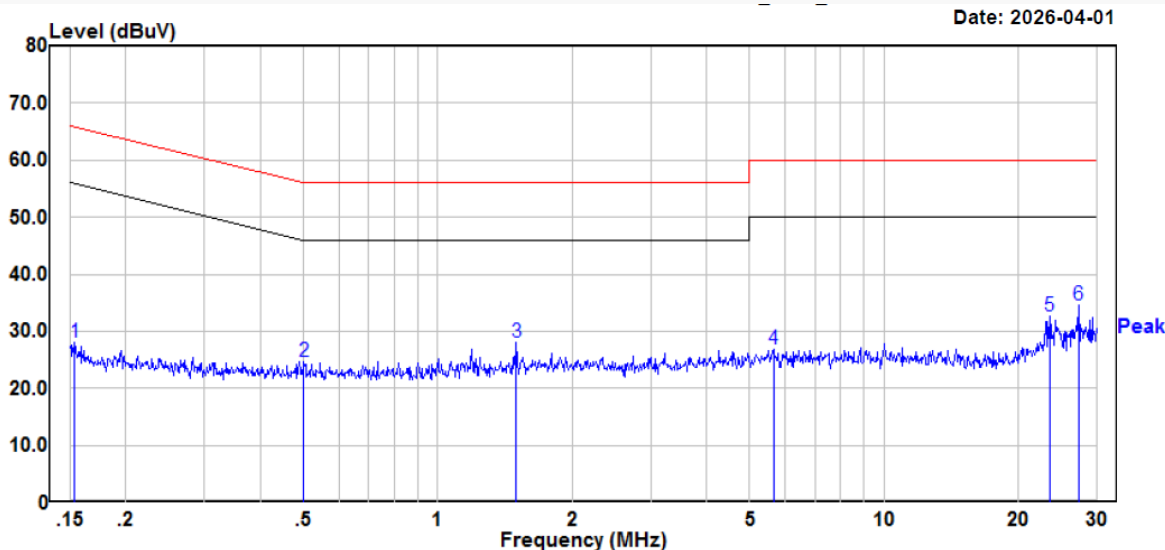
Site : CE
Condition : limit\FCC PART 15.207
: DET:Peak
Project No. : RKS250416001
Model : IWC2 (300W),CONTROLLER/TRANSFORMER
Phase : L
Voltage : 120V/60Hz
Mode : 2.4G WIFI
Test Equipment : ENV216,ESR
Receiver Setting : RBW: 9 kHz,Sweep Time: Auto
Temperature : 23.1°C
Humidity : 35%
Atmospheric pressure: 101.4KPa
Test Engineer : Myles Miao

		Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.167	6.44	20.11	26.55	65.09	-38.54	Peak
2	0.789	4.18	19.95	24.13	56.00	-31.87	Peak
3	2.557	5.93	20.20	26.13	56.00	-29.87	Peak
4	5.113	7.56	20.28	27.84	60.00	-32.16	Peak
5	12.986	8.22	19.81	28.03	60.00	-31.97	Peak
6	24.213	15.10	19.80	34.90	60.00	-25.10	Peak

Neutral:

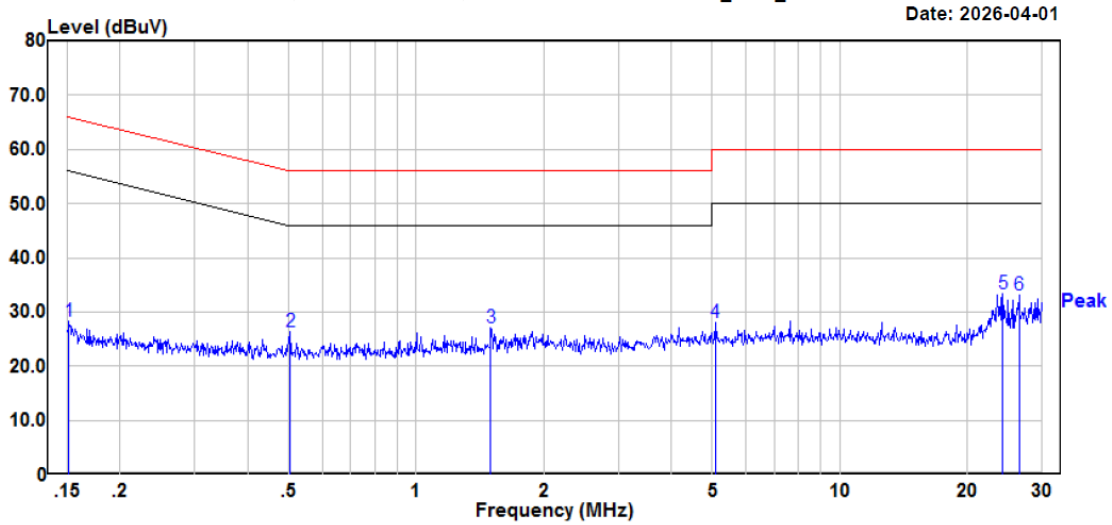
Site : CE
Condition : limit\FCC PART 15.207
: DET:Peak
Project No. : RKS250416001
Model : IWC2 (300W),CONTROLLER/TRANSFORMER
Phase : N
Voltage : 120V/60Hz
Mode : 2.4G WIFI
Test Equipment : ENV216,ESR
Receiver Setting : RBW: 9 kHz,Sweep Time: Auto
Temperature : 23.1°C
Humidity : 35%
Atmospheric pressure: 101.4KPa
Test Engineer : Myles Miao

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.189	6.18	20.11	26.29	64.10	-37.81	Peak
2	0.404	6.00	20.21	26.21	57.76	-31.55	Peak
3	0.968	4.74	19.75	24.49	56.00	-31.51	Peak
4	2.897	6.03	20.22	26.25	56.00	-29.75	Peak
5	15.384	10.13	19.70	29.83	60.00	-30.17	Peak
6	23.735	14.03	19.80	33.83	60.00	-26.17	Peak

For BLE Mode:*EUT operation mode: Transmitting in BLE (1 Mbps) high channel (maximum output power)***Line:**

Site : CE
Condition : limit\FCC PART 15.207\FCC 15.207 QP.csv Line
: DET:Peak
Project No. : RKS250416001
Model : IWC2 (300W),CONTROLLER/TRANSFORMER
Phase : L
Voltage : 120V/60Hz
Mode : BLE 1M
Test Equipment : ENV216,ESR3
Receiver Setting : RBW: 9 kHz,Sweep Time: Auto
Temperature : 18.8°C
Humidity : 57%
Atmospheric pressure: 101.8kPa
Test Engineer : Aiden Feng
Check by : Bard Liu

		Read		Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.154	7.75	20.41	28.16	65.79	-37.63 Peak
2	0.501	4.53	20.17	24.70	56.00	-31.30 Peak
3	1.500	7.69	20.24	27.93	56.00	-28.07 Peak
4	5.649	6.72	20.13	26.85	60.00	-33.15 Peak
5	23.499	11.95	20.62	32.57	60.00	-27.43 Peak
6	27.289	13.88	20.68	34.56	60.00	-25.44 Peak

Neutral:

Site : CE
 Condition : limit\FCC PART 15.207\FCC 15.207 QP.csv Neutral
 : DET:Peak
 Project No. : RKS250416001
 Model : IWC2 (300W),CONTROLLER/TRANSFORMER
 Phase : N
 Voltage : 120V/60Hz
 Mode : BLE 1M
 Test Equipment : ENV216,ESR3
 Receiver Setting : RBW: 9 kHz,Sweep Time: Auto
 Temperature : 18.8℃
 Humidity : 57%
 Atmospheric pressure: 101.8kPa
 Test Engineer : Aiden Feng
 Check by : Bard Liu

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.152	7.87	20.39	28.26	65.92	-37.66	Peak
2	0.504	6.27	20.20	26.47	56.00	-29.53	Peak
3	1.500	6.87	20.23	27.10	56.00	-28.90	Peak
4	5.087	7.78	20.16	27.94	60.00	-32.06	Peak
5	24.213	12.69	20.66	33.35	60.00	-26.65	Peak
6	26.485	12.53	20.68	33.21	60.00	-26.79	Peak

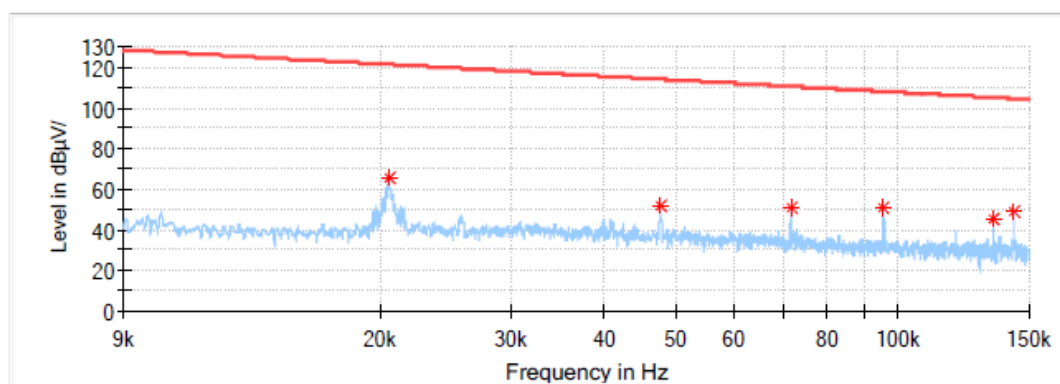
SPURIOUS EMISSIONS**Environmental Conditions & Test Information**

Test Item:	SPURIOUS EMISSIONS					
	9kHz - 1GHz			1 GHz - 18 GHz		18 GHz - 25 GHz
Test Date:	2026-03-26	2026-04-03	2026-04-09	2025-05-13	2026-03-24	2025-05-13 & 2025-06-17
Temperature:	23.6 °C	19.3 °C	20.6 °C	24.3 °C	17.8°C	24.3 °C & 25.2 °C
Relative Humidity:	47 %	55 %	59 %	48 %	50 %	48 % & 52 %
ATM Pressure:	101.8 kPa	101.3 kPa	100.3 kPa	101.4 kPa	102.8 kPa	101.4 kPa & 101.5 kPa
Test Result:	Pass	Pass	Pass	Pass	Pass	Pass
Test Engineer:	Scarf Yang	Scarf Yang	Scarf Yang	Destine Hu	Destine Hu	Hugh Wu

Test Result: Compliant*EUT operation mode: Transmitting**After pre-scan in the X, Y and Z axes of orientation, the worst case Y axis is below:*

For Wi-Fi Mode:**9 kHz-30MHz:** (Transmitting in maximum output power mode and 802.11b mode high channel)**Parallel(worst case)****9kHz-150kHz****Common Information**

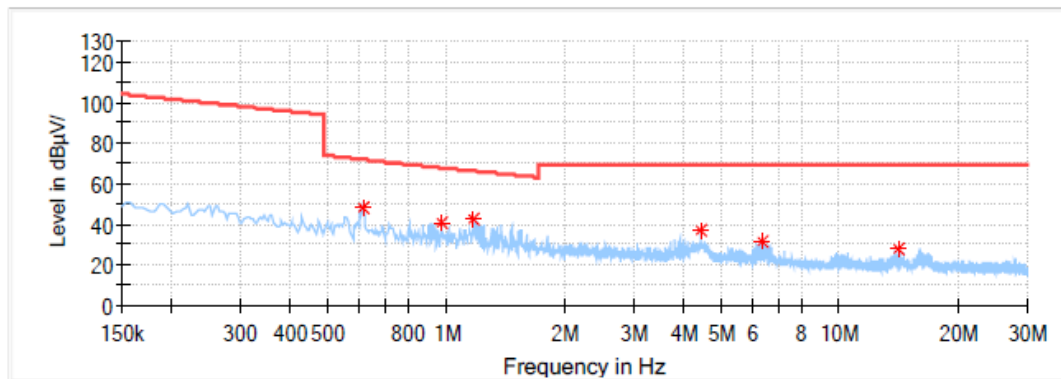
Project No: RKS250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Wireless function
Standard: FCC Part 15.247
Test Equipment: ESCI,1313-1A, 310N
Receiver Setting: RBW:200 Hz, VBW:1 kHz, Sweep Time: Auto
Temperature: 20.6℃
Humidity: 59%
Barometric Pressure: 100.3kPa
Test Engineer: Scarf Yang
Check by: Jenny Yang
Test Date: 2026/4/9

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
0.020527	65.63	121.35	55.72	Parallel	-0.1
0.047740	51.33	114.02	62.69	Parallel	-2.9
0.071622	50.84	110.50	59.66	Parallel	-5.8
0.095486	50.92	108.01	57.09	Parallel	-8.1
0.134508	45.58	105.03	59.45	Parallel	-10.0
0.143232	48.81	104.48	55.67	Parallel	-10.3

150kHz-30MHz**Common Information**

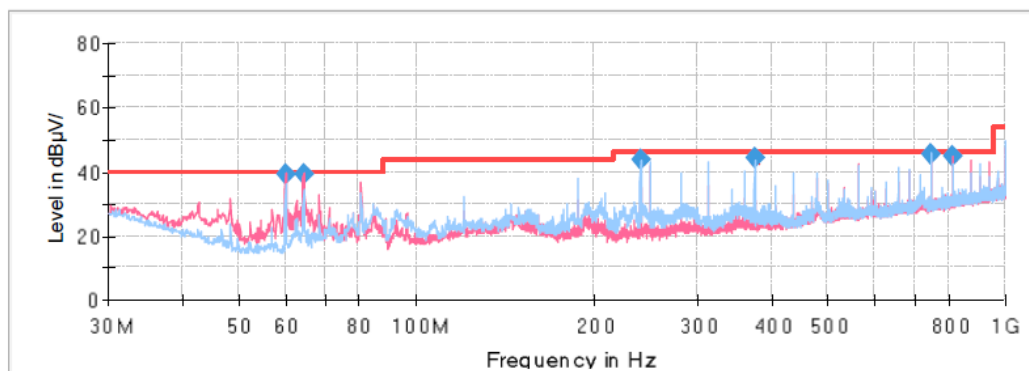
Project No:	RKS250416001
EUT Model:	WC2 (300W), CONTROLLER/TRANSFORMER
Test Mode:	Wireless function
Standard:	FCC Part 15.247
Test Equipment:	ESCI, 1313-1A, 310N
Receiver Setting:	RBW:9 kHz, VBW:30 kHz, Sweep Time: Auto
Temperature:	20.6°C
Humidity:	59%
Barometric Pressure:	100.3kPa
Test Engineer:	Scar Yang
Check by:	Jenny Yang
Test Date:	2026/4/9

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
0.616406	48.37	71.68	23.31	Parallel	-23.2
0.970875	40.46	67.65	27.19	Parallel	-26.8
1.168631	42.16	66.07	23.91	Parallel	-27.6
4.433475	37.05	69.54	32.49	Parallel	-31.3
6.392381	31.21	69.54	38.33	Parallel	-31.6
14.179500	27.44	69.54	42.10	Parallel	-32.2

30MHz-1GHz (Transmitting in maximum output power 802.11b mode high channel):**High Channel: 2462MHz****Common Information**

Project No: RKSB250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in 802.11b mode high channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESCI, JB3, 310N
Receiver Setting: RBW:100 kHz, VBW: 300 kHz, Sweep Time: Auto
Temperature: 23.6℃
Humidity: 47%
Barometric Pressure: 101.8kPa
Test Engineer: Scarf Yang
Test Date: 2026/3/26

**Final Result**

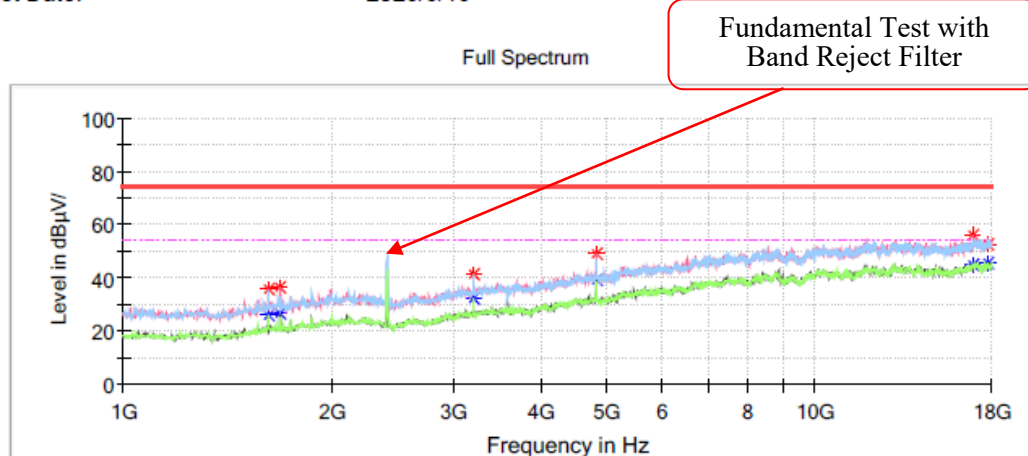
Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB)
59.948750	39.40	40.00	0.60	V	-17.1
64.435000	39.31	40.00	0.69	V	-16.9
240.005000	43.87	46.00	2.13	H	-12.3
374.956250	44.19	46.00	1.81	H	-8.6
749.982500	45.61	46.00	0.39	H	-1.6
812.547500	44.66	46.00	1.34	H	-0.6

1GHz-18GHz:
802.11b Mode:

Low Channel: 2412MHz

Common Information

Project No.:	RKSB250416001
EUT Model:	IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode:	Transmitting in 802.11b mode 2412 channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.3℃
Humidity:	48%
Atmospheric Pressure:	101.4kPa
Test Engineer:	Destine Hu
Test Date:	2025/5/13



Critical Freqs

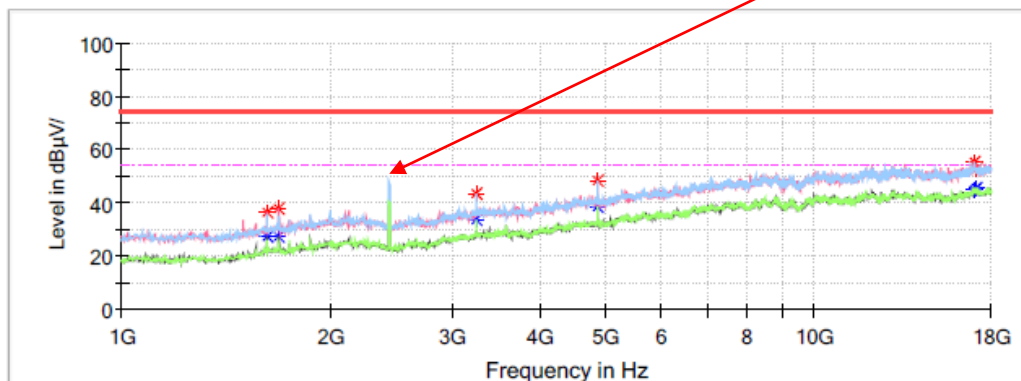
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1622.200000	---	25.98	54.00	28.02	V	-13.7
1622.200000	36.01	---	74.00	37.99	V	-13.7
1686.800000	---	26.25	54.00	27.75	V	-13.2
1686.800000	36.03	---	74.00	37.97	V	-13.2
3213.400000	---	32.51	54.00	21.49	H	-8.3
3213.400000	41.59	---	74.00	32.41	H	-8.3
4821.600000	---	39.28	54.00	14.72	V	-4.0
4821.600000	49.07	---	74.00	24.93	V	-4.0
16963.000000	---	44.41	54.00	9.59	V	11.1
16963.000000	56.02	---	74.00	17.98	V	11.1
17762.000000	---	45.64	54.00	8.36	V	11.1
17762.000000	52.62	---	74.00	21.38	V	11.1

Middle Channel: 2437MHz**Common Information**

Project No.: RKS250416001
 EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
 Test Mode: Transmitting in 802.11b mode 2437 channel
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.3℃
 Humidity: 48%
 Atmospheric Pressure: 101.4kPa
 Test Engineer: Destine Hu
 Test Date: 2025/5/13

Fundamental Test with
Band Reject Filter

Full Spectrum

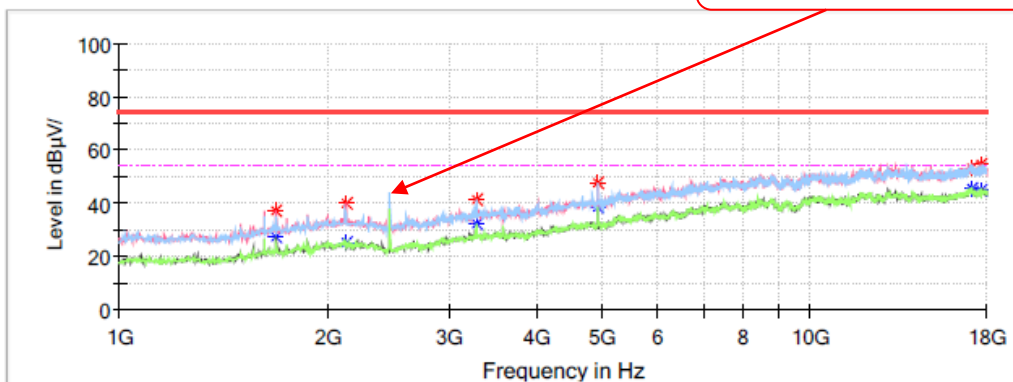
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1622.200000	---	27.08	54.00	26.92	V	-13.7
1622.200000	36.25	---	74.00	37.75	V	-13.7
1686.800000	---	27.56	54.00	26.44	V	-13.2
1686.800000	38.04	---	74.00	35.96	V	-13.2
3247.400000	---	33.84	54.00	20.16	H	-8.2
3247.400000	43.11	---	74.00	30.89	H	-8.2
4872.600000	---	38.78	54.00	15.22	V	-3.9
4872.600000	48.37	---	74.00	25.63	V	-3.9
16997.000000	---	44.45	54.00	9.55	H	11.3
16997.000000	55.21	---	74.00	18.79	H	11.3
17088.800000	---	45.60	54.00	8.40	V	11.1
17088.800000	52.51	---	74.00	21.49	V	11.1

High Channel: 2462MHz**Common Information**

Project No.: RKS250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in 802.11b mode 2462 channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.3℃
Humidity: 48%
Atmospheric Pressure: 101.4kPa
Test Engineer: Destine Hu
Test Date: 2025/5/13

Full Spectrum

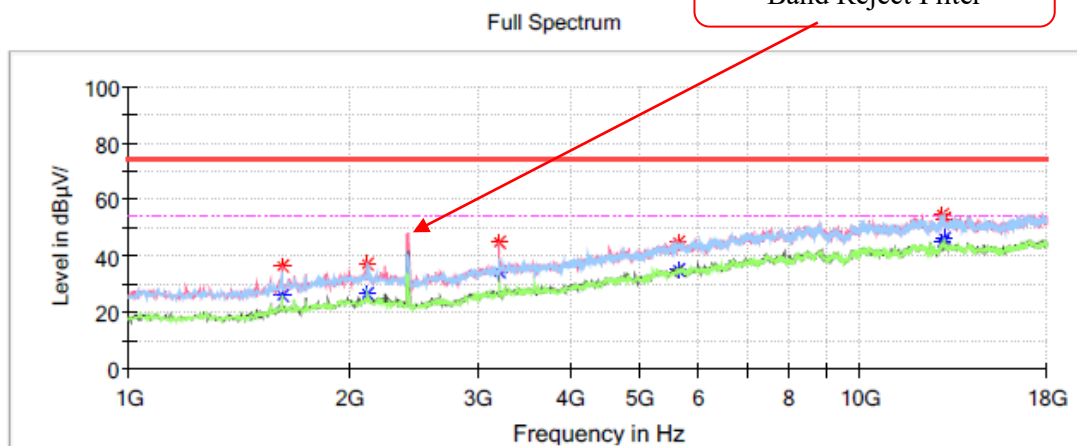
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1686.800000	---	27.23	54.00	26.77	V	-13.2
1686.800000	37.16	---	74.00	36.84	V	-13.2
2125.400000	---	25.18	54.00	28.82	V	-10.4
2125.400000	39.69	---	74.00	34.31	V	-10.4
3281.400000	---	32.39	54.00	21.61	H	-8.1
3281.400000	41.26	---	74.00	32.74	H	-8.1
4923.600000	---	38.19	54.00	15.81	H	-3.7
4923.600000	47.31	---	74.00	26.69	H	-3.7
17146.600000	---	45.59	54.00	8.41	H	11.0
17146.600000	53.14	---	74.00	20.86	H	11.0
17683.800000	---	44.84	54.00	9.16	V	10.9
17683.800000	54.49	---	74.00	19.51	V	10.9

802.11g Mode:**Low Channel: 2412MHz****Common Information**

Project No.:	RKS250416001
EUT Model:	IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode:	Transmitting in 802.11g mode 2412 channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.3°C
Humidity:	48%
Atmospheric Pressure:	101.4kPa
Test Engineer:	Destine Hu
Test Date:	2025/5/13

Fundamental Test with
Band Reject Filter

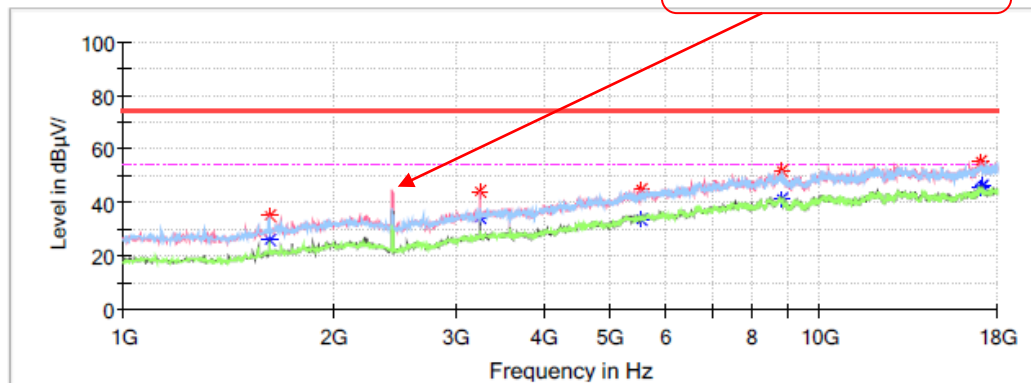
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1622.200000	---	26.19	54.00	27.81	V	-13.7
1622.200000	36.15	---	74.00	37.85	V	-13.7
2122.000000	---	26.90	54.00	27.10	H	-10.4
2122.000000	37.36	---	74.00	36.64	H	-10.4
3213.400000	---	34.31	54.00	19.69	V	-8.3
3213.400000	44.61	---	74.00	29.39	V	-8.3
5637.600000	---	34.87	54.00	19.13	H	-1.4
5637.600000	44.87	---	74.00	29.13	H	-1.4
12991.800000	54.89	---	74.00	19.11	H	8.7
12991.800000	---	44.51	54.00	9.49	H	8.7
13039.400000	52.87	---	74.00	21.13	H	8.7
13039.400000	---	46.14	54.00	7.86	H	8.7

Middle Channel: 2437MHz**Common Information**

Project No.: RKS250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in 802.11g mode 2437 channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.3℃
Humidity: 48%
Atmospheric Pressure: 101.4kPa
Test Engineer: Destine Hu
Test Date: 2025/5/13

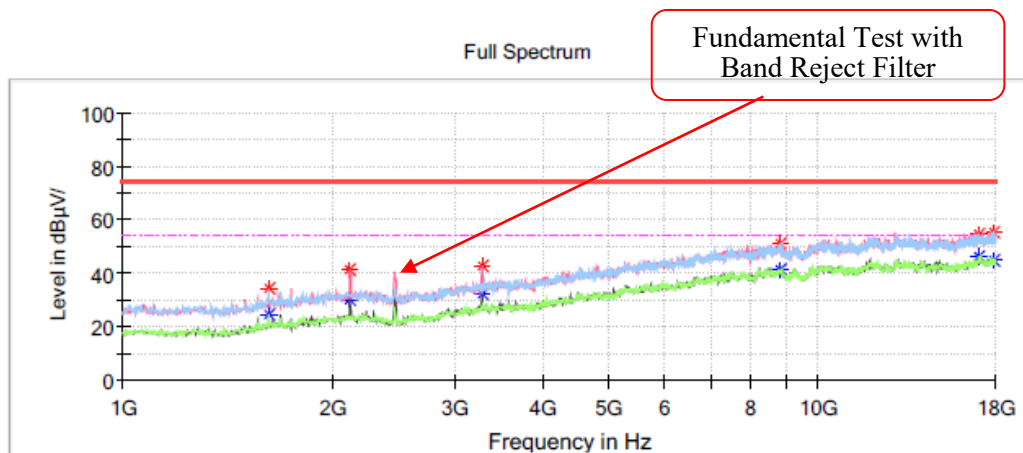
Full Spectrum

Fundamental Test with
Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1622.200000	---	25.99	54.00	28.01	V	-13.7
1622.200000	35.23	---	74.00	38.77	V	-13.7
3247.400000	---	34.26	54.00	19.74	V	-8.2
3247.400000	43.83	---	74.00	30.17	V	-8.2
5535.600000	---	33.89	54.00	20.11	V	-1.5
5535.600000	44.63	---	74.00	29.37	V	-1.5
8833.600000	---	41.19	54.00	12.81	H	4.4
8833.600000	51.53	---	74.00	22.47	H	4.4
17020.800000	55.41	---	74.00	18.59	V	11.2
17020.800000	---	45.35	54.00	8.65	V	11.2
17082.000000	52.82	---	74.00	21.18	V	11.1
17082.000000	---	46.09	54.00	7.91	V	11.1

High Channel: 2462MHz**Common Information**

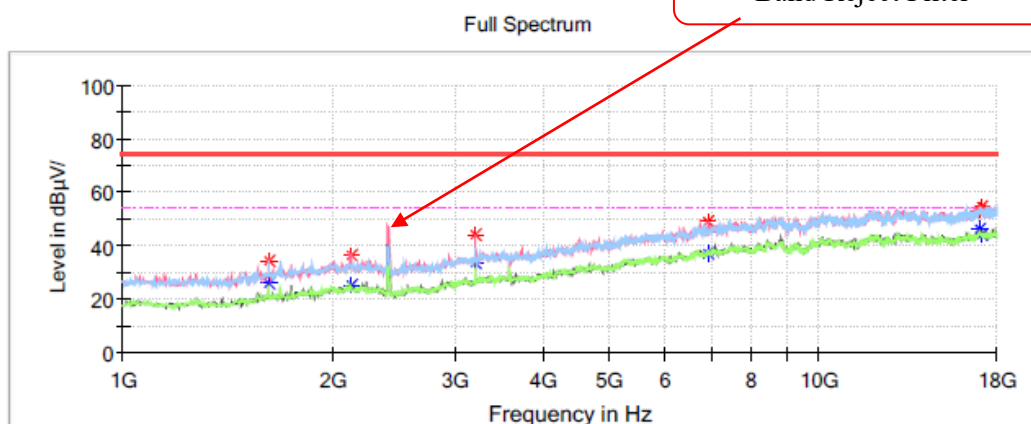
Project No.: RKS250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in 802.11g mode 2462 channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.3°C
Humidity: 48%
Atmospheric Pressure: 101.4kPa
Test Engineer: Destine Hu
Test Date: 2025/5/13

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1622.200000	---	24.62	54.00	29.38	H	-13.7
1622.200000	34.31	---	74.00	39.69	H	-13.7
2122.000000	---	29.96	54.00	24.04	V	-10.4
2122.000000	40.99	---	74.00	33.01	V	-10.4
3281.400000	---	32.14	54.00	21.86	V	-8.1
3281.400000	42.72	---	74.00	31.28	V	-8.1
8816.600000	---	41.51	54.00	12.49	V	4.4
8816.600000	50.87	---	74.00	23.13	V	4.4
17007.200000	---	46.29	54.00	7.71	H	11.2
17007.200000	54.41	---	74.00	19.59	H	11.2
17833.400000	---	44.90	54.00	9.10	H	11.3
17833.400000	55.58	---	74.00	18.42	H	11.3

802.11n-HT20 Mode :**Low Channel: 2412MHz****Common Information**

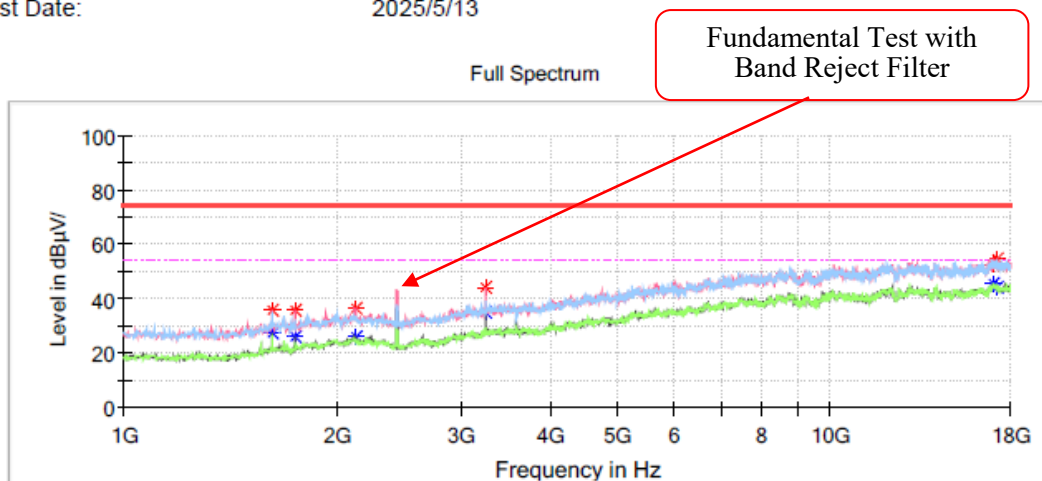
Project No.: RKSB250416001
 EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
 Test Mode: Transmitting in 802.11n20 mode 2412 channel
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.3℃
 Humidity: 48%
 Atmospheric Pressure: 101.4kPa
 Test Engineer: Destine Hu
 Test Date: 2025/5/13

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1622.200000	33.98	---	74.00	40.02	H	-13.7
1622.200000	---	25.90	54.00	28.10	H	-13.7
2125.400000	36.45	---	74.00	37.55	V	-10.4
2125.400000	---	25.41	54.00	28.59	V	-10.4
3213.400000	44.24	---	74.00	29.76	V	-8.3
3213.400000	---	33.77	54.00	20.23	V	-8.3
6912.600000	---	37.31	54.00	16.69	V	1.3
6912.600000	48.79	---	74.00	25.21	V	1.3
17020.800000	53.35	---	74.00	20.65	H	11.2
17020.800000	---	46.28	54.00	7.72	H	11.2
17126.200000	54.60	---	74.00	19.40	V	11.0
17126.200000	---	43.92	54.00	10.08	V	11.0

Middle Channel: 2437MHz**Common Information**

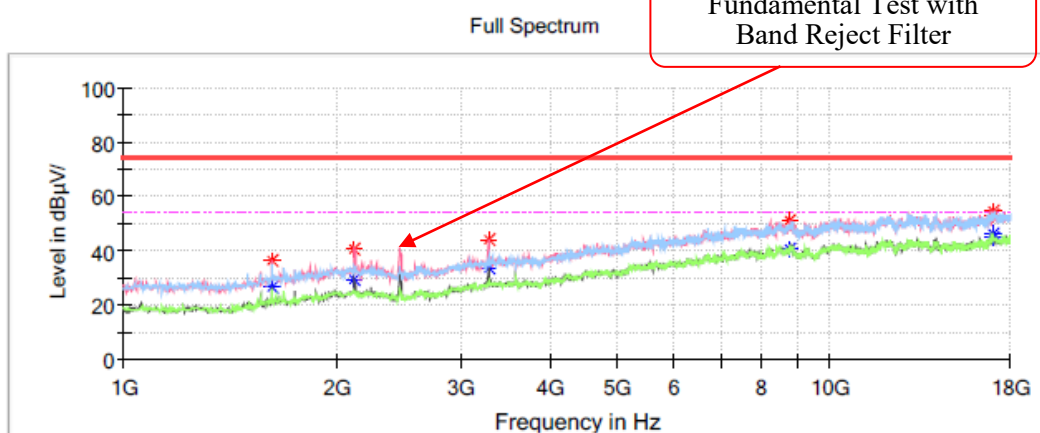
Project No.: RKS250416001
 EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
 Test Mode: Transmitting in 802.11n20 mode 2437 channel
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.3℃
 Humidity: 48%
 Atmospheric Pressure: 101.4kPa
 Test Engineer: Destine Hu
 Test Date: 2025/5/13

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1622.200000	---	26.96	54.00	27.04	V	-13.7
1622.200000	35.61	---	74.00	38.39	V	-13.7
1748.000000	35.80	---	74.00	38.20	V	-12.6
1748.000000	---	26.11	54.00	27.89	V	-12.6
2128.800000	---	25.97	54.00	28.03	V	-10.4
2128.800000	36.47	---	74.00	37.53	V	-10.4
3247.400000	43.71	---	74.00	30.29	V	-8.2
3247.400000	---	35.16	54.00	18.84	V	-8.2
17031.000000	52.23	---	74.00	21.77	H	11.2
17031.000000	---	45.77	54.00	8.23	H	11.2
17190.800000	54.36	---	74.00	19.64	H	10.9
17190.800000	---	44.25	54.00	9.75	H	10.9

High Channel: 2462MHz**Common Information**

Project No.: RKS250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in 802.11n20 mode 2462 channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.3°C
Humidity: 48%
Atmospheric Pressure: 101.4kPa
Test Engineer: Destine Hu
Test Date: 2025/5/13

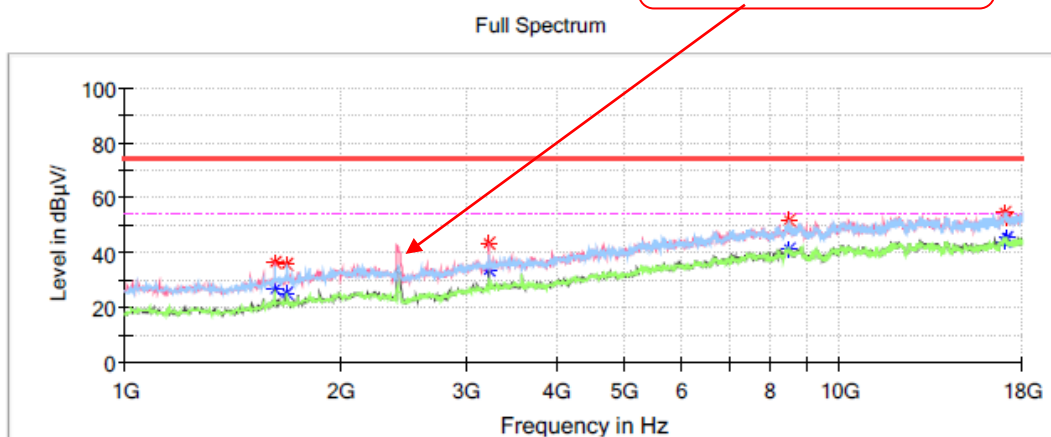
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1622.200000	36.41	---	74.00	37.59	V	-13.7
1622.200000	---	26.87	54.00	27.13	V	-13.7
2122.000000	---	29.25	54.00	24.75	V	-10.4
2122.000000	40.80	---	74.00	33.20	V	-10.4
3281.400000	43.82	---	74.00	30.18	V	-8.1
3281.400000	---	33.46	54.00	20.54	V	-8.1
8779.200000	---	40.29	54.00	13.71	V	4.4
8779.200000	51.20	---	74.00	22.80	V	4.4
16993.600000	---	45.90	54.00	8.10	H	11.2
16993.600000	53.01	---	74.00	20.99	H	11.2
17065.000000	54.43	---	74.00	19.57	H	11.2
17065.000000	---	44.52	54.00	9.48	H	11.2

802.11n-HT40 Mode :**Low Channel: 2422MHz****Common Information**

Project No.:	RKSB250416001
EUT Model:	IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode:	Transmitting in 802.11n40 mode 2422 channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.3°C
Humidity:	48%
Atmospheric Pressure:	101.4kPa
Test Engineer:	Destine Hu
Test Date:	2025/5/13

Fundamental Test with
Band Reject Filter

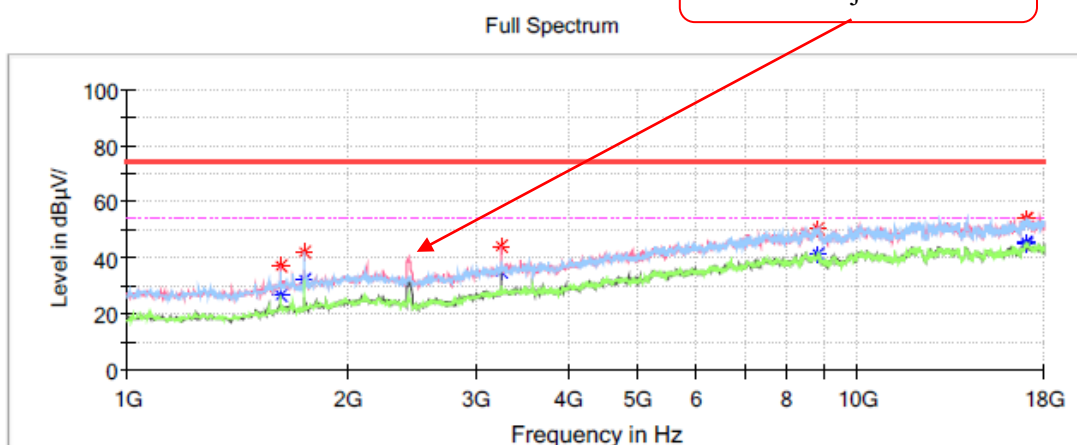
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1622.200000	---	26.60	54.00	27.40	V	-13.7
1622.200000	36.49	---	74.00	37.51	V	-13.7
1686.800000	---	24.88	54.00	29.12	H	-13.2
1686.800000	35.51	---	74.00	38.49	H	-13.2
3227.000000	---	33.79	54.00	20.21	V	-8.3
3227.000000	43.69	---	74.00	30.31	V	-8.3
8490.200000	---	41.30	54.00	12.70	H	4.4
8490.200000	51.42	---	74.00	22.58	H	4.4
17051.400000	---	43.98	54.00	10.02	H	11.2
17051.400000	54.64	---	74.00	19.36	H	11.2
17102.400000	52.41	---	74.00	21.59	V	11.1
17102.400000	---	45.47	54.00	8.53	V	11.1

Middle Channel: 2437MHz**Common Information**

Project No.: RKS250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in 802.11n40 mode 2437 channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.3℃
Humidity: 48%
Atmospheric Pressure: 101.4kPa
Test Engineer: Destine Hu
Test Date: 2025/5/13

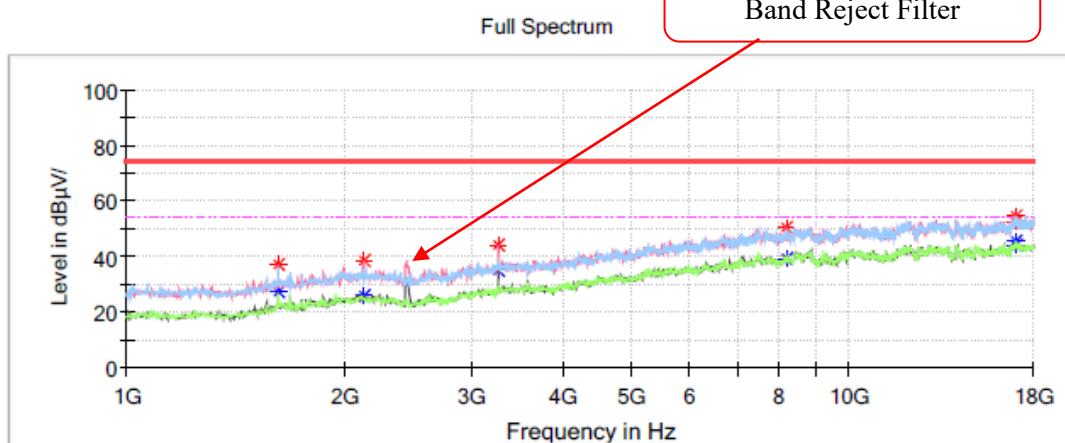
Fundamental Test with
Band Reject Filter

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1622.200000	---	26.81	54.00	27.19	V	-13.7
1622.200000	37.23	---	74.00	36.77	V	-13.7
1748.000000	---	32.34	54.00	21.66	H	-12.6
1748.000000	41.79	---	74.00	32.21	H	-12.6
3247.400000	---	34.94	54.00	19.06	V	-8.2
3247.400000	44.04	---	74.00	29.96	V	-8.2
8803.000000	---	41.17	54.00	12.83	V	4.4
8803.000000	50.16	---	74.00	23.84	V	4.4
16993.600000	54.18	---	74.00	19.82	V	11.2
16993.600000	---	44.95	54.00	9.05	V	11.2
17014.000000	53.61	---	74.00	20.39	H	11.2
17014.000000	---	45.28	54.00	8.72	H	11.2

High Channel: 2452MHz**Common Information**

Project No.: RKS250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in 802.11n40 mode 2452 channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.3°C
Humidity: 48%
Atmospheric Pressure: 101.4kPa
Test Engineer: Destine Hu
Test Date: 2025/5/13

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1622.200000	---	27.02	54.00	26.98	V	-13.7
1622.200000	36.74	---	74.00	37.26	V	-13.7
2128.800000	---	26.02	54.00	27.98	V	-10.4
2128.800000	38.60	---	74.00	35.40	V	-10.4
3267.800000	---	34.82	54.00	19.18	V	-8.1
3267.800000	43.73	---	74.00	30.27	V	-8.1
8208.000000	---	39.42	54.00	14.58	V	3.5
8208.000000	50.30	---	74.00	23.70	V	3.5
17037.800000	---	45.29	54.00	8.71	H	11.2
17037.800000	52.74	---	74.00	21.26	H	11.2
17065.000000	---	44.00	54.00	10.00	V	11.2
17065.000000	54.63	---	74.00	19.37	V	11.2

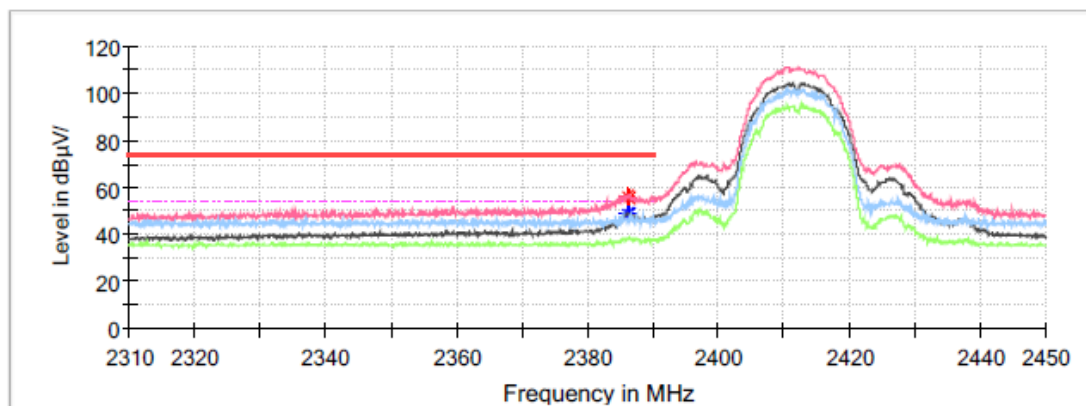
Band Edge:
802.11b Mode:

Low Channel

Common Information

Project No.:	RKS250416001
EUT Model:	IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode:	Transmitting in 802.11b mode 2412 channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.3°C
Humidity:	48%
Atmospheric Pressure:	101.4kPa
Test Engineer:	Destine Hu
Test Date:	2025/5/13

Full Spectrum



Critical_Freqs

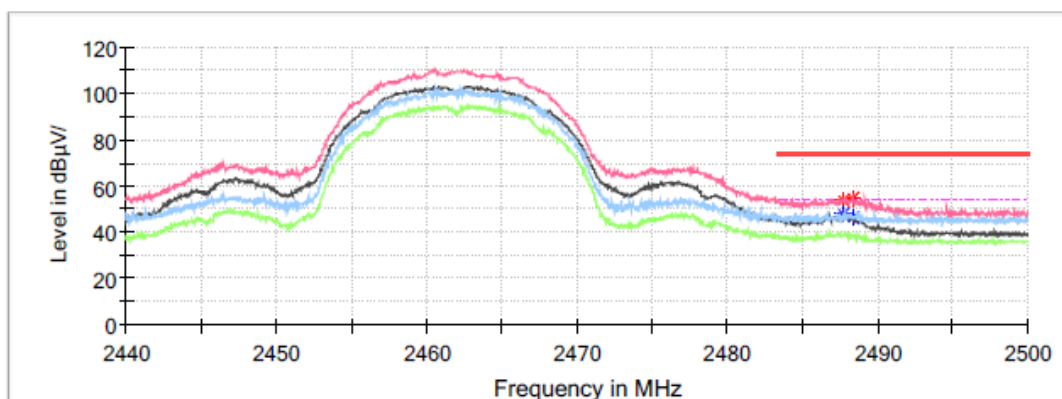
Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2385.936000	56.44	---	74.00	17.56	V	-0.3
2385.936000	---	48.76	54.00	5.24	V	-0.3
2386.328000	55.27	---	74.00	18.73	V	-0.3
2386.328000	---	48.94	54.00	5.06	V	-0.3

High Channel

Common Information

Project No.: RKS250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in 802.11b mode 2462 channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.3℃
Humidity: 48%
Atmospheric Pressure: 101.4kPa
Test Engineer: Destine Hu
Test Date: 2025/5/13

Full Spectrum

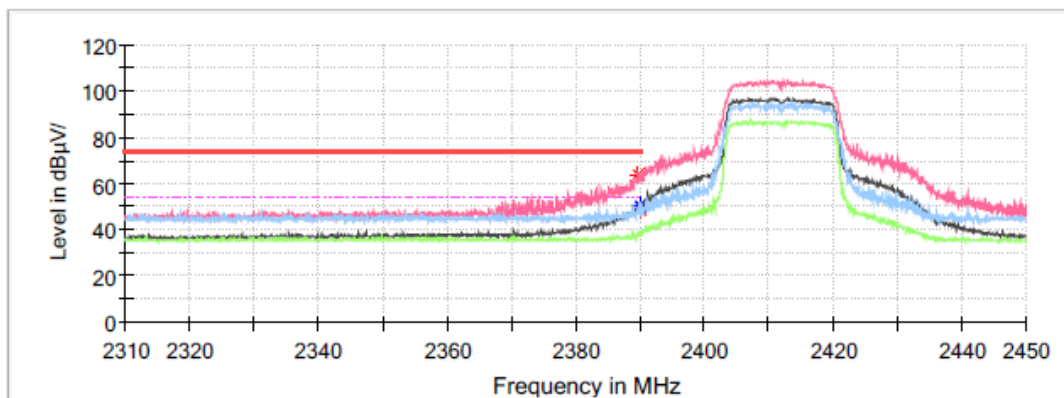


Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2487.760000	53.69	---	74.00	20.31	V	-0.2
2487.760000	---	47.65	54.00	6.35	V	-0.2
2488.312000	54.95	---	74.00	19.05	V	-0.2
2488.312000	---	45.90	54.00	8.10	V	-0.2

802.11g Mode :**Low Channel****Common Information**

Project No.: RKSB250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in 802.11g mode 2412 channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.3°C
Humidity: 48%
Atmospheric Pressure: 101.4kPa
Test Engineer: Destine Hu
Test Date: 2025/5/13

Full Spectrum**Critical Freqs**

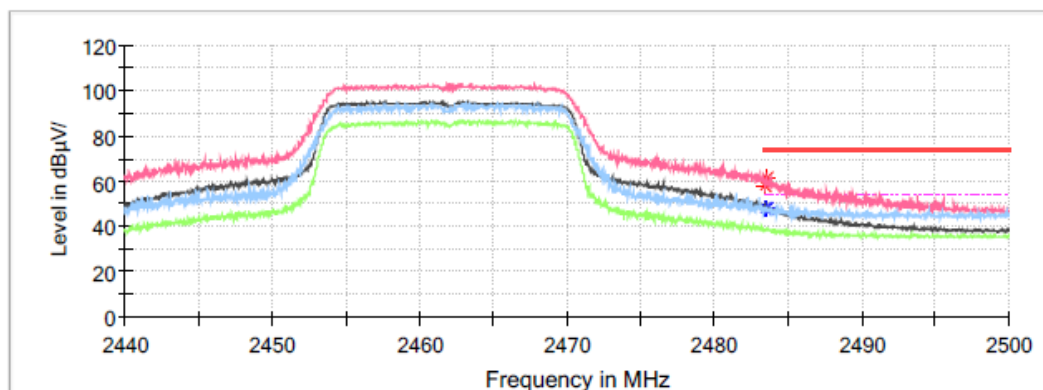
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2389.800000	63.62	---	74.00	10.38	V	-0.3
2389.856000	---	50.22	54.00	3.78	V	-0.3
2389.968000	---	50.35	54.00	3.65	H	-0.3
2389.968000	48.27	---	74.00	25.73	H	-0.3

High Channel

Common Information

Project No.: RKSB250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in 802.11g mode 2462 channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.3°C
Humidity: 48%
Atmospheric Pressure: 101.4kPa
Test Engineer: Destine Hu
Test Date: 2025/5/13

Full Spectrum



Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2483.512000	---	48.03	54.00	5.97	V	-0.2
2483.512000	58.28	---	74.00	15.72	V	-0.2
2483.560000	---	48.02	54.00	5.98	V	-0.2
2483.560000	61.57	---	74.00	12.43	V	-0.2

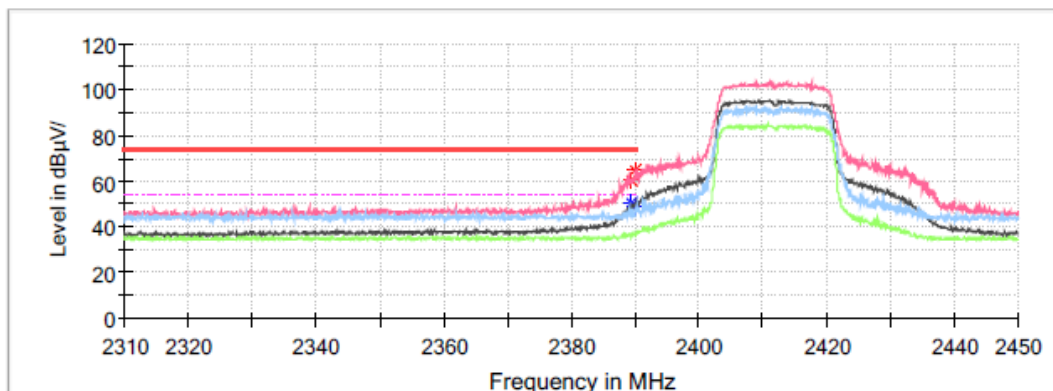
802.11n-HT20 Mode:

Low Channel

Common Information

Project No.: RKSB250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in 802.11n20 mode 2412 channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.3°C
Humidity: 48%
Atmospheric Pressure: 101.4kPa
Test Engineer: Destine Hu
Test Date: 2025/5/13

Full Spectrum



Critical Freqs

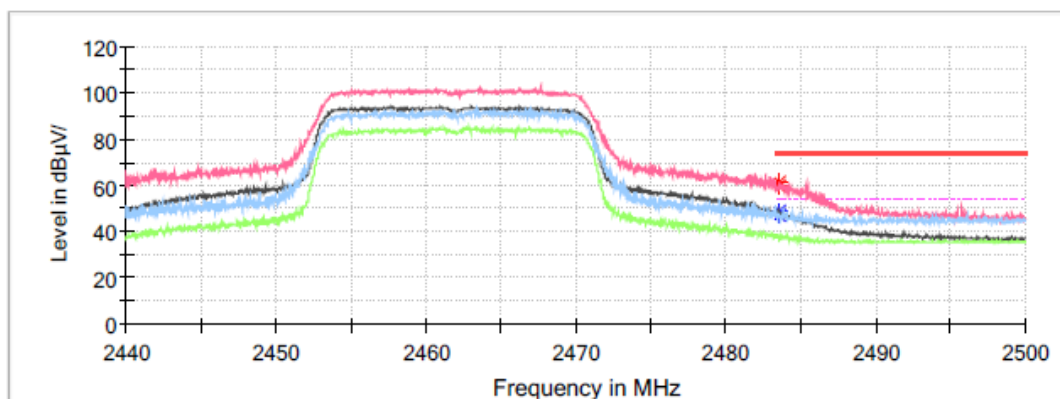
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2389.296000	---	50.04	54.00	3.96	V	-0.3
2389.296000	60.34	---	74.00	13.66	V	-0.3
2389.912000	---	49.02	54.00	4.98	V	-0.3
2389.912000	64.99	---	74.00	9.01	V	-0.3

High Channel

Common Information

Project No.: RKSB250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in 802.11n20 mode 2462 channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.3°C
Humidity: 48%
Atmospheric Pressure: 101.4kPa
Test Engineer: Destine Hu
Test Date: 2025/5/13

Full Spectrum



Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2483.608000	---	46.84	54.00	7.16	V	-0.2
2483.608000	61.60	---	74.00	12.40	V	-0.2
2483.632000	---	48.50	54.00	5.50	V	-0.2
2483.632000	59.51	---	74.00	14.49	V	-0.2

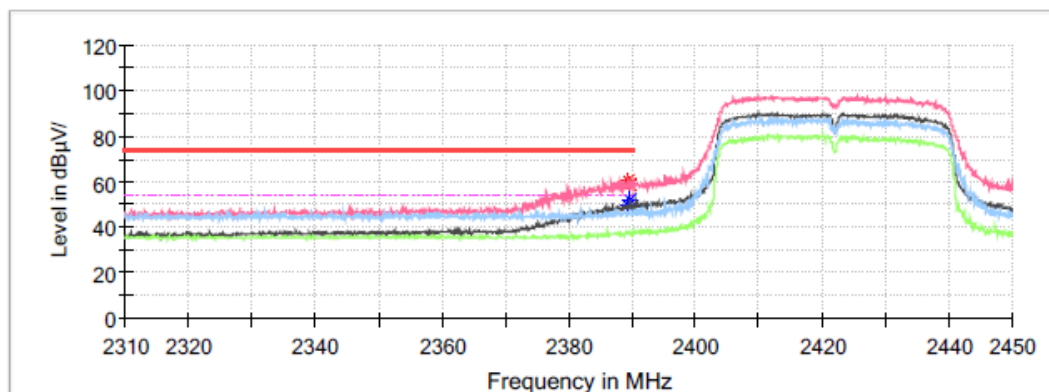
802.11n-HT40 Mode:

Low Channel

Common Information

Project No.: RKSB250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in 802.11n40 mode 2422 channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.3℃
Humidity: 48%
Atmospheric Pressure: 101.4kPa
Test Engineer: Destine Hu
Test Date: 2025/5/13

Full Spectrum



Critical Freqs

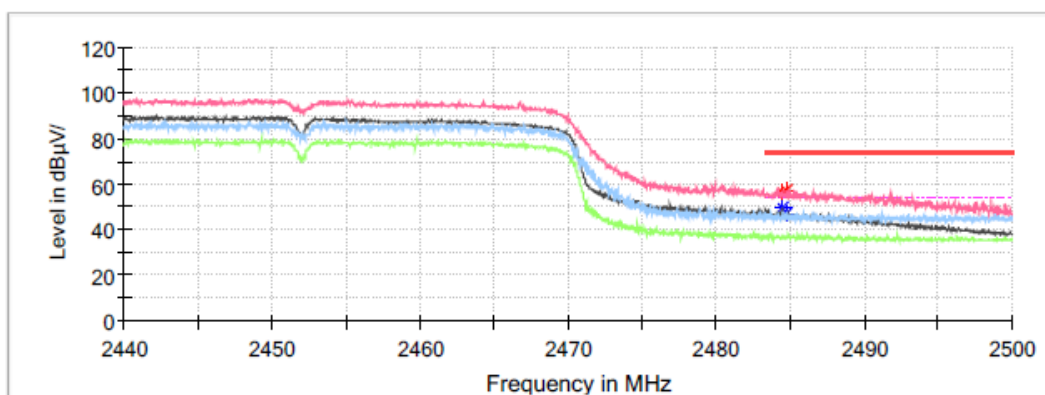
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2389.464000	---	49.30	54.00	4.70	V	-0.3
2389.464000	60.66	---	74.00	13.34	V	-0.3
2389.576000	---	51.84	54.00	2.16	V	-0.3
2389.576000	58.69	---	74.00	15.31	V	-0.3

High Channel

Common Information

Project No.: RKS250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in 802.11n40 mode 2452 channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.3°C
Humidity: 48%
Atmospheric Pressure: 101.4kPa
Test Engineer: Destine Hu
Test Date: 2025/5/13

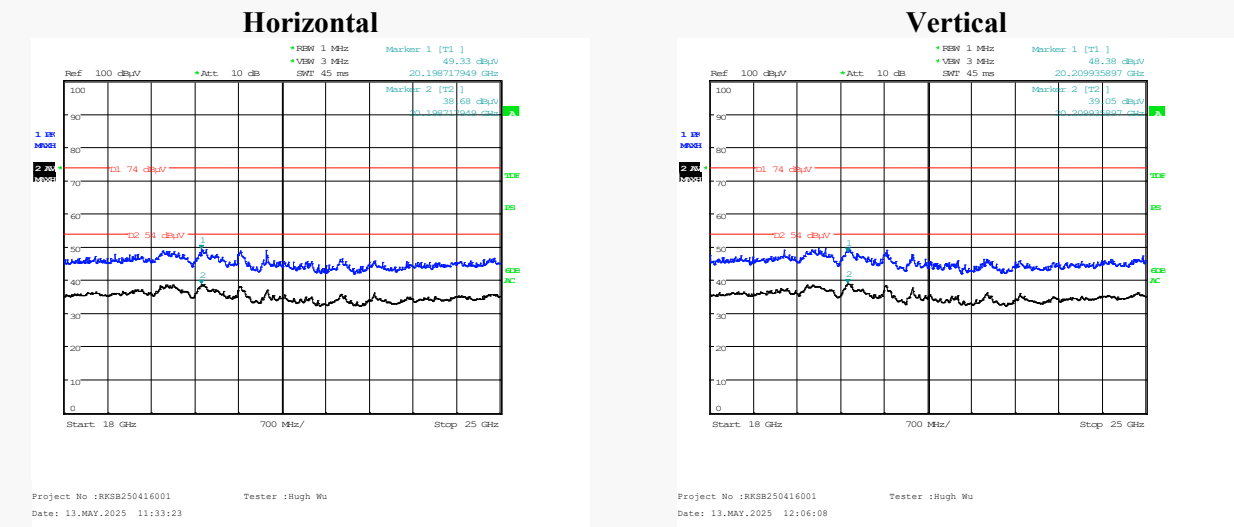
Full Spectrum



Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2484.424000	---	49.17	54.00	4.83	V	-0.2
2484.424000	55.96	---	74.00	18.04	V	-0.2
2484.712000	---	46.62	54.00	7.38	V	-0.2
2484.712000	57.34	---	74.00	16.66	V	-0.2

18GHz-25GHz: Transmitting in maximum output power mode and channel 802.11b high channel

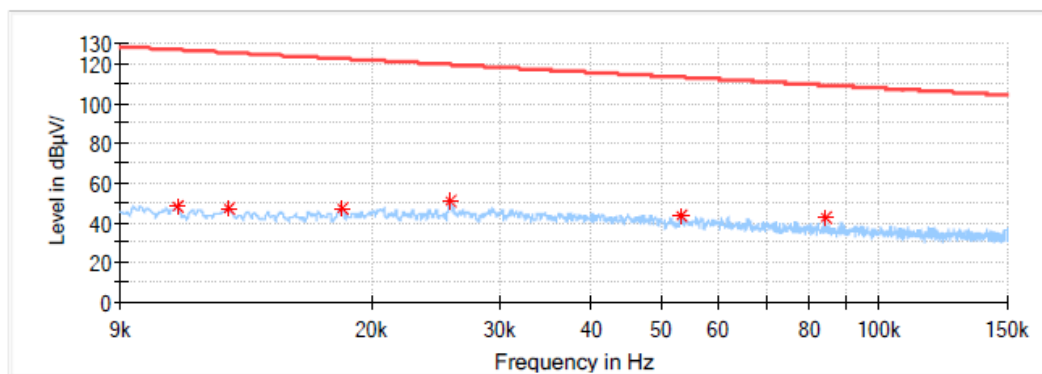


Frequency (GHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
20.20	---	38.68	54	15.32	H	12.46
20.20	49.33	---	74	24.67	H	12.46
20.21	---	39.05	54	14.95	V	12.47
20.21	48.38	---	74	25.62	V	12.47

Note: The test distance is 3m. The limit is 74dBμV/m (Peak) and 54dBμV/m (Average).

For BLE Mode:**9 kHz-30MHz:** Transmitting in maximum output power mode BLE (1 Mbps) low channel**Parallel(worst case)****9 kHz-150 kHz:****Common Information**

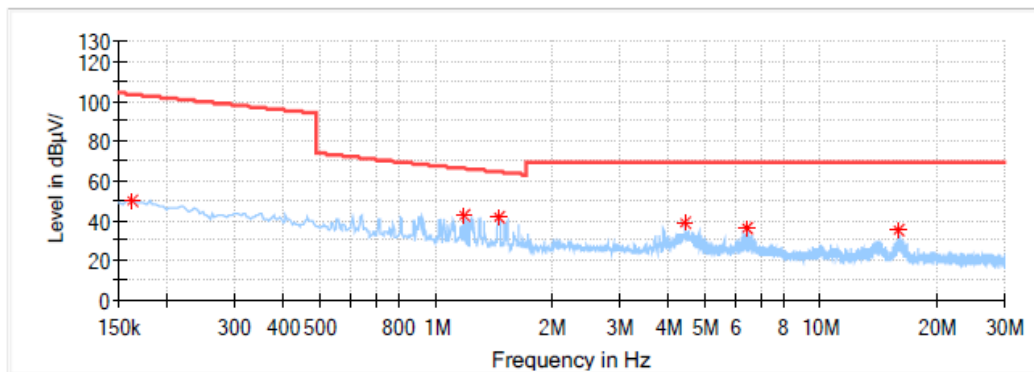
Project No:	RKS250416001
EUT Model:	IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode:	Wireless function
Standard:	FCC Part 15.247
Test Equipment:	ESCI,1313-1A, 310N
Receiver Setting:	RBW:200 Hz, VBW:1 kHz, Sweep Time: Auto
Temperature:	19.3°C
Humidity:	55%
Barometric Pressure:	101.3kPa
Test Engineer:	Scar Yang
Check by:	Jenny Yang
Test Date:	2026/4/3

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
0.010798	48.14	126.91	78.77	Parallel	-0.2
0.012666	47.45	125.51	78.06	Parallel	-0.2
0.018165	47.14	122.41	75.27	Parallel	-0.1
0.025603	50.28	119.43	69.15	Parallel	-0.1
0.053450	42.90	113.04	70.14	Parallel	-3.7
0.084135	42.21	109.10	66.89	Parallel	-7.1

150 kHz-30 MHz:**Common Information**

Project No:	RKS250416001
EUT Model:	IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode:	Wireless function
Standard:	FCC Part 15.247
Test Equipment:	ESCI,1313-1A, 310N
Receiver Setting:	RBW:9 kHz, VBW:30 kHz, Sweep Time: Auto
Temperature:	19.3℃
Humidity:	55%
Barometric Pressure:	101.3kPa
Test Engineer:	Scarf Yang
Check by:	Jenny Yang
Test Date:	2026/4/3

**Critical_Freqs**

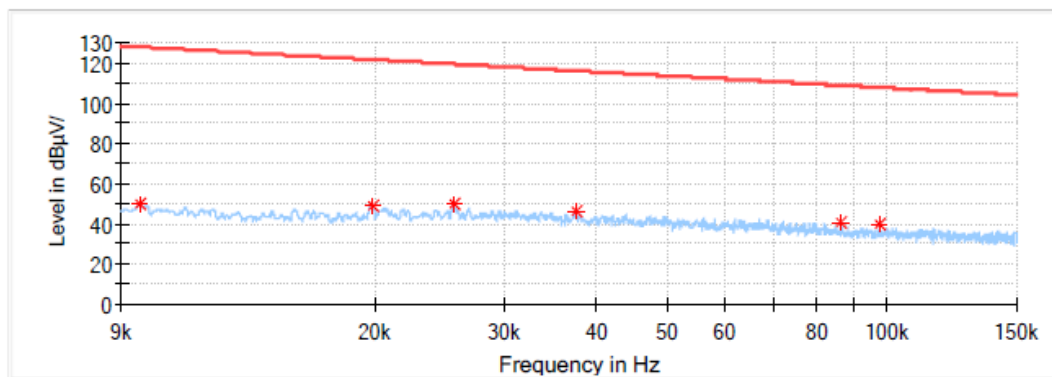
Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
0.161194	50.07	103.42	53.35	Parallel	-11.1
1.183556	42.14	65.96	23.82	Parallel	-27.7
1.452206	41.48	64.27	22.79	Parallel	-28.6
4.440938	38.59	69.54	30.95	Parallel	-31.3
6.414769	35.50	69.54	34.04	Parallel	-31.6
15.892144	34.76	69.54	34.78	Parallel	-32.5

9 kHz-30MHz: Transmitting in maximum output power mode BLE (2 Mbps) low channel
Parallel(worst case)

9 kHz-150 kHz:

Common Information

Project No:	RKS250416001
EUT Model:	IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode:	Wireless function
Standard:	FCC Part 15.247
Test Equipment:	ESCI,1313-1A, 310N
Receiver Setting:	RBW:200 Hz, VBW:1 kHz, Sweep Time: Auto
Temperature:	19.3℃
Humidity:	55%
Barometric Pressure:	101.3kPa
Test Engineer:	Scarf Yang
Check by:	Jenny Yang
Test Date:	2026/4/3

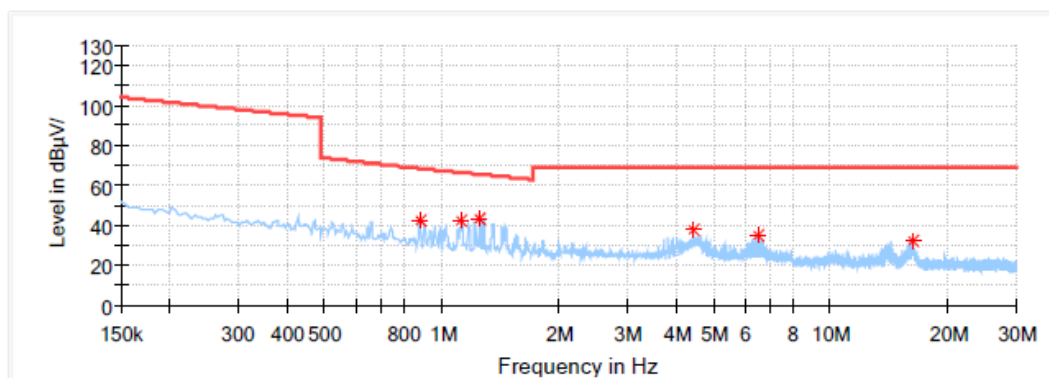


Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
0.009511	49.55	128.03	78.47	Parallel	-0.1
0.019804	48.53	121.67	73.14	Parallel	-0.1
0.025585	50.24	119.44	69.20	Parallel	-0.1
0.037570	46.38	116.10	69.72	Parallel	-1.2
0.086268	40.72	108.88	68.16	Parallel	-7.3
0.097707	39.82	107.81	67.99	Parallel	-8.3

150 kHz-30 MHz:**Common Information**

Project No: RKSB250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Wireless function
Standard: FCC Part 15.247
Test Equipment: ESCI,1313-1A, 310N
Receiver Setting: RBW:9 kHz, VBW:30 kHz, Sweep Time: Auto
Temperature: 19.3℃
Humidity: 55%
Barometric Pressure: 101.3kPa
Test Engineer: Scarf Yang
Check by: Jenny Yang
Test Date: 2026/4/3

**Critical_Freqs**

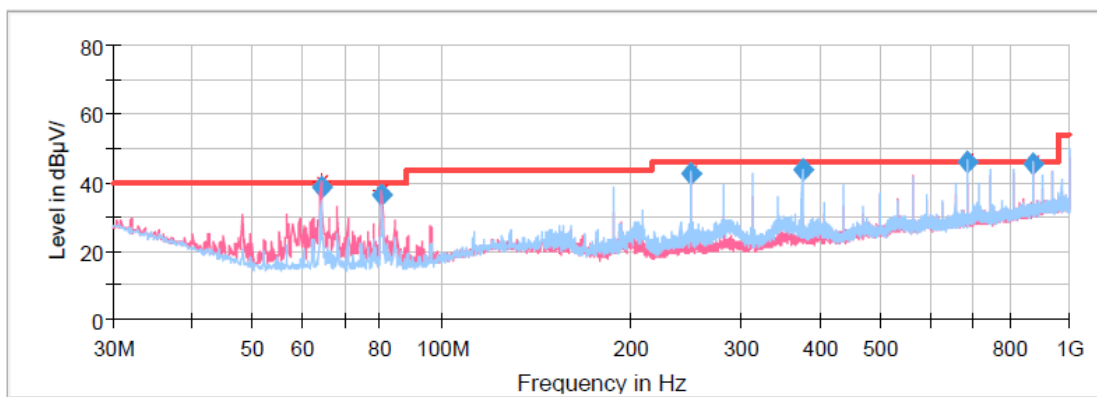
Frequency (MHz)	MaxPeak (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Pol	Corr. (dB/m)
0.877594	42.44	68.52	26.09	Parallel	-26.1
1.123856	42.64	66.40	23.76	Parallel	-27.5
1.254450	43.53	65.48	21.95	Parallel	-27.9
4.440938	37.92	69.54	31.62	Parallel	-31.3
6.522975	34.86	69.54	34.68	Parallel	-31.7
16.224225	32.73	69.54	36.81	Parallel	-32.6

30 MHz-1 GHz:**BLE (1 Mbps):**

(Transmitting in maximum output power mode BLE (1 Mbps) low channel)

Low Channel: 2402MHz**Common Information**

Project No:	RKS250416001
EUT Model:	IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode:	Transmitting in BLE 1M mode low channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESCI, JB3, 310N
Receiver Setting:	RBW:100 kHz, VBW: 300 kHz, Sweep Time: Auto
Temperature:	23.6℃
Humidity:	47%
Barometric Pressure:	101.8kPa
Test Engineer:	Scarf Yang
Test Date:	2026/3/26

**Final Result**

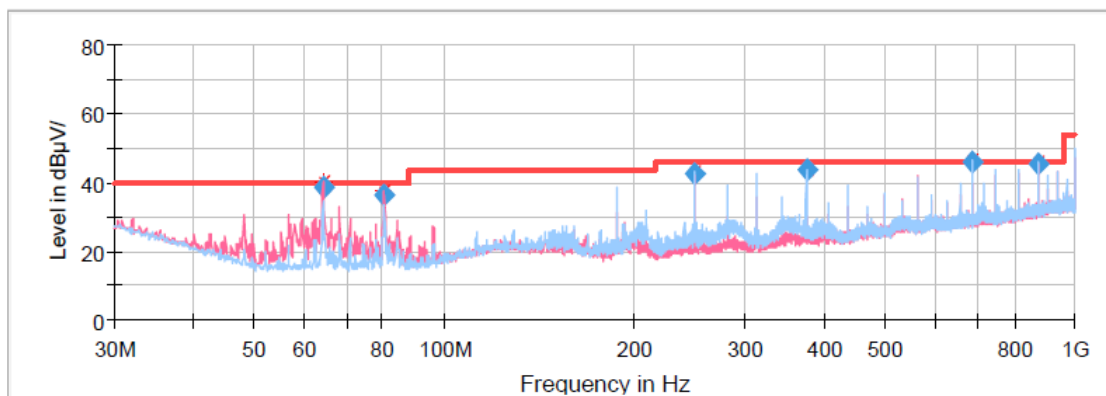
Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB)
64.313750	38.85	40.00	1.15	V	-16.9
80.440000	36.06	40.00	3.94	H	-11.9
249.947500	42.76	46.00	3.24	H	-12.2
374.956250	43.70	46.00	2.30	H	-8.6
687.538750	45.68	46.00	0.32	H	-2.3
874.991250	45.32	46.00	0.68	H	0.6

BLE (2 Mbps):

(Transmitting in maximum output power mode BLE (2 Mbps) Low channel)

Low Channel: 2402MHz**Common Information**

Project No: RKSB250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in BLE 1M mode low channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESCI, JB3, 310N
Receiver Setting: RBW:100 kHz, VBW: 300 kHz, Sweep Time: Auto
Temperature: 23.6℃
Humidity: 47%
Barometric Pressure: 101.8kPa
Test Engineer: Scarf Yang
Test Date: 2026/3/26

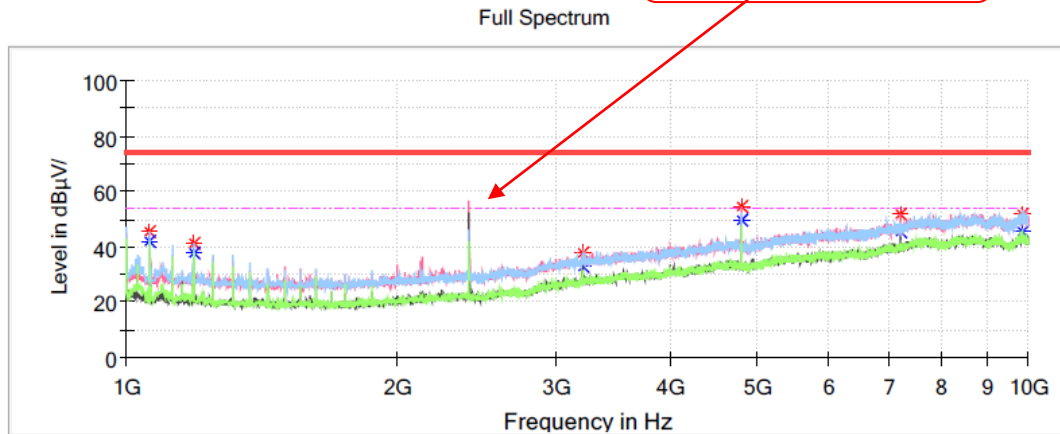
**Final Result**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB)
64.313750	38.85	40.00	1.15	V	-16.9
80.440000	36.06	40.00	3.94	H	-11.9
249.947500	42.76	46.00	3.24	H	-12.2
374.956250	43.70	46.00	2.30	H	-8.6
687.538750	45.68	46.00	0.32	H	-2.3
874.991250	45.32	46.00	0.68	H	0.6

BLE (1 Mbps):**1 GHz-10 GHz:****Low Channel: 2402MHz****Common Information**

Project No.:	RKS250416001
EUT Model:	IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode:	Transmitting in BLE 1M Low channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	17.8°C
Humidity:	50%
Atmospheric Pressure:	102.8kPa
Test Engineer:	Destine Hu
Check by:	Bard Liu
Test Date:	2026/3/24

Fundamental Test with
Band Reject Filter

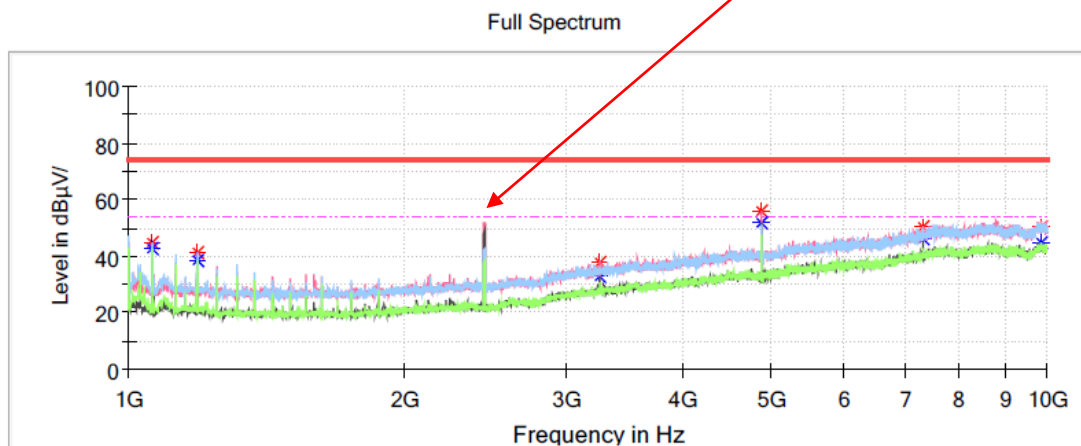
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1062.100000	---	42.18	54.00	11.82	H	-15.0
1062.100000	45.15	---	74.00	28.85	H	-15.0
1187.200000	---	37.85	54.00	16.15	H	-14.5
1187.200000	41.13	---	74.00	32.87	H	-14.5
3202.300000	---	33.09	54.00	20.91	V	-7.3
3202.300000	38.10	---	74.00	35.90	V	-7.3
4804.300000	---	49.92	54.00	4.08	V	-3.4
4804.300000	54.23	---	74.00	19.77	V	-3.4
7205.500000	51.68	---	74.00	22.32	V	2.1
7205.500000	---	45.41	54.00	8.59	V	2.1
9829.000000	51.74	---	74.00	22.26	H	5.8
9829.000000	---	45.18	54.00	8.82	H	5.8

Middle Channel: 2440MHz**Common Information**

Project No.:	RKS250416001
EUT Model:	IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode:	Transmitting in BLE 1M Middle channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	17.8°C
Humidity:	50%
Atmospheric Pressure:	102.8kPa
Test Engineer:	Destine Hu
Check by:	Bard Liu
Test Date:	2026/3/24

Fundamental Test with
Band Reject Filter

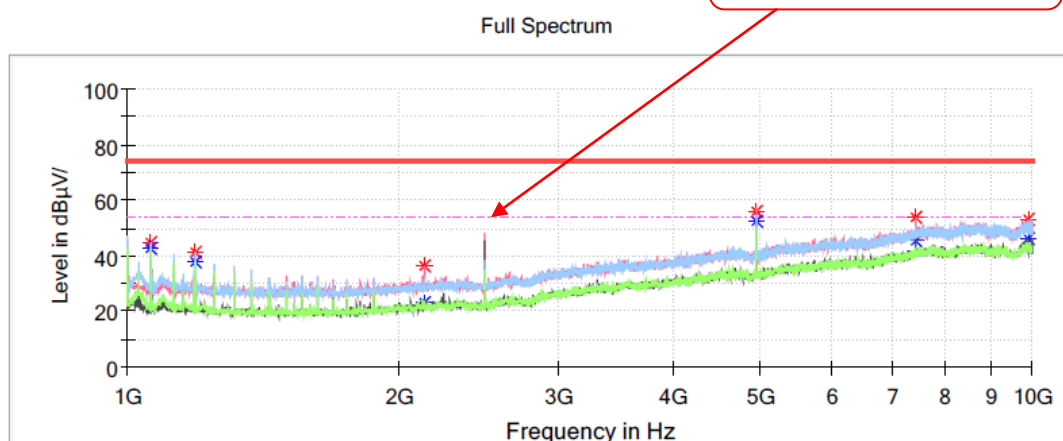
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1062.100000	44.82	---	74.00	29.18	H	-15.0
1062.100000	---	42.37	54.00	11.63	H	-15.0
1187.200000	41.29	---	74.00	32.71	H	-14.5
1187.200000	---	38.21	54.00	15.79	H	-14.5
3252.700000	37.90	---	74.00	36.10	V	-7.2
3252.700000	---	32.66	54.00	21.34	V	-7.2
4879.900000	56.00	---	74.00	18.00	V	-3.2
4879.900000	---	51.93	54.00	2.07	V	-3.2
7319.800000	50.51	---	74.00	23.49	V	2.4
7319.800000	---	45.88	54.00	8.12	V	2.4
9858.700000	---	44.61	54.00	9.39	H	5.9
9858.700000	50.66	---	74.00	23.34	H	5.9

High Channel: 2480MHz**Common Information**

Project No.: RKS250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in BLE 1M High channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.8°C
Humidity: 50%
Atmospheric Pressure: 102.8kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/3/24

Fundamental Test with
Band Reject Filter

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1062.100000	44.89	---	74.00	29.11	H	-15.0
1062.100000	---	42.49	54.00	11.51	H	-15.0
1187.200000	---	38.05	54.00	15.95	H	-14.5
1187.200000	40.95	---	74.00	33.05	H	-14.5
2126.800000	36.15	---	74.00	37.85	V	-9.9
2126.800000	---	23.08	54.00	30.92	V	-9.9
4960.000000	---	52.11	54.00	1.89	V	-3.0
4960.000000	56.28	---	74.00	17.72	V	-3.0
7439.500000	53.61	---	74.00	20.39	V	2.8
7439.500000	---	45.35	54.00	8.65	V	2.8
9920.800000	---	46.17	54.00	7.83	V	6.1
9920.800000	53.14	---	74.00	20.86	V	6.1

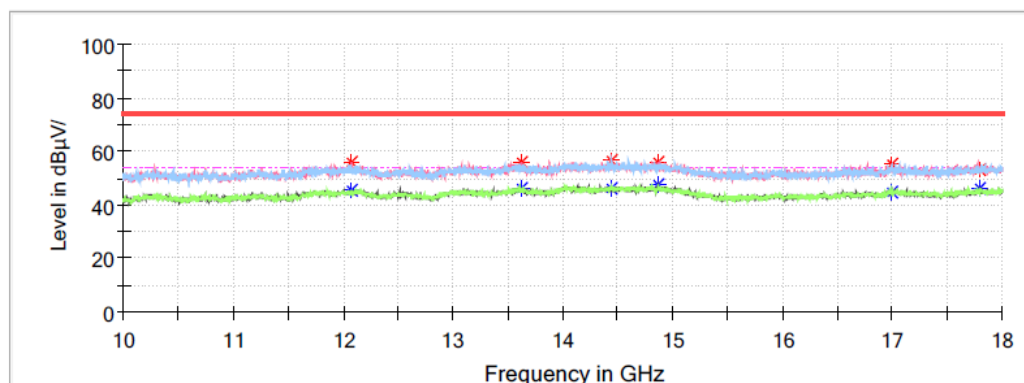
10 GHz-18 GHz:

Low Channel: 2402MHz

Common Information

Project No.: RKSB250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in BLE 1M Low channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.8℃
Humidity: 50%
Atmospheric Pressure: 102.8kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/3/24

Full Spectrum



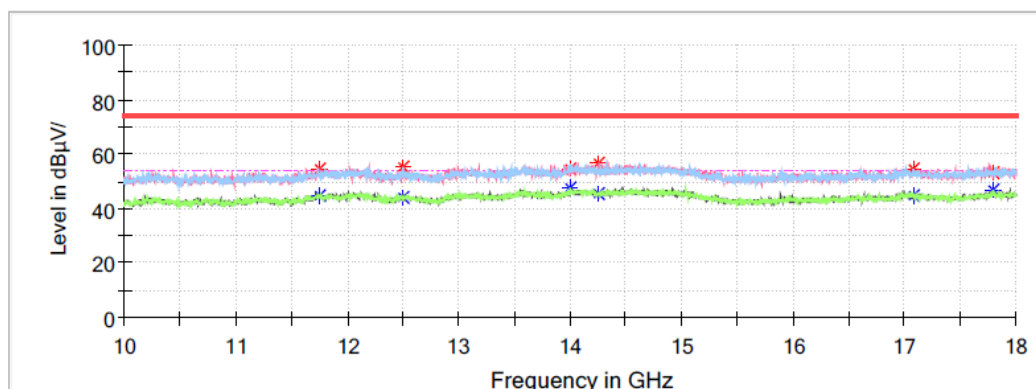
Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
12070.400000	56.08	---	74.00	17.92	V	9.0
12070.400000	---	45.40	54.00	8.60	V	9.0
13625.600000	---	45.93	54.00	8.07	V	10.3
13625.600000	56.15	---	74.00	17.85	V	10.3
14449.600000	---	46.15	54.00	7.85	H	11.9
14449.600000	56.53	---	74.00	17.47	H	11.9
14873.600000	---	47.27	54.00	6.73	V	10.7
14873.600000	56.00	---	74.00	18.00	V	10.7
17000.000000	---	45.02	54.00	8.98	H	11.0
17000.000000	55.32	---	74.00	18.68	H	11.0
17803.200000	53.00	---	74.00	21.00	V	11.2
17803.200000	---	46.34	54.00	7.66	V	11.2

Middle Channel: 2440MHz**Common Information**

Project No.: RKS250416001
 EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
 Test Mode: Transmitting in BLE 1M Middle channel
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 17.8℃
 Humidity: 50%
 Atmospheric Pressure: 102.8kPa
 Test Engineer: Destine Hu
 Check by: Bard Liu
 Test Date: 2026/3/24

Full Spectrum

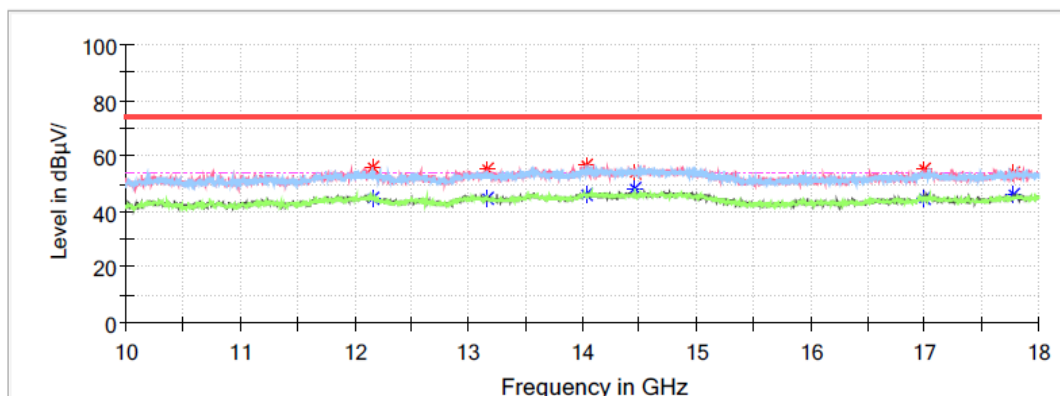
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
11752.000000	---	44.77	54.00	9.23	V	8.6
11752.000000	54.53	---	74.00	19.47	V	8.6
12507.200000	---	43.77	54.00	10.23	V	8.8
12507.200000	55.32	---	74.00	18.68	V	8.8
14004.800000	---	47.37	54.00	6.63	H	11.1
14004.800000	54.29	---	74.00	19.71	H	11.1
14252.800000	---	45.67	54.00	8.33	V	11.5
14252.800000	56.45	---	74.00	17.55	V	11.5
17078.400000	---	44.76	54.00	9.24	H	10.9
17078.400000	54.39	---	74.00	19.61	H	10.9
17800.000000	53.19	---	74.00	20.81	H	11.2
17800.000000	---	46.58	54.00	7.42	H	11.2

High Channel: 2480MHz**Common Information**

Project No.: RKS250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in BLE 1M High channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.8℃
Humidity: 50%
Atmospheric Pressure: 102.8kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/3/24

Full Spectrum

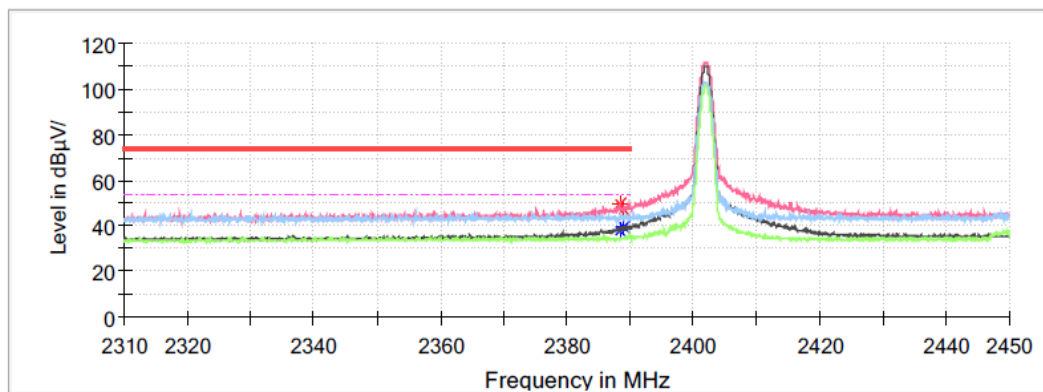
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
12156.800000	---	44.86	54.00	9.14	H	9.0
12156.800000	55.61	---	74.00	18.39	H	9.0
13163.200000	---	44.81	54.00	9.19	V	9.4
13163.200000	55.03	---	74.00	18.97	V	9.4
14035.200000	---	46.36	54.00	7.64	H	11.2
14035.200000	56.92	---	74.00	17.08	H	11.2
14454.400000	---	47.94	54.00	6.06	H	11.9
14454.400000	54.16	---	74.00	19.84	H	11.9
16998.400000	---	44.45	54.00	9.55	V	11.0
16998.400000	54.97	---	74.00	19.03	V	11.0
17784.000000	53.93	---	74.00	20.07	V	11.2
17784.000000	---	46.19	54.00	7.81	V	11.2

Band Edge:**Low Channel****Common Information**

Project No.: RKSB250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in BLE 1M Low channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.8℃
Humidity: 50%
Atmospheric Pressure: 102.8kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/3/24

Full Spectrum

**Critical_Freqs**

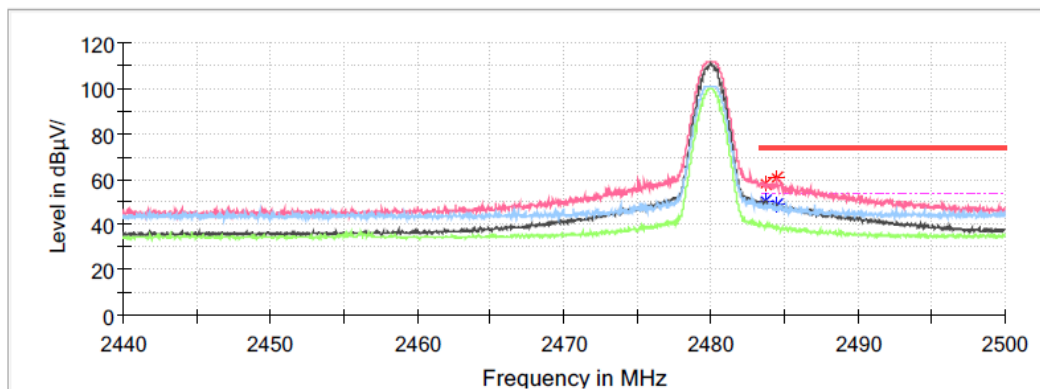
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2388.344000	---	37.99	54.00	16.01	V	0.4
2388.344000	49.17	---	74.00	24.83	V	0.4
2388.904000	---	39.85	54.00	14.15	V	0.4
2388.904000	47.18	---	74.00	26.82	V	0.4

High Channel

Common Information

Project No.: RKSB250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in BLE 1M High channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.8℃
Humidity: 50%
Atmospheric Pressure: 102.8kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/3/24

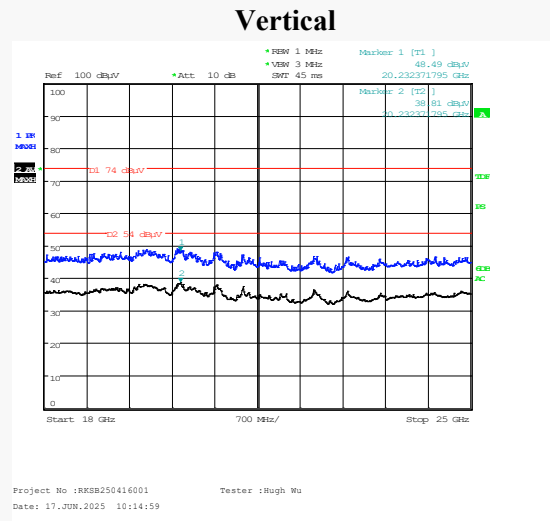
Full Spectrum



Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2483.728000	---	50.25	54.00	3.75	V	0.5
2483.728000	57.83	---	74.00	16.17	V	0.5
2484.520000	---	48.33	54.00	5.67	V	0.5
2484.520000	60.00	---	74.00	14.00	V	0.5

Horizontal



Frequency (GHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
20.22	---	38.65	54	15.35	H	12.48
20.22	48.62	---	74	25.38	H	12.48
20.23	---	38.81	54	15.19	V	12.49
20.23	48.49	---	74	25.51	V	12.49

Note: The test distance is 3m. The limit is 74dBμV/m(Peak) and 54dBμV/m(Average).

BLE (2 Mbps):

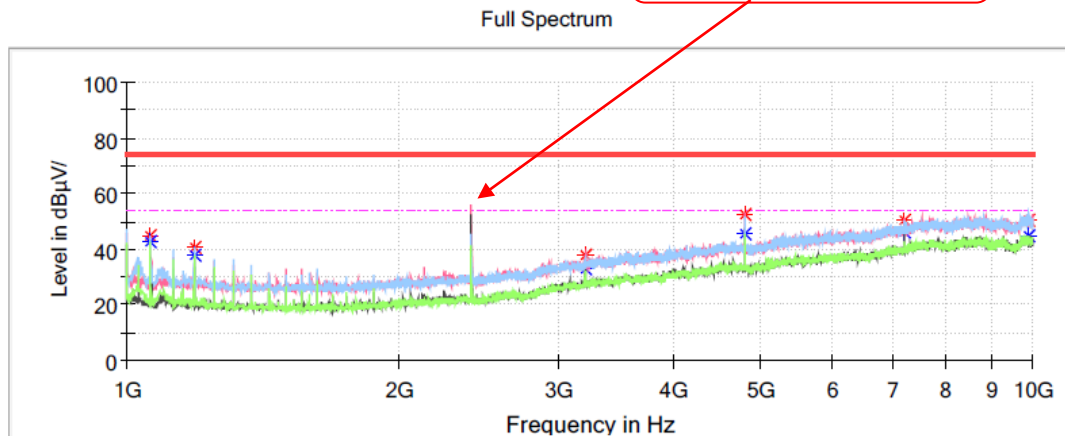
1 GHz-10 GHz:

Low Channel: 2402MHz

Common Information

Project No.:	RKSB250416001
EUT Model:	IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode:	Transmitting in BLE 2M Low channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	17.8°C
Humidity:	50%
Atmospheric Pressure:	102.8kPa
Test Engineer:	Destine Hu
Check by:	Bard Liu
Test Date:	2026/3/24

Fundamental Test with
Band Reject Filter

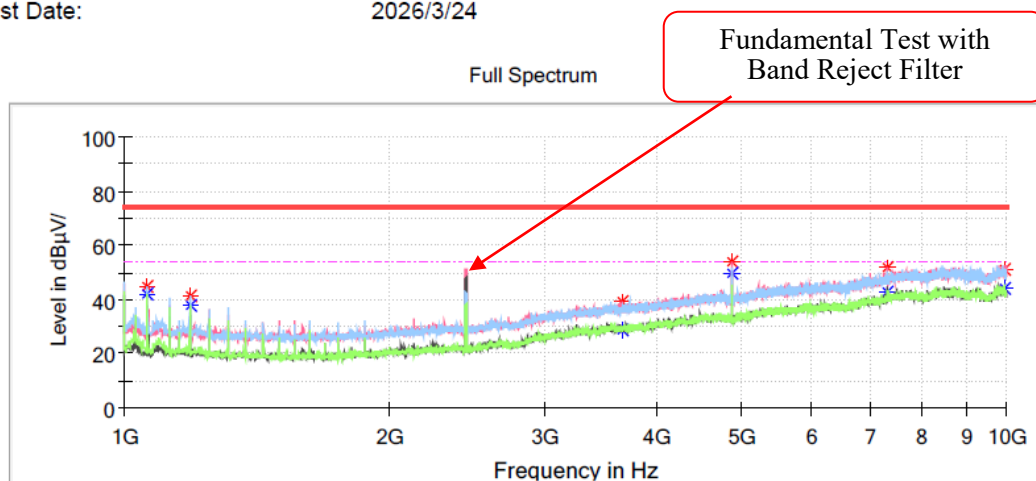


Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1062.100000	---	42.64	54.00	11.36	H	-15.0
1062.100000	44.84	---	74.00	29.16	H	-15.0
1187.200000	---	37.54	54.00	16.46	H	-14.5
1187.200000	40.62	---	74.00	33.38	H	-14.5
3202.300000	---	33.16	54.00	20.84	V	-7.3
3202.300000	37.80	---	74.00	36.20	V	-7.3
4803.400000	---	45.54	54.00	8.46	H	-3.4
4803.400000	52.60	---	74.00	21.40	H	-3.4
7204.600000	50.50	---	74.00	23.50	V	2.1
7204.600000	---	46.39	54.00	7.61	V	2.1
9918.100000	50.49	---	74.00	23.51	V	6.1
9918.100000	---	45.04	54.00	8.96	V	6.1

Middle Channel: 2440MHz**Common Information**

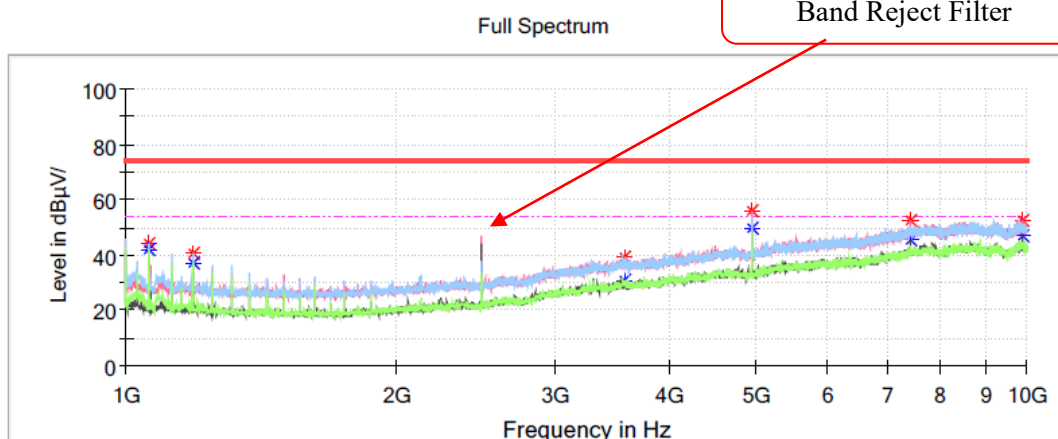
Project No.: RKSB250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in BLE 2M Middle channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.8℃
Humidity: 50%
Atmospheric Pressure: 102.8kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/3/24

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1062.100000	---	42.25	54.00	11.75	H	-15.0
1062.100000	44.69	---	74.00	29.31	H	-15.0
1187.200000	---	37.62	54.00	16.38	H	-14.5
1187.200000	41.54	---	74.00	32.46	H	-14.5
3663.100000	---	29.01	54.00	24.99	H	-5.9
3663.100000	39.17	---	74.00	34.83	H	-5.9
4879.000000	53.94	---	74.00	20.06	V	-3.2
4879.900000	---	49.37	54.00	4.63	V	-3.2
7321.600000	---	42.87	54.00	11.13	V	2.4
7321.600000	51.71	---	74.00	22.29	V	2.4
9959.500000	51.16	---	74.00	22.84	V	6.2
9959.500000	---	44.04	54.00	9.96	V	6.2

High Channel: 2480MHz**Common Information**

Project No.: RKSB250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in BLE 2M High channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.8℃
Humidity: 50%
Atmospheric Pressure: 102.8kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/3/24

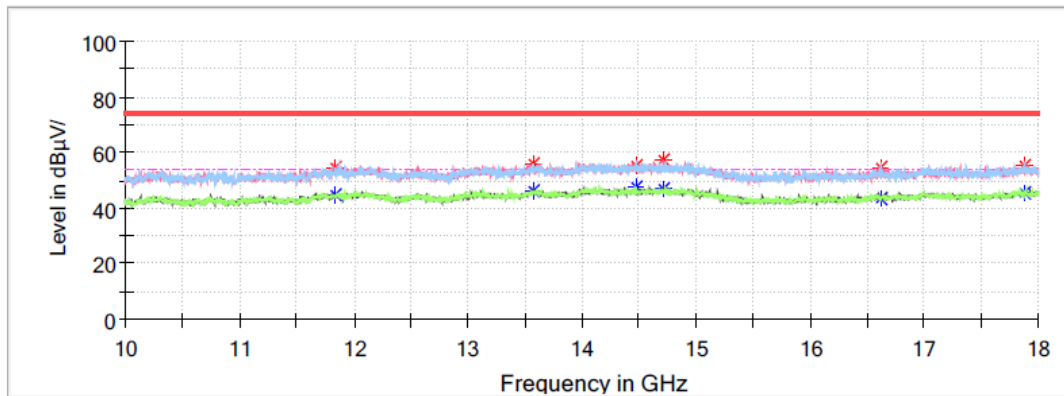
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1062.100000	---	41.90	54.00	12.10	H	-15.0
1062.100000	44.16	---	74.00	29.84	H	-15.0
1187.200000	40.23	---	74.00	33.77	H	-14.5
1187.200000	---	37.38	54.00	16.62	H	-14.5
3583.000000	---	30.62	54.00	23.38	H	-6.1
3583.000000	39.44	---	74.00	34.56	H	-6.1
4960.900000	---	49.79	54.00	4.21	V	-3.0
4960.900000	55.74	---	74.00	18.26	V	-3.0
7439.500000	---	45.41	54.00	8.59	V	2.8
7439.500000	52.48	---	74.00	21.52	V	2.8
9922.600000	---	46.89	54.00	7.11	V	6.1
9922.600000	52.48	---	74.00	21.52	V	6.1

10 GHz-18 GHz:**Low Channel: 2402MHz****Common Information**

Project No.: RKS250416001
 EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
 Test Mode: Transmitting in BLE 2M Low channel
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 17.8℃
 Humidity: 50%
 Atmospheric Pressure: 102.8kPa
 Test Engineer: Destine Hu
 Check by: Bard Liu
 Test Date: 2026/3/24

Full Spectrum

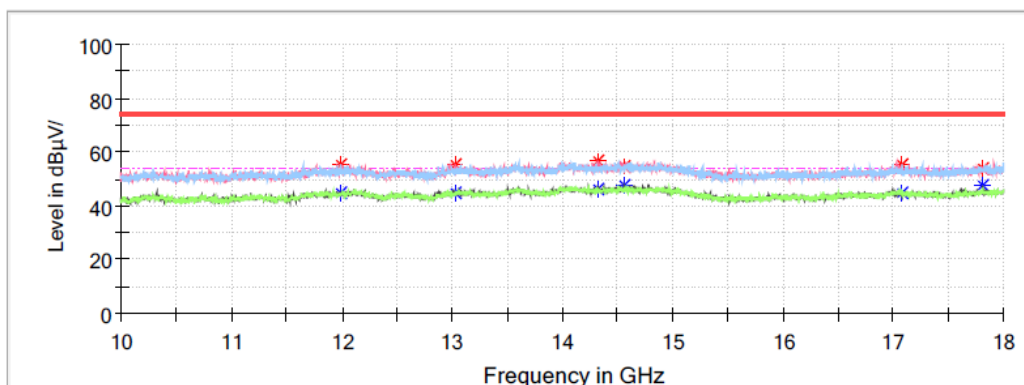
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
11832.000000	---	44.55	54.00	9.45	V	8.7
11832.000000	54.73	---	74.00	19.27	V	8.7
13579.200000	---	46.24	54.00	7.76	H	10.2
13579.200000	56.18	---	74.00	17.82	H	10.2
14481.600000	55.06	---	74.00	18.94	H	11.9
14481.600000	---	47.78	54.00	6.22	H	11.9
14708.800000	57.16	---	74.00	16.84	V	11.3
14708.800000	---	46.62	54.00	7.38	V	11.3
16612.800000	---	43.68	54.00	10.32	V	9.4
16612.800000	54.61	---	74.00	19.39	V	9.4
17873.600000	---	45.49	54.00	8.51	H	11.4
17873.600000	55.53	---	74.00	18.47	H	11.4

Middle Channel: 2440MHz**Common Information**

Project No.: RKSB250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in BLE 2M Middle channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.8°C
Humidity: 50%
Atmospheric Pressure: 102.8kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/3/24

Full Spectrum

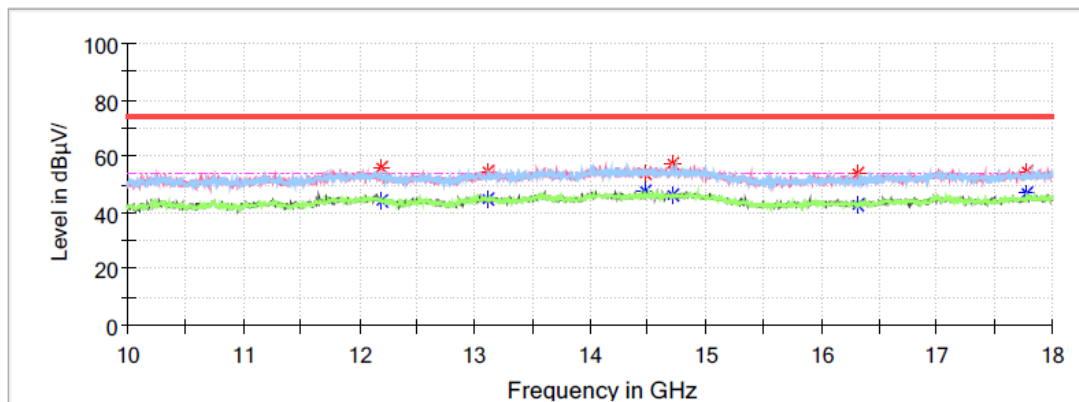
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
11985.600000	---	44.98	54.00	9.02	H	9.0
11985.600000	55.40	---	74.00	18.60	H	9.0
13028.800000	---	44.96	54.00	9.04	V	9.2
13028.800000	55.08	---	74.00	18.92	V	9.2
14329.600000	---	46.06	54.00	7.94	V	11.7
14329.600000	56.85	---	74.00	17.15	V	11.7
14569.600000	---	47.61	54.00	6.39	V	11.7
14569.600000	54.61	---	74.00	19.39	V	11.7
17083.200000	---	44.84	54.00	9.16	H	10.9
17083.200000	55.18	---	74.00	18.82	H	10.9
17817.600000	53.63	---	74.00	20.37	H	11.3
17817.600000	---	47.29	54.00	6.71	H	11.3

High Channel: 2480MHz**Common Information**

Project No.: RKS250416001
 EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
 Test Mode: Transmitting in BLE 2M High channel
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 17.8°C
 Humidity: 50%
 Atmospheric Pressure: 102.8kPa
 Test Engineer: Destine Hu
 Check by: Bard Liu
 Test Date: 2026/3/24

Full Spectrum

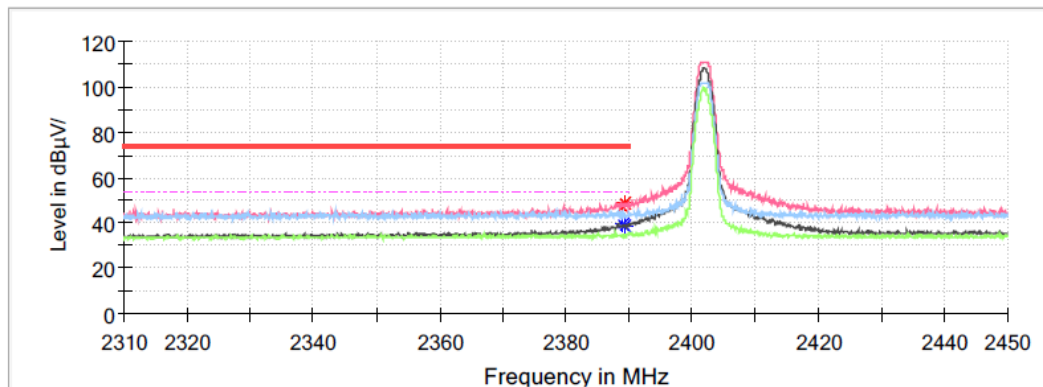
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
12192.000000	---	44.36	54.00	9.64	V	9.0
12192.000000	56.05	---	74.00	17.95	V	9.0
13113.600000	---	44.85	54.00	9.15	H	9.4
13113.600000	54.84	---	74.00	19.16	H	9.4
14481.600000	---	47.65	54.00	6.35	H	11.9
14481.600000	54.11	---	74.00	19.89	H	11.9
14721.600000	---	46.34	54.00	7.66	H	11.2
14721.600000	57.03	---	74.00	16.97	H	11.2
16308.800000	---	42.61	54.00	11.39	V	8.9
16308.800000	53.82	---	74.00	20.18	V	8.9
17776.000000	54.23	---	74.00	19.77	H	11.2
17776.000000	---	46.64	54.00	7.36	H	11.2

Band Edge:**Low Channel****Common Information**

Project No.: RKSB250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in BLE 2M Low channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.8°C
Humidity: 50%
Atmospheric Pressure: 102.8kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/3/24

Full Spectrum

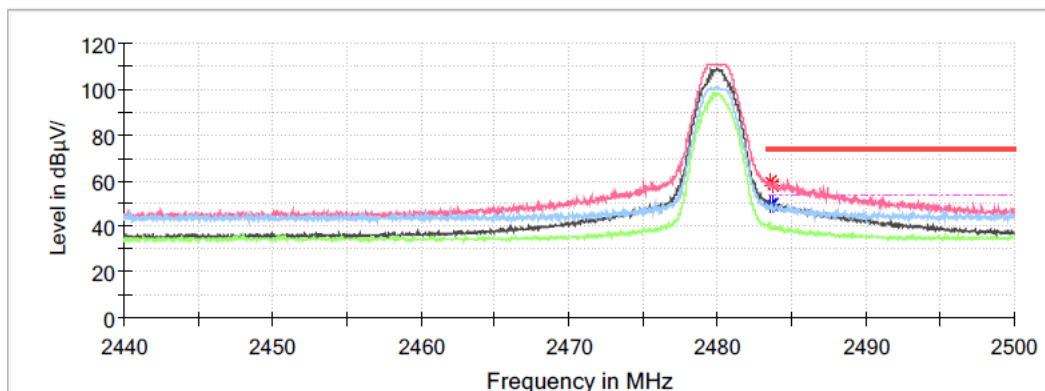
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2389.072000	---	39.68	54.00	14.32	V	0.4
2389.072000	47.41	---	74.00	26.59	V	0.4
2389.408000	---	38.56	54.00	15.44	V	0.4
2389.408000	49.09	---	74.00	24.91	V	0.4

High Channel**Common Information**

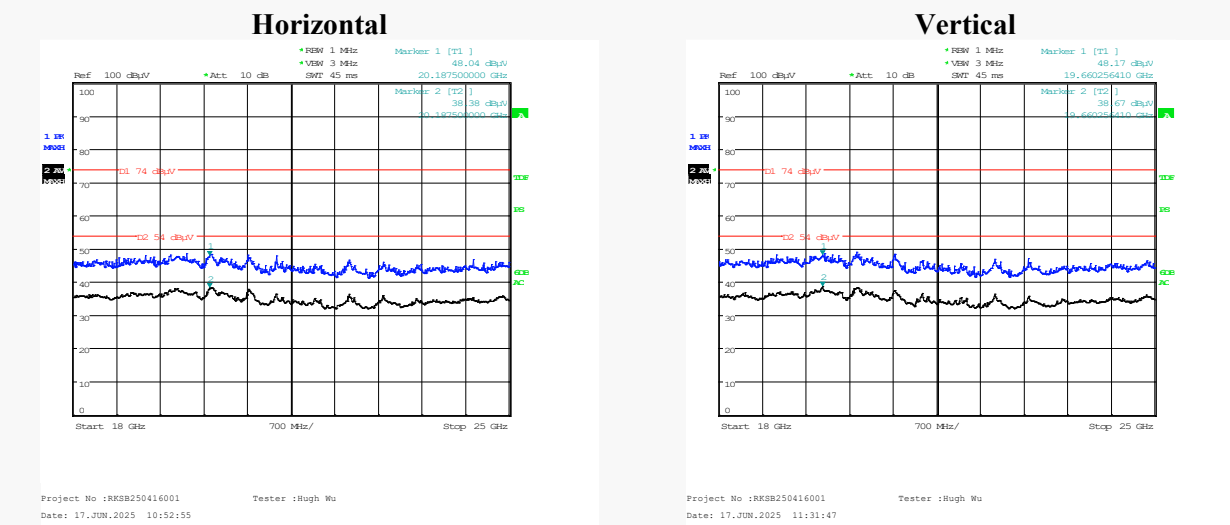
Project No.: RKSB250416001
EUT Model: IWC2 (300W),CONTROLLER/TRANSFORMER
Test Mode: Transmitting in BLE 2M High channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.8°C
Humidity: 50%
Atmospheric Pressure: 102.8kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/3/24

Full Spectrum

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2483.560000	59.93	---	74.00	14.07	V	0.5
2483.560000	---	49.54	54.00	4.46	V	0.5
2483.656000	58.22	---	74.00	15.78	V	0.5
2483.656000	---	49.90	54.00	4.10	V	0.5

18GHz-25GHz: Transmitting in maximum output power mode and BLE 2M low channel



Frequency (GHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
19.66	---	38.67	54	15.33	V	11.3
19.66	48.17	---	74	25.83	V	11.3
20.19	---	38.38	54	15.62	H	12.45
20.19	48.04	---	74	25.96	H	12.45

Note: The test distance is 3m. The limit is 74dB μ V/m(Peak) and 54dB μ V/m(Average).

6 dB EMISSION BANDWIDTH**Environmental Conditions & Test Information**

Test Date:	2025-05-17~ 2026-03-25
Temperature:	21.3 °C ~ 25.5 °C
Relative Humidity:	37 % - 55 %
ATM Pressure:	100.3kPa - 101.7kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

Test Result: Compliant.

EUT operation mode: Transmitting

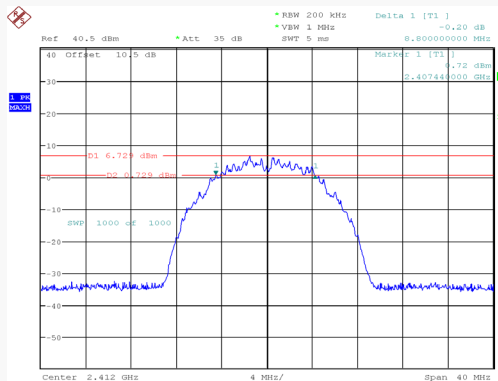
For Wi-Fi Mode:

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)	Result
802.11b Mode				
Low	2412	8.800	≥ 0.5	Pass
Middle	2437	8.800	≥ 0.5	Pass
High	2462	8.360	≥ 0.5	Pass
802.11g Mode				
Low	2412	16.480	≥ 0.5	Pass
Middle	2437	16.480	≥ 0.5	Pass
High	2462	16.480	≥ 0.5	Pass
802.11n-HT20 Mode				
Low	2412	17.360	≥ 0.5	Pass
Middle	2437	17.360	≥ 0.5	Pass
High	2462	17.360	≥ 0.5	Pass
802.11n-HT40 Mode				
Low	2422	35.760	≥ 0.5	Pass
Middle	2437	35.840	≥ 0.5	Pass
High	2452	35.680	≥ 0.5	Pass

For BLE Mode:

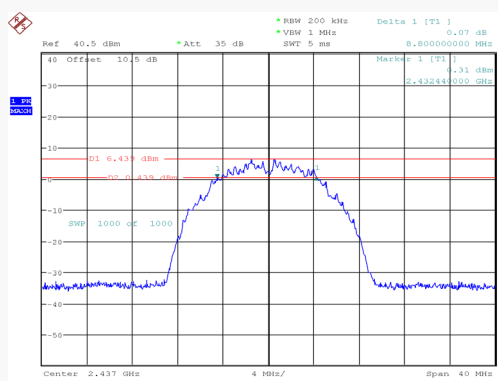
Mode	Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)	Result
BLE (1 Mbps)	Low	2402	0.676	≥ 0.5	Pass
	Middle	2440	0.672	≥ 0.5	Pass
	High	2480	0.672	≥ 0.5	Pass
BLE (2 Mbps)	Low	2402	1.344	≥ 0.5	Pass
	Middle	2440	1.344	≥ 0.5	Pass
	High	2480	1.350	≥ 0.5	Pass

For Wi-Fi Mode:
802.11b Mode Low Channel



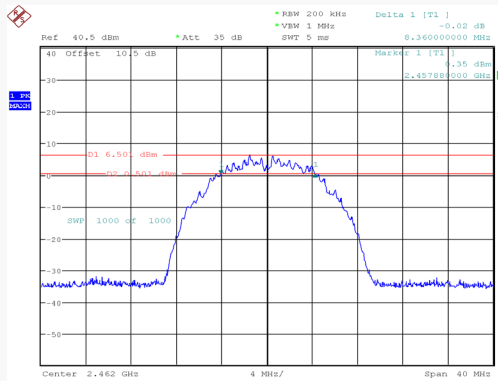
ProjectNo.:RKSB250416001 Tester:Neil Zhou
Date: 17.MAY.2025 14:55:05

802.11b Mode Middle Channel



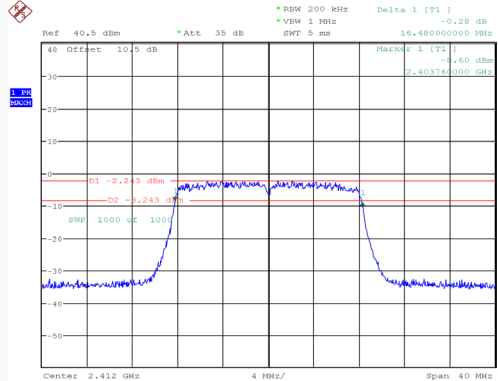
ProjectNo.:RKSB250416001 Tester:Neil Zhou
Date: 17.MAY.2025 15:08:02

802.11b Mode High Channel



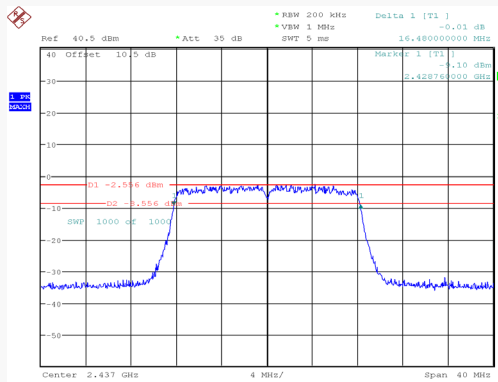
ProjectNo.:RKSB250416001 Tester:Neil Zhou
Date: 17.MAY.2025 15:19:53

802.11g Mode Low Channel



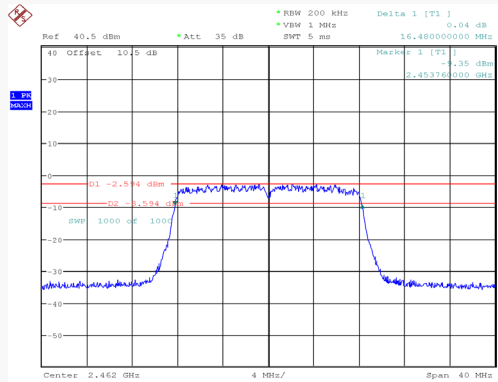
ProjectNo.:RKSB250416001 Tester:Neil Zhou
Date: 17.MAY.2025 15:31:13

802.11g Mode Middle Channel



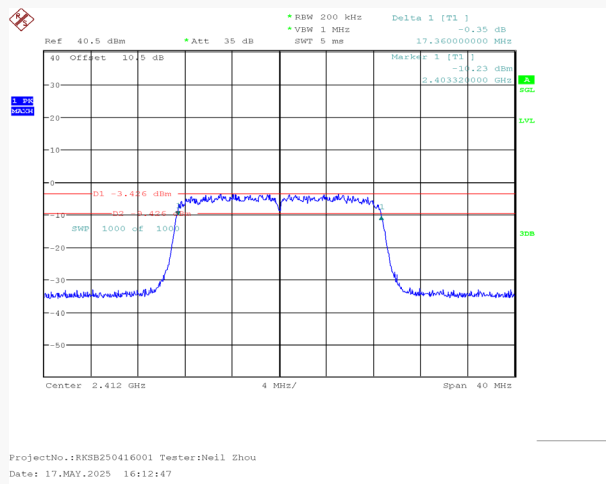
ProjectNo.:RKSB250416001 Tester:Neil Zhou
Date: 17.MAY.2025 15:45:00

802.11g Mode High Channel

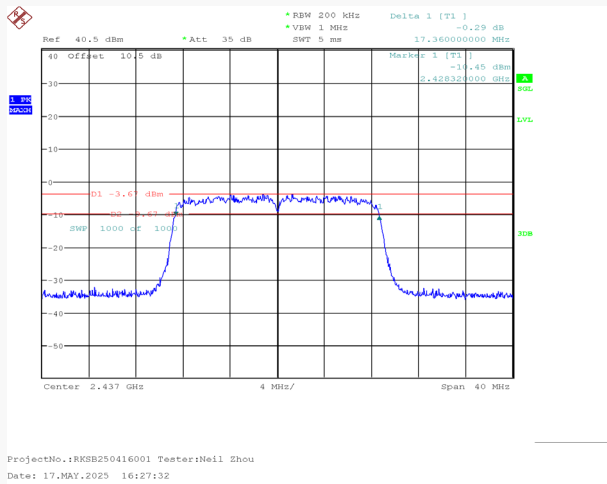


ProjectNo.:RKSB250416001 Tester:Neil Zhou
Date: 17.MAY.2025 15:58:32

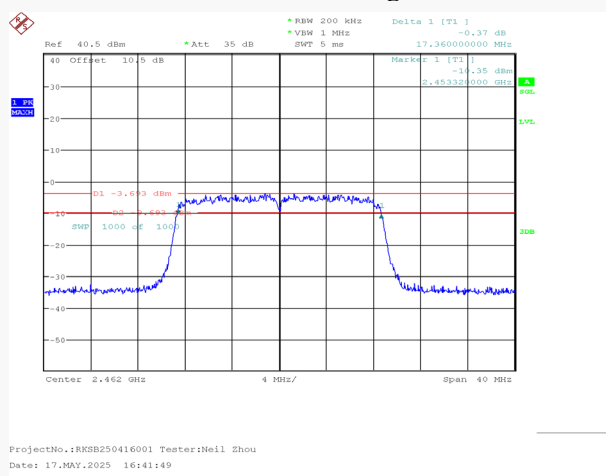
802.11n-HT20 Mode Low Channel



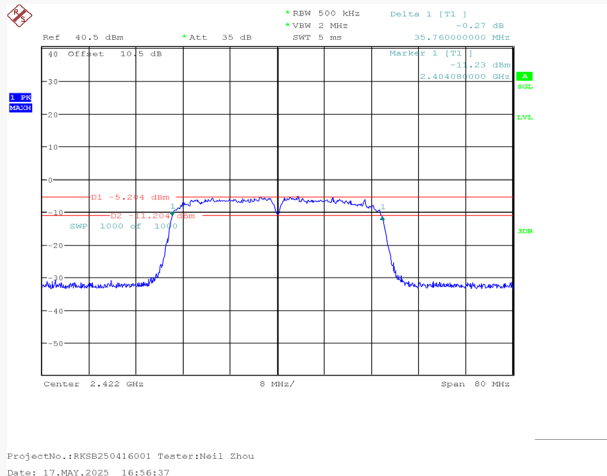
802.11n-HT20 Mode Middle Channel



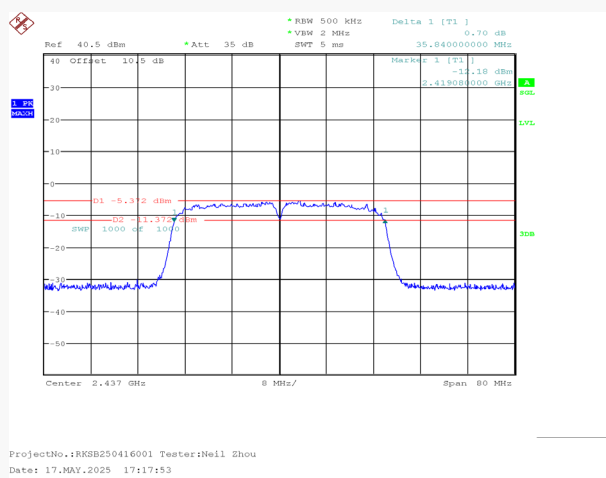
802.11n-HT20 Mode High Channel



802.11n-HT40 Mode Low Channel



802.11n-HT40 Mode Middle Channel



802.11n-HT40 Mode High Channel

