

FCC TEST REPORT

REPORT NO.: RF940503H01

MODEL NO.: GPSlim236 XX

RECEIVED: May 03, 2005

TESTED: May 05 to 10, 2005

ISSUED: May 23, 2005

APPLICANT: Holux Technology, Inc

ADDRESS: 1F, No. 30, R&D Rd. II, Hsinchu City 300,
Science-based Industrial Park Taiwan (R.O.C)

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 63 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



0536
ILAC MRA



No. 2177-01

TABLE OF CONTENTS

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	9
3.4	DESCRIPTION OF SUPPORT UNITS	10
3.5	CONFIGURATION OF SYSTEM UNDER TEST	11
4	TEST PROCEDURES AND RESULTS	13
4.1	CONDUCTED EMISSION MEASUREMENT	13
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	13
4.1.2	TEST INSTRUMENTS	13
4.1.3	TEST PROCEDURES	14
4.1.4	DEVIATION FROM TEST STANDARD	14
4.1.5	TEST SETUP	15
4.1.6	EUT OPERATING CONDITIONS	15
4.1.7	TEST RESULTS(MODE 1)	16
4.1.8	TEST RESULTS(MODE 2)	18
4.2	NUMBER OF HOPPING FREQUENCY USED	20
4.2.1	LIMIT OF HOPPING FREQUENCY USED	20
4.2.2	TEST INSTRUMENTS	20
4.2.3	TEST PROCEDURES	21
4.2.4	DEVIATION FROM TEST STANDARD	21
4.2.5	TEST SETUP	22
4.2.6	TEST RESULTS	22
4.3	DWELL TIME ON EACH CHANNEL	24
4.3.1	LIMIT OF DWELL TIME USED	24
4.3.2	TEST INSTRUMENTS	24
4.3.3	TEST PROCEDURES	25
4.3.4	DEVIATION FROM TEST STANDARD	25
4.3.5	TEST SETUP	25
4.3.6	TEST RESULTS	26
4.4	CHANNEL BANDWIDTH	30
4.4.1	TEST INSTRUMENTS	30
4.4.2	TEST PROCEDURE	31
4.4.3	DEVIATION FROM TEST STANDARD	31
4.4.4	TEST SETUP	31
4.4.5	EUT OPERATING CONDITION	31
4.4.6	TEST RESULTS	32

4.5	HOPPING CHANNEL SEPARATION	35
4.5.1	LIMIT OF HOPPING CHANNEL SEPARATION	35
4.5.2	TEST INSTRUMENTS	35
4.5.3	TEST PROCEDURES	36
4.5.4	DEVIATION FROM TEST STANDARD	36
4.5.5	TEST SETUP	36
4.5.6	TEST RESULTS	37
4.6	MAXIMUM PEAK OUTPUT POWER	40
4.6.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	40
4.6.2	INSTRUMENTS	40
4.6.3	TEST PROCEDURES	41
4.6.4	DEVIATION FROM TEST STANDARD	41
4.6.5	TEST SETUP	42
4.6.6	EUT OPERATING CONDITION	42
4.6.7	TEST RESULTS	43
4.7	RADIATED EMISSION MEASUREMENT	46
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT	46
4.7.2	TEST INSTRUMENTS	47
4.7.3	TEST PROCEDURES	48
4.7.4	DEVIATION FROM TEST STANDARD	48
4.7.5	TEST SETUP	49
4.7.6	TEST RESULTS(MODE 1)	50
4.7.7	TEST RESULTS(MODE 2)	51
4.8	BAND EDGES MEASUREMENT	55
4.8.1	LIMITS OF BAND EDGES MEASUREMENT	55
4.8.2	TEST INSTRUMENTS	55
4.8.3	TEST PROCEDURE	55
4.8.4	DEVIATION FROM TEST STANDARD	55
4.8.5	EUT OPERATING CONDITION	56
4.8.6	TEST RESULTS	56
4.9	ANTENNA REQUIREMENT	58
4.9.1	STANDARD APPLICABLE	58
4.9.2	ANTENNA CONNECTED CONSTRUCTION	58
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	59
6	INFORMATION ON THE TESTING LABORATORIES	63

1 CERTIFICATION

PRODUCT : Bluetooth GPS Receiver
BRAND NAME : HOLUX
MODEL NO. : GPSlim236 XX
APPLICANT : Holux Technology, Inc
TESTED DATE: May 05 to 10, 2005
TEST ITEM : MASS-PRODUCTION
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: GPSlim236 XX) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** May 23, 2005
(Midoli Peng)

TECHNICAL
ACCEPTANCE :  , **DATE:** May 23, 2005
Responsible for RF (Hank Chung)

APPROVED BY :  , **DATE:** May 23, 2005
(Eric Lin, Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -2.89dB at 0.658 MHz
15.247(a)(1)(I)-(ii)	Number of Hopping Frequency Used Spec.: At least 75 channels	PASS	Meet the requirement of limit
15.247(a)(1)(ii)	Dwell Time on Each Channel Spec. : Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit
15.247(a)(1)(I)-(ii)	Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth, which ever is greater	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System Spec.: Max. 1 MHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Spec.: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -9.3dB at 2370.00MHz
15.247(c)	Band Edge Measurement	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Bluetooth GPS Receiver
MODEL NO.	GPSlim236 XX
POWER SUPPLY	3.7VDC from battery or DC 5V from power adapter or DC 5V from Cigarette adapter
MODULATION TYPE	GFSK
MODULATION TECHNOLOGY	FHSS
FREQUENCY RANGE	2402MHz ~ 2480MHz
NUMBER OF CHANNEL	79
OUTPUT POWER	1.49dBm
ANTENNA TYPE	Patch antenna(for Bluetooth) 2M 28dB MMCX connector active antenna(for GPS)
DATA CABLE	NA
I/O PORTS	USB port x1
ASSOCIATED DEVICES	NA

NOTE:

1. The "X" of Model Names could be A~Z.
2. The EUT consist of bluetooth device and GPS receiver.
3. This test report was prepared for bluetooth device.
4. The EUT only has one model name and consists of two enclosure which are identical to each other in all aspects except for the f enclosure

5. The EUT could be supplied with Li-ion 3.7V battery or the following power adapter and Cigarette adapter:

Power adapter			Note
Brand	Model Name	Specification	for battery recharge (through USB cable/1.5m/shielded/without core)
NA	YFAF23073001	Input: 100-240Vac, 0.15A, 50-60Hz Output: DC 5V, 1A, 5W(Max)	
Cigarette adapter			
Brand	Model Name	Specification	
HOLUX	CC-0103	DC5V, 850mA	
Battery			Note
Brand	Model Name	Specification	
NA	HX-N3650A	3.7V	

6. The EUT was pre-tested in chamber as the following test modes:

For AC power conducted emission	
Test Mode	Description
Mode A	GPS connection + Bluetooth + battery recharge (from Power adapter)
Mode B	GPS connection + Bluetooth + battery + DC input through RS232-PS2 data cable
Mode C	GPS connection + Bluetooth + battery + DC input through USB data cable
For transmitter radiated emissions (30MHz ~ 1GHz)	
Test Mode	Description
Mode D	GPS connection + Bluetooth + battery recharge (from Power adapter)
Mode E	GPS connection + Bluetooth + battery recharge (from Cigarette adapter)
Mode F	GPS connection + Bluetooth + battery
Mode G	GPS connection + Bluetooth + battery + DC input through RS232-PS2 data cable
Mode H	GPS connection + Bluetooth + battery + DC input through USB data cable

The worst AC power conducted emission was found in Mode A and Mode C. The worst transmitter radiated emissions (30MHz ~ 1GHz) was found in Mode E and Mode H. The final test was executed under test mode with highest emission and recorded in this report individually.

7. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Seventy-nine channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2431	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

NOTE:

- Below 1 GHz, the channel 0, 39, and 78 were pre-tested in chamber. The channel 78, worst case one, was chosen for final test.
- Above 1 GHz, the channel 0, 39, and 78 were tested individually.
- The EUT was tested with the following modes:

For AC power conducted emission	
Test Mode	Description
Mode 1	GPS connection + Bluetooth + battery recharge (from Power adapter)
Mode 2	GPS connection + Bluetooth + battery + DC input through USB data cable
For transmitter radiated emissions (30MHz ~ 1GHz)	
Test Mode	Description
Mode 1	GPS connection + Bluetooth + battery recharge (from Cigarette adapter)
Mode 2	GPS connection + Bluetooth + battery + DC input through USB data cable
For transmitter radiated emissions (Above 1GHz)	
Test Mode	Description
Mode D	GPS connection + Bluetooth + battery recharge (from Power adapter)

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Bluetooth GPS Receiver. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4 : 2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	Dell	PP01L	TW-09c748-12800-165-3171	DoC
2	PRINTER	HP	C2642A	MY79F1C3MZ	B94C2642X
3	MODEM	ACEEX	1414	0206026779	IFAXDM1414
4	Bluetooth Dongle	Corega	CG-BTUSB01	00T9001041200069 Rve.A1	NA

No.	Signal cable description
1	NA
2	1.1 m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	1.1 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
4	NA


Note: 1. All power cords of the above support units are unshielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

For AC power conducted emission (Test mode 1) :

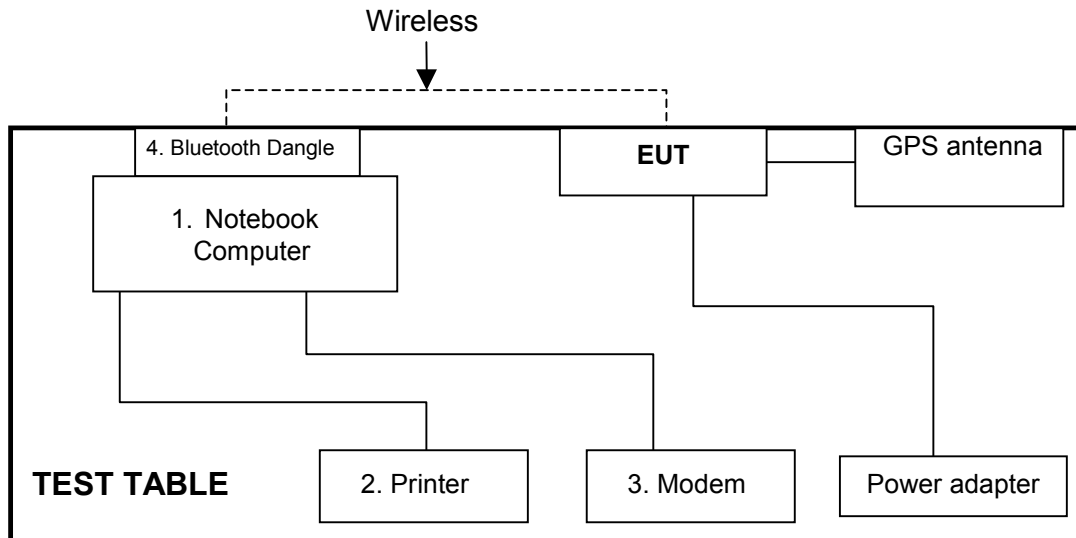


For transmitter radiated emissions (30MHz ~ 1GHz) (Test mode 1) :

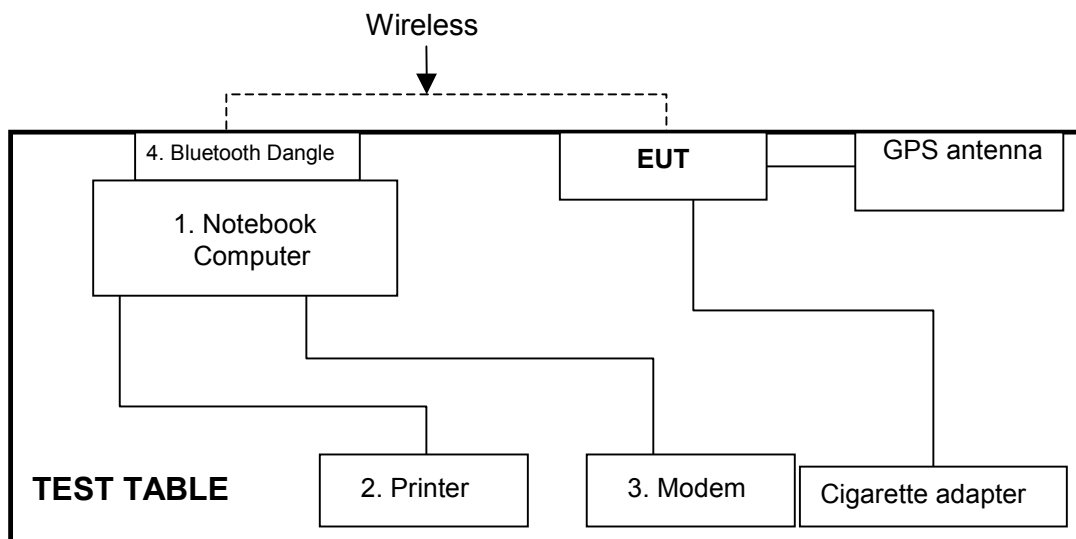

For AC power conducted emission (Test mode 2) :

For transmitter radiated emissions (30MHz ~ 1GHz) (Test mode 2) :

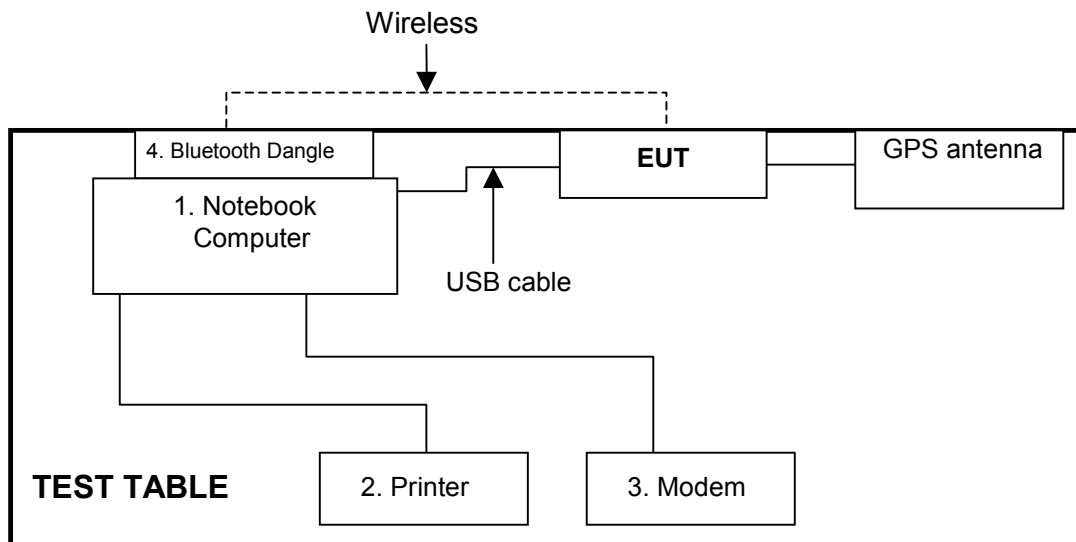

NOTE: 1. Please refer to the photos of test configuration in Item 5 also.

4 TEST PROCEDURES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
*ROHDE & SCHWARZ Test Receiver	ESCS 30	847124/029	Dec. 07, 2005
*ROHDE & SCHWARZ LISN (for EUT)	ESHS-Z5	848773/004	Nov. 08, 2005
*KYORITSU LISN (for peripheral)	KNW-407	8/1395/12	Jul. 23, 2005
*RF Cable (JETBAO)	RG233/U	Cable_CA_01	Jul. 02, 2005
*Terminator(for KYORITSU)	50	3	Oct. 12, 2005
*Software	Cond-V2e	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. * = These equipment are used for the final measurement.
5. The measurement uncertainty is 2.53 dB, which is calculated as per the document CISPR 16-4


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

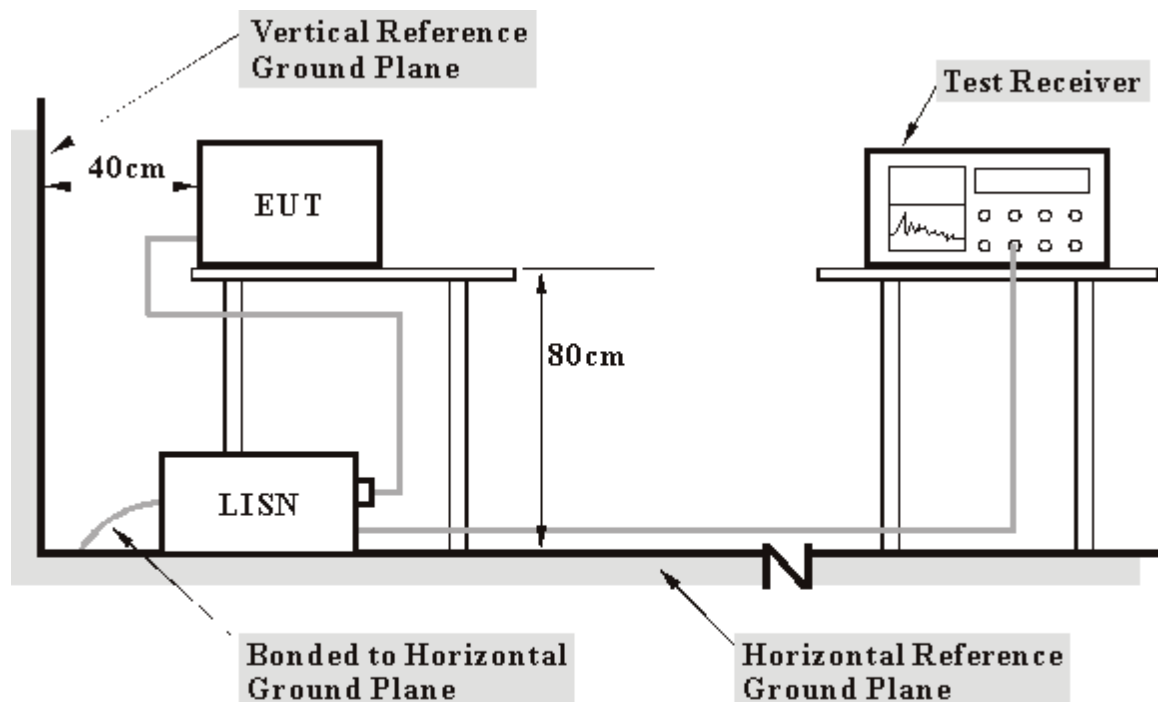

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


- a. Placed the EUT on the testing table.
- b. The support unit 1 (Notebook computer) ran a test program "WDS Commander V5.0.2.7 / GPS Viewer.exe" to enable EUT under transmission condition continuously at specific channel frequency.
- c. Notebook computer sends "H" messages to modem.
- d. Notebook computer sends "H" messages to printer, and the printer prints them on paper.

4.1.7 TEST RESULTS(MODE 1)

EUT	Bluetooth GPS Receiver	MODEL	GPSlim236 XX
TEST MODE	Mode 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 79%RH, 984 hPa	TESTED BY	Rex Huang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.377	0.17	45.30	-	45.47	-	58.35	48.35	-12.89	-
2	0.474	0.17	41.44	-	41.61	-	56.44	46.44	-14.83	-
3	0.736	0.19	39.52	-	39.71	-	56.00	46.00	-16.29	-
4	1.033	0.20	37.43	-	37.63	-	56.00	46.00	-18.37	-
5	6.320	0.57	20.32	-	20.89	-	60.00	50.00	-39.11	-
6	21.242	1.37	14.78	-	16.15	-	60.00	50.00	-43.85	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

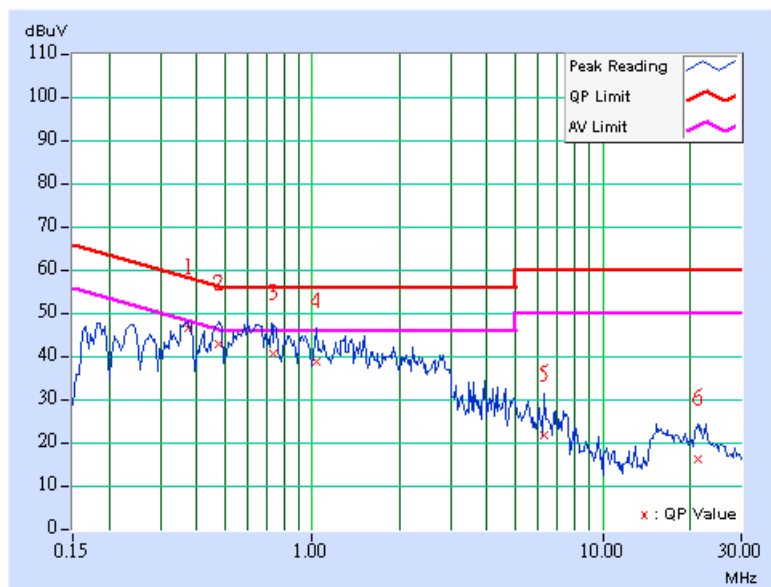

EUT	Bluetooth GPS Receiver	MODEL	GPSlim236 XX
TEST MODE	Mode 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 79%RH, 984 hPa	TESTED BY	Rex Huang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.377	0.17	53.99	42.87	54.16	43.04	58.35	48.35	-4.20	-5.32
2	0.658	0.18	52.93	40.52	53.11	40.70	56.00	46.00	-2.89	-5.30
3	1.201	0.21	40.52	-	40.73	-	56.00	46.00	-15.27	-
4	3.598	0.41	34.63	-	35.04	-	56.00	46.00	-20.96	-
5	15.234	0.90	22.81	-	23.71	-	60.00	50.00	-36.29	-
6	22.570	1.21	35.71	-	36.92	-	60.00	50.00	-23.08	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

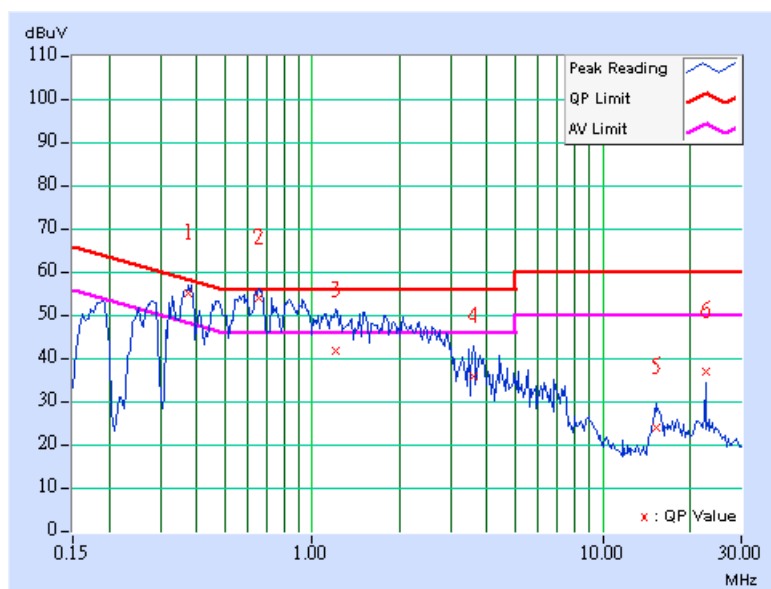


4.1.8 TEST RESULTS(MODE 2)

EUT	Bluetooth GPS Receiver	MODEL	GPSlim236 XX
TEST MODE	Mode 2	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 79%RH, 984 hPa	TESTED BY	Rex Huang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.14	49.72	-	49.86	-	64.61	54.61	-14.75	-
2	0.240	0.15	39.33	-	39.48	-	62.10	52.10	-22.62	-
3	0.685	0.18	10.43	-	10.61	-	56.00	46.00	-45.39	-
4	2.709	0.32	29.46	-	29.78	-	56.00	46.00	-26.22	-
5	13.988	0.94	21.88	-	22.82	-	60.00	50.00	-37.18	-
6	20.695	1.35	26.84	-	28.19	-	60.00	50.00	-31.81	-


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

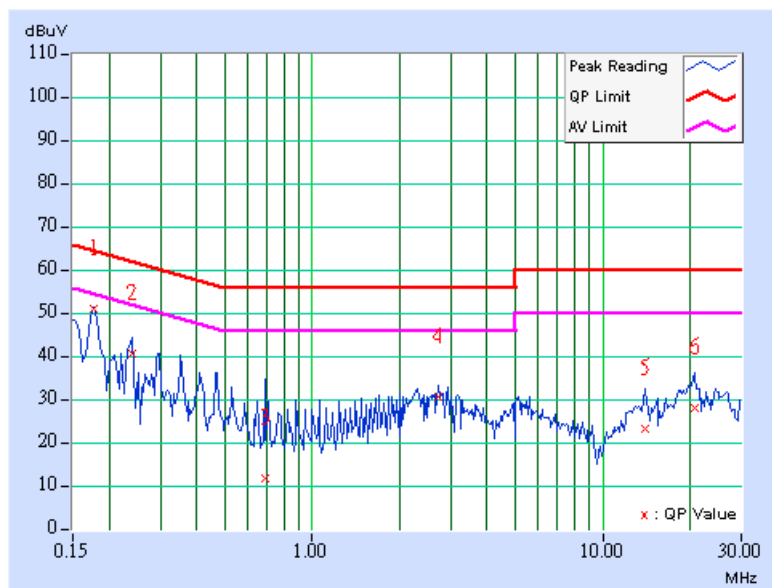

EUT	Bluetooth GPS Receiver	MODEL	GPSlim236 XX
TEST MODE	Mode 2	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 79%RH, 984 hPa	TESTED BY	Rex Huang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.14	48.42	-	48.56	-	64.61	54.61	-16.05	-
2	0.236	0.15	39.90	-	40.05	-	62.24	52.24	-22.18	-
3	0.474	0.17	32.87	-	33.04	-	56.44	46.44	-23.40	-
4	2.650	0.32	30.21	-	30.53	-	56.00	46.00	-25.47	-
5	3.707	0.42	32.01	-	32.43	-	56.00	46.00	-23.57	-
6	20.703	1.15	25.37	-	26.52	-	60.00	50.00	-33.48	-

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

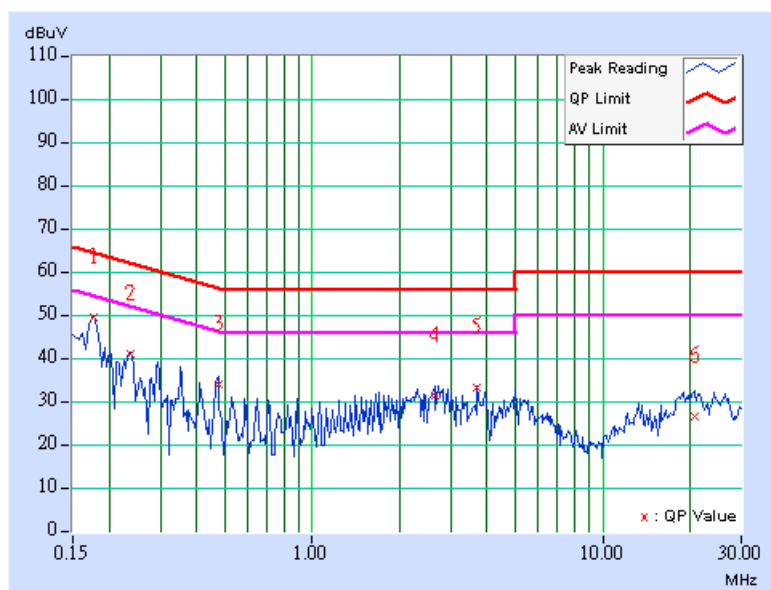

4.2 NUMBER OF HOPPING FREQUENCY USED

4.2.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 hopping frequencies, and should be equally spaced.

4.2.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	May. 26, 2005

Note:

1. The measurement uncertainty is 226Hz, which is calculated as per the document ETSI TR 100 028.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.2.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.2.4 DEVIATION FROM TEST STANDARD



No deviation

4.2.5 TEST SETUP



4.2.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

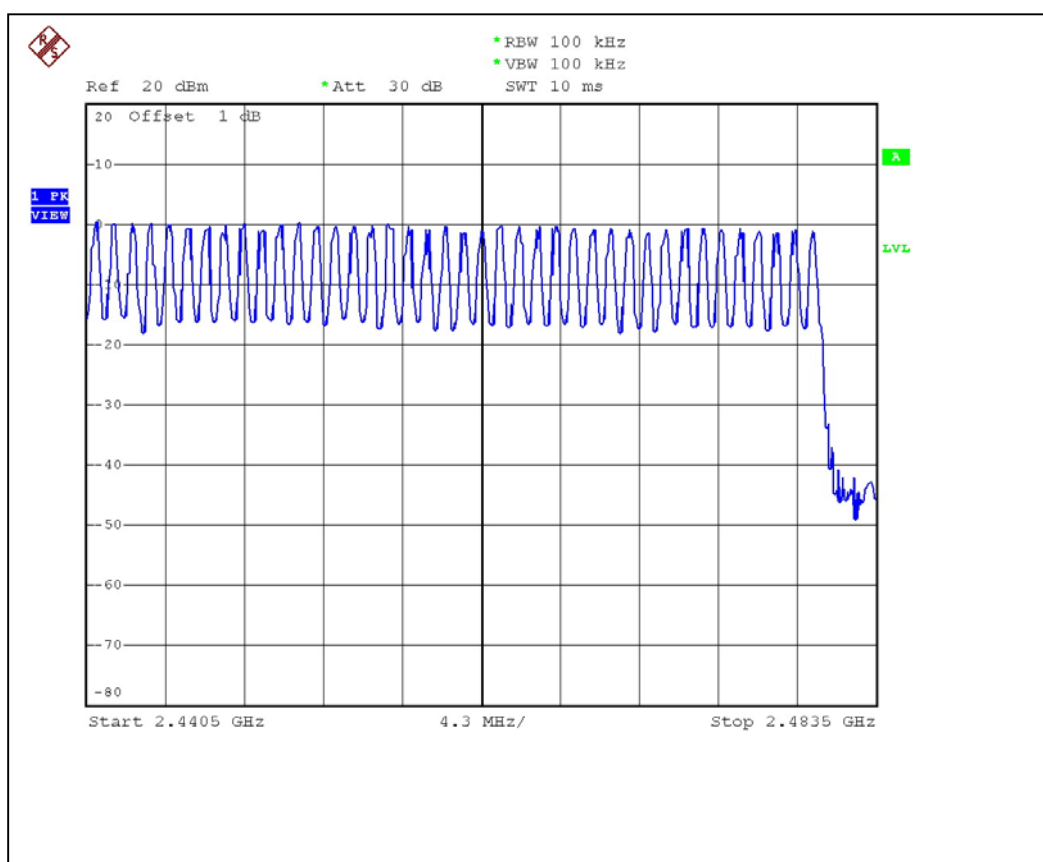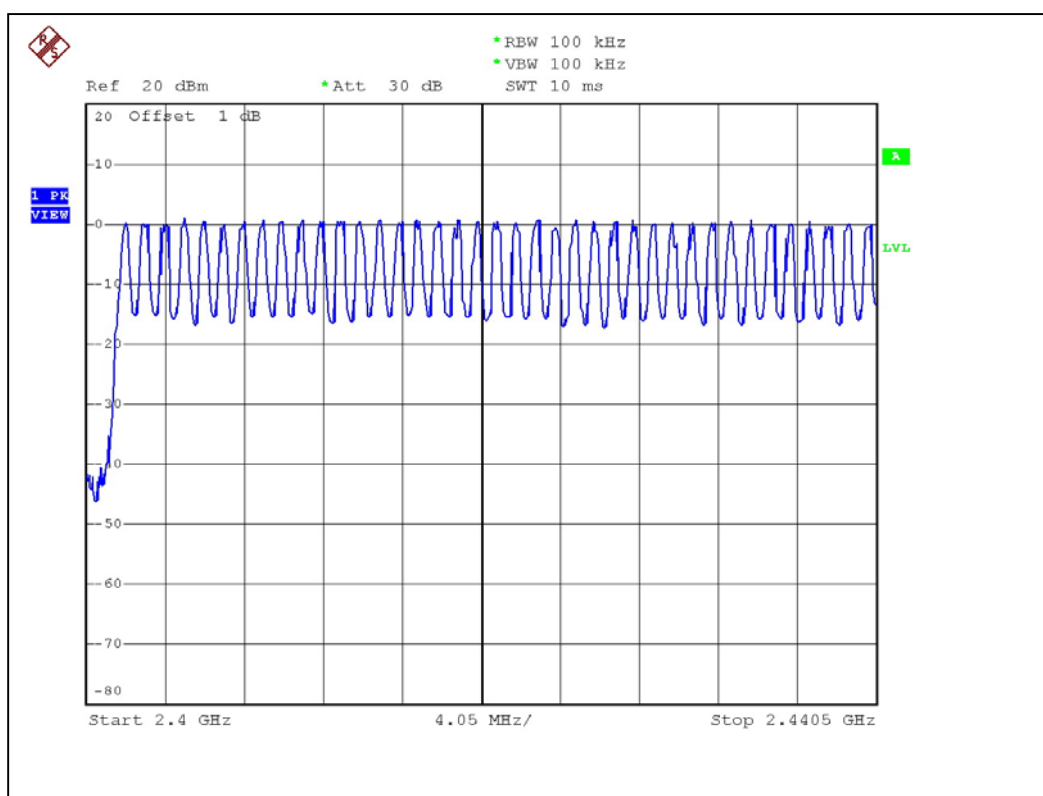

4.3 DWELL TIME ON EACH CHANNEL

4.3.1 LIMIT OF DWELL TIME USED

For FHSS, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 31.6 second period. For hybrid systems, the average time of occupancy on any frequency should not exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	May. 26, 2005

Note:

1. The measurement uncertainty is 226Hz, which is calculated as per the document ETSI TR 100 028.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP







4.3.6 TEST RESULTS



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	51 (times / 5 sec) *6.32=322.32 times	0.411	132.47	400
DH3	30 (times / 5 sec) *6.32=189.6 times	1.691	320.61	400
DH5	21 (times / 5 sec) *6.32=132.72 times	2.939	390.06	400

Test plots of the transmitting time slot are shown on next three pages.

DH1

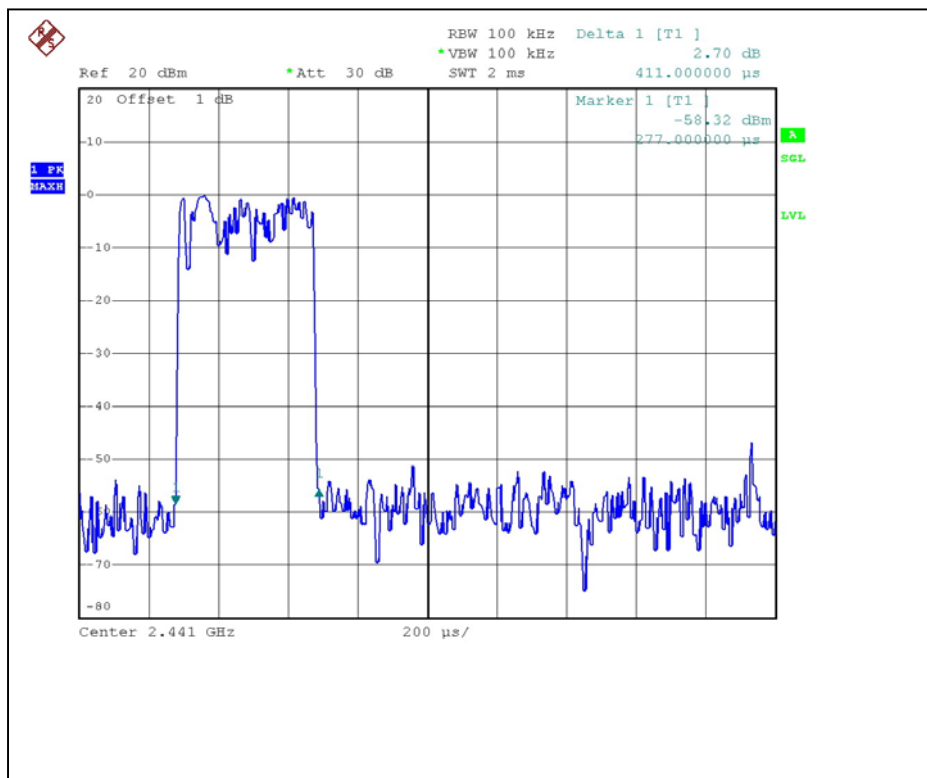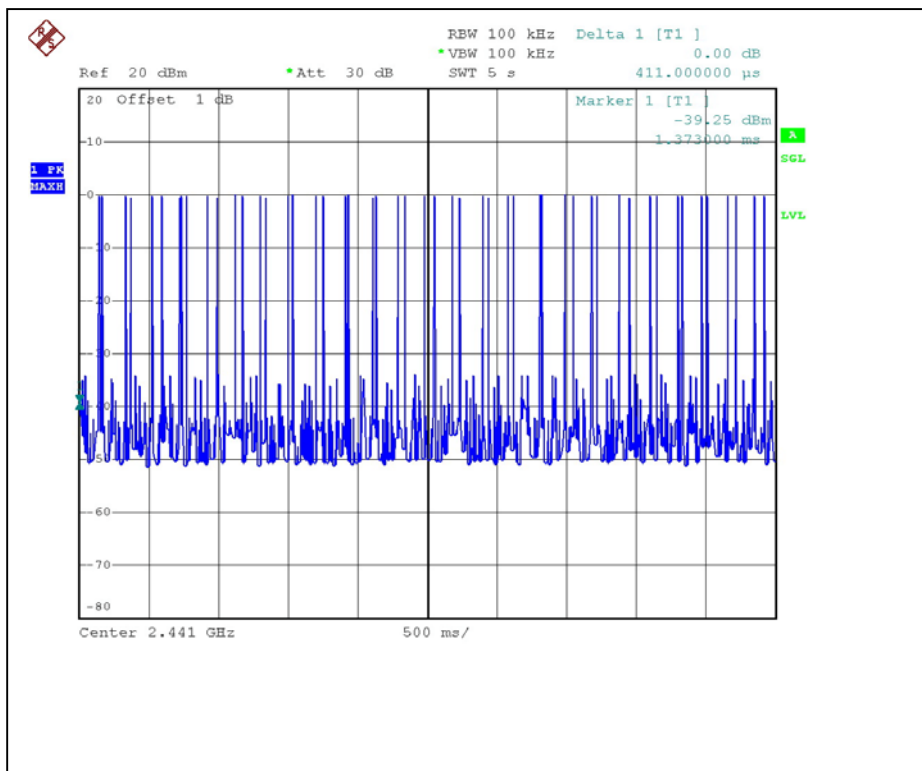

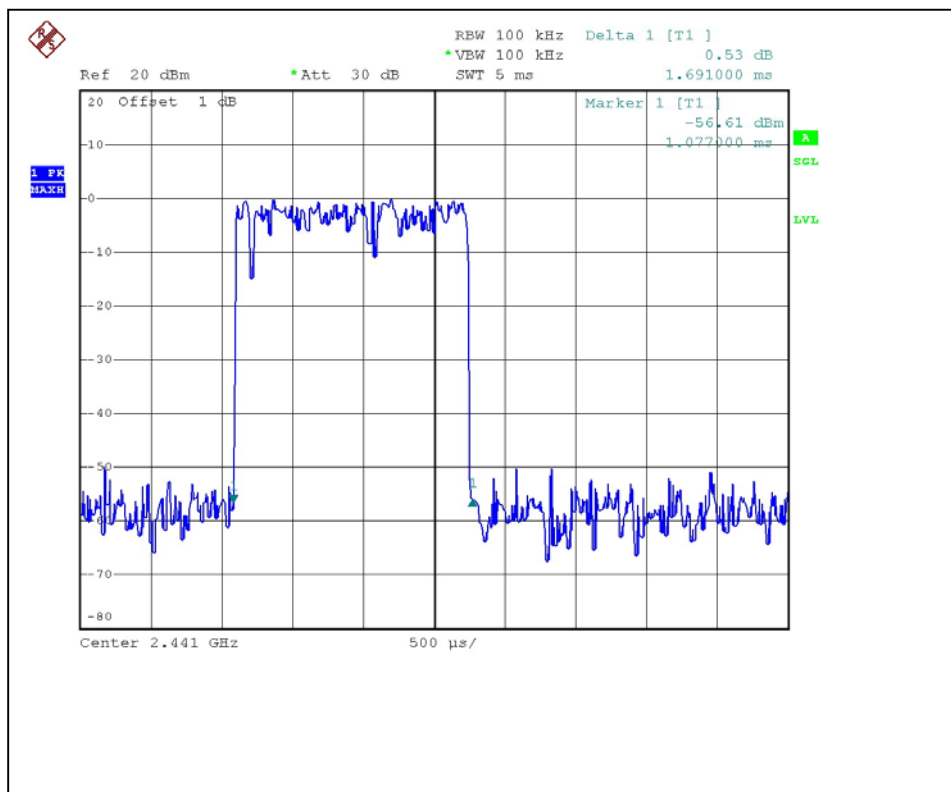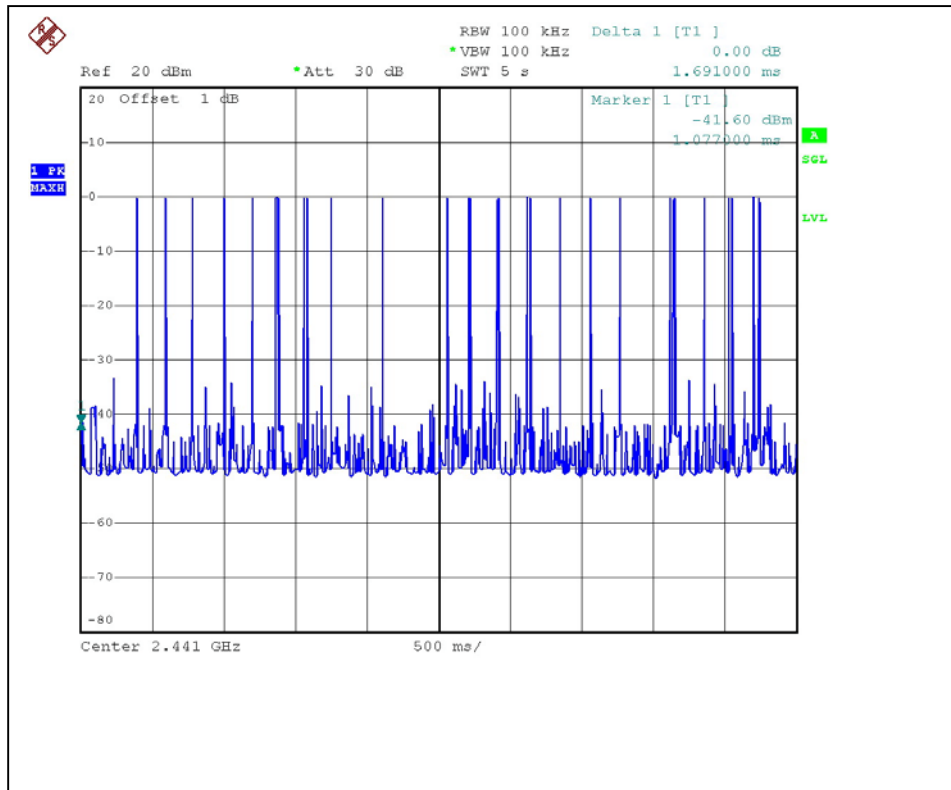DH3

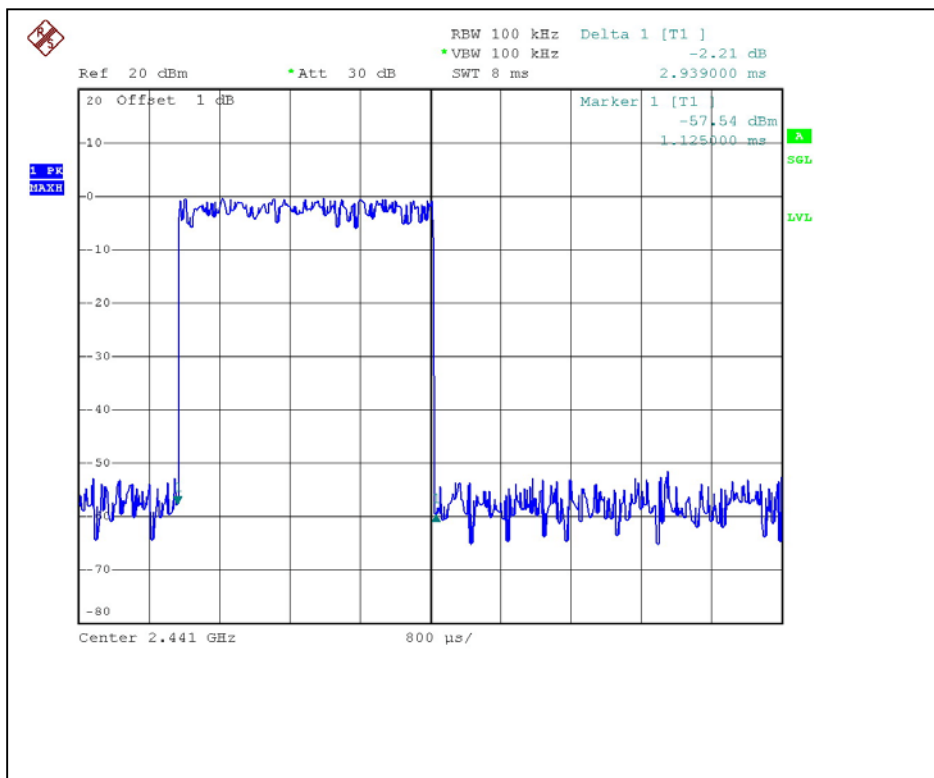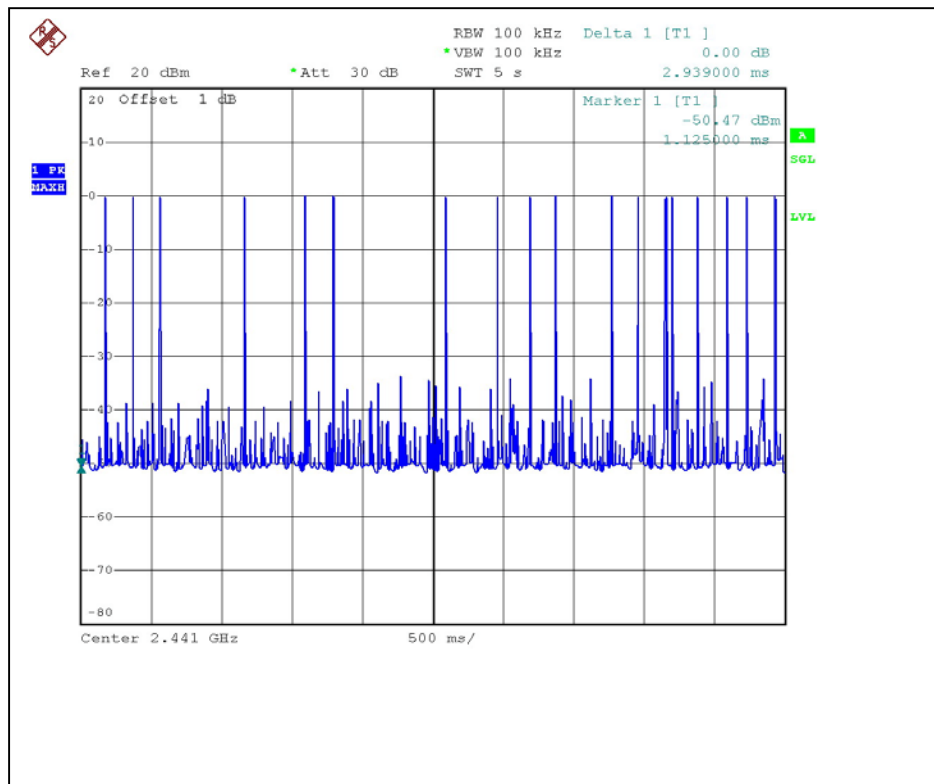DH5

4.4 CHANNEL BANDWIDTH

4.4.1 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	May 26, 2005

Note:

1. The measurement uncertainty is 226Hz, which is calculated as per the document ETSI TR 100 028.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

4.4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4.4 TEST SETUP





4.4.5 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.4.6 TEST RESULTS

EUT	Bluetooth GPS Receiver	MODEL	GPSlim236 XX
ENVIRONMENTAL CONDITIONS	18deg. C, 72%RH, 984 hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (kHz)
0	2402	1045
39	2441	1045
78	2480	1050

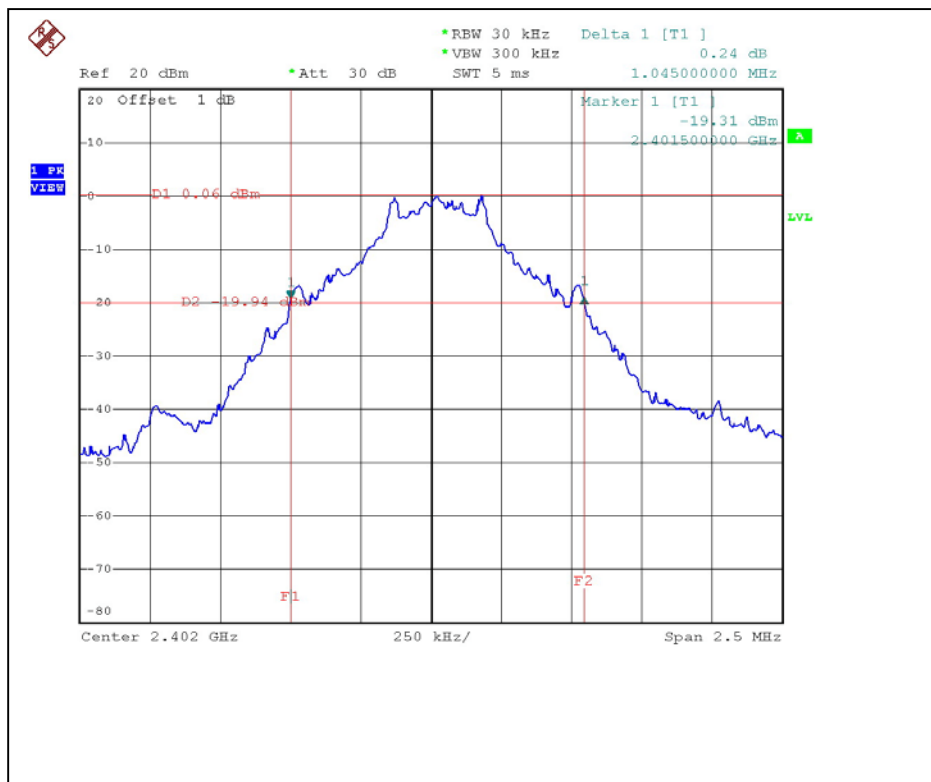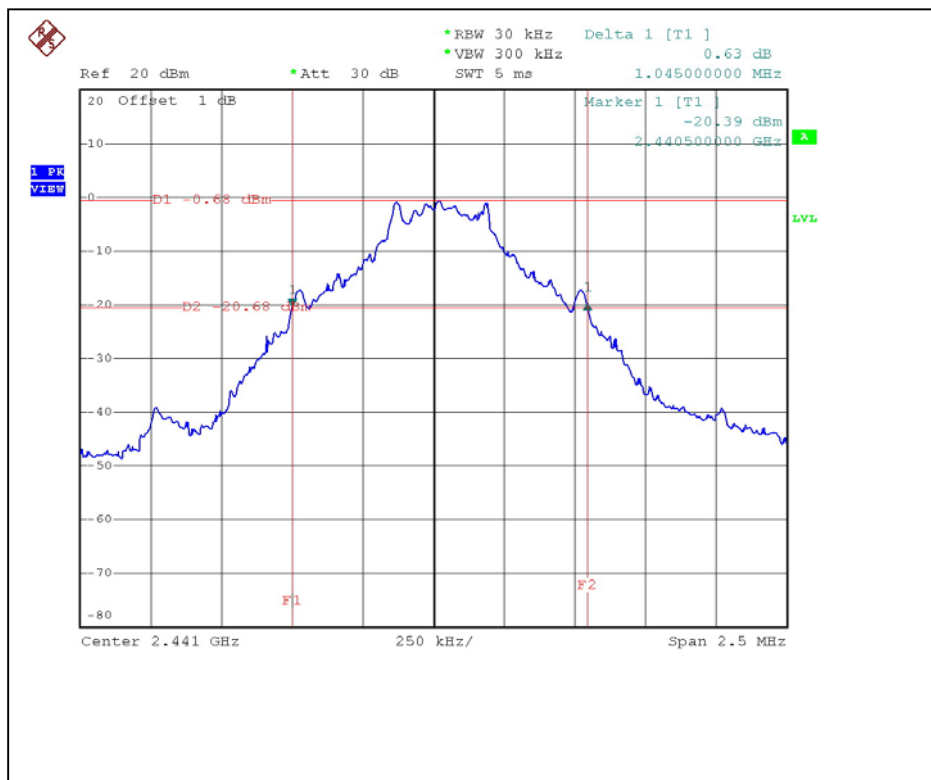Channel 0**Channel 39**

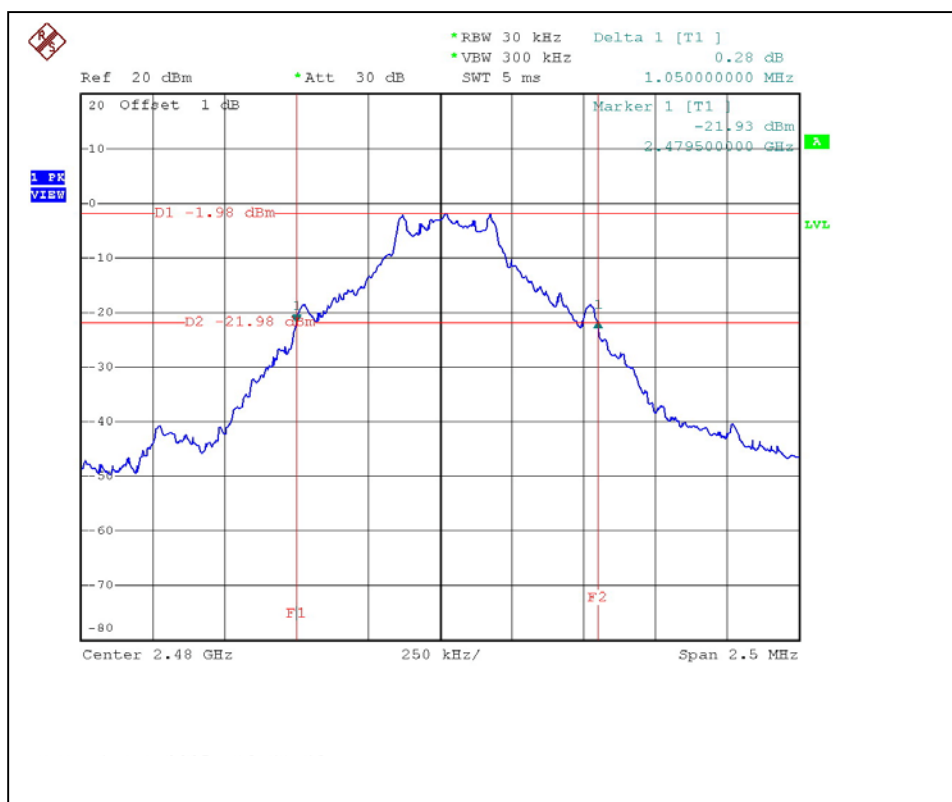Channel 78

4.5 HOPPING CHANNEL SEPARATION

4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or 20dB bandwidth (whichever is greater).

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	May 26, 2005

Note:

1. The measurement uncertainty is 226Hz, which is calculated as per the document ETSI TR 100 028.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP






4.5.6 TEST RESULTS

EUT	Bluetooth GPS Receiver	MODEL	GPSlim236 XX
ENVIRONMENTAL CONDITIONS	24 deg. C, 58%RH, 984 hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Rex Huang		

Channel	Frequency (MHz)	Adjacent Channel Separation	Minimum Limit (kHz)	Pass / Fail
0	2402	1.005MHz	1045	PASS
39	2441	1.000MHz	1045	PASS
78	2480	1.000MHz	1050	PASS

The minimum limit is 20dB bandwidth. Test results please refer to next three pages.

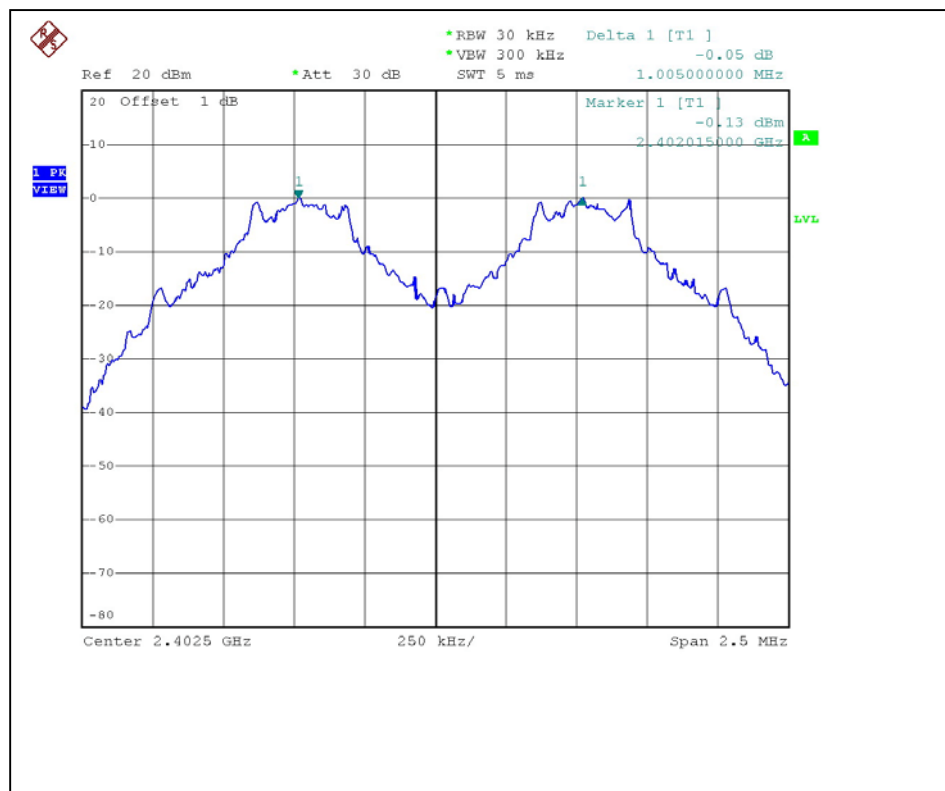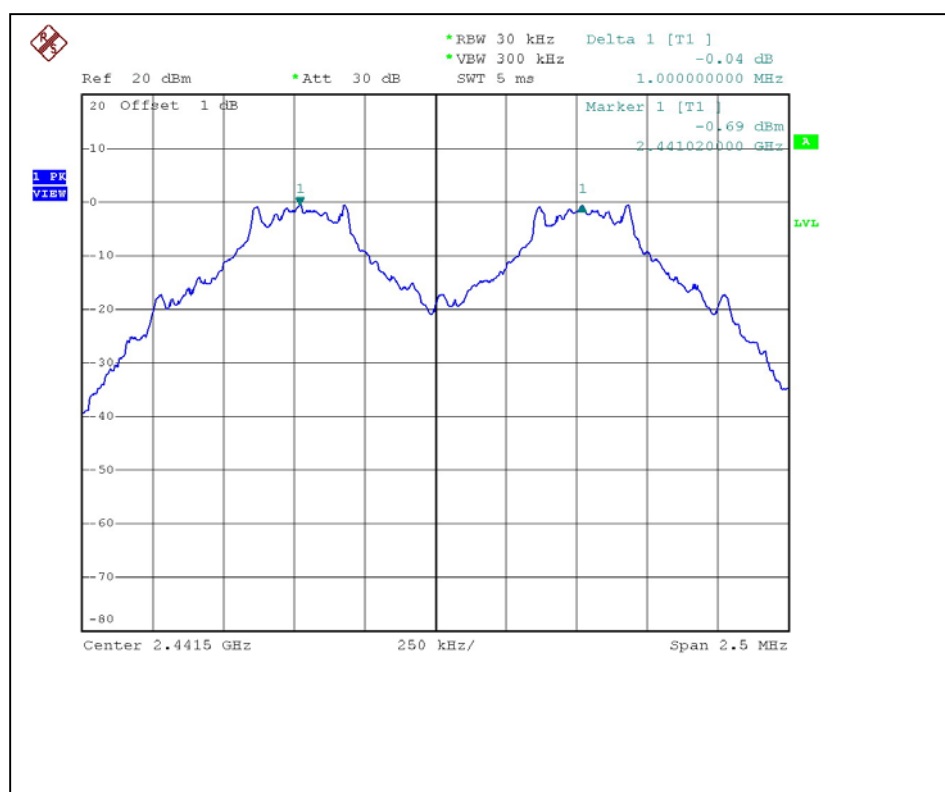Channel 0**Channel 39**

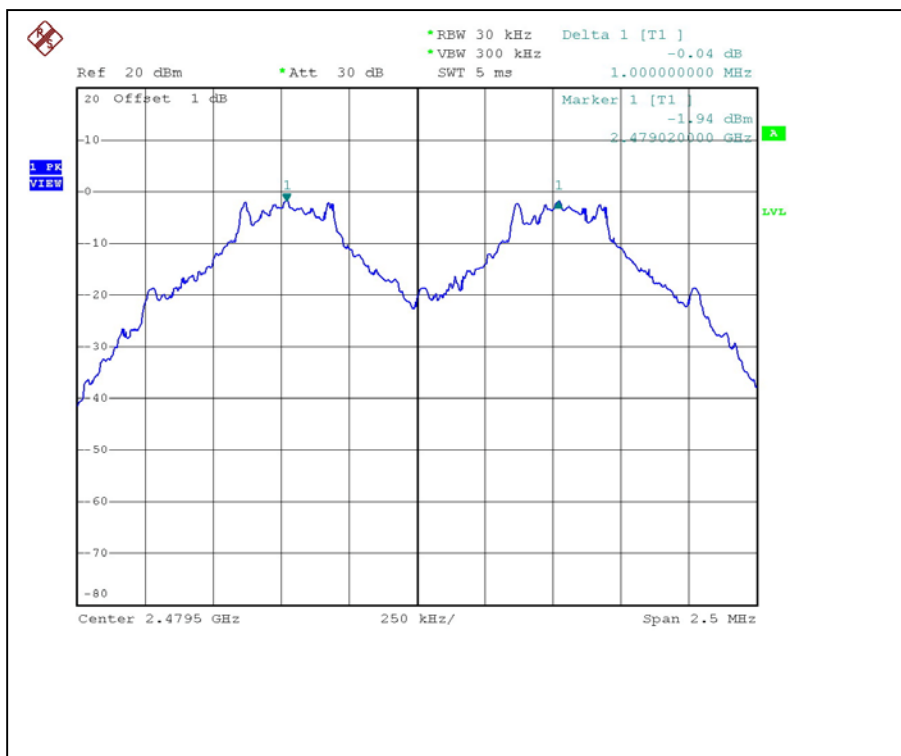Channel 78

4.6 MAXIMUM PEAK OUTPUT POWER

4.6.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.6.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	May 26, 2005

Note:

1. The measurement uncertainty is 226Hz, which is calculated as per the document ETSI TR 100 028.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 1 MHz RBW and 3 MHz VBW.
4. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
5. Repeat above procedures until all frequencies measured were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.



4.6.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.6.7 TEST RESULTS

EUT	Bluetooth GPS Receiver	MODEL	GPSlim236 XX
ENVIRONMENTAL CONDITIONS	24 deg. C, 58%RH, 984 hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
0	2402	1.49	30	PASS
39	2441	0.89	30	PASS
78	2480	-0.32	30	PASS

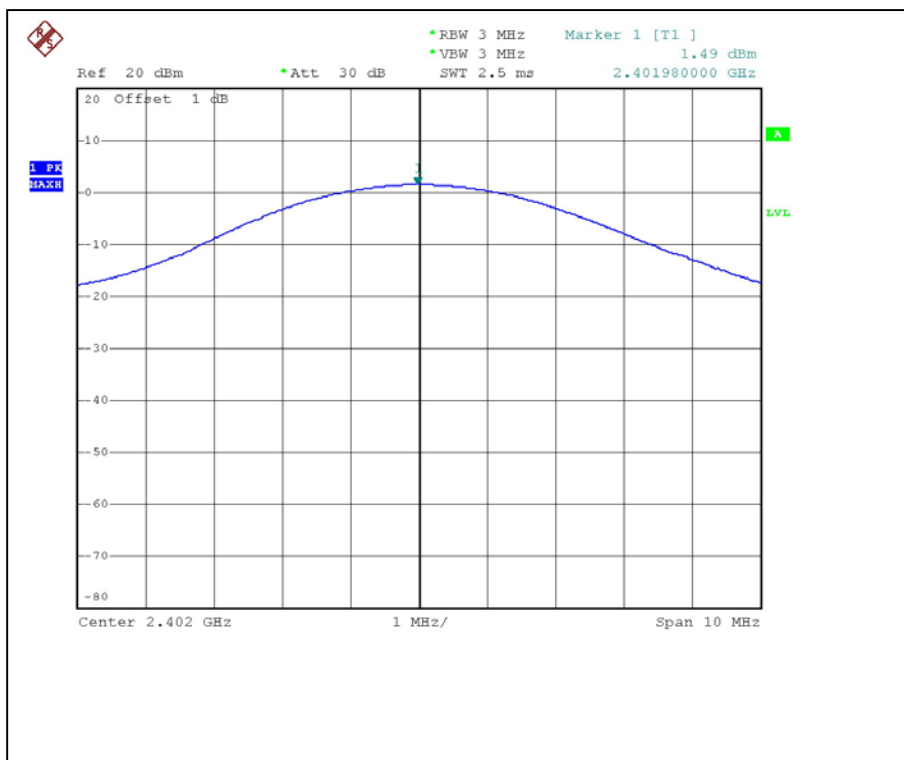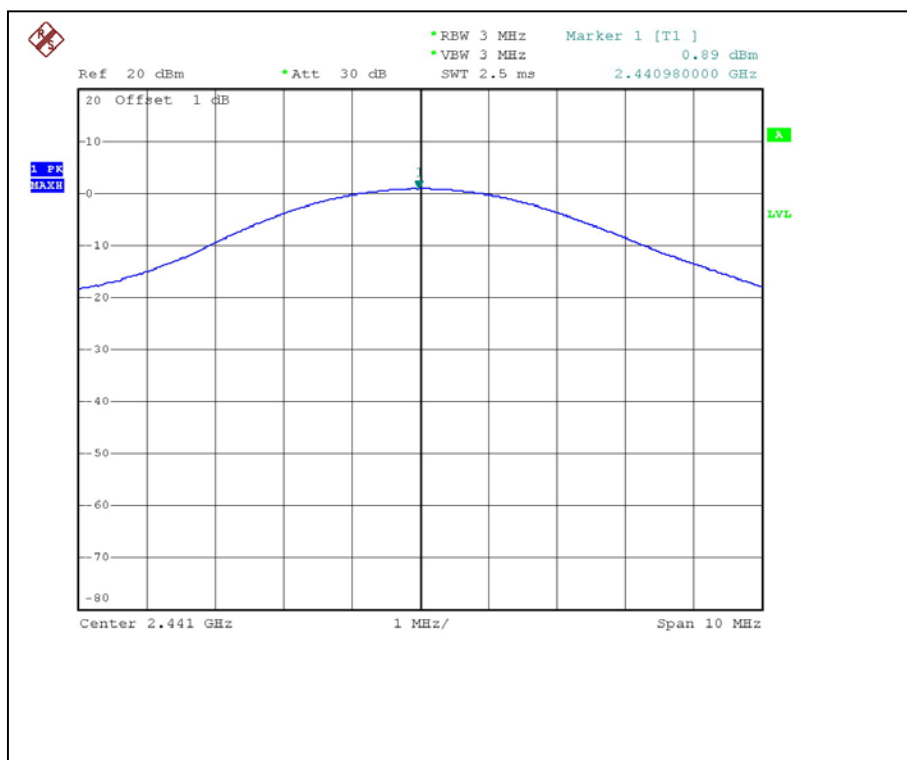Channel 0**Channel 39**

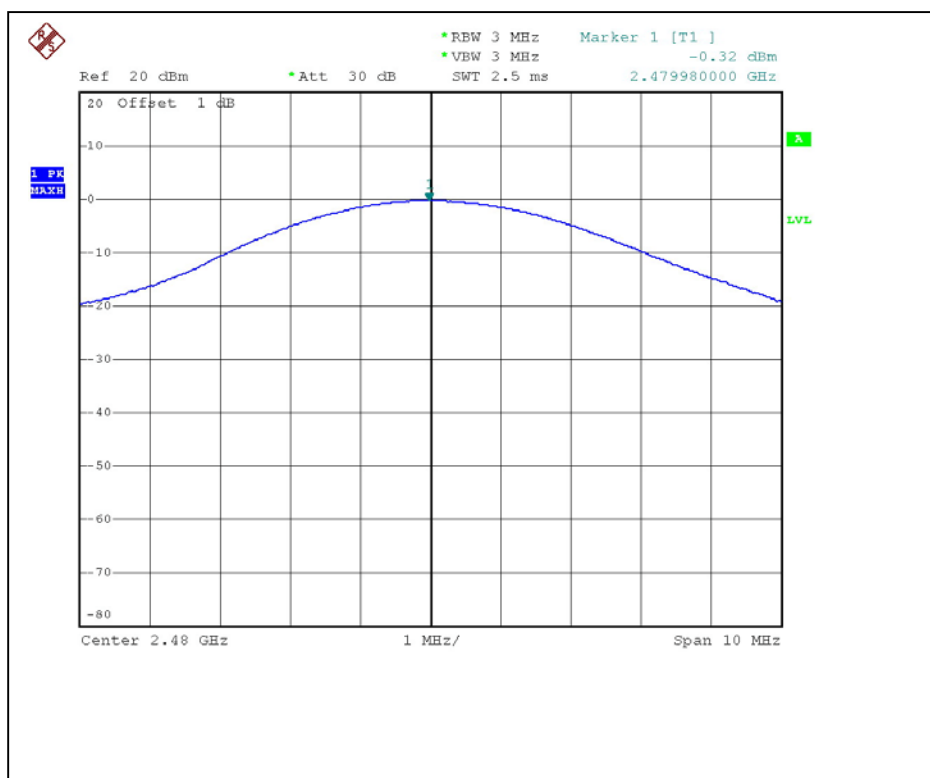Channel 78

4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8594E	3710A04861	Sep. 23, 2005
ADVANTEST Spectrum Analyzer	R3271A	85060311	Jun. 29, 2005
CHASE RF Pre_Amplifier	CPA9232	1057	Aug. 06, 2005
HP Pre_Amplifier	8449B	3008A01922	Oct. 13, 2005
ROHDE & SCHWARZ Test Receiver	ESCS30	100287	Dec. 08, 2005
CHASE Broadband Antenna	VULB9168	138	Dec. 21, 2005
Schwarzbeck Horn_Antenna	BBHA9120	D124	Jun. 16, 2005
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 30, 2006
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 26, 2006
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 26, 2006
RF Switches (ARNITSU)	CS-201	1565157	Jul. 15, 2005
RF CABLE (Chaintek) 1GHz-20GHz	SF102	22054-2	Nov. 15, 2005
RF Cable(RICHTEC)	9913-30M	STCCAB-30M-1GHz-021	Jul. 15, 2005
Software	ADT_Radiated_V 5.14	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

- Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Periodic Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824-3.
7. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4.

Measurement	Value
Radiated emissions (30MHz-1GHz)	2.98 dB
Radiated emissions (1GHz ~18GHz)	2.21 dB
Radiated emissions (18GHz ~20GHz)	1.88 dB

4.7.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

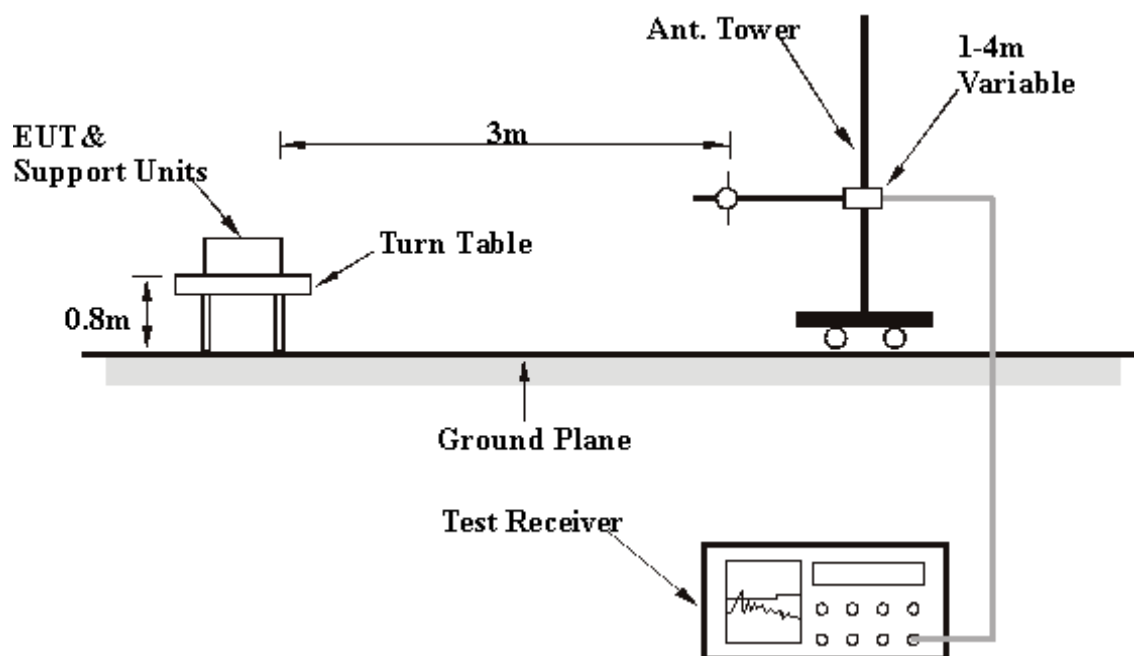

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.7.6 TEST RESULTS(MODE 1)

EUT	Bluetooth GPS Receiver	MODEL	GPSlim236 XX
TEST MODE	Mode 1		
CHANNEL	78	FREQUENCY RANGE	Below 1GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24 deg. C, 58%RH, 984 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	128.02	21.00 QP	43.50	-22.50	1.97 H	292	8.80	12.10
2	191.99	25.00 QP	43.50	-18.50	1.83 H	27	13.30	11.70
3	255.99	27.30 QP	46.00	-18.70	1.68 H	272	13.90	13.40
4	384.02	29.20 QP	46.00	-16.80	1.62 H	76	11.30	17.90
5	512.02	29.60 QP	46.00	-16.40	1.38 H	215	8.30	21.20
6	640.00	33.10 QP	46.00	-12.90	1.13 H	349	9.20	23.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	128.02	22.40 QP	43.50	-21.10	1.00 V	244	10.30	12.10
2	192.00	23.30 QP	43.50	-20.20	1.00 V	149	11.60	11.70
3	255.98	24.60 QP	46.00	-21.40	1.00 V	50	11.20	13.40
4	384.02	27.50 QP	46.00	-18.50	1.00 V	68	9.60	17.90
5	512.01	30.20 QP	46.00	-15.80	1.18 V	185	9.00	21.20
6	639.99	33.20 QP	46.00	-12.80	1.59 V	302	9.30	23.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.7.7 TEST RESULTS(MODE 2)

EUT	Bluetooth GPS Receiver	MODEL	GPSlim236 XX
TEST MODE	Mode 2		
CHANNEL	78	FREQUENCY RANGE	Below 1GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24 deg. C, 58%RH, 984 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	128.01	25.10 QP	43.50	-18.40	1.92 H	343	13.00	12.10
2	192.01	30.40 QP	43.50	-13.10	1.83 H	181	18.60	11.70
3	256.00	27.70 QP	46.00	-18.30	1.67 H	310	14.30	13.40
4	384.00	30.60 QP	46.00	-15.40	1.52 H	170	12.70	17.90
5	512.01	29.90 QP	46.00	-16.10	1.42 H	35	8.70	21.20
6	640.02	33.50 QP	46.00	-12.50	1.21 H	70	9.60	23.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	128.02	25.80 QP	43.50	-17.80	1.00 V	64	13.60	12.10
2	192.00	26.90 QP	43.50	-16.60	1.00 V	68	15.20	11.70
3	256.00	26.80 QP	46.00	-19.20	1.00 V	192	13.40	13.40
4	384.00	28.20 QP	46.00	-17.80	1.06 V	7	10.30	17.90
5	512.02	29.90 QP	46.00	-16.10	1.23 V	347	8.70	21.20
6	640.02	33.70 QP	46.00	-12.30	1.40 V	203	9.80	23.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	Bluetooth GPS Receiver	MODEL	GPSlim236 XX
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29 deg. C, 61%RH, 984 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2370.00	54.30 PK	74.00	-19.70	1.23 H	18	23.80	30.50
1	2370.00	44.70 AV	54.00	-9.30	1.23 H	18	14.20	30.50
2	2390.00	42.70 PK	74.00	-31.30	1.25 H	19	9.00	33.70
2	2390.00	33.10 AV	54.00	-20.90	1.25 H	19	-0.60	33.70
3	*2402.00	94.00 PK			1.25 H	19	64.20	29.80
3	*2402.00	84.40 AV			1.25 H	19	54.60	29.80
4	4804.00	49.40 PK	74.00	-24.60	1.53 H	284	14.40	35.00
4	4804.00	39.80 AV	54.00	-14.20	1.53 H	284	4.80	35.00
5	7206.00	49.60 PK	74.00	-24.40	1.57 H	315	9.10	40.40
5	7206.00	40.00 AV	54.00	-14.00	1.57 H	315	-0.50	40.40
6	9608.00	51.60 PK	74.00	-22.40	1.71 H	32	7.70	43.90
6	9608.00	42.00 AV	54.00	-12.00	1.71 H	32	-1.90	43.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2370.00	47.20 PK	74.00	-26.80	1.00 V	0	16.70	30.50
1	2370.00	37.60 AV	54.00	-16.40	1.00 V	0	7.10	30.50
2	2390.00	33.80 PK	74.00	-40.20	1.00 V	358	0.10	33.70
2	2390.00	24.20 AV	54.00	-29.80	1.00 V	358	-9.50	33.70
3	*2402.00	85.10 PK			1.00 V	358	55.30	29.80
3	*2402.00	75.50 AV			1.00 V	358	45.70	29.80
4	4804.00	49.80 PK	74.00	-24.20	1.00 V	207	14.80	35.00
4	4804.00	40.20 AV	54.00	-13.80	1.00 V	207	5.20	35.00
5	7206.00	48.80 PK	74.00	-25.20	1.16 V	102	8.30	40.40
5	7206.00	39.20 AV	54.00	-14.80	1.16 V	102	-1.30	40.40
6	9608.00	51.50 PK	74.00	-22.50	1.43 V	157	7.60	43.90
6	9608.00	41.90 AV	54.00	-12.10	1.43 V	157	-2.00	43.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625*5 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30\text{dB}$
 7. Average value = peak reading $-20\log(\text{duty cycle})$

EUT	Bluetooth GPS Receiver	MODEL	GPSlim236 XX
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29 deg. C, 61%RH, 984 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	91.10 PK			1.25 H	20	61.20	29.90
1	*2441.00	81.50 AV			1.25 H	20	51.60	29.90
2	4882.00	47.50 PK	74.00	-26.50	1.54 H	289	12.10	35.30
2	4882.00	37.90 AV	54.00	-16.10	1.54 H	289	2.50	35.30
3	7323.00	49.50 PK	74.00	-24.50	1.56 H	318	8.80	40.70
3	7323.00	39.90 AV	54.00	-14.10	1.56 H	318	-0.80	40.70
4	9764.00	51.10 PK	74.00	-22.90	1.74 H	29	7.50	43.60
4	9764.00	41.50 AV	54.00	-12.50	1.74 H	29	-2.10	43.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	83.20 PK			1.00 V	15	53.30	29.90
1	*2441.00	73.60 AV			1.00 V	15	43.70	29.90
2	4882.00	48.30 PK	74.00	-25.70	1.00 V	178	12.90	35.30
2	4882.00	38.70 AV	54.00	-15.30	1.00 V	178	3.30	35.30
3	7323.00	48.60 PK	74.00	-25.40	1.18 V	96	7.90	40.70
3	7323.00	39.00 AV	54.00	-15.00	1.18 V	96	-1.70	40.70
4	9764.00	50.70 PK	74.00	-23.30	1.45 V	143	7.10	43.60
4	9764.00	41.10 AV	54.00	-12.90	1.45 V	143	-2.50	43.60

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625*5 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30\text{dB}$
7. Average value = peak reading $-20\log(\text{duty cycle})$

EUT	Bluetooth GPS Receiver	MODEL	GPSlim236 XX
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29 deg. C, 61%RH, 984 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	91.10 PK			1.15 H	13	61.00	30.10
1	*2480.00	81.50 AV			1.15 H	13	51.40	30.10
2	2483.50	40.30 PK	74.00	-33.70	1.15 H	13	10.20	30.10
2	2483.50	32.70 AV	54.00	-21.30	1.15 H	13	2.60	30.10
3	2488.20	47.40 PK	74.00	-26.60	1.15 H	13	17.30	30.10
3	2488.20	39.80 AV	54.00	-14.20	1.15 H	13	9.70	30.10
4	4960.00	46.20 PK	74.00	-27.80	1.54 H	288	10.50	35.70
4	4960.00	36.60 AV	54.00	-17.40	1.54 H	288	0.90	35.70
5	7440.00	49.40 PK	74.00	-24.60	1.60 H	321	8.40	40.90
5	7440.00	39.80 AV	54.00	-14.20	1.60 H	321	-1.20	40.90
6	9920.00	50.60 PK	74.00	-23.40	1.73 H	26	7.30	43.30
6	9920.00	41.00 AV	54.00	-13.00	1.73 H	26	-2.30	43.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	84.40 PK			1.00 V	9	54.30	30.10
1	*2480.00	74.80 AV			1.00 V	9	44.70	30.10
2	2483.50	35.60 PK	74.00	-38.40	1.00 V	9	5.50	30.10
2	2483.50	26.00 AV	54.00	-28.00	1.00 V	9	-4.10	30.10
3	2488.20	42.70 PK	74.00	-31.30	1.00 V	9	12.60	30.10
3	2488.20	33.10 AV	54.00	-20.90	1.00 V	9	3.00	30.10
4	4960.00	46.70 PK	74.00	-27.30	1.00 V	167	11.00	35.70
4	4960.00	37.10 AV	54.00	-16.90	1.00 V	167	1.40	35.70
5	7440.00	49.00 PK	74.00	-25.00	1.24 V	92	8.00	40.90
5	7440.00	39.40 AV	54.00	-14.60	1.24 V	92	-1.60	40.90
6	9220.00	50.70 PK	74.00	-23.30	1.49 V	151	7.10	43.60
6	9220.00	41.10 AV	54.00	-12.90	1.49 V	151	-2.50	43.60

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625*5 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30\text{dB}$
7. Average value = peak reading $-20\log(\text{duty cycle})$

4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	May 26, 2005

Note:

1. The measurement uncertainty is 2.79dB, which is calculated as per the document ETSI TR 100 028
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation

4.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.6 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):



The band edge emission plot on the following first page show 51.32dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2 is 94.00dBuV/m, so the maximum field strength in restrict band is $94.00 - 51.32 = 42.68$ dBuV/m which is under 74 dBuV/m limit.

The band edge emission plot on the following first page shows 48.75dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.2 is 91.10dBuV/m, so the maximum field strength in restrict band is $91.10 - 48.75 = 42.35$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):

The band edge emission plot on the following second page shows 51.32dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2 is 84.40dBuV/m, so the maximum field strength in restrict band is $84.40 - 51.32 = 33.08$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot on the following second page shows 48.75dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.2 is 81.50dBuV/m, so the maximum field strength in restrict band is $81.50 - 48.75 = 32.75$ dBuV/m which is under 54 dBuV/m limit.

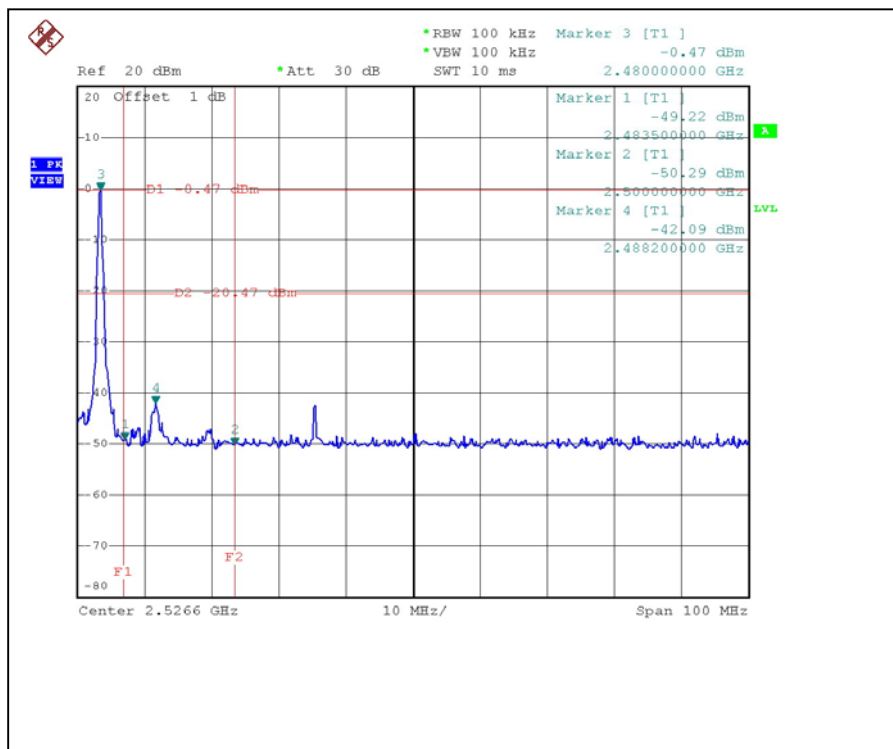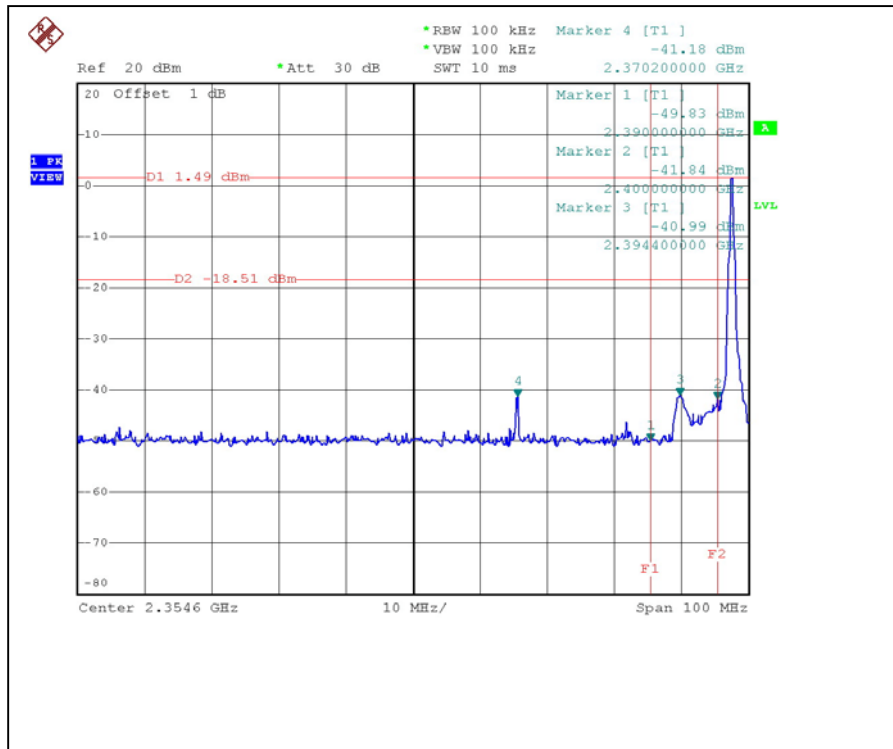

4.9 ANTENNA REQUIREMENT

4.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.9.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product are as following.

for Bluetooth
Patch antenna without connector / Gain : 0dBi
for GPS antenna
Active antenna with MMCX connector / Gain : 28dBi (only for test not for sale)

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST (Mode 1)



CONDUCTED EMISSION TEST (Mode 2)



RADIATED EMISSION TEST(Mode 1)



RADIATED EMISSION TEST (Mode 2)



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB, GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.