FCC Test Report (Part 1)

RF Exposure (EMF)

Test Report no.:	EMC_BO_002150 (v1.0)	**Date of Report:**	02-FEB-2018
Number of pages:	14	**Project support engineer:**	Frank Wittmann
Test period:	16.01.2018-18.01.2018		

Applicant:	Laird Dabendorf GmbH, Märkische Straße 72, 15806 Zossen, Germany, Mr. Heiko Dörschel		
Manufacturer:	Laird Dabendorf GmbH, Märkische Straße 72, 15806 Zossen, Germany		
EUT identification:	Laird, WCH-186 (WCH-186a, WCH-186b)		
FCC ID:	RK7186-00	**IC ID:**	4774A-18600

Testing laboratory:	Laird Bochum GmbH, Meesmannstr.103, 44807 Bochum, Germany			
	Tel.:	+49 234 51668-0		
	e-mail:	Product.Validation.Bochum@lairdtech.com		
	FCC designation no.:	DE0017	IC recognition no.:	7847A-1
	Laboratory manager:	Jürgen Mitterer		

Test result	The EUT complies with the requirements made in the referred test documents.

Approver:	Jürgen Mitterer	**Author:**	Frank Wittmann
Title:	Laboratory Manager	**Title:**	Senior EMC Test Engineer
Signature:		**Signature:**	

This test report may not be reproduced, except in full, without written permission of testing laboratory. The test result in this test report relates only to the tested sample, which is mentioned in this test report. Laird cannot be made responsible for any generalisations or conclusions drawn from this test report. Modification of the tested sample is prohibited and leads to invalidity of this test report.

Copyright © 2018 Laird. All rights reserved.

CONTENTS

1. SUMMARY FOR FCC PART 1 EMF TEST REPORT 3
1.1. EUT AND ACCESSORY INFORMATION 3
1.2. APPLIED STANDARDS 3
1.3. SUMMARY OF TEST RESULTS 3
1.4. MEASUREMENT UNCERTAINTIES 4
2. EMF TEST SETUP 5
3. RF EXPOSURE (EMF) 6
3.1. TEST METHOD AND LIMIT 6
3.2. TEST RESULTS H-FIELD (FCC, ISED) 8
3.3. TEST RESULTS E-FIELD (FCC, ISED) 11
4. TEST EQUIPMENT 14

Copyright © 2018 Laird. All rights reserved.

1. Summary for FCC Part 1 EMF test report

Date of receipt	16-JAN-2018
Testing completed	18-JAN-2018
The customer's contact person	Heiko Dörschel
Notes	none

1.1. EUT and accessory information

The EUT is an inductive wireless power transfer device (wireless charger) with load modulation operating at 111 kHz. In case of AM radio frequency interference in the car, the main WPT operating frequency at 111 kHz can be switched to 112 or 113 kHz. The highest output power is available at 111 kHz. The EUT is tested with a commercial available mobile phone with highest duty cycle of 100%.

Product	Type	SN	HW	MV	SW	DUT
Wireless charger unit	WCH-186b	000002B02F6B	H10	--	0050	DAB17146E
Power cable	--	--	--	--	--	DAB15193E
RF cable cellular	--	--	--	--	--	DAB16169E
RF cable NFC	--	--	--	--	--	DAB17003E
Mobile Phone	Galaxy S7	IMEI: 357810085825140	--	--	--	MPS7

1.2. Applied standards

Standard / Rule Part	Version
CFR 47, FCC Part 2	-
CFR 47, FCC Part 1	-
KDB 680106 D01	v02
ISED RSS-216	Issue 2
ISED RSS-102	Issue 5
SPR-002	Issue 1
Safety Code 6	2015

Deviations or clarifications to these standards are noted in the related test result under “test method and limit”.

1.3. Summary of test results

Section	Section in CFR 47	Section in RSS-102 / SC6	Name of the test	Result
3.2	1.1307(b), 1.1310	4 / 2.2.1	RF Exposure (H-field)	PASSED
3.3	1.1307(b), 1.1310	4 / 2.2.1	RF Exposure (E-field)	PASSED

PASSED: The EUT complies with the essential requirements in the standard.
FAILED: The EUT does not comply with the essential requirements in the standard.
NP: The test was not performed.
NA: The test was not applicable.

Copyright © 2018 Laird. All rights reserved.

1.4. Measurement uncertainties

Parameter	Worst Case Uncertainty	Max. Uncertainty
H-field probe 100 cm^2	3.33 %	< 30 %
H-field probe 3 cm^2	4.17 %	
H-field level tester	12.60 %	
E-field probe + level tester	20 %	

Copyright © 2018 Laird. All rights reserved.

2. EMF Test setup

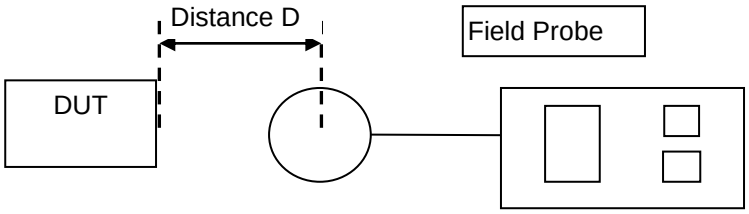

Copyright © 2018 Laird. All rights reserved.

3. RF Exposure (EMF)

EUT with DUT number	DAB17146E
Accessories with DUT numbers	MPS7, DAB15193E, DAB16069E, DAB17003E
Operation Voltage [V] / [Hz]	12 / DC
Result	PASSED
Remarks	None
Temp [°C] / Humidity [%RH]	21.2 / 31.0
Date of measurements	16-JAN-2018 to 18-Jan-2018
Measured by	Ralf Lange, Bhushan Pawar

3.1. Test method and limit

The DUT is working on the operating frequency (111 kHz) with the highest output power (worst case).

Measurement was made from all sides of the DUT in 10, 9, 8, 7, 6, 5, 4, 3 cm and lower distance (DUT edge to the center of probe), if possible.

The mobile phone was placed in the center of the charging area of each coil (left, middle, right), one after another.

Minimum distance between the primary coil in the DUT and the secondary coil in the mobile phone (best coupling).

Different probes were used for E- an H-field measurement.

The highest emission level was recorded.

Side definition for positioning of E- and H-field probe

Copyright © 2018 Laird. All rights reserved.

FCC limits for maximum permissible exposure

Frequency range [MHz]	Electric Field Strength Limit [V/m]	Magnetic Field Strength Limit [A/m]	Power Density [mW/cm²]	Average Time [minutes]
(B) Limits for General Population / Uncontrolled Exposures				
0.3 – 1.34	**614**	**1.63**	**100**	**30**
1.34 – 30	824 / $f_{[MHz]}$	2.19 / $f_{[MHz]}$	180 / $f_{[MHz]}^2$	30
30 – 300	27.5	0.073	0.2	30
300 – 1500			$f_{[MHz]}$ / 1500	30
1500 – 100000			1.0	30

Note1: According to DUT operating frequency and installation definition, the limit in bold letters (300 kHz) was applied.

ISED limits for maximum permissible exposure

Frequency range [MHz]	Electric Field Strength Limit [V/m]	Magnetic Field Strength Limit [A/m]	Power Density [W/m²]	Average Time [minutes]
RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)				
0.003 – 10	**83**	**90**	**-**	**Instantaneous**
0.1 – 10	**-**	**0.73 / $f_{[MHz]}$**	**-**	**6**
1.1 – 10	87 / $f_{[MHz]}^{0.5}$	-	-	6
10 – 20	27.46	0.0728	-2	6
20 – 48	58.07 / $f_{[MHz]}^{0.25}$	0.1540 / $f_{[MHz]}^{0.25}$	8.944 / $f_{[MHz]}^{0.5}$	6
48 – 300	22.06	0.05852	1.291	6
300 – 6000	3.142 $f_{[MHz]}^{0.3417}$	0.008335 $f_{[MHz]}^{0.3417}$	0.02619 $f_{[MHz]}^{0.6834}$	6
6000 – 15000	61.4	0.163	10	6
15000 – 150000	61.4	0.163	10	616000 / $f_{[MHz]}^{1.2}$
150000 – 300000	0.158 $f_{[MHz]}^{0.5}$	4.21 x 10^{-4} $f_{[MHz]}^{0.5}$	6.67 x 10^{-5} $f_{[MHz]}$	616000 / $f_{[MHz]}^{1.2}$

Note: According to DUT operating frequency and installation definition, the limit in bold letters was applied.

Copyright © 2018 Laird. All rights reserved.

3.2. Test results H-field (FCC, ISED)

3.2.1 H-field (left coil)

Detector: RMS, Mode: 320 µT, Range: normal, Low Cut: 10 Hz

Frequency [kHz]	Distance [cm]	Level Pos A [A/m]	Level Pos B [A/m]	Level Pos C [A/m]	Level Pos D [A/m]	Level Top [A/m]	FCC Limit [A/m]	ISED Limit [A/m]	Result
111	10	0.15	0.15	0.32	0.21	0.35	1.63	90 / 6.58	PASSED
111	9	0.18	0.18	0.40	0.24	0.43	1.63	90 / 6.58	PASSED
111	8	0.22	0.20	0.54	0.29	0.55	1.63	90 / 6.58	PASSED
111	7	0.28	0.36	0.75	0.37	0.72	1.63	90 / 6.58	PASSED
111	6	0.36	0.40	1.05	0.45	0.99	1.63	90 / 6.58	PASSED
111	5	0.70	0.45	1.27	0.59	1.29	1.63	90 / 6.58	PASSED
111	4.2	0.96	0.51	**1.63**	0.69	**1.63**	1.63	90 / 6.58	PASSED
111	4	1.01	0.53	NP	0.72	NP	1.63	90 / 6.58	PASSED
111	3.1	**1.63**	0.65	NP	0.90	NP	1.63	90 / 6.58	PASSED
111	3	NP	0.67	NP	0.93	NP	1.63	90 / 6.58	PASSED
111	2	NP	0.91	NP	1.25	NP	1.63	90 / 6.58	PASSED
111	1.6	NP	1.05	NP	1.49	NP	1.63	90 / 6.58	PASSED

Note1: Measurement values were transformed from µT to A/m, where 1 A/m = 1.256 µT
Note2: Measurements for distances 10, 9, 8, 7 and 6 cm were done with 100 cm^2 H-field probe
Note3: Measurements for distances 5, 4, 3 cm and lower were done with 3 cm^2 H-field probe
Note4: Result declaration relates only to the columns with measured values within each row
Note5: NP = Not Performed

Worst case position H-field probe (left coil, pos C, 4.2 cm)

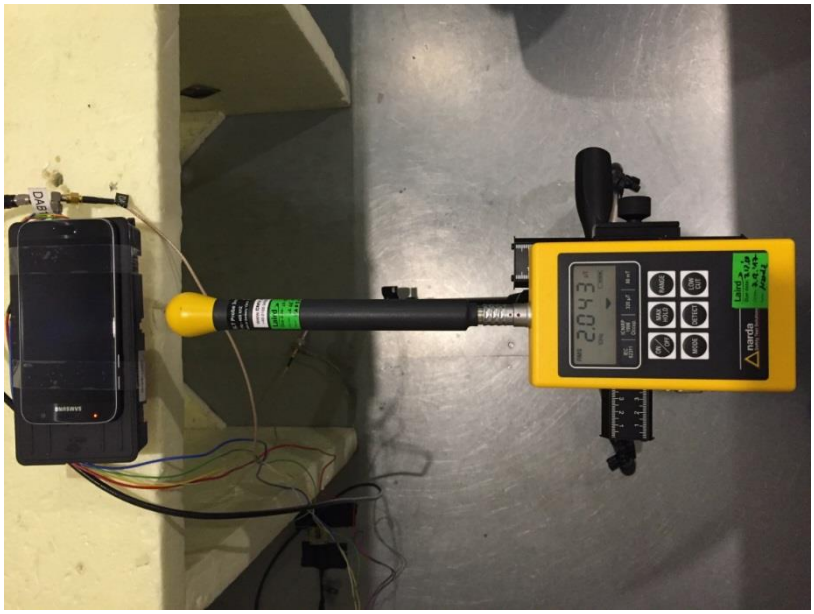

Copyright © 2018 Laird. All rights reserved.

3.2.2 H-field (mid coil)

Detector: RMS, Mode: 320 µT, Range: normal, Low Cut: 10 Hz

Frequency [kHz]	Distance [cm]	Level Pos A [A/m]	Level Pos B [A/m]	Level Pos C [A/m]	Level Pos D [A/m]	Level Top [A/m]	FCC Limit [A/m]	ISED Limit [A/m]	Result
111	10	0.08	0.16	0.18	0.10	0.22	1.63	90 / 6.58	PASSED
111	9	0.10	0.17	0.22	0.11	0.27	1.63	90 / 6.58	PASSED
111	8	0.12	0.20	0.29	0.13	0.36	1.63	90 / 6.58	PASSED
111	7	0.15	0.29	0.41	0.16	0.46	1.63	90 / 6.58	PASSED
111	6	0.20	0.29	0.55	0.20	0.63	1.63	90 / 6.58	PASSED
111	5	0.40	0.30	0.75	0.37	0.84	1.63	90 / 6.58	PASSED
111	4	0.56	0.31	1.11	0.42	1.18	1.63	90 / 6.58	PASSED
111	3.2	0.80	0.33	**1.63**	0.51	**1.63**	1.63	90 / 6.58	PASSED
111	3	0.90	0.33	NP	0.52	NP	1.63	90 / 6.58	PASSED
111	2	**1.63**	0.40	NP	0.68	NP	1.63	90 / 6.58	PASSED
111	1.6	NP	0.44	NP	0.77	NP	1.63	90 / 6.58	PASSED

Note1: Measurement values were transformed from µT to A/m, where 1 A/m = 1.256 µT
Note2: Measurements for distances 10, 9, 8, 7 and 6 cm were done with 100 cm^2 H-field probe
Note3: Measurements for distances 5, 4, 3 cm and lower were done with 3 cm^2 H-field probe
Note4: Result declaration relates only to the columns with measured values within each row
Note5: NP = Not Performed

Worst case position H-field probe (mid coil, pos C, 3.2 cm)

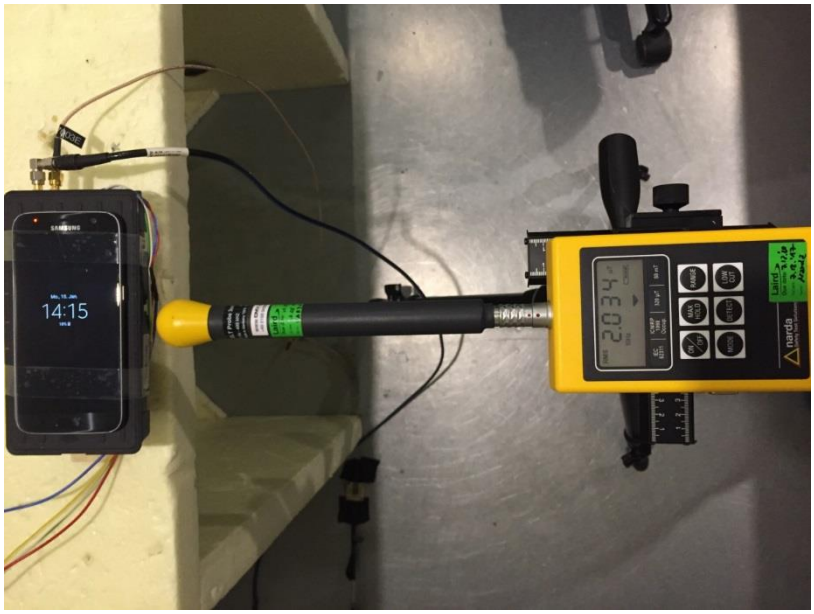

Copyright © 2018 Laird. All rights reserved.

3.2.3 H-field (right coil)

Detector: RMS, Mode: 320 µT, Range: normal, Low Cut: 10 Hz

Frequency [kHz]	Distance [cm]	Level Pos A [A/m]	Level Pos B [A/m]	Level Pos C [A/m]	Level Pos D [A/m]	Level Top [A/m]	FCC Limit [A/m]	ISED Limit [A/m]	Result
111	10	0.20	0.23	0.25	0.20	0.38	1.63	90 / 6.58	PASSED
111	9	0.24	0.28	0.31	0.23	0.47	1.63	90 / 6.58	PASSED
111	8	0.30	0.32	0.40	0.28	0.61	1.63	90 / 6.58	PASSED
111	7	0.40	0.38	0.54	0.34	0.80	1.63	90 / 6.58	PASSED
111	6	0.53	0.41	0.75	0.43	1.05	1.63	90 / 6.58	PASSED
111	5	0.84	0.46	1.03	0.59	1.34	1.63	90 / 6.58	PASSED
111	4.3	1.07	0.50	1.37	0.68	**1.63**	1.63	90 / 6.58	PASSED
111	4	1.21	0.53	1.52	0.72	NP	1.63	90 / 6.58	PASSED
111	3.8	1.31	0.56	**1.63**	0.76	NP	1.63	90 / 6.58	PASSED
111	3.3	**1.63**	0.61	NP	0.88	NP	1.63	90 / 6.58	PASSED
111	3	NP	0.63	NP	0.96	NP	1.63	90 / 6.58	PASSED
111	2	NP	0.78	NP	1.34	NP	1.63	90 / 6.58	PASSED
111	1.6	NP	0.86	NP	1.57	NP	1.63	90 / 6.58	PASSED

Note1: Measurement values were transformed from µT to A/m, where 1 A/m = 1.256 µT
Note2: Measurements for distances 10, 9, 8, 7 and 6 cm were done with 100 cm^2 H-field probe
Note3: Measurements for distances 5, 4, 3 cm and lower were done with 3 cm^2 H-field probe
Note4: Result declaration relates only to the columns with measured values within each row
Note5: NP = Not Performed

Worst case position H-field probe (right coil, top, 4.3 cm)

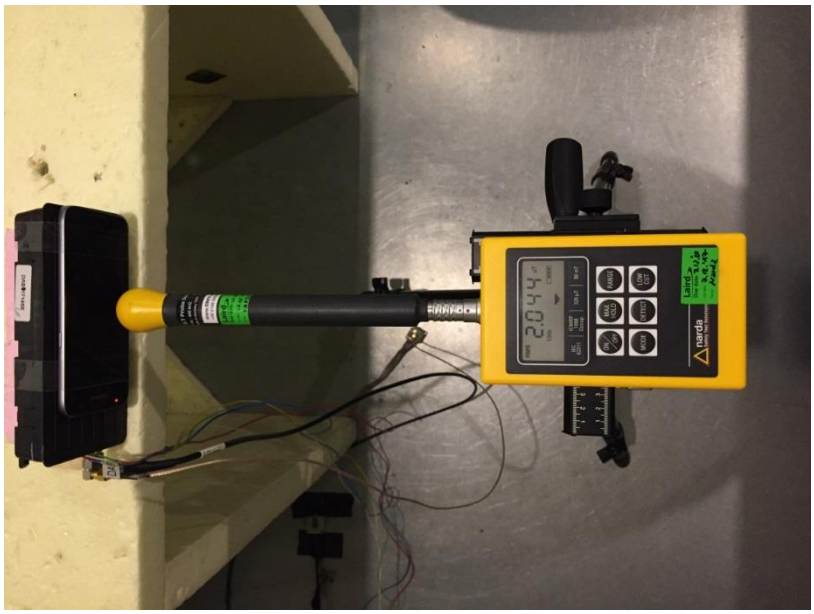

Copyright © 2018 Laird. All rights reserved.

3.3. Test results E-field (FCC, ISED)

3.3.1 E-field (left coil)

Detector: AVRG, Mode: V/m

Frequency [kHz]	Distance [cm]	Level Pos A [V/m]	Level Pos B [V/m]	Level Pos C [V/m]	Level Pos D [V/m]	Level Top [V/m]	FCC Limit [V/m]	ISED Limit [V/m]	Result
111	10	0.50	0.40	0.65	0.39	0.89	614	83	PASSED
111	9	0.56	0.48	0.81	0.43	1.06	614	83	PASSED
111	8	0.65	0.57	1.02	0.49	1.29	614	83	PASSED
111	7	0.79	0.62	1.30	0.56	1.57	614	83	PASSED
111	6	0.97	0.79	1.68	0.70	1.93	614	83	PASSED
111	5	1.23	1.05	2.26	0.91	**2.43**	614	83	PASSED
111	4	1.54	1.56	**3.37**	1.25	NP	614	83	PASSED

Note1: Measurements for distances 10, 9, 8, 7, 6, 5 and 4 cm were done with the E-field probe
Note2: Result declaration relates only to the columns with measured values within each row
Note3: NP = Not Performed

Worst case position E-field probe (left coil, pos C, 4 cm)

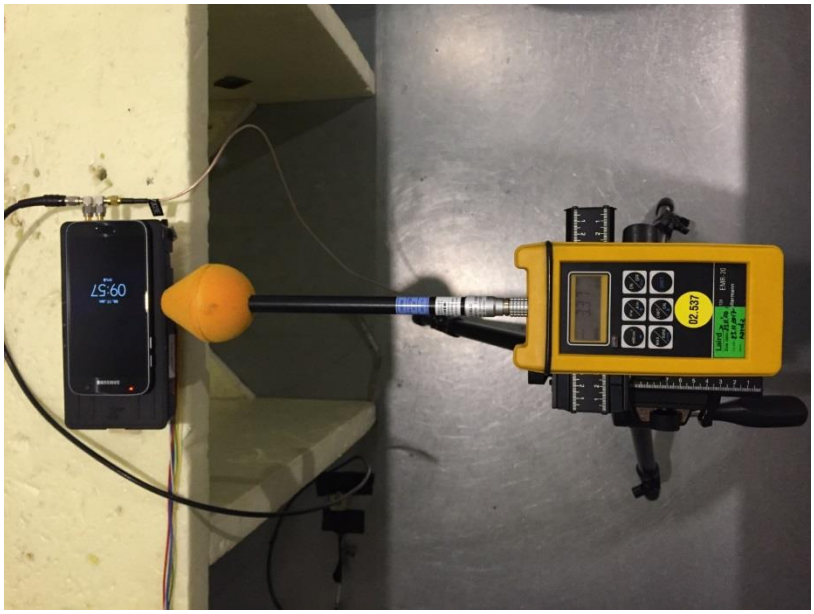

Copyright © 2018 Laird. All rights reserved.

3.3.2 E-field (mid coil)

Detector: AVRG, Mode: V/m

Frequency [kHz]	Distance [cm]	Level Pos A [V/m]	Level Pos B [V/m]	Level Pos C [V/m]	Level Pos D [V/m]	Level Top [V/m]	FCC Limit [V/m]	ISED Limit [V/m]	Result
111	10	0.42	0.35	0.59	0.35	0.72	614	83	PASSED
111	9	0.53	0.39	0.68	0.37	0.87	614	83	PASSED
111	8	0.61	0.47	0.79	0.43	1.04	614	83	PASSED
111	7	0.72	0.51	0.96	0.57	1.28	614	83	PASSED
111	6	0.86	0.56	1.28	0.72	1.59	614	83	PASSED
111	5	1.08	0.70	1.82	0.94	**1.98**	614	83	PASSED
111	4	1.43	0.96	**2.72**	1.31	NP	614	83	PASSED

Note1: Measurements for distances 10, 9, 8, 7, 6, 5 and 4 cm were done with the E-field probe
Note2: Result declaration relates only to the columns with measured values within each row
Note3: NP = Not Performed

Worst case position E-field probe (mid coil, pos C, 4 cm)

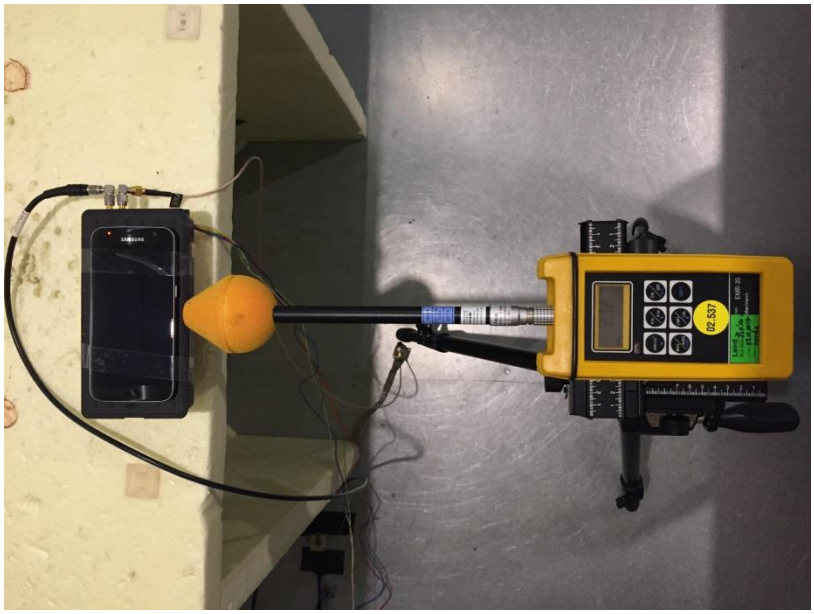

Copyright © 2018 Laird. All rights reserved.

3.3.3 E-field (right coil)

Detector: AVRG, Mode: V/m

Frequency [kHz]	Distance [cm]	Level Pos A [V/m]	Level Pos B [V/m]	Level Pos C [V/m]	Level Pos D [V/m]	Level Top [V/m]	FCC Limit [V/m]	ISED Limit [V/m]	Result
111	10	0.52	0.37	1.15	1.19	2.06	614	83	PASSED
111	9	0.59	0.44	1.35	1.37	2.34	614	83	PASSED
111	8	0.74	0.49	1.62	1.70	2.66	614	83	PASSED
111	7	0.81	0.53	1.98	2.00	3.05	614	83	PASSED
111	6	0.95	0.64	2.48	2.41	3.47	614	83	PASSED
111	5	1.18	0.84	3.34	2.97	**4.04**	614	83	PASSED
111	4	1.45	1.16	**4.85**	3.82	NP	614	83	PASSED

Note1: Measurements for distances 10, 9, 8, 7, 6, 5 and 4 cm were done with the E-field probe
Note2: Result declaration relates only to the columns with measured values within each row
Note3: NP = Not Performed

Worst case position E-field probe (right coil, pos C, 4 cm)

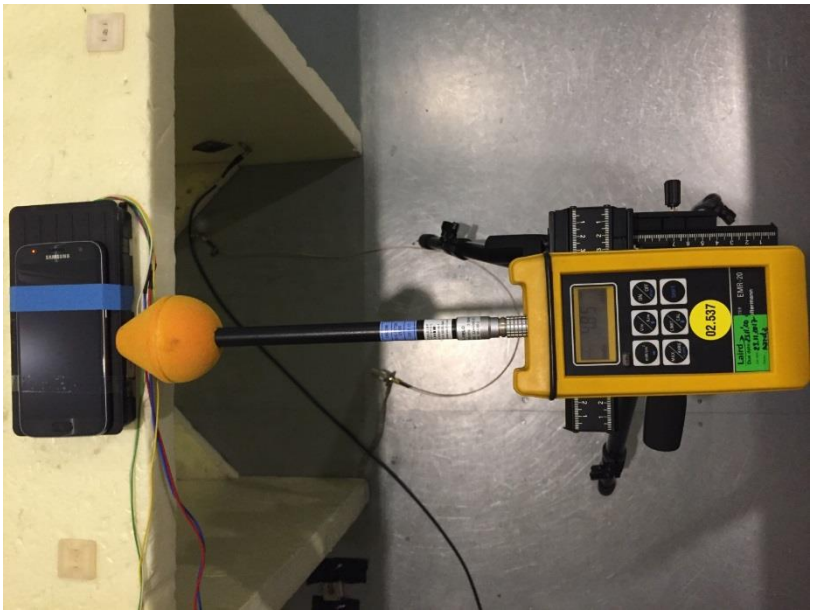

Copyright © 2018 Laird. All rights reserved.

4. Test Equipment

Equipment	Manufacturer	Type	Serial No.	Actual Calibration	Next Calibration
Exposure Level Tester	Narda Safety Test Solutions GmbH	ELT-400	N-0385	07.12.2017	07.12.2020
H-field Probe 3 cm^2	Narda Safety Test Solutions GmbH	2300/90.20	C-0150	20.05.2015	20.05.2018
H-Field Probe 100 cm^2	Narda Safety Test Solutions GmbH	Probe	M-0823	07.12.2017	07.12.2020
Field Analyzer	Wandel & Goltermann	EMR20	P-0030	23.11.2017	23.11.2020
Isotropic Electric Field Probe	Wandel & Goltermann	Type 8	M-0082	23.11.2017	23.11.2020

Copyright © 2018 Laird. All rights reserved.