

TEST REPORT

Test report no.: 1-0701-25-01-05_TR1-R01



Deutsche
Akkreditierungsstelle
D-PL-12047-01-00

Testing laboratory

cetecom advanced GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://cetecomadvanced.com>

e-mail: mail@cetecomadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS).

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number:

D-PL-12047-01-00.

ISED Testing Laboratory Recognized Listing Number: DE0001

FCC designation number: DE0002

Applicant

Molex Technologies GmbH

Mizarstraße 3

12529 Schönefeld / GERMANY

Phone: +49 3377 316 0

Contact: Ines Baufeld

e-mail: ines.baufeld@molex.com

Manufacturer

Molex Technologies GmbH

Mizarstraße 3

12529 Schönefeld / GERMANY

Test standard/s

FCC - Title 47 CFR Part 15 FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - Gen Issue 5 incl. Spectrum Management and Telecommunications Radio Standards Specification
Amendment 1 & 2 - Wireless Power Transfer Devices

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: **Wireless Charger**
Model name: **WCH-PF31d**
FCC ID: **RK7WCH-PF31D**
ISED certification number: **4774A-WCHPF31D**
Frequency: 127.55 kHz; 360 kHz
Technology tested: WPT
Antenna: Integrated antenna
Power supply: 9.0 V to 16.0 V DC by car battery
Temperature range: -40°C to +55°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

cn=Joachim Wolsdorfer, o=cetecom
advanced GmbH, ou=WLD-230605,
email=joachim.wolsdorfer@cetecomadva
nced.com, c=DE
2026.03.02 11:37:26 +01'00'

Joachim Wolsdorfer
Lab Manager
Radio Labs

Test performed:

cn=Tobias Wittenmeier, o=cetecom advanced
GmbH, ou=WIT-230601,
email=tobias.wittenmeier@cetecomadvanced
.com, c=DE
2026.03.02 11:10:04 +01'00'

Tobias Wittenmeier
Testing Manager
Radio Labs

1 Table of contents

1	Table of contents.....	2
2	General information.....	3
2.1	Notes and disclaimer.....	3
2.2	Application details.....	3
2.3	Test laboratories sub-contracted.....	3
3	Test standard/s, references and accreditations.....	4
4	Reporting statements of conformity – decision rule	5
5	Test environment.....	6
6	Test item.....	6
6.1	General description	6
6.2	Additional information.....	6
7	Description of the test setup	7
7.1	Shielded semi anechoic chamber.....	8
7.2	Shielded fully anechoic chamber	10
7.3	Conducted measurements normal and extreme conditions.....	11
8	Sequence of testing.....	12
8.1	Sequence of testing radiated spurious 9 kHz to 30 MHz.....	12
9	Measurement uncertainty	13
10	Summary of measurement results	14
11	Additional comments	14
12	Measurement results	15
12.1	Occupied bandwidth.....	15
12.2	Frequency stability.....	17
12.3	Field strength of the fundamental.....	18
12.4	Field strength of the harmonics and spurious	20
13	Observations.....	30
14	Glossary.....	31
15	Document history	32

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. cetecom advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced GmbH.

The testing service provided by cetecom advanced GmbH has been rendered under the current "General Terms and Conditions for cetecom advanced GmbH".

cetecom advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced GmbH test report include or imply any product or service warranties from cetecom advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced GmbH.

All rights and remedies regarding vendor's products and services for which cetecom advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2025-09-03
Date of receipt of test item:	2025-11-17
Start of test:*	2025-11-19
End of test:*	2025-12-08
Person(s) present during the test:	-/-

*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

2.3 Test laboratories sub-contracted

None

3 Test standard/s, references and accreditations


Test standard	Date	Description
FCC - Title 47 CFR Part 15		FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 216 Issue 3	2024-09	Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment
RSS - Gen Issue 5 incl. Amendment 1 & 2	February 2021	Spectrum Management and Telecommunications Radio Standards Specification - Wireless Power Transfer Devices
Guidance	Version	Description
ANSI C63.4a-2017	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2020	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.10-2020- Cor. 01-2023	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices Corrigendum 1
ANSI C63.10-2020- Amd 2024	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices Amendment 1

4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

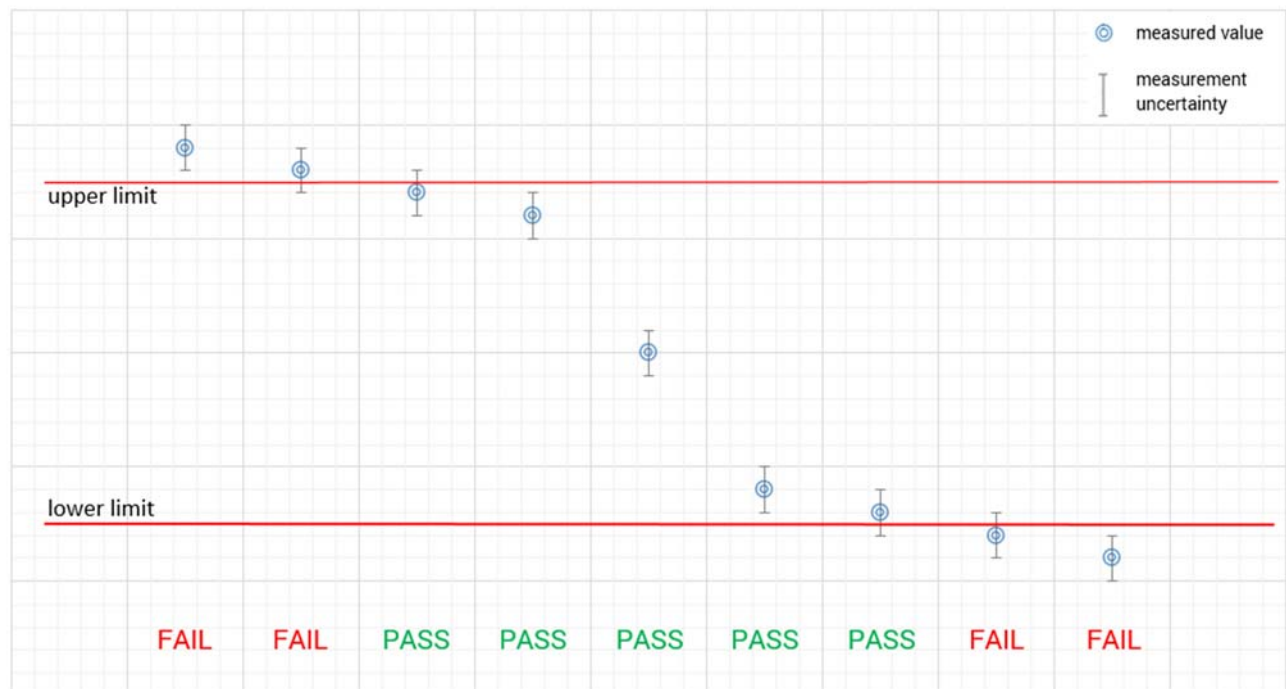

5 Test environment

Temperature	:	T_{nom} T_{max} T_{min}	+22 °C during room temperature tests +55 °C during high temperature tests -40 °C during low temperature tests
Relative humidity content	:		55 %
Barometric pressure	:		1021 hpa
Power supply	:	V_{nom} V_{max} V_{min}	12.0 V DC by car battery 16.0 V 9.0 V

6 Test item

6.1 General description

Kind of test item	:	Wireless Charger
Model name	:	WCH-PF31d
HMN	:	-/-
PMN	:	WCH-PF31d
HVIN	:	WCH-312a
FVIN	:	-/-
S/N serial number	:	17.10.20256319
Hardware status	:	CH 01
Software status	:	CS 01
Firmware status	:	-/-
Frequency band	:	127.55 kHz ; 360 kHz
Type of radio transmission	:	Clean carrier (charging)
Use of frequency spectrum	:	
Type of modulation	:	PSK
Number of channels	:	-/-
Antenna	:	Integrated antenna
Power supply	:	9.0 V to 16.0 V DC by car battery
Temperature range	:	-40°C to +55°C

6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

1-0701-25-01-01_TR1-A101-R01
1-0701-25-01-01_TR1-A102-R01
1-0701-25-01-01_TR1-A103-R01

7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).


Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

Agenda: Kind of Calibration

k/cal	calibration / calibrated	EK	limited calibration
Ne/cnn	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
Ev/chk	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress
cpu	check prior usage		

7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

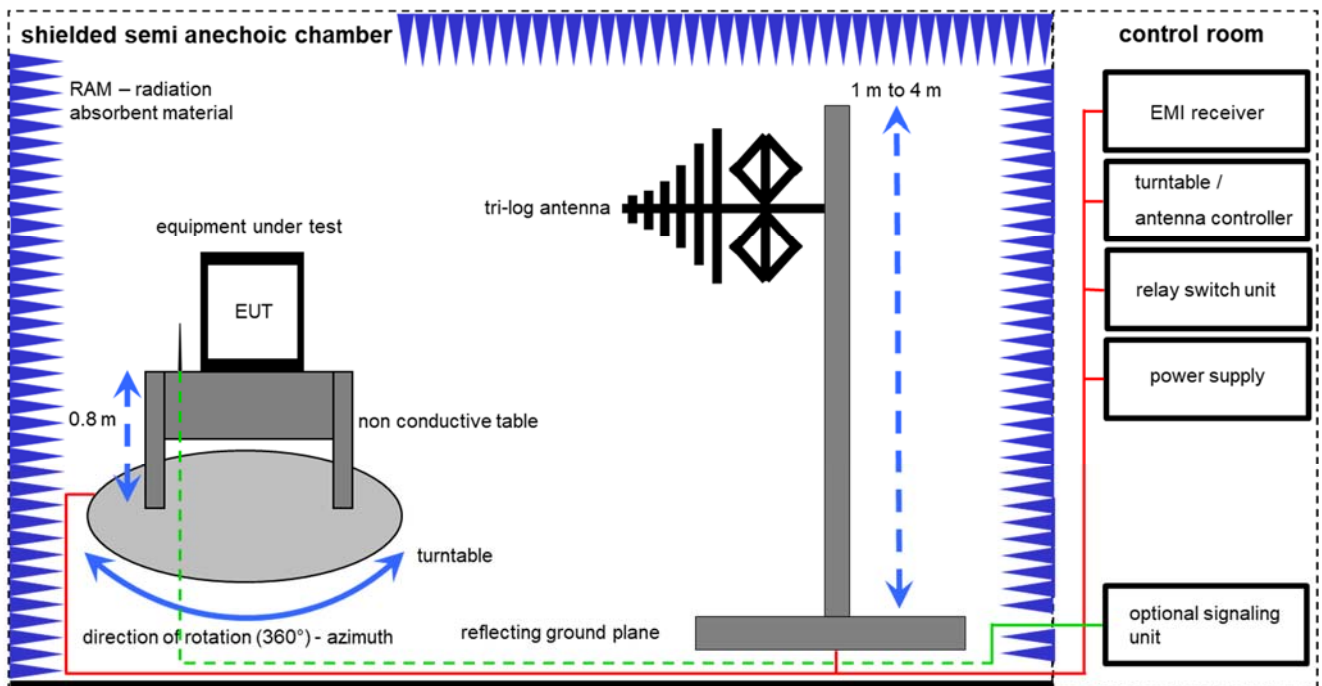

Measurement distance: tri-log antenna 10 meter
EMC32 software version: 10.59.00

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 12.35 [dB\mu V] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] \quad (35.69 \mu V/m) @ \text{distance}$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Semi anechoic chamber	Semi anechoic chamber 3000023	MEC Import: MWB AG		40797	cnn	-/-	-/-
2	A	TRILOG Broadband Antenna	TRILOG Broadband Antenna VULB9163	Schwarzbeck Mess-Elektronik OHG / Schönau	371	40798	cal	11.07.2024	11.07.2026
3	A	Turntable	Turntable 2089-4.0	EMCO Elektronik GmbH / Gilching		40799	cnn	-/-	-/-
4	A	Analyzer-Impedence-System	Analyzer-Impedence-System AIS16/1	MEC Import: Spitzenberger + Spies GmbH & Co. KG	U02076 07/0 1023	40808	cal	19.10.2025	31.10.2027
5	A	Switch-Unit	Switch-Unit 3488A	Hewlett Packard	2719A14505	50160	cpu	-/-	-/-
6	A	Power Supply	Power Supply 6032A	Hewlett Packard	2920A04466	50161	cnn	-/-	-/-
7	A	TRILOG Broadband Antenna	TRILOG Broadband Antenna VULB9163	Schwarzbeck Mess-Elektronik OHG / Schönau	216	50226	cal	30.08.2025	31.08.2027
8	A	Antenna Tower	Antenna Tower 2175	ETS-Lindgren GmbH / Taufkirchen	64762	50279	cnn	-/-	-/-
9	A	Positioning Controller	Positioning Controller 2090	ETS-Lindgren GmbH / Taufkirchen	64672	50280	cnn	-/-	-/-
10	A	EMI Test Receiver	EMI Test Receiver ESR3	Rohde & Schwarz Messgerätebau GmbH / Memmingen	102587	50417	cal	05.12.2024	05.12.2025

7.2 Shielded fully anechoic chamber

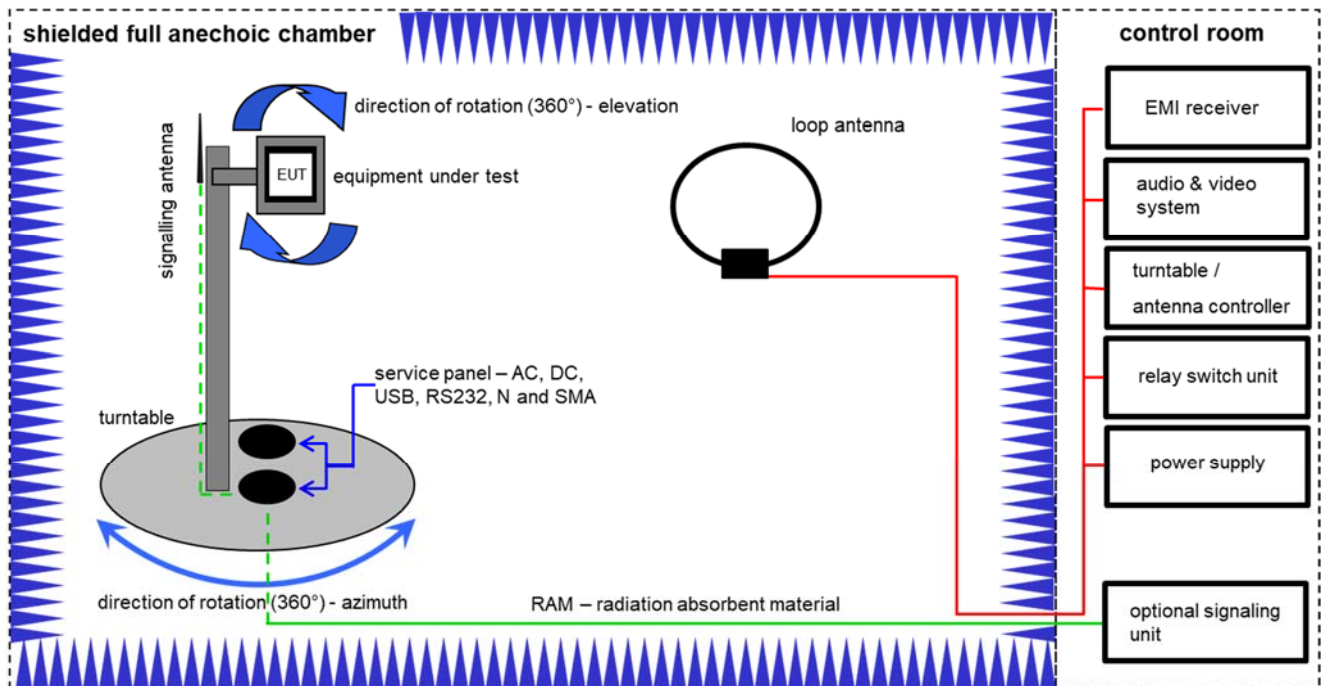

Measurement distance: loop antenna 3 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 40.0 [dB\mu V] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB\mu V/m] (71.61 \mu V/m) @ distance$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev	-/-	-/-
2	A	EMI Test Receiver 20Hz- 26,5GHz	ESU26	R&S	100037	300003555	k	11.12.2024	31.12.2025
3	A	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne	-/-	-/-
4	A	NEXIO EMV-Software	BAT EMC V2022.0.32.0	Nexio		300004682	ne	-/-	-/-
5	A	Active Loop Antenna	Active Loop Antenna 6502	EMCO Elektronik GmbH / Gilching	2210	50044	cal	07.07.2025	07.07.2027
6	A	Power Supply	Power Supply HMP2020	Rohde & Schwarz Messgerätebau GmbH / Memmingen	120579	40408	cal	02.05.2023	31.05.2026
7	A	Switch / Control Unit	Switch / Control Unit 3488A	Hewlett Packard	*	40350	cnn	-/-	-/-

7.3 Conducted measurements normal and extreme conditions

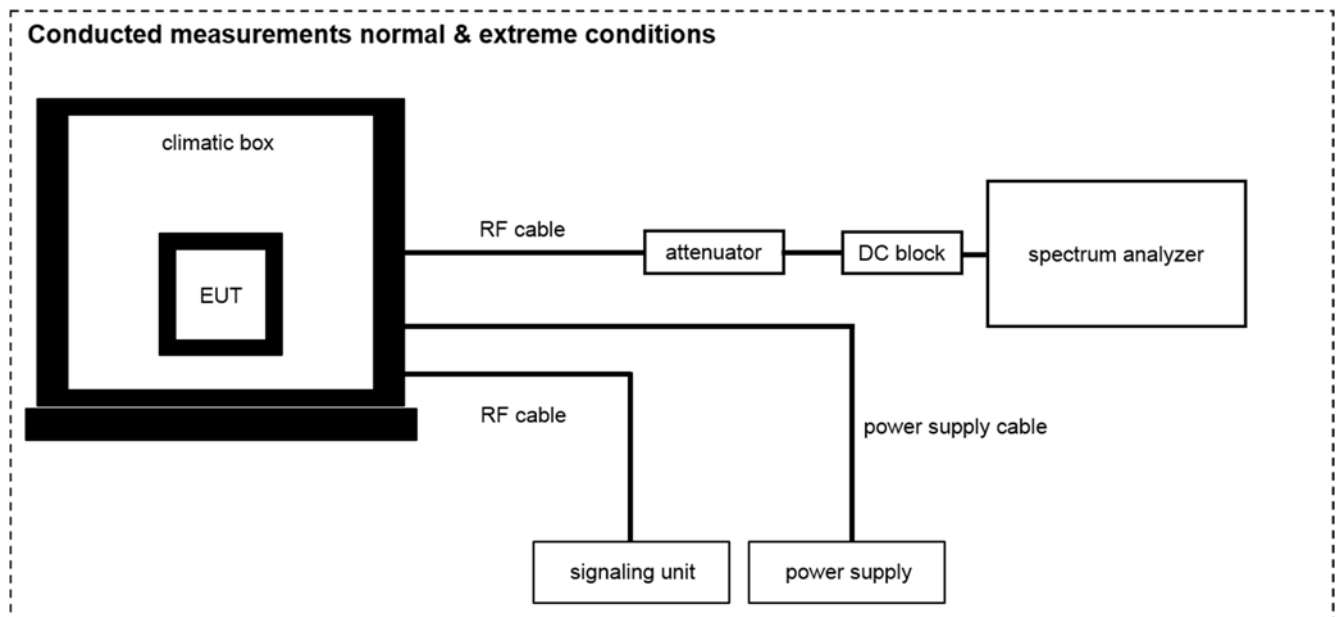

OP = AV + CA
 (OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A,B	Signal analyzer	Signal analyzer FSW26	Rohde & Schwarz Messgerätebau GmbH / Memmingen	101455	40114	cal	09.12.2025	09.12.2026
2	A,B	Loop Antenna	Loop Antenna	MEC Import: ZEG TS Steinfurt		40841	cpu	-/-	-/-
3	A,B	Power Supply	Power Supply HMP2020	Rohde & Schwarz Messgerätebau GmbH / Memmingen	101961	40846	cal	05.12.2024	05.12.2026
4	B	Temperature Test Chamber	Temperature Test Chamber VT 4011	Vötsch Industrietechnik GmbH, a schunk company / Balingen-Frommern	58566230600 010	50404	calchk	11.07.2024	11.07.2026

8 Sequence of testing

8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

*)Note: The sequence will be repeated three times with different EUT orientations.

9 Measurement uncertainty

Measurement uncertainty	
Test case	Uncertainty
Frequency measurements	$\pm$ RBW
Maximum field strength	$\pm$ 3 dB
Spurious emissions radiated below 30 MHz	$\pm$ 3 dB
Spurious emissions radiated 30 MHz to 1 GHz	$\pm$ 3 dB
Spurious emissions conducted below 30 MHz (AC conducted)	$\pm$ 2.6 dB

10 Summary of measurement results

☒	No deviations from the technical specifications were ascertained
☐	There were deviations from the technical specifications ascertained
☐	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 216 Issue 3 RSS Gen Issue 5	See table!	2026-03-02	-/-

Test specification clause	Test case	Temperature conditions	Power source conditions	C	NC	NA	NP	Remark
RSS Gen Issue 5 (6.6)	Occupied bandwidth	Nominal	Nominal	☒	☐	☐	☐	-/-
§ 15.209 RSS 216 Issue 3 (5.3)	Field strength of the fundamental	Nominal	Nominal	☒	☐	☐	☐	-/-
RSS 216 Issue 3 (5.5)	Frequency stability	extreme	extreme	☒	☐	☐	☐	-/-
§ 15.209 RSS Gen Issue 5 (6.13)	Field strength of the harmonics and spurious	Nominal	Nominal	☒	☐	☐	☐	-/-
§15.107 §15.207	Conducted limits	Nominal	Nominal	☐	☐	☒	☐	Car battery operated

Note: C = Complies; NC = Not complies; NA = Not applicable; NP = Not performed

11 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: EUT classification: Type 3

12 Measurement results

12.1 Occupied bandwidth

Measurement:

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

Measurement parameters	
Detector:	Peak
Resolution bandwidth:	1 % – 5 % of the occupied bandwidth
Video bandwidth:	≥ 3x RBW
Trace mode:	Max hold
Analyser function:	99 % power function
Used test setup:	See sub clause 7.2 A
Measurement uncertainty:	See sub clause 9



Limit:

ISED
for RSP-100 test report coversheet only

Result:

99% emission bandwidth, 128 kHz
3.9 kHz

99% emission bandwidth, 360 kHz
11.8 kHz

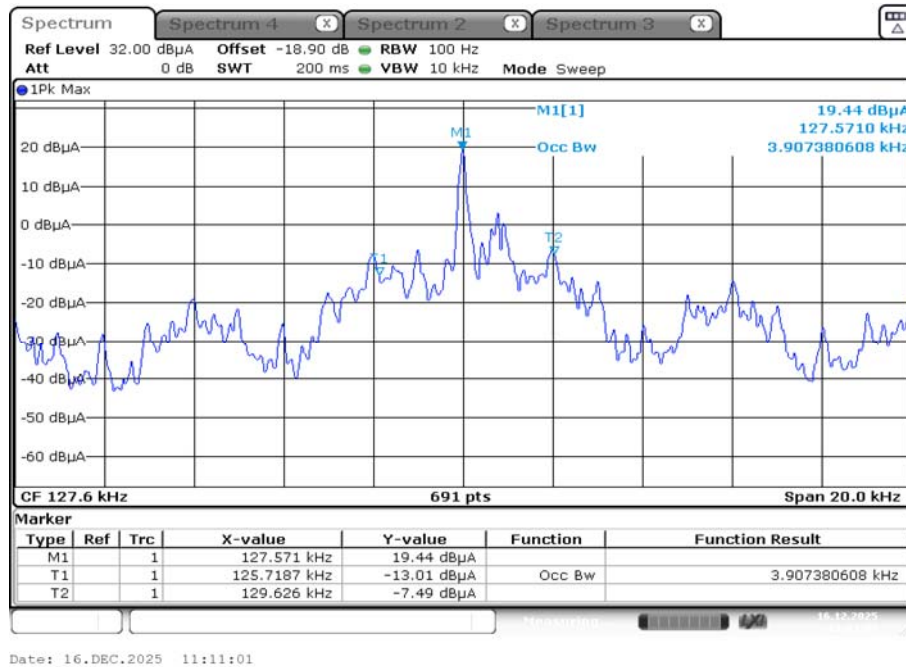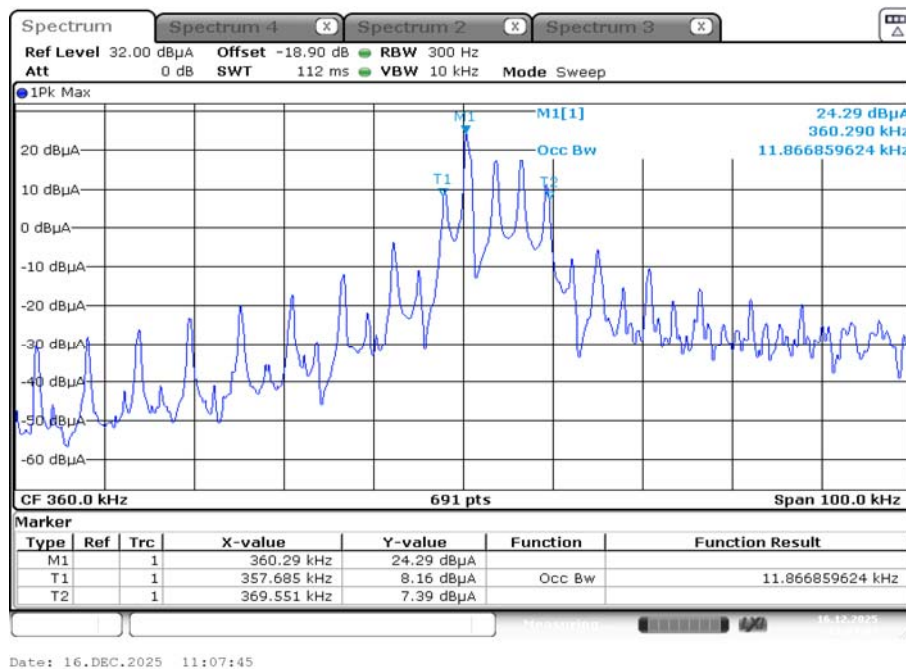Plots:**Plot 1:** 99 % emission bandwidth, 127.55 kHz**Plot 2:** 99 % emission bandwidth, 360 kHz

12.2 Frequency stability

Measurement:

The maximum detected field strength for the spurious. Measurement performed according to ANSI C63.30, chapter 6.8

Measurement parameters	
Detector:	Peak detector
Resolution bandwidth:	5 Hz
Video bandwidth:	> RBW
Trace mode:	max hold
Used equipment:	see chapter 7.2 B
Measurement uncertainty:	see chapter 9

ISED
The frequency stability requirements with respect to ambient temperature specified in subclause 10.4.2 of ANSI C63.30-2021 shall apply only for WPT source devices intended for outdoor operation. This test shall be performed at the rated power supply voltage and for three ambient temperatures: -20°C, +20°C and +50°C The frequency stability with respect to power supply voltage shall apply to all WPT source devices.

Result: Temperature/ voltage variation

Frequency stability 127.55 kHz		
Measured frequency	Frequency error related to normal conditions	Conditions
127.5894 kHz	0.0 ppm	+20 °C & 9 V DC
127.5894 kHz	-/-	+20 °C & 12 VDC
127.5894 kHz	0.0 ppm	+20 °C & 16 V DC
127.5924 kHz	+31.4 ppm	-20 °C & 12 VDC
127.5874 kHz	-15.7 ppm	+50 °C & 12 VDC

Frequency stability 360 kHz		
Measured frequency	Frequency error related to normal conditions	Conditions
360.3540 kHz	0.0 ppm	+20 °C & 9 V DC
360.3540 kHz	-/-	+20 °C & 12 VDC
360.3530 kHz	-2.8 ppm	+20 °C & 16 V DC
360.3650 kHz	+30.5 ppm	-20 °C & 12 VDC
360.3470 kHz	-19.4 ppm	+50 °C & 12 VDC

12.3 Field strength of the fundamental

Measurement:

The maximum detected field strength for the carrier signal.

Measurement parameters	
Detector:	average
Resolution bandwidth:	200 Hz / 9kHz
Video bandwidth:	≥ 3x RBW
Trace mode:	Max hold
Used test setup	See sub clause 7.1 A
Measurement uncertainty:	See sub clause 9

Limit:

FCC			
Frequency (MHz)	Field strength / (μV/m)	Limit	Measurement distance
0.009 – 0.490	2400 / F/kHz	19.1 μV/m 25.6 dBμV/m @ 126 kHz	300 m
0.009 – 0.490	2400 / F/kHz	6.7 μV/m 16.5 dBμV/m @ 360 kHz	300 m

ISED			
Frequency (MHz)	Field strength / (dBμA/m)	Limit	Measurement distance
0.07 – 0.15 MHz	69 to 39	45.8 dBμA/m @ 126 kHz	3 m
0.15 – 30 MHz	39 to 7	33.7 dBμA/m @ 360 kHz	3 m

Recalculation:

According to ANSI C63.10		
Frequency	Formula	Correction value
127.55 kHz	$FS_{limit} = FS_{max} - 40 \log \left(\frac{d_{nearfield}}{d_{measure}} \right) - 20 \log \left(\frac{d_{limit}}{d_{nearfield}} \right)$ FS_{limit} is the calculation of field strength at the limit distance, expressed in dBμV/m FS_{max} is the measured field strength, expressed in dBμV/m $d_{nearfield}$ is the $\lambda/2\pi$ distance $d_{measure}$ is the distance of the measurement point from EUT d_{limit} is the reference limit distance	-82 dB from 3m to 300m

According to ANSI C63.10		
Frequency	Formula	Correction value
360 kHz	$FS_{limit} = FS_{max} - 40 \log \left(\frac{d_{nearfield}}{d_{measure}} \right) - 20 \log \left(\frac{d_{limit}}{d_{nearfield}} \right)$ FS_{limit} is the calculation of field strength at the limit distance, expressed in dBμV/m FS_{max} is the measured field strength, expressed in dBμV/m $d_{nearfield}$ is the $\lambda/2\pi$ distance $d_{measure}$ is the distance of the measurement point from EUT d_{limit} is the reference limit distance	-72.9 dB from 3m to 300m

Result:

Field strength of the fundamental		
frequency	125.35 kHz	
distance	@ 3 m	@ 300 m
measured / recalculated value	+75.7 dB μ V/m*	-6.3 dB μ V/m
measured value	+25.5 dB μ A/m*	-56.5 dB μ A/m

Field strength of the fundamental		
frequency	126.55 kHz	
distance	@ 3 m	@ 300 m
measured / recalculated value	+75.1 dB μ V/m*	-6.9 dB μ V/m
measured value	+24.5 dB μ A/m*	-57.5 dB μ A/m

Field strength of the fundamental		
frequency	127.55 kHz	
distance	@ 3 m	@ 300 m
measured / recalculated value	+75.6 dB μ V/m*	-6.4 dB μ V/m
measured value	+23.3 dB μ A/m*	-58.7 dB μ A/m

Field strength of the fundamental		
frequency	128.55 kHz	
distance	@ 3 m	@ 300 m
measured / recalculated value	+76.2 dB μ V/m*	-5.8 dB μ V/m
measured value	+24.8 dB μ A/m*	-57.2 dB μ A/m

Field strength of the fundamental		
frequency	129.75 kHz	
distance	@ 3 m	@ 300 m
measured / recalculated value	+75.7 dB μ V/m*	-6.3 dB μ V/m
measured value	+24.7 dB μ A/m*	-57.3 dB μ A/m

Field strength of the fundamental		
frequency	360 kHz	
distance	@ 3 m	@ 300 m
measured / recalculated value	71.9 dB μ V/m*	-1.0 dB μ V/m
measured value	19.3 dB μ A/m*	-53.6 dB μ A/m

*Values measured with two equal dummy loads under fully charging power (worst case scenario).

12.4 Field strength of the harmonics and spurious

Measurement:

The maximum detected field strength for the harmonics and spurious.

Measurement parameters	
Detector:	Quasi peak / average or peak (worst case – pre-scan)
Resolution bandwidth:	F < 150 kHz: 200 Hz 150 kHz < F < 30 MHz: 9 kHz 30 MHz < F < 1 GHz: 120 kHz
Video bandwidth:	F < 150 kHz: 1 kHz 150 kHz < F < 30 MHz: 100 kHz 30 MHz < F < 1 GHz: 300 kHz
Trace mode:	Max hold
Used test setup:	9 kHz to 30 MHz: see sub clause 7.1A
Measurement uncertainty:	See sub clause 9



Limit:

FCC		
Frequency (MHz)	Field strength (dBμV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30 (29.5 dBμV/m)	30
30 – 88	100 (40 dBμV/m)	3
88 – 216	150 (43.5 dBμV/m)	3
216 – 960	200 (46 dBμV/m)	3


ISED		
Frequency (MHz)	Field strength (dBμA/m)	Measurement distance (m)
0.009 – 0.07	69	3
0.07 – 0.15	69 to 39	3
0.15 – 30	39 to 7	3

Result:


Detected emissions (both frequencies)			
Frequency (MHz)	Detector	Resolution bandwidth (kHz)	Detected value
No emissions detected.			

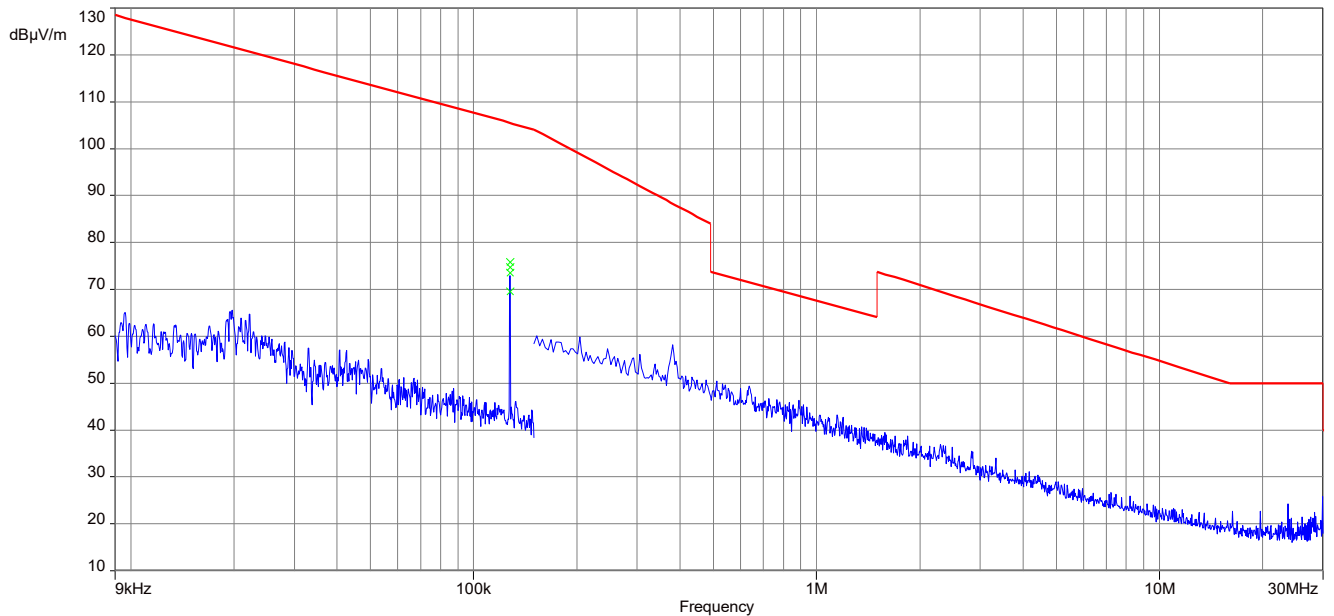
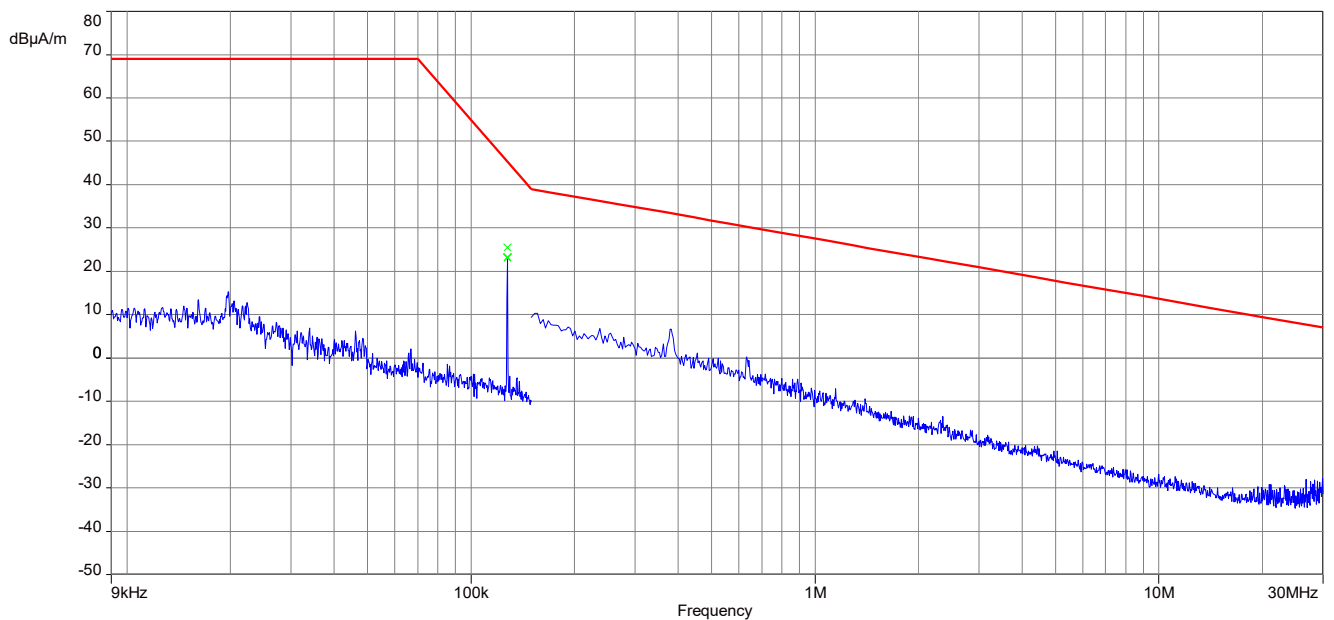
Plots:**Plot 1:** 9 kHz – 30 MHz, magnetic spurious emissions FCC, 125.35 kHz, 2*15W dummy load charging mode**Plot 2:** 9 kHz – 30 MHz, magnetic spurious emissions ISED, 125.35 kHz, 2*15W dummy load charging mode



Plot 3: 9 kHz – 30 MHz, magnetic spurious emissions FCC, 126.55 kHz, 2*15W dummy load charging mode


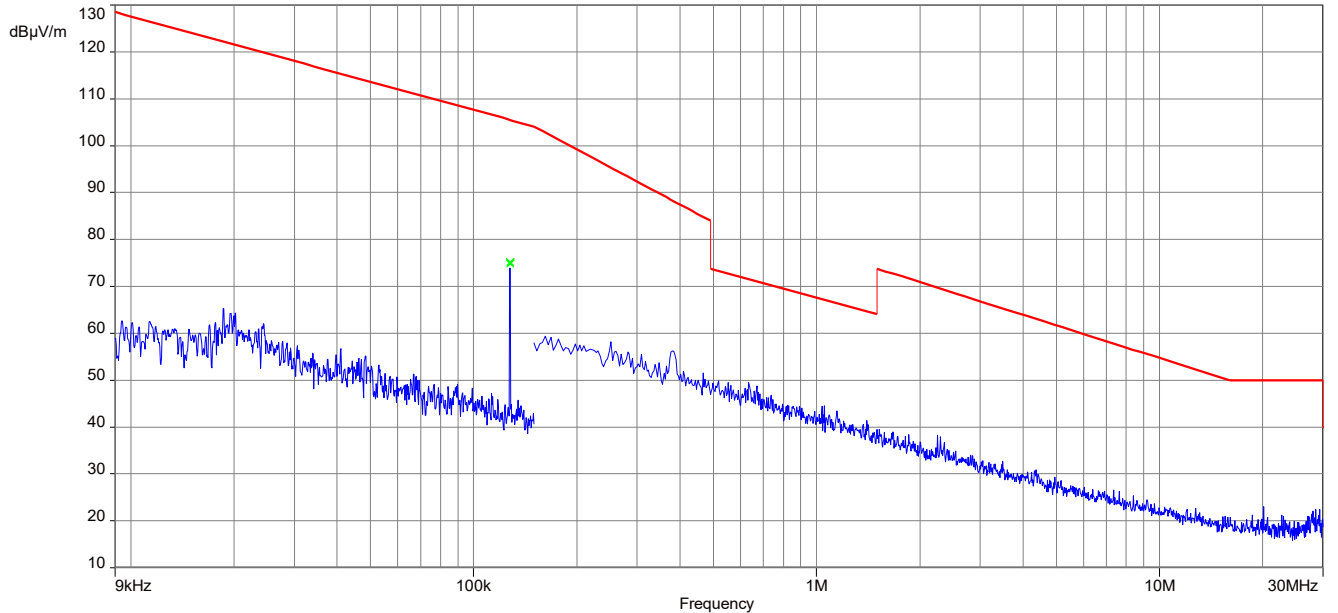


Plot 4: 9 kHz – 30 MHz, magnetic spurious emissions ISSED, 126.55 kHz, 2*15W dummy load charging mode

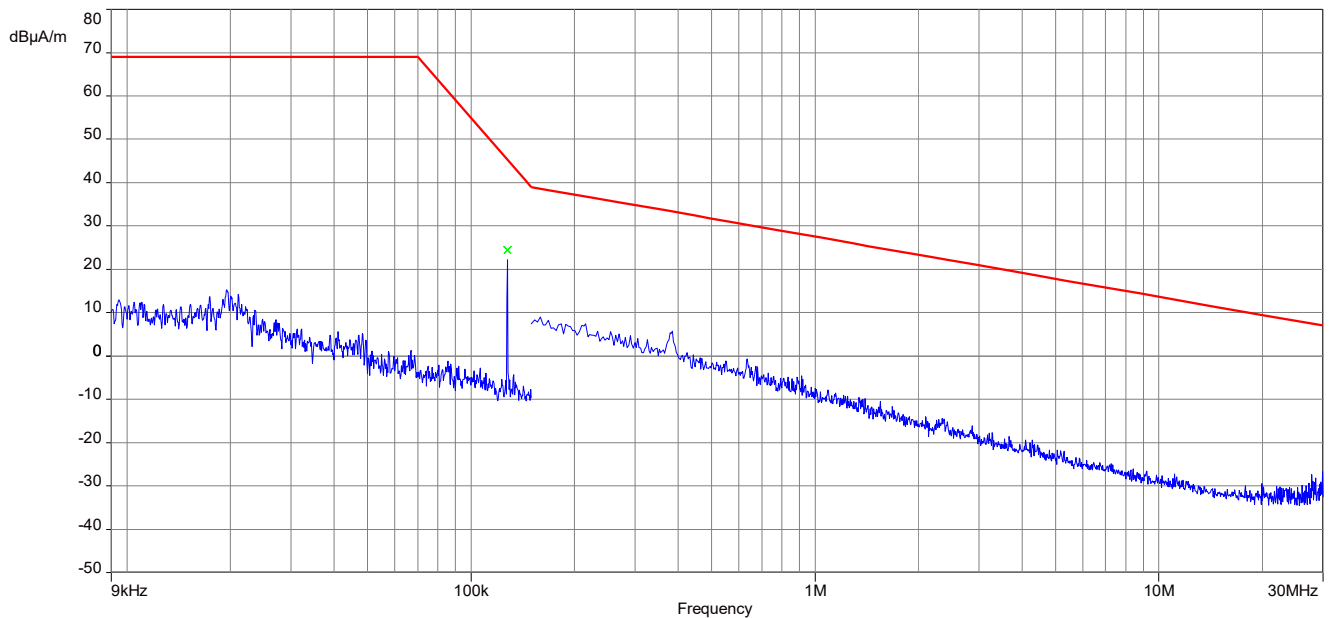


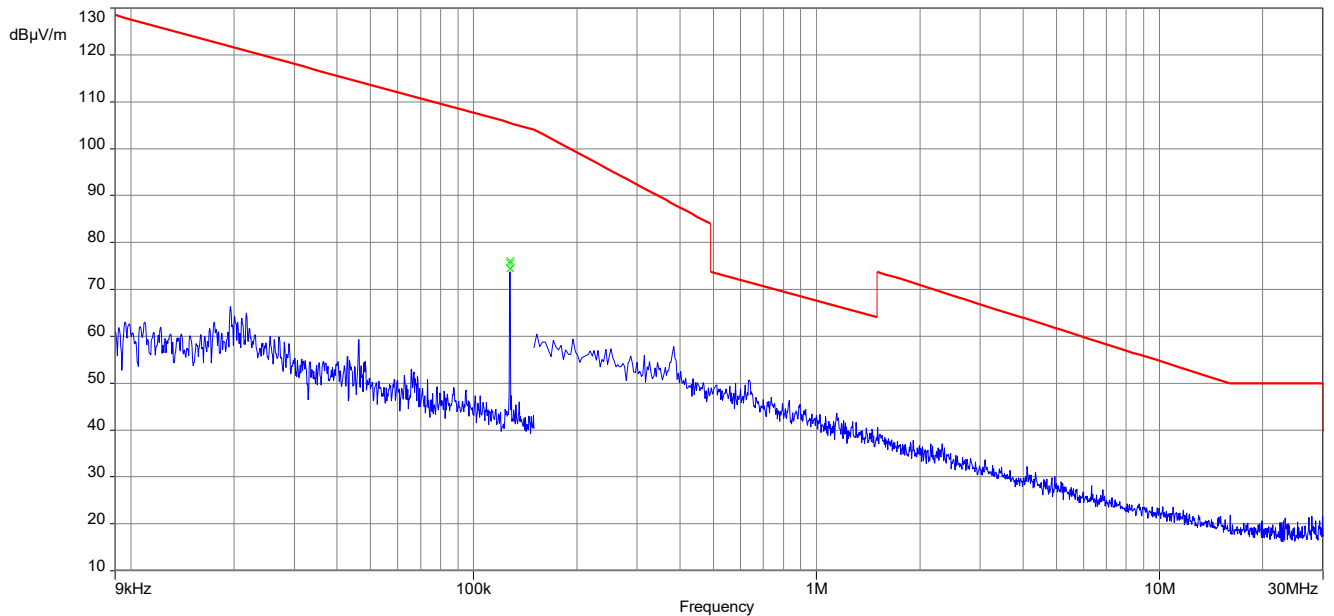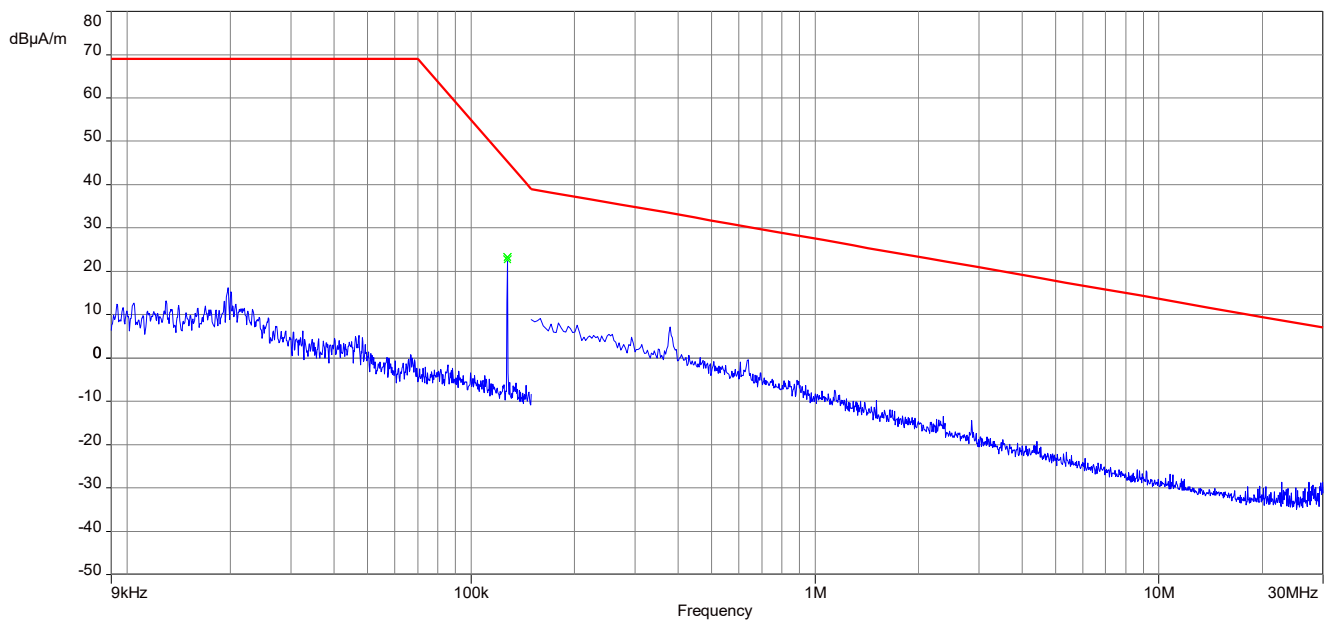Plot 5: 9 kHz – 30 MHz, magnetic spurious emissions FCC, 127.55 kHz, 2*15W dummy load charging mode**Plot 6:** 9 kHz – 30 MHz, magnetic spurious emissions ISSED, 127.55 kHz, 2*15W dummy load charging mode

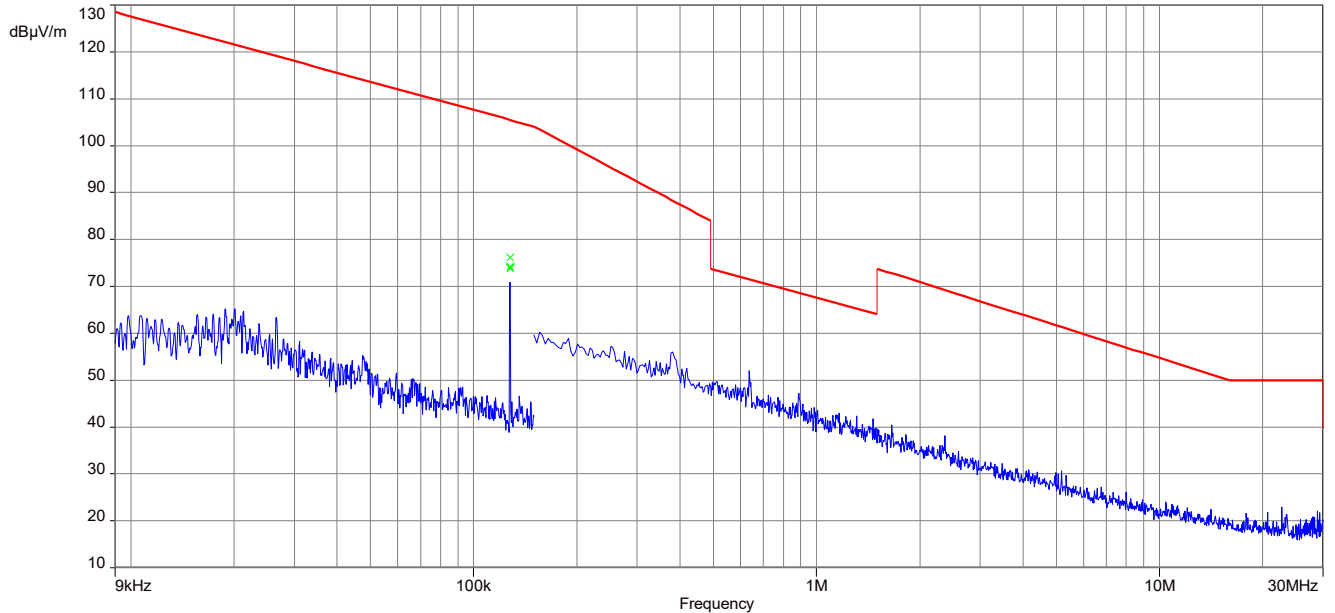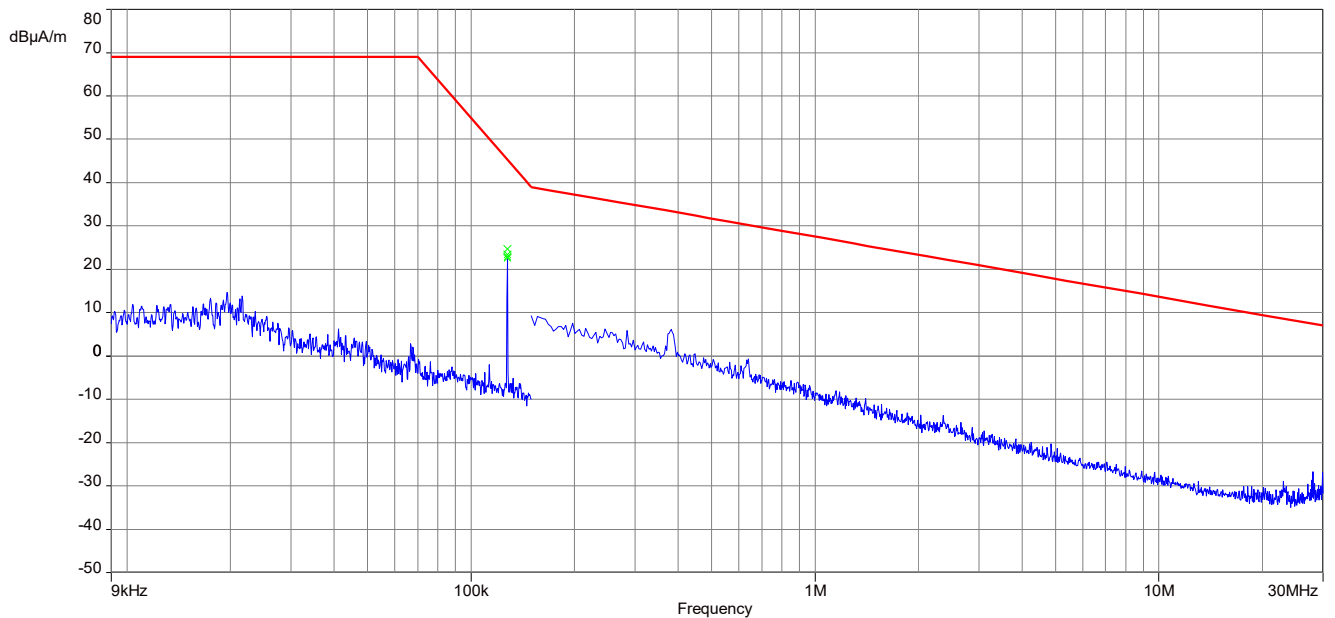
Plot 7: 9 kHz – 30 MHz, magnetic spurious emissions FCC, 128.55 kHz, 2*15W dummy load charging mode**Plot 8:** 9 kHz – 30 MHz, magnetic spurious emissions ISSED, 128.55 kHz, 2*15W dummy load charging mode

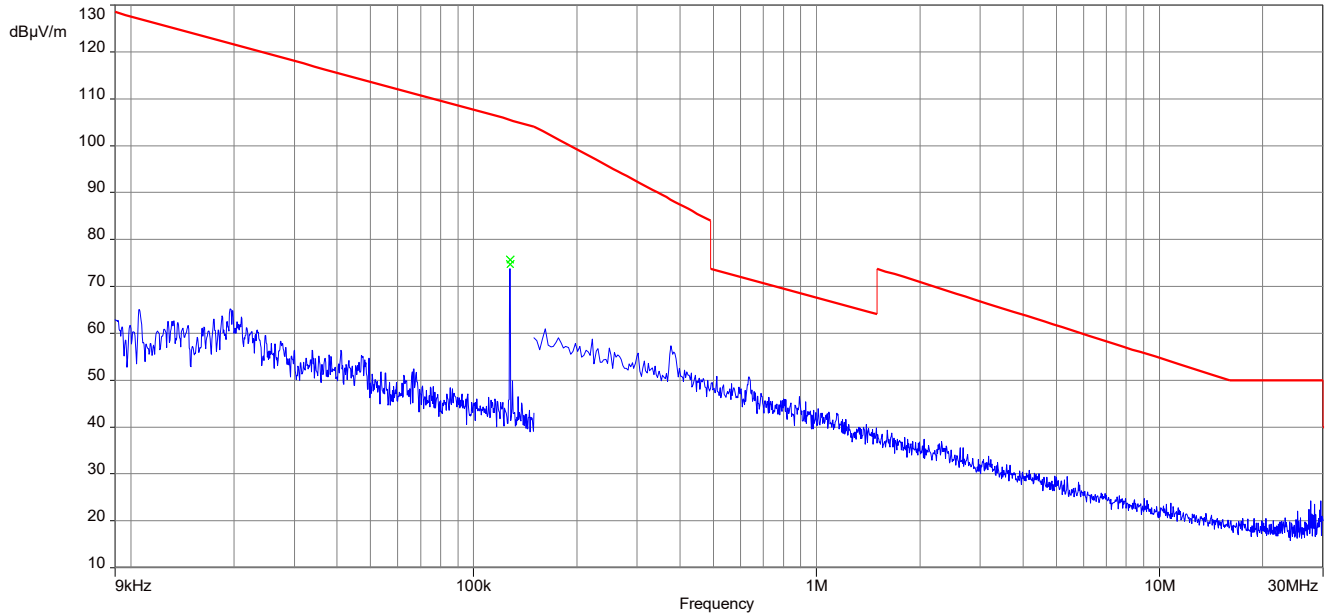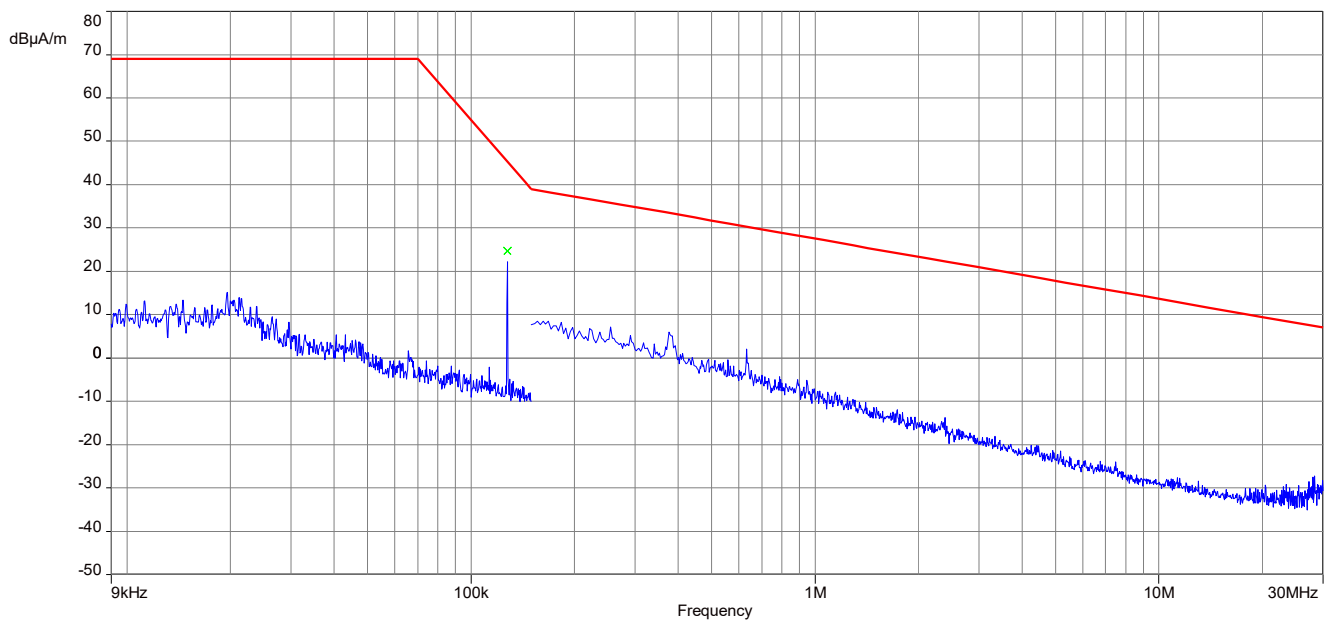Plot 9: 9 kHz – 30 MHz, magnetic spurious emissions FCC, 129.75 kHz, 2*15W dummy load charging mode**Plot 10:** 9 kHz – 30 MHz, magnetic spurious emissions ISSED, 129.75 kHz, 2*15W dummy load charging mode


Plot 11: 9 kHz – 30 MHz, magnetic spurious emissions FCC, 360 kHz, 2*25W dummy load charging mode

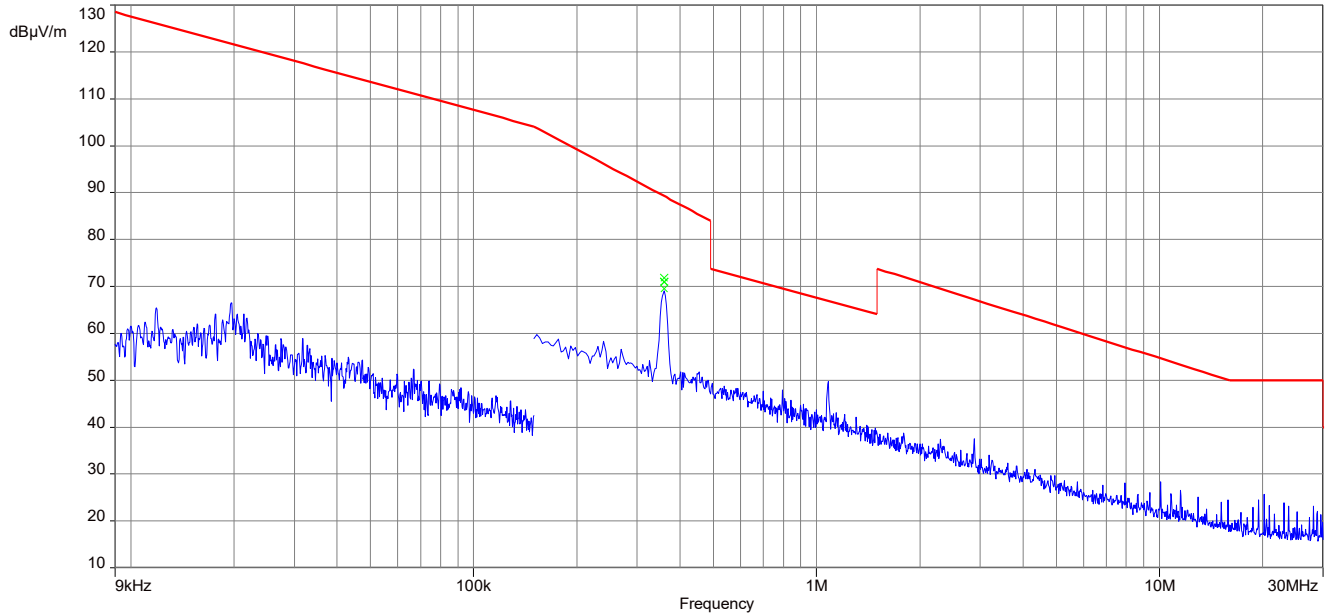


Plot 12: 9 kHz – 30 MHz, magnetic spurious emissions ISED, 360 kHz, 2*25W dummy load charging mode

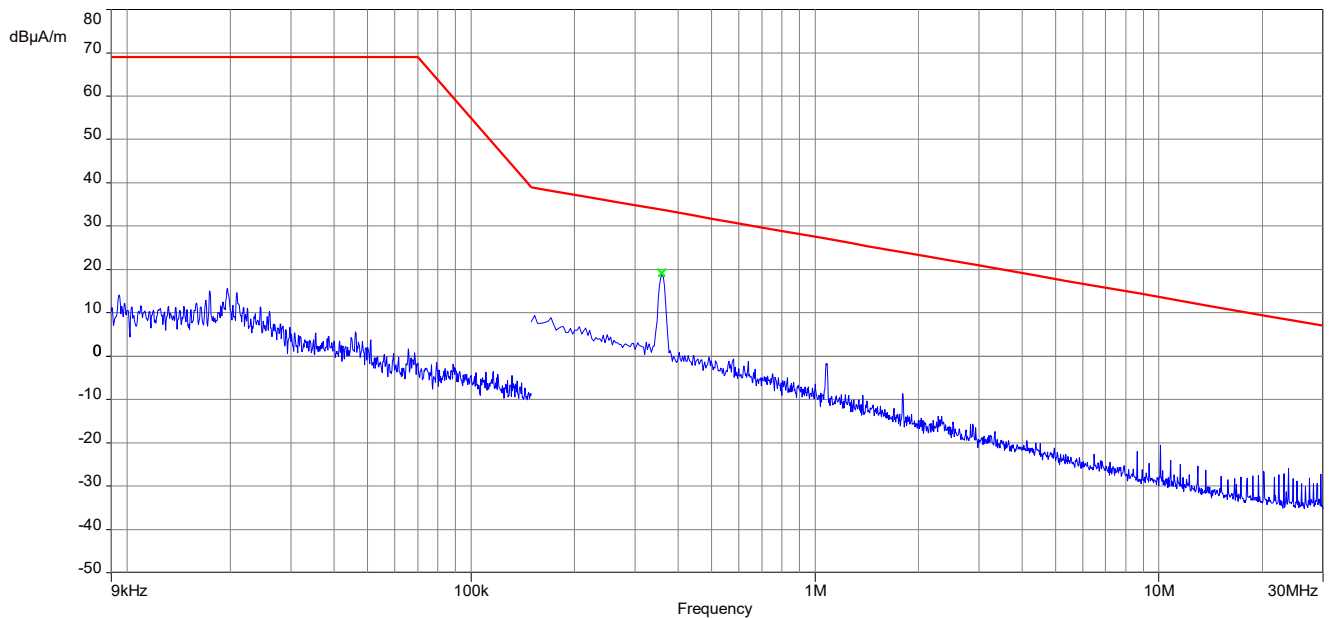


Plot 13: 9 kHz – 30 MHz, magnetic spurious emissions FCC, 127.55 kHz & 360 kHz, 1*15W +1*25W load charging mode

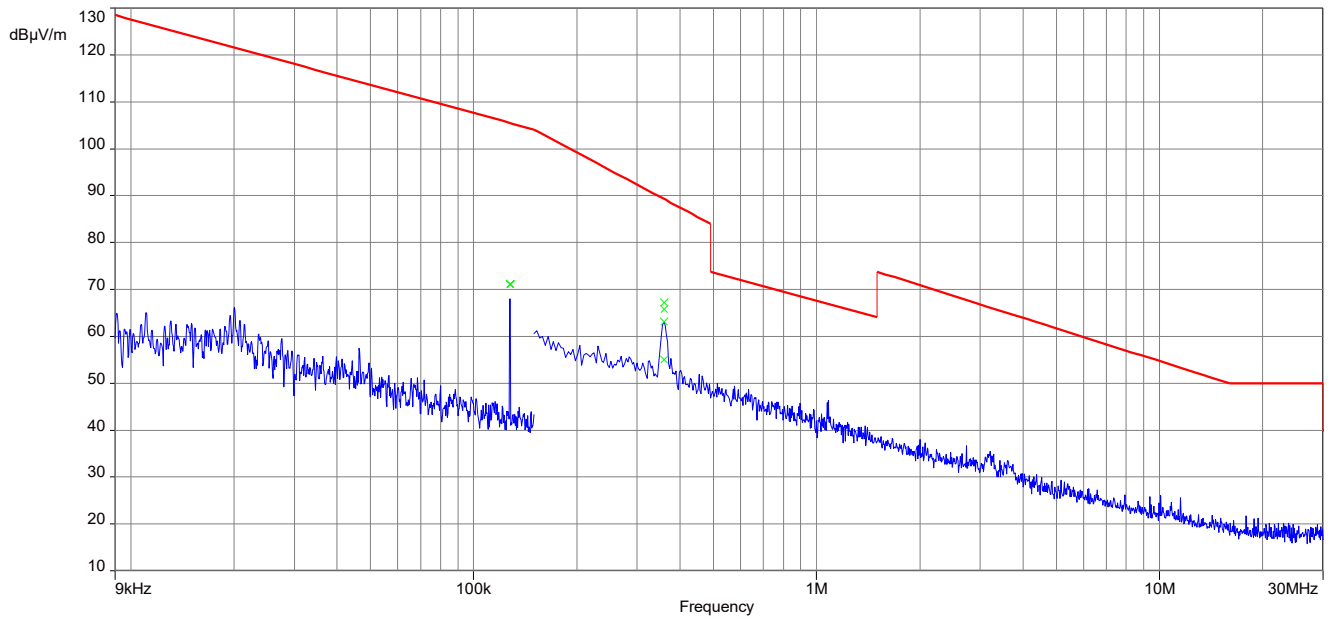

Plot 14: 9 kHz – 30 MHz, magnetic spurious emissions ISCED, 127.55 & 360 kHz, 1*15W +1*25W load charging mode

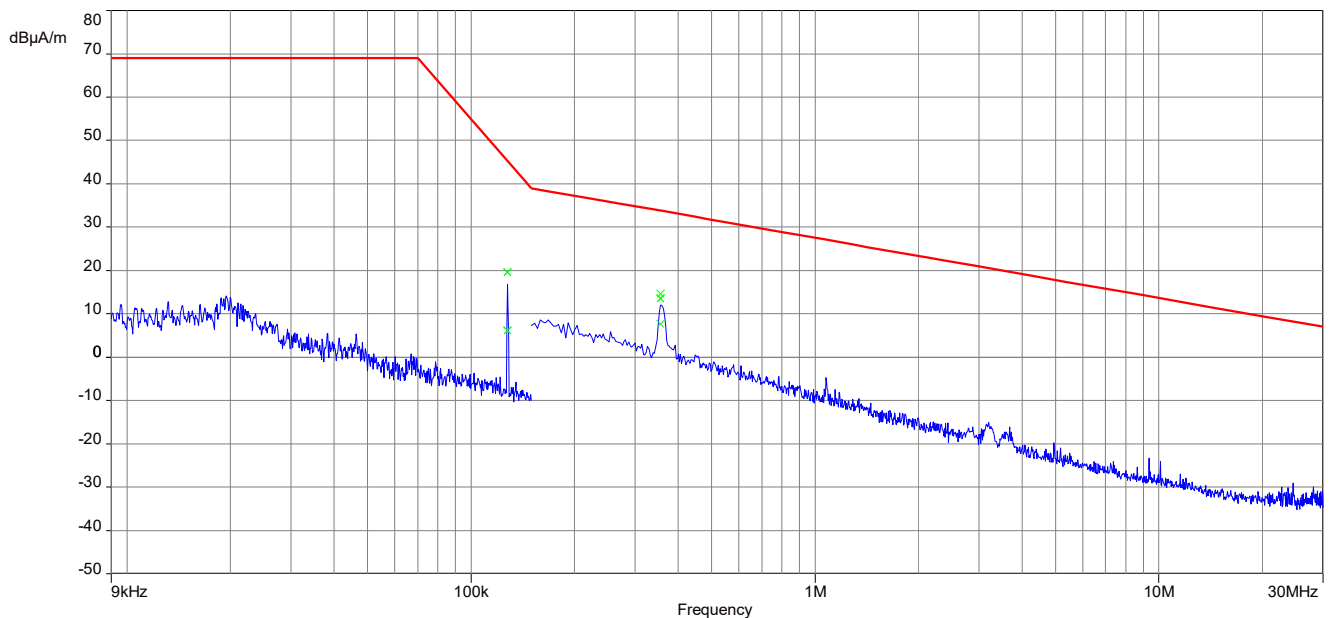


Plot15: 30 MHz – 1 GHz, vertical and horizontal polarization, performed on 127.55 kHz, 2*15W loads
(just for additional information)

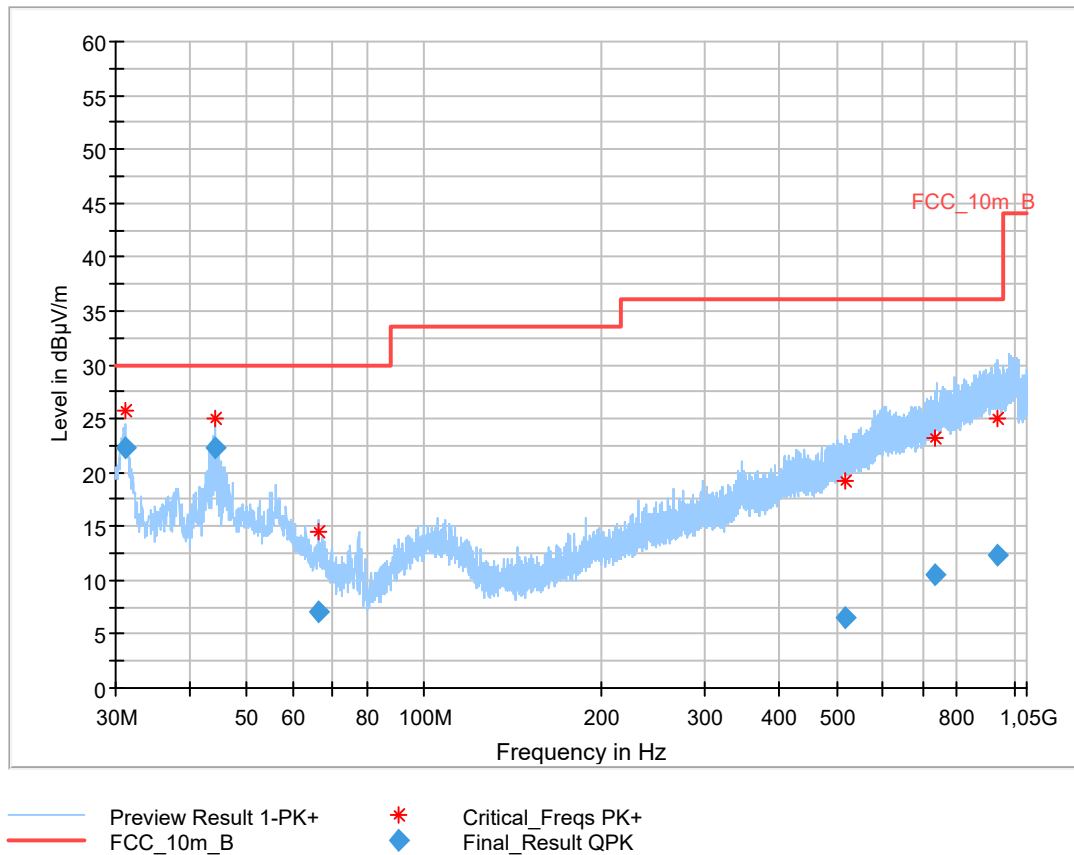

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.116	22.35	30.0	7.7	1000	120.0	100.0	V	-33	12
44.250	22.26	30.0	7.7	1000	120.0	200.0	V	104	14
66.381	7.10	30.0	22.9	1000	120.0	124.0	V	251	11
515.489	6.51	36.0	29.5	1000	120.0	200.0	H	141	19
733.596	10.49	36.0	25.5	1000	120.0	400.0	V	225	23
939.645	12.37	36.0	23.6	1000	120.0	400.0	V	45	25

Plot16: 30 MHz – 1 GHz, vertical and horizontal polarization, performed on 360 kHz, 2*25W loads
(just for additional information)

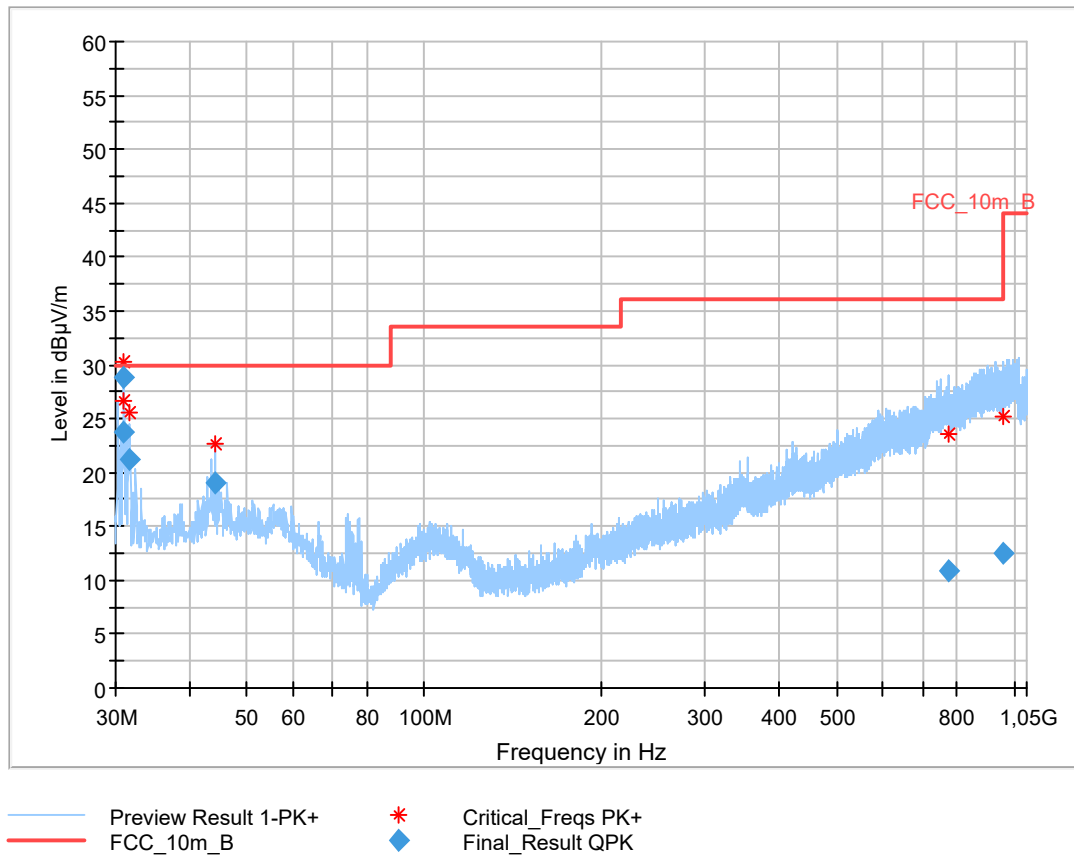

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.839	23.81	30.0	6.2	1000	120.0	107.0	V	125	12
30.983	28.75	30.0	1.3	1000	120.0	100.0	V	68	12
31.707	21.12	30.0	8.9	1000	120.0	193.0	V	168	12
44.308	19.06	30.0	10.9	1000	120.0	185.0	V	195	14
774.365	10.84	36.0	25.2	1000	120.0	250.0	V	168	23
959.553	12.59	36.0	23.4	1000	120.0	166.0	V	197	25

13 Observations

No observations except those reported with the single test cases have been made.

14 Glossary

AVG	Average
C	Compliant
C/N₀	Carrier to noise-density ratio, expressed in dB-Hz
CAC	Channel availability check
CW	Clean wave
DC	Duty cycle
DFS	Dynamic frequency selection
DSSS	Dynamic sequence spread spectrum
DUT	Device under test
EN	European Standard
ETSI	European Telecommunications Standards Institute
EMC	Electromagnetic Compatibility
EUT	Equipment under test
FCC	Federal Communications Commission
FCC ID	Combination of Grantee Code and Equipment Product Code
FHSS	Frequency hopping spread spectrum
FVIN	Firmware version identification number
GNSS	Global Navigation Satellite System
GUE	GNSS User Equipment
HMN	Host marketing name
HVIN	Hardware version identification number
HW	Hardware
ISED	Innovation, Science and Economic Development Canada
Inv. No.	Inventory number
MC	Modulated carrier
NA	Not applicable
NC	Not compliant
NOP	Non occupancy period
NP	Not performed
OBW	Occupied bandwidth
OC	Operating channel
OCW	Operating channel bandwidth
OFDM	Orthogonal frequency division multiplexing
OOB	Out of band
OP	Occupancy period
PER	Packet error rate
PMN	Product marketing name
PP	Positive peak
QP	Quasi peak
RLAN	Radio local area network
S/N or SN	Serial number
SW	Software
UUT	Unit under test
WLAN	Wireless local area network

15 Document history

Version	Applied changes	Date of release
R01	Initial release	2026-03-02

END OF TEST REPORT