



**SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch**

No. 1 Workshop, M-10, Middle section, Science & Technology Park,  
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM170300160501  
Page: 1 of 102

## **TEST REPORT**

**Application No.:** SZEM1703001605CR  
**Applicant:** ADATA Technology Co., Ltd  
**Address of Applicant:** 2F, NO.258, Lian Cheng RD., Chung Ho Dist., New Taipei City, Taiwan  
**Manufacturer:** ADATA Technology Co., Ltd  
**Address of Manufacturer:** 2F, NO.258, Lian Cheng RD., Chung Ho Dist., New Taipei City, Taiwan  
**Factory:** Nanjing Skyworth Institute of Information Technology Co., Ltd  
**Address of Factory:** 1036, 10th. Floor, No.28 of Ningshuang Rd., Yuhuatai District, Nanjing, Jingsu Pro., PRC

**Equipment Under Test (EUT):**  
**EUT Name:** HDMI Streaming Media Adapter  
**Model No.:** MV100  
**Trade mark:** ADATA  
**FCC ID:** RLYMV100  
**Standards:** 47 CFR Part 15, Subpart C 15.247  
**Date of Receipt:** 2017-03-08  
**Date of Test:** 2017-04-17 to 2017-07-19  
**Date of Issue:** 2017-07-20

|                      |              |
|----------------------|--------------|
| <b>Test Result :</b> | <b>Pass*</b> |
|----------------------|--------------|

\* In the configuration tested, the EUT complied with the standards specified above.



Jack Zhang  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



| Revision Record |         |            |          |          |
|-----------------|---------|------------|----------|----------|
| Version         | Chapter | Date       | Modifier | Remark   |
| 01              |         | 2017-07-20 |          | Original |
|                 |         |            |          |          |
|                 |         |            |          |          |

|                          |  |                                                                                    |  |  |
|--------------------------|--|------------------------------------------------------------------------------------|--|--|
| Authorized for issue by: |  |                                                                                    |  |  |
|                          |  |   |  |  |
|                          |  | <hr/>                                                                              |  |  |
|                          |  | Peter Geng /Project Engineer                                                       |  |  |
|                          |  |  |  |  |
|                          |  | <hr/>                                                                              |  |  |
|                          |  | Eric Fu /Reviewer                                                                  |  |  |



## 2 Test Summary

| Radio Spectrum Technical Requirement |                                  |        |                                              |        |
|--------------------------------------|----------------------------------|--------|----------------------------------------------|--------|
| Item                                 | Standard                         | Method | Requirement                                  | Result |
| Antenna Requirement                  | 47 CFR Part 15, Subpart C 15.247 | N/A    | 47 CFR Part 15, Subpart C 15.203 & 15.247(c) | Pass   |

| Radio Spectrum Matter Part                            |                                  |                                      |                                              |        |
|-------------------------------------------------------|----------------------------------|--------------------------------------|----------------------------------------------|--------|
| Item                                                  | Standard                         | Method                               | Requirement                                  | Result |
| Conducted Emissions at AC Power Line (150kHz-30MHz)   | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.2       | 47 CFR Part 15, Subpart C 15.207             | Pass   |
| Minimum 6dB Bandwidth                                 | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 11.8.1    | 47 CFR Part 15, Subpart C 15.247a(2)         | Pass   |
| Conducted Peak Output Power                           | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 11.9.1.2  | 47 CFR Part 15, Subpart C 15.247(b)(3)       | Pass   |
| Power Spectrum Density                                | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 11.10.2   | 47 CFR Part 15, Subpart C 15.247(e)          | Pass   |
| Conducted Band Edges Measurement                      | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 11.13.3.2 | 47 CFR Part 15, Subpart C 15.247(d)          | Pass   |
| Conducted Spurious Emissions                          | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 11.11     | 47 CFR Part 15, Subpart C 15.247(d)          | Pass   |
| Radiated Emissions which fall in the restricted bands | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.10.5    | 47 CFR Part 15, Subpart C 15.209 & 15.247(d) | Pass   |
| Radiated Spurious Emissions                           | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.10.4    | 47 CFR Part 15, Subpart C 15.209 & 15.247(d) | Pass   |



### 3 Contents

|                                                                 | Page |
|-----------------------------------------------------------------|------|
| 1 COVER PAGE .....                                              | 1    |
| 2 TEST SUMMARY .....                                            | 3    |
| 3 CONTENTS .....                                                | 4    |
| 4 GENERAL INFORMATION .....                                     | 6    |
| 4.1 DETAILS OF E.U.T. ....                                      | 6    |
| 4.2 DESCRIPTION OF SUPPORT UNITS .....                          | 8    |
| 4.3 MEASUREMENT UNCERTAINTY .....                               | 8    |
| 4.4 TEST LOCATION .....                                         | 9    |
| 4.5 TEST FACILITY .....                                         | 9    |
| 4.6 DEVIATION FROM STANDARDS .....                              | 9    |
| 4.7 ABNORMALITIES FROM STANDARD CONDITIONS .....                | 9    |
| 5 EQUIPMENT LIST .....                                          | 10   |
| 6 RADIO SPECTRUM TECHNICAL REQUIREMENT .....                    | 13   |
| 6.1 ANTENNA REQUIREMENT .....                                   | 13   |
| 6.1.1 Test Requirement: .....                                   | 13   |
| 6.1.2 Conclusion .....                                          | 13   |
| 7 RADIO SPECTRUM MATTER TEST RESULTS .....                      | 14   |
| 7.1 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ) .....   | 14   |
| 7.1.1 E.U.T. Operation .....                                    | 15   |
| 7.1.2 Test Setup Diagram .....                                  | 15   |
| 7.1.3 Measurement Procedure and Data .....                      | 15   |
| 7.2 MINIMUM 6DB BANDWIDTH .....                                 | 18   |
| 7.2.1 E.U.T. Operation .....                                    | 18   |
| 7.2.2 Test Setup Diagram .....                                  | 18   |
| 7.2.3 Measurement Procedure and Data .....                      | 18   |
| 7.3 CONDUCTED PEAK OUTPUT POWER .....                           | 19   |
| 7.3.1 E.U.T. Operation .....                                    | 20   |
| 7.3.2 Test Setup Diagram .....                                  | 20   |
| 7.3.3 Measurement Procedure and Data .....                      | 20   |
| 7.4 POWER SPECTRUM DENSITY .....                                | 21   |
| 7.4.1 E.U.T. Operation .....                                    | 21   |
| 7.4.2 Test Setup Diagram .....                                  | 21   |
| 7.4.3 Measurement Procedure and Data .....                      | 21   |
| 7.5 CONDUCTED BAND EDGES MEASUREMENT .....                      | 22   |
| 7.5.1 E.U.T. Operation .....                                    | 22   |
| 7.5.2 Test Setup Diagram .....                                  | 22   |
| 7.5.3 Measurement Procedure and Data .....                      | 22   |
| 7.6 CONDUCTED SPURIOUS EMISSIONS .....                          | 23   |
| 7.6.1 E.U.T. Operation .....                                    | 23   |
| 7.6.2 Test Setup Diagram .....                                  | 23   |
| 7.6.3 Measurement Procedure and Data .....                      | 23   |
| 7.7 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS ..... | 24   |
| 7.7.1 E.U.T. Operation .....                                    | 24   |
| 7.7.2 Test Setup Diagram .....                                  | 24   |



|       |                                              |           |
|-------|----------------------------------------------|-----------|
| 7.7.3 | Measurement Procedure and Data.....          | 25        |
| 7.8   | RADIATED SPURIOUS EMISSIONS .....            | 42        |
| 7.8.1 | E.U.T. Operation .....                       | 43        |
| 7.8.2 | Test Setup Diagram .....                     | 43        |
| 7.8.3 | Measurement Procedure and Data.....          | 44        |
| 8     | <b>PHOTOGRAPHS.....</b>                      | <b>56</b> |
| 8.1   | RADIATED SPURIOUS EMISSIONS TEST SETUP ..... | 56        |
| 8.2   | EUT CONSTRUCTIONAL DETAILS .....             | 57        |
| 9     | <b>APPENDIX.....</b>                         | <b>58</b> |
| 9.1   | APPENDIX 15.247.....                         | 58-102    |



## **4 General Information**

### **4.1 Details of E.U.T.**

|                      |                                                                                                                                                                  |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply:        | DC 5V from USB port                                                                                                                                              |
| Test voltage         | AC 120V/60Hz                                                                                                                                                     |
| Cable:               | USB cable:60cm unshielded                                                                                                                                        |
| Operation Frequency: | IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz<br>IEEE 802.11n(HT40): 2422MHz to 2452MHz                                                                             |
| Channel Numbers:     | IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels<br>IEEE 802.11n HT40: 7 Channels                                                                                  |
| Channel Separation:  | 5MHz                                                                                                                                                             |
| Type of Modulation:  | IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK)<br>IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK)<br>IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK,BPSK) |
| Antenna Type:        | PIFA                                                                                                                                                             |
| Antenna Gain:        | 2dBi                                                                                                                                                             |



| Operation Frequency each of channel(802.11b/g/n HT20) |           |           |           |         |           |           |           |
|-------------------------------------------------------|-----------|-----------|-----------|---------|-----------|-----------|-----------|
| Channel                                               | Frequency | Channel   | Frequency | Channel | Frequency | Channel   | Frequency |
| 1                                                     | 2412MHz   | 4         | 2427MHz   | 7       | 2442MHz   | 10        | 2457MHz   |
| 2                                                     | 2417MHz   | 5         | 2432MHz   | 8       | 2447MHz   | 11        | 2462MHz   |
| 3                                                     | 2422MHz   | 6         | 2437MHz   | 9       | 2452MHz   |           |           |
| Operation Frequency each of channel(802.11n HT40)     |           |           |           |         |           |           |           |
| Channel                                               |           | Frequency |           | Channel |           | Frequency |           |
| 3                                                     |           | 2422MHz   |           | 6       |           | 2437MHz   |           |
| 4                                                     |           | 2427MHz   |           | 7       |           | 2442MHz   |           |
| 5                                                     |           | 2432MHz   |           | 8       |           | 2447MHz   |           |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

| Channel             | Frequency |
|---------------------|-----------|
| The Lowest channel  | 2412MHz   |
| The Middle channel  | 2437MHz   |
| The Highest channel | 2462MHz   |

For 802.11n (HT40):

| Channel             | Frequency |
|---------------------|-----------|
| The Lowest channel  | 2422MHz   |
| The Middle channel  | 2437MHz   |
| The Highest channel | 2452MHz   |



## 4.2 Description of Support Units

| Description | Manufacturer | Model No.      | Serial No.      |
|-------------|--------------|----------------|-----------------|
| Adapter     | Apple        | A1357 W010A051 | REF. No.SEA0500 |

## 4.3 Measurement Uncertainty

| No. | Item                            | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1   | Radio Frequency                 | $7.25 \times 10^{-8}$   |
| 2   | Duty cycle                      | 0.37%                   |
| 3   | Occupied Bandwidth              | 3%                      |
| 4   | RF conducted power              | 0.75dB                  |
| 5   | RF power density                | 2.84dB                  |
| 6   | Conducted Spurious emissions    | 0.75dB                  |
| 7   | RF Radiated power               | 4.5dB (below 1GHz)      |
|     |                                 | 4.8dB (above 1GHz)      |
| 8   | Radiated Spurious emission test | 4.5dB (30MHz-1GHz)      |
|     |                                 | 4.8dB (1GHz-18GHz)      |
| 9   | Temperature test                | 1 °C                    |
| 10  | Humidity test                   | 3%                      |
| 11  | Supply voltages                 | 1.5%                    |
| 12  | Time                            | 3%                      |



#### **4.4 Test Location**

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

#### **4.5 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

#### **4.6 Deviation from Standards**

None

#### **4.7 Abnormalities from Standard Conditions**

None



## 5 Equipment List

| Conducted Emissions at AC Power Line (150kHz-30MHz) |                                    |                  |              |            |              |
|-----------------------------------------------------|------------------------------------|------------------|--------------|------------|--------------|
| Equipment                                           | Manufacturer                       | Model No         | Inventory No | Cal Date   | Cal Due Date |
| Shielding Room                                      | ZhongYu Electron                   | GB-88            | SEM001-06    | 2017-05-10 | 2018-05-10   |
| Measurement Software                                | AUDIX                              | e3<br>V5.4.1221d | N/A          | N/A        | N/A          |
| LISN                                                | Rohde & Schwarz                    | ENV216           | SEM007-01    | 2016-10-09 | 2017-10-09   |
| LISN                                                | ETS-LINDGREN                       | 3816/2           | SEM007-02    | 2017-04-14 | 2018-04-13   |
| 8 Line ISN                                          | Fischer Custom Communications Inc. | FCC-TLISN-T8-02  | EMC0120      | 2016-09-28 | 2017-09-28   |
| 4 Line ISN                                          | Fischer Custom Communications Inc. | FCC-TLISN-T4-02  | EMC0121      | 2016-09-28 | 2017-09-28   |
| 2 Line ISN                                          | Fischer Custom                     | FCC-TLISN-T2-02  | EMC0122      | 2016-09-28 | 2017-09-28   |

| Minimum 6dB Bandwidth |                 |                         |              |            |              |
|-----------------------|-----------------|-------------------------|--------------|------------|--------------|
| Equipment             | Manufacturer    | Model No                | Inventory No | Cal Date   | Cal Due Date |
| DC Power Supply       | ZhaoXin         | RXN-305D                | SEM011-02    | 2016-10-09 | 2017-10-09   |
| Spectrum Analyzer     | Rohde & Schwarz | FSP                     | SEM004-06    | 2016-10-09 | 2017-10-09   |
| Measurement Software  | JS Tonscend     | JS1120-2<br>BT/WIFI V2. | N/A          | N/A        | N/A          |
| Signal Generator      | Rohde & Schwarz | SML03                   | SEM006-02    | 2017-04-14 | 2018-04-13   |
| Power Meter           | Rohde & Schwarz | NRVS                    | SEM014-02    | 2016-10-09 | 2017-10-09   |

| Conducted Peak Output Power |                 |                         |              |            |              |
|-----------------------------|-----------------|-------------------------|--------------|------------|--------------|
| Equipment                   | Manufacturer    | Model No                | Inventory No | Cal Date   | Cal Due Date |
| DC Power Supply             | ZhaoXin         | RXN-305D                | SEM011-02    | 2016-10-09 | 2017-10-09   |
| Spectrum Analyzer           | Rohde & Schwarz | FSP                     | SEM004-06    | 2016-10-09 | 2017-10-09   |
| Measurement Software        | JS Tonscend     | JS1120-2<br>BT/WIFI V2. | N/A          | N/A        | N/A          |
| Signal Generator            | Rohde & Schwarz | SML03                   | SEM006-02    | 2017-04-14 | 2018-04-13   |
| Power Meter                 | Rohde & Schwarz | NRVS                    | SEM014-02    | 2016-10-09 | 2017-10-09   |



| Power Spectrum Density |                 |                         |              |            |              |
|------------------------|-----------------|-------------------------|--------------|------------|--------------|
| Equipment              | Manufacturer    | Model No                | Inventory No | Cal Date   | Cal Due Date |
| DC Power Supply        | ZhaoXin         | RXN-305D                | SEM011-02    | 2016-10-09 | 2017-10-09   |
| Spectrum Analyzer      | Rohde & Schwarz | FSP                     | SEM004-06    | 2016-10-09 | 2017-10-09   |
| Measurement Software   | JS Tonscend     | JS1120-2<br>BT/WIFI V2. | N/A          | N/A        | N/A          |
| Signal Generator       | Rohde & Schwarz | SML03                   | SEM006-02    | 2017-04-14 | 2018-04-13   |
| Power Meter            | Rohde & Schwarz | NRVS                    | SEM014-02    | 2016-10-09 | 2017-10-09   |

| Conducted Spurious Emissions |                 |                         |              |            |              |
|------------------------------|-----------------|-------------------------|--------------|------------|--------------|
| Equipment                    | Manufacturer    | Model No                | Inventory No | Cal Date   | Cal Due Date |
| DC Power Supply              | ZhaoXin         | RXN-305D                | SEM011-02    | 2016-10-09 | 2017-10-09   |
| Spectrum Analyzer            | Rohde & Schwarz | FSP                     | SEM004-06    | 2016-10-09 | 2017-10-09   |
| Measurement Software         | JS Tonscend     | JS1120-2<br>BT/WIFI V2. | N/A          | N/A        | N/A          |
| Signal Generator             | Rohde & Schwarz | SML03                   | SEM006-02    | 2017-04-14 | 2018-04-13   |
| Power Meter                  | Rohde & Schwarz | NRVS                    | SEM014-02    | 2016-10-09 | 2017-10-09   |

| RE in Chamber                      |                      |                 |               |                           |                               |
|------------------------------------|----------------------|-----------------|---------------|---------------------------|-------------------------------|
| Test Equipment                     | Manufacturer         | Model No.       | Inventory No. | Cal. Date<br>(yyyy-mm-dd) | Cal. Due date<br>(yyyy-mm-dd) |
| 10m Semi-Anechoic Chamber          | SAEMC                | FSAC1018        | SEM001-03     | 2017-05-10                | 2018-05-10                    |
| EMI Test Receiver<br>(9k-7GHz)     | Rohde & Schwarz      | ESR             | SEM004-03     | 2017-04-14                | 2018-04-13                    |
| Trilog-Broadband Antenna(30M-1GHz) | Schwarzbeck          | VULB9168        | SEM003-18     | 2016-06-29                | 2019-06-29                    |
| Pre-amplifier (9kHz-1GHz)          | Sonoma Instrument Co | 310N            | SEM005-04     | 2017-06-05                | 2018-06-04                    |
| .Loop Antenna (9kHz-30MHz)         | ETS-Lindgren         | 6502            | SEM003-08     | 2015-08-14                | 2018-08-14                    |
| Measurement Software               | AUDIX                | e3 V8.2014-6-27 | N/A           | N/A                       | N/A                           |



| Radiated Emissions which fall in the restricted bands |                                    |                   |              |            |              |
|-------------------------------------------------------|------------------------------------|-------------------|--------------|------------|--------------|
| Equipment                                             | Manufacturer                       | Model No          | Inventory No | Cal Date   | Cal Due Date |
| 3m Semi-Anechoic Chamber                              | AUDIX                              | N/A               | SEM001-02    | 2017-05-10 | 2018-05-10   |
| Measurement Software                                  | AUDIX                              | e3 V8.2014-6-27   | N/A          | N/A        | N/A          |
| Spectrum Analyzer                                     | Rohde & Schwarz                    | FSU43             | SEM004-08    | 2017-04-14 | 2018-04-13   |
| BiConiLog Antenna (26-3000MHz)                        | ETS-Lindgren                       | 3142C             | SEM003-02    | 2017-03-05 | 2020-03-05   |
| Horn Antenna (1-18GHz)                                | Rohde & Schwarz                    | HF907             | SEM003-07    | 2015-06-14 | 2018-06-14   |
| Horn Antenna(15GHz-40GHz)                             | Schwarzbeck                        | BBHA 9170         | SEM003-14    | 2017-06-16 | 2020-06-15   |
| Pre-amplifier (0.1-1300MHz)                           | HP                                 | 8447D             | SEM005-02    | 2016-10-09 | 2017-10-09   |
| Low Noise Amplifier(100MHz-18GHz)                     | Black Diamond Series               | BDLNA-0118-352810 | SEM005-05    | 2016-10-09 | 2017-10-09   |
| Pre-amplifier(0.1-26.5GHz)                            | Compliance Directions Systems Inc. | PAP-0126          | SEM004-10    | 2016-10-17 | 2017-10-17   |
| Pre-amplifier(26GHz-40GHz)                            | Compliance Directions Systems Inc. | PAP-2640-50       | SEM005-08    | 2017-04-14 | 2018-04-13   |
| DC Power Supply                                       | Zhao Xin                           | RXN-305D          | SEM011-02    | 2016-10-09 | 2017-10-09   |
| Active Loop Antenna                                   | ETS-Lindgren                       | 6502              | SEM003-08    | 2015-08-14 | 2018-08-14   |
| Band filter                                           | N/A                                | N/A               | SEM023-01    | N/A        | N/A          |

| General used equipment          |                                           |          |              |            |              |
|---------------------------------|-------------------------------------------|----------|--------------|------------|--------------|
| Equipment                       | Manufacturer                              | Model No | Inventory No | Cal Date   | Cal Due Date |
| Humidity/ Temperature Indicator | Shanghai Meteorological Industry Factory  | ZJ1-2B   | SEM002-03    | 2016-10-12 | 2017-10-12   |
| Humidity/ Temperature Indicator | Shanghai Meteorological Industry Factory  | ZJ1-2B   | SEM002-04    | 2016-10-12 | 2017-10-12   |
| Humidity/ Temperature Indicator | Mingle                                    | N/A      | SEM002-08    | 2016-10-12 | 2017-10-12   |
| Barometer                       | Changchun Meteorological Industry Factory | DYM3     | SEM002-01    | 2017-04-18 | 2018-04-18   |

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(c)

#### 6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.





## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

| Frequency of emission(MHz)                      | Conducted limit(dBμV) |           |
|-------------------------------------------------|-----------------------|-----------|
|                                                 | Quasi-peak            | Average   |
| 0.15-0.5                                        | 66 to 56*             | 56 to 46* |
| 0.5-5                                           | 56                    | 46        |
| 5-30                                            | 60                    | 50        |
| *Decreases with the logarithm of the frequency. |                       |           |


### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 56 % RH Atmospheric Pressure: 1005 mbar

Test mode a:TX\_ Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20/HT40). Only the data of worst case is recorded in the report.

### 7.1.2 Test Setup Diagram

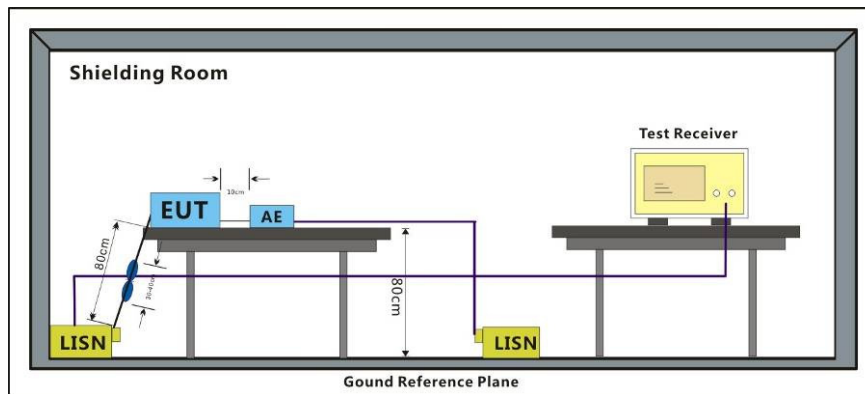


### 7.1.3 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor


Mode:a; Line:Live Line

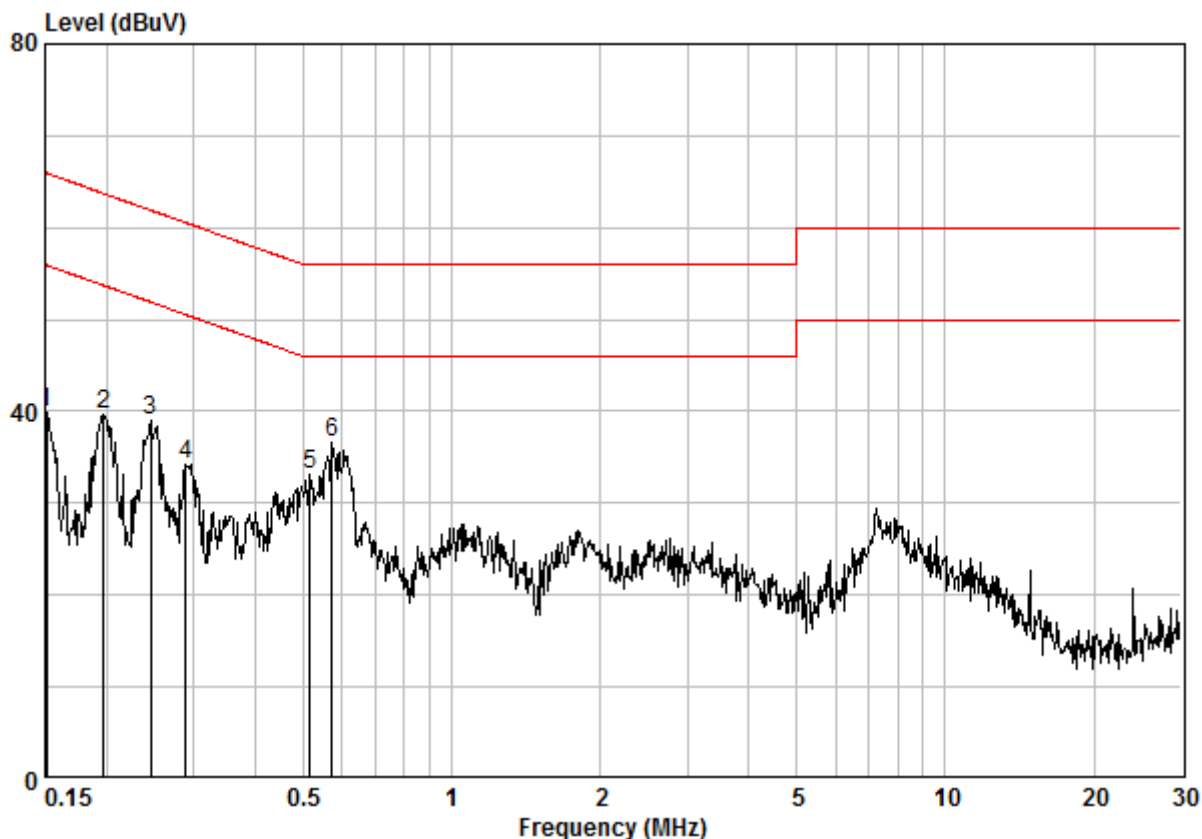

Site : Shielding Room  
Condition : CE LINE  
Job No. : 01605CR/01606CR  
Test Mode : a

|     | Freq    | Cable Loss | LISN Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|-----|---------|------------|-------------|------------|-------|------------|------------|--------|
|     | MHz     | dB         | dB          | dBuV       | dBuV  | dBuV       | dB         |        |
| 1   | 0.15080 | 0.02       | 9.64        | 30.33      | 39.99 | 55.96      | -15.97     | Peak   |
| 2   | 0.19758 | 0.02       | 9.64        | 29.92      | 39.58 | 53.71      | -14.13     | Peak   |
| 3   | 0.24552 | 0.02       | 9.64        | 29.37      | 39.03 | 51.91      | -12.88     | Peak   |
| 4   | 0.28935 | 0.02       | 9.64        | 24.49      | 34.15 | 50.54      | -16.39     | Peak   |
| 5   | 0.51550 | 0.02       | 9.64        | 23.46      | 33.12 | 46.00      | -12.88     | Peak   |
| 6 @ | 0.57313 | 0.02       | 9.65        | 27.02      | 36.69 | 46.00      | -9.31      | Peak   |

Mode:a; Line:Neutral Line

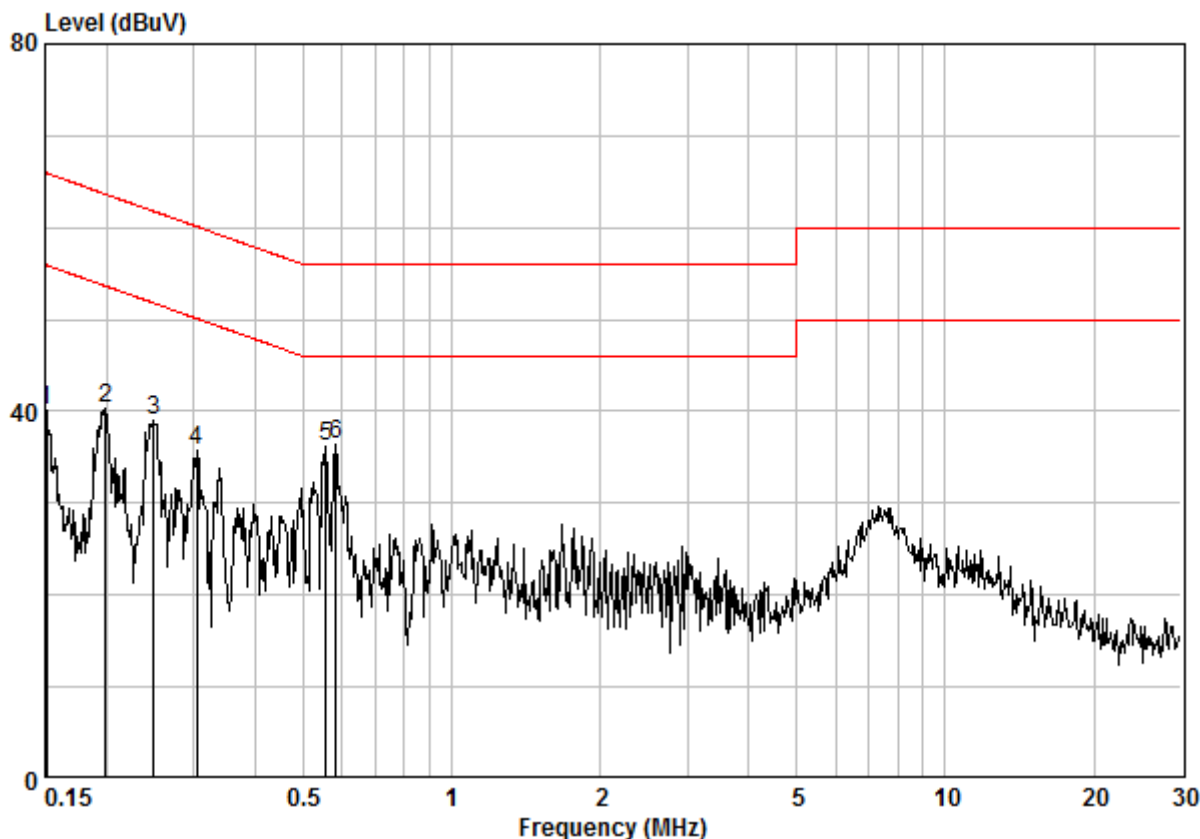

Site : Shielding Room  
Condition : CE NEUTRAL  
Job No. : 01605CR/01606CR  
Test Mode : a

|     | Freq    | Cable Loss | LISN Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|-----|---------|------------|-------------|------------|-------|------------|------------|--------|
|     | MHz     | dB         | dB          | dBuV       | dBuV  | dBuV       | dB         |        |
| 1   | 0.15080 | 0.02       | 9.64        | 30.51      | 40.17 | 55.96      | -15.79     | Peak   |
| 2   | 0.19863 | 0.02       | 9.63        | 30.72      | 40.37 | 53.67      | -13.29     | Peak   |
| 3   | 0.24945 | 0.02       | 9.63        | 29.39      | 39.04 | 51.78      | -12.73     | Peak   |
| 4   | 0.30509 | 0.02       | 9.63        | 26.05      | 35.70 | 50.10      | -14.40     | Peak   |
| 5   | 0.55520 | 0.02       | 9.63        | 26.44      | 36.09 | 46.00      | -9.91      | Peak   |
| 6 @ | 0.58231 | 0.02       | 9.63        | 26.72      | 36.37 | 46.00      | -9.63      | Peak   |

## 7.2 Minimum 6dB Bandwidth

Test Requirement: 47 CFR Part 15, Subpart C 15.247a(2)  
Test Method: ANSI C63.10 (2013) Section 11.8.1  
Limit:  $\geq 500$  kHz


### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C      Humidity: 56 % RH      Atmospheric Pressure: 1015 mbar

Test mode: a:TX\_ Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20/HT40). Only the data of worst case is recorded in the report.

### 7.2.2 Test Setup Diagram

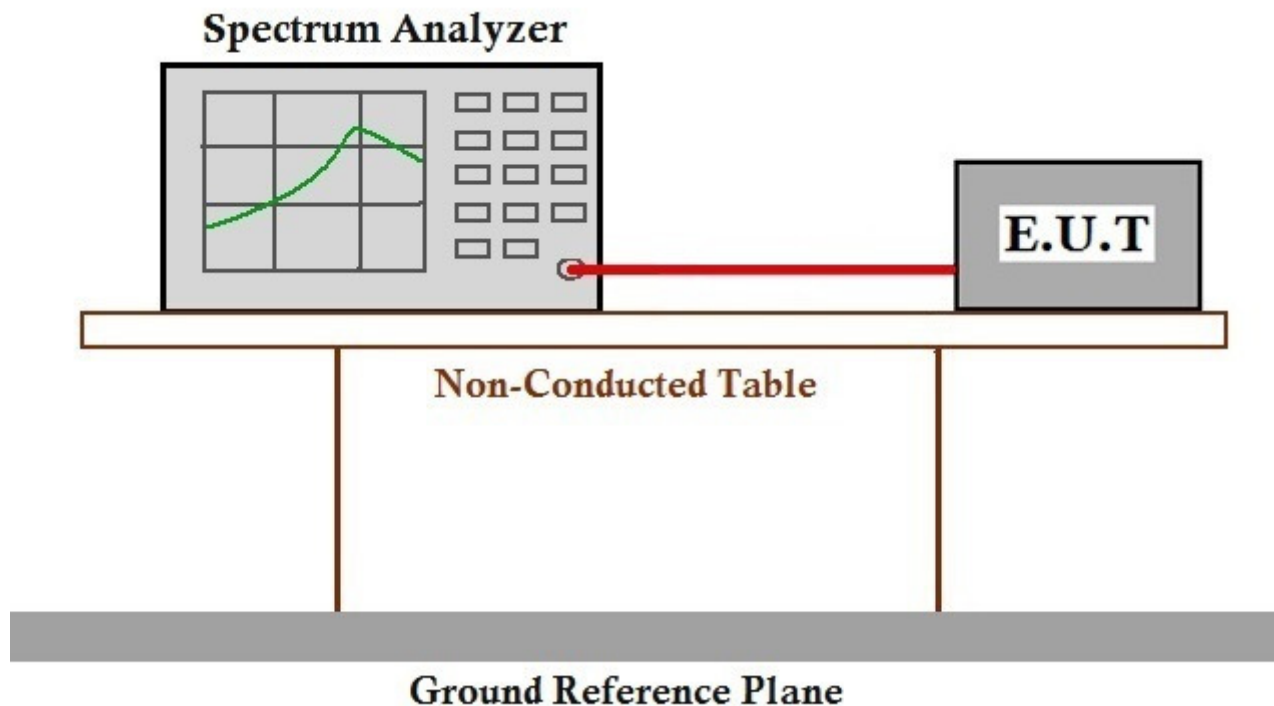

### 7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247



### 7.3 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.1.2

Limit:

| Frequency range(MHz) | Output power of the intentional radiator(watt)         |
|----------------------|--------------------------------------------------------|
| 902-928              | 1 for $\geq 50$ hopping channels                       |
|                      | 0.25 for $25 \leq$ hopping channels $< 50$             |
|                      | 1 for digital modulation                               |
| 2400-2483.5          | 1 for $\geq 75$ non-overlapping hopping channels       |
|                      | 0.125 for all other frequency hopping systems          |
|                      | 1 for digital modulation                               |
| 5725-5850            | 1 for frequency hopping systems and digital modulation |


### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 56 % RH Atmospheric Pressure: 1015 mbar

Test mode a:TX\_ Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20/HT40). Only the data of worst case is recorded in the report.

### 7.3.2 Test Setup Diagram

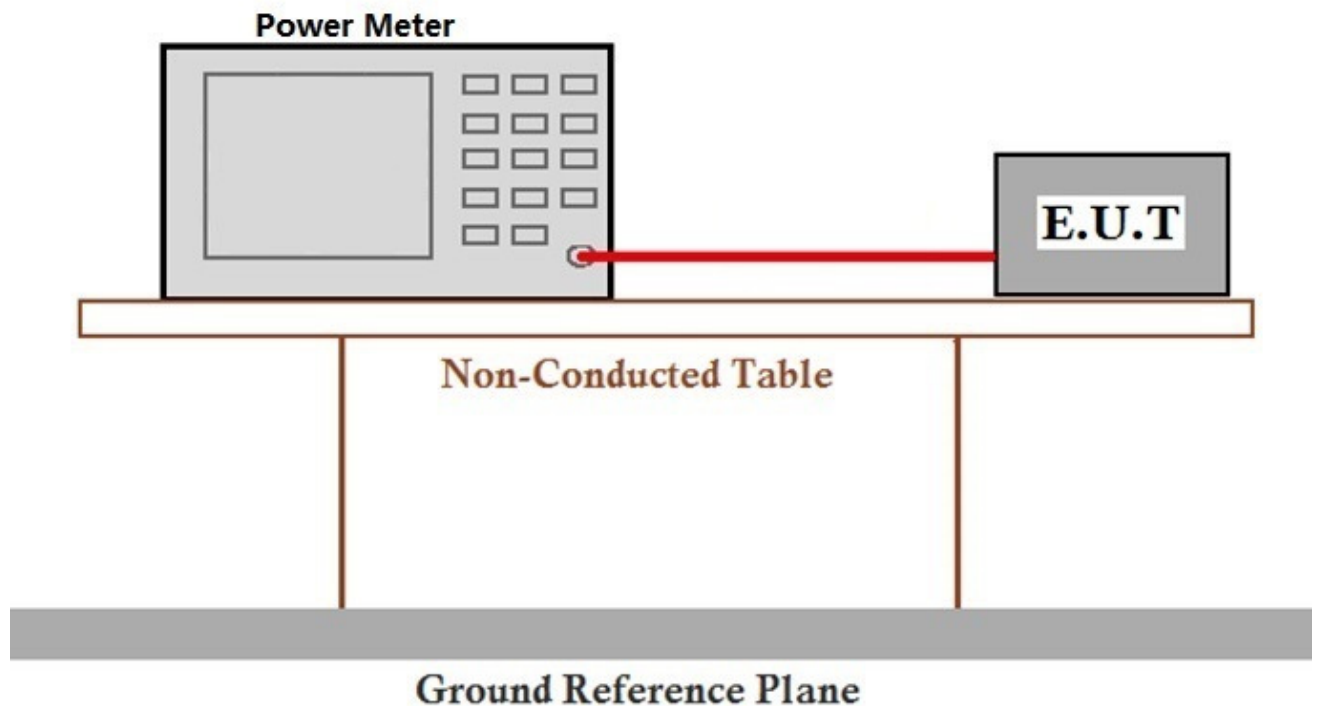

### 7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

## 7.4 Power Spectrum Density

|                  |                                                                             |
|------------------|-----------------------------------------------------------------------------|
| Test Requirement | 47 CFR Part 15, Subpart C 15.247(e)                                         |
| Test Method:     | ANSI C63.10 (2013) Section 11.10.2                                          |
| Limit:           | ≤8dBm in any 3 kHz band during any time interval of continuous transmission |


### 7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C      Humidity: 56 % RH      Atmospheric Pressure: 1015 mbar

Test mode      a:TX\_ Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20/HT40). Only the data of worst case is recorded in the report.

### 7.4.2 Test Setup Diagram

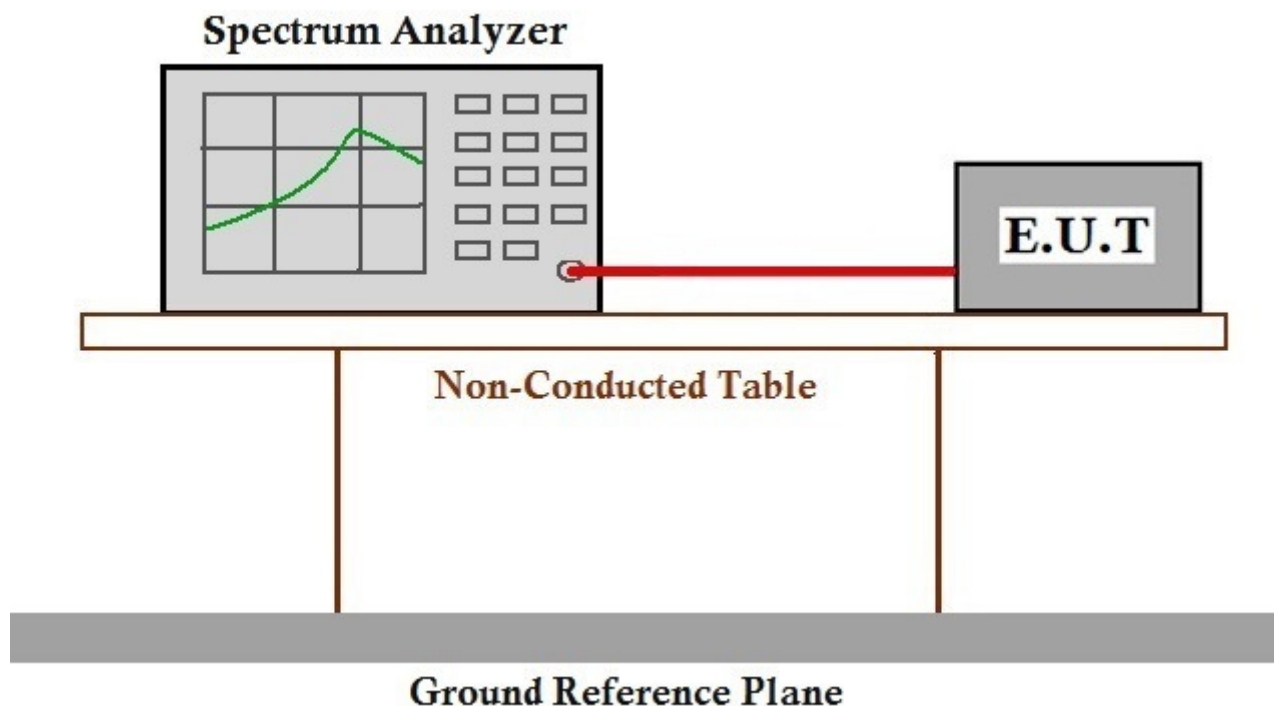

### 7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

## 7.5 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)  
Test Method: ANSI C63.10 (2013) Section 11.13.3.2


### 7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 56 % RH Atmospheric Pressure: 1015 mbar

Test mode a:TX\_ Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20/HT40). Only the data of worst case is recorded in the report.

### 7.5.2 Test Setup Diagram

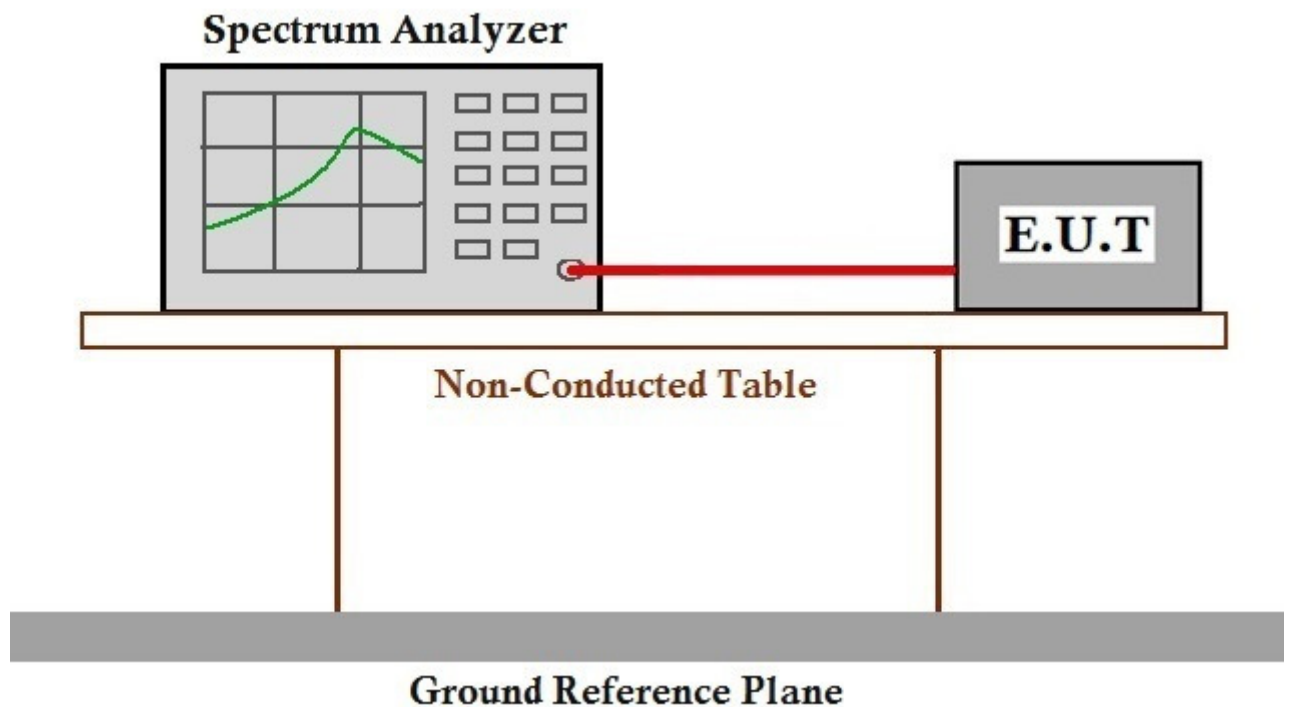

### 7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

## 7.6 Conducted Spurious Emissions

|                  |                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement | 47 CFR Part 15, Subpart C 15.247(d)                                                                                                                                                                                                                                                                                                                                                     |
| Test Method:     | ANSI C63.10 (2013) Section 11.11                                                                                                                                                                                                                                                                                                                                                        |
| Limit:           | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |


### 7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C      Humidity: 56 % RH      Atmospheric Pressure: 1015 mbar

Test mode      a:TX\_ Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20/HT40). Only the data of worst case is recorded in the report.

### 7.6.2 Test Setup Diagram

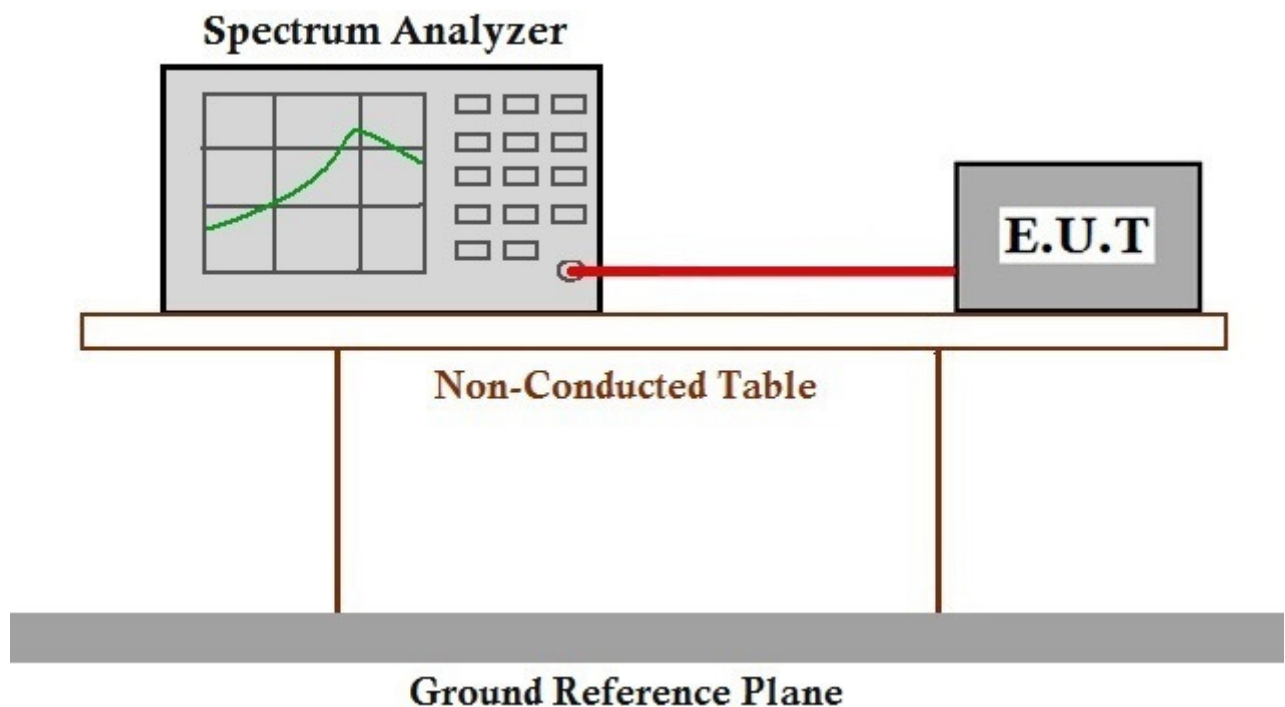

### 7.6.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

## 7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m


### 7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 54 % RH Atmospheric Pressure: 1015 mbar

Test mode a:TX\_ Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20/HT40). Only the data of worst case is recorded in the report.

### 7.7.2 Test Setup Diagram

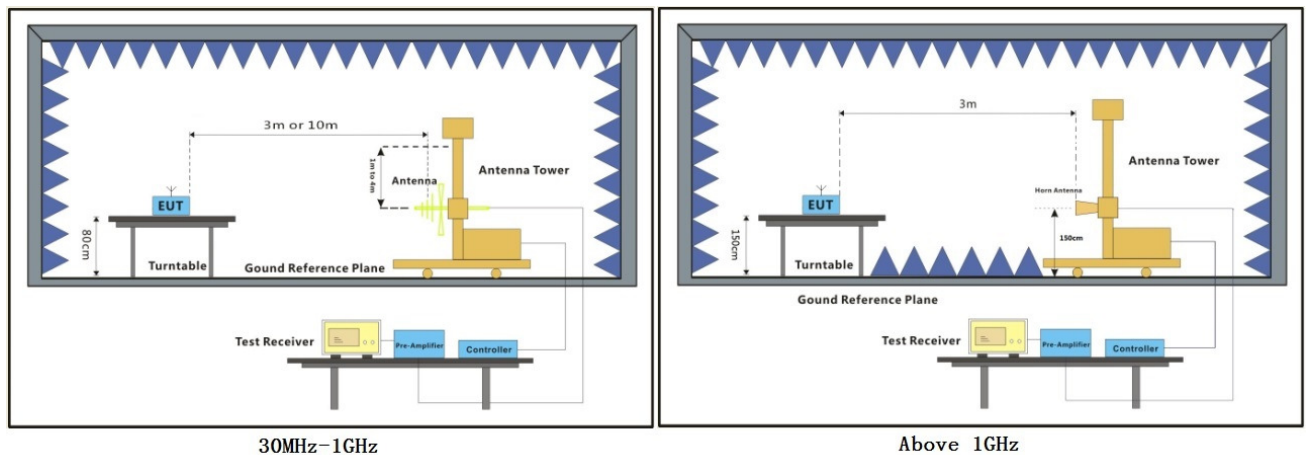




### **7.7.3 Measurement Procedure and Data**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


Mode:a; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:Low

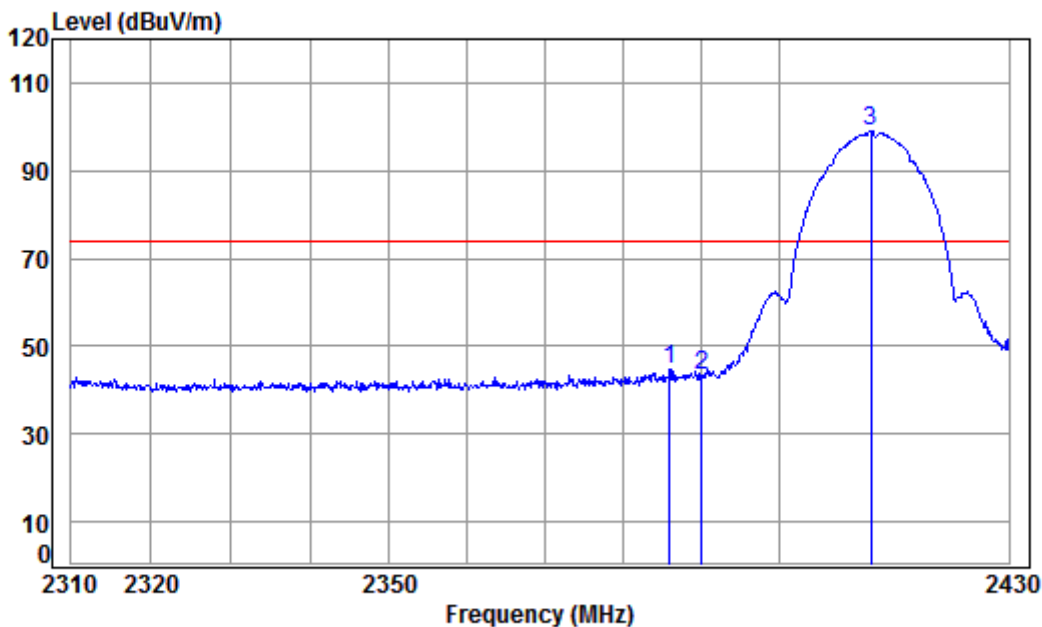

Condition: 3m HORIZONTAL  
Job No : 01605CR/01606CR  
Mode : 2412 Band edge  
Note : 2.4G WIFI-11B  
Power : 45

|      |          | Cable | Ant    | Preamp | Read   | Limit  | Over   |             |
|------|----------|-------|--------|--------|--------|--------|--------|-------------|
|      | Freq     | Loss  | Factor | Factor | Level  | Line   | Limit  | Remark      |
|      | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB          |
| 1    | 2385.857 | 5.33  | 29.06  | 37.96  | 48.25  | 44.68  | 74.00  | -29.32 peak |
| 2    | 2390.000 | 5.34  | 29.08  | 37.96  | 46.90  | 43.36  | 74.00  | -30.64 peak |
| 3 pp | 2412.000 | 5.35  | 29.14  | 37.96  | 102.48 | 99.01  | 74.00  | 25.01 peak  |

Mode:a; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:Low

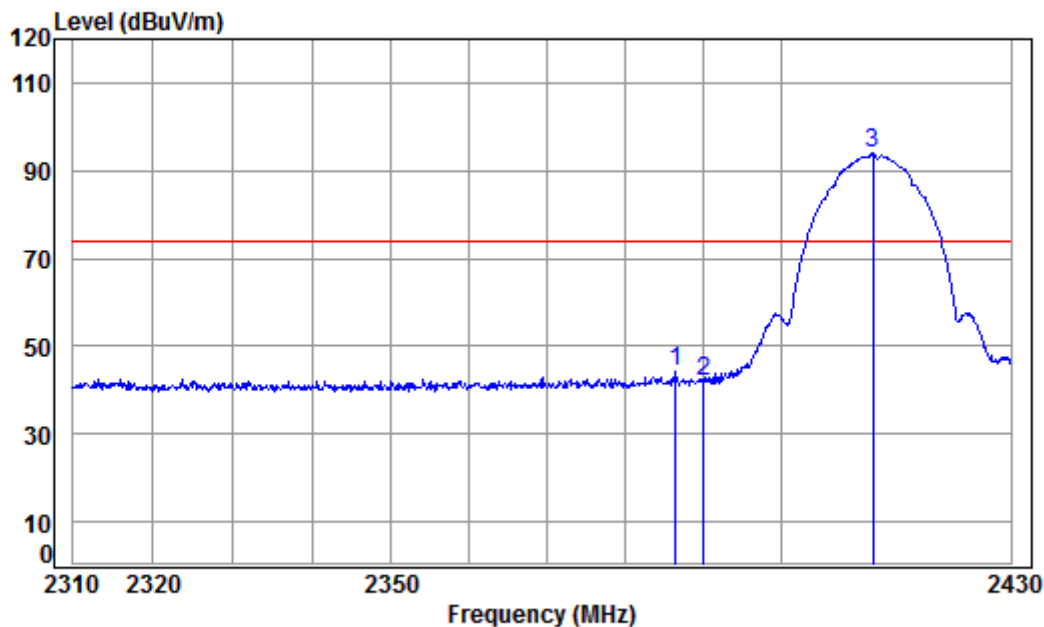

Condition: 3m VERTICAL

Job No : 01605CR/01606CR


Mode : 2412 Band edge

Note : 2.4G WIFI-11B

Power : 45

|      |          | Cable | Ant    | Preamp | Read  | Limit  | Over   |             |
|------|----------|-------|--------|--------|-------|--------|--------|-------------|
|      | Freq     | Loss  | Factor | Factor | Level | Line   | Limit  | Remark      |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB          |
| 1    | 2386.461 | 5.33  | 29.07  | 37.96  | 47.70 | 44.14  | 74.00  | -29.86 peak |
| 2    | 2390.000 | 5.34  | 29.08  | 37.96  | 45.70 | 42.16  | 74.00  | -31.84 peak |
| 3 pp | 2412.000 | 5.35  | 29.14  | 37.96  | 97.51 | 94.04  | 74.00  | 20.04 peak  |


Mode:a; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:High

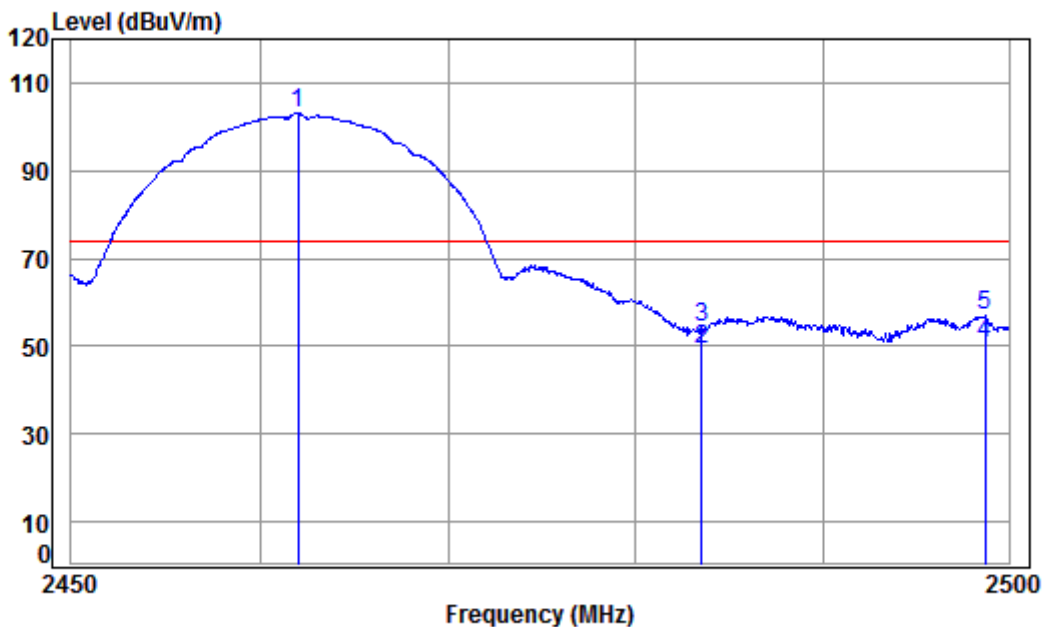

Condition: 3m HORIZONTAL  
Job No : 01605CR/01606CR  
Mode : 2462 Band edge  
Note : 2.4G WIFI-11B  
Power : 45

|   |             | Cable | Ant    | Preamp | Read   | Limit  | Over   |               |
|---|-------------|-------|--------|--------|--------|--------|--------|---------------|
|   | Freq        | Loss  | Factor | Factor | Level  | Line   | Limit  | Remark        |
|   | MHz         | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB            |
| 1 | pp 2462.000 | 5.39  | 29.29  | 37.95  | 106.35 | 103.08 | 74.00  | 29.08 peak    |
| 2 | 2483.500    | 5.41  | 29.35  | 37.95  | 52.31  | 49.12  | 54.00  | -4.88 Average |
| 3 | 2483.500    | 5.41  | 29.35  | 37.95  | 57.38  | 54.19  | 74.00  | -19.81 peak   |
| 4 | av 2498.738 | 5.42  | 29.40  | 37.95  | 53.81  | 50.68  | 54.00  | -3.32 Average |
| 5 | 2498.738    | 5.42  | 29.40  | 37.95  | 60.06  | 56.93  | 74.00  | -17.07 peak   |

Mode:a; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:High

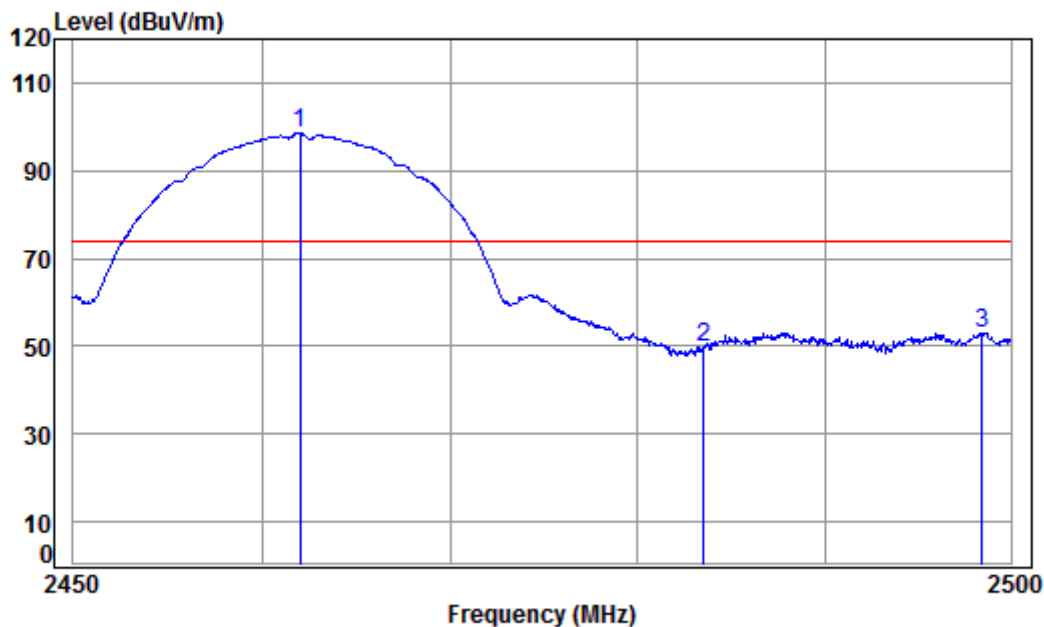

Condition: 3m VERTICAL

Job No : 01605CR/01606CR

Mode : 2462 Band edge


Note : 2.4G WIFI-11B

Power : 45

|      |          | Cable | Ant    | Preamp | Read   | Limit  | Over   |             |
|------|----------|-------|--------|--------|--------|--------|--------|-------------|
|      | Freq     | Loss  | Factor | Factor | Level  | Line   | Limit  | Remark      |
|      | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB          |
| 1 pp | 2462.000 | 5.39  | 29.29  | 37.95  | 101.83 | 98.56  | 74.00  | 24.56 peak  |
| 2    | 2483.500 | 5.41  | 29.35  | 37.95  | 52.85  | 49.66  | 74.00  | -24.34 peak |
| 3    | 2498.435 | 5.42  | 29.40  | 37.95  | 56.20  | 53.07  | 74.00  | -20.93 peak |



Mode:a; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:Low

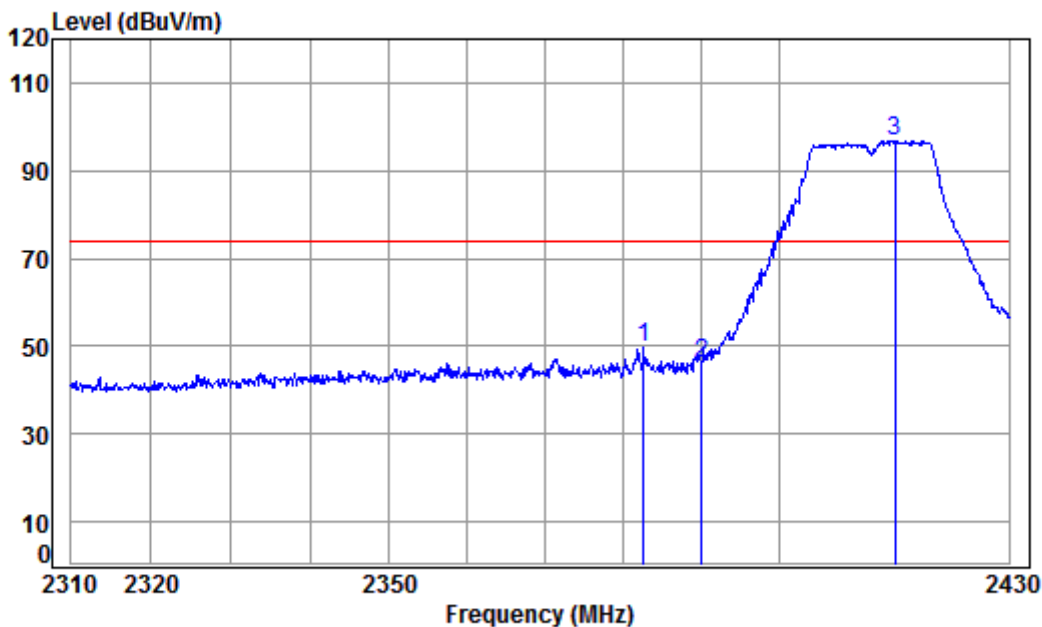


Condition: 3m HORIZONTAL  
Job No : 01605CR/01606CR  
Mode : 2412 Band edge  
Note : 2.4G WIFI-11G  
Power : 50

|      |          | Cable | Ant    | Preamp | Read   | Limit  | Over   |             |
|------|----------|-------|--------|--------|--------|--------|--------|-------------|
|      | Freq     | Loss  | Factor | Factor | Level  | Line   | Limit  | Remark      |
|      | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB          |
| 1    | 2382.476 | 5.33  | 29.05  | 37.96  | 53.21  | 49.63  | 74.00  | -24.37 peak |
| 2    | 2390.000 | 5.34  | 29.08  | 37.96  | 49.63  | 46.09  | 74.00  | -27.91 peak |
| 3 pp | 2415.032 | 5.36  | 29.15  | 37.96  | 100.33 | 96.88  | 74.00  | 22.88 peak  |



Mode:a; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:Low

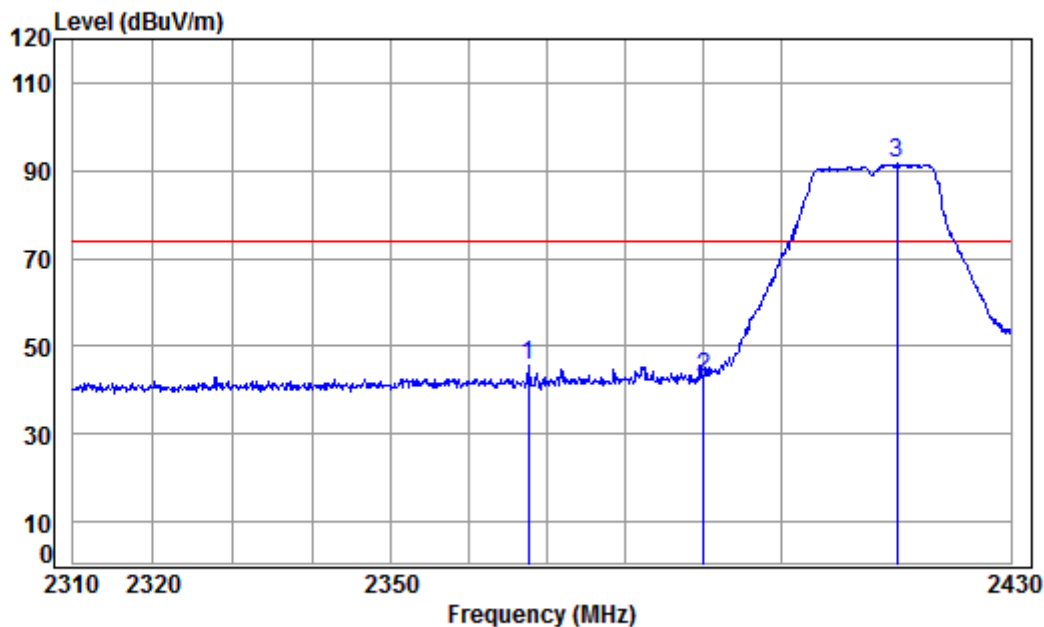

Condition: 3m VERTICAL

Job No : 01605CR/01606CR


Mode : 2412 Band edge

Note : 2.4G WIFI-11G

Power : 50

|      |          | Cable | Ant    | Preamp | Read  | Limit  | Over   |             |
|------|----------|-------|--------|--------|-------|--------|--------|-------------|
|      | Freq     | Loss  | Factor | Factor | Level | Line   | Limit  | Remark      |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB          |
| 1    | 2367.561 | 5.32  | 29.01  | 37.96  | 49.28 | 45.65  | 74.00  | -28.35 peak |
| 2    | 2390.000 | 5.34  | 29.08  | 37.96  | 46.41 | 42.87  | 74.00  | -31.13 peak |
| 3 pp | 2415.032 | 5.36  | 29.15  | 37.96  | 94.93 | 91.48  | 74.00  | 17.48 peak  |

Mode:a; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:High

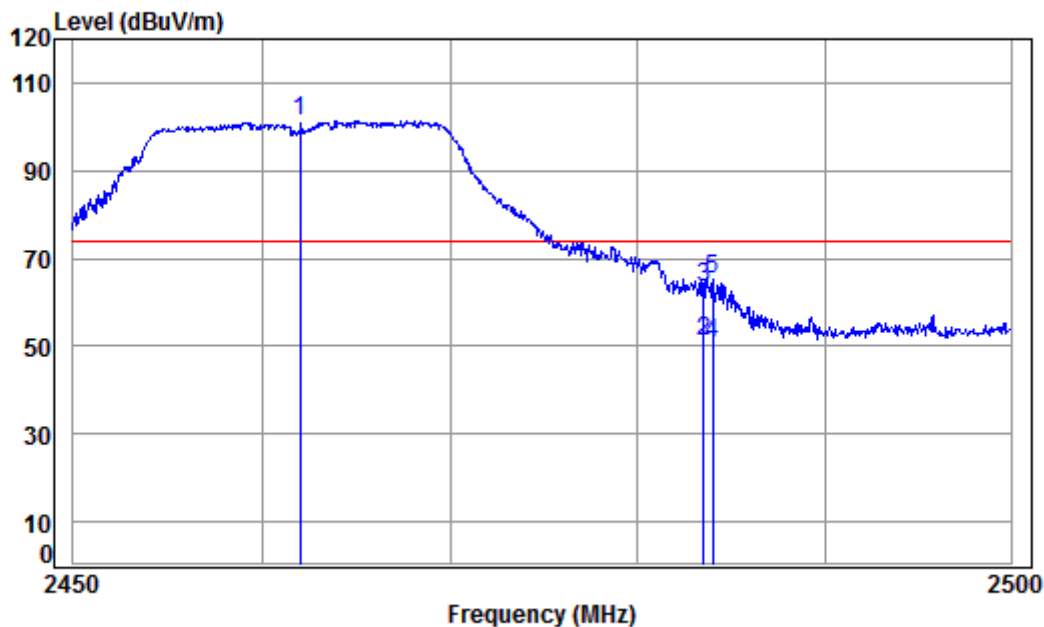

Condition: 3m HORIZONTAL

Job No : 01605CR/01606CR


Mode : 2462 Band edge

Note : 2.4G WIFI-11G

Power : 50

|   |             | Cable | Ant    | Preamp | Read   | Limit  | Over   |               |
|---|-------------|-------|--------|--------|--------|--------|--------|---------------|
|   | Freq        | Loss  | Factor | Factor | Level  | Line   | Limit  | Remark        |
|   | MHz         | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB            |
| 1 | pp 2462.000 | 5.39  | 29.29  | 37.95  | 104.52 | 101.25 | 74.00  | 27.25 peak    |
| 2 | av 2483.500 | 5.41  | 29.35  | 37.95  | 54.48  | 51.29  | 54.00  | -2.71 Average |
| 3 | 2483.500    | 5.41  | 29.35  | 37.95  | 66.45  | 63.26  | 74.00  | -10.74 peak   |
| 4 | 2483.990    | 5.41  | 29.35  | 37.95  | 53.61  | 50.42  | 54.00  | -3.58 Average |
| 5 | 2483.990    | 5.41  | 29.35  | 37.95  | 68.41  | 65.22  | 74.00  | -8.78 peak    |

Mode:a; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:High

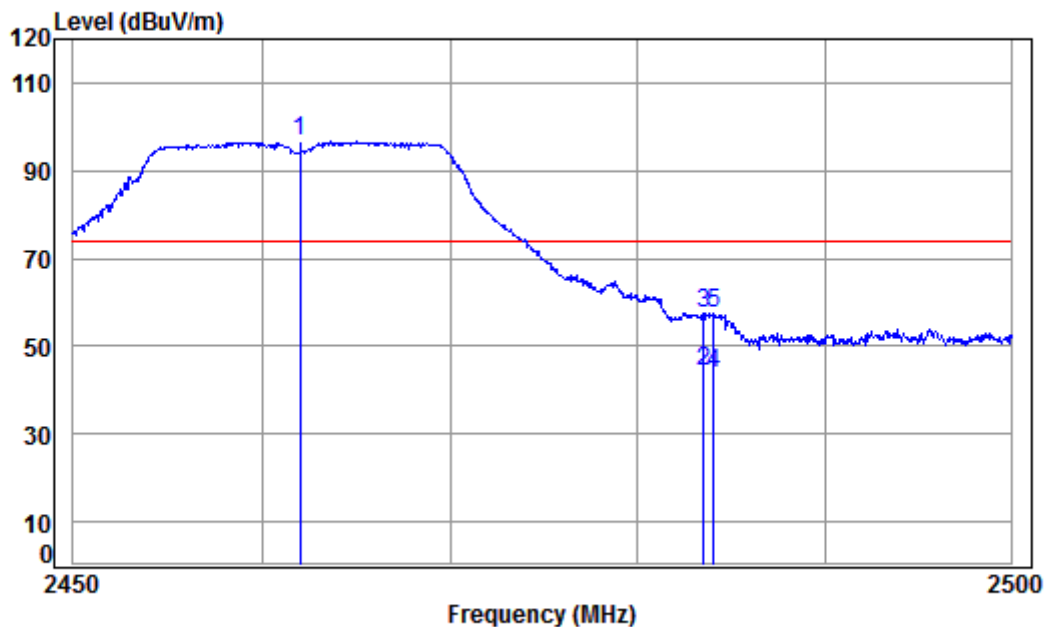

Condition: 3m VERTICAL

Job No : 01605CR/01606CR

Mode : 2462 Band edge


Note : 2.4G WIFI-11G

Power : 50

|   |             | Cable | Ant    | Preamp | Read  | Limit  | Over   |                |
|---|-------------|-------|--------|--------|-------|--------|--------|----------------|
|   | Freq        | Loss  | Factor | Factor | Level | Line   | Limit  | Remark         |
|   | MHz         | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB             |
| 1 | pp 2462.000 | 5.39  | 29.29  | 37.95  | 99.85 | 96.58  | 74.00  | 22.58 peak     |
| 2 | av 2483.500 | 5.41  | 29.35  | 37.95  | 47.60 | 44.41  | 54.00  | -9.59 Average  |
| 3 | 2483.500    | 5.41  | 29.35  | 37.95  | 60.66 | 57.47  | 74.00  | -16.53 peak    |
| 4 | 2484.041    | 5.41  | 29.35  | 37.95  | 47.01 | 43.82  | 54.00  | -10.18 Average |
| 5 | 2484.041    | 5.41  | 29.35  | 37.95  | 60.81 | 57.62  | 74.00  | -16.38 peak    |



Mode:a; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:Low

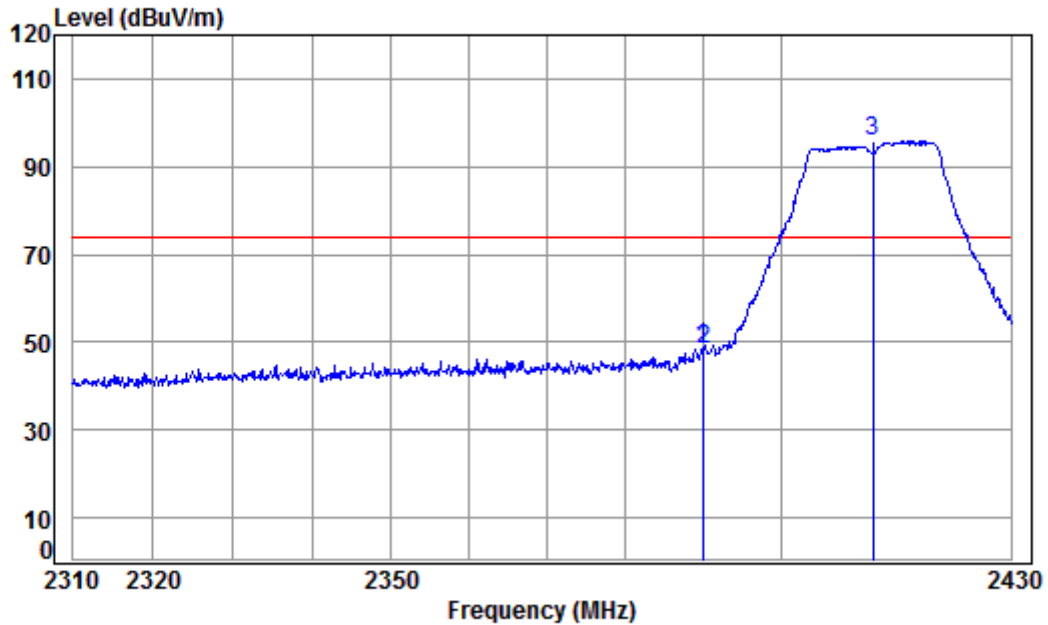

Condition: 3m HORIZONTAL

Job No : 01605CR/01606CR


Mode : 2412 Band edge

Note : 2.4G WIFI-11N20

Power : 48

|      |          | Cable | Ant    | Preamp | Read  | Limit  | Over   |             |
|------|----------|-------|--------|--------|-------|--------|--------|-------------|
|      | Freq     | Loss  | Factor | Factor | Level | Line   | Limit  | Remark      |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB          |
| 1    | 2389.847 | 5.34  | 29.08  | 37.96  | 52.37 | 48.83  | 74.00  | -25.17 peak |
| 2    | 2390.000 | 5.34  | 29.08  | 37.96  | 52.12 | 48.58  | 74.00  | -25.42 peak |
| 3 pp | 2412.000 | 5.35  | 29.14  | 37.96  | 99.17 | 95.70  | 74.00  | 21.70 peak  |

Mode:a; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:Low

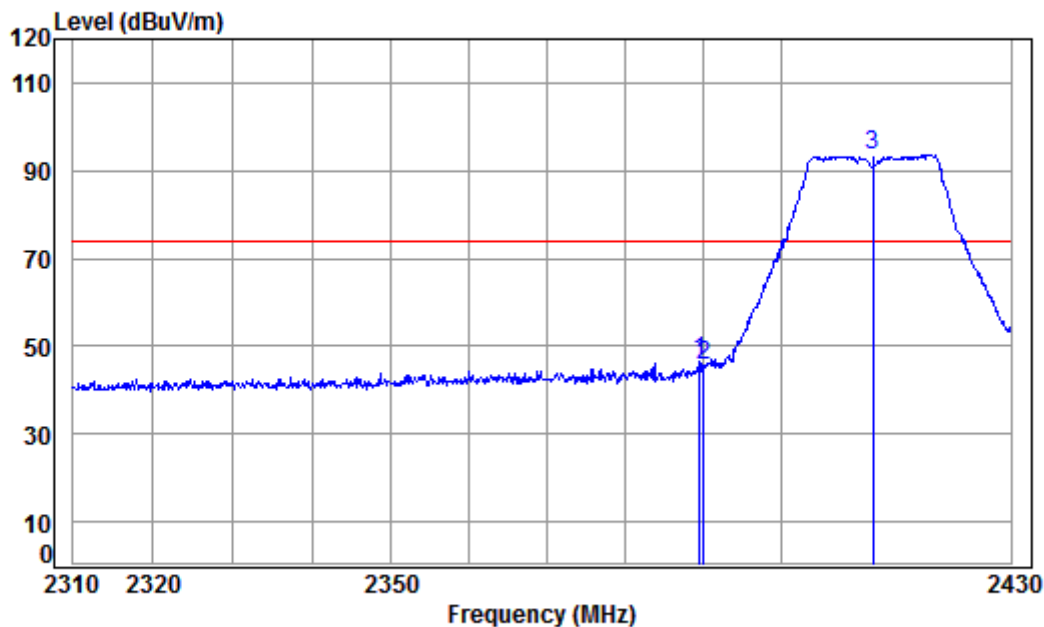

Condition: 3m VERTICAL

Job No : 01605CR/01606CR


Mode : 2412 Band edge

Note : 2.4G WIFI-11N20

Power : 48

|      |          | Cable | Ant    | Preamp | Read  | Limit  | Over   |             |
|------|----------|-------|--------|--------|-------|--------|--------|-------------|
|      | Freq     | Loss  | Factor | Factor | Level | Line   | Limit  | Remark      |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB          |
| 1    | 2389.484 | 5.34  | 29.08  | 37.96  | 50.18 | 46.64  | 74.00  | -27.36 peak |
| 2    | 2390.000 | 5.34  | 29.08  | 37.96  | 49.09 | 45.55  | 74.00  | -28.45 peak |
| 3 pp | 2412.000 | 5.35  | 29.14  | 37.96  | 97.14 | 93.67  | 74.00  | 19.67 peak  |

Mode:a; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:High

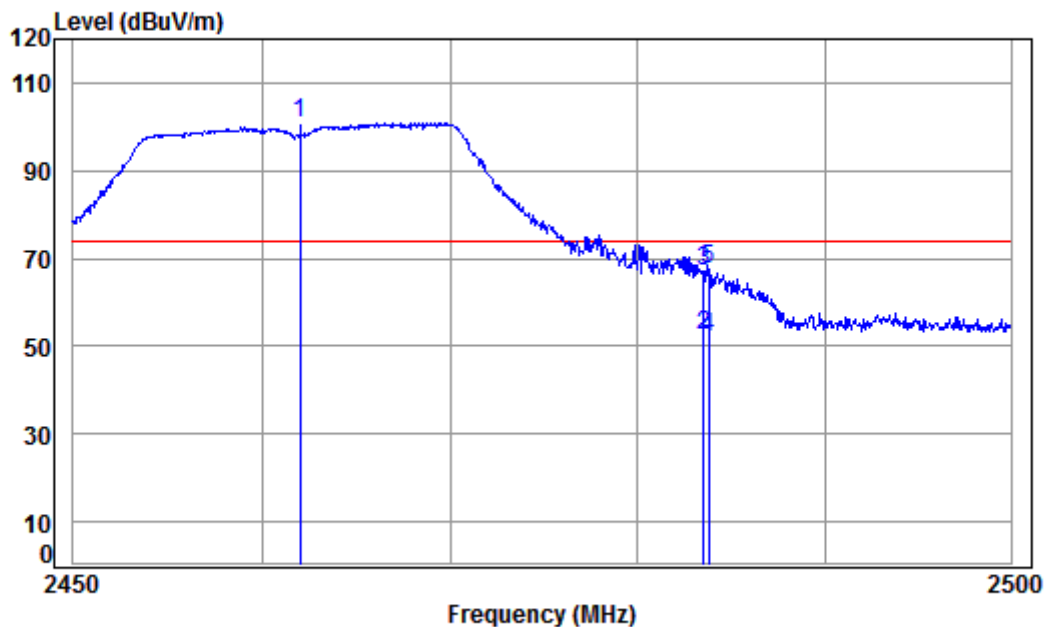

Condition: 3m HORIZONTAL

Job No : 01605CR/01606CR


Mode : 2462 Band edge

Note : 2.4G WIFI-11N20

Power : 48

|   |             | Cable | Ant    | Preamp | Read   | Limit  | Over   |               |
|---|-------------|-------|--------|--------|--------|--------|--------|---------------|
|   | Freq        | Loss  | Factor | Factor | Level  | Line   | Limit  | Remark        |
|   | MHz         | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB            |
| 1 | pp 2462.000 | 5.39  | 29.29  | 37.95  | 104.03 | 100.76 | 74.00  | 26.76 peak    |
| 2 | av 2483.500 | 5.41  | 29.35  | 37.95  | 55.63  | 52.44  | 54.00  | -1.56 Average |
| 3 | 2483.500    | 5.41  | 29.35  | 37.95  | 70.12  | 66.93  | 74.00  | -7.07 peak    |
| 4 | 2483.790    | 5.41  | 29.35  | 37.95  | 55.30  | 52.11  | 54.00  | -1.89 Average |
| 5 | 2483.790    | 5.41  | 29.35  | 37.95  | 70.70  | 67.51  | 74.00  | -6.49 peak    |

Mode:a; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:High

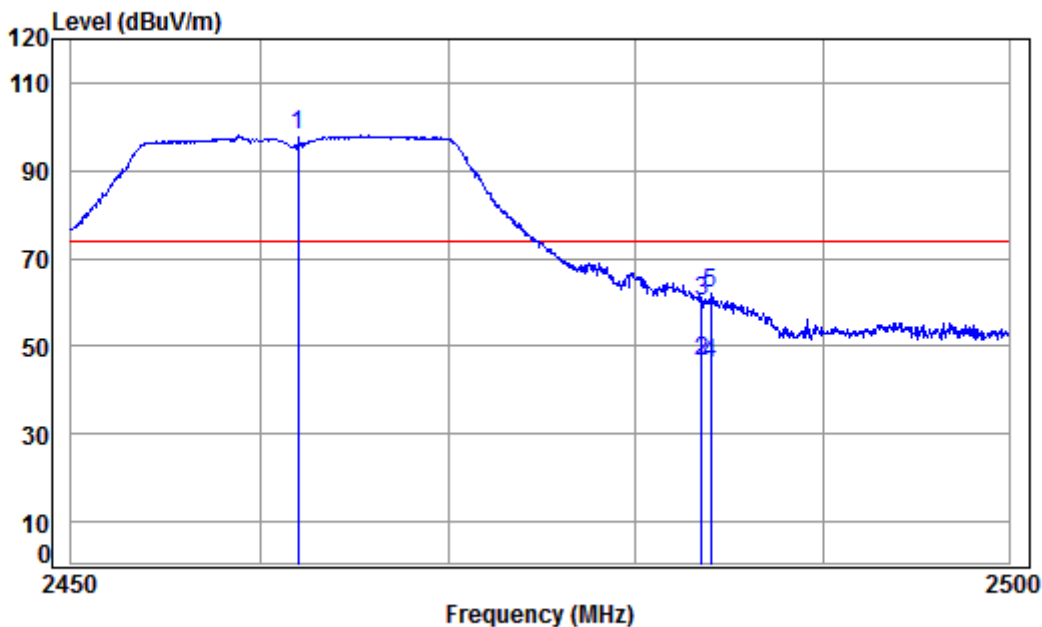

Condition: 3m VERTICAL

Job No : 01605CR/01606CR

Mode : 2462 Band edge


Note : 2.4G WIFI-11N20

Power : 48

|      |          | Cable | Ant    | Preamp | Read   | Limit  | Over   |               |
|------|----------|-------|--------|--------|--------|--------|--------|---------------|
|      | Freq     | Loss  | Factor | Factor | Level  | Line   | Limit  | Remark        |
|      | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB            |
| 1 pp | 2462.000 | 5.39  | 29.29  | 37.95  | 101.26 | 97.99  | 74.00  | 23.99 peak    |
| 2 av | 2483.500 | 5.41  | 29.35  | 37.95  | 49.93  | 46.74  | 54.00  | -7.26 Average |
| 3    | 2483.500 | 5.41  | 29.35  | 37.95  | 63.58  | 60.39  | 74.00  | -13.61 peak   |
| 4    | 2483.990 | 5.41  | 29.35  | 37.95  | 49.49  | 46.30  | 54.00  | -7.70 Average |
| 5    | 2483.990 | 5.41  | 29.35  | 37.95  | 65.21  | 62.02  | 74.00  | -11.98 peak   |




Mode:a; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:Low

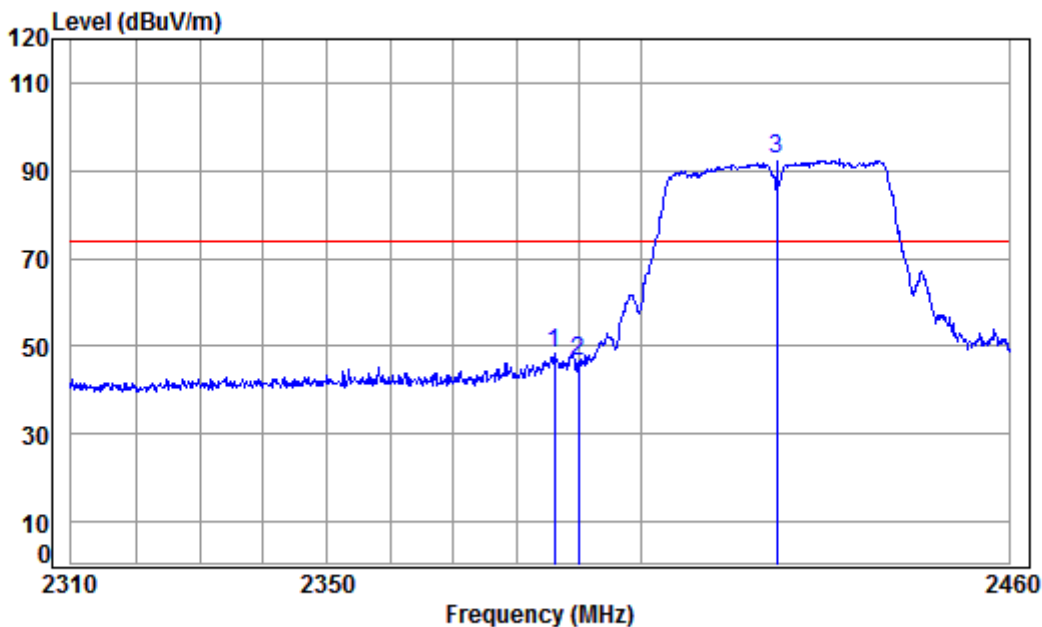

Condition: 3m HORIZONTAL  
Job No : 01605CR/01606CR  
Mode : 2422 Band edge  
Note : 2.4G WIFI-11N40  
Power : 48

|      |          | Cable | Ant    | Preamp | Read  | Limit  | Over   |              |
|------|----------|-------|--------|--------|-------|--------|--------|--------------|
|      | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB           |
| 1    | 2386.071 | 5.33  | 29.07  | 37.96  | 51.88 | 48.32  | 74.00  | -25.68 peak  |
| 2    | 2390.000 | 5.34  | 29.08  | 37.96  | 49.90 | 46.36  | 74.00  | -27.64 peak  |
| 3 pp | 2422.000 | 5.36  | 29.17  | 37.96  | 95.91 | 92.48  | 74.00  | 18.48 peak   |

Mode:a; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:Low

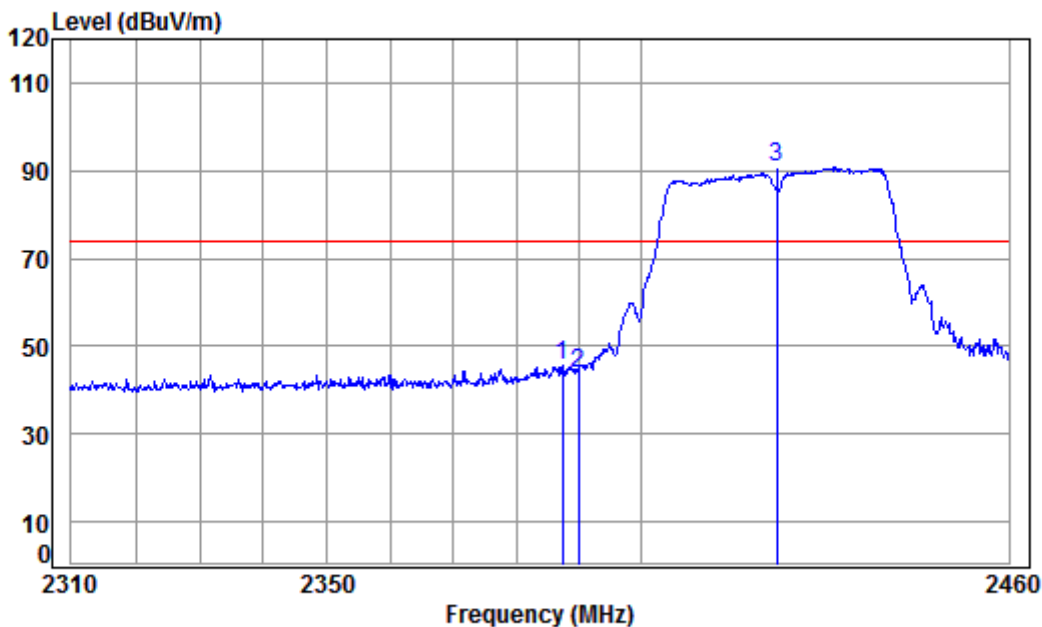

Condition: 3m VERTICAL

Job No : 01605CR/01606CR


Mode : 2422 Band edge

Note : 2.4G WIFI-11N40

Power : 48

|      |          | Cable | Ant    | Preamp | Read  | Limit  | Over   |             |
|------|----------|-------|--------|--------|-------|--------|--------|-------------|
|      | Freq     | Loss  | Factor | Factor | Level | Line   | Limit  | Remark      |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB          |
| 1    | 2387.423 | 5.34  | 29.07  | 37.96  | 49.35 | 45.80  | 74.00  | -28.20 peak |
| 2    | 2390.000 | 5.34  | 29.08  | 37.96  | 47.51 | 43.97  | 74.00  | -30.03 peak |
| 3 pp | 2422.000 | 5.36  | 29.17  | 37.96  | 94.08 | 90.65  | 74.00  | 16.65 peak  |

Mode:a; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:High

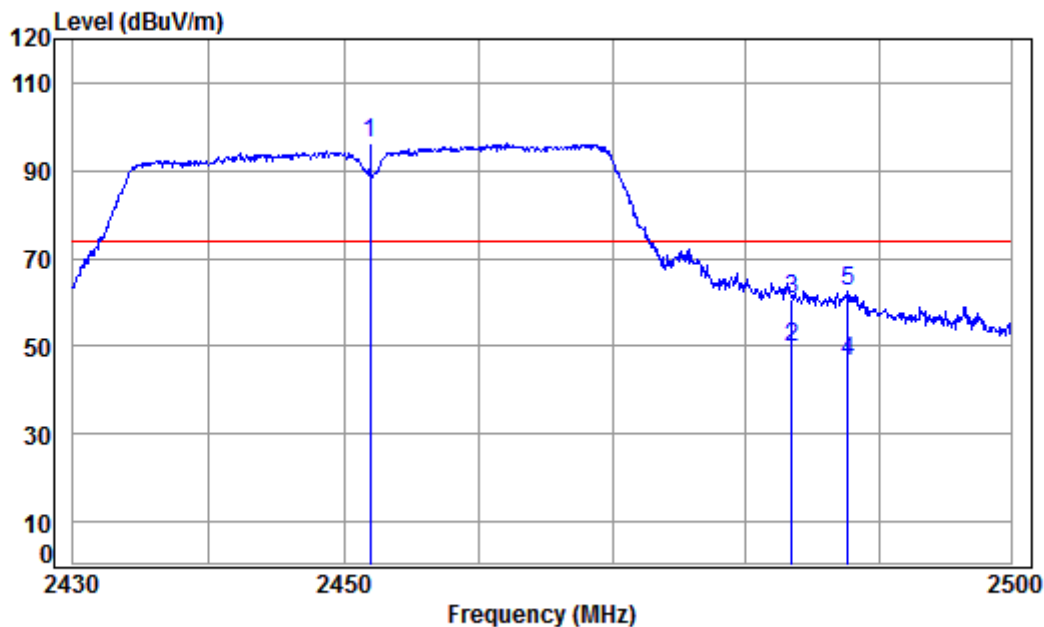

Condition: 3m HORIZONTAL

Job No : 01605CR/01606CR


Mode : 2452 Band edge

Note : 2.4G WIFI-11N40

Power : 48

|   |             | Cable | Ant    | Preamp | Read  | Limit  | Over   |               |
|---|-------------|-------|--------|--------|-------|--------|--------|---------------|
|   | Freq        | Loss  | Factor | Factor | Level | Line   | Limit  | Remark        |
|   | MHz         | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB            |
| 1 | pp 2452.000 | 5.38  | 29.26  | 37.95  | 99.45 | 96.14  | 74.00  | 22.14 peak    |
| 2 | av 2483.500 | 5.41  | 29.35  | 37.95  | 52.77 | 49.58  | 54.00  | -4.42 Average |
| 3 | 2483.500    | 5.41  | 29.35  | 37.95  | 64.09 | 60.90  | 74.00  | -13.10 peak   |
| 4 | 2487.677    | 5.41  | 29.36  | 37.95  | 49.49 | 46.31  | 54.00  | -7.69 Average |
| 5 | 2487.677    | 5.41  | 29.36  | 37.95  | 65.86 | 62.68  | 74.00  | -11.32 peak   |

Mode:a; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:High

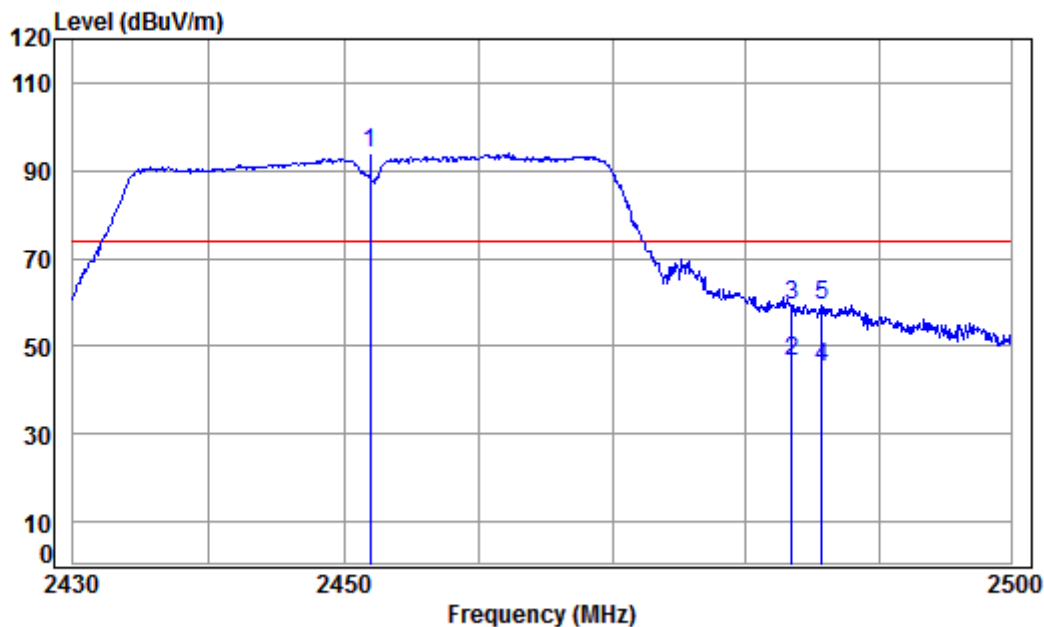

Condition: 3m VERTICAL

Job No : 01605CR/01606CR

Mode : 2452 Band edge

Note : 2.4G WIFI-11N40

Power : 48

|   |             | Cable | Ant    | Preamp | Read  | Limit  | Over   |               |
|---|-------------|-------|--------|--------|-------|--------|--------|---------------|
|   | Freq        | Loss  | Factor | Factor | Level | Line   | Limit  | Remark        |
|   | MHz         | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB            |
| 1 | pp 2452.000 | 5.38  | 29.26  | 37.95  | 97.25 | 93.94  | 74.00  | 19.94 peak    |
| 2 | av 2483.500 | 5.41  | 29.35  | 37.95  | 49.75 | 46.56  | 54.00  | -7.44 Average |
| 3 | 2483.500    | 5.41  | 29.35  | 37.95  | 62.41 | 59.22  | 74.00  | -14.78 peak   |
| 4 | 2485.699    | 5.41  | 29.36  | 37.95  | 48.22 | 45.04  | 54.00  | -8.96 Average |
| 5 | 2485.699    | 5.41  | 29.36  | 37.95  | 62.62 | 59.44  | 74.00  | -14.56 peak   |



## 7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)

Test Method: ANSI C63.10 (2013) Section 6.10.4

Measurement Distance: 10m

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490    | 2400/F(kHz)                      | 300                          |
| 0.490-1.705    | 24000/F(kHz)                     | 30                           |
| 1.705-30.0     | 30                               | 30                           |
| 30-88          | 100                              | 3                            |
| 88-216         | 150                              | 3                            |
| 216-960        | 200                              | 3                            |
| Above 960      | 500                              | 3                            |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


### 7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C Humidity: 54 % RH Atmospheric Pressure: 1015 mbar

Test mode a:TX\_ Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20/HT40). Only the data of worst case is recorded in the report.

### 7.8.2 Test Setup Diagram

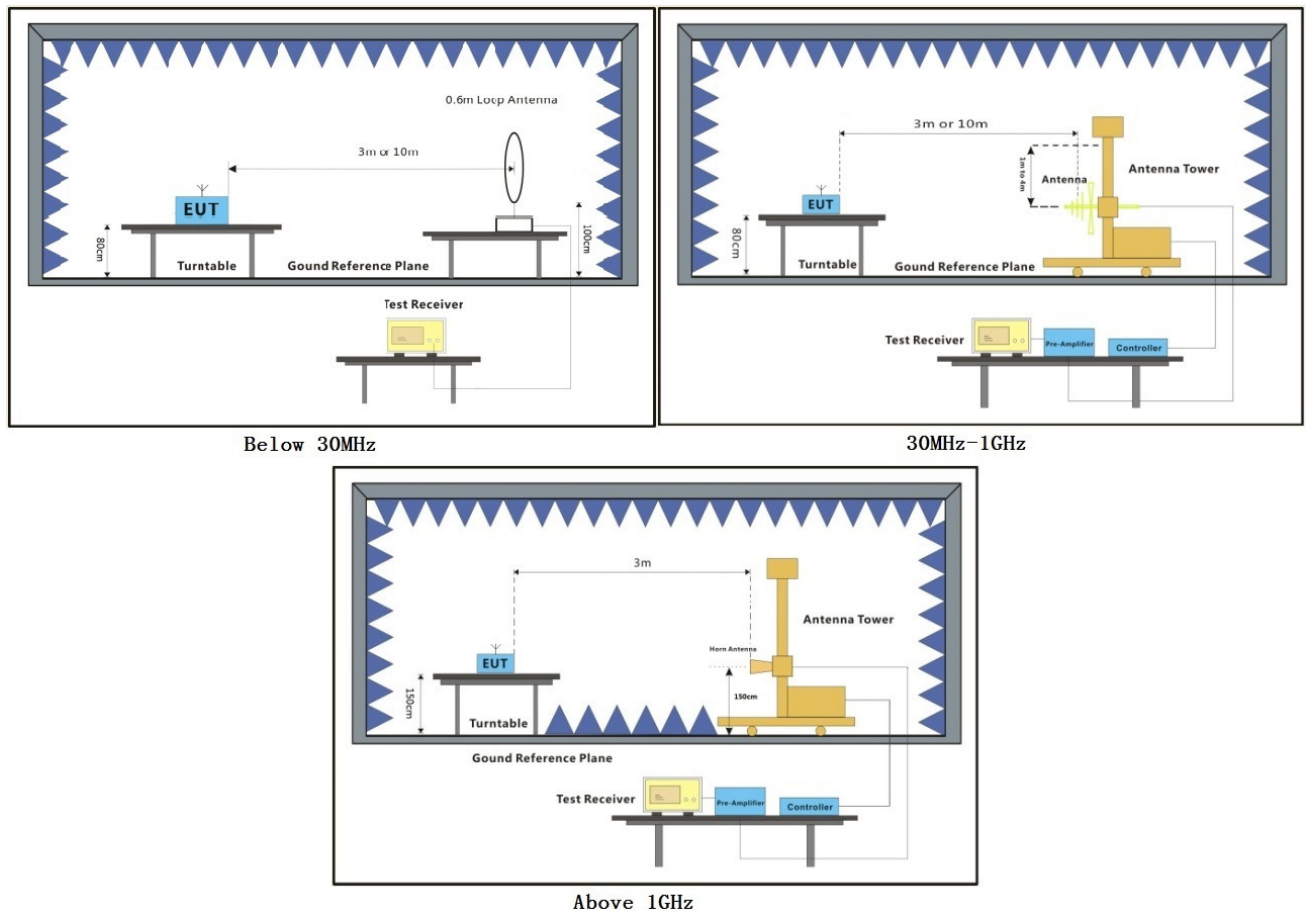




### **7.8.3 Measurement Procedure and Data**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor



Mode:a; Polarization:Horizontal; Modulation Type:802.11b

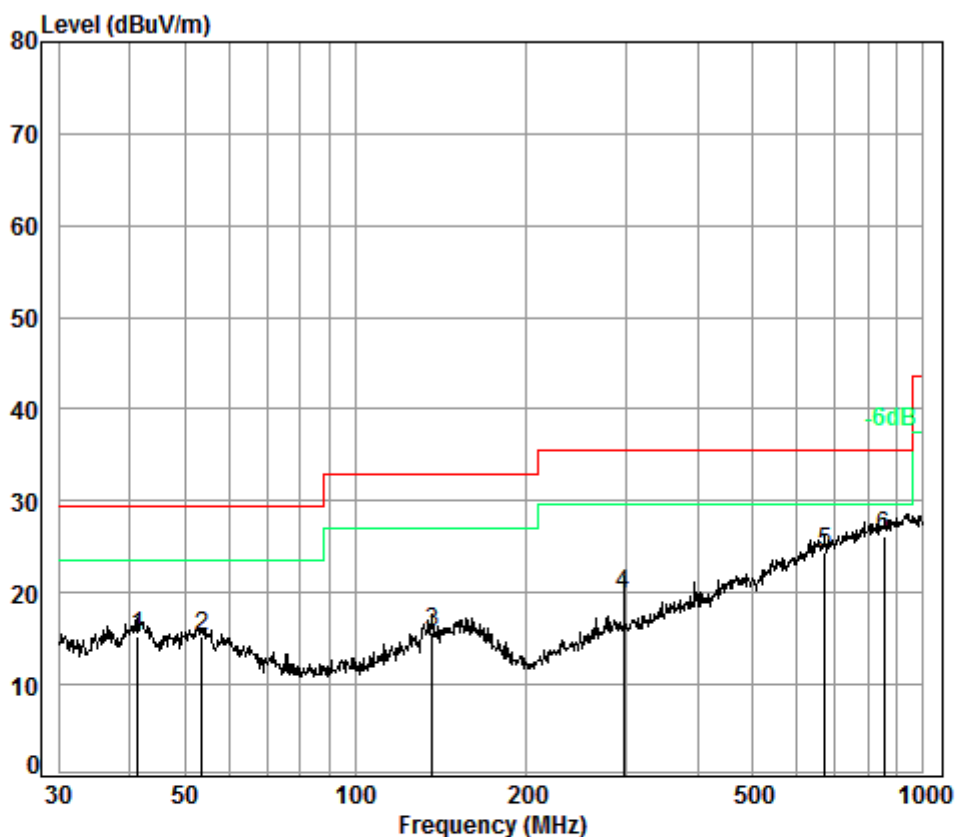


Condition: 10m HORIZONTAL

Job No. : 01605CR

Test Mode: a

|      | Freq   | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit Line | Over Limit |
|------|--------|------------|------------|---------------|------------|--------|------------|------------|
|      | MHz    | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m     | dB         |
| 1    | 41.42  | 6.80       | 13.20      | 32.99         | 28.17      | 15.18  | 29.50      | -14.32     |
| 2    | 53.69  | 6.97       | 12.48      | 32.98         | 28.69      | 15.16  | 29.50      | -14.34     |
| 3    | 136.46 | 7.38       | 12.51      | 32.76         | 28.54      | 15.67  | 33.00      | -17.33     |
| 4    | 297.22 | 8.04       | 12.59      | 32.60         | 31.75      | 19.78  | 35.60      | -15.82     |
| 5    | 670.49 | 9.08       | 19.79      | 32.60         | 28.05      | 24.32  | 35.60      | -11.28     |
| 6 pp | 854.02 | 9.37       | 21.65      | 32.54         | 27.65      | 26.13  | 35.60      | -9.47      |

Mode:a; Polarization:vertical; Modulation Type:802.11b

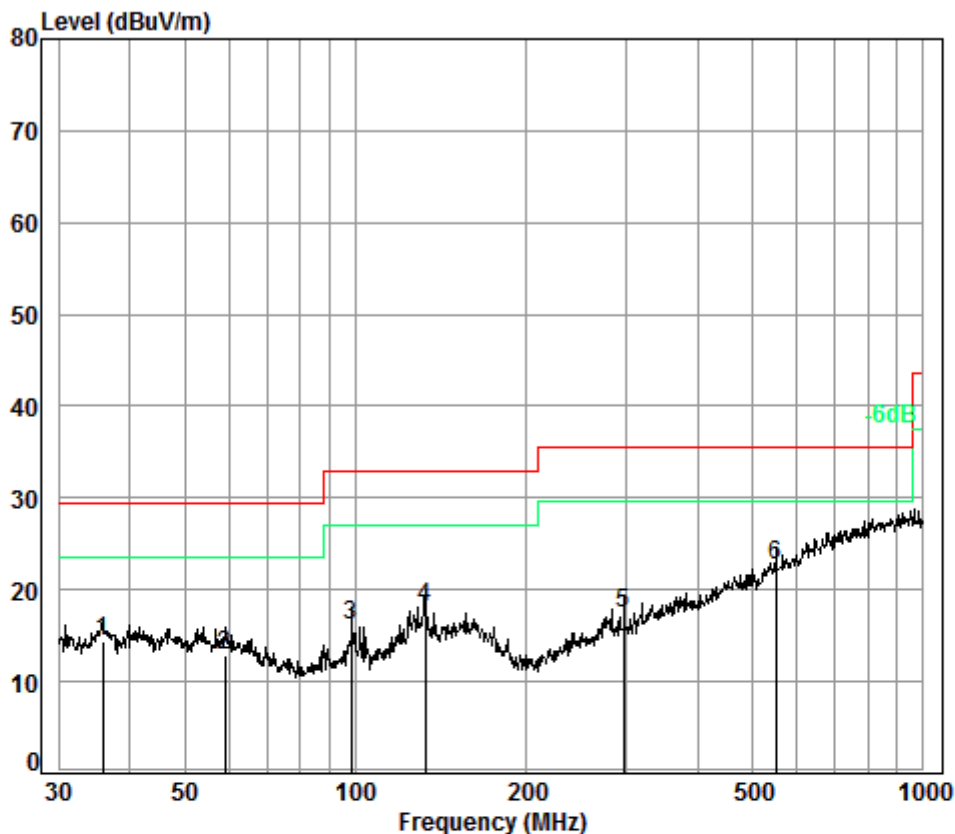

Condition: 10m VERTICAL

Job No. : 01605CR

Test Mode: a

|      | Freq   | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit Line | Over Limit |
|------|--------|------------|------------|---------------|------------|--------|------------|------------|
|      | MHz    | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m     | dB         |
| 1    | 35.87  | 6.72       | 12.77      | 32.98         | 27.96      | 14.47  | 29.50      | -15.03     |
| 2    | 58.82  | 7.00       | 12.09      | 32.95         | 26.77      | 12.91  | 29.50      | -16.59     |
| 3    | 98.49  | 7.20       | 9.29       | 32.80         | 32.36      | 16.05  | 33.00      | -16.95     |
| 4    | 132.69 | 7.37       | 12.23      | 32.76         | 31.21      | 18.05  | 33.00      | -14.95     |
| 5    | 297.22 | 8.04       | 12.59      | 32.60         | 29.43      | 17.46  | 35.60      | -18.14     |
| 6 pp | 550.95 | 8.78       | 17.75      | 32.60         | 28.80      | 22.73  | 35.60      | -12.87     |



**Below 1GHz**

The test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

$$L_3 / L_{10} = D_{10} / D_3$$

Note:

$L_3$ : Level @ 3m distance. Unit: uV/m;

$L_{10}$ : Level @ 10m distance. Unit: uV/m;

$D_3$ : 3m distance. Unit: m

$D_{10}$ : 10m distance. Unit: m

The level at 3m test distance is below:

| Frequency (MHz) | Level @ 10m (dBuV/m) | Level @ 10m (uV/m) | Level @ 3m (uV/m) | Level @ 3m (dBuV/m) | Limit @ 3m (dBuV/m) | Margin (dB) | Ant. Polarization |
|-----------------|----------------------|--------------------|-------------------|---------------------|---------------------|-------------|-------------------|
| 35.87           | 14.47                | 5.29               | 17.64             | 24.93               | 40.00               | -15.07      | V                 |
| 58.82           | 12.91                | 4.42               | 14.74             | 23.37               | 40.00               | -16.63      | V                 |
| 98.49           | 16.05                | 6.35               | 21.15             | 26.51               | 43.50               | -16.99      | V                 |
| 132.69          | 18.05                | 7.99               | 26.63             | 28.51               | 43.50               | -14.99      | V                 |
| 297.22          | 17.46                | 7.46               | 24.88             | 27.92               | 46.00               | -18.08      | V                 |
| 550.95          | 22.73                | 13.69              | 45.64             | 33.19               | 46.00               | -12.81      | V                 |
| 41.42           | 15.18                | 5.74               | 19.14             | 25.64               | 40.00               | -14.36      | H                 |
| 53.69           | 15.16                | 5.73               | 19.09             | 25.62               | 40.00               | -14.38      | H                 |
| 136.46          | 15.67                | 6.07               | 20.25             | 26.13               | 43.50               | -17.37      | H                 |
| 297.22          | 19.78                | 9.75               | 32.50             | 30.24               | 46.00               | -15.76      | H                 |
| 670.49          | 24.32                | 16.44              | 54.81             | 34.78               | 46.00               | -11.22      | H                 |
| 854.02          | 26.13                | 20.25              | 67.51             | 36.59               | 46.00               | -9.41       | H                 |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170300160501

Page: 48 of 102

Mode:a; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:Low

| Freq (MHz) | Antenna_Factor<br>(dB/m) | Cable_Loss<br>(dB) | Preamplifier_Gain<br>(dB) | Read_Level<br>(dBuV) | Level<br>(dBuV/m) | Limit_Line<br>(dBuV/m) | Over_Limit<br>(dB) |
|------------|--------------------------|--------------------|---------------------------|----------------------|-------------------|------------------------|--------------------|
| 1354.577   | 25.20                    | 4.29               | 38.06                     | 43.52                | 35.45             | 74.00                  | -38.55             |
| 3186.869   | 31.65                    | 6.08               | 37.92                     | 45.41                | 45.86             | 74.00                  | -28.14             |
| 4824.000   | 34.18                    | 7.75               | 38.41                     | 46.89                | 50.80             | 74.00                  | -23.20             |
| 7236.000   | 36.40                    | 9.68               | 37.08                     | 42.69                | 51.94             | 74.00                  | -22.06             |
| 9648.000   | 37.53                    | 11.09              | 35.08                     | 38.06                | 52.05             | 74.00                  | -21.95             |
| 15398.830  | 41.38                    | 15.17              | 38.46                     | 34.40                | 53.08             | 74.00                  | -20.92             |

Mode:a; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:Low

| Freq (MHz) | Antenna_Factor<br>(dB/m) | Cable_Loss<br>(dB) | Preamplifier_Gain<br>(dB) | Read_Level<br>(dBuV) | Level<br>(dBuV/m) | Limit_Line<br>(dBuV/m) | Over_Limit<br>(dB) |
|------------|--------------------------|--------------------|---------------------------|----------------------|-------------------|------------------------|--------------------|
| 1335.141   | 25.11                    | 4.27               | 38.07                     | 49.99                | 41.80             | 74.00                  | -32.20             |
| 3485.601   | 32.18                    | 6.29               | 37.95                     | 44.55                | 45.61             | 74.00                  | -28.39             |
| 4824.000   | 34.18                    | 7.75               | 38.41                     | 46.81                | 50.72             | 74.00                  | -23.28             |
| 7236.000   | 36.40                    | 9.68               | 37.08                     | 42.90                | 52.15             | 74.00                  | -21.85             |
| 9648.000   | 37.53                    | 11.09              | 35.08                     | 38.10                | 52.09             | 74.00                  | -21.91             |
| 12361.950  | 38.82                    | 12.94              | 36.47                     | 37.13                | 53.07             | 74.00                  | -20.93             |

Mode:a; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:middle

| Freq (MHz) | Antenna_Factor<br>(dB/m) | Cable_Loss<br>(dB) | Preamplifier_Gain<br>(dB) | Read_Level<br>(dBuV) | Level<br>(dBuV/m) | Limit_Line<br>(dBuV/m) | Over_Limit<br>(dB) |
|------------|--------------------------|--------------------|---------------------------|----------------------|-------------------|------------------------|--------------------|
| 1592.571   | 26.22                    | 4.58               | 38.04                     | 44.82                | 38.07             | 74.00                  | -35.93             |
| 2990.531   | 31.27                    | 5.92               | 37.90                     | 45.19                | 45.69             | 74.00                  | -28.31             |
| 4874.000   | 34.28                    | 7.83               | 38.44                     | 42.59                | 46.67             | 74.00                  | -27.33             |
| 7311.000   | 36.38                    | 9.72               | 37.03                     | 43.17                | 52.48             | 74.00                  | -21.52             |
| 9748.000   | 37.55                    | 11.20              | 35.02                     | 38.58                | 52.77             | 74.00                  | -21.23             |
| 14491.960  | 40.38                    | 14.72              | 38.95                     | 36.77                | 53.48             | 74.00                  | -20.52             |

Mode:a; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:middle

| Freq (MHz) | Antenna_Factor<br>(dB/m) | Cable_Loss<br>(dB) | Preamplifier_Gain<br>(dB) | Read_Level<br>(dBuV) | Level<br>(dBuV/m) | Limit_Line<br>(dBuV/m) | Over_Limit<br>(dB) |
|------------|--------------------------|--------------------|---------------------------|----------------------|-------------------|------------------------|--------------------|
| 1910.650   | 27.48                    | 4.92               | 38.01                     | 44.64                | 40.00             | 74.00                  | -34.00             |
| 3465.510   | 32.14                    | 6.28               | 37.95                     | 43.80                | 44.81             | 74.00                  | -29.19             |
| 4874.000   | 34.28                    | 7.83               | 38.44                     | 45.05                | 49.13             | 74.00                  | -24.87             |
| 7311.000   | 36.38                    | 9.72               | 37.03                     | 41.86                | 51.17             | 74.00                  | -22.83             |
| 9748.000   | 37.55                    | 11.20              | 35.02                     | 38.02                | 52.21             | 74.00                  | -21.79             |
| 12326.270  | 38.80                    | 12.89              | 36.38                     | 37.26                | 53.23             | 74.00                  | -20.77             |



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170300160501

Page: 49 of 102

Mode:a; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:High

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamp_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------|-------------------|----------------|---------------------|-----------------|
| 1477.276   | 25.71                 | 4.44            | 38.05            | 42.46             | 35.04          | 74.00               | -38.96          |
| 3318.471   | 31.89                 | 6.17            | 37.93            | 43.08             | 43.80          | 74.00               | -30.20          |
| 4924.000   | 34.38                 | 7.90            | 38.47            | 45.57             | 49.80          | 74.00               | -24.20          |
| 7386.000   | 36.34                 | 9.78            | 36.95            | 41.85             | 51.24          | 74.00               | -22.76          |
| 9848.000   | 37.57                 | 11.28           | 34.98            | 38.42             | 52.75          | 74.00               | -21.25          |
| 15134.080  | 41.33                 | 14.96           | 38.75            | 35.60             | 53.72          | 74.00               | -20.28          |

Mode:a; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:High

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamp_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------|-------------------|----------------|---------------------|-----------------|
| 1597.181   | 26.24                 | 4.59            | 38.04            | 45.22             | 38.50          | 74.00               | -35.50          |
| 3308.894   | 31.87                 | 6.17            | 37.93            | 44.59             | 45.29          | 74.00               | -28.71          |
| 4924.000   | 34.38                 | 7.90            | 38.47            | 43.88             | 48.11          | 74.00               | -25.89          |
| 7386.000   | 36.34                 | 9.78            | 36.95            | 42.14             | 51.53          | 74.00               | -22.47          |
| 9848.000   | 37.57                 | 11.28           | 34.98            | 38.55             | 52.88          | 74.00               | -21.12          |
| 13877.080  | 39.05                 | 14.47           | 38.88            | 37.94             | 53.08          | 74.00               | -20.92          |

Mode:a; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:Low

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamp_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------|-------------------|----------------|---------------------|-----------------|
| 1547.199   | 26.02                 | 4.53            | 38.05            | 41.72             | 34.71          | 74.00               | -39.29          |
| 3445.535   | 32.11                 | 6.26            | 37.94            | 43.68             | 44.65          | 74.00               | -29.35          |
| 4824.000   | 34.21                 | 7.77            | 38.42            | 42.66             | 46.62          | 54.00               | -7.38           |
| 4824.000   | 34.21                 | 7.77            | 38.42            | 51.49             | 55.45          | 74.00               | -18.55          |
| 7236.000   | 36.40                 | 9.68            | 37.08            | 42.61             | 51.86          | 74.00               | -22.14          |
| 9648.000   | 37.53                 | 11.09           | 35.08            | 38.96             | 52.95          | 74.00               | -21.05          |
| 15090.400  | 41.32                 | 14.92           | 38.80            | 35.91             | 53.93          | 74.00               | -20.07          |

Average

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamp_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------|-------------------|----------------|---------------------|-----------------|
| 4824.000   | 34.21                 | 7.77            | 38.42            | 42.66             | 46.62          | 54.00               | -7.38           |

Mode:a; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:Low

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamp_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------|-------------------|----------------|---------------------|-----------------|
| 1872.381   | 27.34                 | 4.89            | 38.01            | 43.63             | 38.73          | 74.00               | -35.27          |
| 3328.077   | 31.91                 | 6.18            | 37.93            | 44.82             | 45.57          | 74.00               | -28.43          |
| 4824.000   | 34.21                 | 7.77            | 38.42            | 49.81             | 53.77          | 74.00               | -20.23          |
| 7236.000   | 36.40                 | 9.68            | 37.08            | 42.81             | 52.06          | 74.00               | -21.94          |
| 9648.000   | 37.53                 | 11.09           | 35.08            | 38.90             | 52.89          | 74.00               | -21.11          |
| 14038.450  | 39.29                 | 14.60           | 39.00            | 37.78             | 53.19          | 74.00               | -20.81          |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170300160501

Page: 50 of 102

Mode:a; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:middle

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamp_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------|-------------------|----------------|---------------------|-----------------|
| 1304.623   | 24.97                 | 4.23            | 38.07            | 43.49             | 35.11          | 74.00               | -38.89          |
| 3177.672   | 31.64                 | 6.07            | 37.92            | 44.00             | 44.43          | 74.00               | -29.57          |
| 4874.000   | 34.28                 | 7.83            | 38.44            | 52.24             | 56.32          | 74.00               | -17.68          |
| 7311.000   | 36.38                 | 9.72            | 37.03            | 42.08             | 51.39          | 74.00               | -22.61          |
| 9748.000   | 37.55                 | 11.20           | 35.02            | 38.49             | 52.68          | 74.00               | -21.32          |
| 14284.030  | 39.89                 | 14.67           | 38.97            | 37.48             | 53.62          | 74.00               | -20.38          |

Average

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamp_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------|-------------------|----------------|---------------------|-----------------|
| 4874.000   | 34.28                 | 7.83            | 38.44            | 41.21             | 45.29          | 54.00               | -8.71           |

Mode:a; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:middle

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamp_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------|-------------------|----------------|---------------------|-----------------|
| 1498.781   | 25.80                 | 4.47            | 38.05            | 46.84             | 39.54          | 74.00               | -34.46          |
| 3223.928   | 31.72                 | 6.10            | 37.92            | 42.66             | 43.19          | 74.00               | -30.81          |
| 4874.000   | 34.28                 | 7.83            | 38.44            | 50.69             | 54.77          | 74.00               | -19.23          |
| 7311.000   | 36.38                 | 9.72            | 37.03            | 41.49             | 50.80          | 74.00               | -23.20          |
| 9748.000   | 37.55                 | 11.20           | 35.02            | 38.51             | 52.70          | 74.00               | -21.30          |
| 14366.840  | 40.08                 | 14.69           | 38.96            | 37.21             | 53.57          | 74.00               | -20.43          |

Average

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamp_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------|-------------------|----------------|---------------------|-----------------|
| 4874.000   | 34.28                 | 7.83            | 38.44            | 38.40             | 42.48          | 54.00               | -11.52          |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170300160501

Page: 51 of 102

Mode:a; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:High

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamplifier_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------------|-------------------|----------------|---------------------|-----------------|
| 1667.951   | 26.54                 | 4.67            | 38.03                  | 43.69             | 37.41          | 74.00               | -36.59          |
| 2999.187   | 31.30                 | 5.93            | 37.90                  | 45.69             | 46.20          | 74.00               | -27.80          |
| 4924.000   | 34.36                 | 7.88            | 38.46                  | 52.94             | 57.14          | 74.00               | -16.86          |
| 7386.000   | 36.34                 | 9.78            | 36.95                  | 41.47             | 50.86          | 74.00               | -23.14          |
| 9848.000   | 37.57                 | 11.28           | 34.98                  | 37.76             | 52.09          | 74.00               | -21.91          |
| 14916.940  | 41.15                 | 14.83           | 38.91                  | 35.66             | 53.31          | 74.00               | -20.69          |

Average

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamplifier_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------------|-------------------|----------------|---------------------|-----------------|
| 4924.000   | 34.36                 | 7.88            | 38.46                  | 42.47             | 46.67          | 54.00               | -7.33           |

Mode:a; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:High

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamplifier_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------------|-------------------|----------------|---------------------|-----------------|
| 1597.181   | 26.24                 | 4.59            | 38.04                  | 46.16             | 39.44          | 74.00               | -34.56          |
| 3445.535   | 32.11                 | 6.26            | 37.94                  | 42.72             | 43.69          | 74.00               | -30.31          |
| 4924.000   | 34.38                 | 7.90            | 38.47                  | 53.38             | 57.61          | 74.00               | -16.39          |
| 7386.000   | 36.34                 | 9.78            | 36.95                  | 42.07             | 51.46          | 74.00               | -22.54          |
| 9848.000   | 37.57                 | 11.28           | 34.98                  | 38.33             | 52.66          | 74.00               | -21.34          |
| 13997.930  | 39.20                 | 14.59           | 39.00                  | 37.97             | 53.27          | 74.00               | -20.73          |

Average

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamplifier_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------------|-------------------|----------------|---------------------|-----------------|
| 4924.000   | 34.38                 | 7.90            | 38.47                  | 42.25             | 46.48          | 54.00               | -7.52           |



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170300160501

Page: 52 of 102

Mode:a; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:Low

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamplifier_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------------|-------------------|----------------|---------------------|-----------------|
| 1653.550   | 26.48                 | 4.65            | 38.03                  | 44.53             | 38.15          | 74.00               | -35.85          |
| 3425.675   | 32.07                 | 6.25            | 37.94                  | 42.35             | 43.28          | 74.00               | -30.72          |
| 4824.000   | 34.18                 | 7.75            | 38.41                  | 45.96             | 49.87          | 74.00               | -24.13          |
| 7236.000   | 36.40                 | 9.68            | 37.08                  | 43.10             | 52.35          | 74.00               | -21.65          |
| 9648.000   | 37.53                 | 11.09           | 35.08                  | 38.73             | 52.72          | 74.00               | -21.28          |
| 14038.450  | 39.29                 | 14.60           | 39.00                  | 38.47             | 53.88          | 74.00               | -20.12          |

Mode:a; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:Low

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamplifier_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------------|-------------------|----------------|---------------------|-----------------|
| 1824.302   | 27.16                 | 4.84            | 38.02                  | 43.51             | 38.24          | 74.00               | -35.76          |
| 3703.723   | 32.79                 | 6.47            | 37.97                  | 43.98             | 45.78          | 74.00               | -28.22          |
| 4824.000   | 34.18                 | 7.75            | 38.41                  | 43.48             | 47.39          | 74.00               | -26.61          |
| 7236.000   | 36.40                 | 9.68            | 37.08                  | 41.91             | 51.16          | 74.00               | -22.84          |
| 9648.000   | 37.53                 | 11.09           | 35.08                  | 38.27             | 52.26          | 74.00               | -21.74          |
| 12724.470  | 38.85                 | 13.24           | 37.34                  | 37.79             | 53.08          | 74.00               | -20.92          |

Mode:a; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:middle

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamplifier_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------------|-------------------|----------------|---------------------|-----------------|
| 1053.404   | 23.71                 | 3.85            | 38.09                  | 49.99             | 39.86          | 74.00               | -34.14          |
| 3177.672   | 31.64                 | 6.07            | 37.92                  | 44.47             | 44.90          | 74.00               | -29.10          |
| 4874.000   | 34.28                 | 7.83            | 38.44                  | 52.47             | 56.55          | 74.00               | -17.45          |
| 7311.000   | 36.38                 | 9.72            | 37.03                  | 41.10             | 50.41          | 74.00               | -23.59          |
| 9748.000   | 37.55                 | 11.20           | 35.02                  | 38.26             | 52.45          | 74.00               | -21.55          |
| 13917.240  | 39.10                 | 14.51           | 38.92                  | 37.92             | 53.12          | 74.00               | -20.88          |

Average

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamplifier_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------------|-------------------|----------------|---------------------|-----------------|
| 4874.000   | 34.28                 | 7.83            | 38.44                  | 40.46             | 44.54          | 54.00               | -9.46           |

Mode:a; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:middle

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamplifier_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------------|-------------------|----------------|---------------------|-----------------|
| 1597.181   | 26.24                 | 4.59            | 38.04                  | 46.59             | 39.87          | 74.00               | -34.13          |
| 3233.260   | 31.74                 | 6.11            | 37.92                  | 44.01             | 44.56          | 74.00               | -29.44          |
| 4874.000   | 34.28                 | 7.83            | 38.44                  | 48.49             | 52.57          | 74.00               | -21.43          |
| 7311.000   | 36.38                 | 9.72            | 37.03                  | 42.30             | 51.61          | 74.00               | -22.39          |
| 9748.000   | 37.55                 | 11.20           | 35.02                  | 37.86             | 52.05          | 74.00               | -21.95          |
| 14660.480  | 40.69                 | 14.76           | 38.93                  | 35.93             | 53.02          | 74.00               | -20.98          |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170300160501

Page: 53 of 102

Mode:a; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:High

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamp_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------|-------------------|----------------|---------------------|-----------------|
| 1772.327   | 26.96                 | 4.78            | 38.02            | 42.54             | 36.88          | 74.00               | -37.12          |
| 3495.691   | 32.19                 | 6.30            | 37.95            | 43.63             | 44.70          | 74.00               | -29.30          |
| 4924.000   | 34.38                 | 7.90            | 38.47            | 54.80             | 59.03          | 74.00               | -14.97          |
| 7386.000   | 36.34                 | 9.78            | 36.95            | 42.53             | 51.92          | 74.00               | -22.08          |
| 9848.000   | 37.57                 | 11.28           | 34.98            | 38.38             | 52.71          | 74.00               | -21.29          |
| 13757.270  | 38.91                 | 14.36           | 38.76            | 38.78             | 53.78          | 74.00               | -20.22          |

Average

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamp_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------|-------------------|----------------|---------------------|-----------------|
| 4924.000   | 34.38                 | 7.90            | 38.47            | 41.86             | 46.09          | 54.00               | -7.91           |

Mode:a; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:High

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamp_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------|-------------------|----------------|---------------------|-----------------|
| 1583.392   | 26.18                 | 4.57            | 38.04            | 47.74             | 40.94          | 74.00               | -33.06          |
| 3150.237   | 31.59                 | 6.05            | 37.92            | 43.71             | 44.09          | 74.00               | -29.91          |
| 4924.000   | 34.38                 | 7.90            | 38.47            | 54.87             | 59.10          | 74.00               | -14.90          |
| 7386.000   | 36.34                 | 9.78            | 36.95            | 41.28             | 50.67          | 74.00               | -23.33          |
| 9848.000   | 37.57                 | 11.28           | 34.98            | 38.09             | 52.42          | 74.00               | -21.58          |
| 14491.960  | 40.38                 | 14.72           | 38.95            | 37.06             | 53.77          | 74.00               | -20.23          |

Average

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamp_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------|-------------------|----------------|---------------------|-----------------|
| 4924.000   | 34.38                 | 7.90            | 38.47            | 41.55             | 45.78          | 54.00               | -8.22           |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170300160501

Page: 54 of 102

Mode:a; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:Low

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamplifier_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------------|-------------------|----------------|---------------------|-----------------|
| 1556.169   | 26.06                 | 4.54            | 38.04                  | 41.82             | 34.87          | 74.00               | -39.13          |
| 3386.297   | 32.01                 | 6.22            | 37.94                  | 41.84             | 42.70          | 74.00               | -31.30          |
| 4844.000   | 34.23                 | 7.79            | 38.42                  | 43.62             | 47.62          | 74.00               | -26.38          |
| 7266.000   | 36.39                 | 9.69            | 37.06                  | 41.86             | 51.13          | 74.00               | -22.87          |
| 9688.000   | 37.54                 | 11.15           | 35.05                  | 38.62             | 52.71          | 74.00               | -21.29          |
| 13520.740  | 38.63                 | 14.13           | 38.52                  | 38.54             | 53.24          | 74.00               | -20.76          |

Mode:a; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:Low

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamplifier_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------------|-------------------|----------------|---------------------|-----------------|
| 1597.181   | 26.24                 | 4.59            | 38.04                  | 44.59             | 37.87          | 74.00               | -36.13          |
| 2973.293   | 31.21                 | 5.90            | 37.90                  | 43.61             | 44.09          | 74.00               | -29.91          |
| 4844.000   | 34.23                 | 7.79            | 38.42                  | 43.11             | 47.11          | 74.00               | -26.89          |
| 7266.000   | 36.39                 | 9.69            | 37.06                  | 42.22             | 51.49          | 74.00               | -22.51          |
| 9688.000   | 37.54                 | 11.15           | 35.05                  | 38.19             | 52.28          | 74.00               | -21.72          |
| 14160.710  | 39.59                 | 14.63           | 38.98                  | 38.12             | 53.89          | 74.00               | -20.11          |

Mode:a; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:middle

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamplifier_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------------|-------------------|----------------|---------------------|-----------------|
| 1189.368   | 24.43                 | 4.06            | 38.08                  | 45.99             | 36.85          | 74.00               | -37.15          |
| 3150.237   | 31.59                 | 6.05            | 37.92                  | 44.46             | 44.84          | 74.00               | -29.16          |
| 4874.000   | 34.28                 | 7.83            | 38.44                  | 45.92             | 50.00          | 74.00               | -24.00          |
| 7311.000   | 36.38                 | 9.72            | 37.03                  | 41.50             | 50.81          | 74.00               | -23.19          |
| 9748.000   | 37.55                 | 11.20           | 35.02                  | 38.19             | 52.38          | 74.00               | -21.62          |
| 14873.890  | 41.08                 | 14.82           | 38.91                  | 35.53             | 53.10          | 74.00               | -20.90          |

Mode:a; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:middle

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamplifier_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------------|-------------------|----------------|---------------------|-----------------|
| 1494.455   | 25.78                 | 4.46            | 38.05                  | 45.11             | 37.78          | 74.00               | -36.22          |
| 3252.005   | 31.77                 | 6.12            | 37.93                  | 42.38             | 42.96          | 74.00               | -31.04          |
| 4874.000   | 34.28                 | 7.83            | 38.44                  | 43.84             | 47.92          | 74.00               | -26.08          |
| 7311.000   | 36.38                 | 9.72            | 37.03                  | 41.86             | 51.17          | 74.00               | -22.83          |
| 9748.000   | 37.55                 | 11.20           | 35.02                  | 38.31             | 52.50          | 74.00               | -21.50          |
| 13917.240  | 39.10                 | 14.51           | 38.92                  | 38.18             | 53.38          | 74.00               | -20.62          |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170300160501

Page: 55 of 102

Mode:a; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:High

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamp_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------|-------------------|----------------|---------------------|-----------------|
| 1068.738   | 23.79                 | 3.88            | 38.09            | 48.35             | 38.34          | 74.00               | -35.66          |
| 3337.710   | 31.92                 | 6.19            | 37.93            | 44.39             | 45.15          | 74.00               | -28.85          |
| 4904.000   | 34.33                 | 7.87            | 38.45            | 47.56             | 51.73          | 74.00               | -22.27          |
| 7356.000   | 36.36                 | 9.75            | 36.99            | 42.54             | 51.89          | 74.00               | -22.11          |
| 9808.000   | 37.56                 | 11.26           | 35.00            | 38.14             | 52.42          | 74.00               | -21.58          |
| 14491.960  | 40.38                 | 14.72           | 38.95            | 36.50             | 53.21          | 74.00               | -20.79          |

Mode:a; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:High

| Freq (MHz) | Antenna_Factor (dB/m) | Cable_Loss (dB) | Preamp_Gain (dB) | Read_Level (dBuV) | Level (dBuV/m) | Limit_Line (dBuV/m) | Over_Limit (dB) |
|------------|-----------------------|-----------------|------------------|-------------------|----------------|---------------------|-----------------|
| 1473.013   | 25.69                 | 4.44            | 38.05            | 44.49             | 37.05          | 74.00               | -36.95          |
| 3280.326   | 31.82                 | 6.14            | 37.93            | 44.05             | 44.69          | 74.00               | -29.31          |
| 4904.000   | 34.33                 | 7.87            | 38.45            | 45.77             | 49.94          | 74.00               | -24.06          |
| 7356.000   | 36.36                 | 9.75            | 36.99            | 41.44             | 50.79          | 74.00               | -23.21          |
| 9808.000   | 37.56                 | 11.26           | 35.00            | 37.73             | 52.01          | 74.00               | -21.99          |
| 14618.170  | 40.62                 | 14.75           | 38.94            | 36.82             | 53.82          | 74.00               | -20.18          |


- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

## 8 Photographs

### 8.1 Radiated Spurious Emissions Test Setup

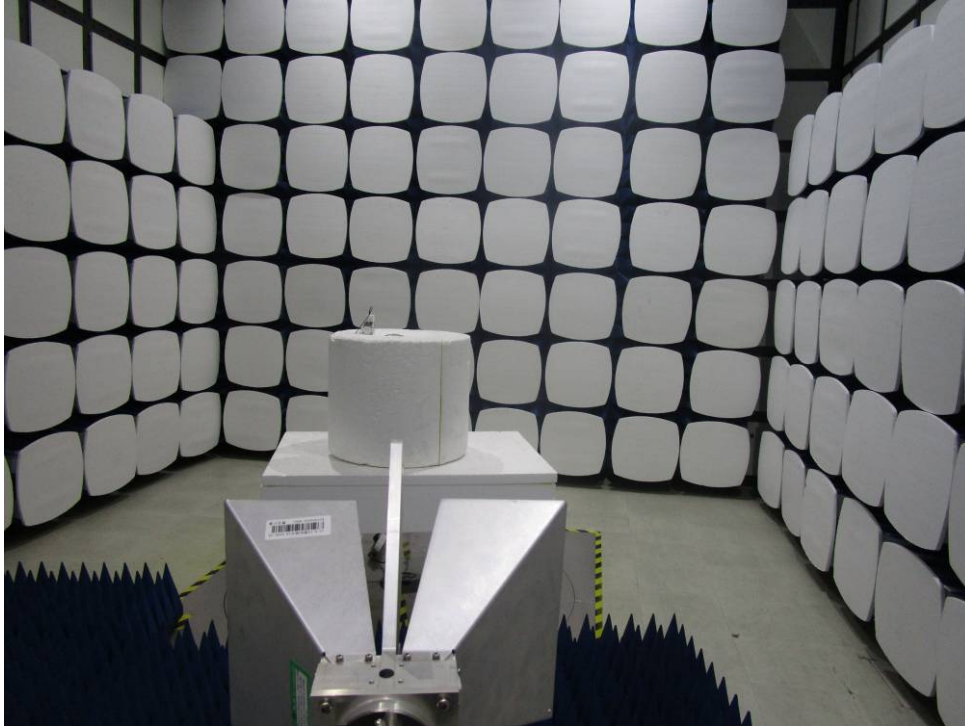

## 8.2 EUT Constructional Details







## 9 Appendix


### 9.1 Appendix 15.247


#### 1.6dB Bandwidth


| Test Mode | Test Channel | EBW[MHz] | Limit      | Verdict |
|-----------|--------------|----------|------------|---------|
| 11B       | 2412         | 10.110   | $\geq 0.5$ | PASS    |
| 11B       | 2437         | 10.140   | $\geq 0.5$ | PASS    |
| 11B       | 2462         | 10.140   | $\geq 0.5$ | PASS    |
| 11G       | 2412         | 16.650   | $\geq 0.5$ | PASS    |
| 11G       | 2437         | 16.620   | $\geq 0.5$ | PASS    |
| 11G       | 2462         | 16.605   | $\geq 0.5$ | PASS    |
| 11N20SISO | 2412         | 17.880   | $\geq 0.5$ | PASS    |
| 11N20SISO | 2437         | 17.850   | $\geq 0.5$ | PASS    |
| 11N20SISO | 2462         | 17.880   | $\geq 0.5$ | PASS    |
| 11N40SISO | 2422         | 36.540   | $\geq 0.5$ | PASS    |
| 11N40SISO | 2437         | 36.600   | $\geq 0.5$ | PASS    |
| 11N40SISO | 2452         | 36.540   | $\geq 0.5$ | PASS    |

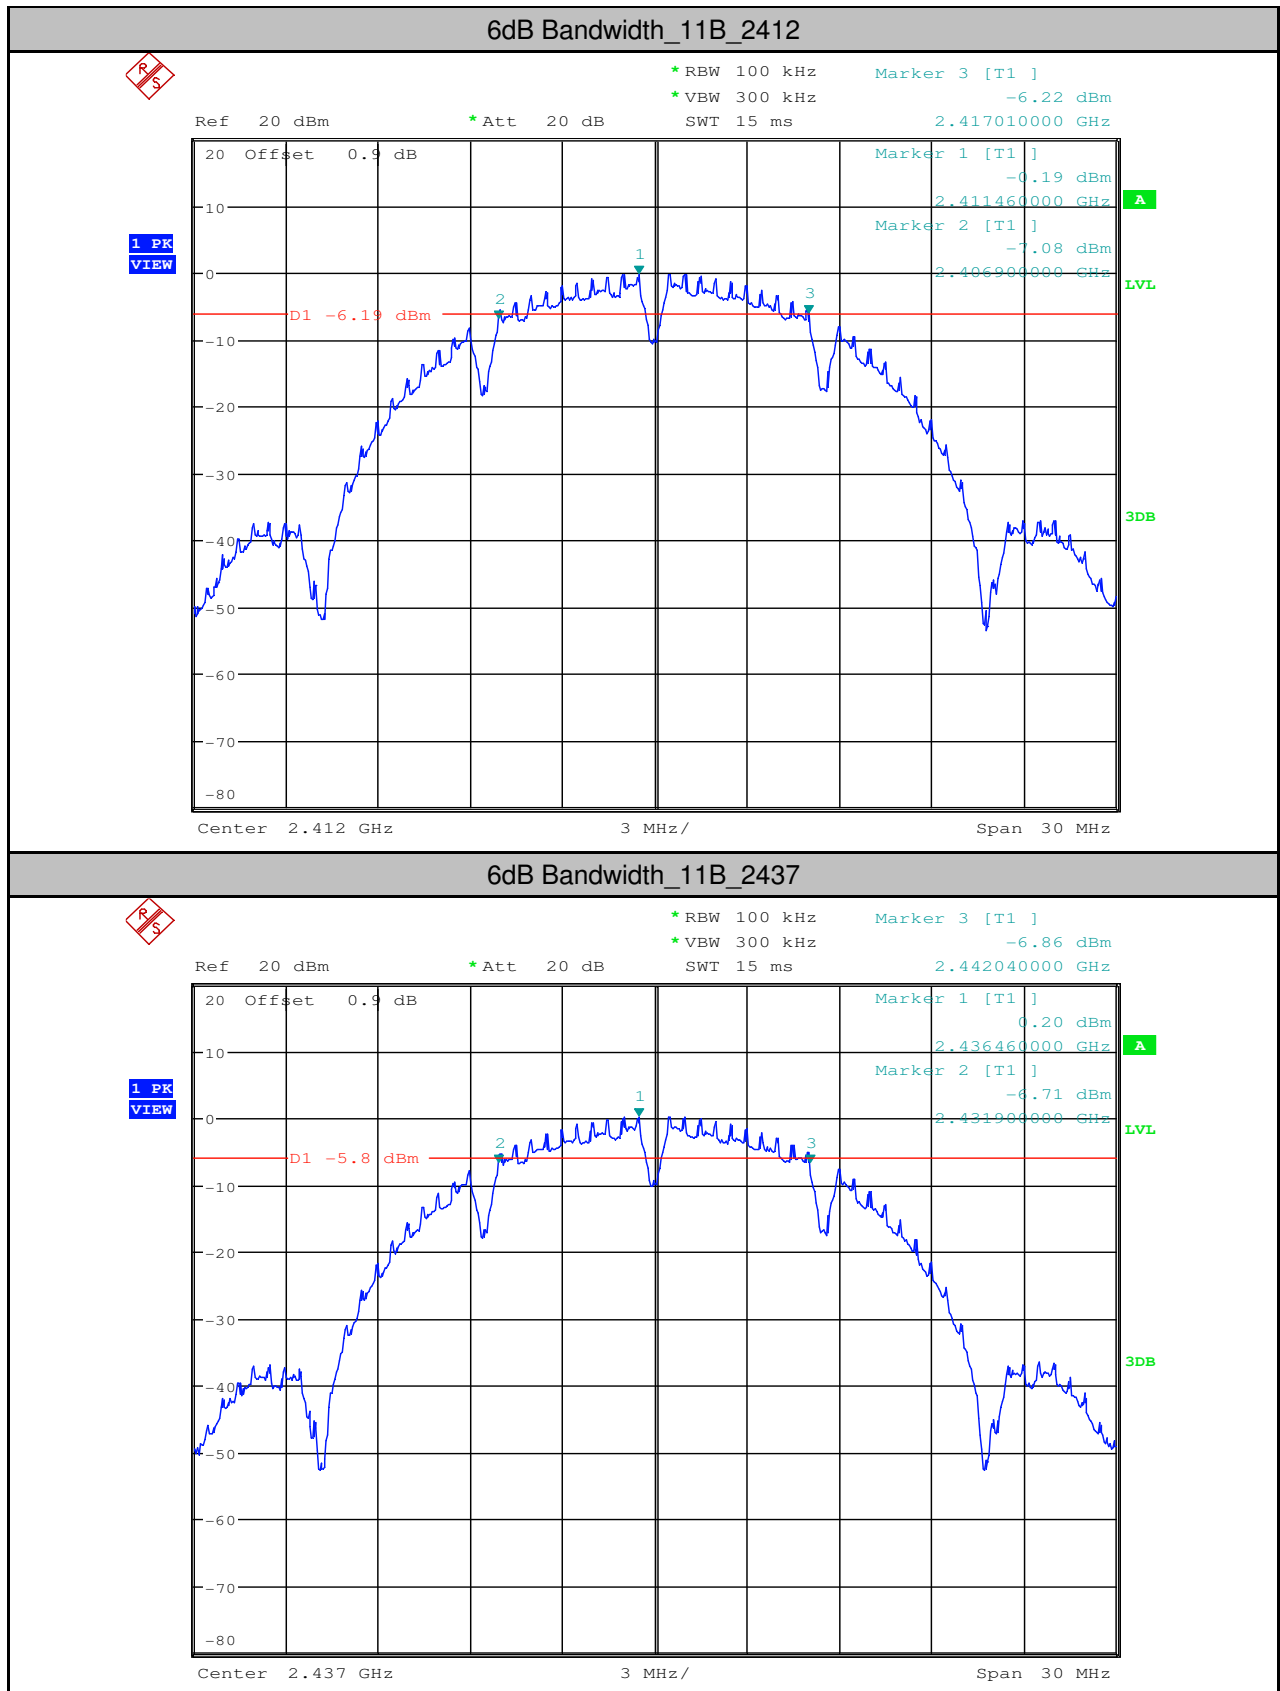


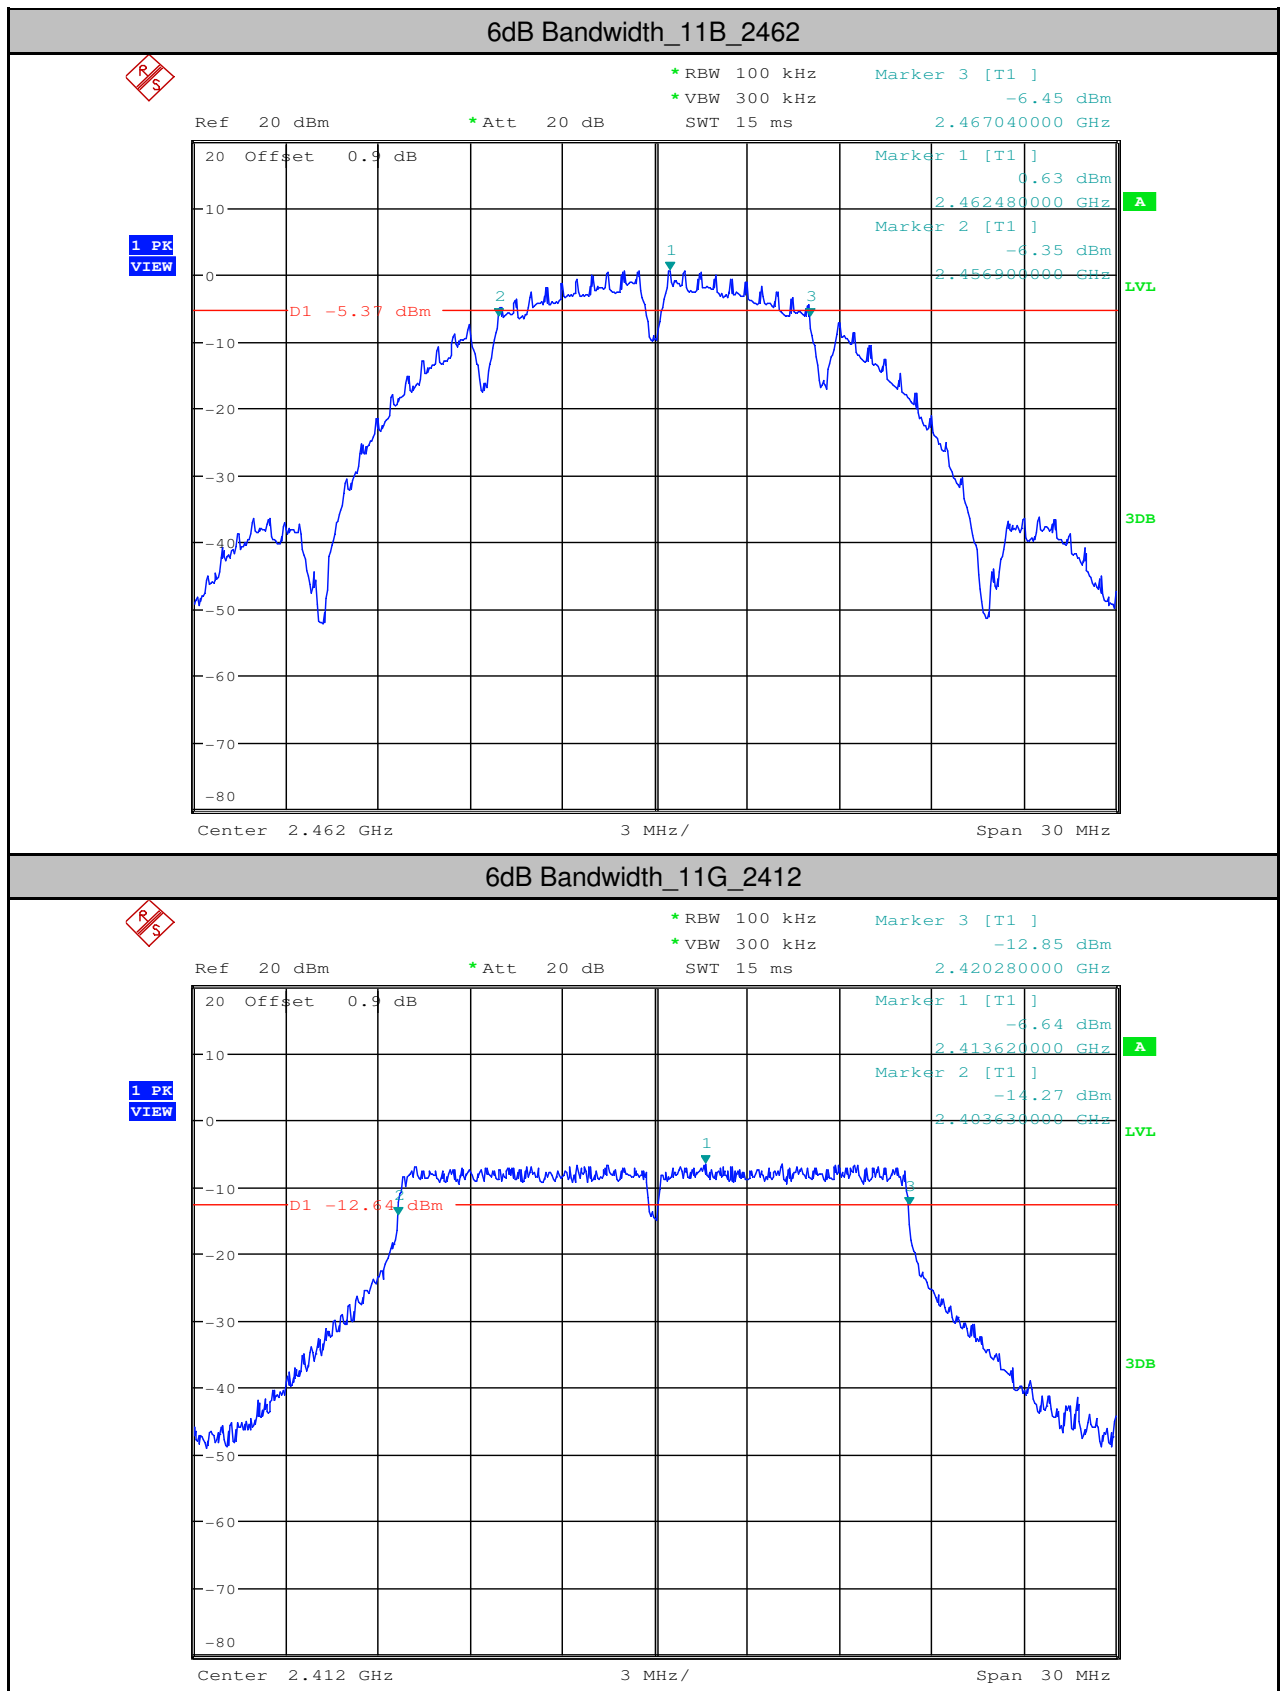

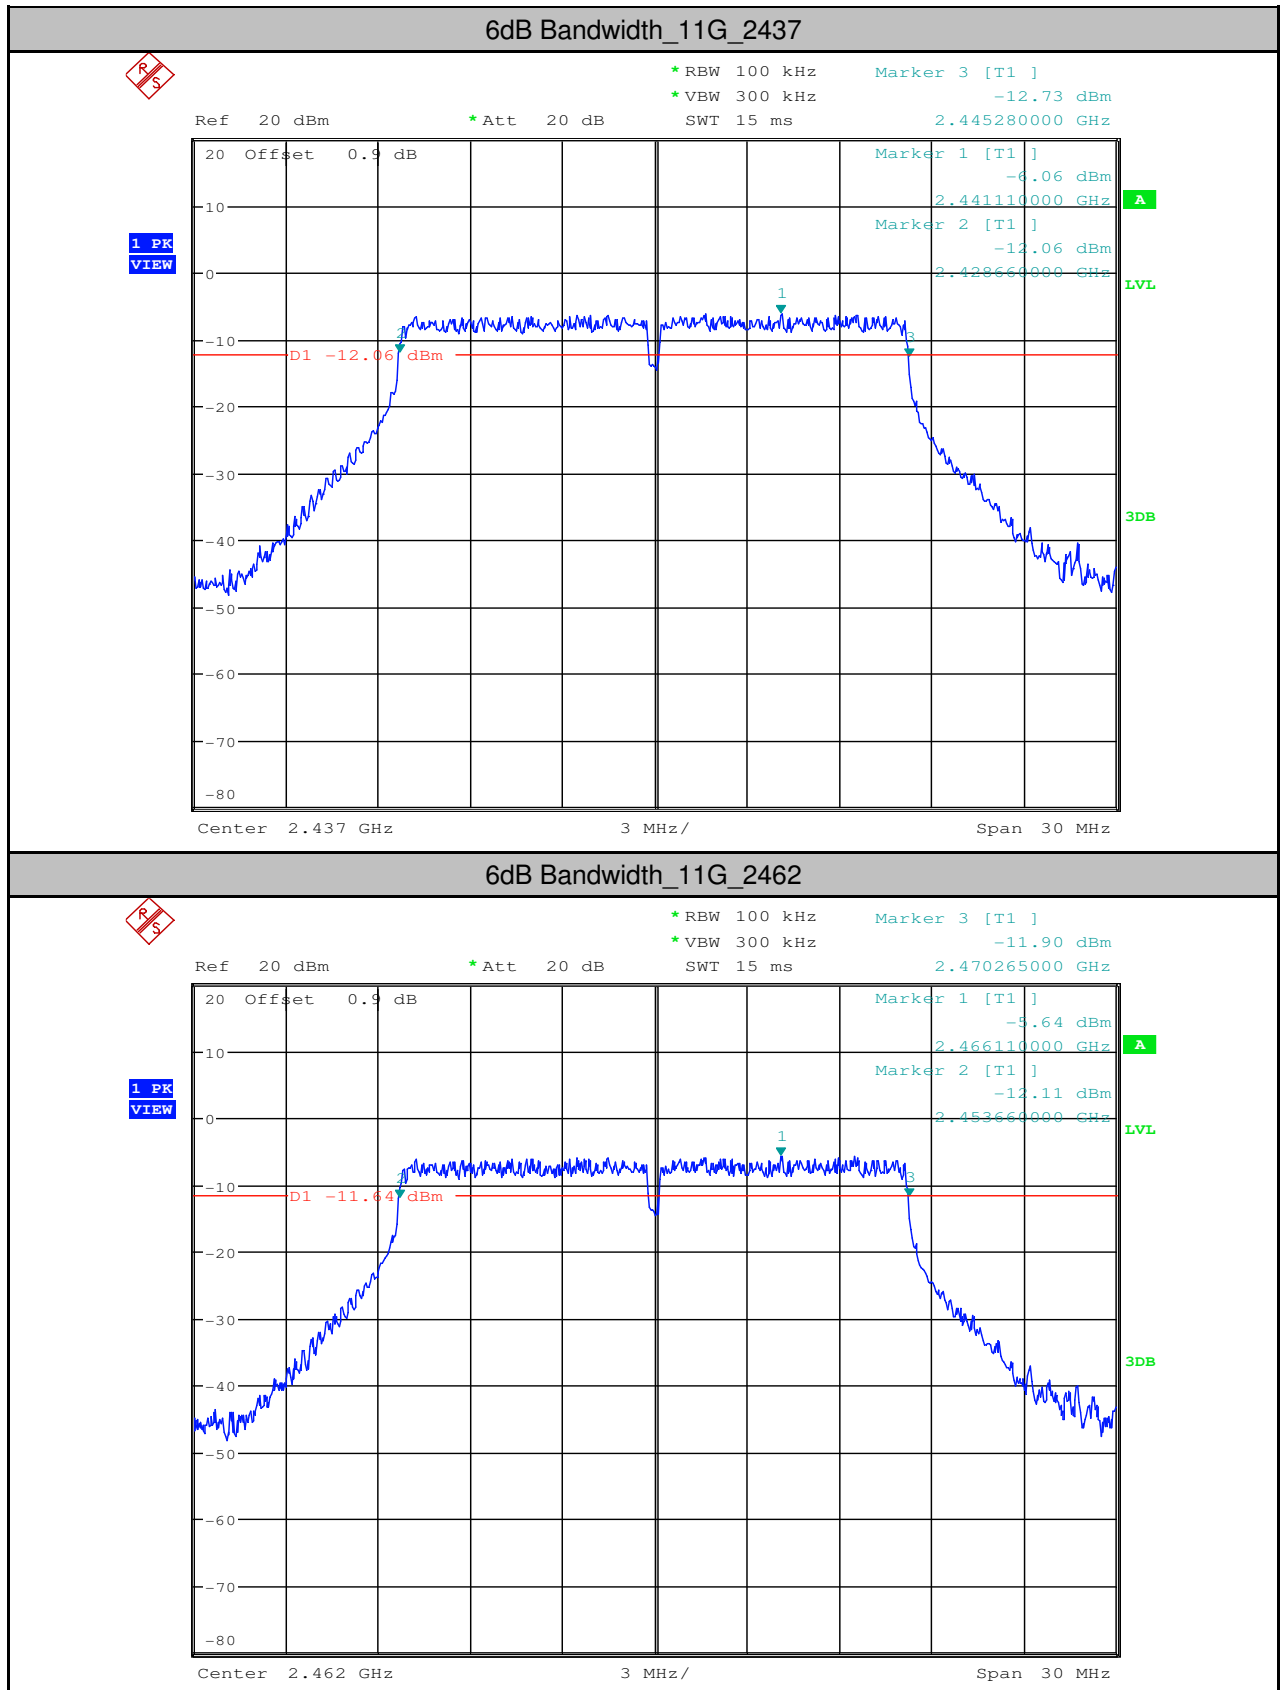

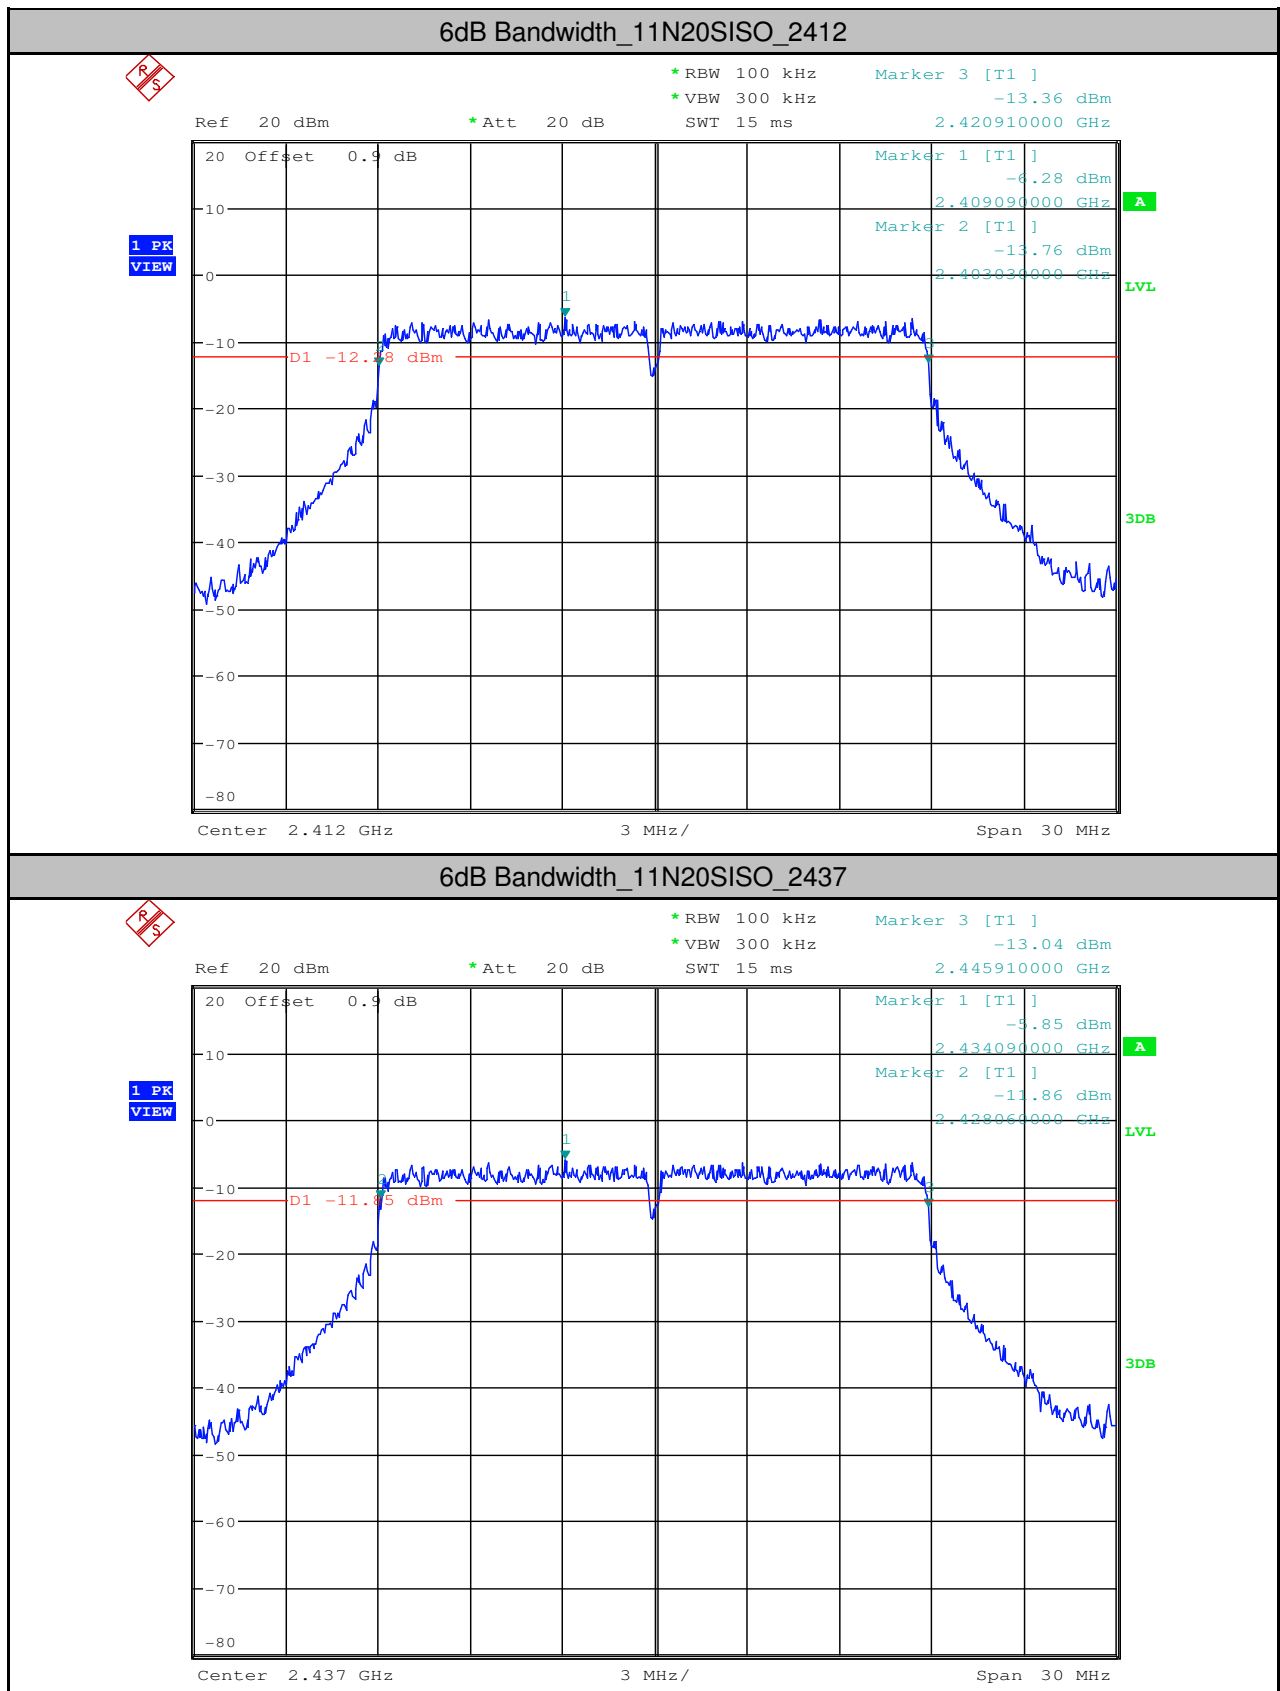

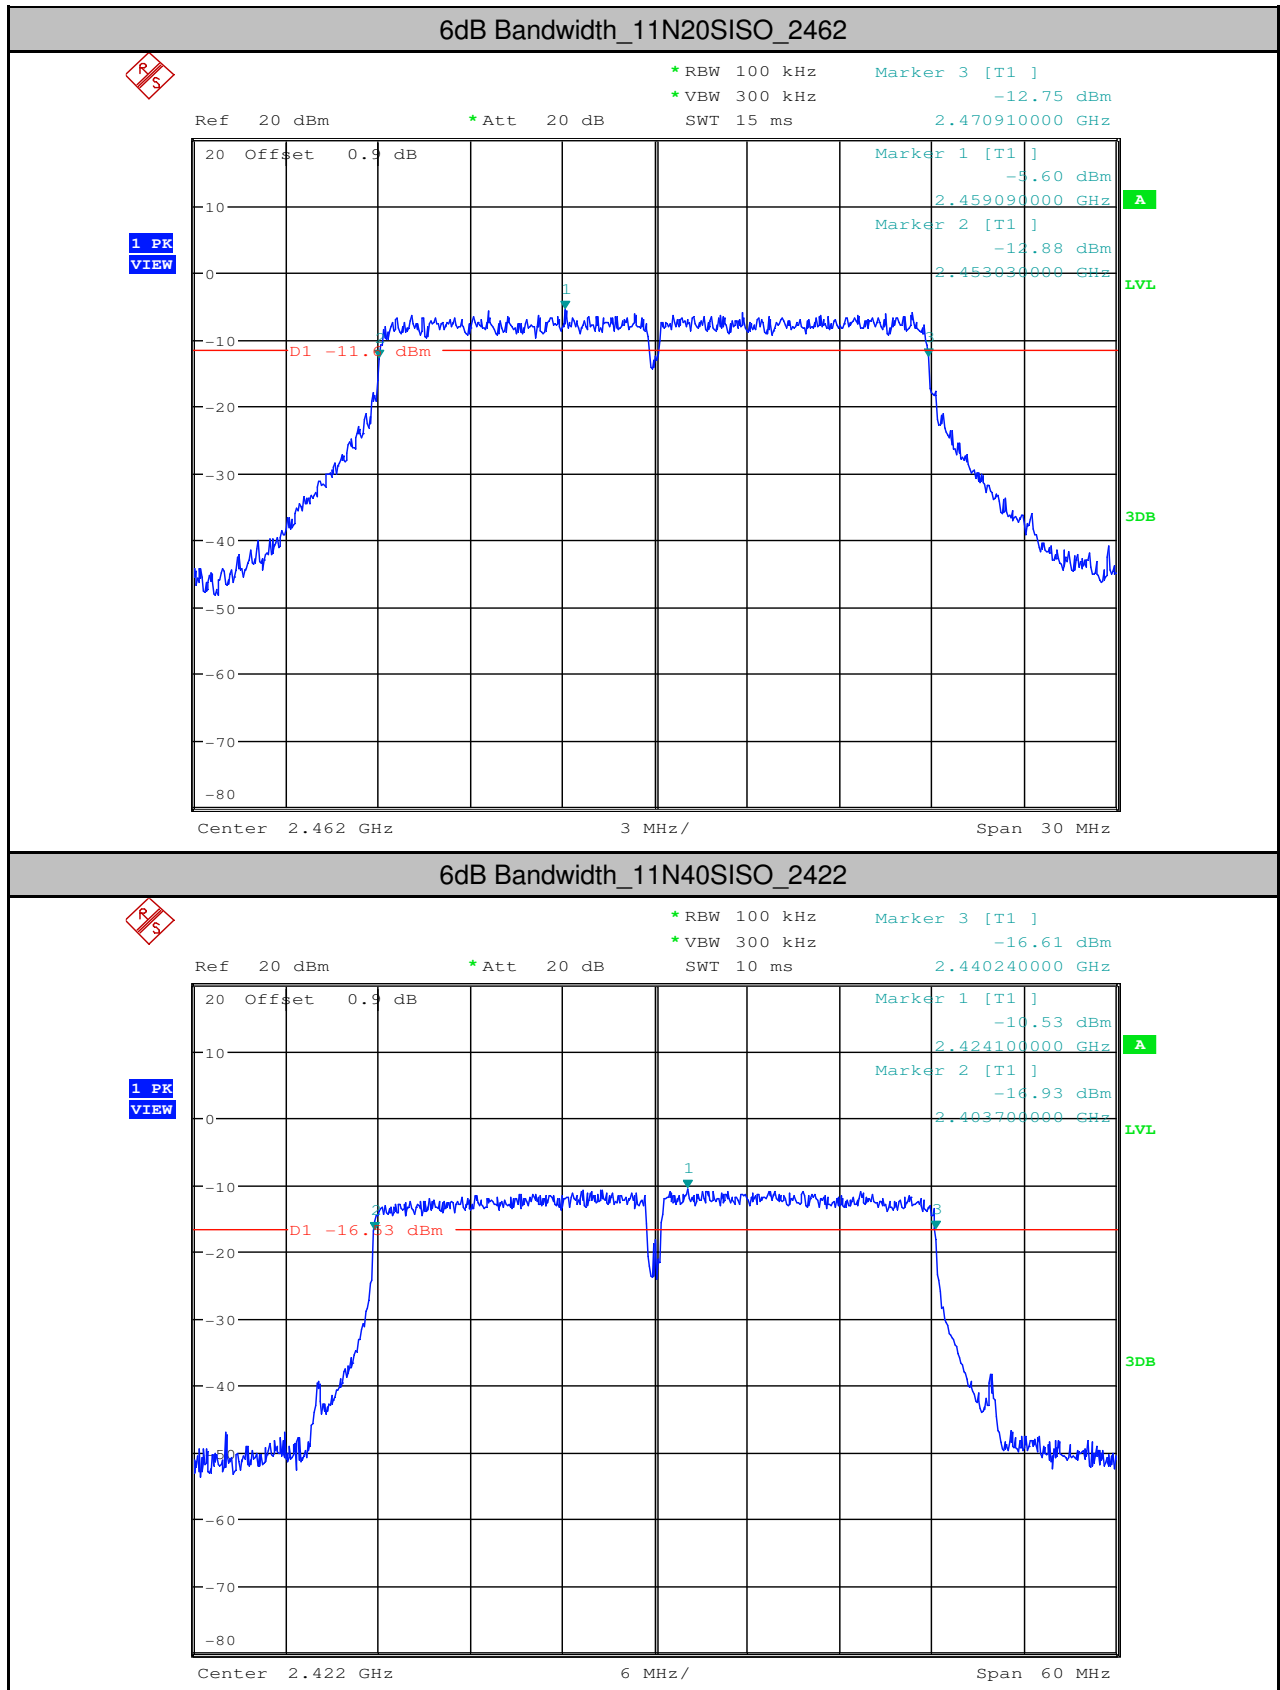

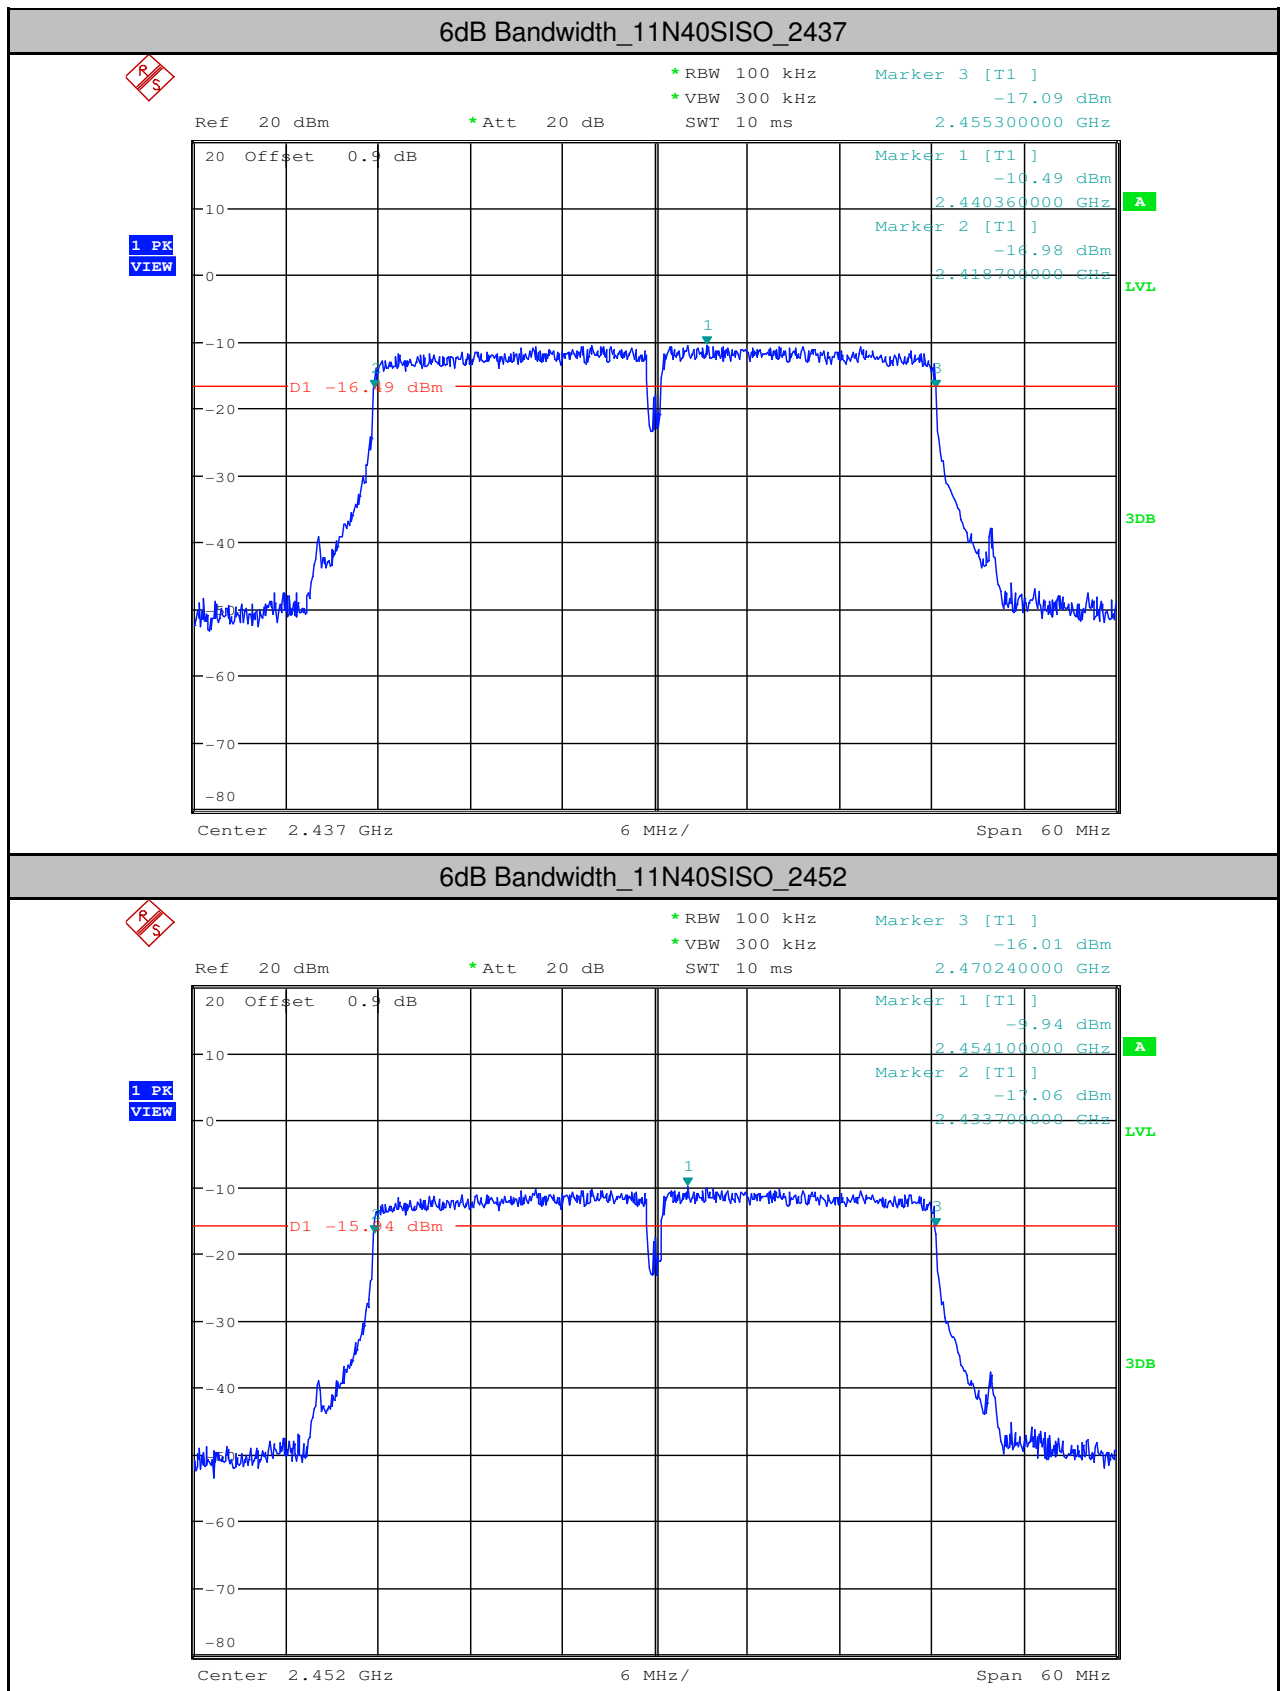





## 2.Maximum peak conducted output power

| Test Mode | Test Channel | Power[dBm] | Limit[dBm] | Verdict |
|-----------|--------------|------------|------------|---------|
| 11B       | 2412         | 13.25      | <30        | PASS    |
| 11B       | 2437         | 13.67      | <30        | PASS    |
| 11B       | 2462         | 14.02      | <30        | PASS    |
| 11G       | 2412         | 15.91      | <30        | PASS    |
| 11G       | 2437         | 16.35      | <30        | PASS    |
| 11G       | 2462         | 16.8       | <30        | PASS    |
| 11N20SISO | 2412         | 16.16      | <30        | PASS    |
| 11N20SISO | 2437         | 16.56      | <30        | PASS    |
| 11N20SISO | 2462         | 17         | <30        | PASS    |
| 11N40SISO | 2422         | 14.9       | <30        | PASS    |
| 11N40SISO | 2437         | 15.12      | <30        | PASS    |
| 11N40SISO | 2452         | 15.42      | <30        | PASS    |


Maximum peak conducted output power\_11B\_2412

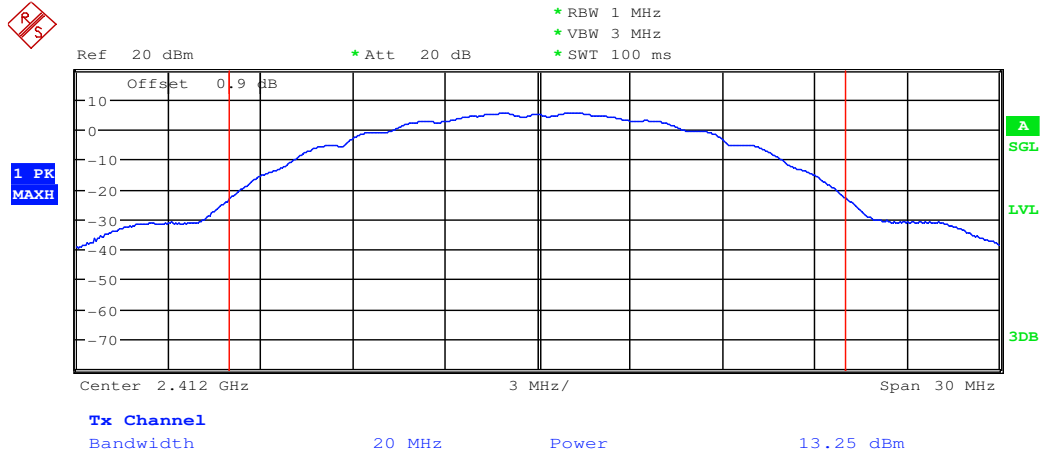


Maximum peak conducted output power\_11B\_2437

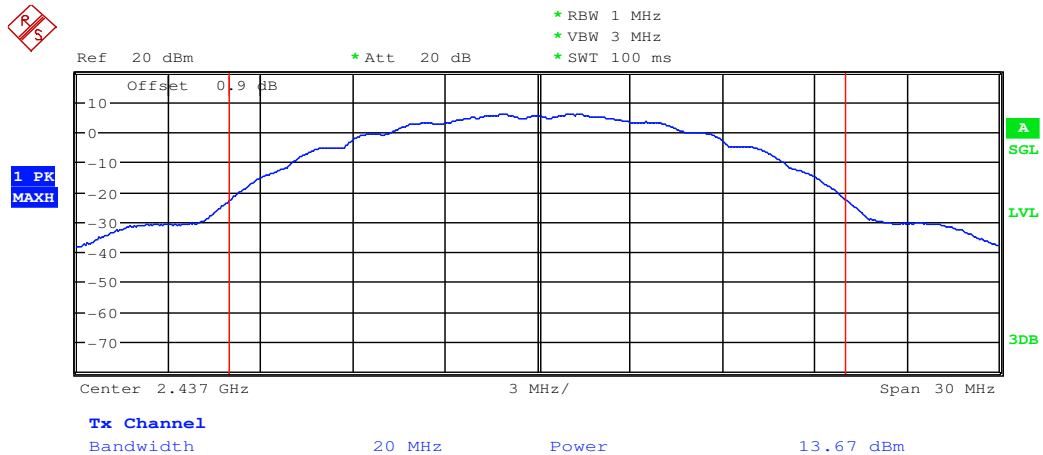

## Maximum peak conducted output power\_11B\_2462

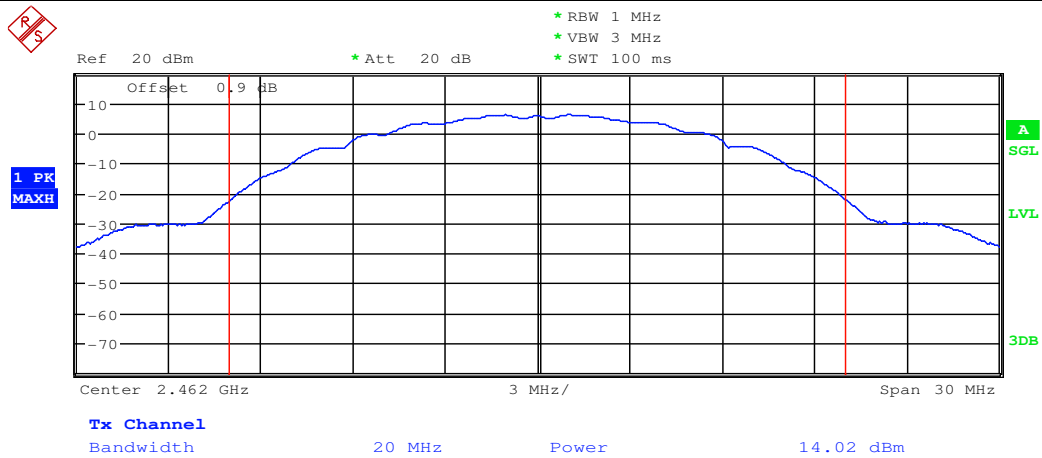


## Maximum peak conducted output power\_11G\_2412

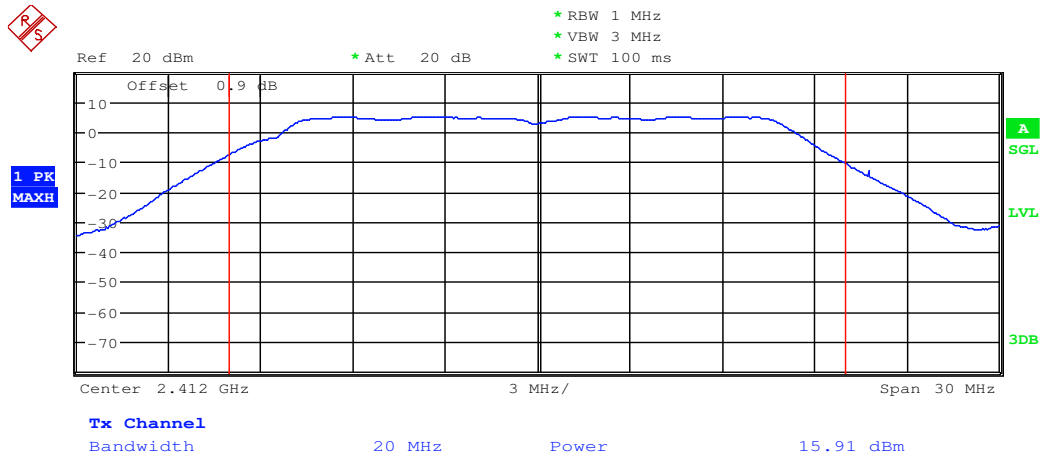




Maximum peak conducted output power\_11G\_2437

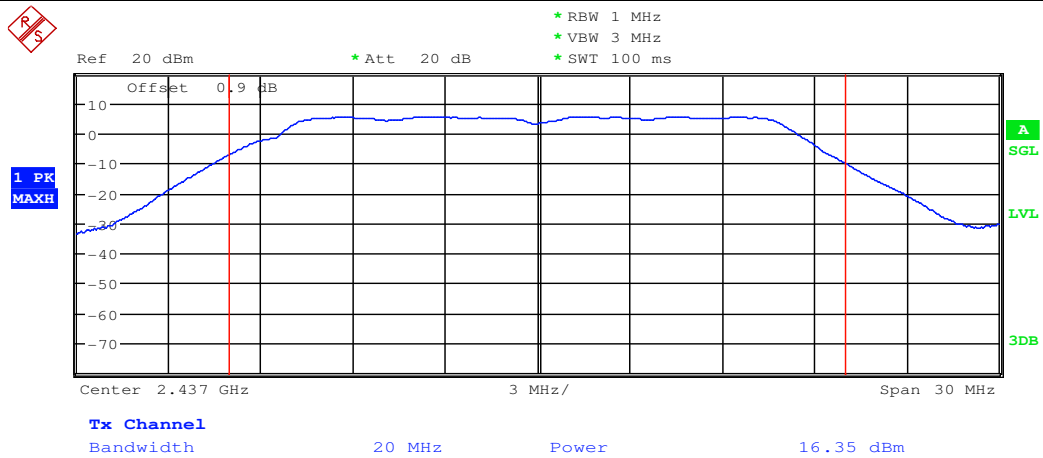


Maximum peak conducted output power\_11G\_2462

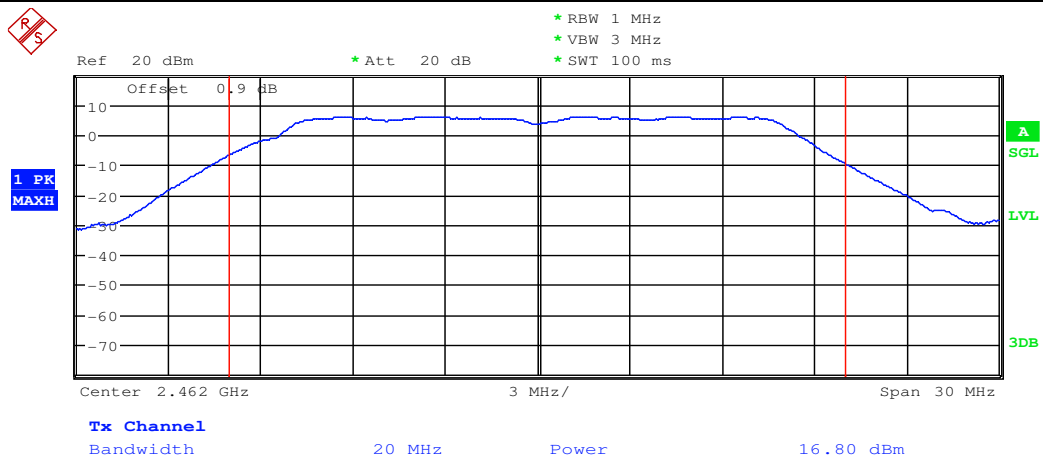




Maximum peak conducted output power\_11N20SISO\_2412

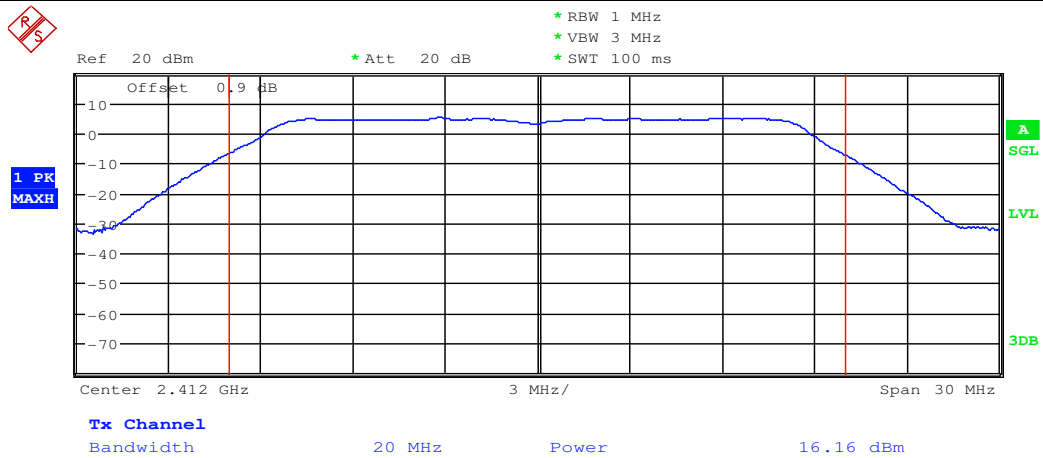


Maximum peak conducted output power\_11N20SISO\_2437

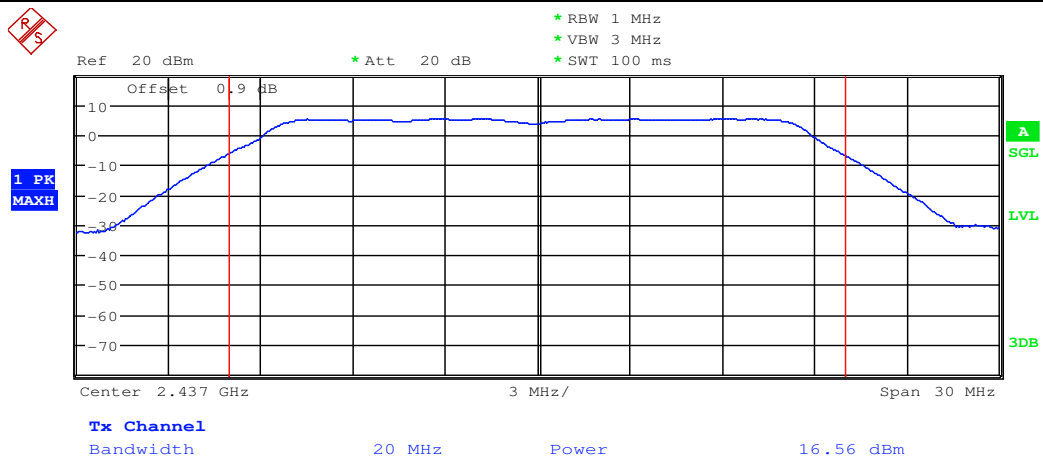





Maximum peak conducted output power\_11N20SISO\_2462

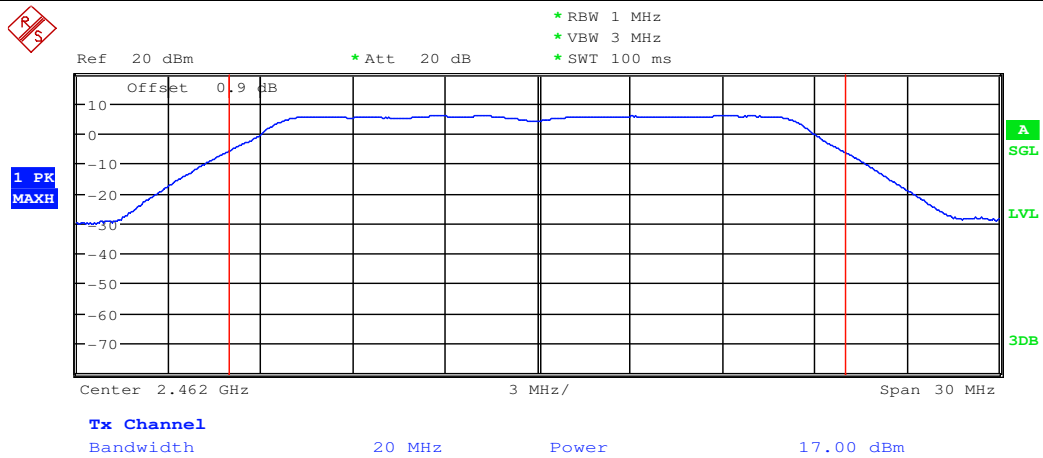


Maximum peak conducted output power\_11N40SISO\_2422

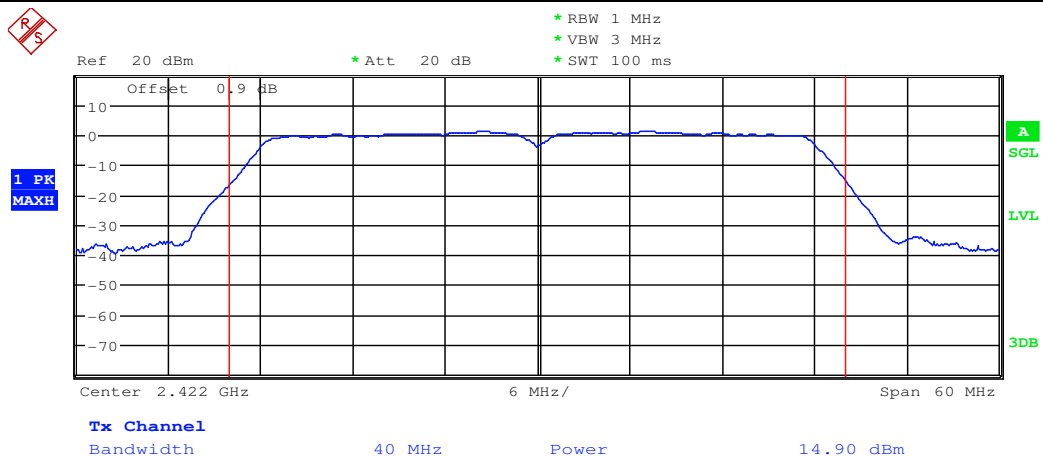

Maximum peak conducted output power\_11N40SISO\_2437

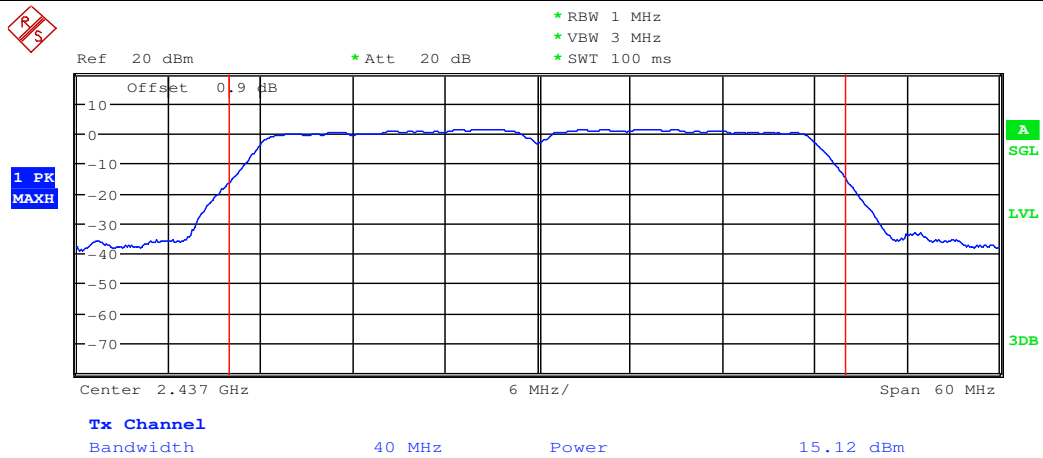

Maximum peak conducted output power\_11N40SISO\_2452

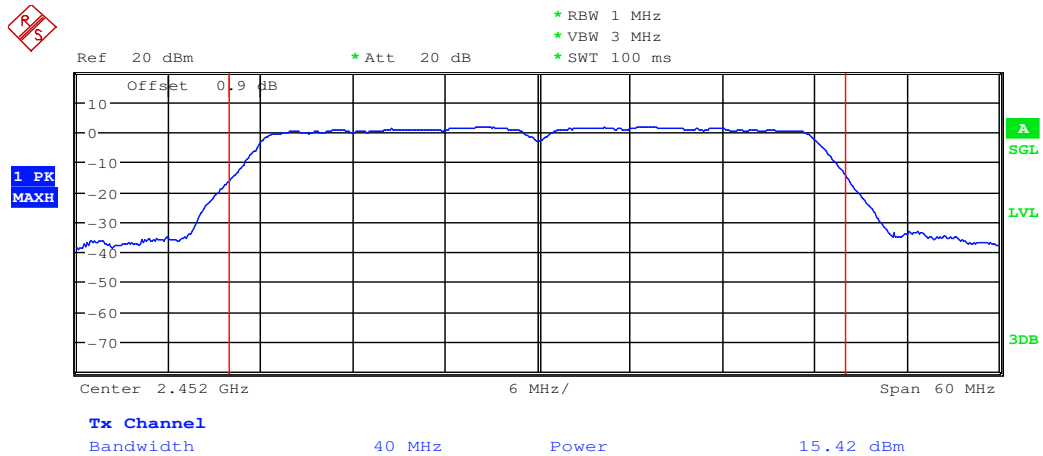





### 3. Maximum Peak power spectral density

| Test Mode | Test Channel | PSD[dBm/MHz] | Limit[dBm/MHz] | Verdict |
|-----------|--------------|--------------|----------------|---------|
| 11B       | 2412         | -19.97       | <8.00          | PASS    |
| 11B       | 2437         | -19.61       | <8.00          | PASS    |
| 11B       | 2462         | -19.32       | <8.00          | PASS    |
| 11G       | 2412         | -20.88       | <8.00          | PASS    |
| 11G       | 2437         | -20.14       | <8.00          | PASS    |
| 11G       | 2462         | -19.69       | <8.00          | PASS    |
| 11N20SISO | 2412         | -20.16       | <8.00          | PASS    |
| 11N20SISO | 2437         | -20          | <8.00          | PASS    |
| 11N20SISO | 2462         | -19.27       | <8.00          | PASS    |
| 11N40SISO | 2422         | -21.72       | <8.00          | PASS    |
| 11N40SISO | 2437         | -21.06       | <8.00          | PASS    |
| 11N40SISO | 2452         | -20.74       | <8.00          | PASS    |


**Maximum Peak power spectral density\_11B\_2412**

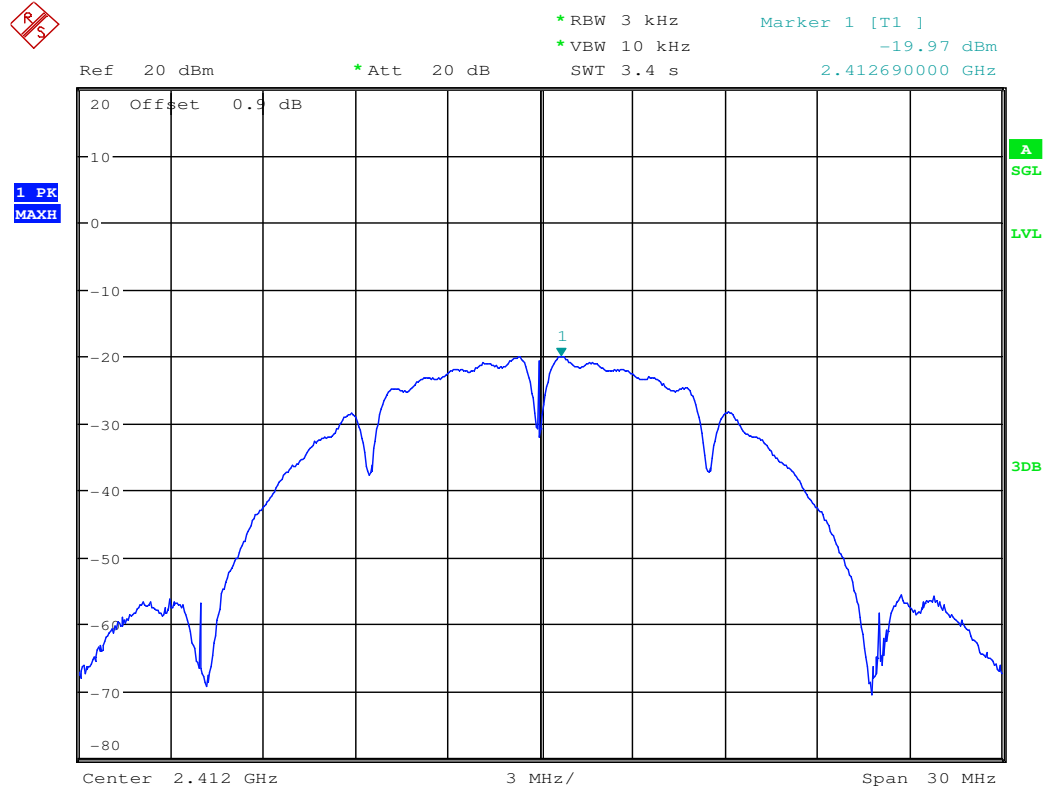


**Maximum Peak power spectral density\_11B\_2437**

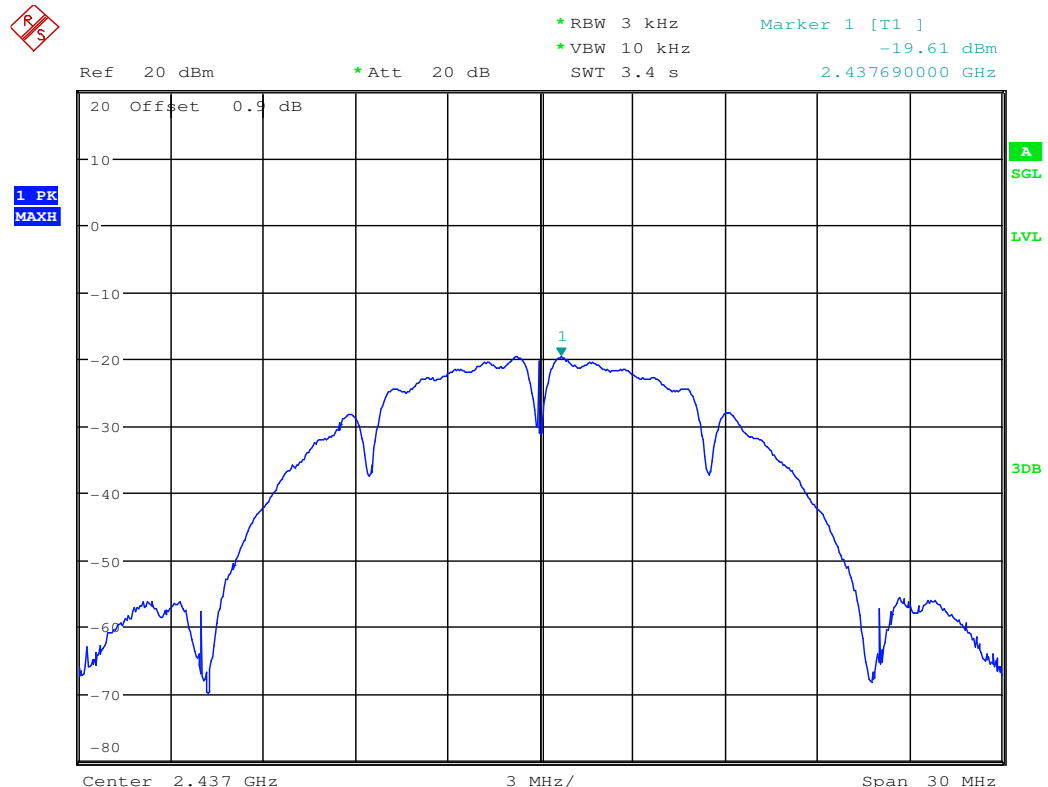

**Maximum Peak power spectral density\_11B\_2462**

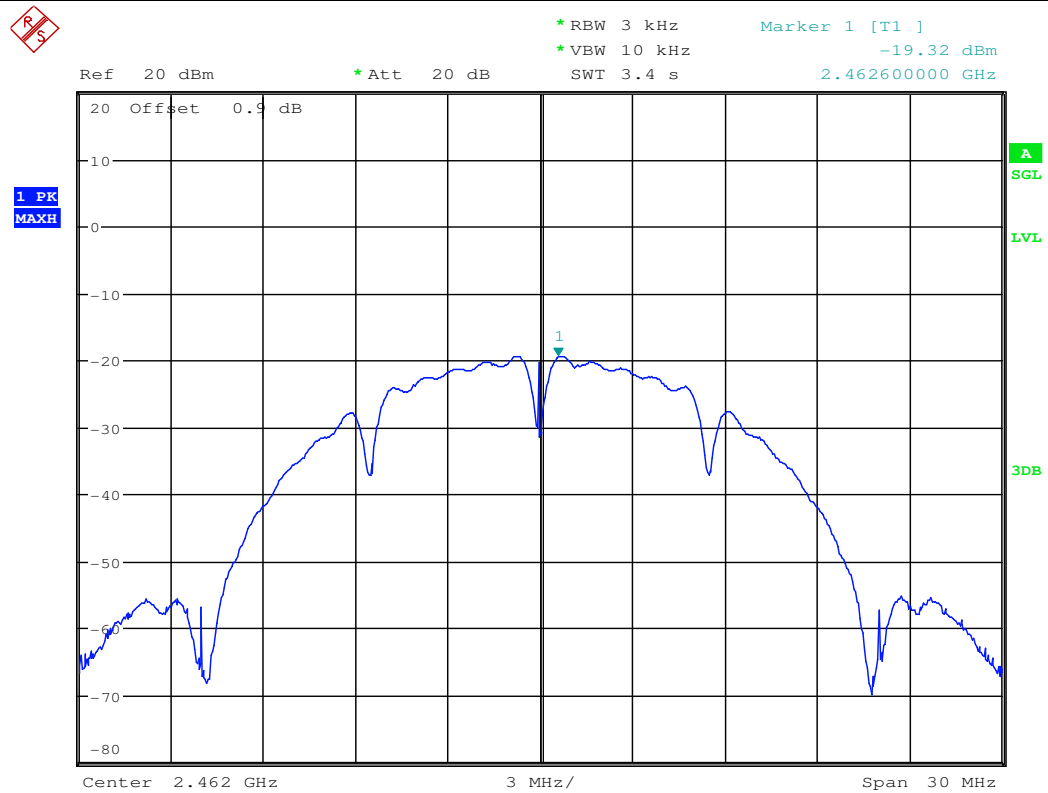


**Maximum Peak power spectral density\_11G\_2412**

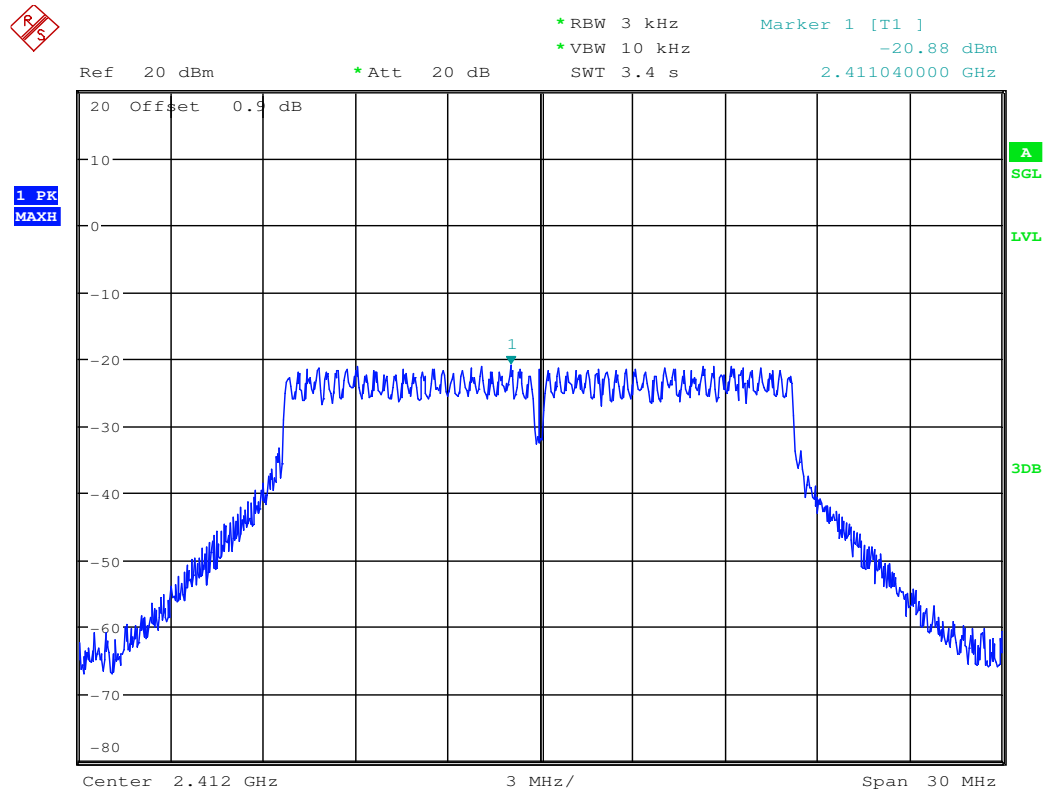




Maximum Peak power spectral density\_11G\_2437

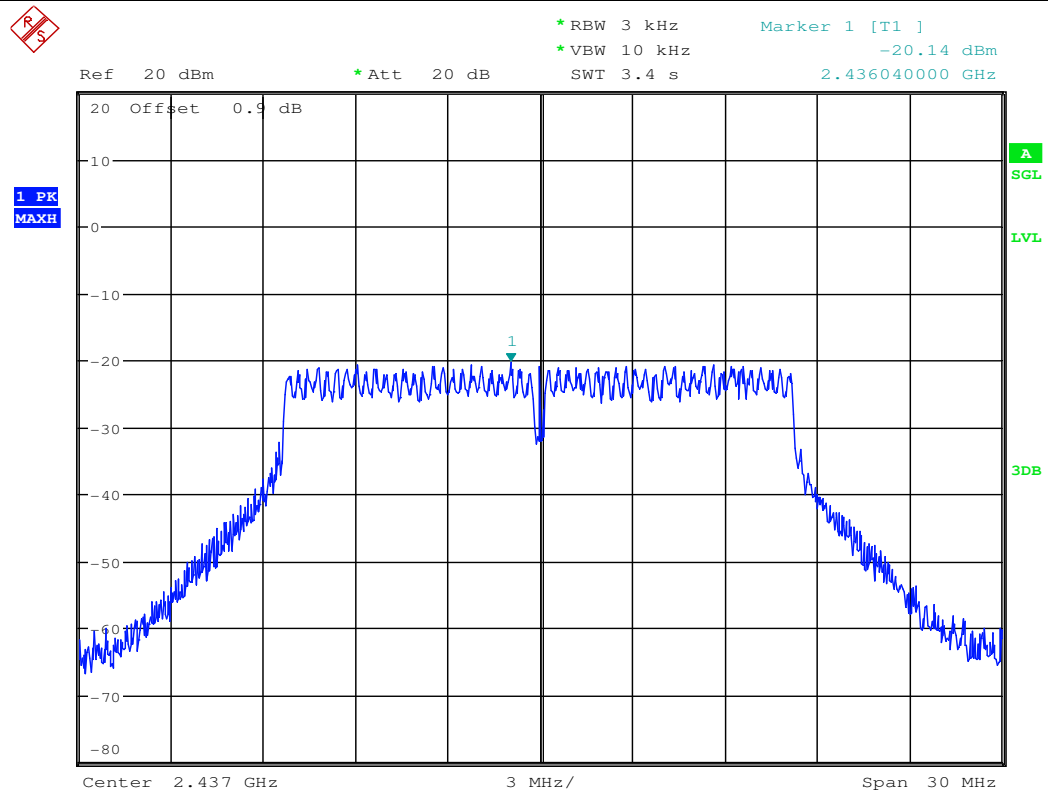


Maximum Peak power spectral density\_11G\_2462

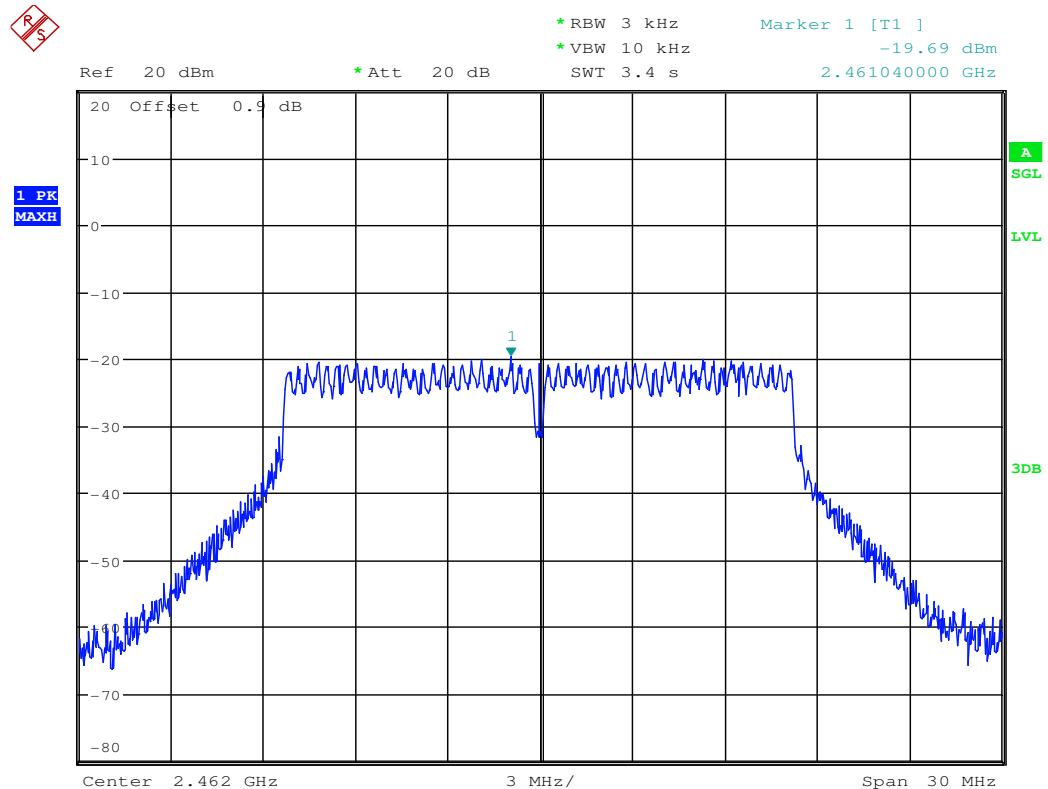




Maximum Peak power spectral density\_11N20SISO\_2412

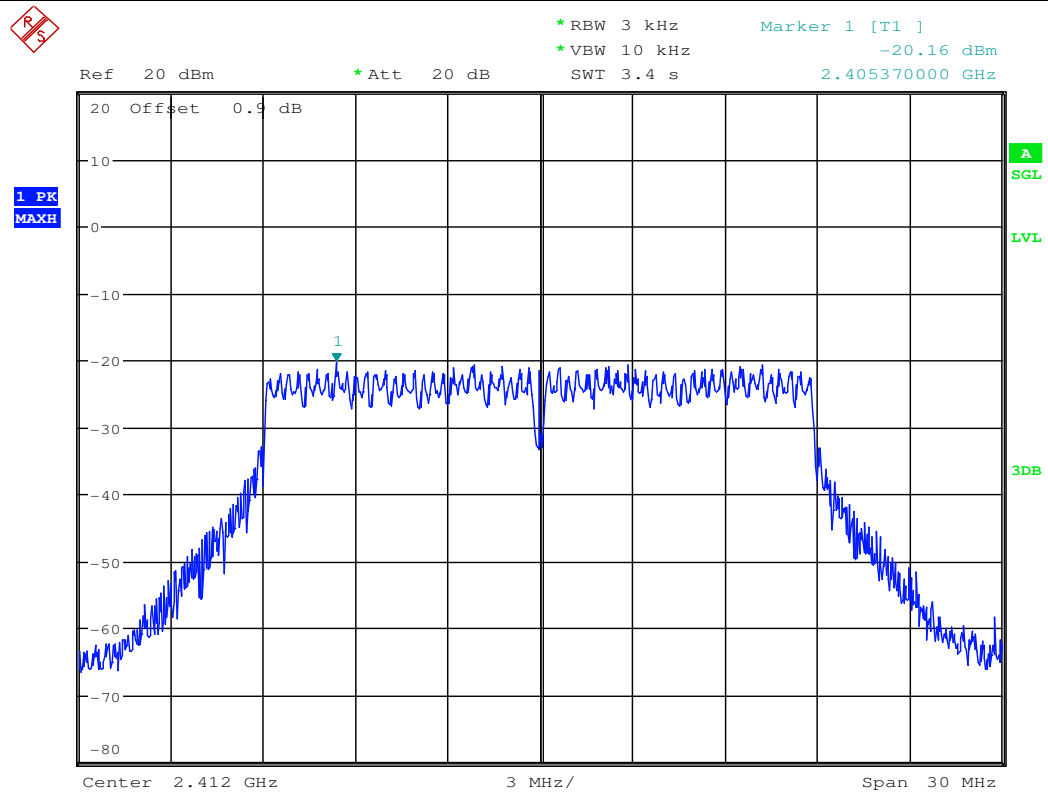


Maximum Peak power spectral density\_11N20SISO\_2437

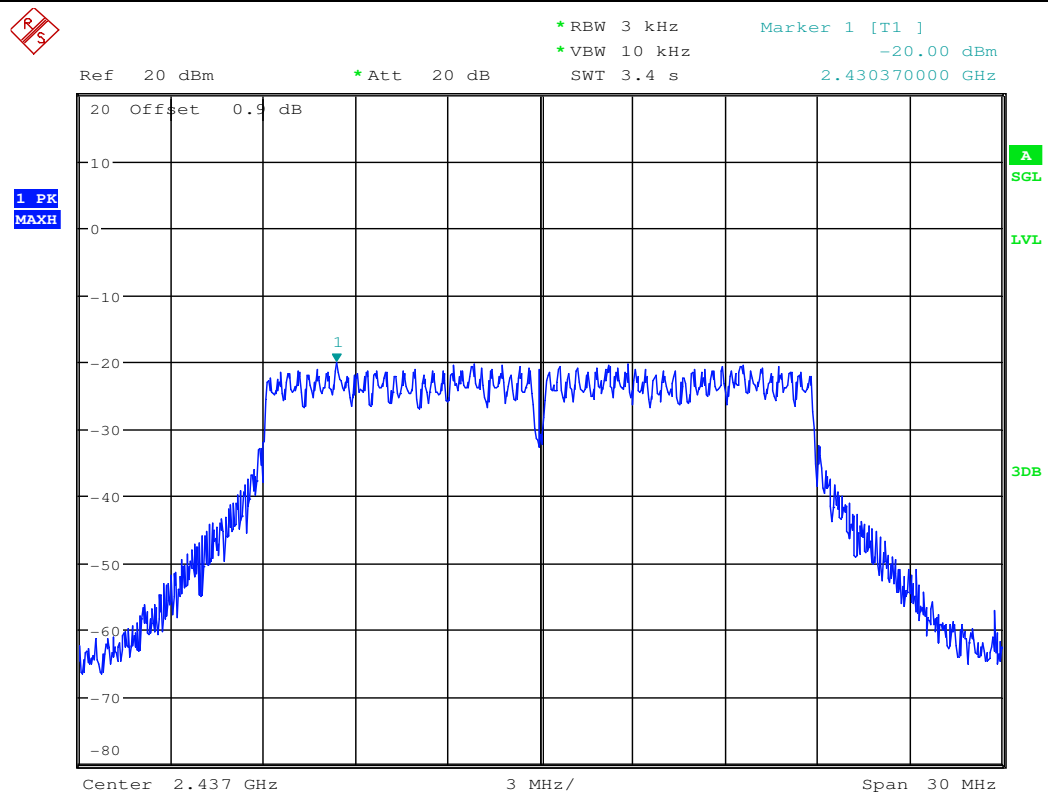




Maximum Peak power spectral density\_11N20SISO\_2462

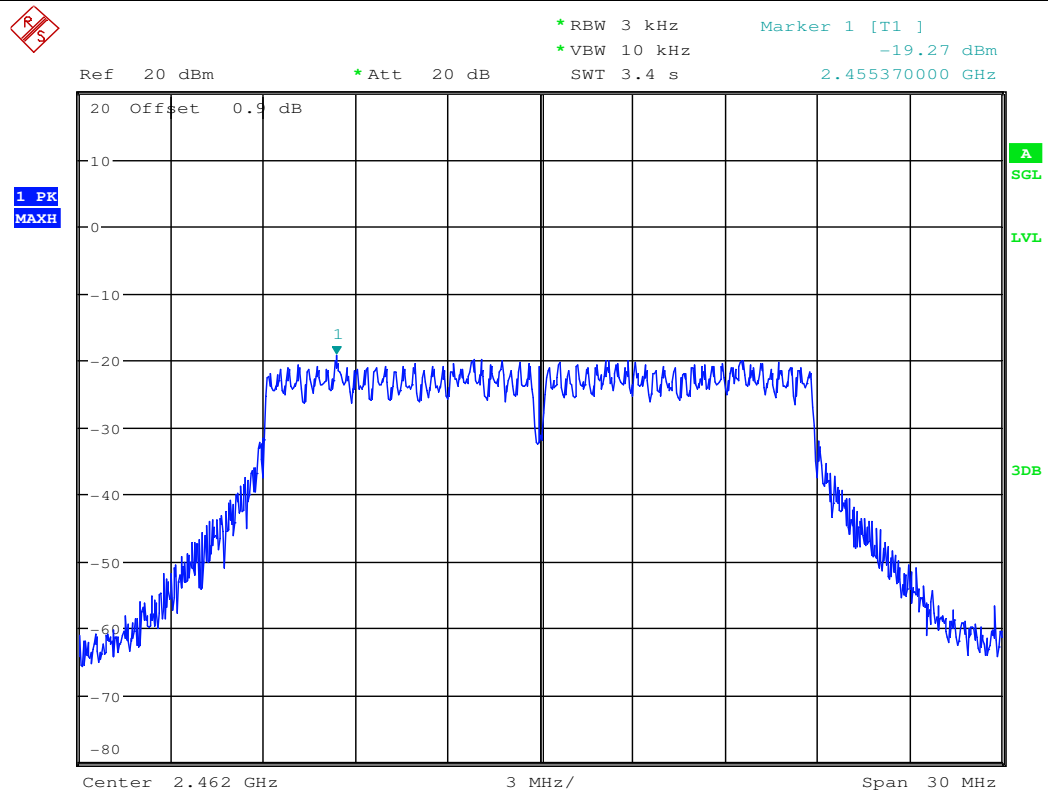


Maximum Peak power spectral density\_11N40SISO\_2422

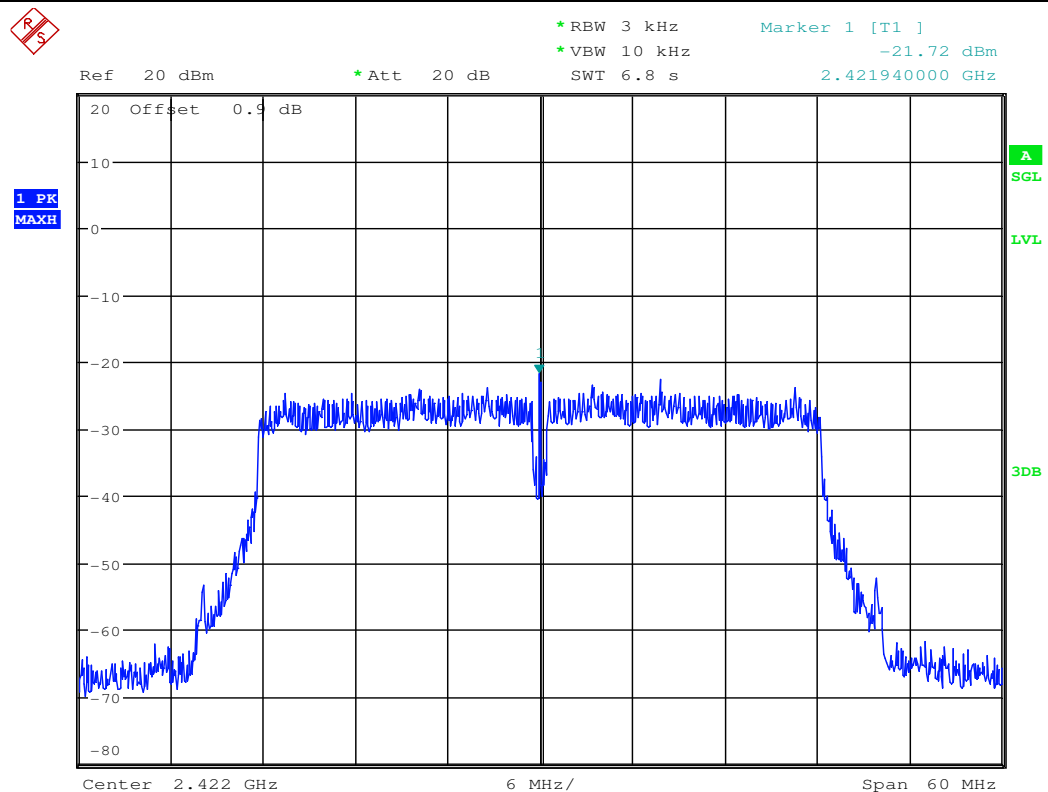




Maximum Peak power spectral density\_11N40SISO\_2437

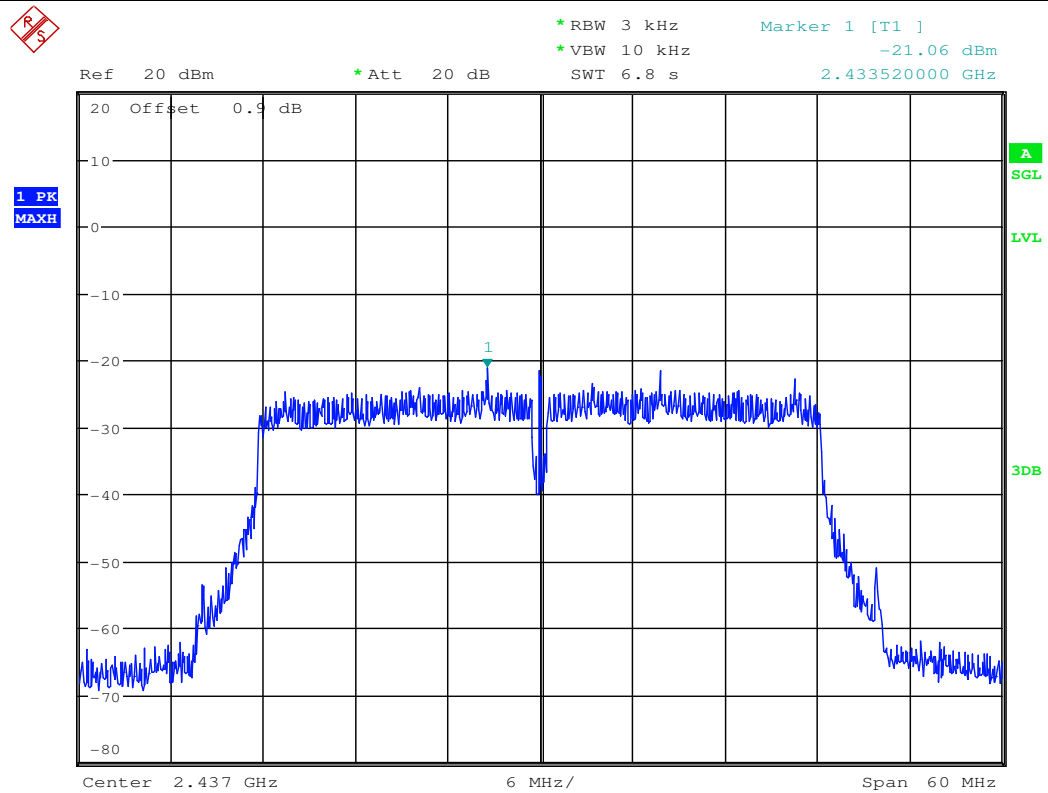

Maximum Peak power spectral density\_11N40SISO\_2452

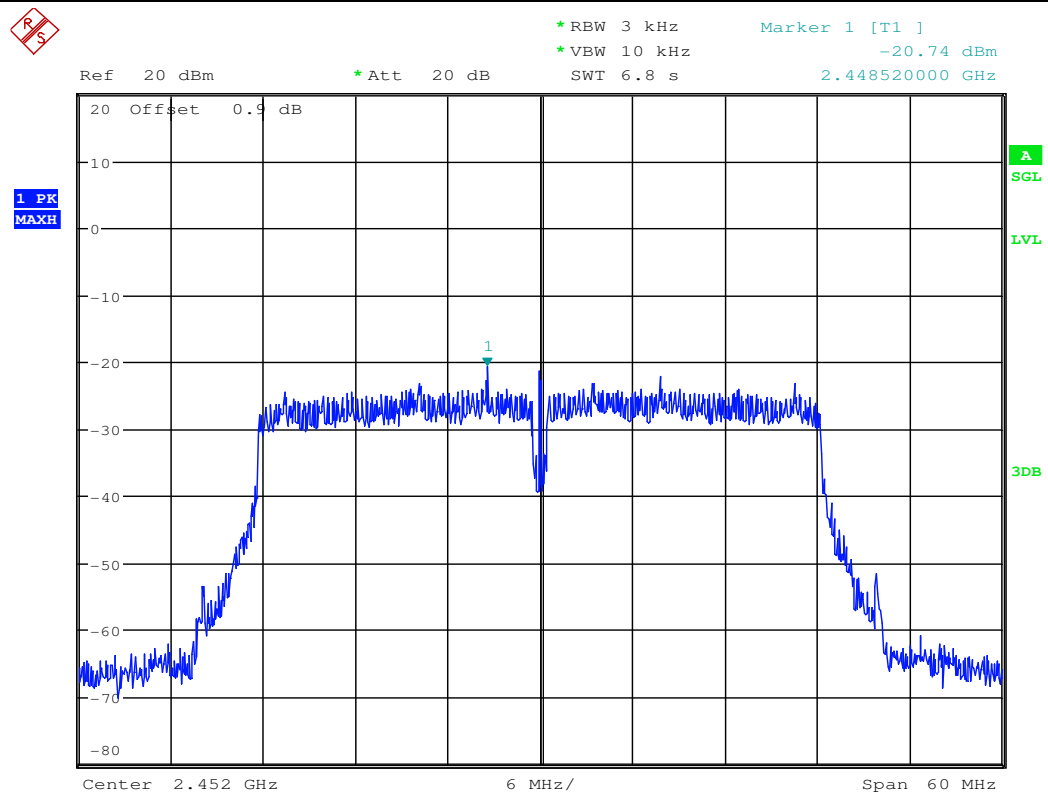





#### 4. Band-edge for RF Conducted Emissions

| Test Mode | Test Channel | Carrier Power[dBm] | Max. Spurious Level [dBm] | Limit [dBm] | Verdict |
|-----------|--------------|--------------------|---------------------------|-------------|---------|
| 11B       | 2412         | -0.350             | -54.539                   | <-20.35     | PASS    |
| 11B       | 2462         | 0.510              | -54.240                   | <-19.49     | PASS    |
| 11G       | 2412         | -6.630             | -52.554                   | <-26.63     | PASS    |
| 11G       | 2462         | -5.730             | -52.262                   | <-25.73     | PASS    |
| 11N20SISO | 2412         | -6.670             | -52.119                   | <-26.67     | PASS    |
| 11N20SISO | 2462         | -5.510             | -48.798                   | <-25.51     | PASS    |
| 11N40SISO | 2422         | -10.620            | -50.945                   | <-30.62     | PASS    |
| 11N40SISO | 2452         | -9.930             | -49.092                   | <-29.93     | PASS    |


Band-edge for RF Conducted Emissions\_11B\_2412\_Hopping Off

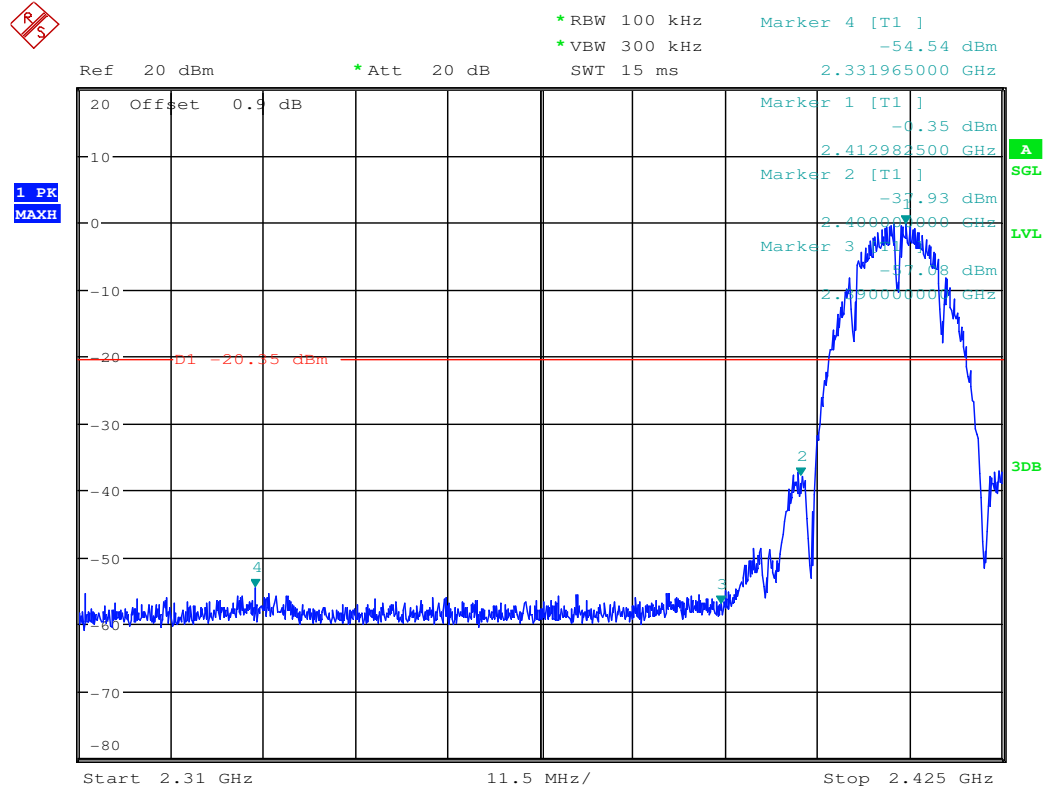


Band-edge for RF Conducted Emissions\_11B\_2462\_Hopping Off

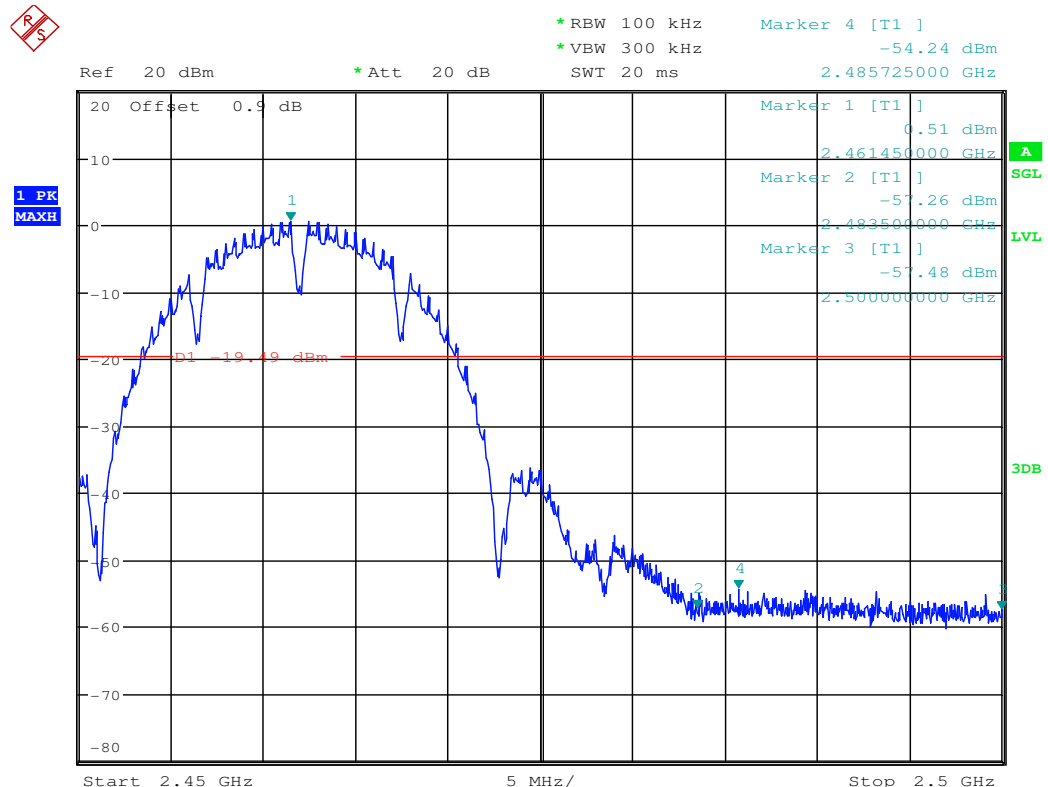


Band-edge for RF Conducted Emissions\_11G\_2412\_Hopping Off

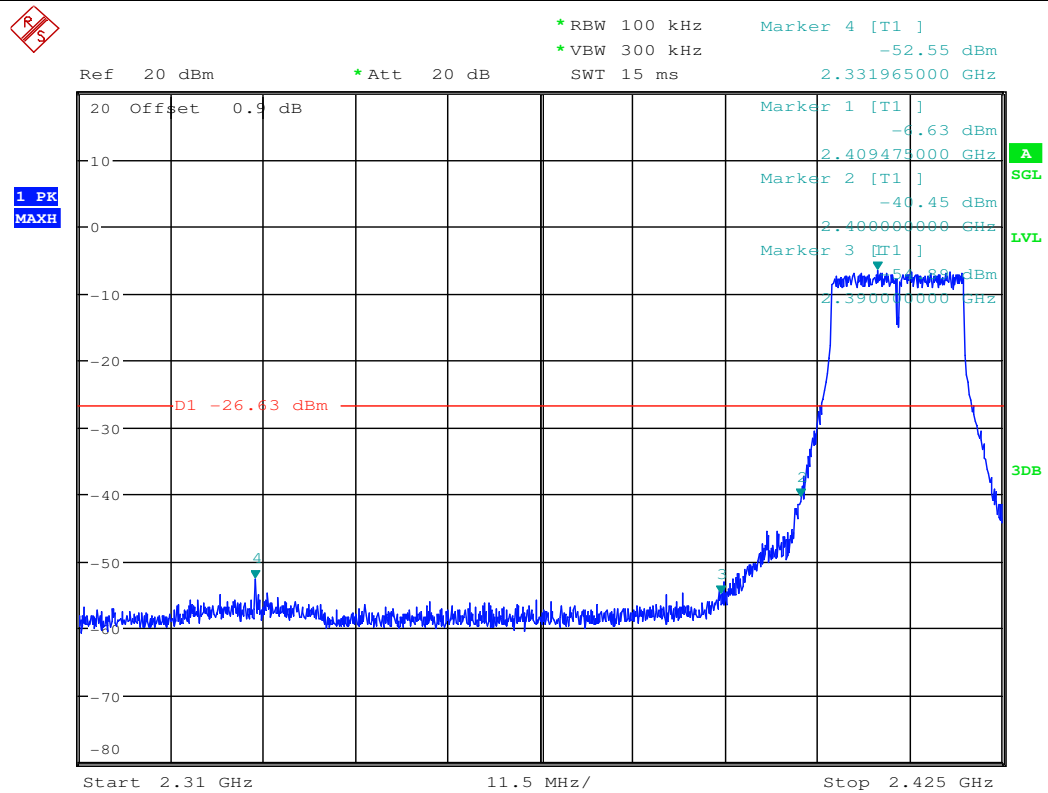


Band-edge for RF Conducted Emissions\_11G\_2462\_Hopping Off


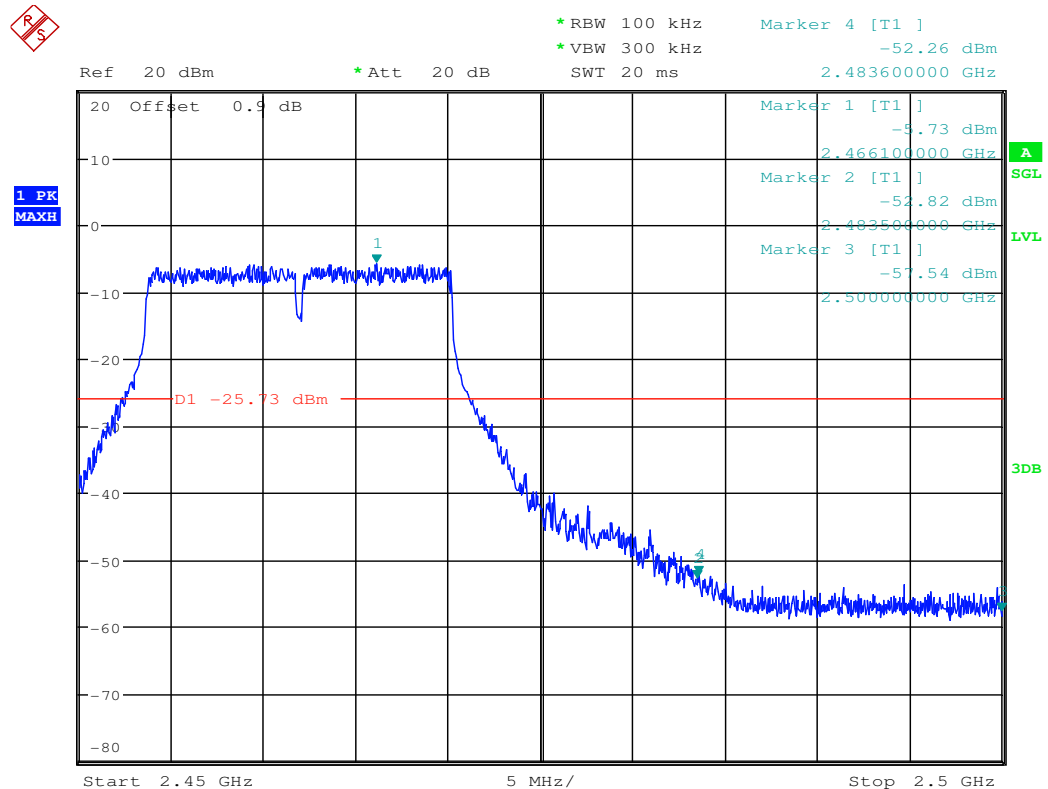


Band-edge for RF Conducted Emissions\_11N20SISO\_2412\_Hopping Off

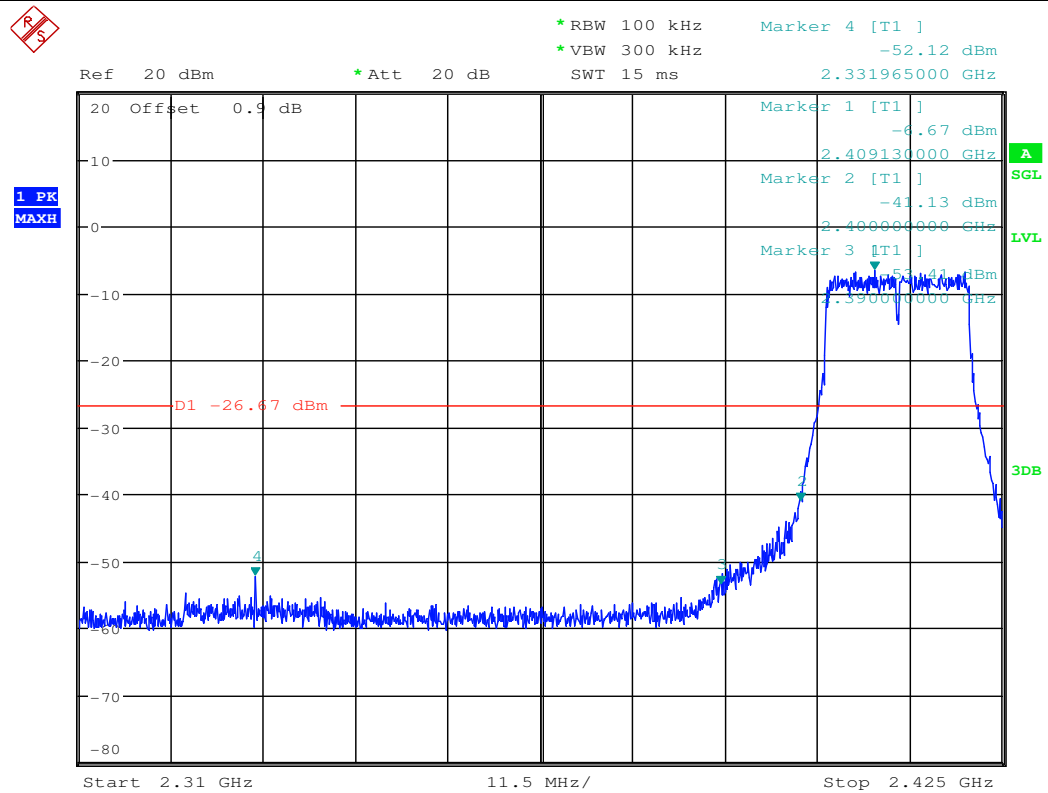

Band-edge for RF Conducted Emissions\_11N20SISO\_2462\_Hopping Off

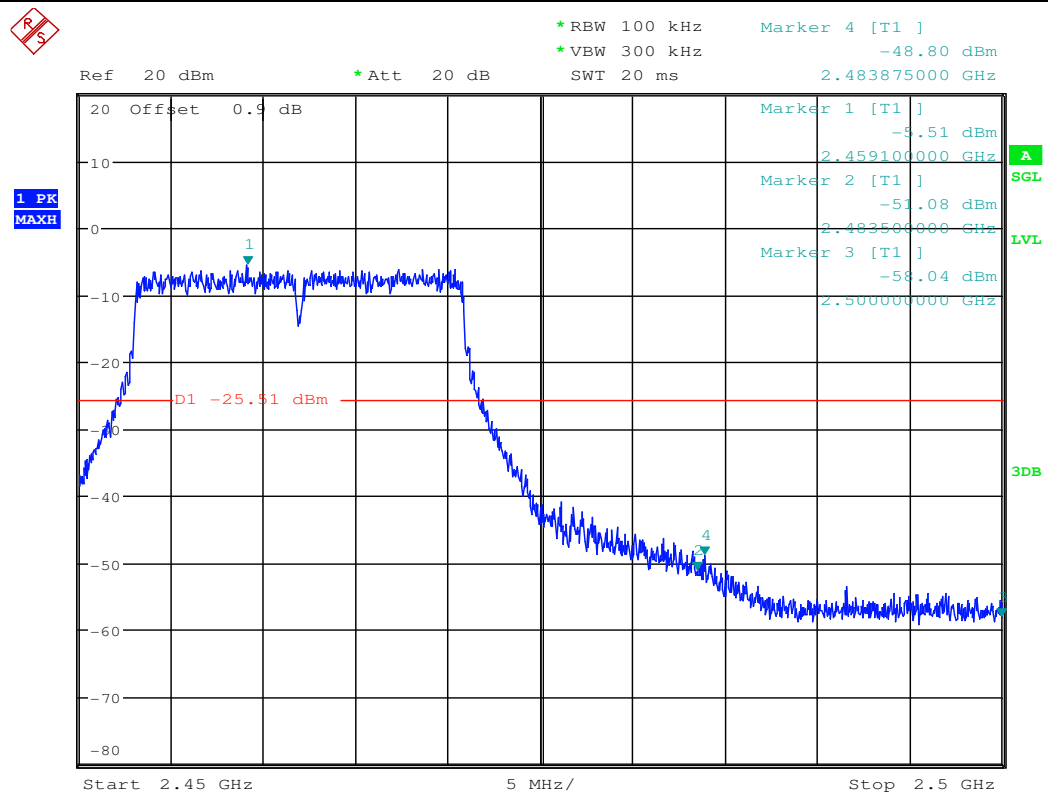

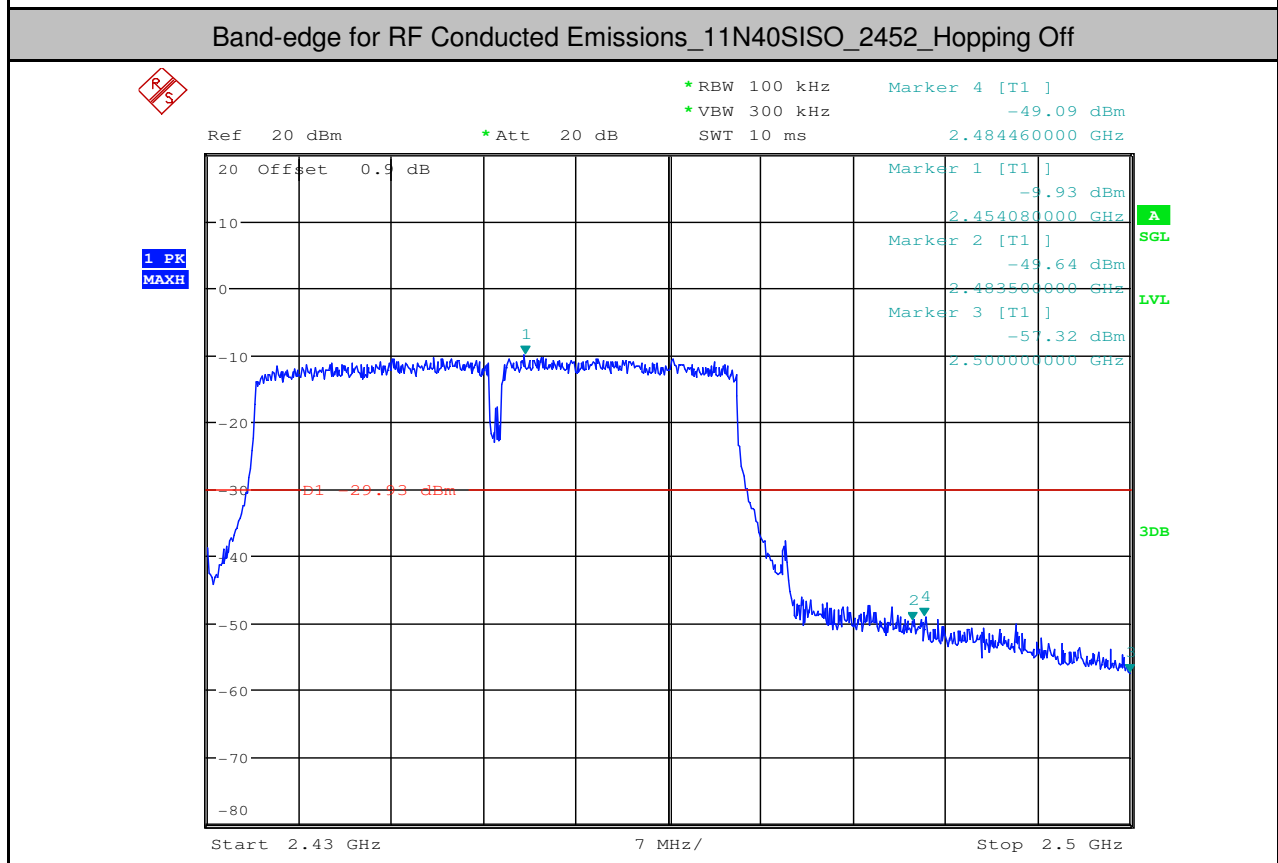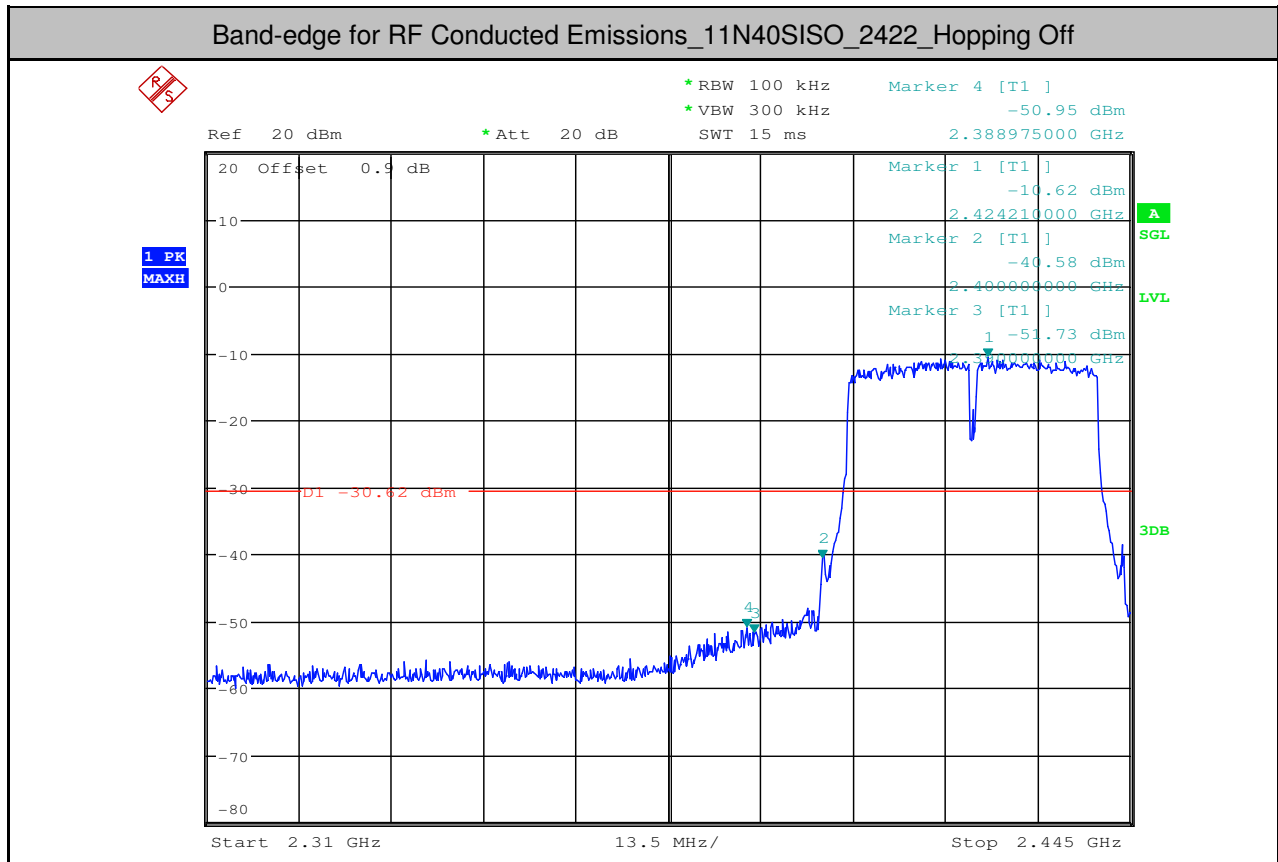



#### 5.RF Conducted Spurious Emissions

| Test Mode | Test Channel | StartFre [MHz] | StopFre [MHz] | RBW [kHz] | VBW [kHz] | Pref [dBm] | Max. Level [dBm] | Limit [dBm] | Verdict |
|-----------|--------------|----------------|---------------|-----------|-----------|------------|------------------|-------------|---------|
| 11B       | 2412         | 30             | 10000         | 1000      | 3000      | -0.41      | -41.110          | <-20.41     | PASS    |
| 11B       | 2412         | 10000          | 25000         | 1000      | 3000      | -0.41      | -54.800          | <-20.41     | PASS    |
| 11B       | 2437         | 30             | 10000         | 1000      | 3000      | 0.01       | -40.680          | <-19.99     | PASS    |
| 11B       | 2437         | 10000          | 25000         | 1000      | 3000      | 0.01       | -55.170          | <-19.99     | PASS    |
| 11B       | 2462         | 30             | 10000         | 1000      | 3000      | 0.38       | -40.400          | <-19.62     | PASS    |
| 11B       | 2462         | 10000          | 25000         | 1000      | 3000      | 0.38       | -55.280          | <-19.62     | PASS    |
| 11G       | 2412         | 30             | 10000         | 1000      | 3000      | -6.43      | -43.270          | <-26.43     | PASS    |
| 11G       | 2412         | 10000          | 25000         | 1000      | 3000      | -6.43      | -55.160          | <-26.43     | PASS    |
| 11G       | 2437         | 30             | 10000         | 1000      | 3000      | -6.14      | -42.490          | <-26.14     | PASS    |
| 11G       | 2437         | 10000          | 25000         | 1000      | 3000      | -6.14      | -55.020          | <-26.14     | PASS    |
| 11G       | 2462         | 30             | 10000         | 1000      | 3000      | -5.74      | -44.040          | <-25.74     | PASS    |
| 11G       | 2462         | 10000          | 25000         | 1000      | 3000      | -5.74      | -54.740          | <-25.74     | PASS    |
| 11N20SISO | 2412         | 30             | 10000         | 1000      | 3000      | -6.46      | -43.720          | <-26.46     | PASS    |
| 11N20SISO | 2412         | 10000          | 25000         | 1000      | 3000      | -6.46      | -55.330          | <-26.46     | PASS    |
| 11N20SISO | 2437         | 30             | 10000         | 1000      | 3000      | -6.26      | -44.320          | <-26.26     | PASS    |
| 11N20SISO | 2437         | 10000          | 25000         | 1000      | 3000      | -6.26      | -55.400          | <-26.26     | PASS    |
| 11N20SISO | 2462         | 30             | 10000         | 1000      | 3000      | -5.63      | -42.070          | <-25.63     | PASS    |
| 11N20SISO | 2462         | 10000          | 25000         | 1000      | 3000      | -5.63      | -54.770          | <-25.63     | PASS    |
| 11N40SISO | 2422         | 30             | 10000         | 1000      | 3000      | -10.87     | -45.100          | <-30.87     | PASS    |
| 11N40SISO | 2422         | 10000          | 25000         | 1000      | 3000      | -10.87     | -54.940          | <-30.87     | PASS    |
| 11N40SISO | 2437         | 30             | 10000         | 1000      | 3000      | -10.48     | -45.950          | <-30.48     | PASS    |
| 11N40SISO | 2437         | 10000          | 25000         | 1000      | 3000      | -10.48     | -54.750          | <-30.48     | PASS    |
| 11N40SISO | 2452         | 30             | 10000         | 1000      | 3000      | -9.59      | -46.630          | <-29.59     | PASS    |
| 11N40SISO | 2452         | 10000          | 25000         | 1000      | 3000      | -9.59      | -54.160          | <-29.59     | PASS    |

