


Appendix B

Fundamental Field Strength

Field Strength under normal conditions

according to FCC PART 15/SUBPART C :§15.249


EUT: 2.4 GHz Cordless Phone Handset
MODEL N O.: CT-P8800 CH1
Approval Holder: Coby Manufacturing Co.,Ltd.
Test Site: ETS
Operator: Catey Lee
Test Specification: according to §15.249
Comment: Dist.: 3m, Ant.: HL 025

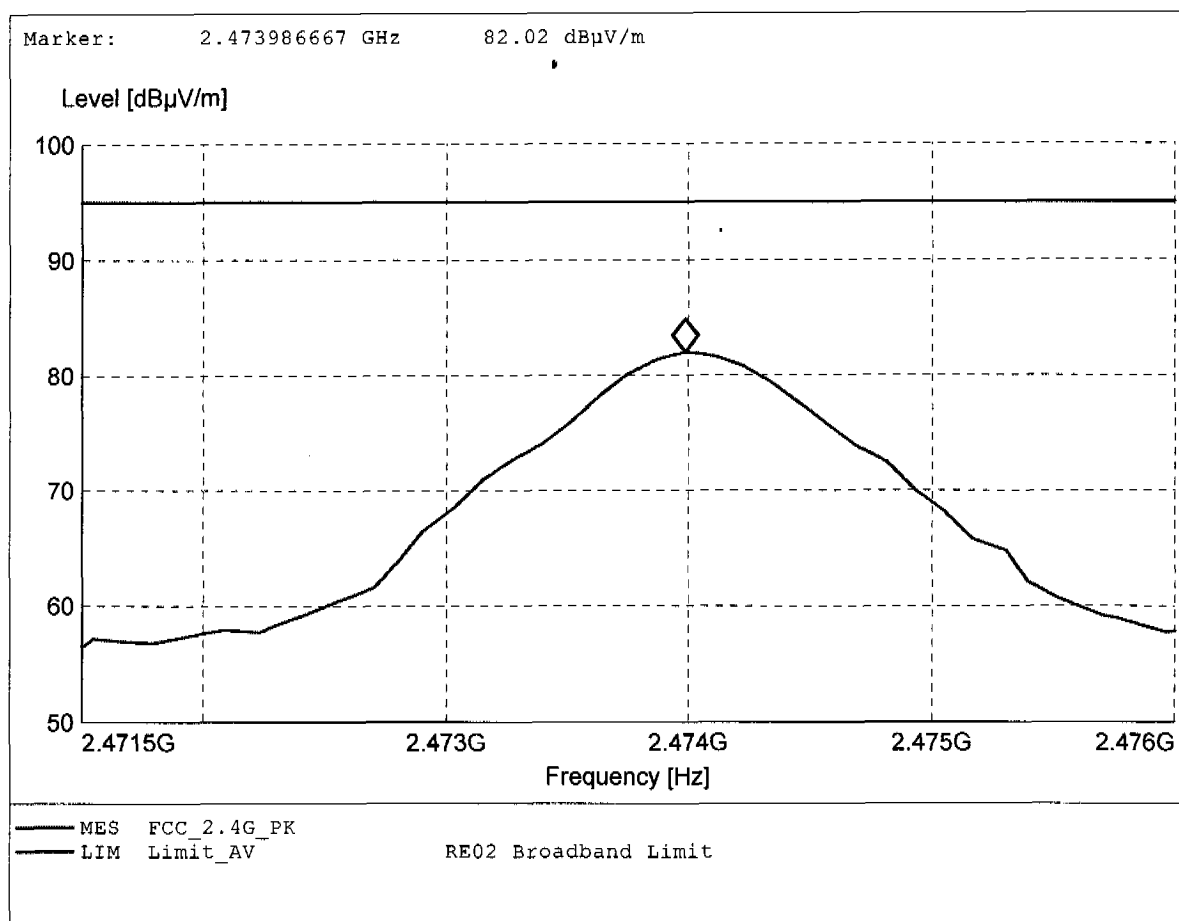

Field Strength under normal conditions

according to FCC PART 15/SUBPART C :§15.249


EUT: 2.4 GHz Cordless Phone Handset
MODEL N O.: CT-P8800 CH1
Approval Holder: Coby Manufacturing Co.,Ltd.
Test Site: ETS
Operator: Catey Lee
Test Specification: according to §15.249
Comment: Dist.: 3m, Ant.: HL 025

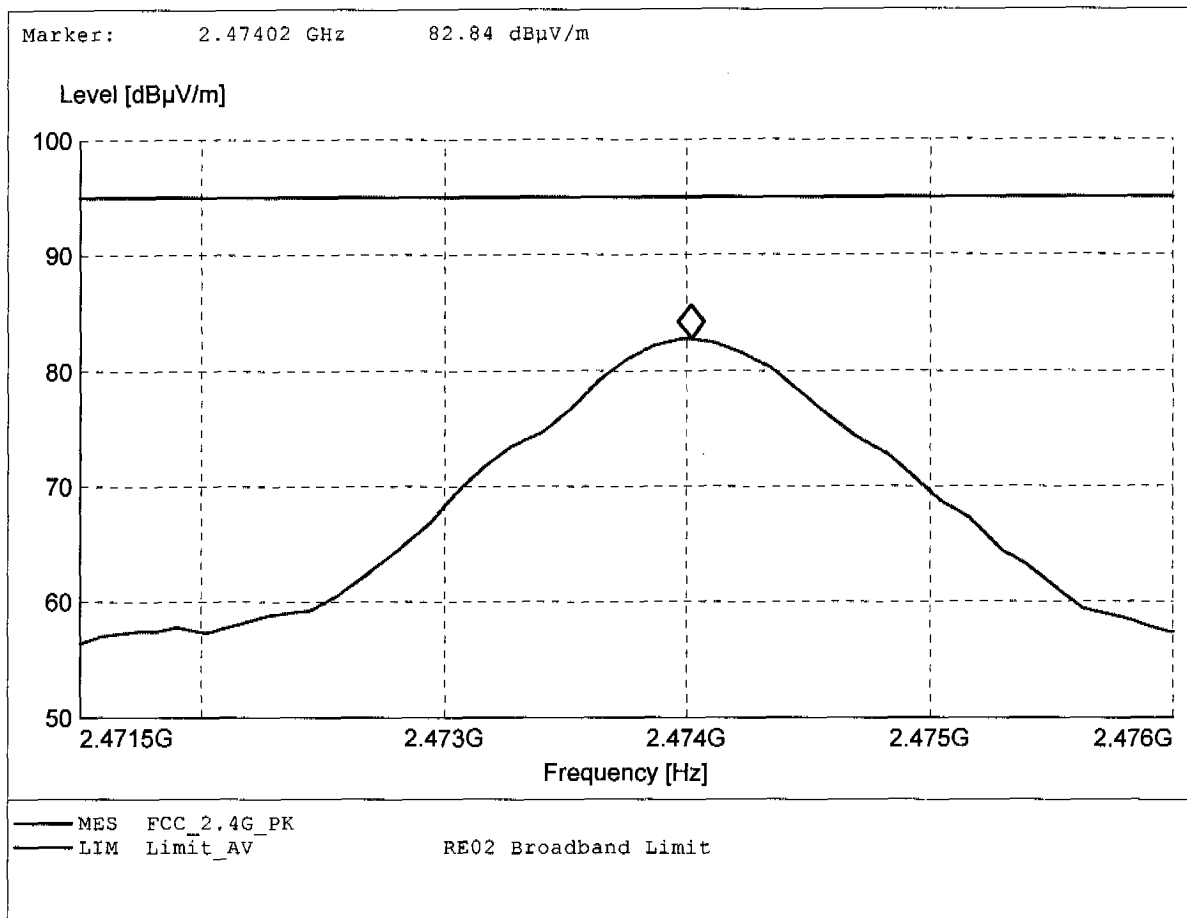

Field Strength under normal conditions

according to FCC PART 15/SUBPART C :§15.249


EUT: 2.4 GHz Cordless Phone Handset
MODEL N O.: CT-P8800 CH50
Approval Holder: Coby Manufacturing Co.,Ltd.
Test Site: ETS
Operator: Catey Lee
Test Specification: according to §15.249
Comment: Dist.: 3m, Ant.: HL 025

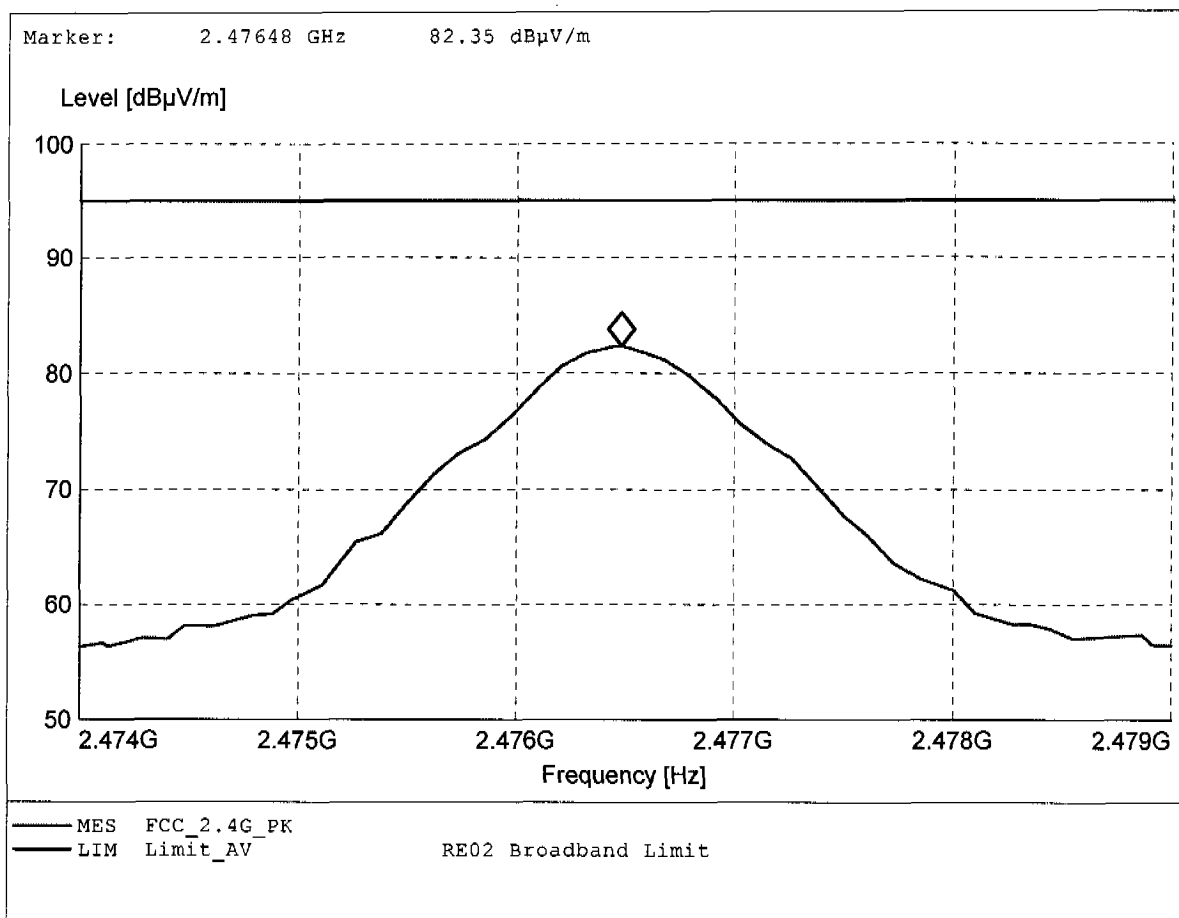

Field Strength under normal conditions

according to FCC PART 15/SUBPART C :\$15.249


EUT: 2.4 GHz Cordless Phone Handset
MODEL N O.: CT-P8800 CH50
Approval Holder: Coby Manufacturing Co.,Ltd.
Test Site: ETS
Operator: Catey Lee
Test Specification: according to \$15.249
Comment: Dist.: 3m, Ant.: HL 025

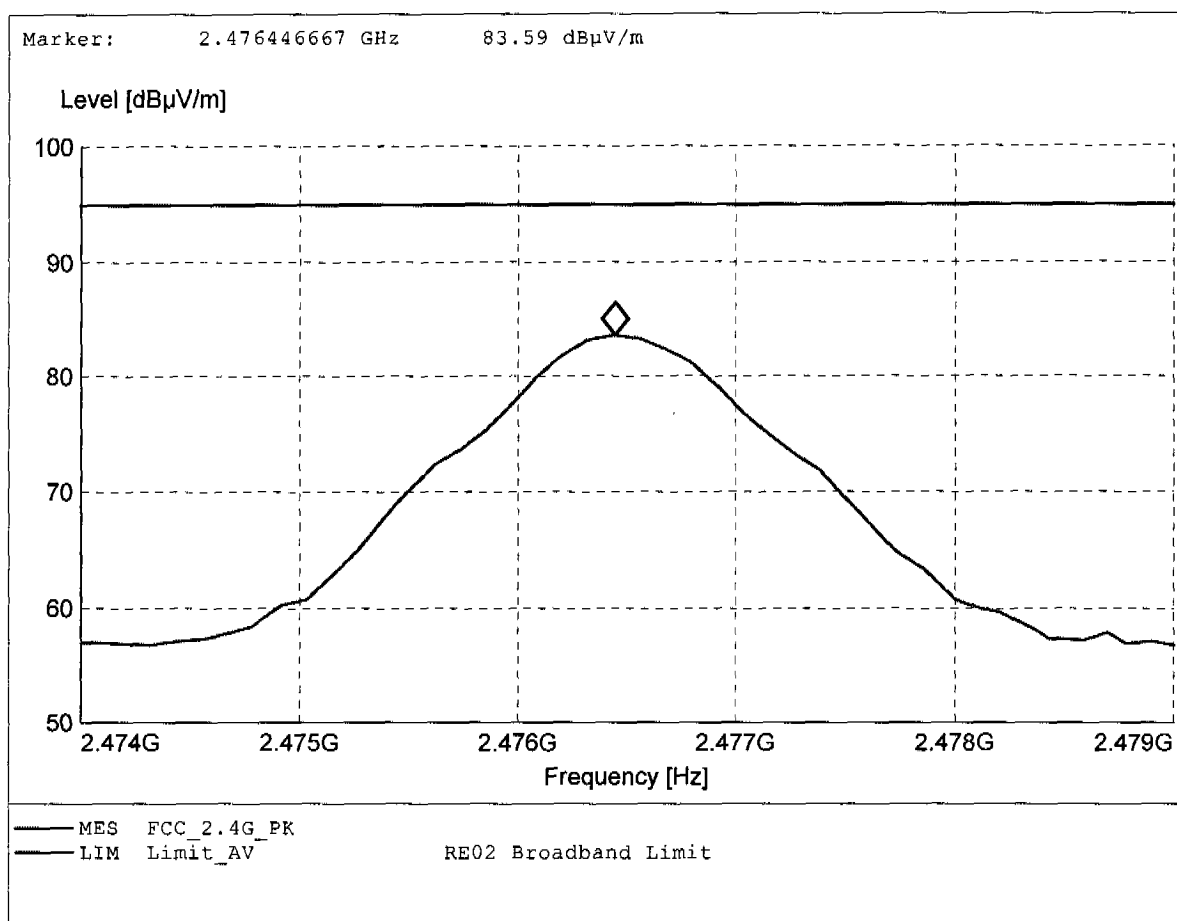

Field Strength under normal conditions

according to FCC PART 15/SUBPART C :§15.249


EUT: 2.4 GHz Cordless Phone Base
MODEL NO.: CT-P8800 CH1
Approval Holder: Coby Manufacturing Co.,Ltd.
Test Site: ETS
Operator: Catey Lee
Test Specification: according to §15.249
Comment: Dist.: 3m, Ant.: HL025

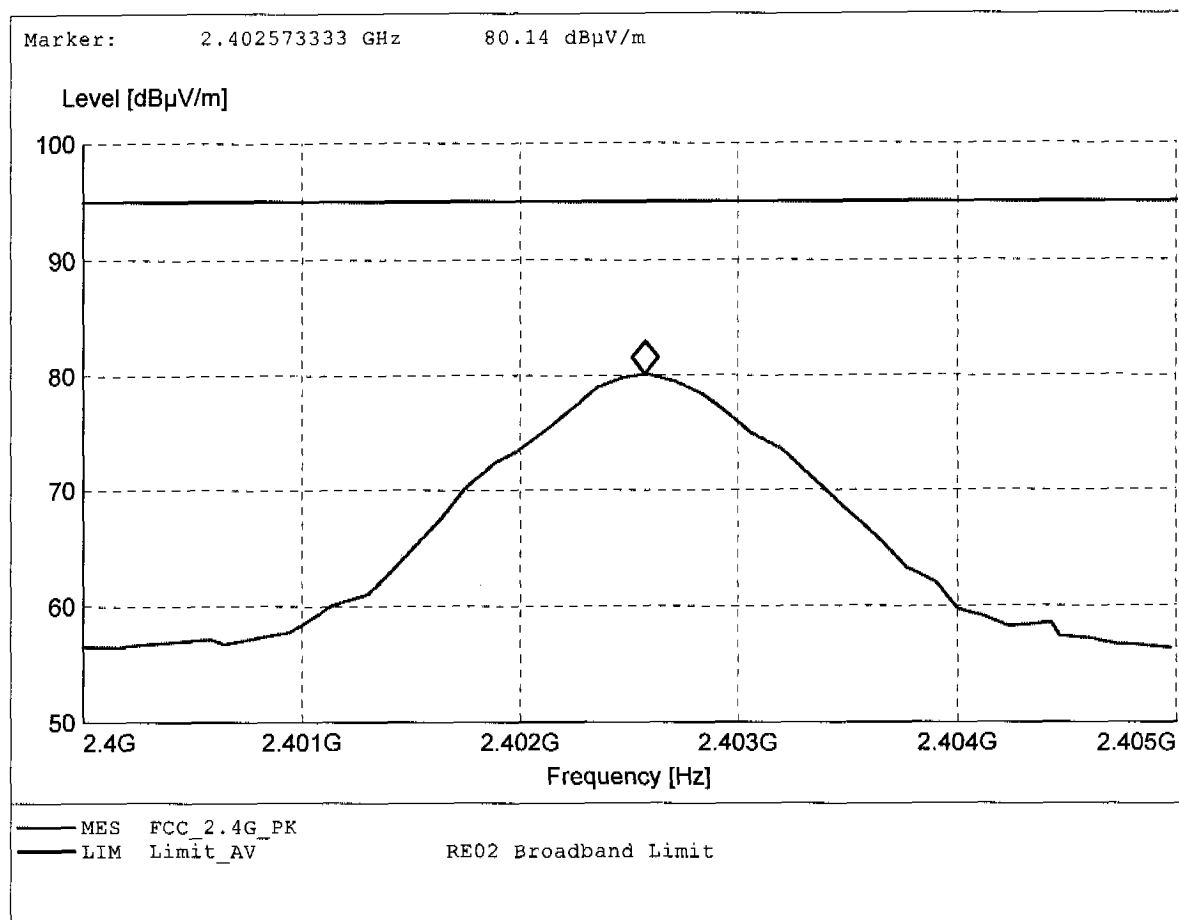

Field Strength under normal conditions

according to FCC PART 15/SUBPART C :§15.249


EUT: 2.4 GHz Cordless Phone Base
MODEL NO.: CT-P8800 CH1
Approval Holder: Coby Manufacturing Co.,Ltd.
Test Site: ETS
Operator: Catey Lee
Test Specification: according to §15.249
Comment: Dist.: 3m, Ant.: HL025

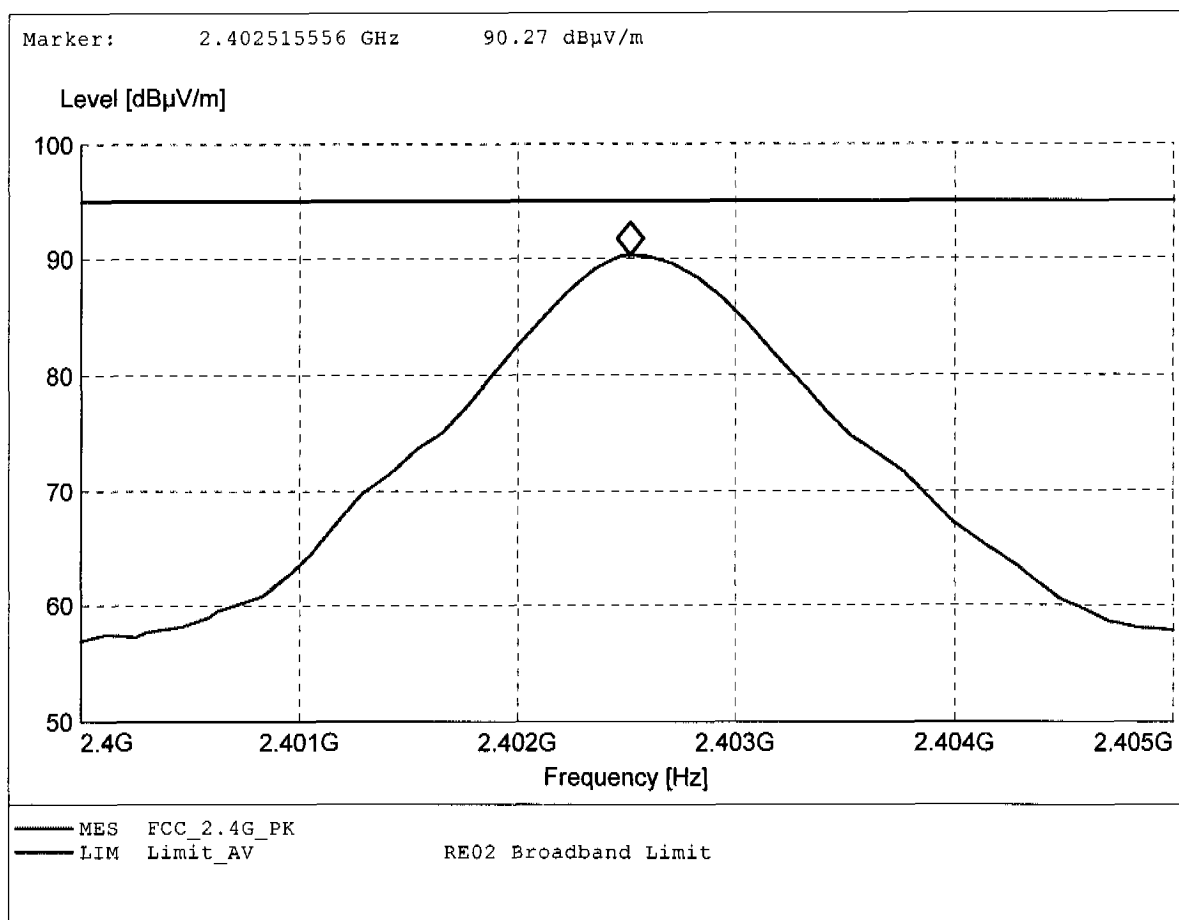

Field Strength under normal conditions

according to FCC PART 15/SUBPART C :§15.249


EUT: 2.4 GHz Cordless Phone Base
MODEL NO.: CT-P8800 CH50
Approval Holder: Coby Manufacturing Co.,Ltd.
Test Site: ETS
Operator: Catey Lee
Test Specification: according to §15.249
Comment: Dist.: 3m, Ant.: HL025

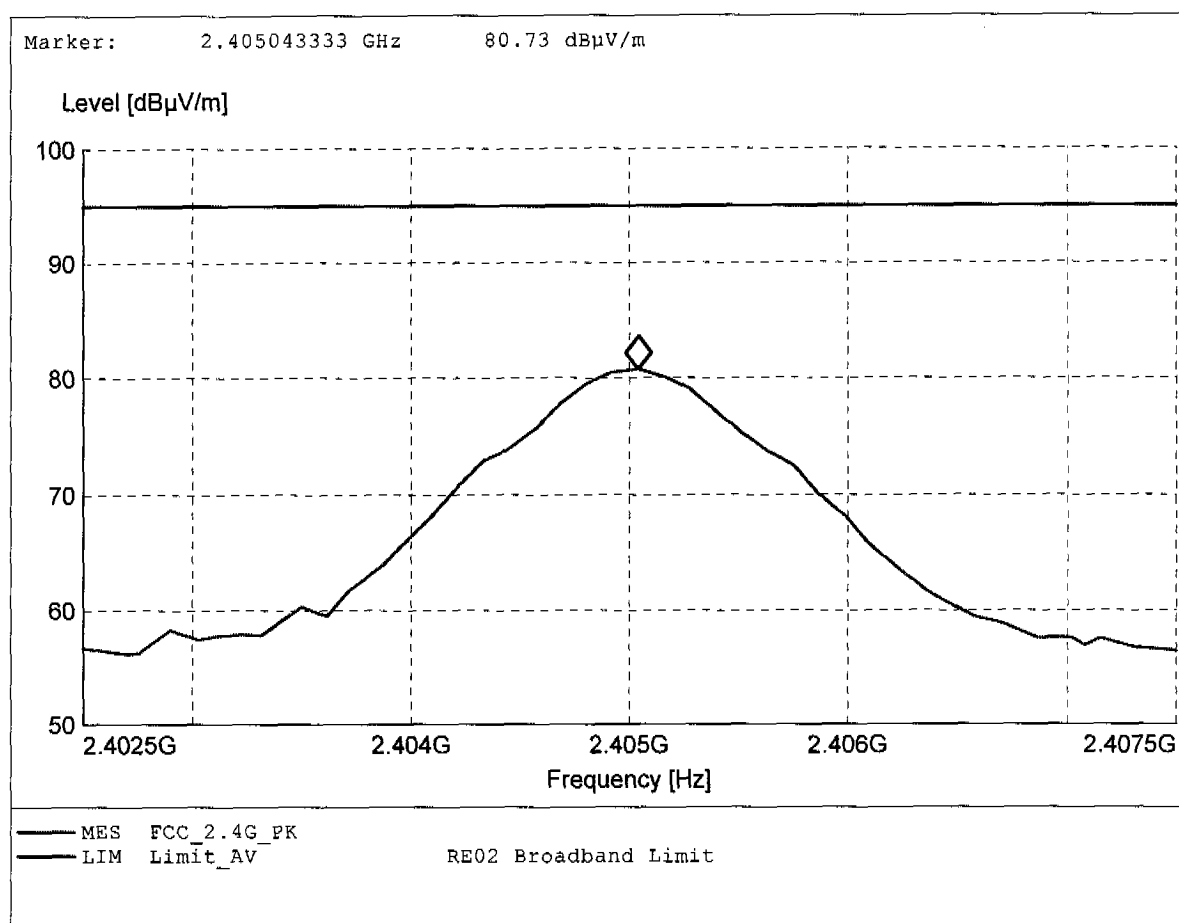

Field Strength under normal conditions

according to FCC PART 15/SUBPART C :§15.249

EUT: 2.4 GHz Cordless Phone Base
MODEL NO.: CT-P8800 CH50
Approval Holder: Coby Manufacturing Co.,Ltd.
Test Site: ETS
Operator: Catey Lee
Test Specification: according to §15.249
Comment: Dist.: 3m, Ant.: HL025

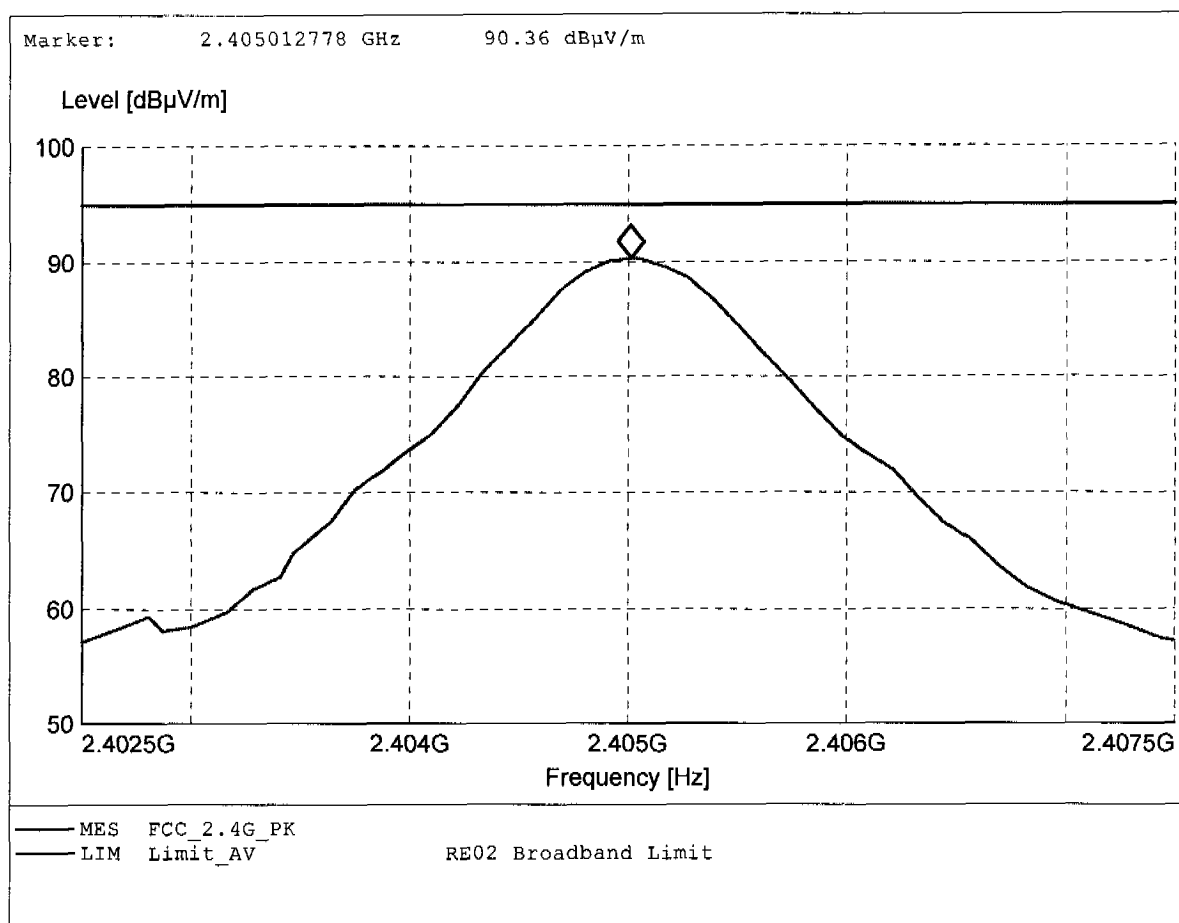


Appendix C

Spurious Emissions radiated - Transmitter operating

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHZ Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Cob y Manufacturing Co.,Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 181.603MHz, Emax: 34.14dBμV/m, RBW: 100kHz

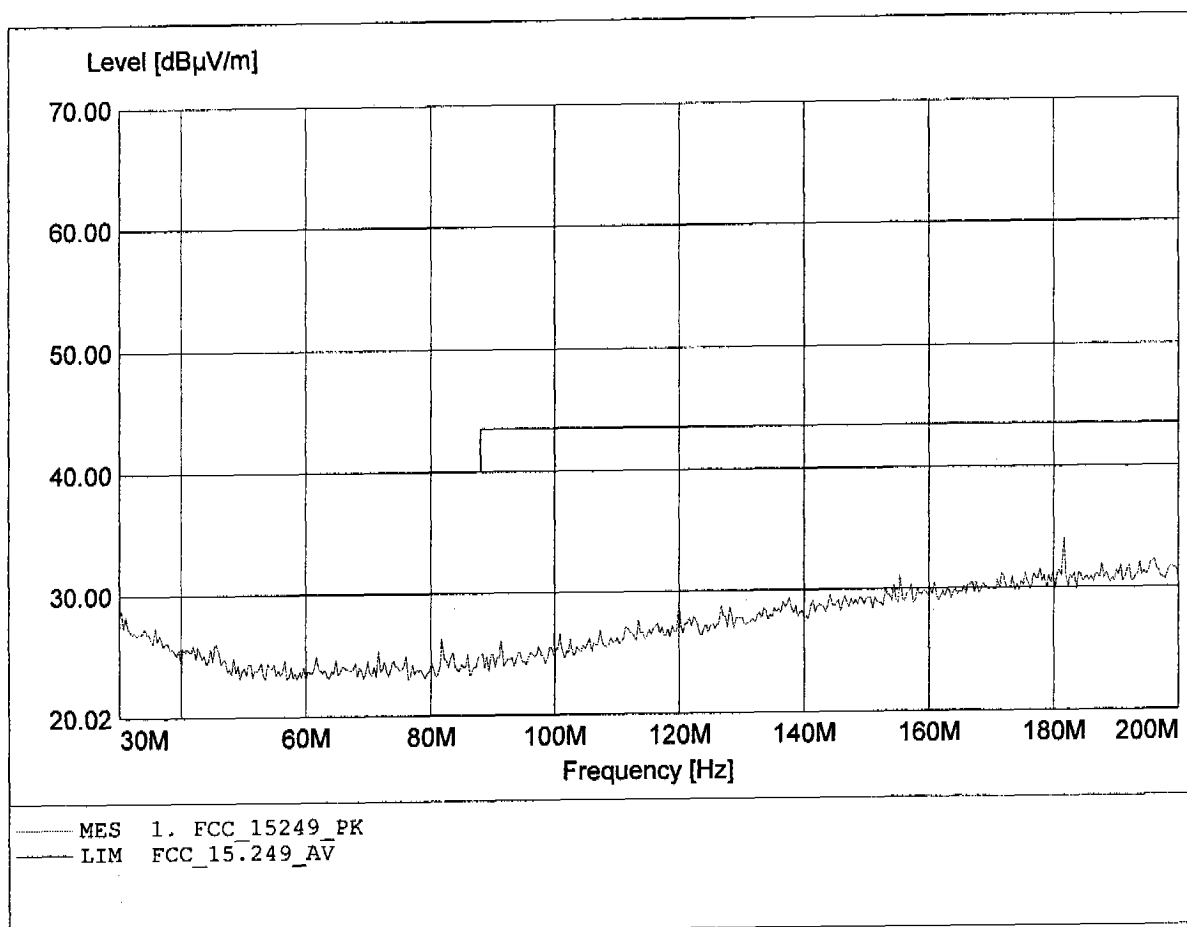

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHZ Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Cob y Manufacturing Co.,Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 146.172MHz, Emax: 32.32dBμV/m, RBW: 100kHz

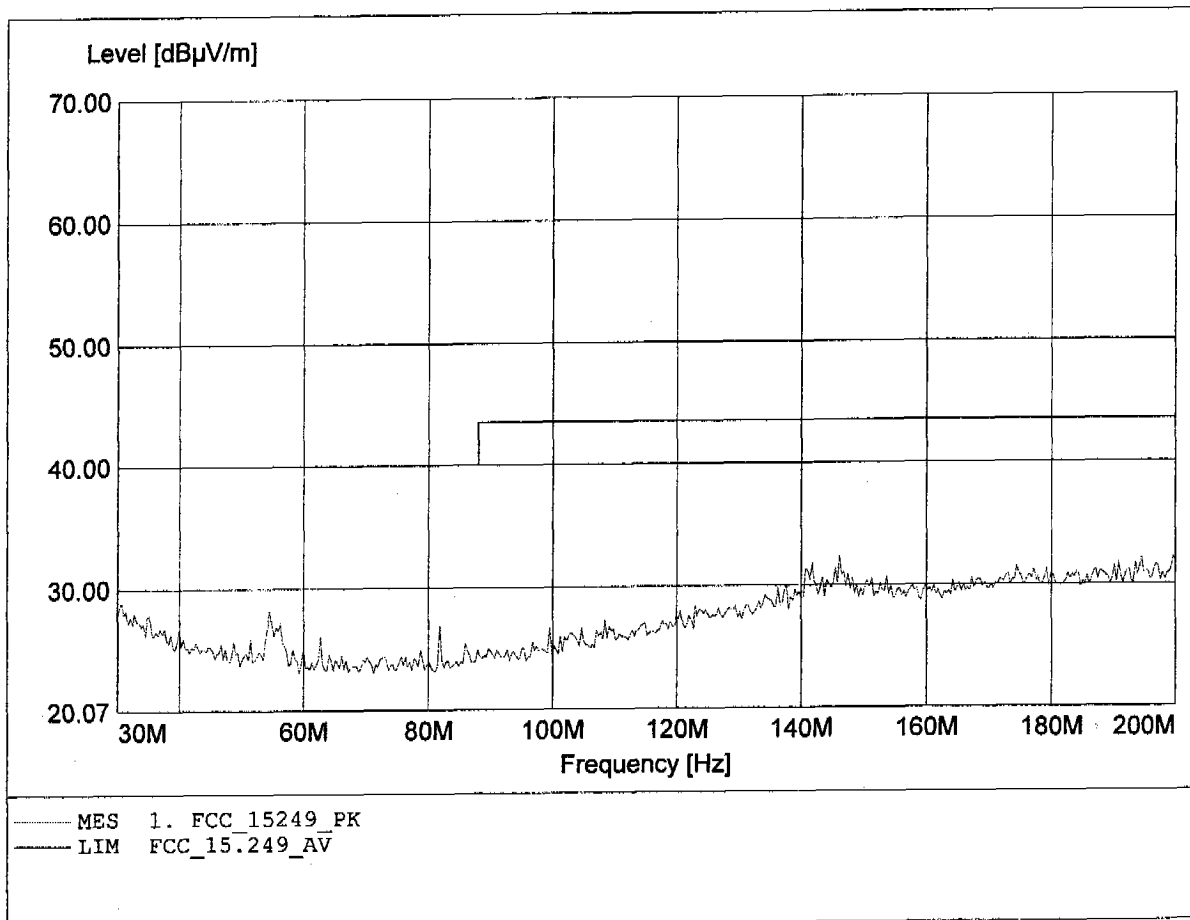

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHZ Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Cob y Manufacturing Co.,Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Freq: 801.202MHz, Emax: 32.92dBµV/m, RBW: 100kHz

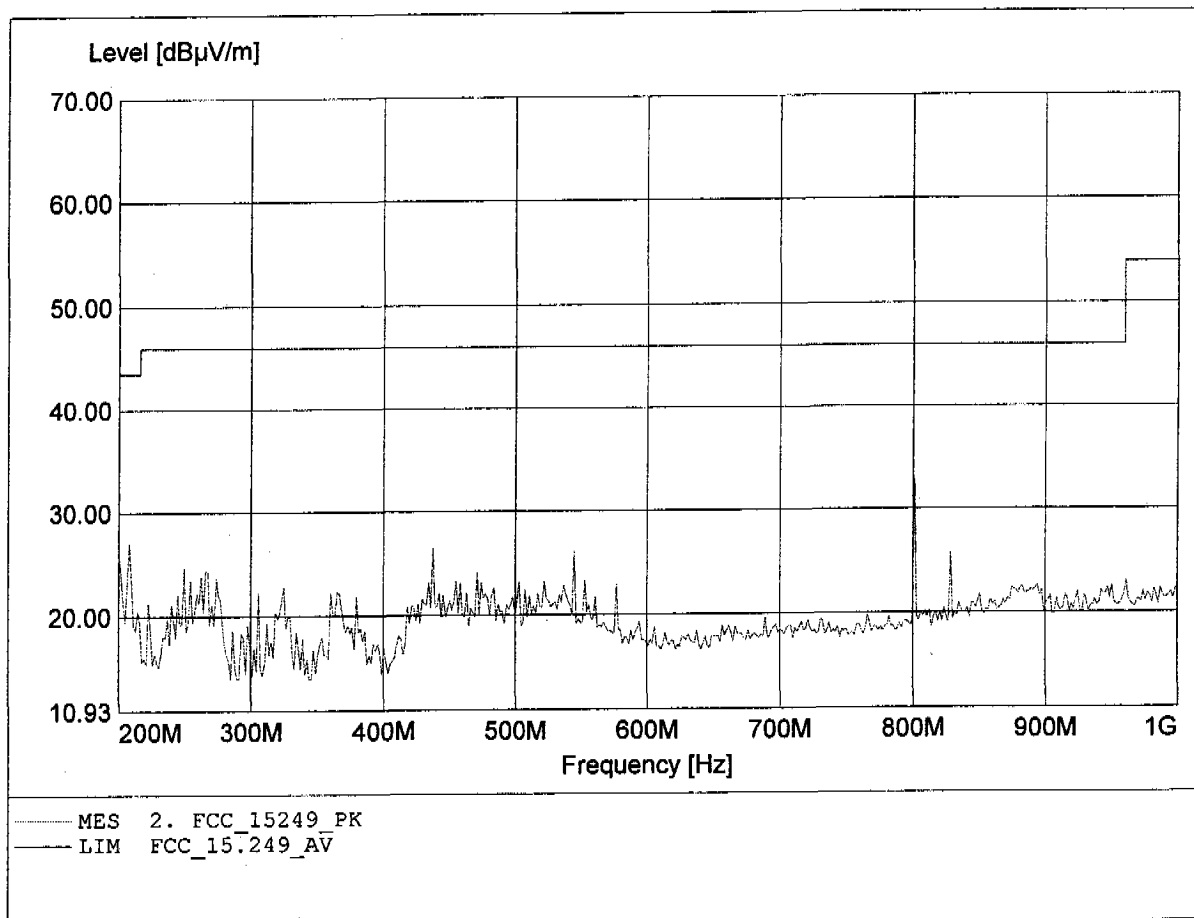

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Freq: 801.202MHz, Emax: 34.77dBµV/m, RBW: 100kHz

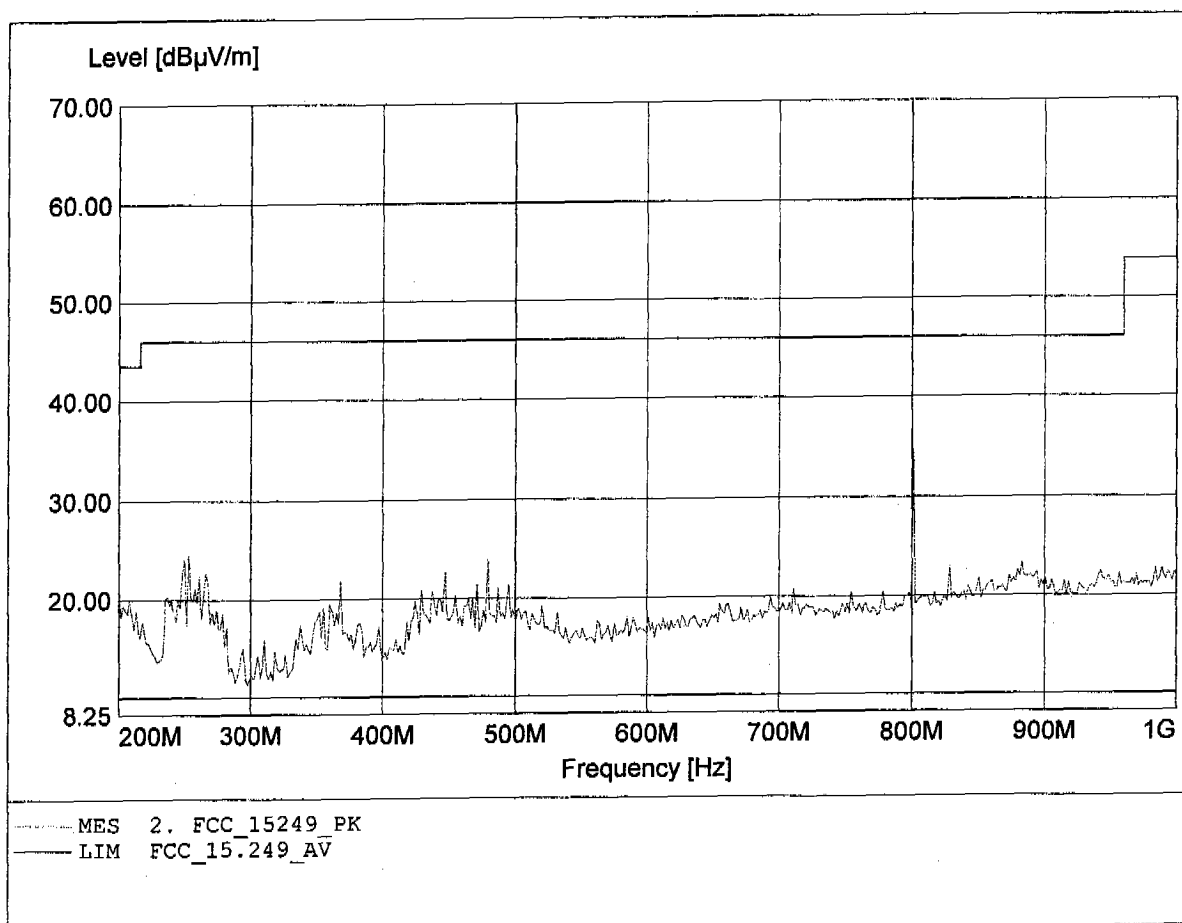

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor))
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.401GHz, Emax: 78.80dBµV/m, RBW: 1MHz

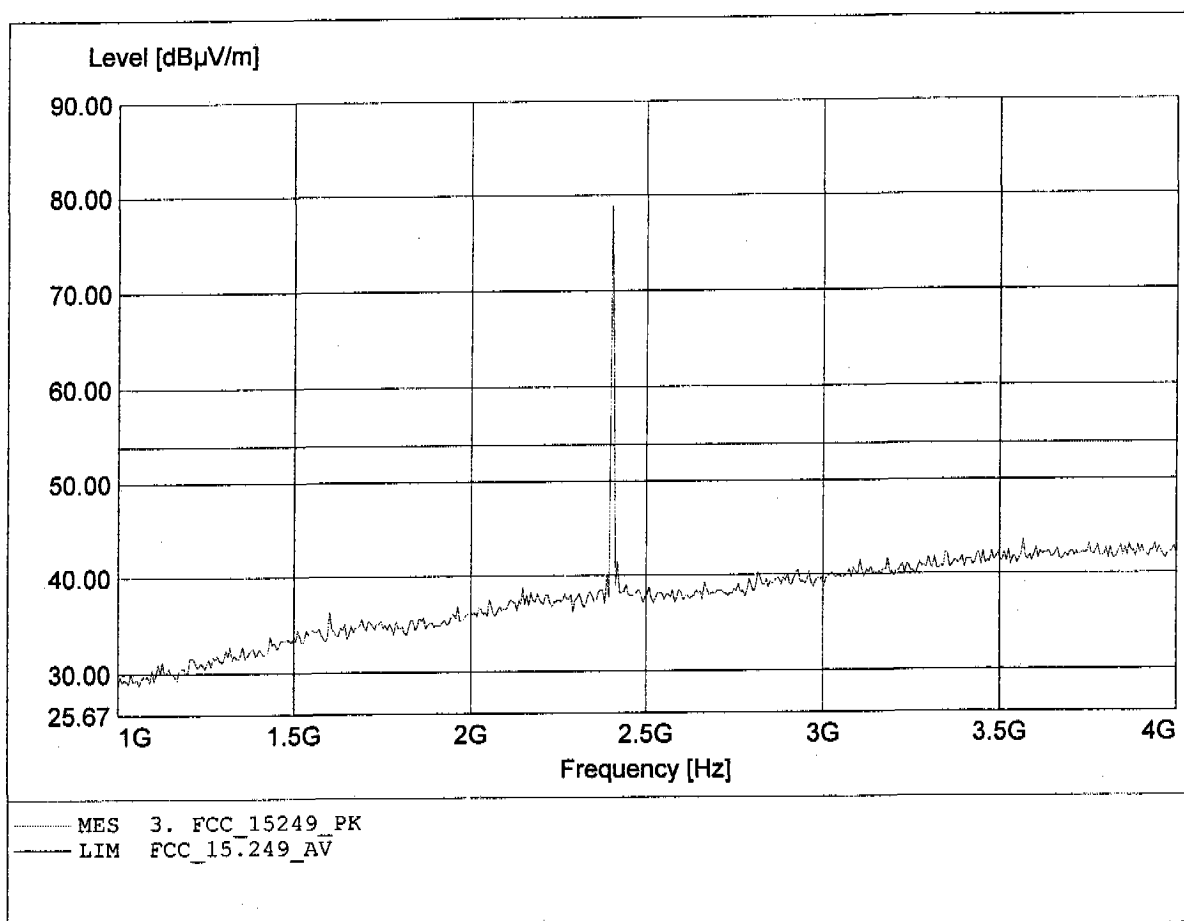

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.401GHz, Emax: 87.41dBμV/m, RBW: 1MHz

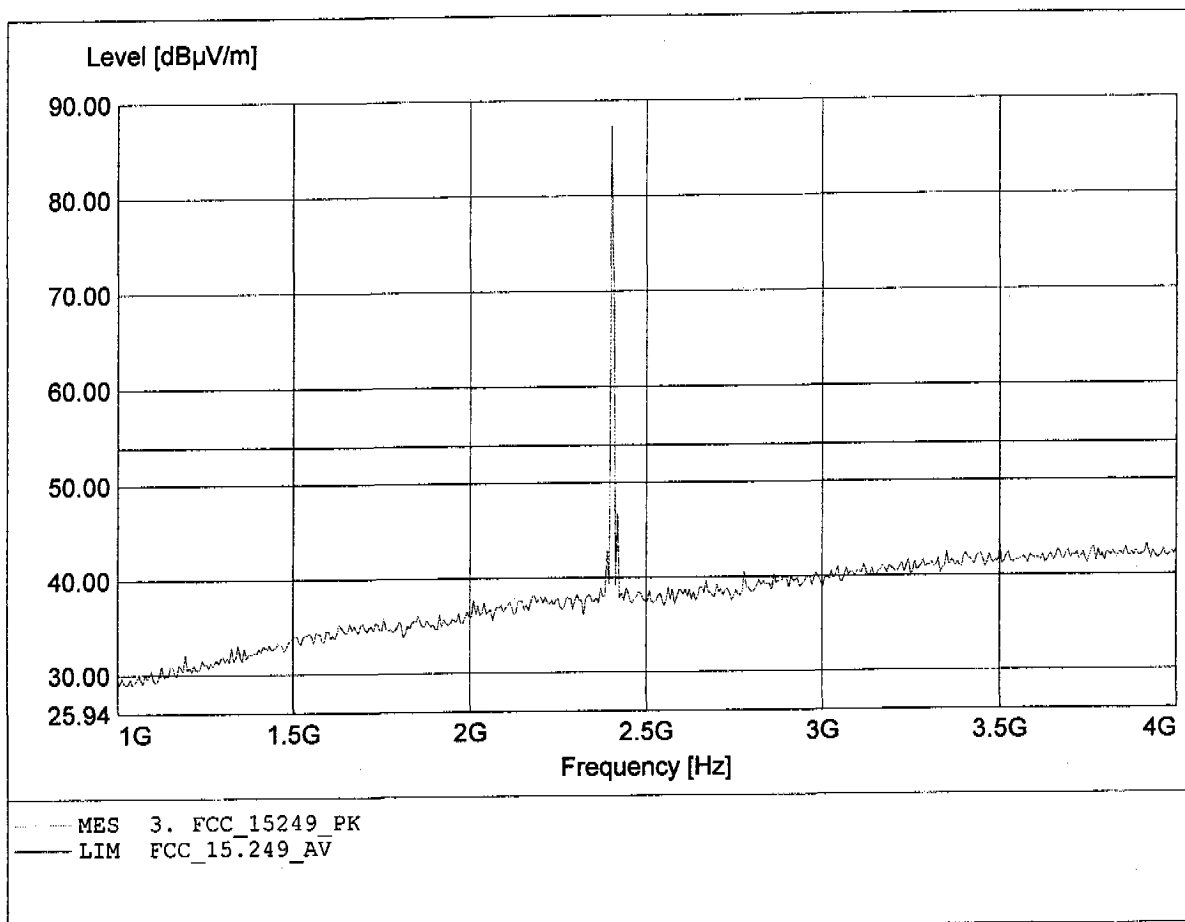

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.535GHz, Emax: 51.83dBμV/m, RBW: 1MHz

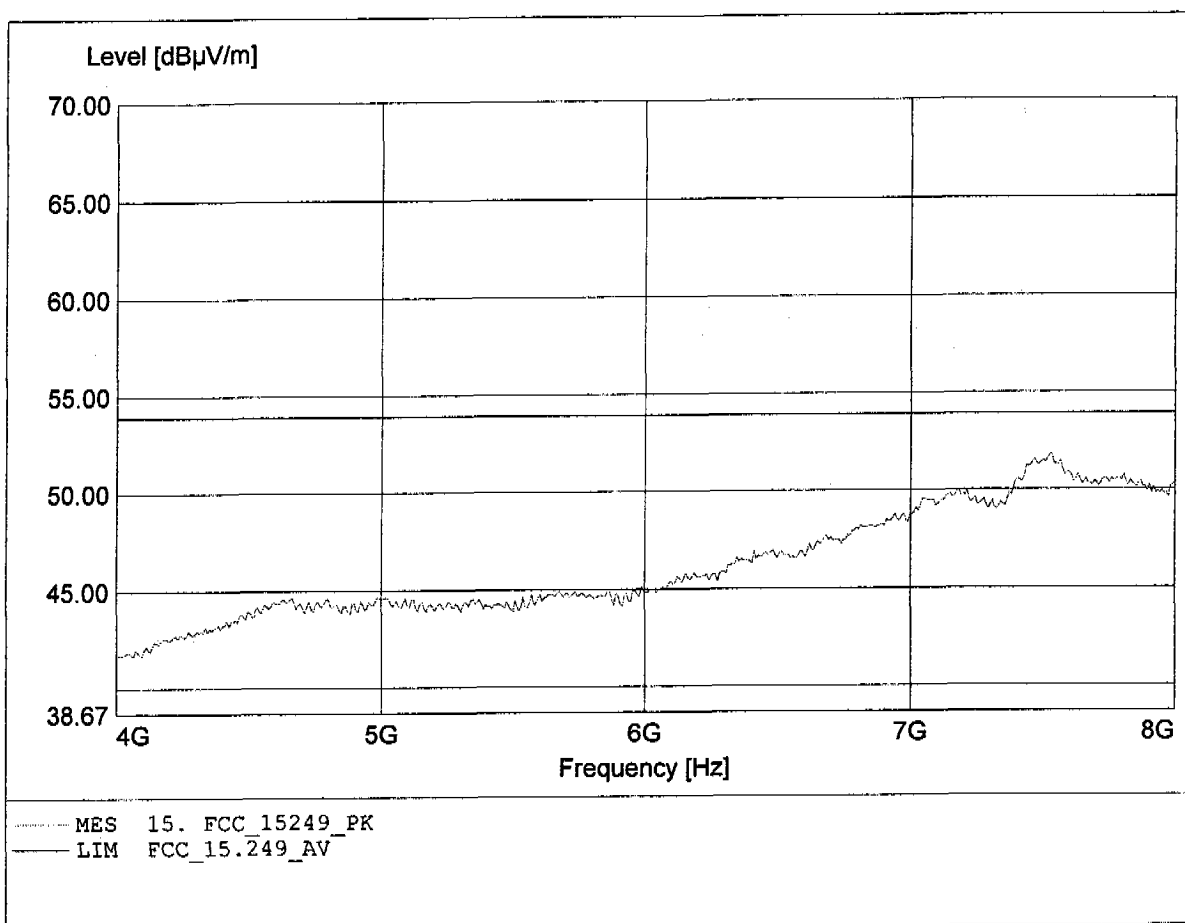

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHZ Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Cob y Manufacturing Co.,Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)
Test Specification: according to S15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.535GHz, Emax: 51.76dBµV/m, RBW: 1MHz

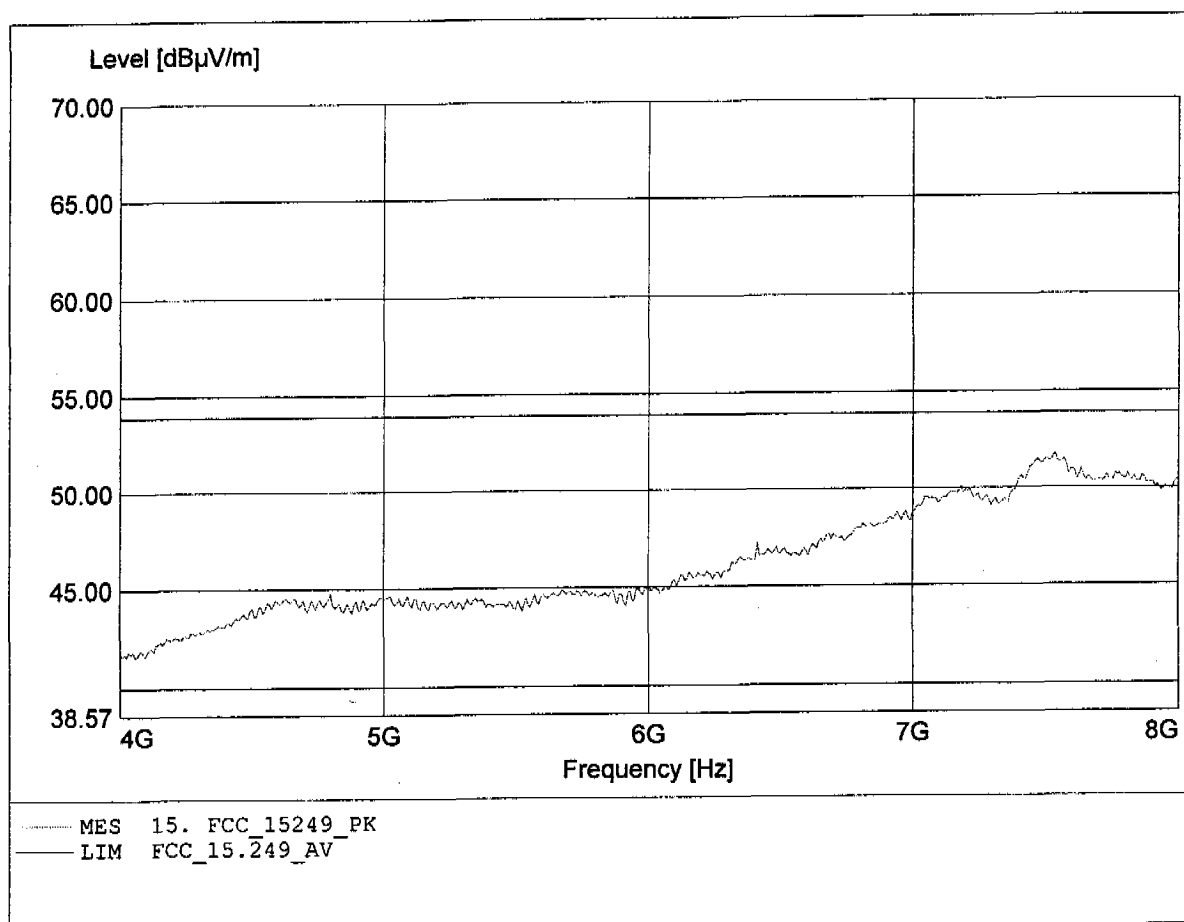

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.655GHz, Emax: 46.35dBμV/m, RBW: 1MHz

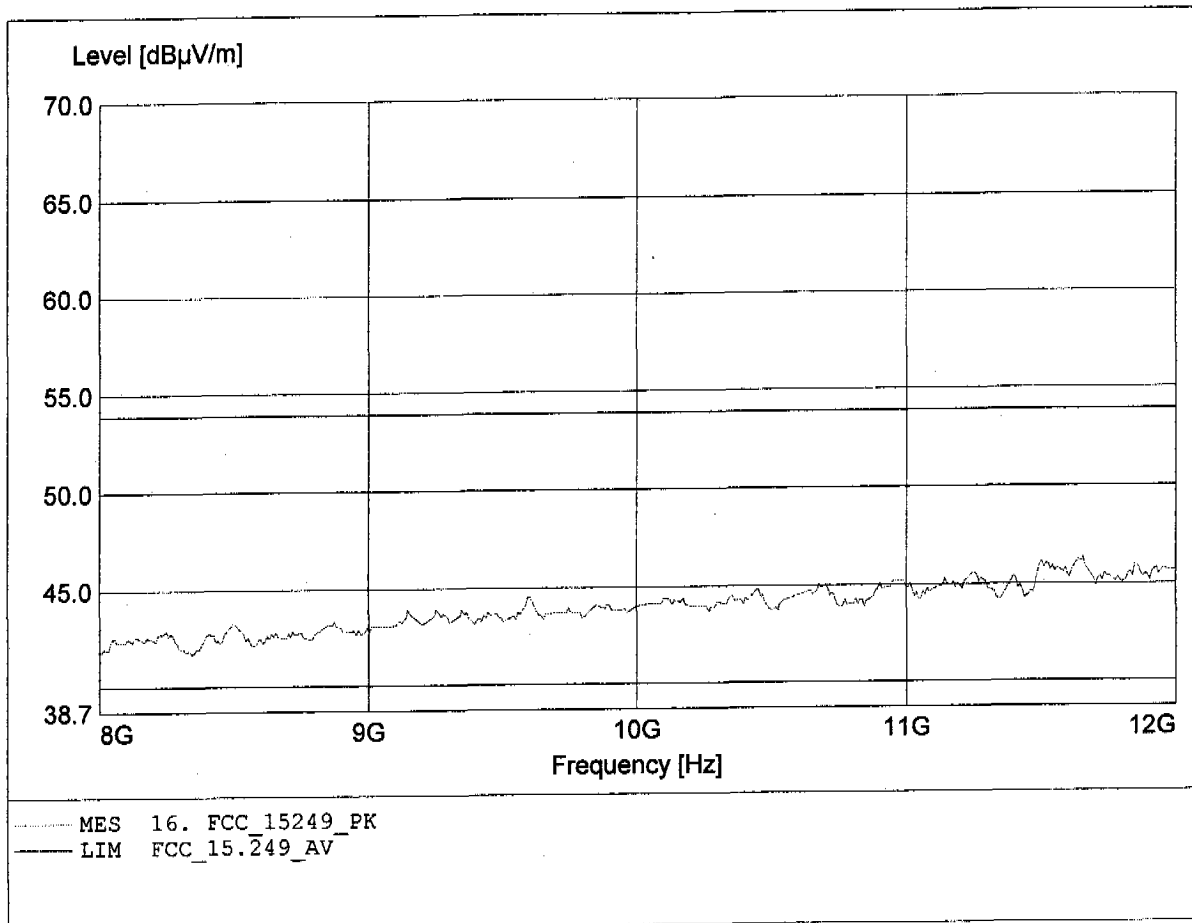

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)
Test Specification: according to S15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.647GHz, Emax: 47.43dBμV/m, RBW: 1MHz

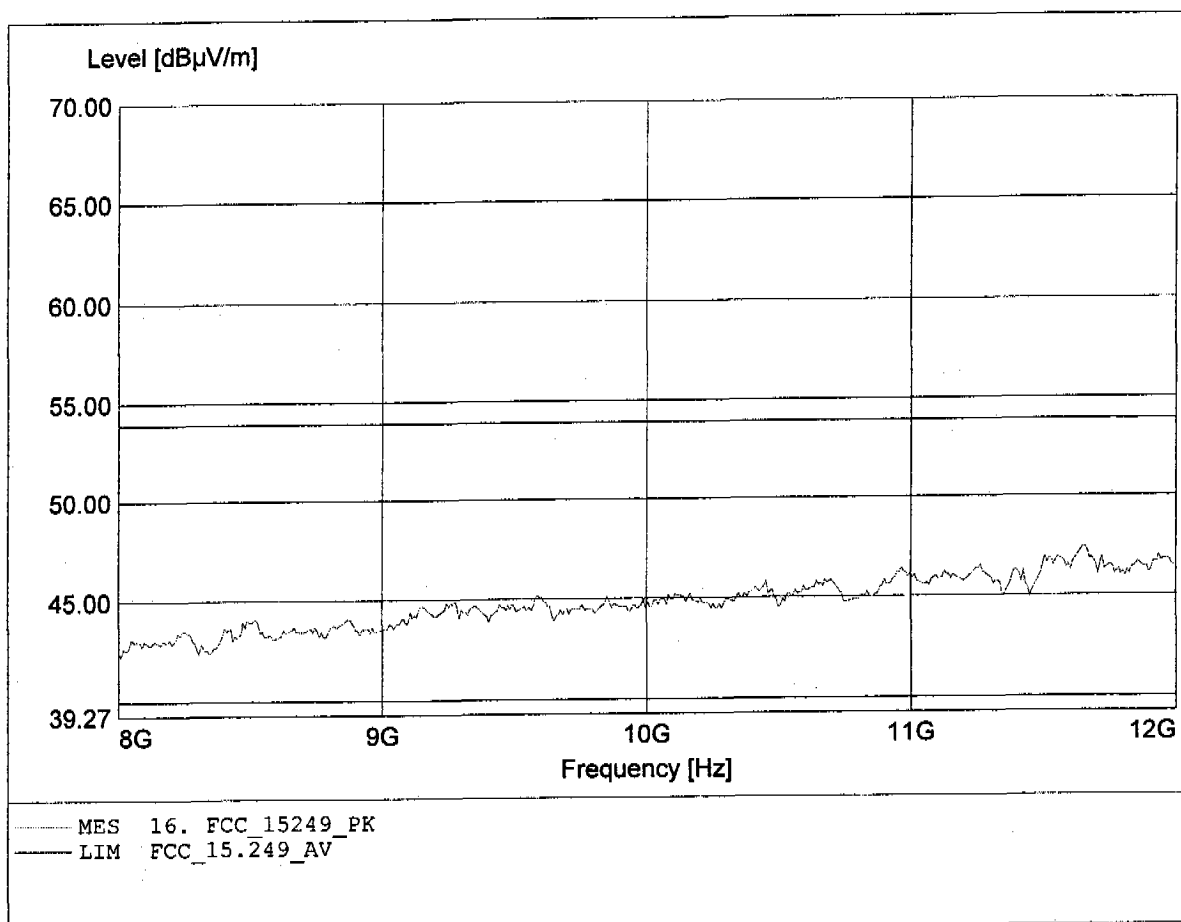

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHZ Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)
Test Specification: according to S15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.651GHz, Emax: 51.08dB μ V/m, RBW: 1MHz

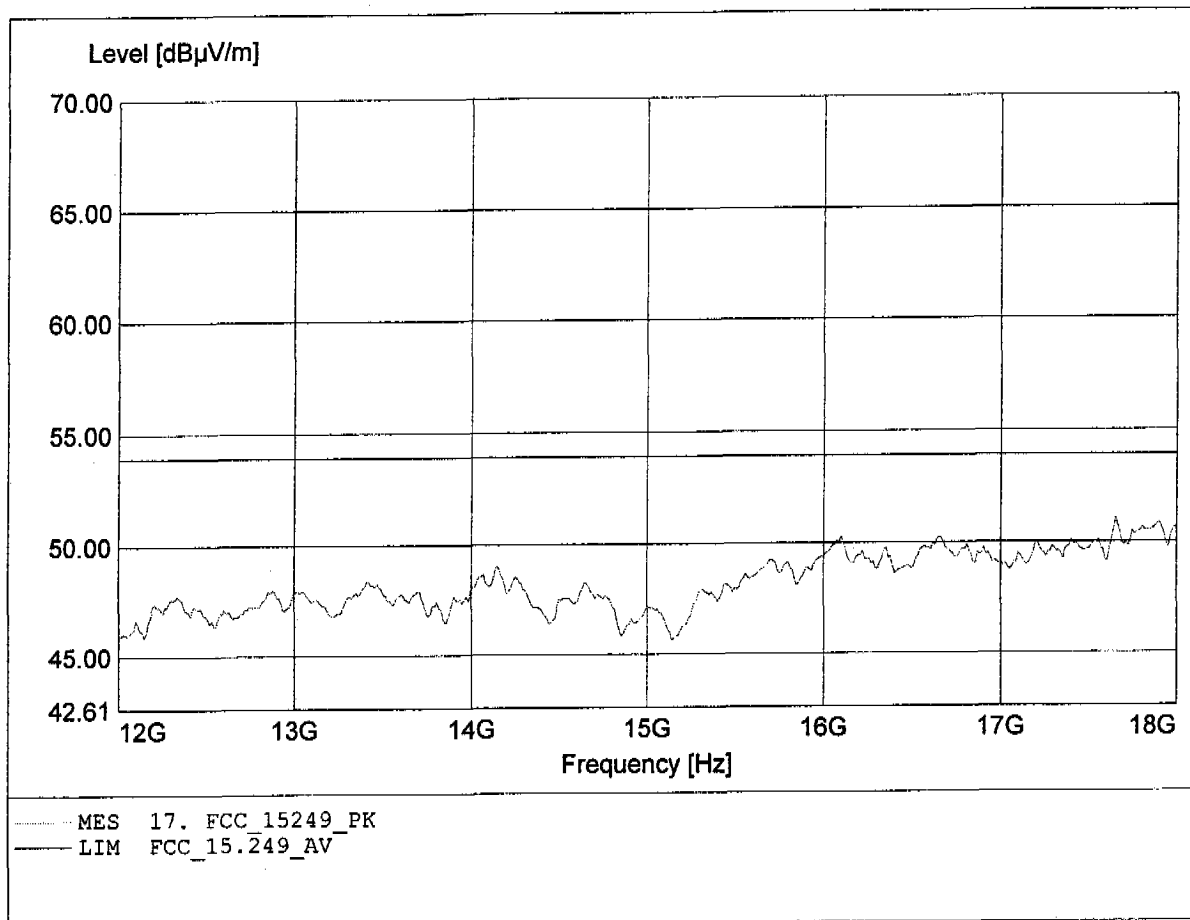

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.651GHz, Emax: 51.65dBµV/m, RBW: 1MHz

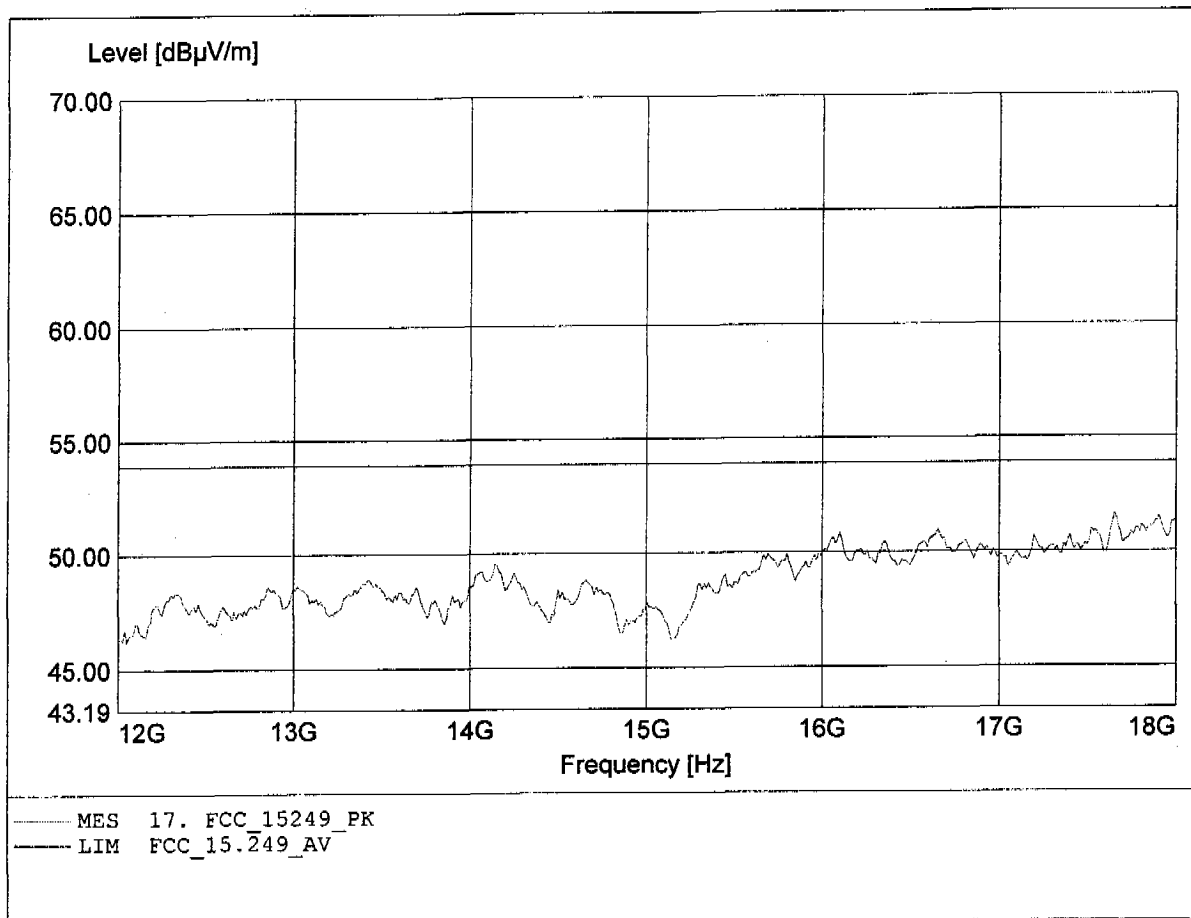

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.193GHz, Emax: 44.88dBµV/m, RBW: 1MHz

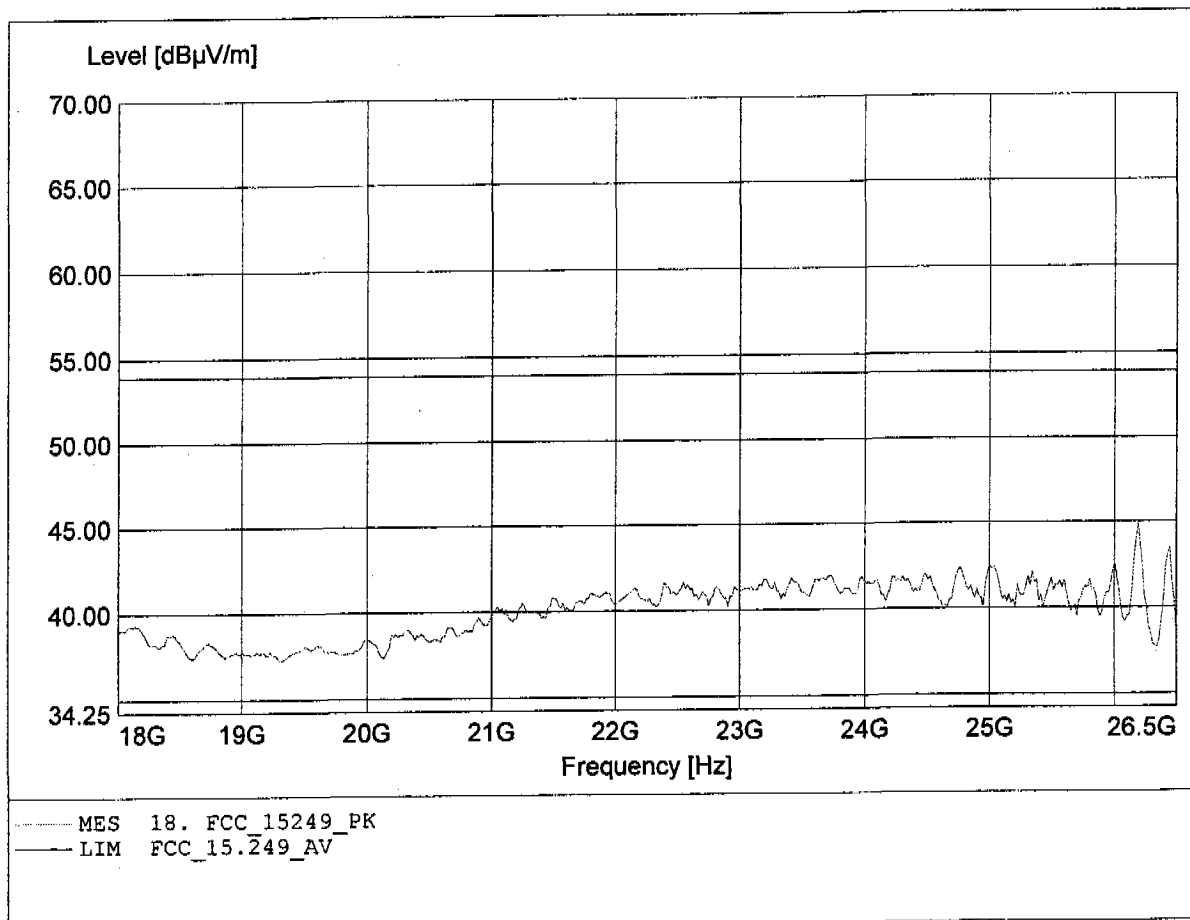

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.193GHz, Emax: 44.87dBμV/m, RBW: 1MHz

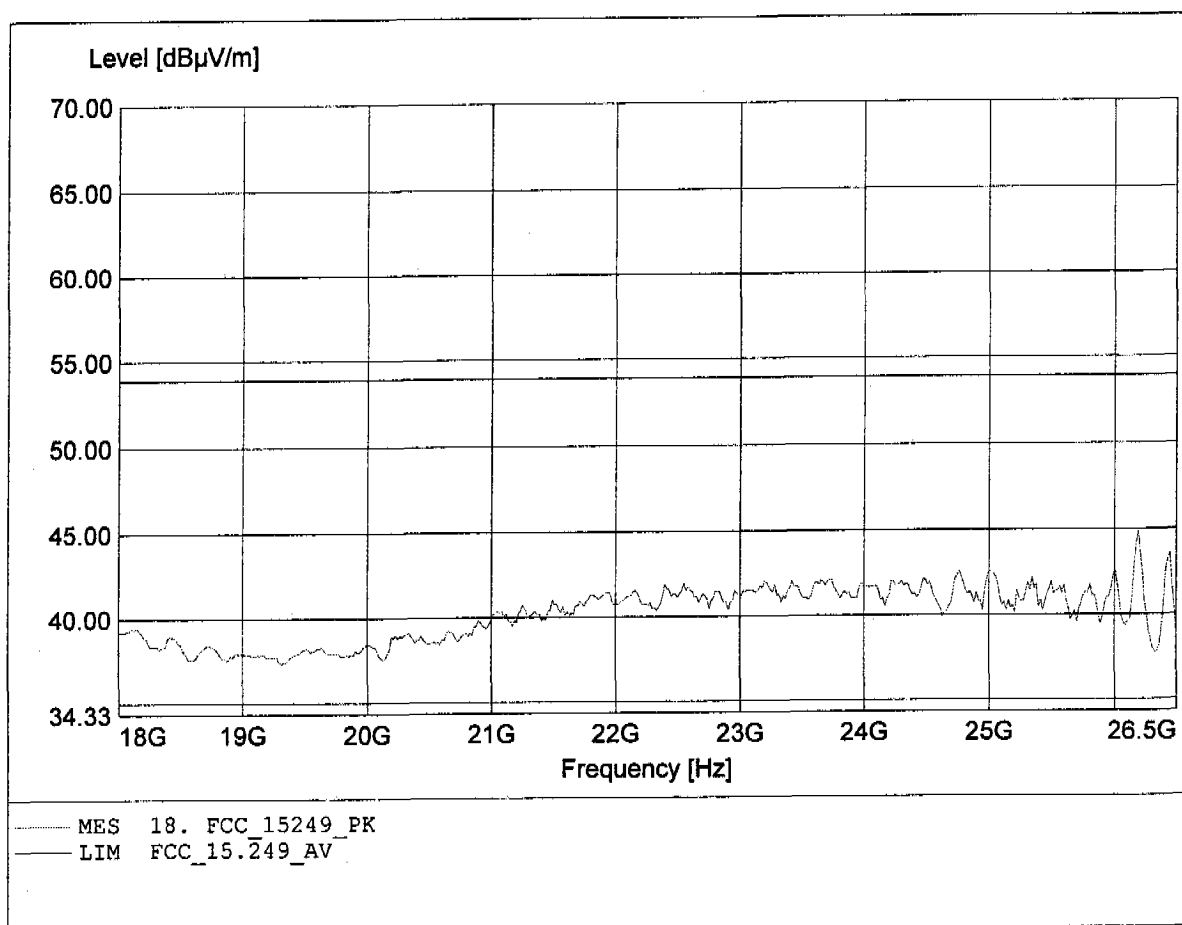

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHZ Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Cob y Manufacturing Co.,Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 194.549MHz, Emax: 32.05dBµV/m, RBW: 100kHz

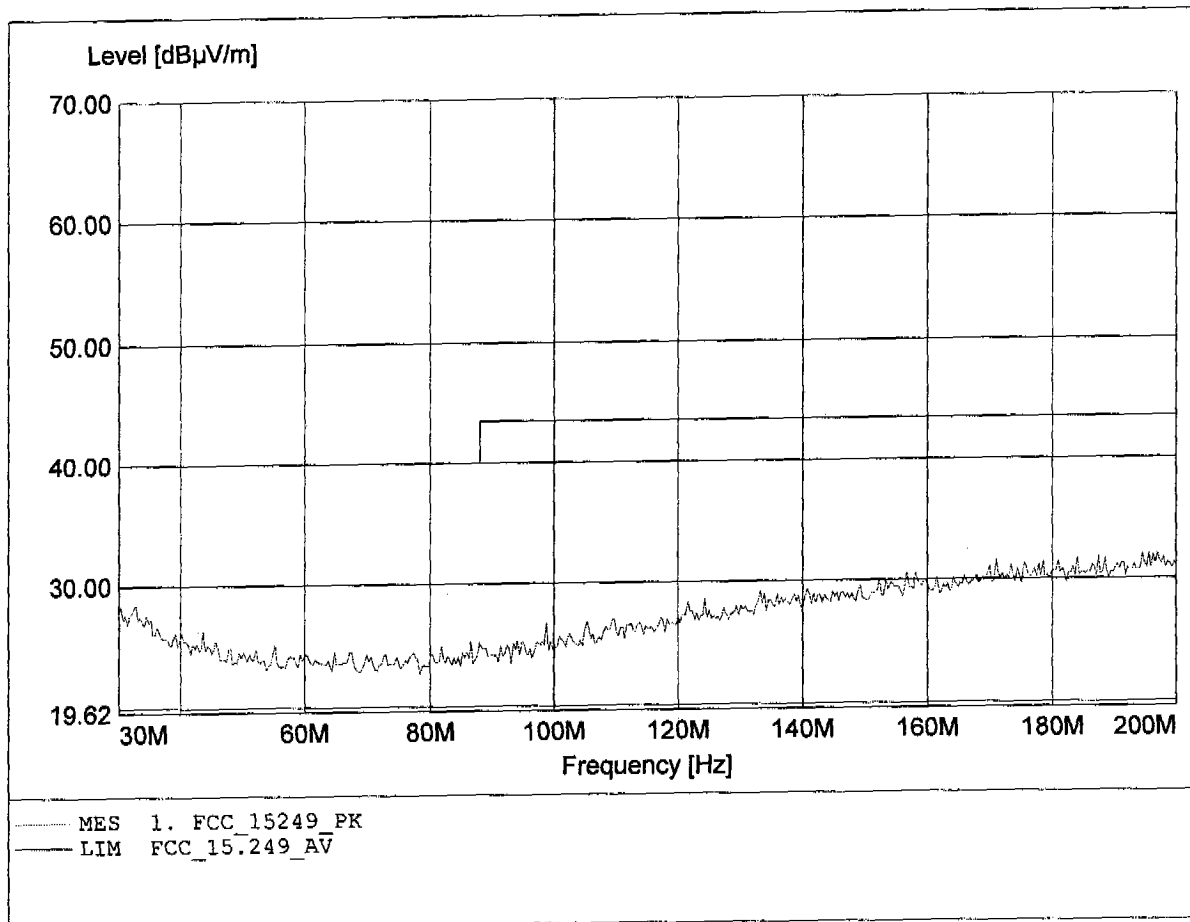

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHZ Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Cob y Manufacturing Co.,Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 143.447MHz, Emax: 33.21dBµV/m, RBW: 100kHz

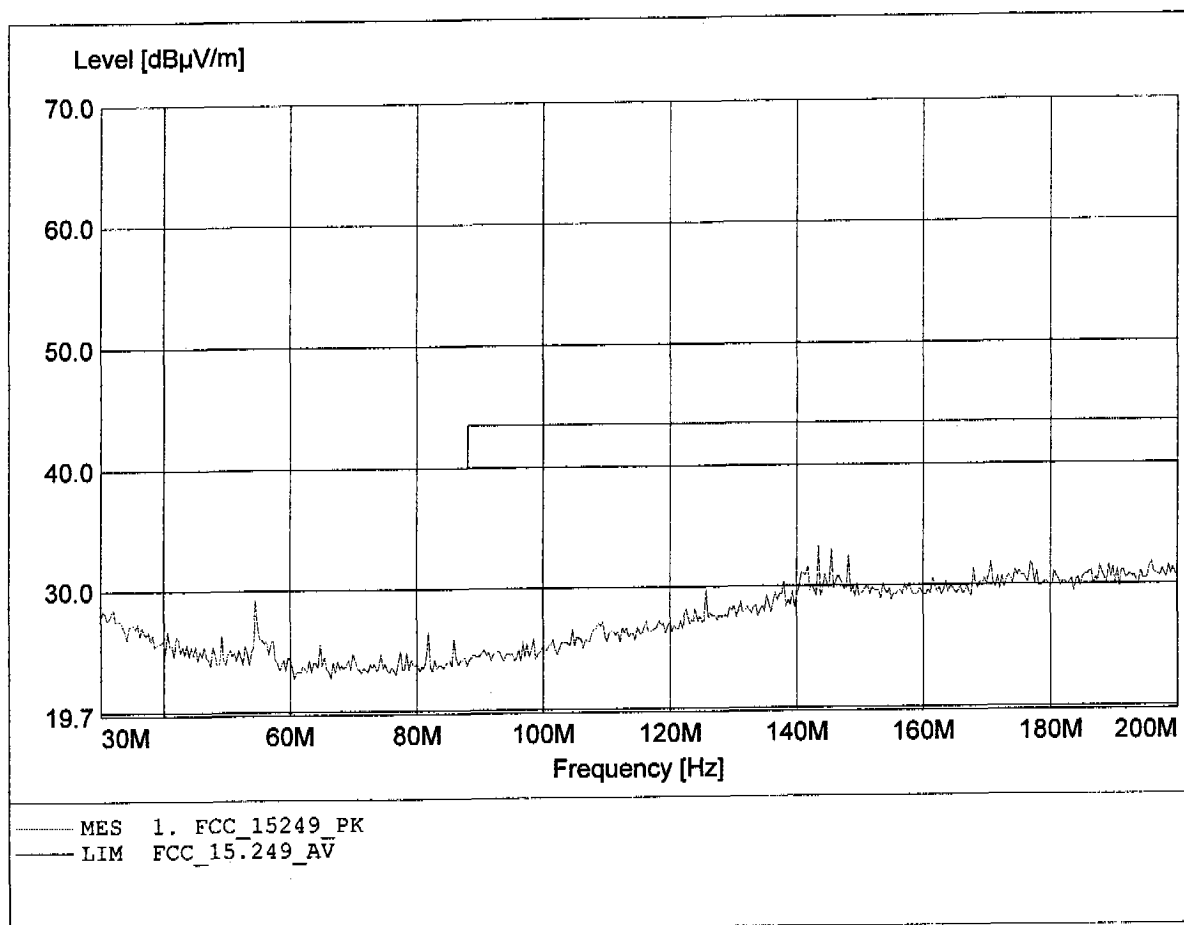

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Freq: 802.806MHz, Emax: 32.97dBµV/m, RBW: 100kHz

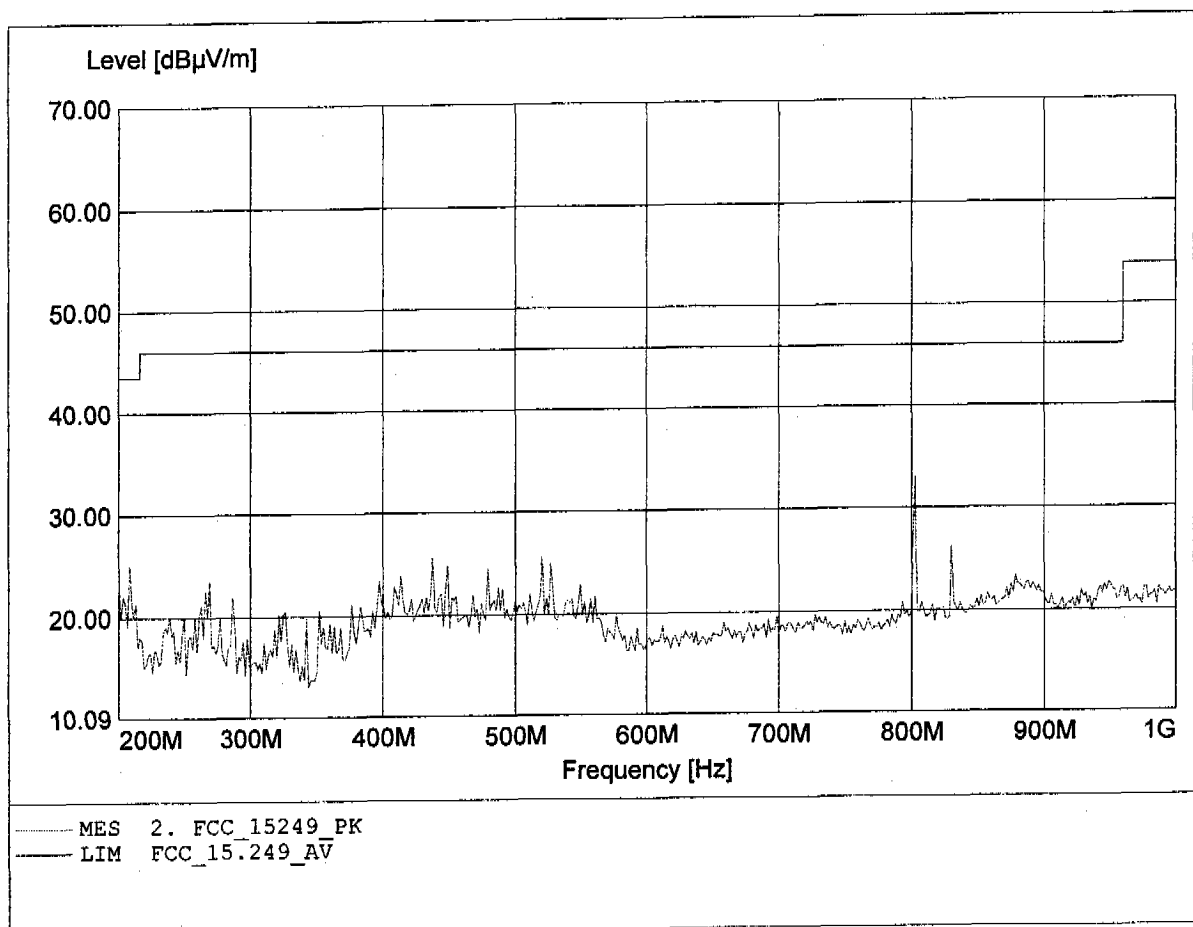

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHZ Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Cob y Manufacturing Co.,Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Freq: 802.806MHz, Emax: 35.02dBμV/m, RBW: 100kHz

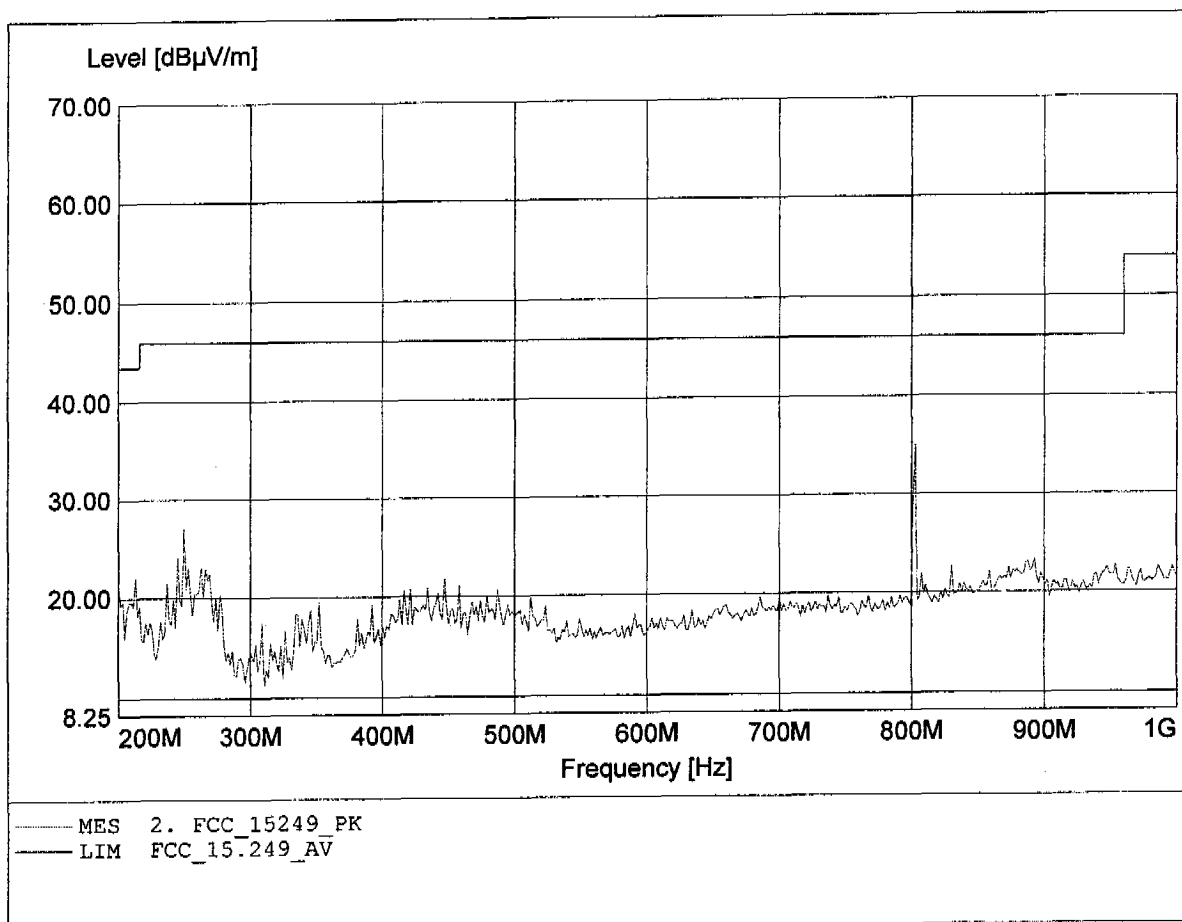

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 120 VAC (AC/DC adaptor)
Test Specification: according to S15.249
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.407GHz, Emax: 78.21dBμV/m, RBW: 1MHz

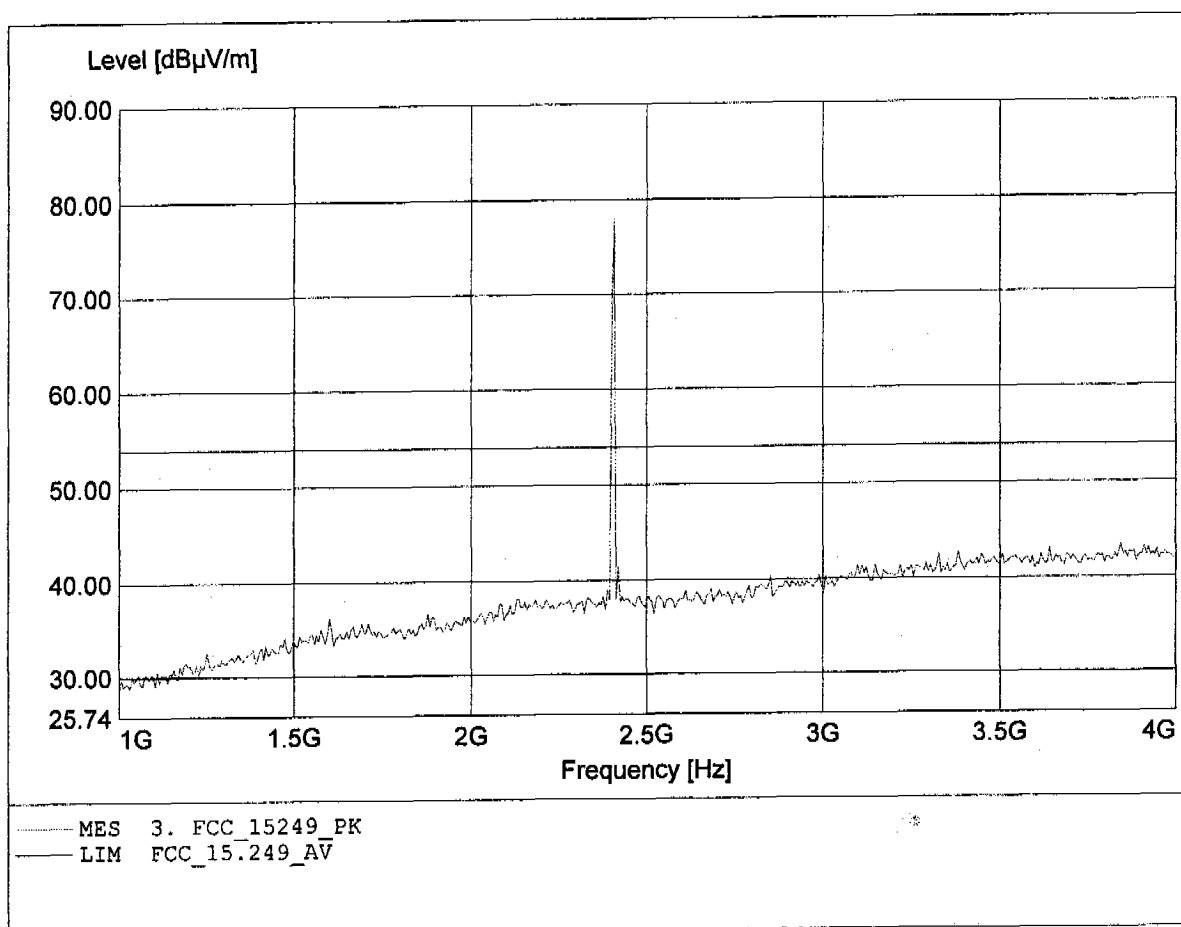

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC(AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.407GHz, Emax: 88.07dBμV/m, RBW: 1MHz

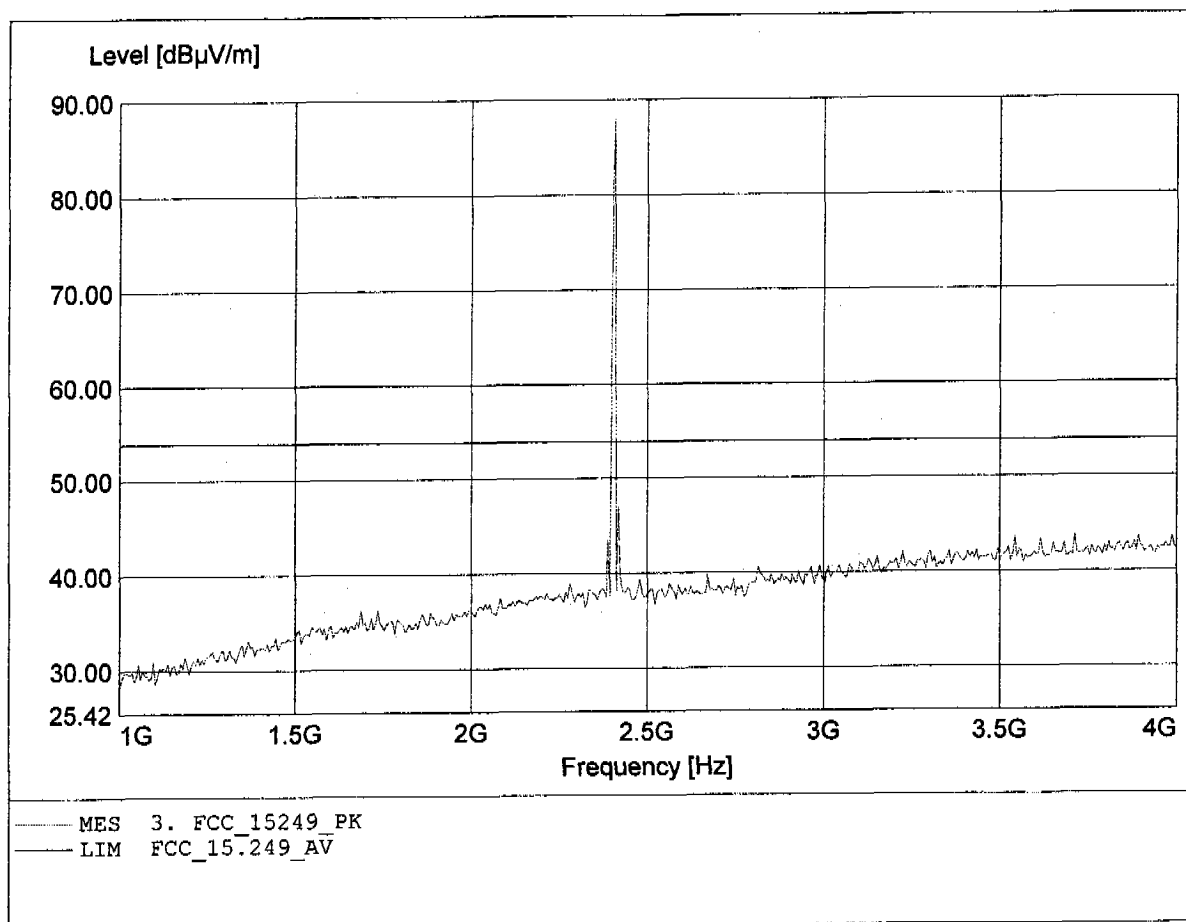

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.527GHz, Emax: 51.84dBμV/m, RBW: 1MHz

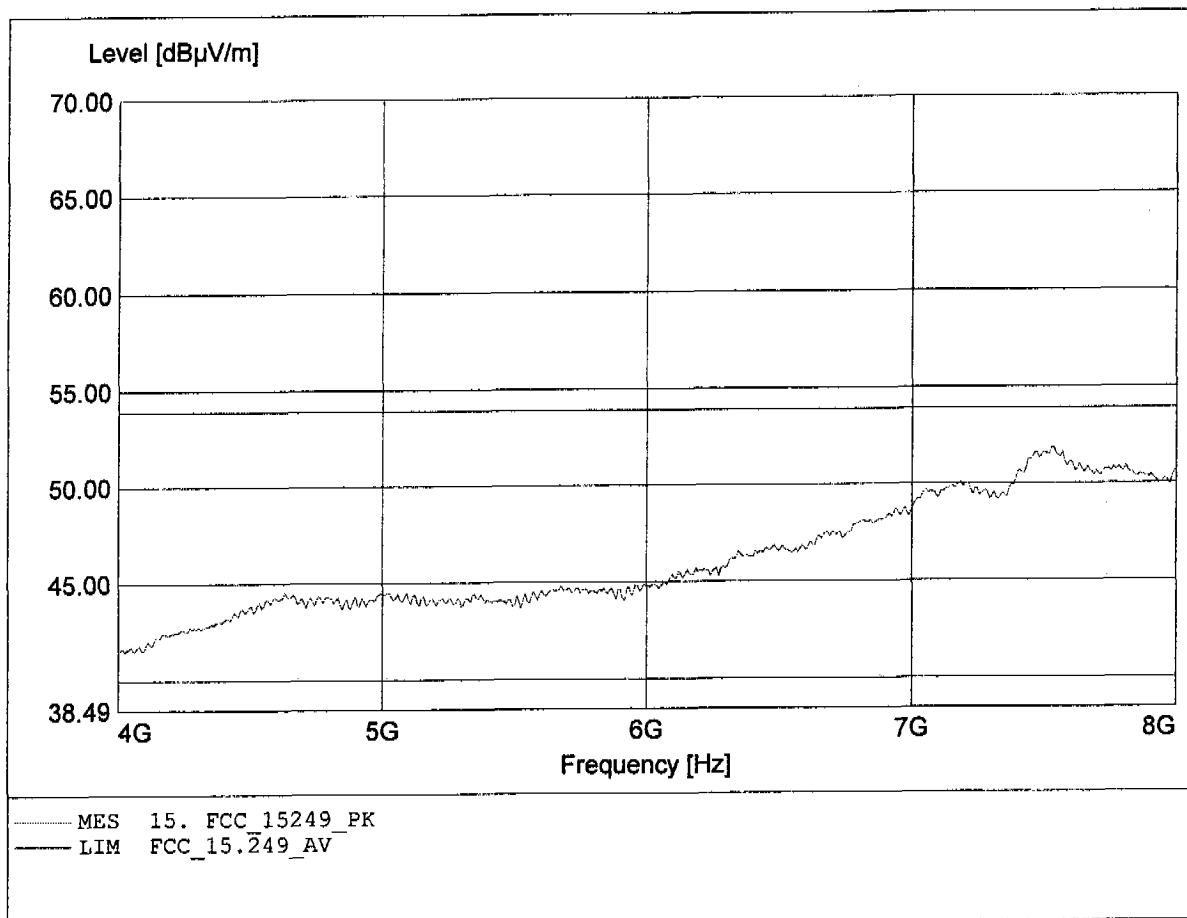

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.535GHz, Emax: 51.86dBµV/m, RBW: 1MHz

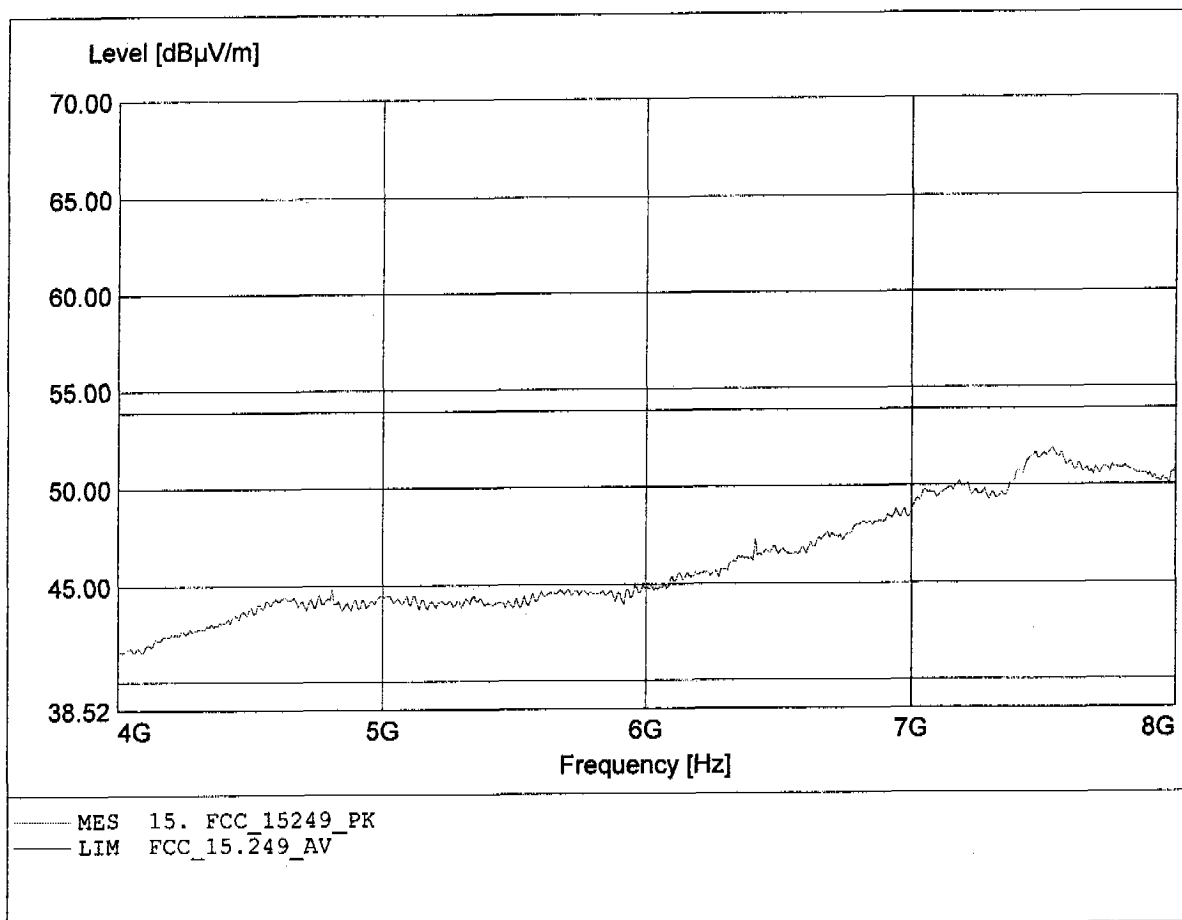

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.655GHz, Emax: 46.62dBμV/m, RBW: 1MHz

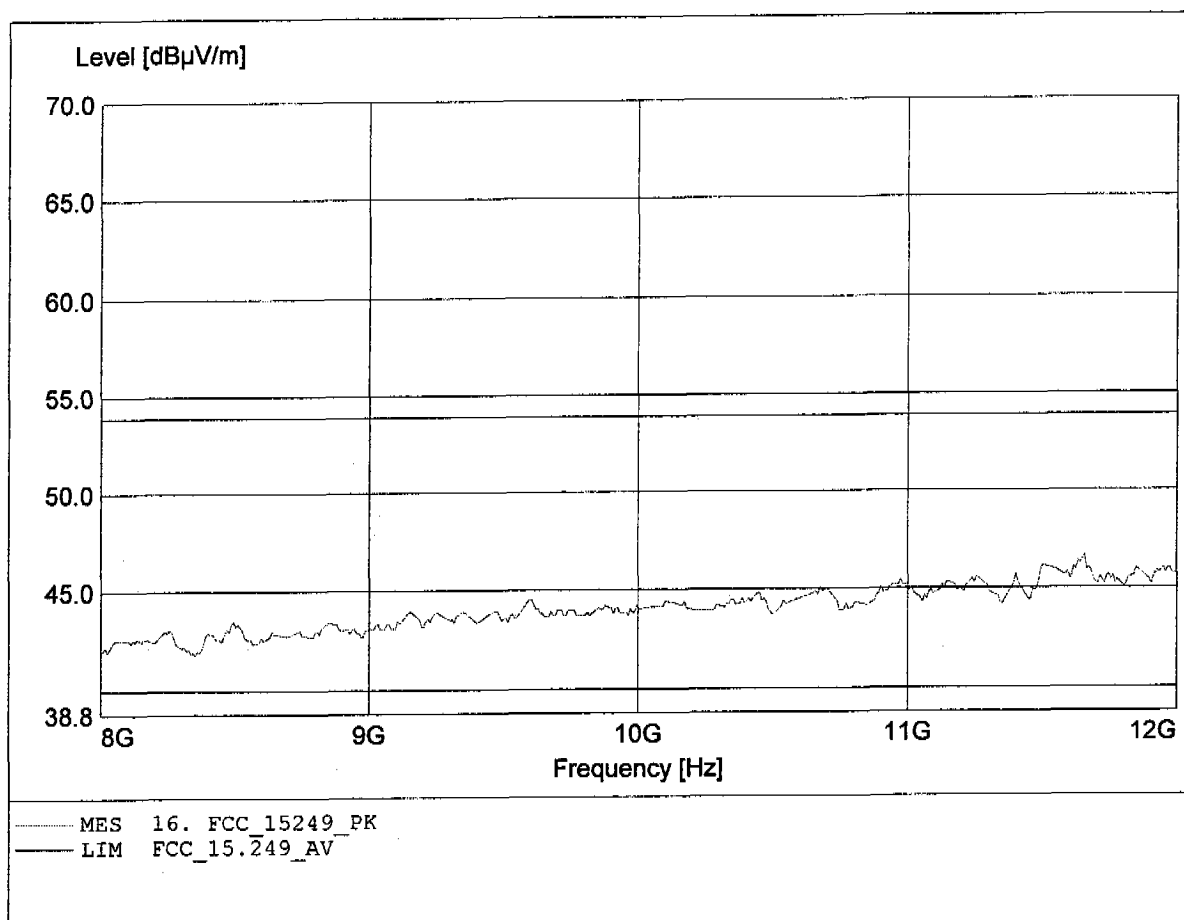

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.655GHz, Emax: 46.62dBμV/m, RBW: 1MHz

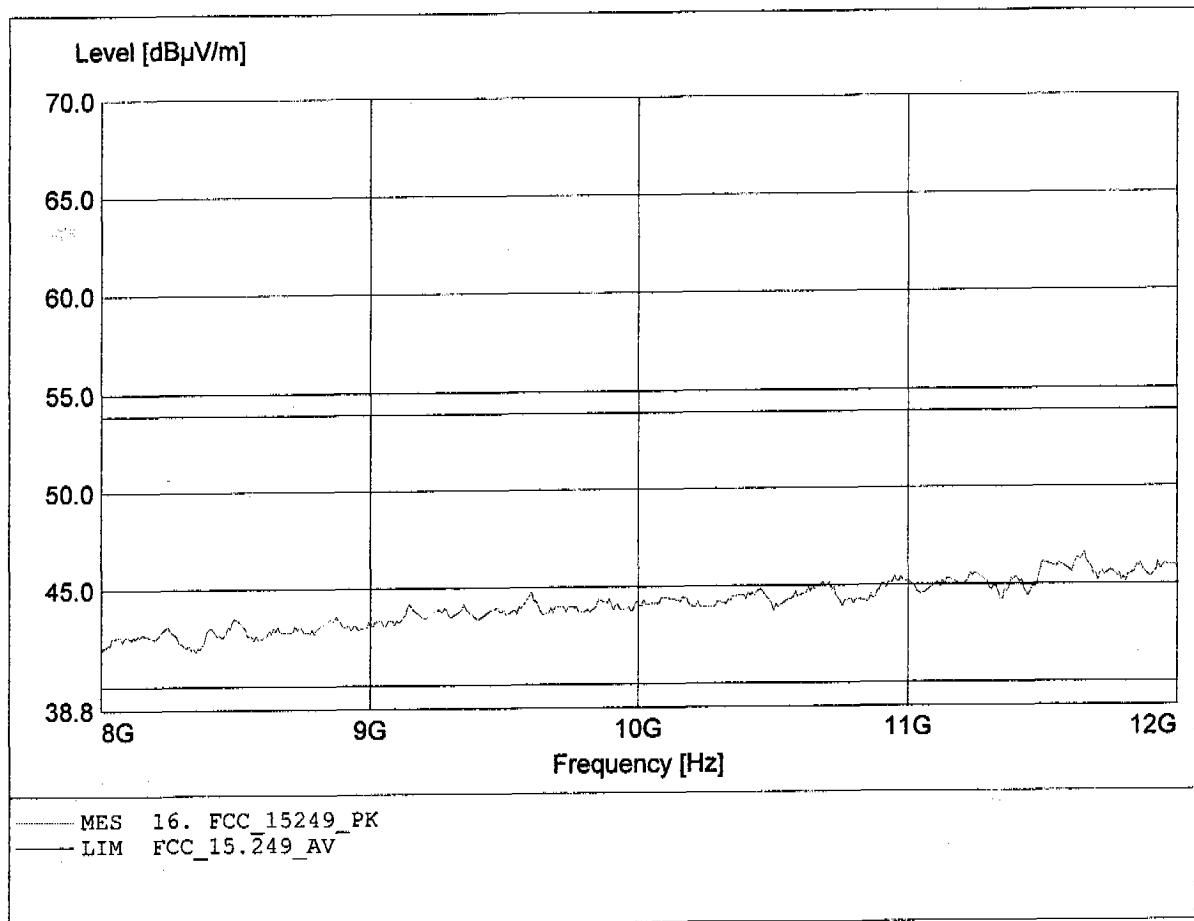

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.651GHz, Emax: 51.16dBµV/m, RBW: 1MHz

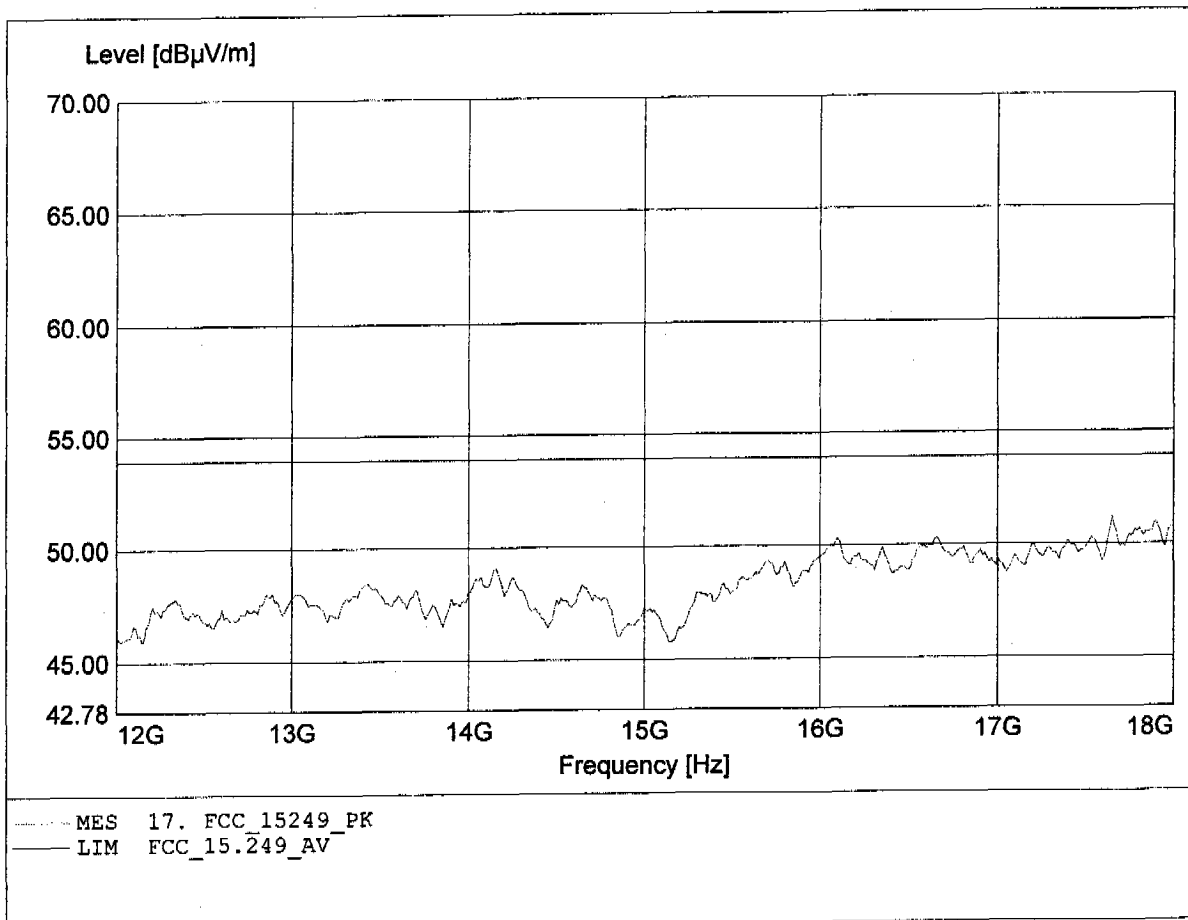

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHZ Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Cob y Manufacturing Co.,Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.651GHz, Emax: 51.25dBuV/m, RBW: 1MHz

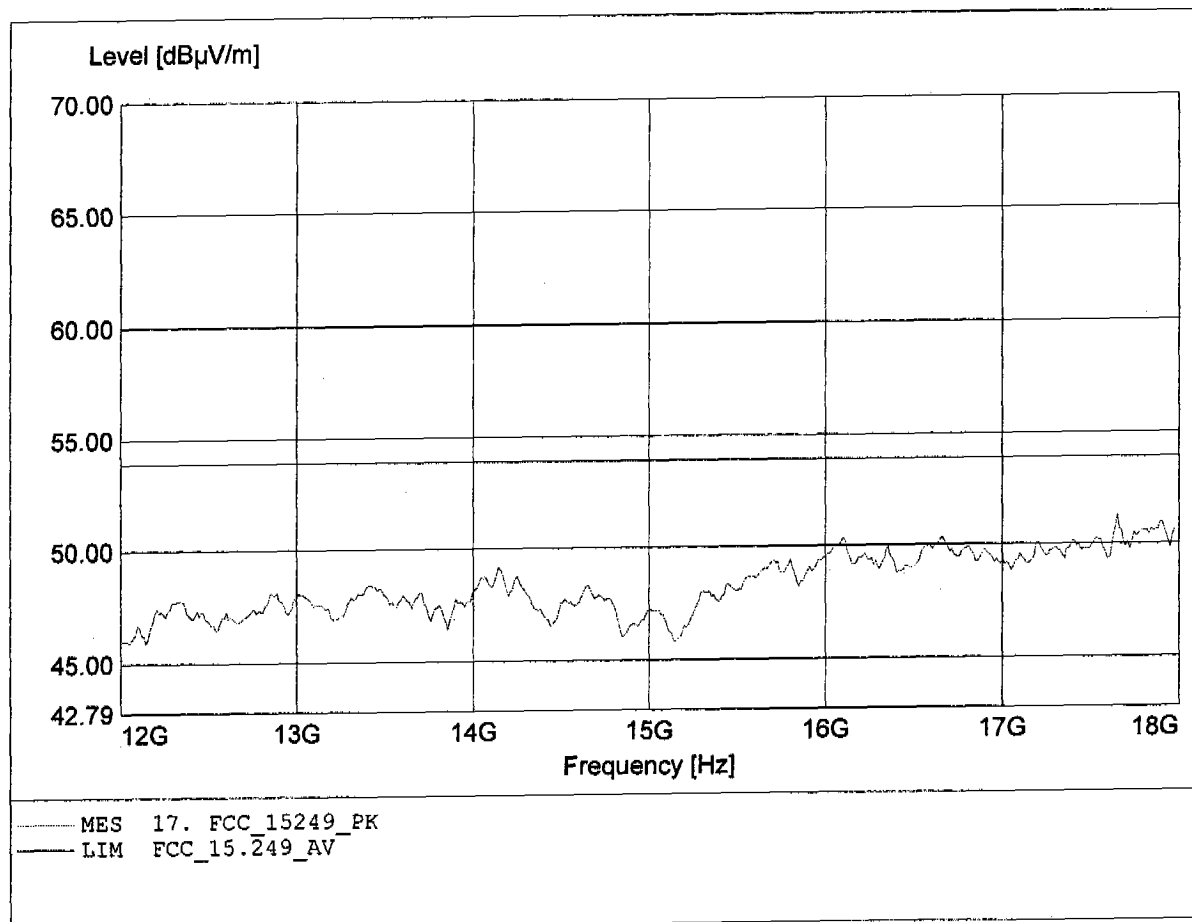

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Cob y Manufacturing Co.,Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.193GHz, Emax: 44.51dBμV/m, RBW: 1MHz

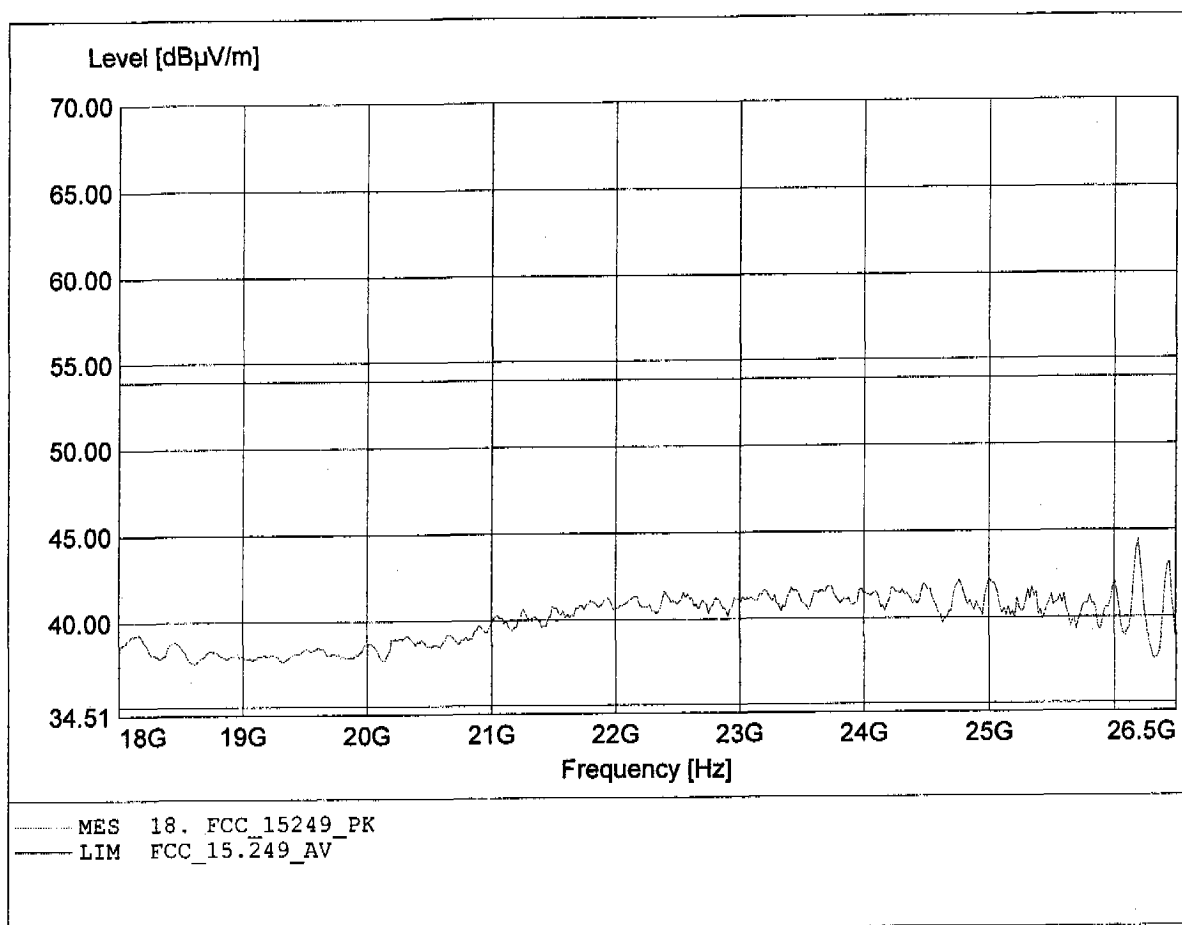

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.193GHz, Emax: 44.63dBµV/m, RBW: 1MHz

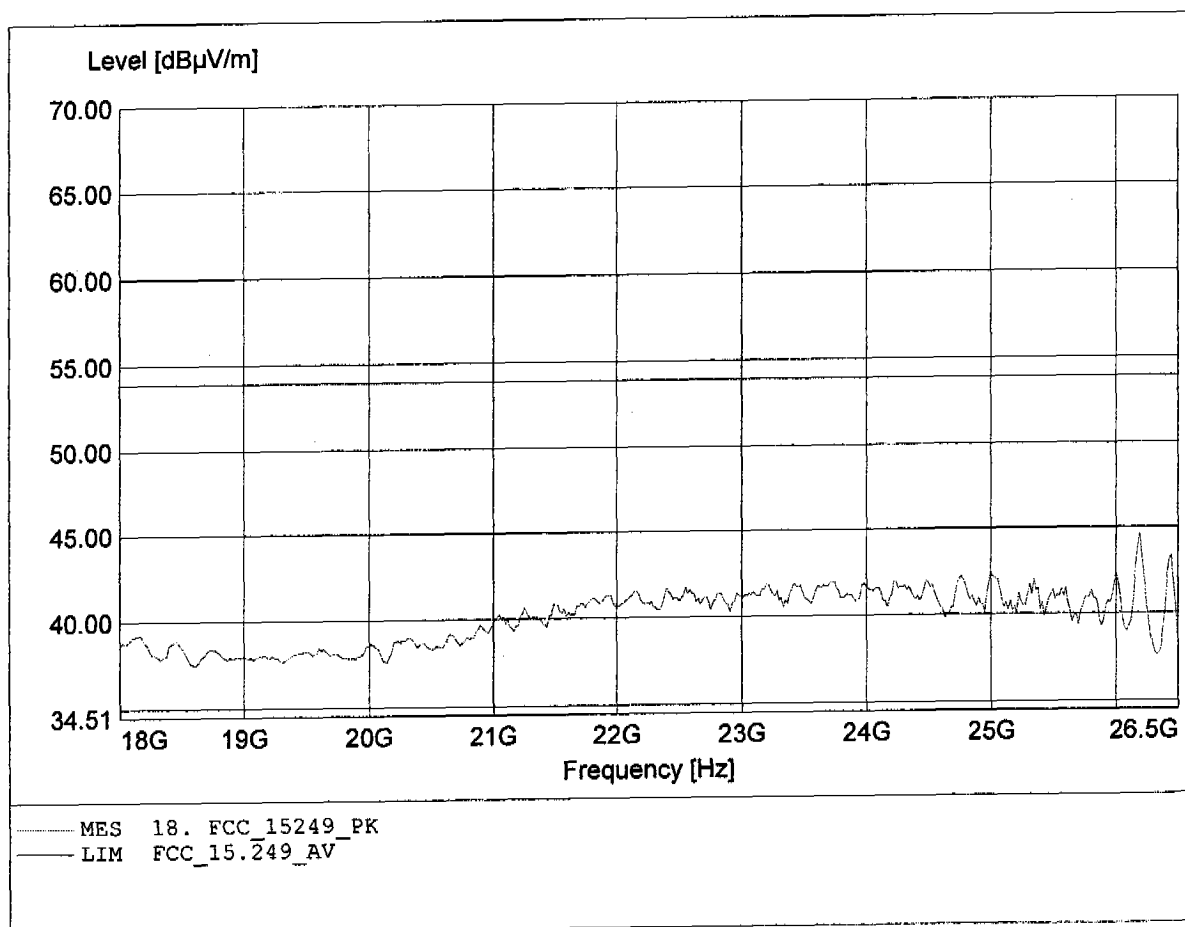

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 189.439MHz, Emax: 31.71dBμV/m, RBW: 100kHz

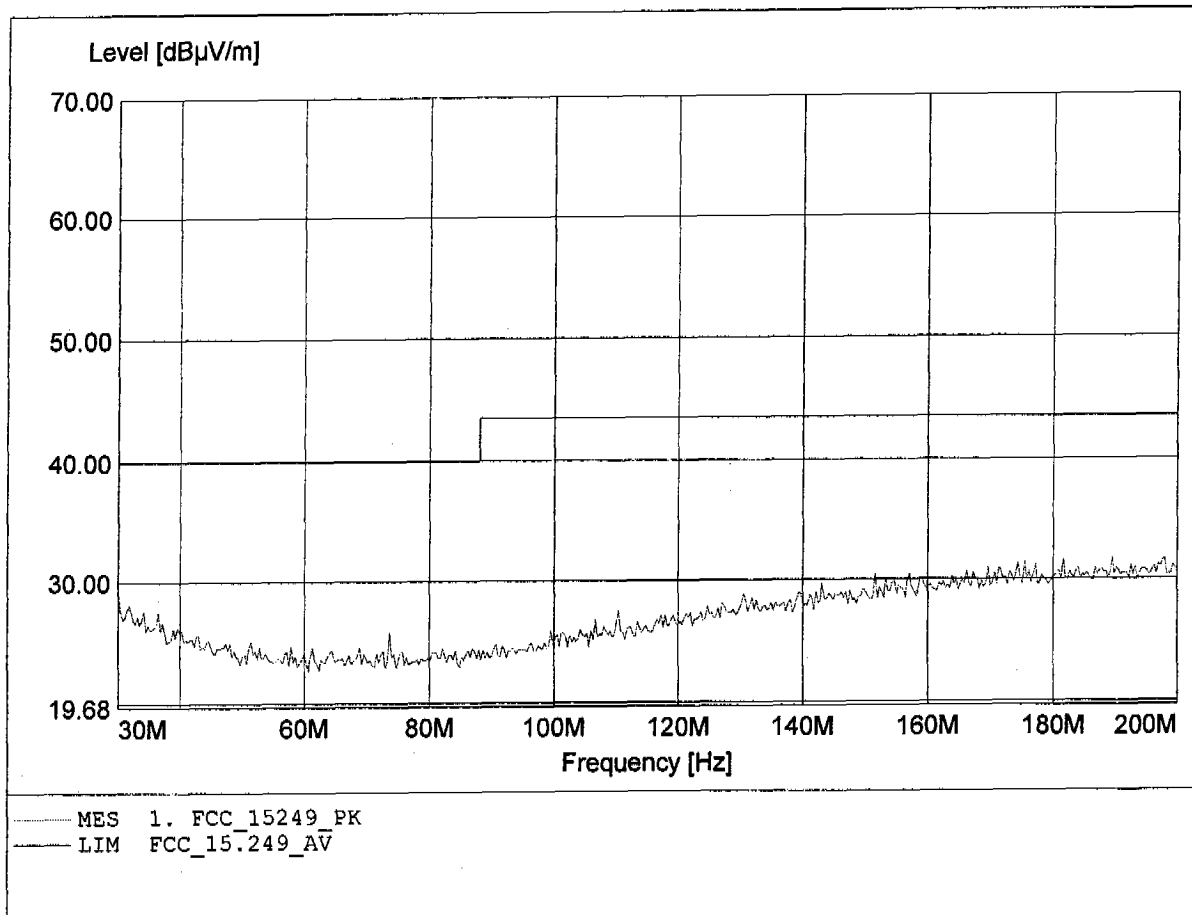

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 180.581MHz, Emax: 31.94dBμV/m, RBW: 100kHz

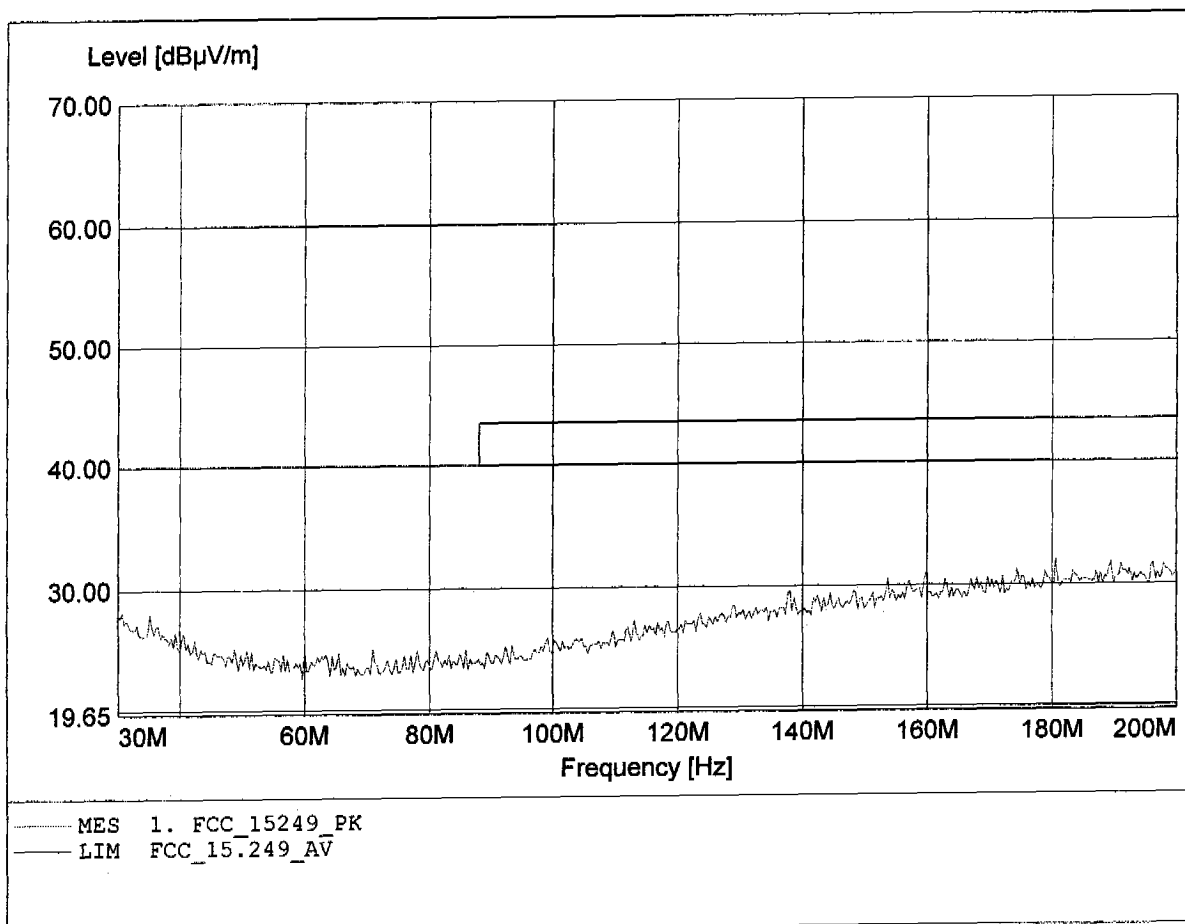

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHZ Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to S15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Freq: 825.251MHz, Emax: 27.76dB μ V/m, RBW: 100kHz

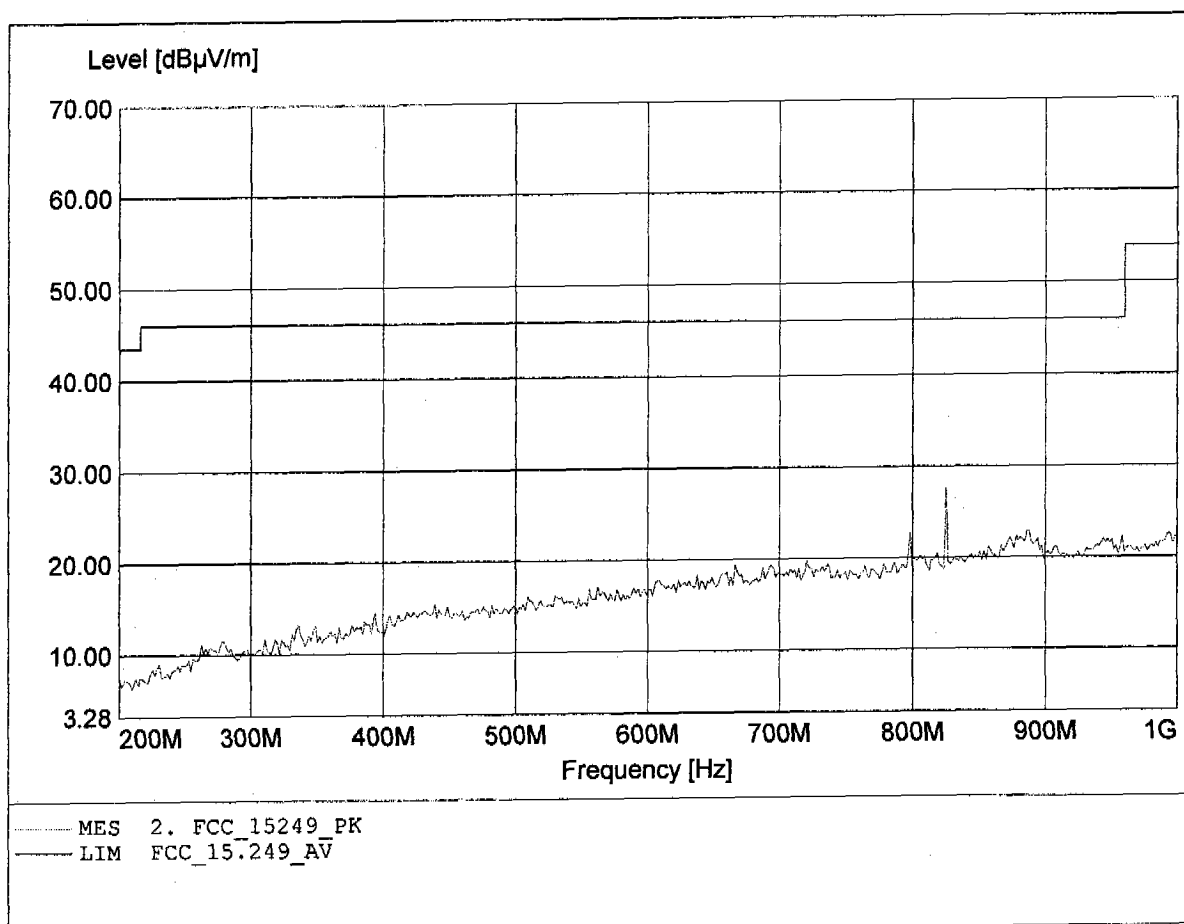

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F. Schulz
Temperature/Voltage: Temp. 25°C / Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Freq: 825.251MHz, Emax: 26.24dBµV/m, RBW: 100kHz

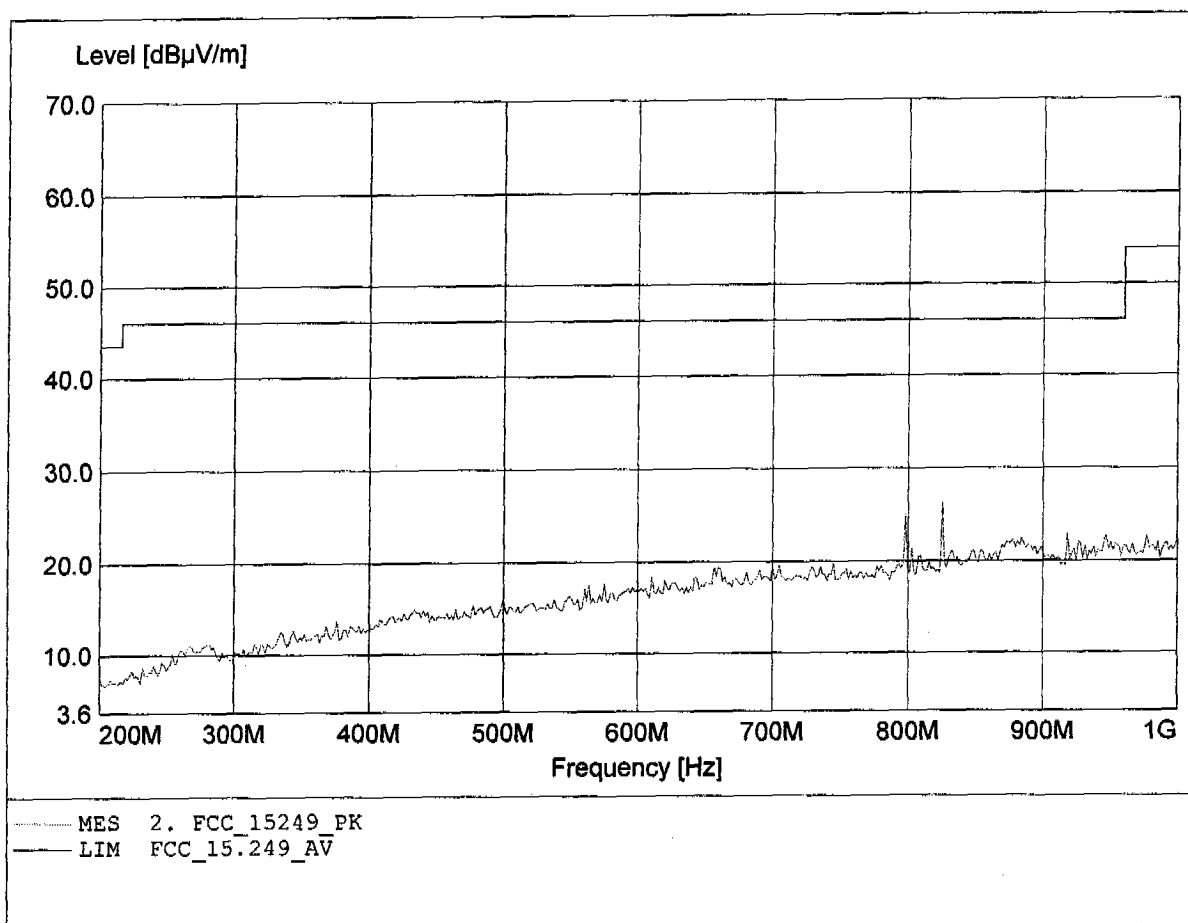

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC bb atttery
Test Specification: according to S15.249
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.473GHz, Emax: 82.23dBμV/m, RBW: 1MHz

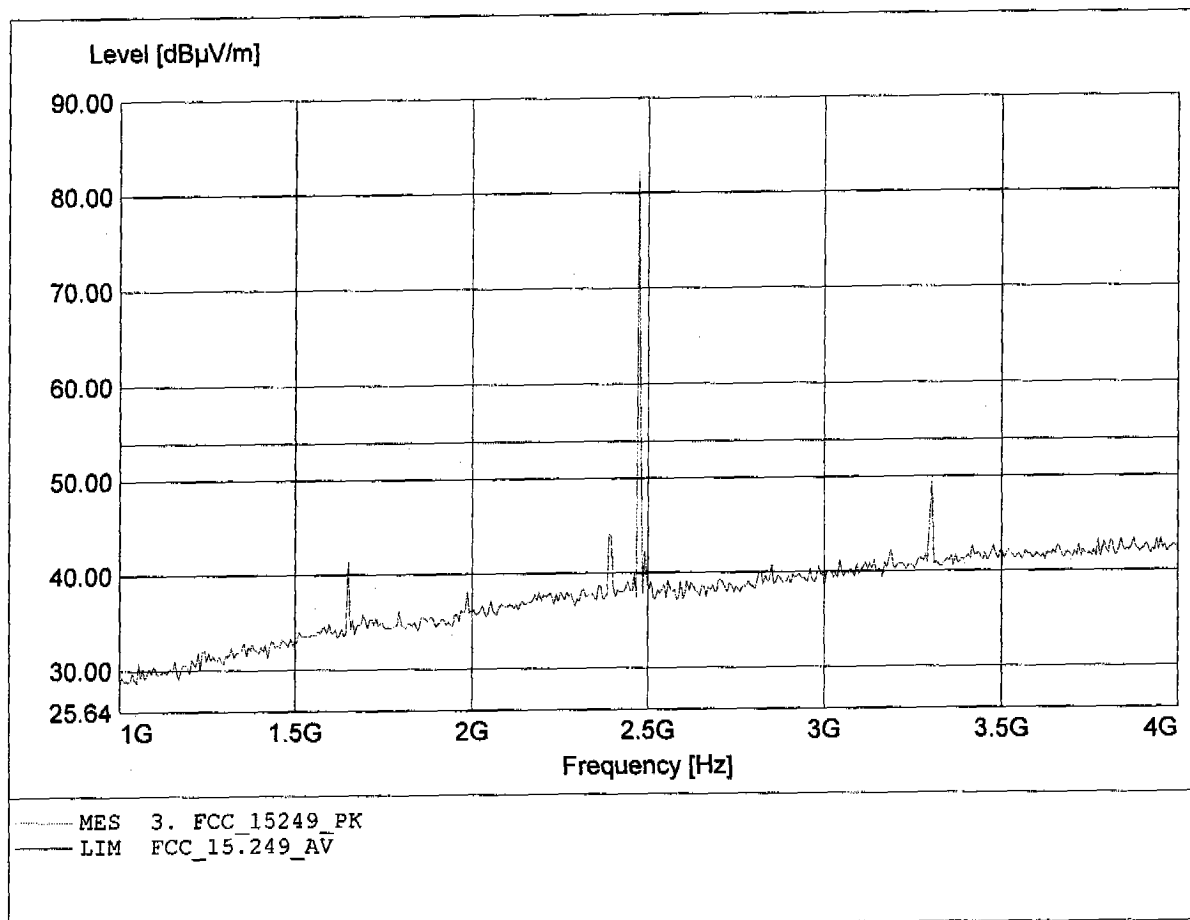

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHZ Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Cob y Manufacturing Co.,Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:3.6 VDC b attery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.473GHz, Emax: 82.54dBµV/m, RBW: 1MHz

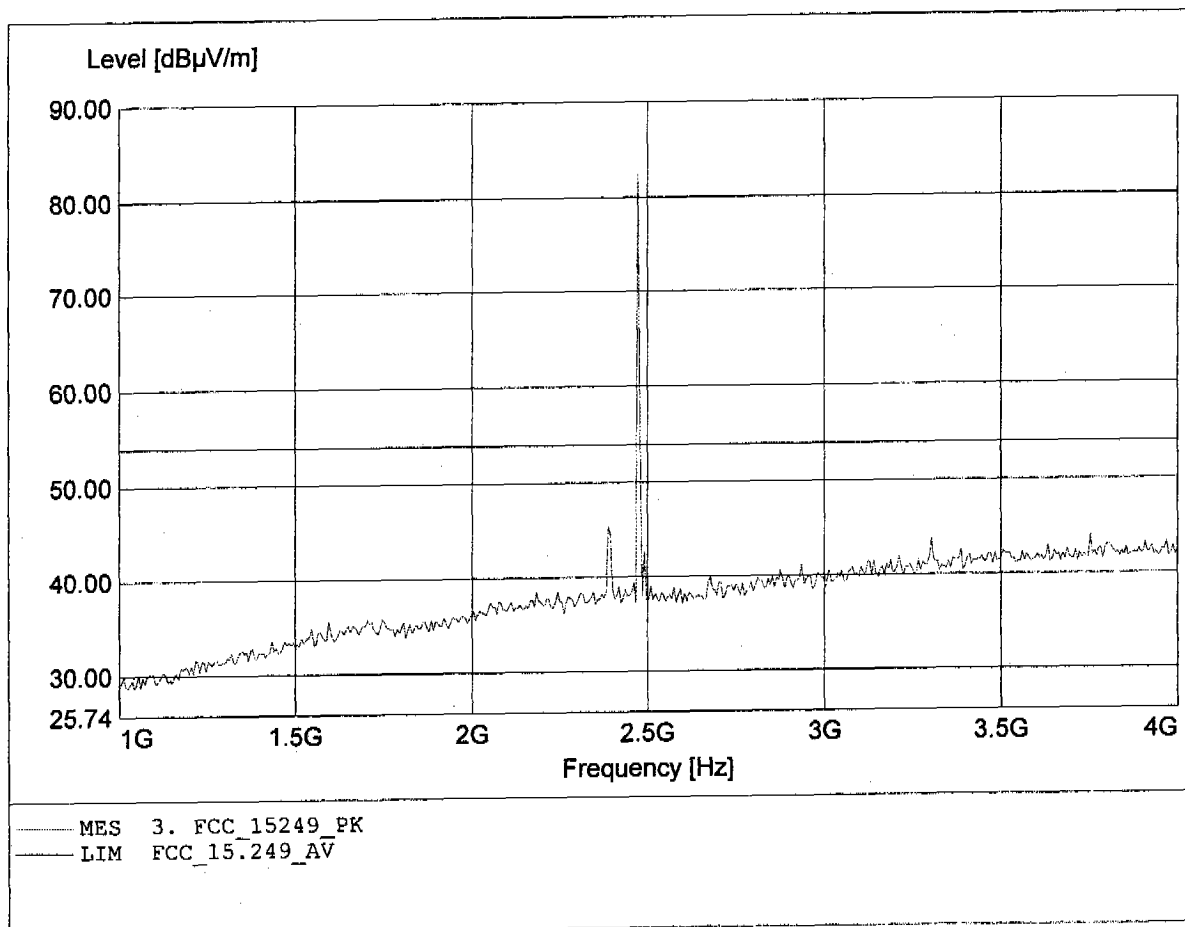

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHZ Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.527GHz, Emax: 52.22dBµV/m, RBW: 1MHz

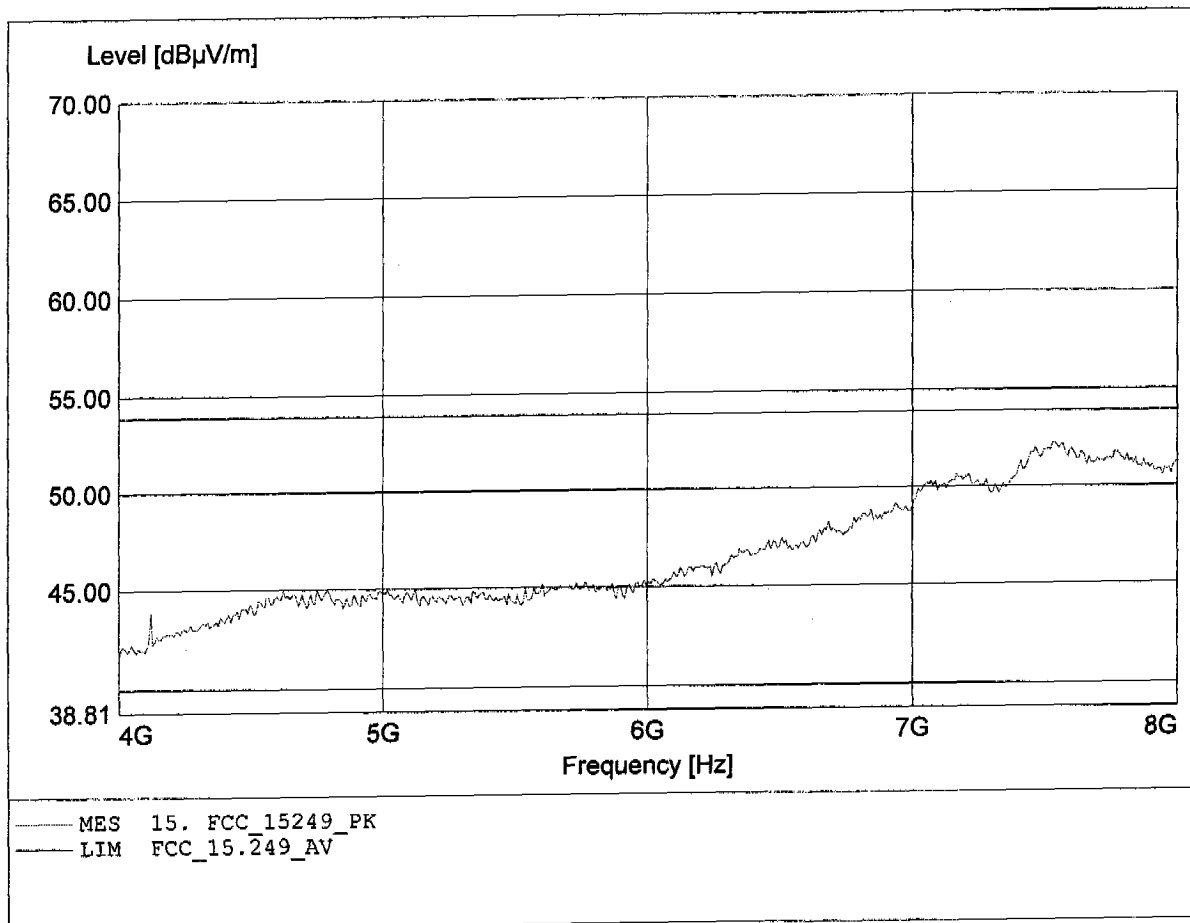

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.535GHz, Emax: 52.29dBμV/m, RBW: 1MHz

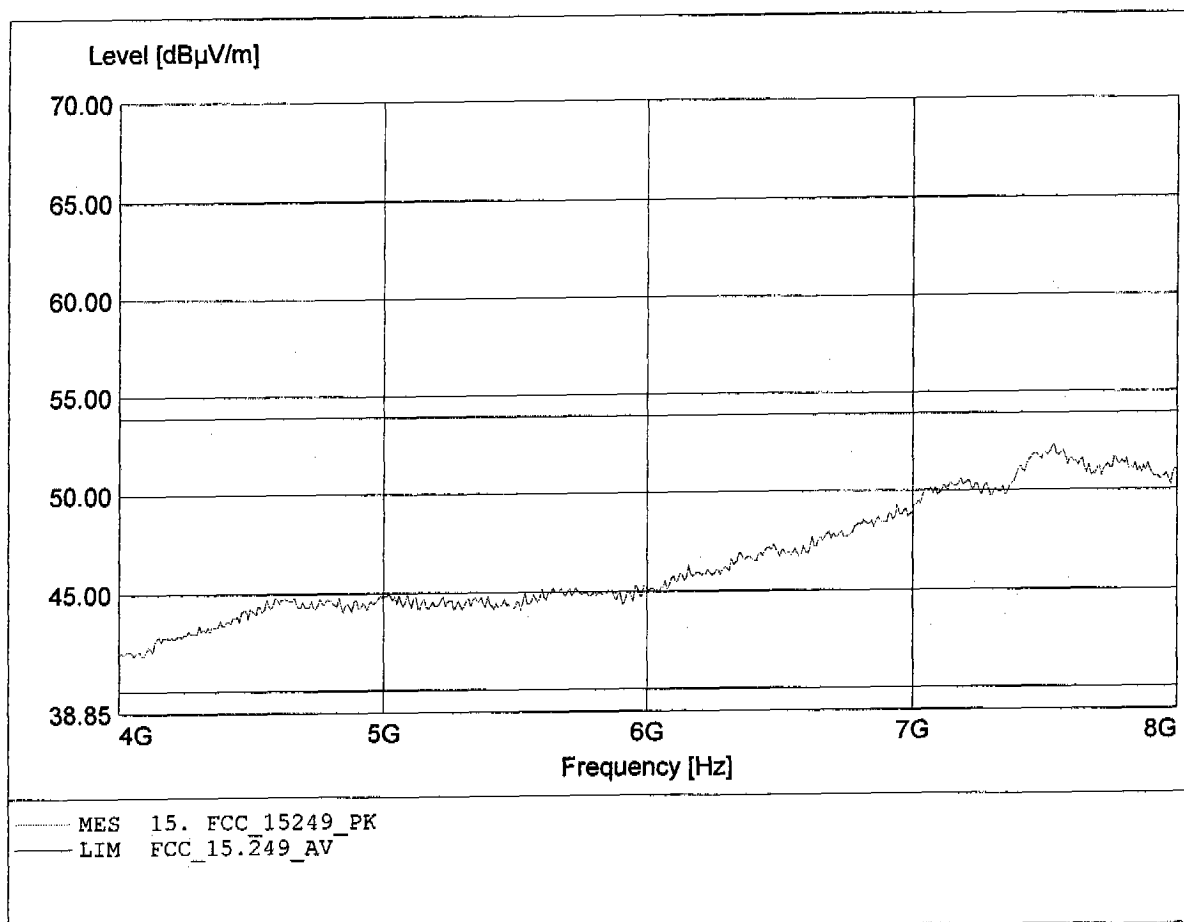

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to S15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.655GHz, Emax: 47.38dBµV/m, RBW: 1MHz

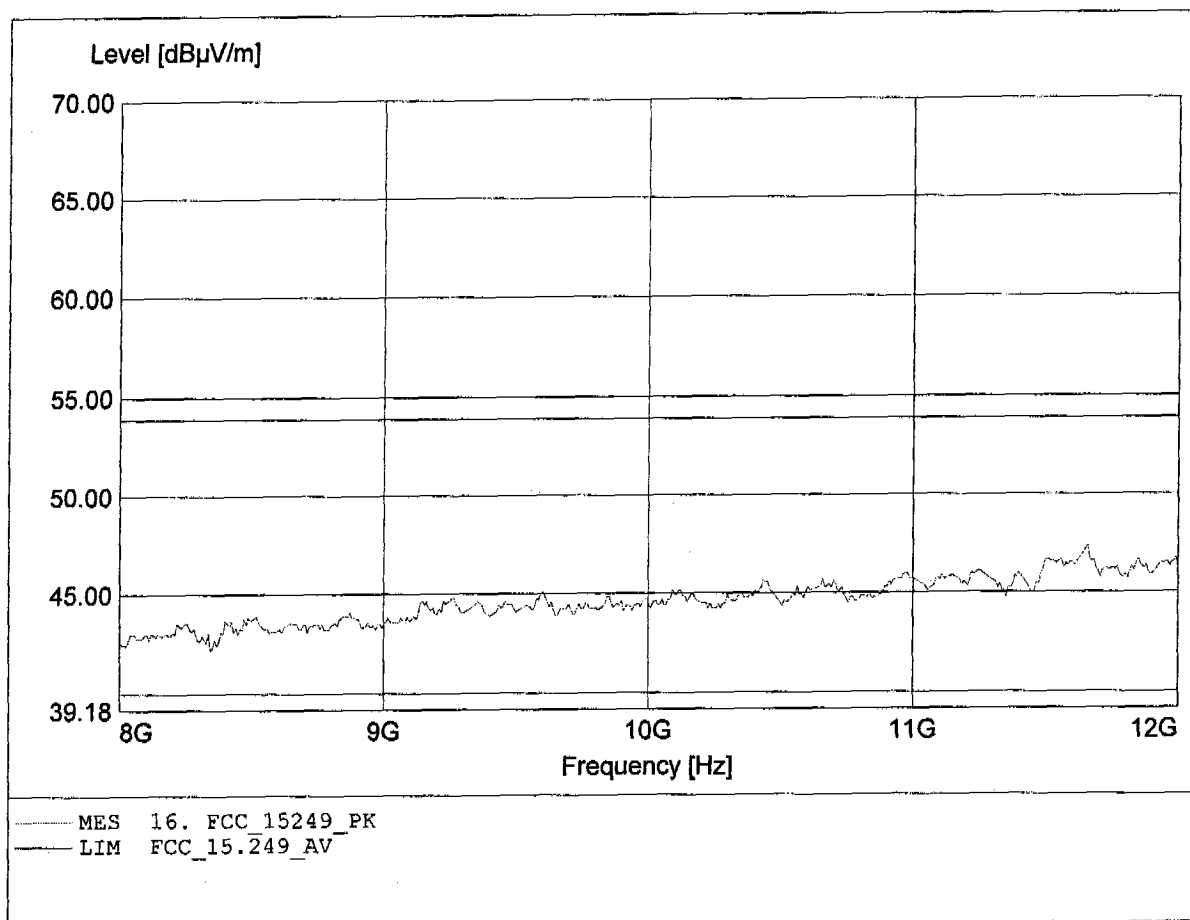

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.655GHz, Emax: 47.13dBμV/m, RBW: 1MHz

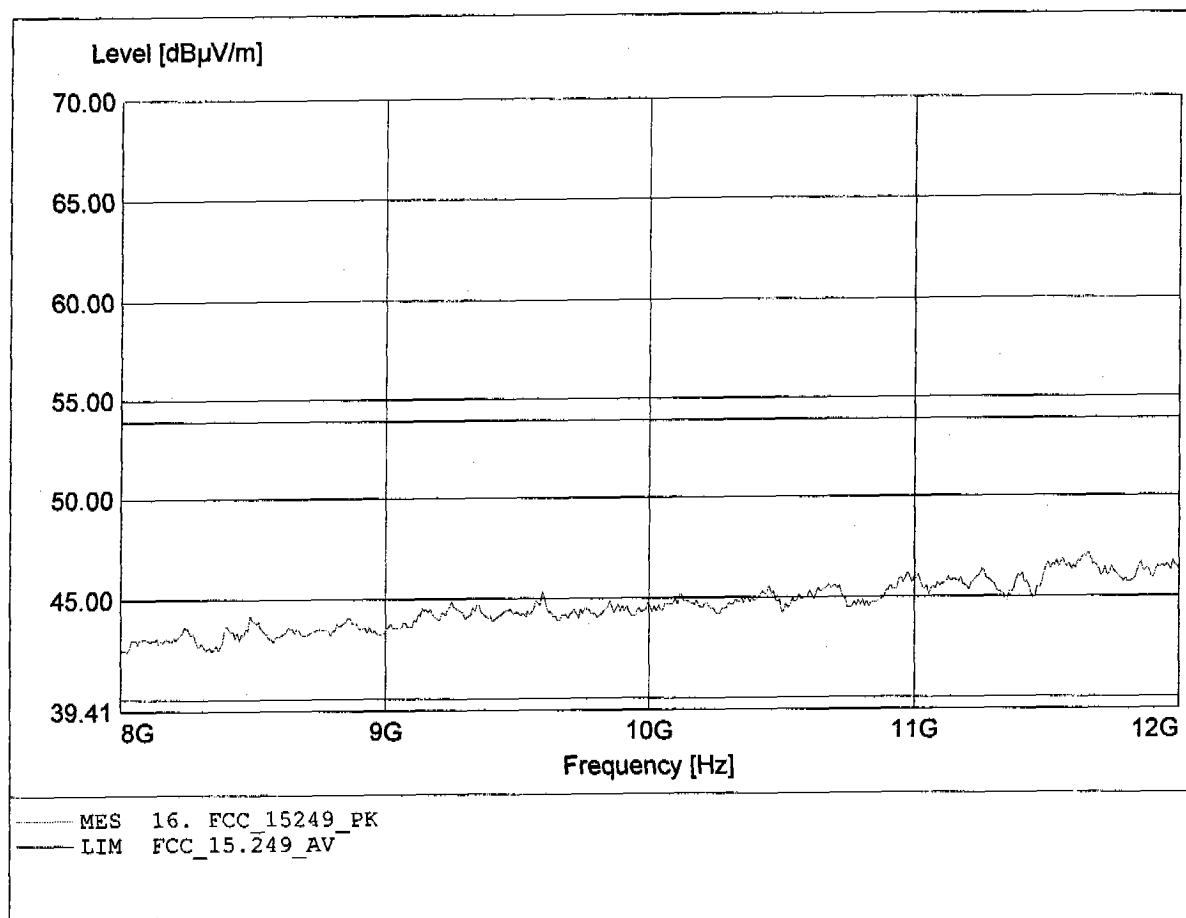

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.651GHz, Emax: 51.73dBμV/m, RBW: 1MHz

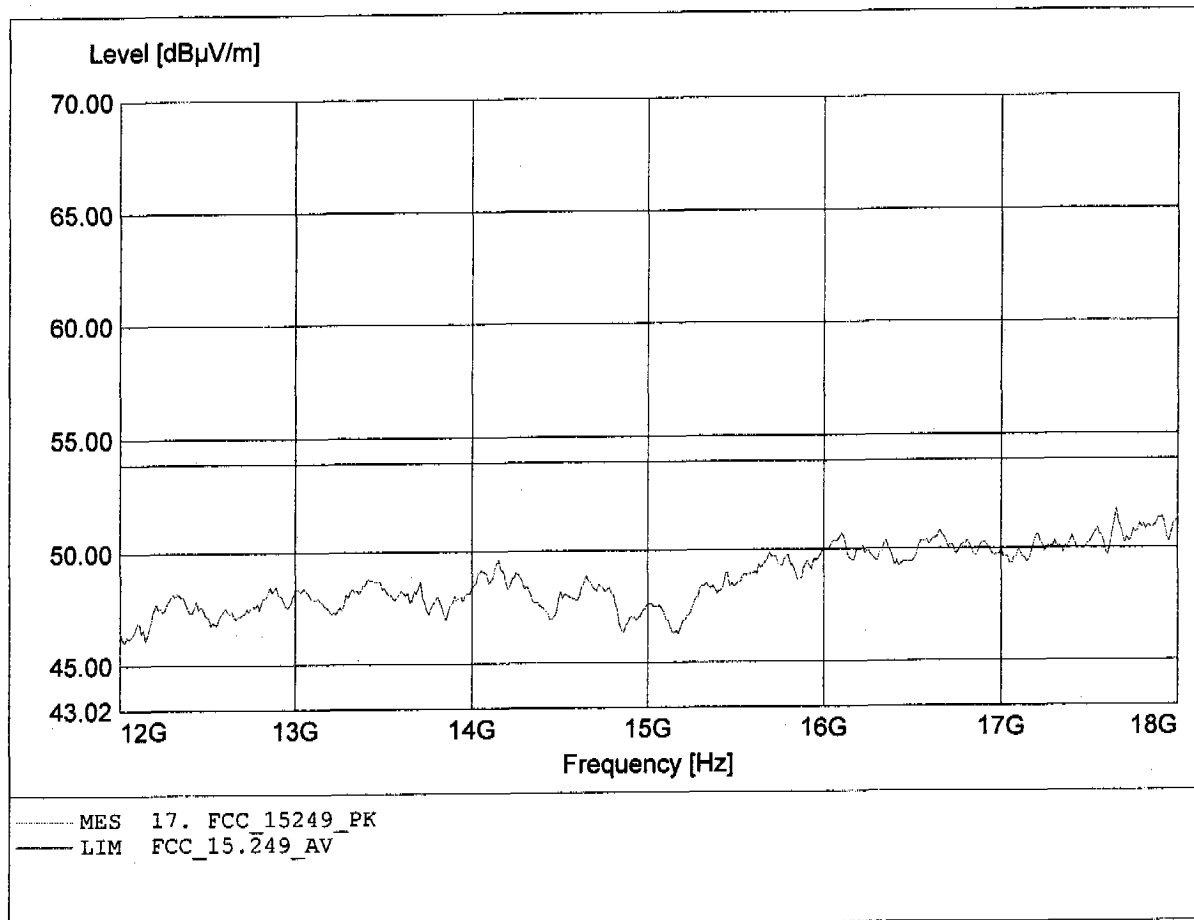

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHZ Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Coby Manufacturing Co.,Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:3.6 VDC battery
Test Specification: according to S15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 18.000GHz, Emax: 51.59dB μ V/m, RBW: 1MHz

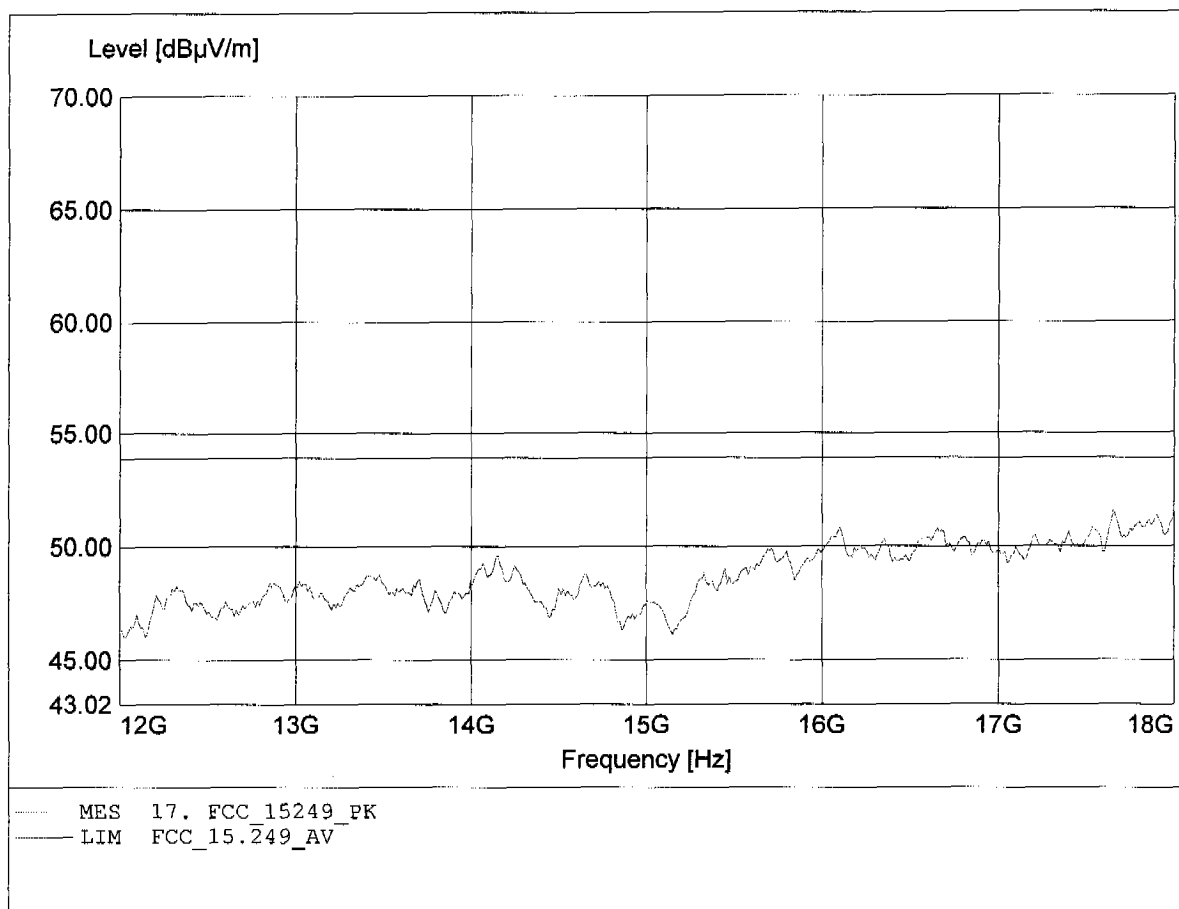

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F. Schulz
Temperature/Voltage: Temp. 25°C / Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.193GHz, Emax: 44.49dBμV/m, RBW: 1MHz

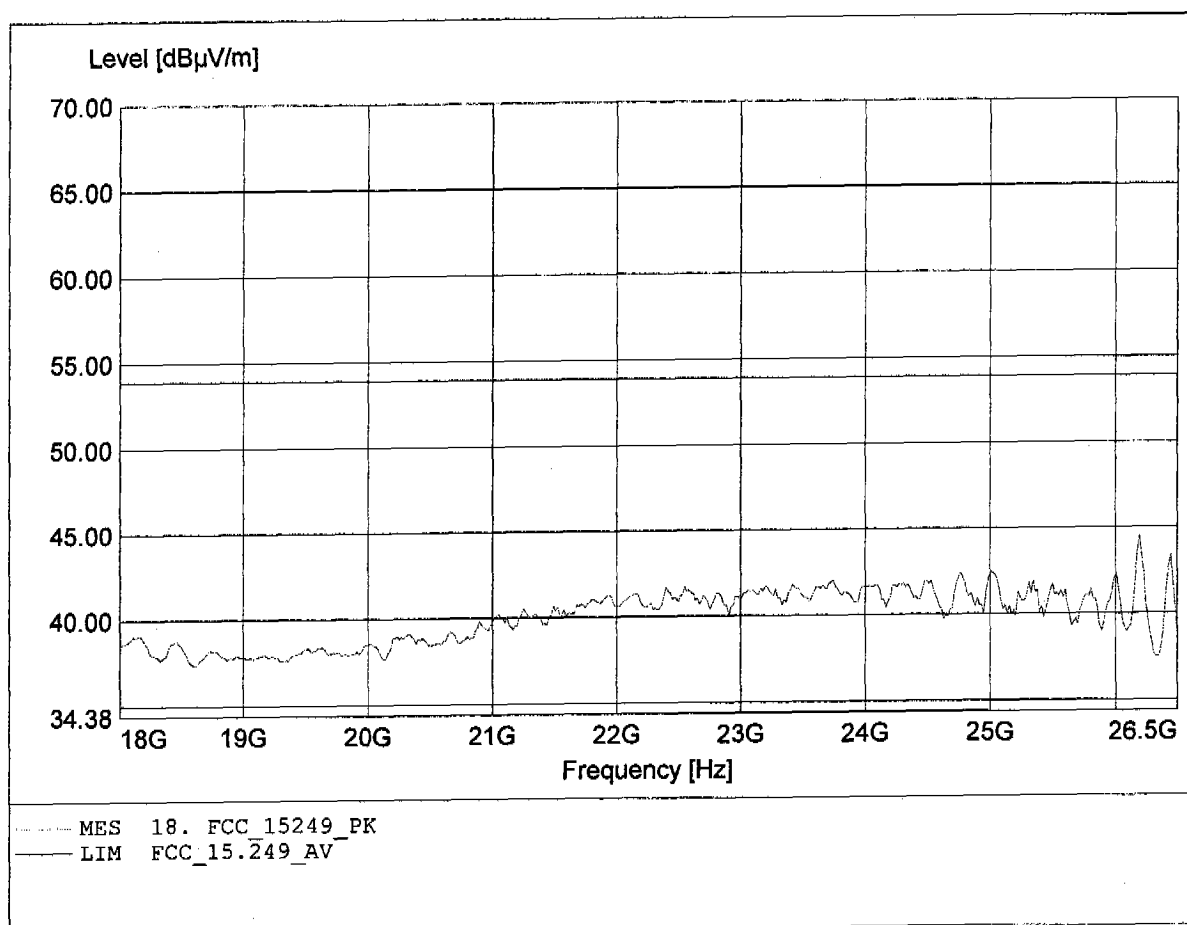

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH1
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.193GHz, Emax: 44.10dBμV/m, RBW: 1MHz

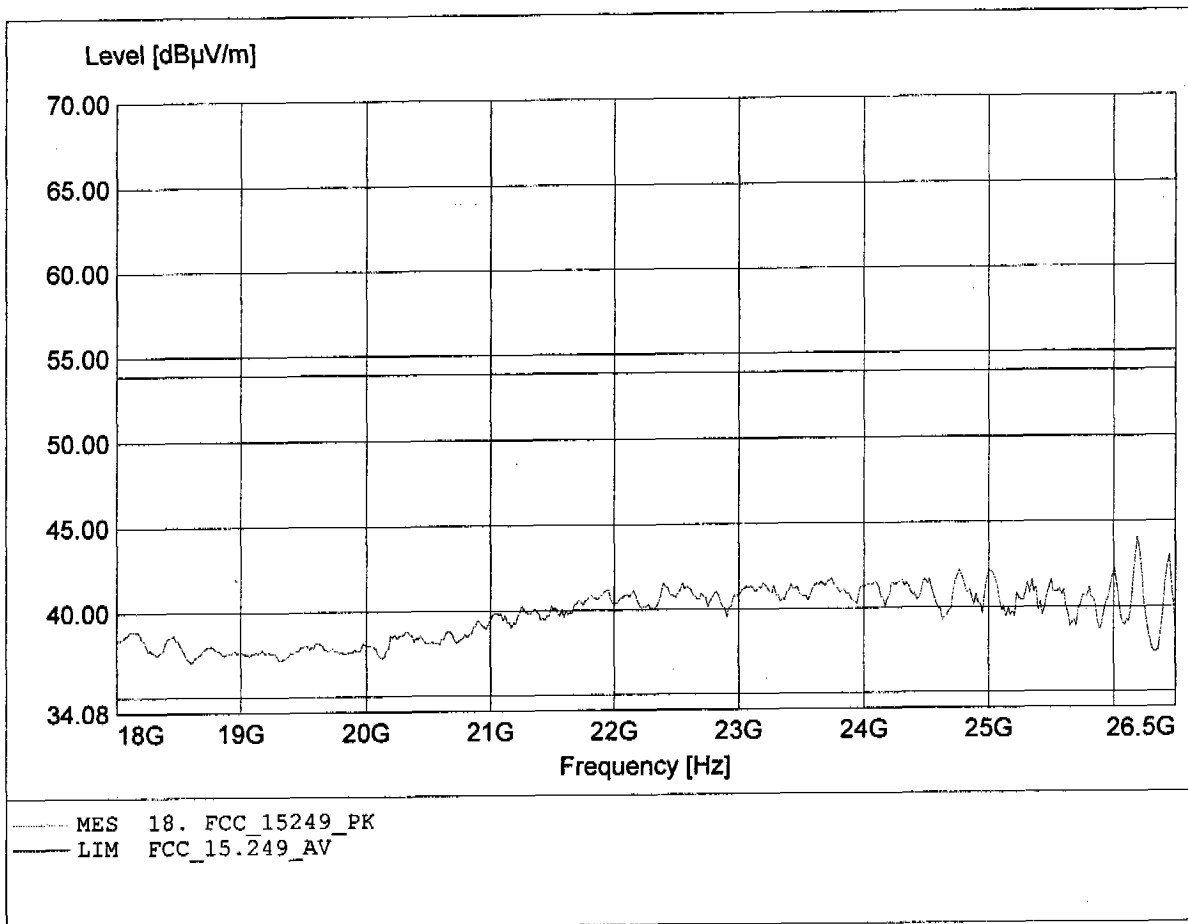

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 198.637MHz, Emax: 32.57dBμV/m, RBW: 100kHz

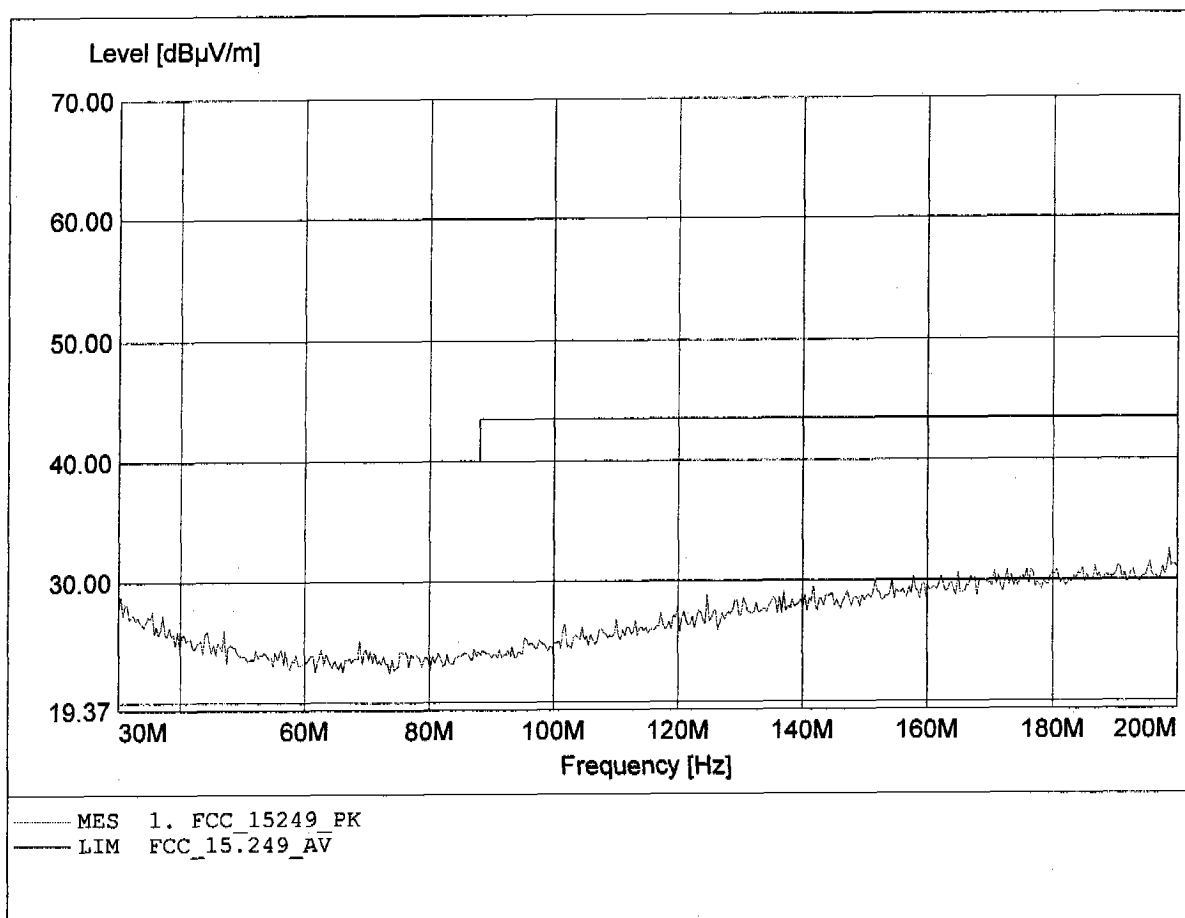

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 190.802MHz, Emax: 31.90dBµV/m, RBW: 100kHz

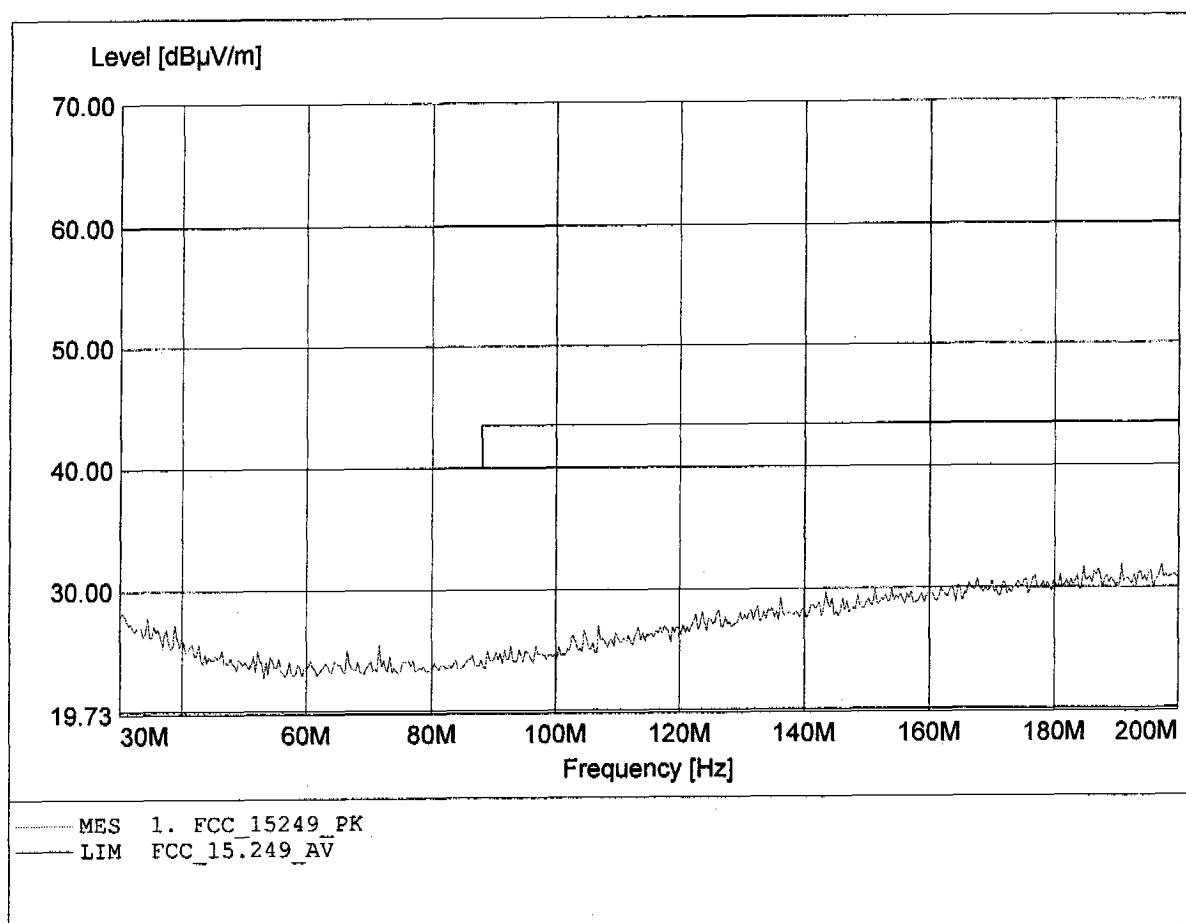

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Freq: 825.251MHz, Emax: 27.22dBµV/m, RBW: 100kHz

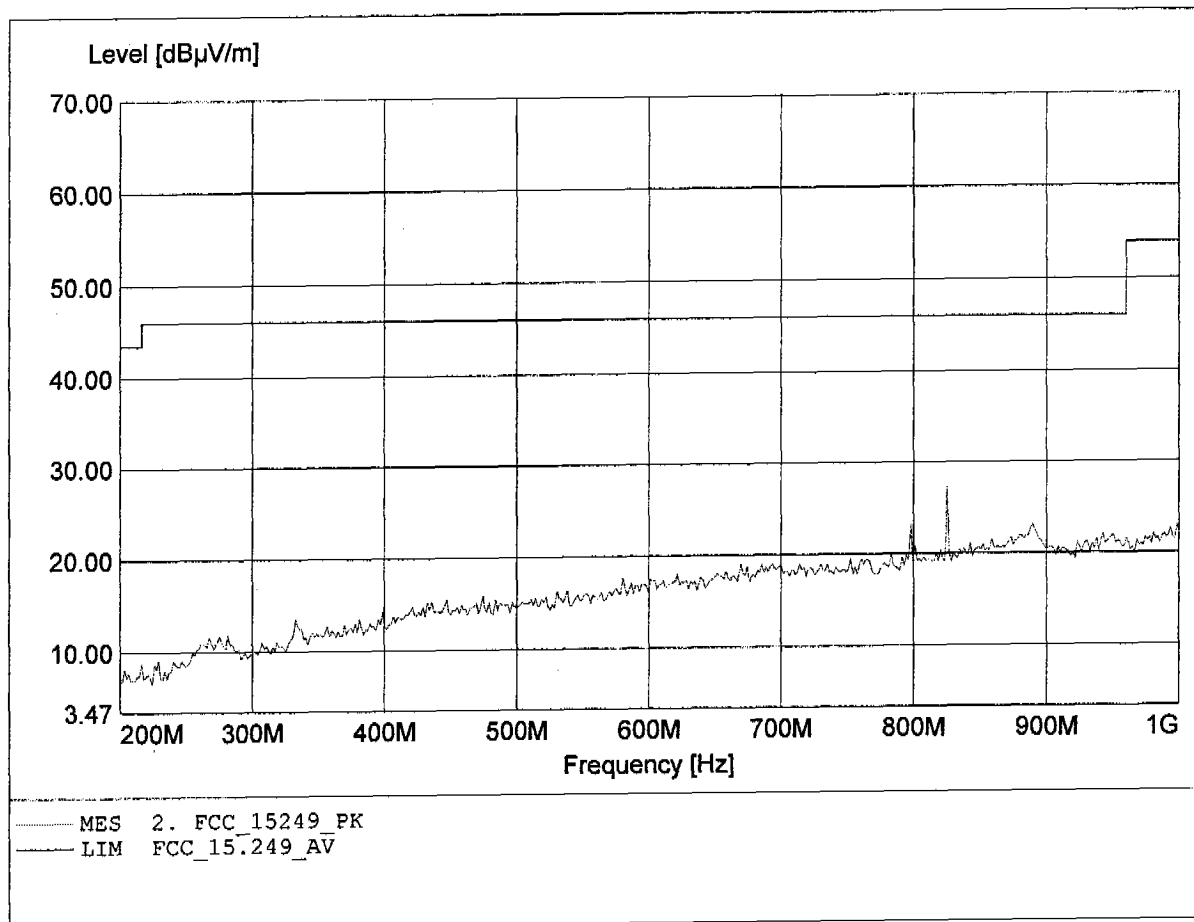

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Freq: 825.251MHz, Emax: 25.69dBμV/m, RBW: 100kHz

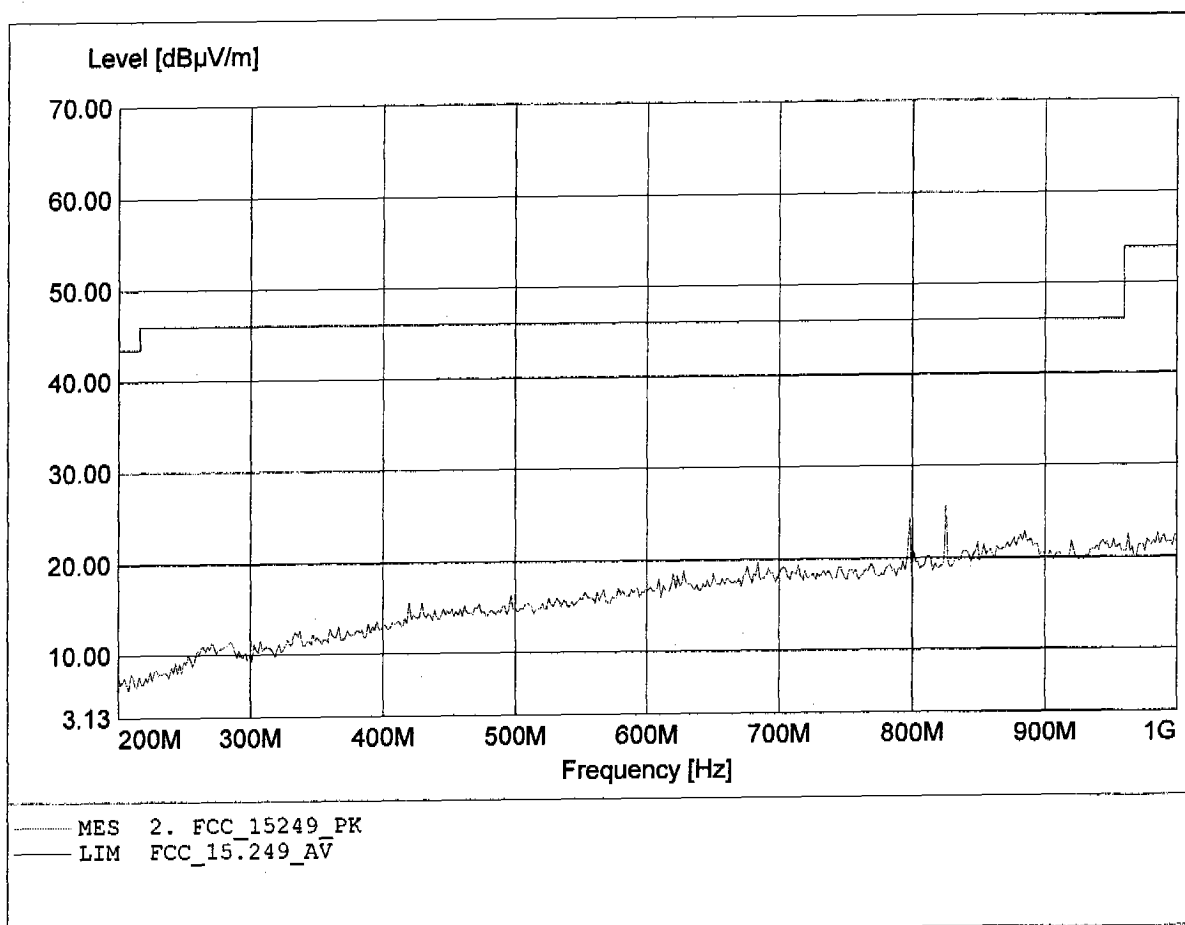

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Cob y Manufacturing Co.,Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.:3.6 VDC b attery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.479GHz, Emax: 82.50dBµV/m, RBW: 1MHz

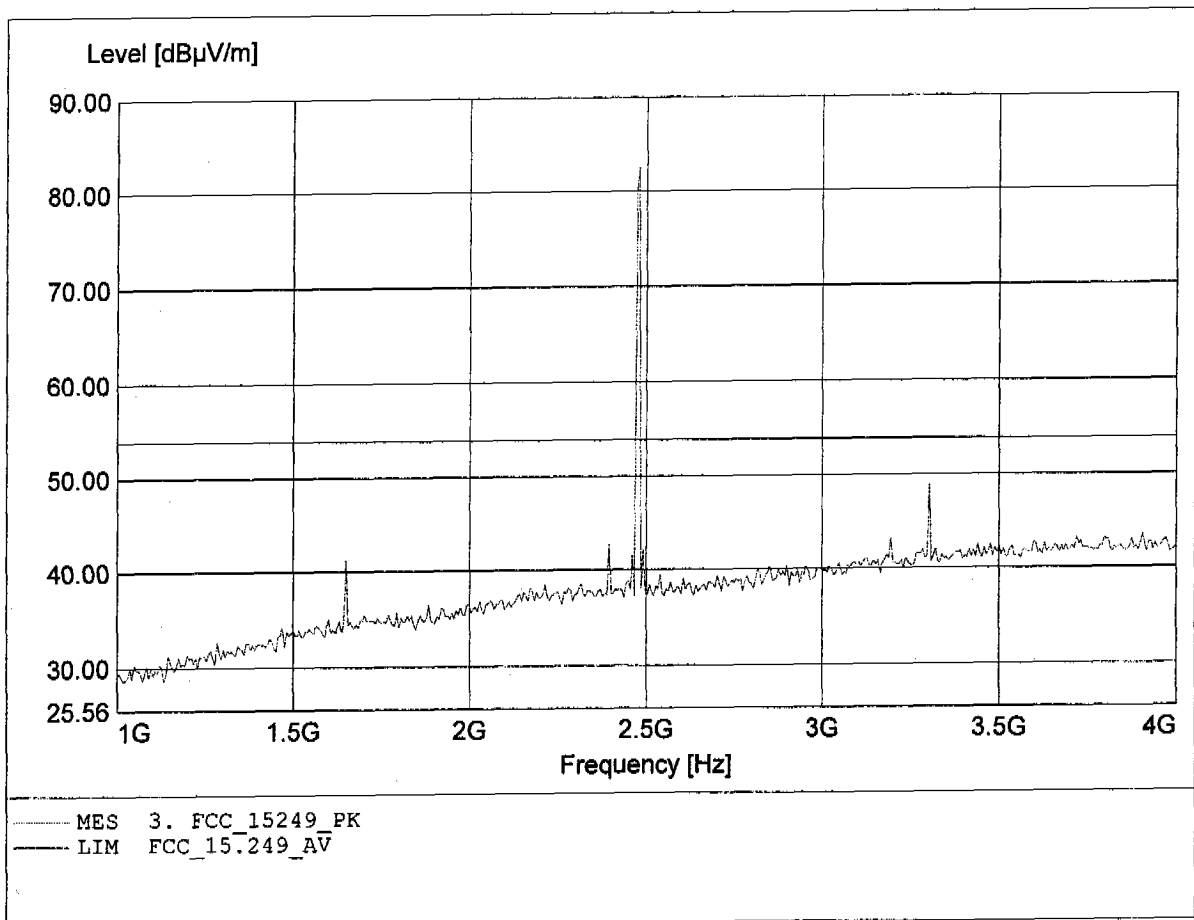

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Cob y Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC bb attery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.479GHz, Emax: 83.40dBμV/m, RBW: 1MHz

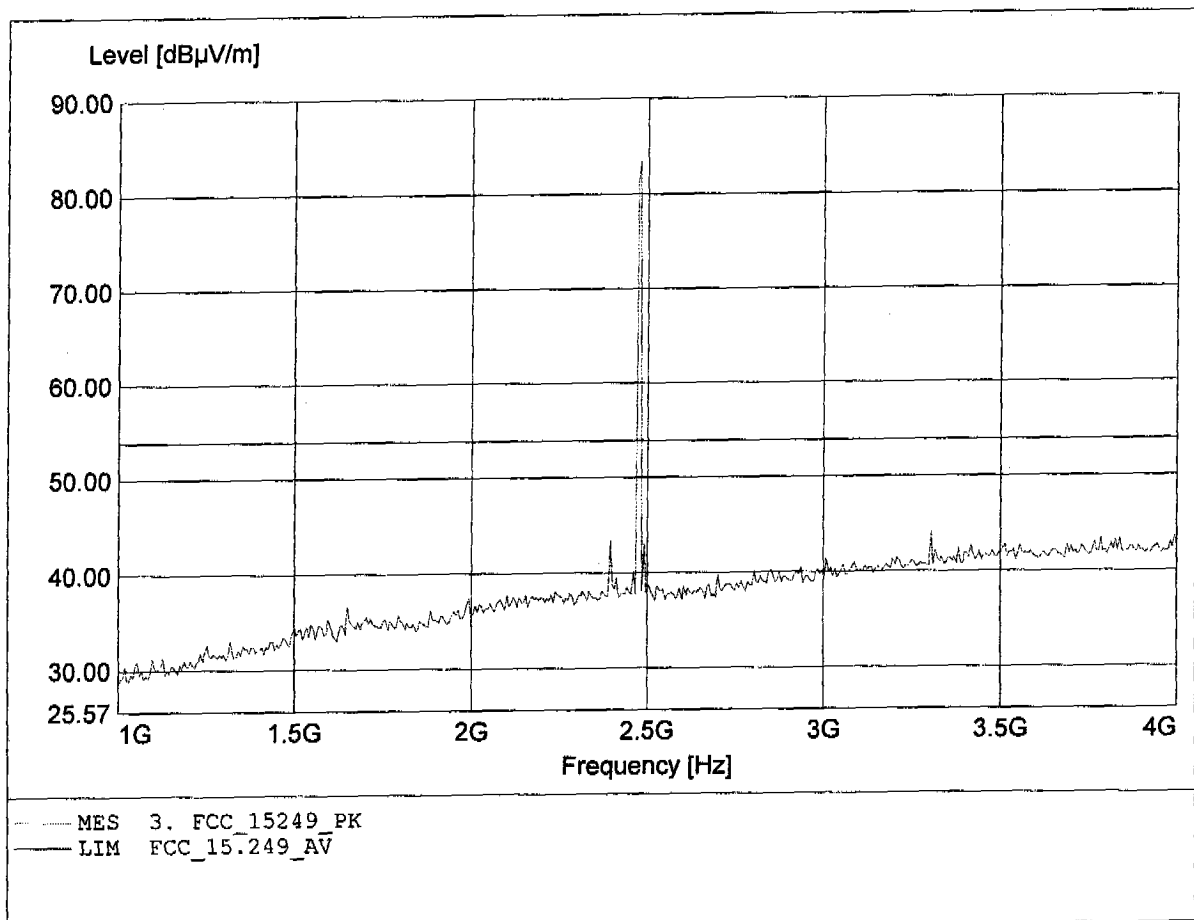

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHZ Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.527GHz, Emax: 52.26dBµV/m, RBW: 1MHz

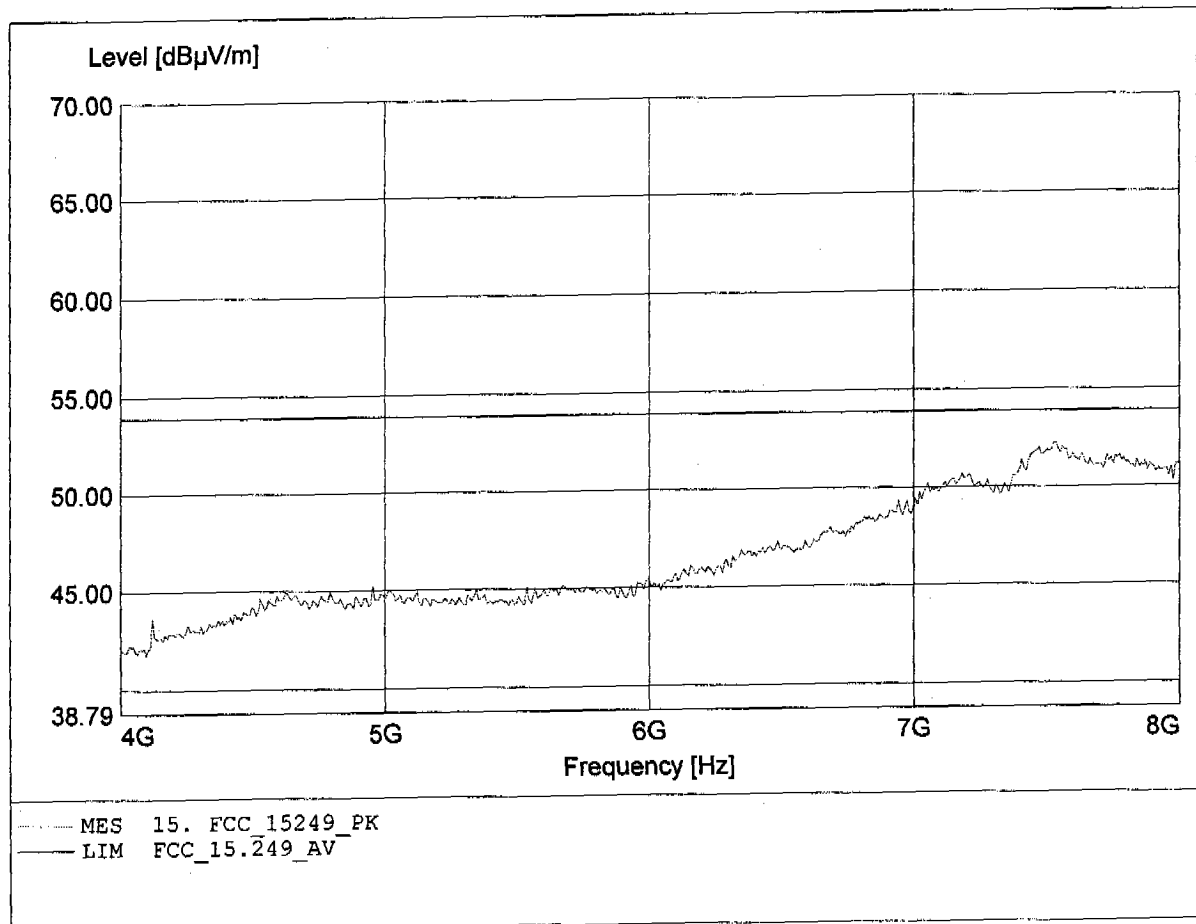

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.535GHz, Emax: 51.77dBμV/m, RBW: 1MHz

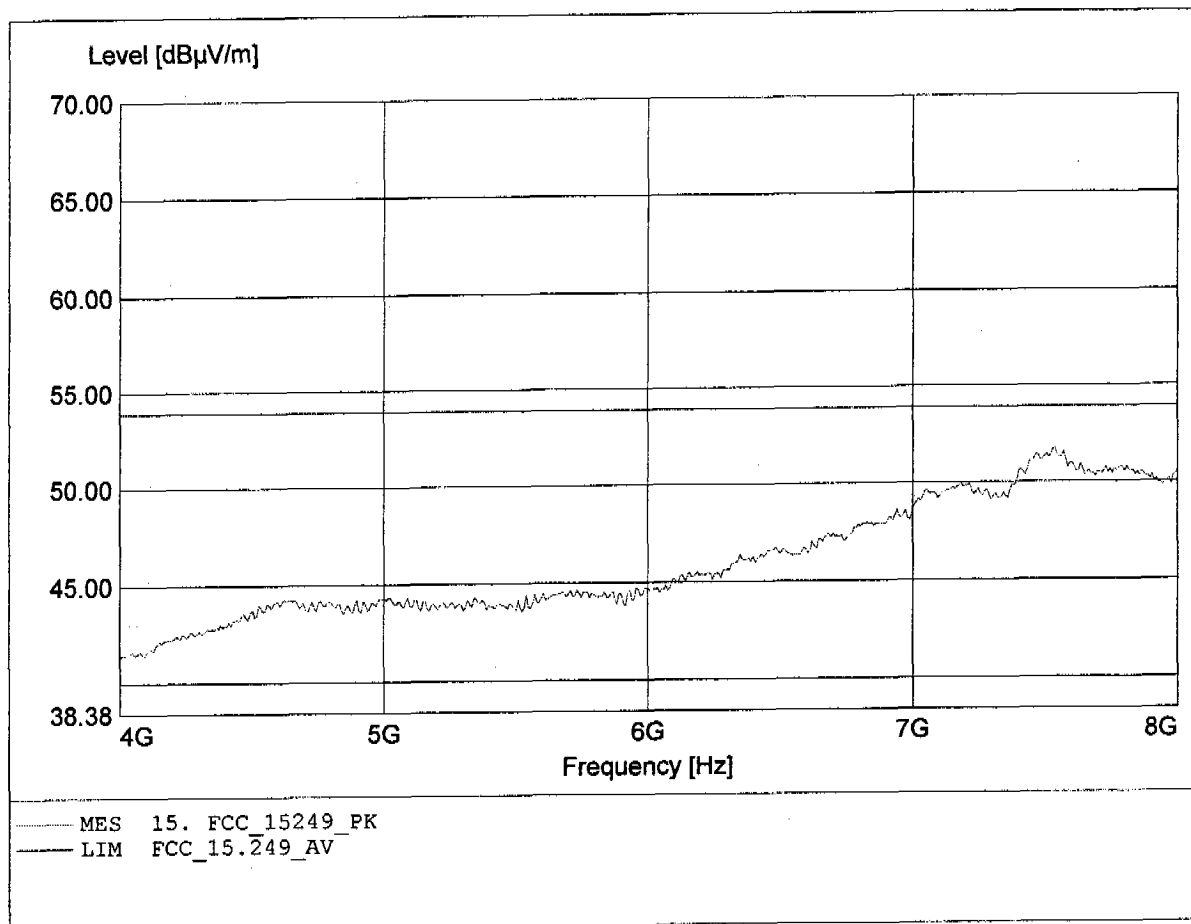

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.655GHz, Emax: 47.13dBμV/m, RBW: 1MHz

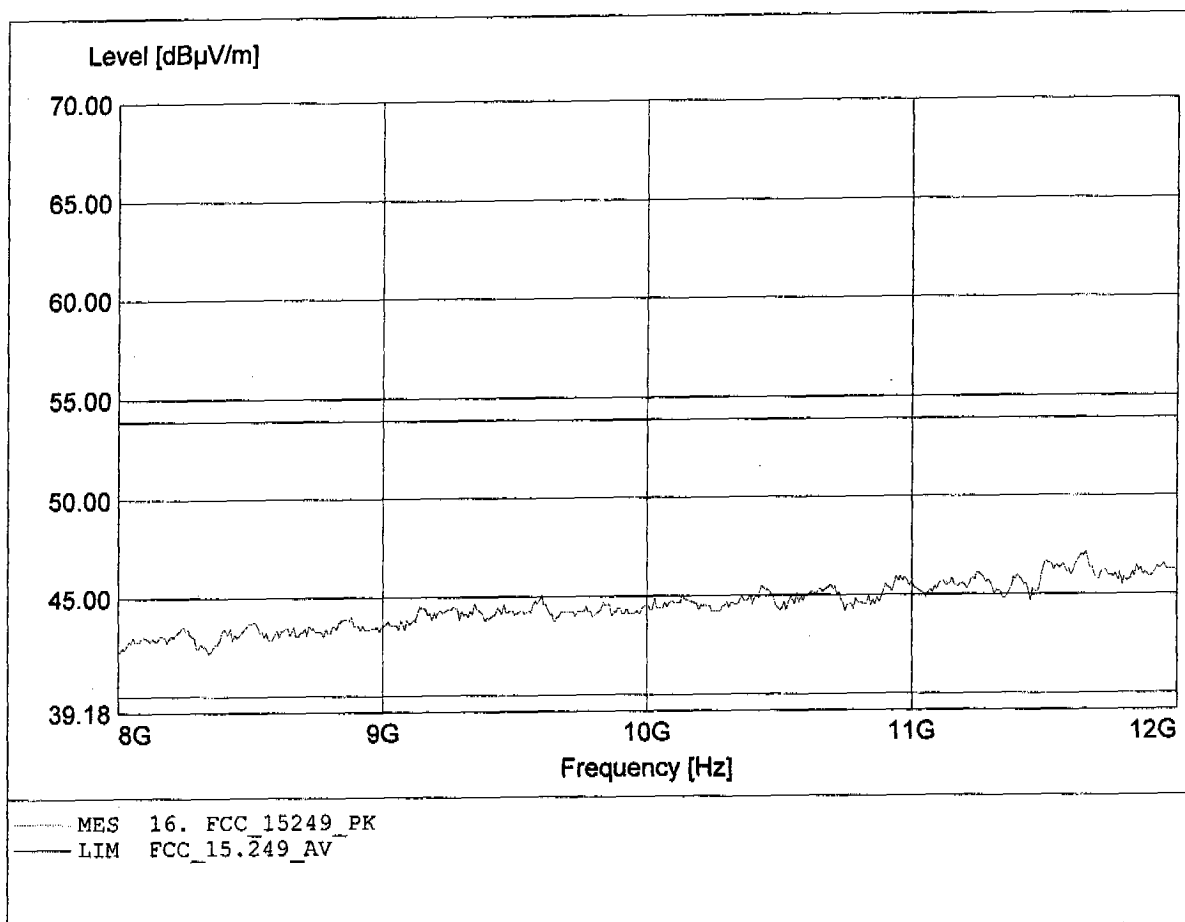

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.655GHz, Emax: 47.13dBμV/m, RBW: 1MHz

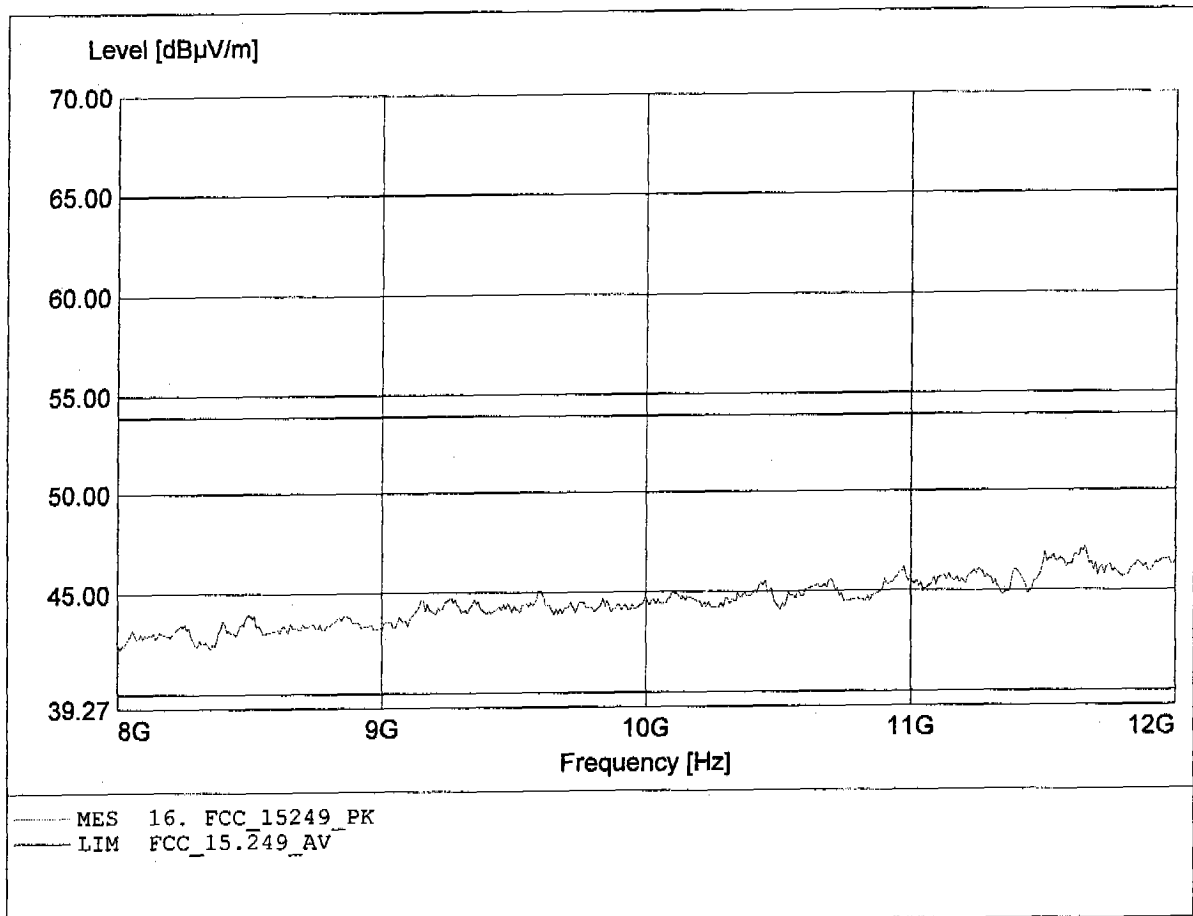

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.651GHz, Emax: 51.41dBµV/m, RBW: 1MHz

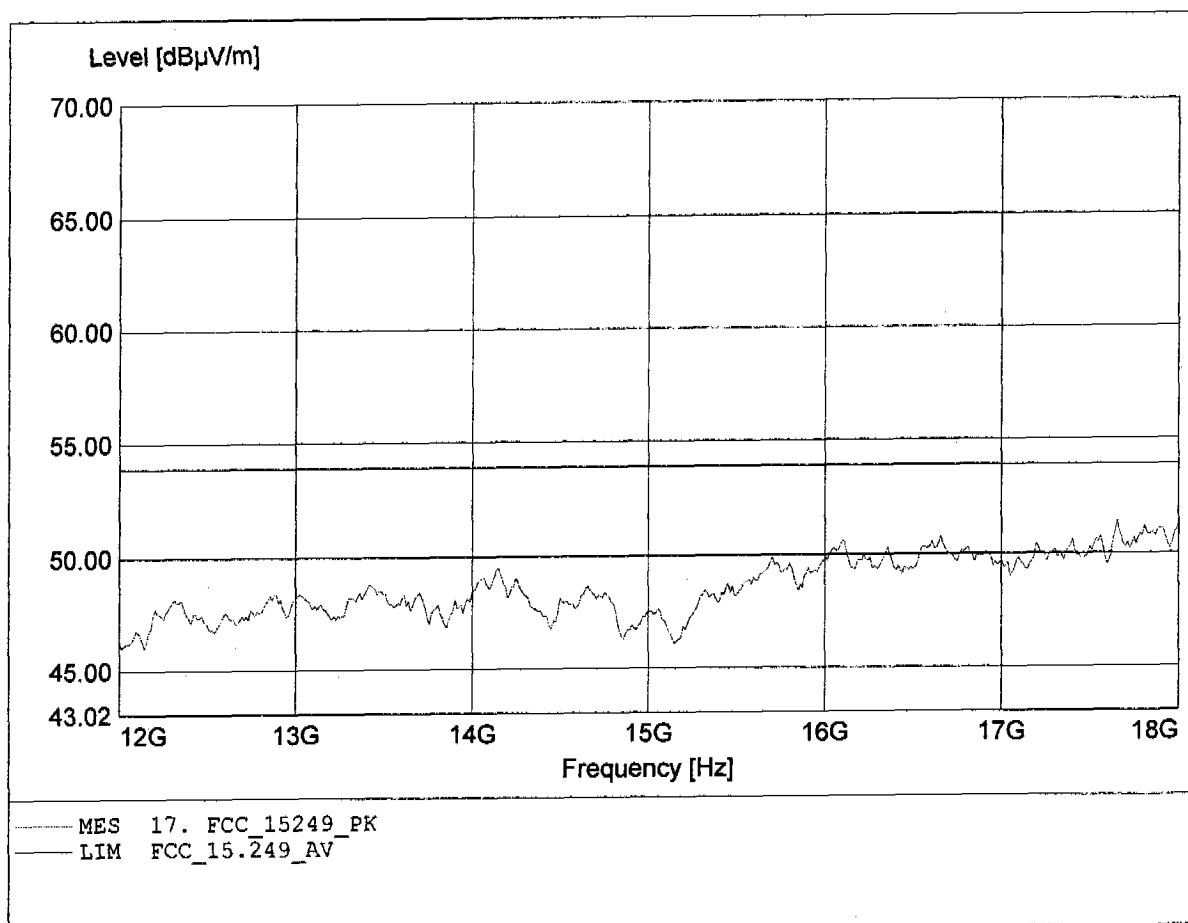

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.651GHz, Emax: 51.57dBμV/m, RBW: 1MHz

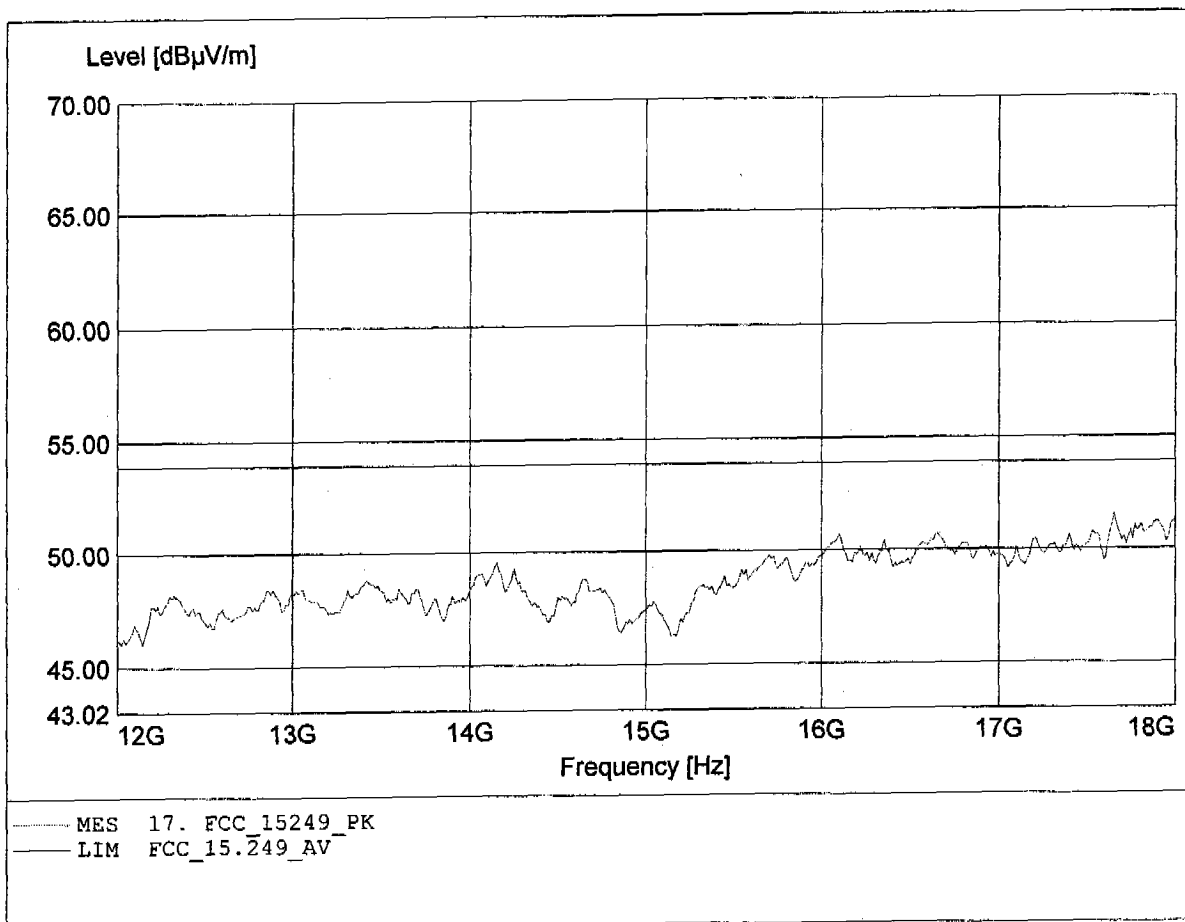

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.193GHz, Emax: 44.49dBµV/m, RBW: 1MHz

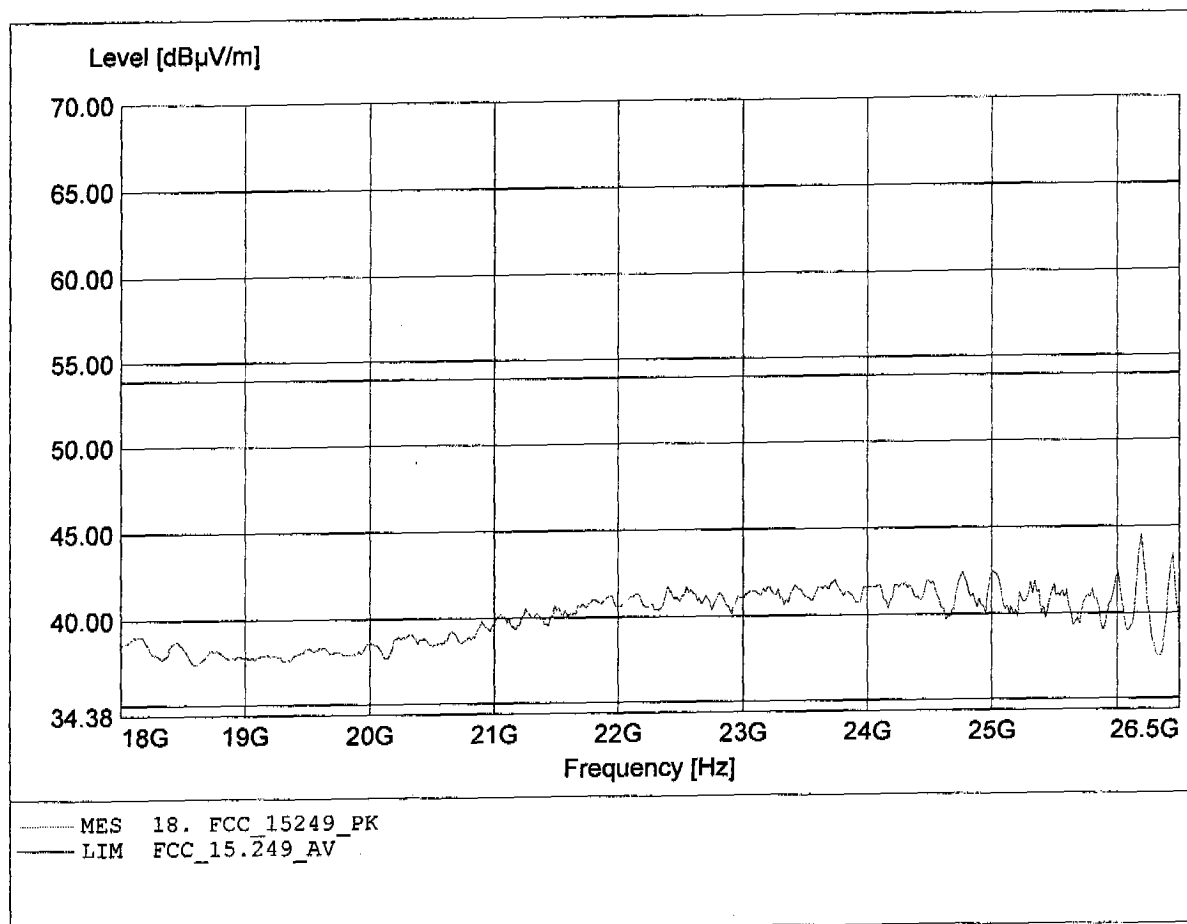

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Phone
MODEL NO.: CT-P8800 CH50
Approval Holder: Coby Manufacturing Co., Ltd.
Test Site / Operator: ETS / MR. F.Schulz
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.193GHz, Emax: 44.10dBμV/m, RBW: 1MHz

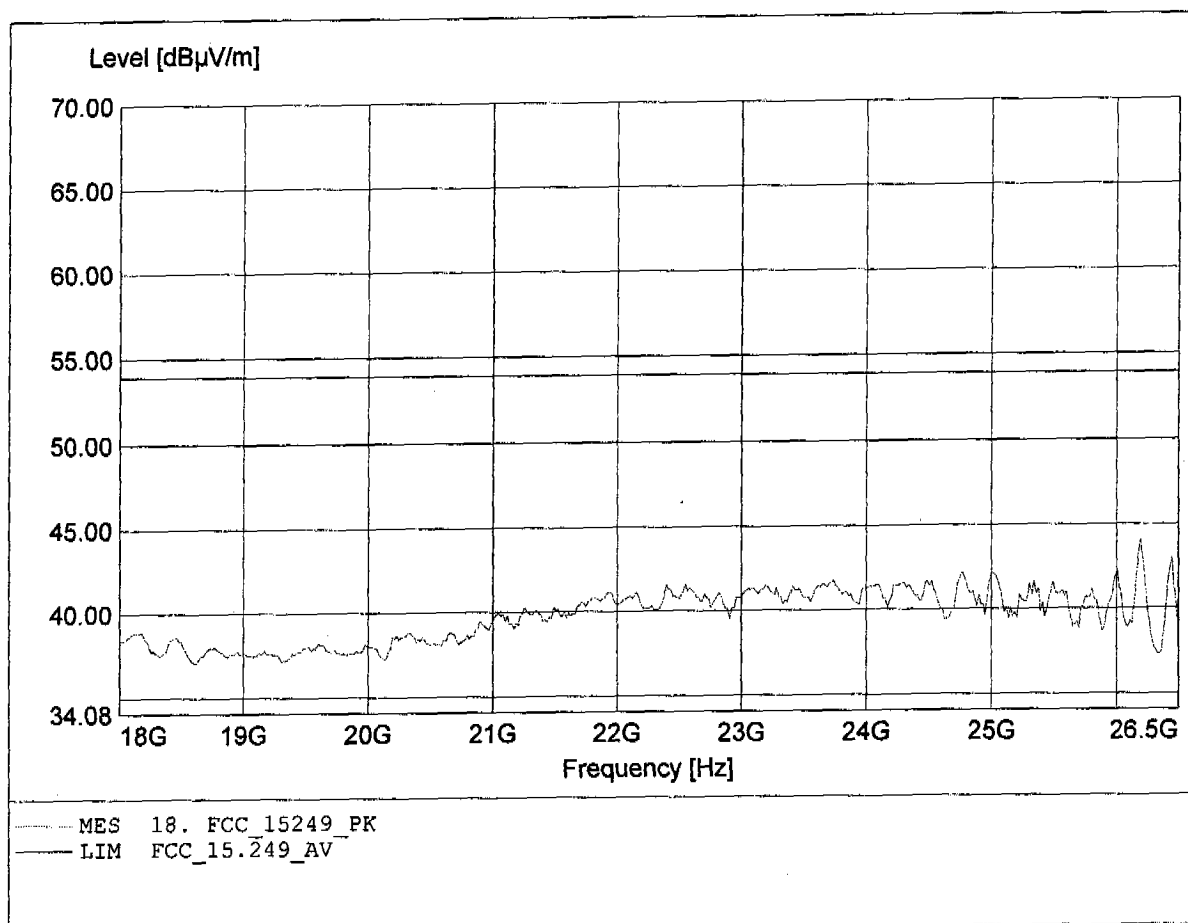


Appendix D

Out of band Spurious Emissions, Bandedge - Transmitter operating

2.38-2.408 GHz BAND EDGE

According To FCC PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone Base
Approval Holder: Coby Manufacturing Co., Ltd.
Operating Condition: Unom : 120 VAC (AC/DC adaptor) , Tnom: 23°C
Test Site: ETS
Operator: Catey Lee
Test Specification: according to 15.249
Comment: model : CT-P8800 mode : active

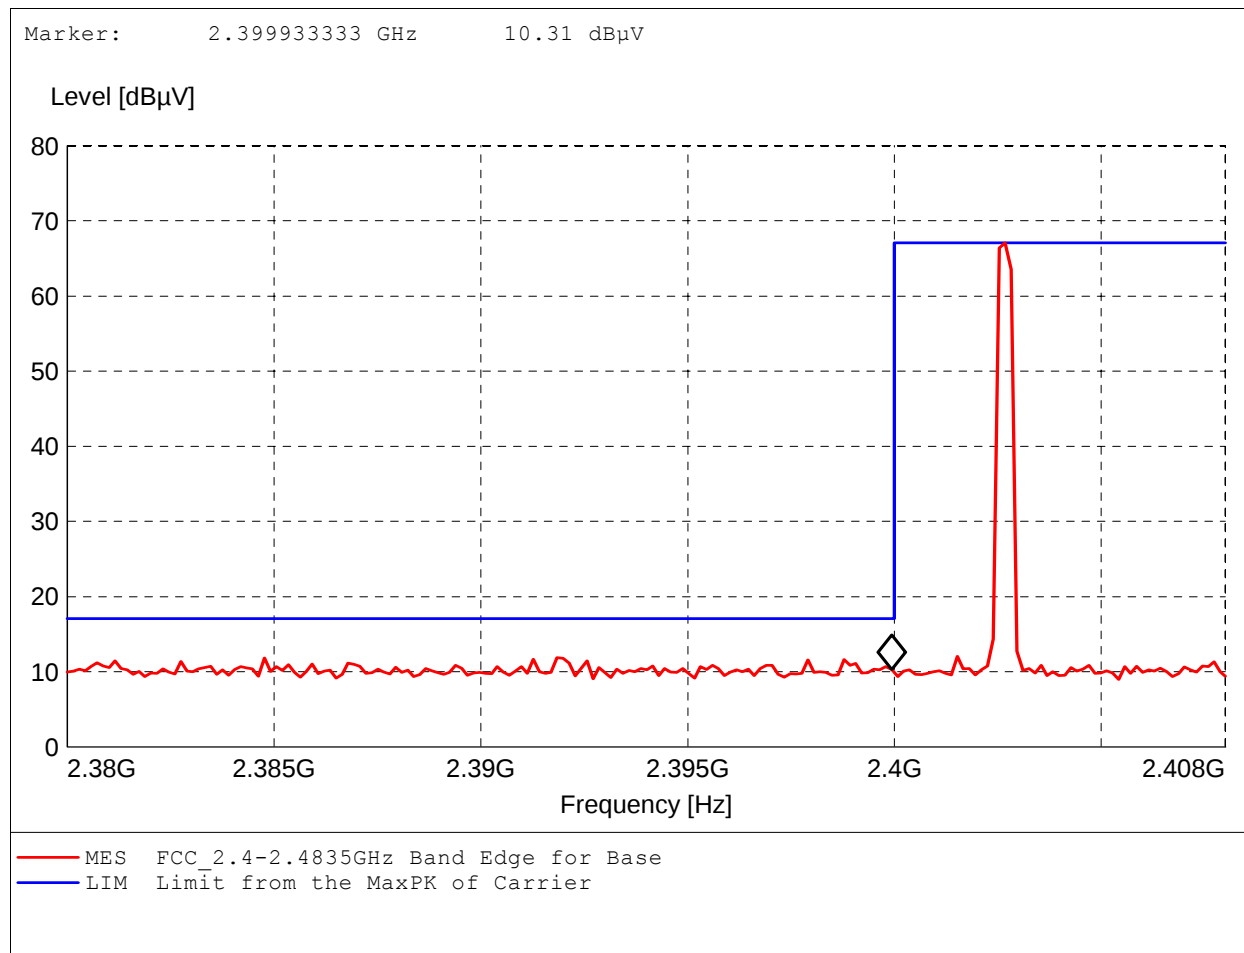

2.475-2.503 GHz BAND EDGE

According To FCC PART 15, SUBPART C

EUT: 2.4 GHz Cordless Phone Handset
Approval Holder: Coby Manufacturing Co., Ltd.
Operating Condition: Unom : 3.6 VDC battery , Tnom: 23°C
Test Site: ETS
Operator: Catey Lee
Test Specification: according to 15.249
Comment: model : CT-P8800 mode : active

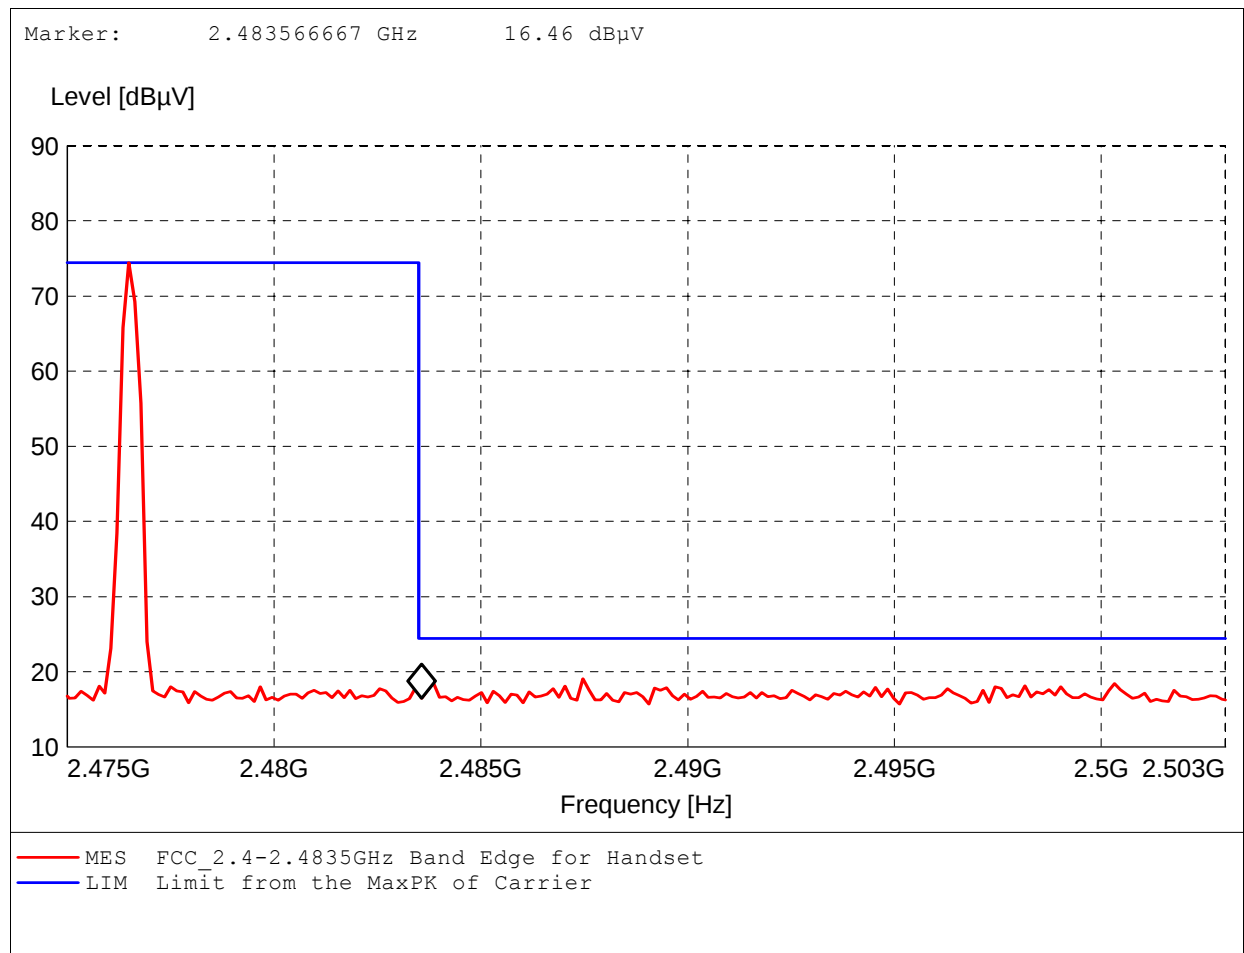


Appendix E

Conducted Measurement at (AC) Power Line

EMI voltage test in the ac-mains according to FCC Part 15

Class B


EUT: 2.4GHz Cordless Phone CH1
Approval Holder: Coby Manufacturing Co.,Ltd.
Operating Condition: Unom: 120VAC (AC/DC adaptor), Tnom: 25°C
Test Site: ETS
Operator: Catey Lee
Test Specification: V-network: ESH3-Z5 L1
Comment: model: CT-P8800

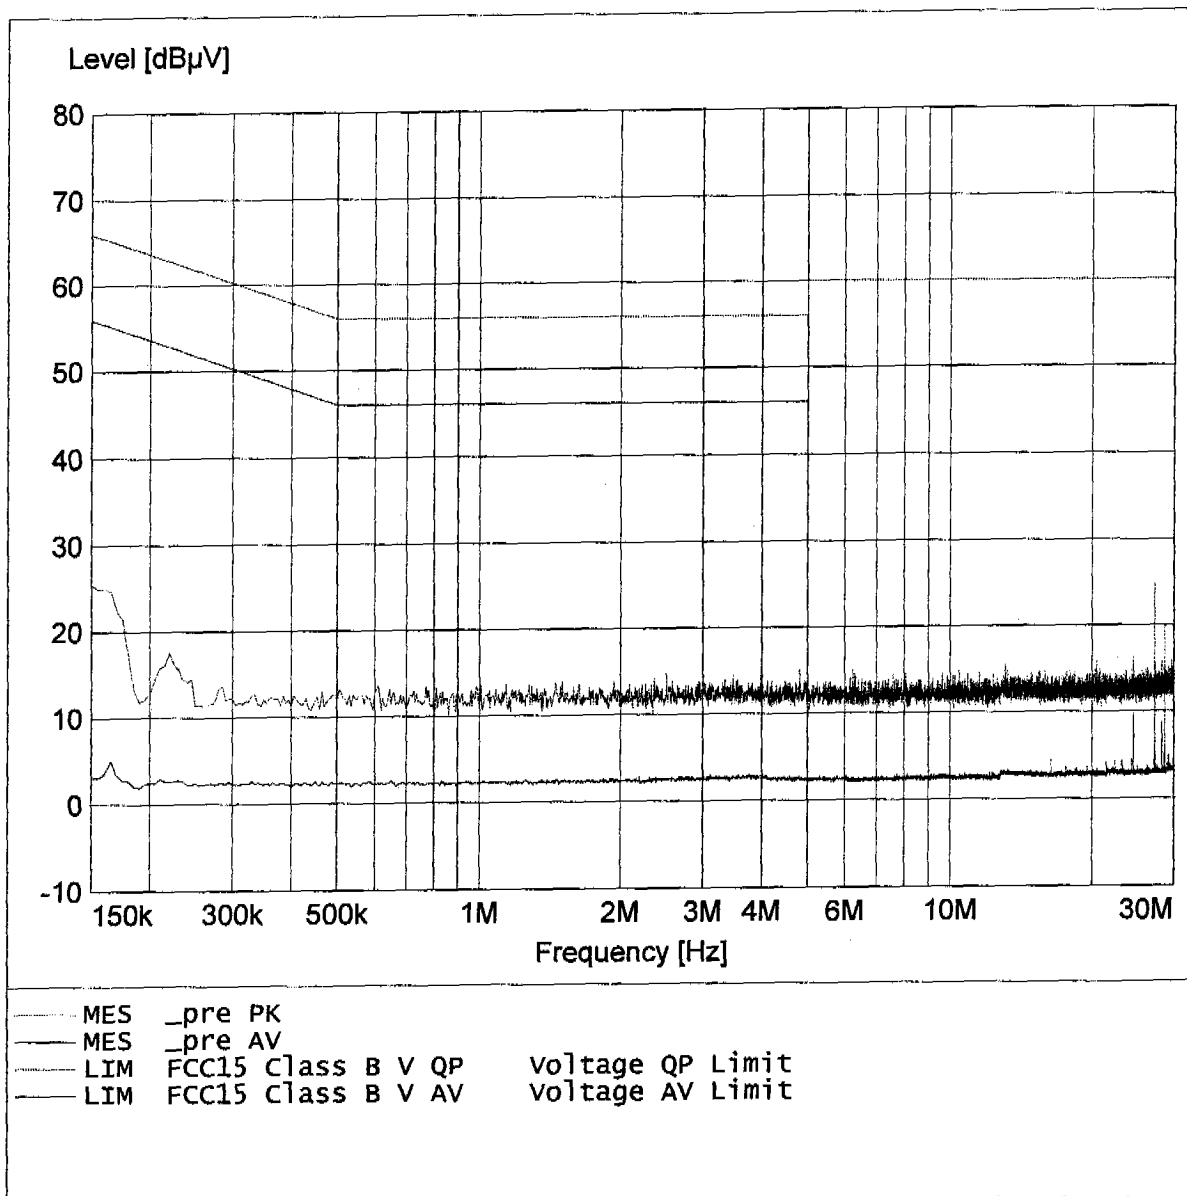

EMI voltage test in the ac-mains according to FCC Part 15

Class B


EUT: 2.4GHz Cordless Phone CH1
Approval Holder: Coby Manufacturing Co.,Ltd.
Operating Condition: Unom: 120VAC (AC/DC adaptor), Tnom: 25°C
Test Site: ETS
Operator: Catey Lee
Test Specification: V-network: ESH3-Z5 N
Comment: model: CT-P8800

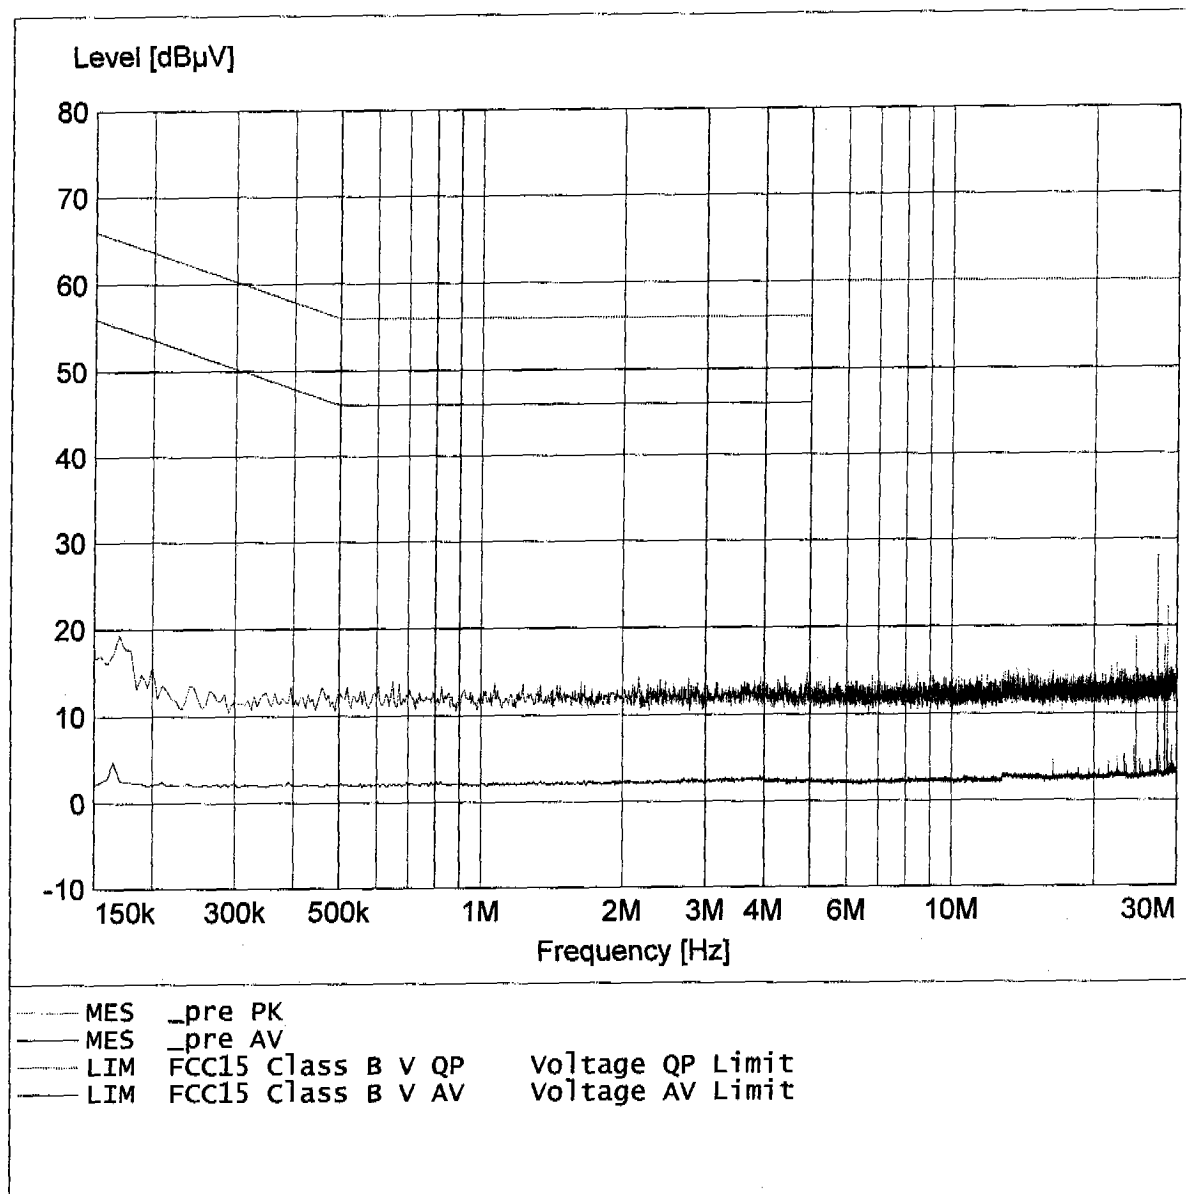

EMI voltage test in the ac-mains according to FCC Part 15

Class B


EUT: 2.4GHz Cordless Phone CH50
Approval Holder: Coby Manufacturing Co.,Ltd.
Operating Condition: Unom: 120VAC (AC/DC adaptor), Tnom: 25°C
Test Site: ETS
Operator: Catey Lee
Test Specification: V-network: ESH3-Z5 L1
Comment: model: CT-P8800

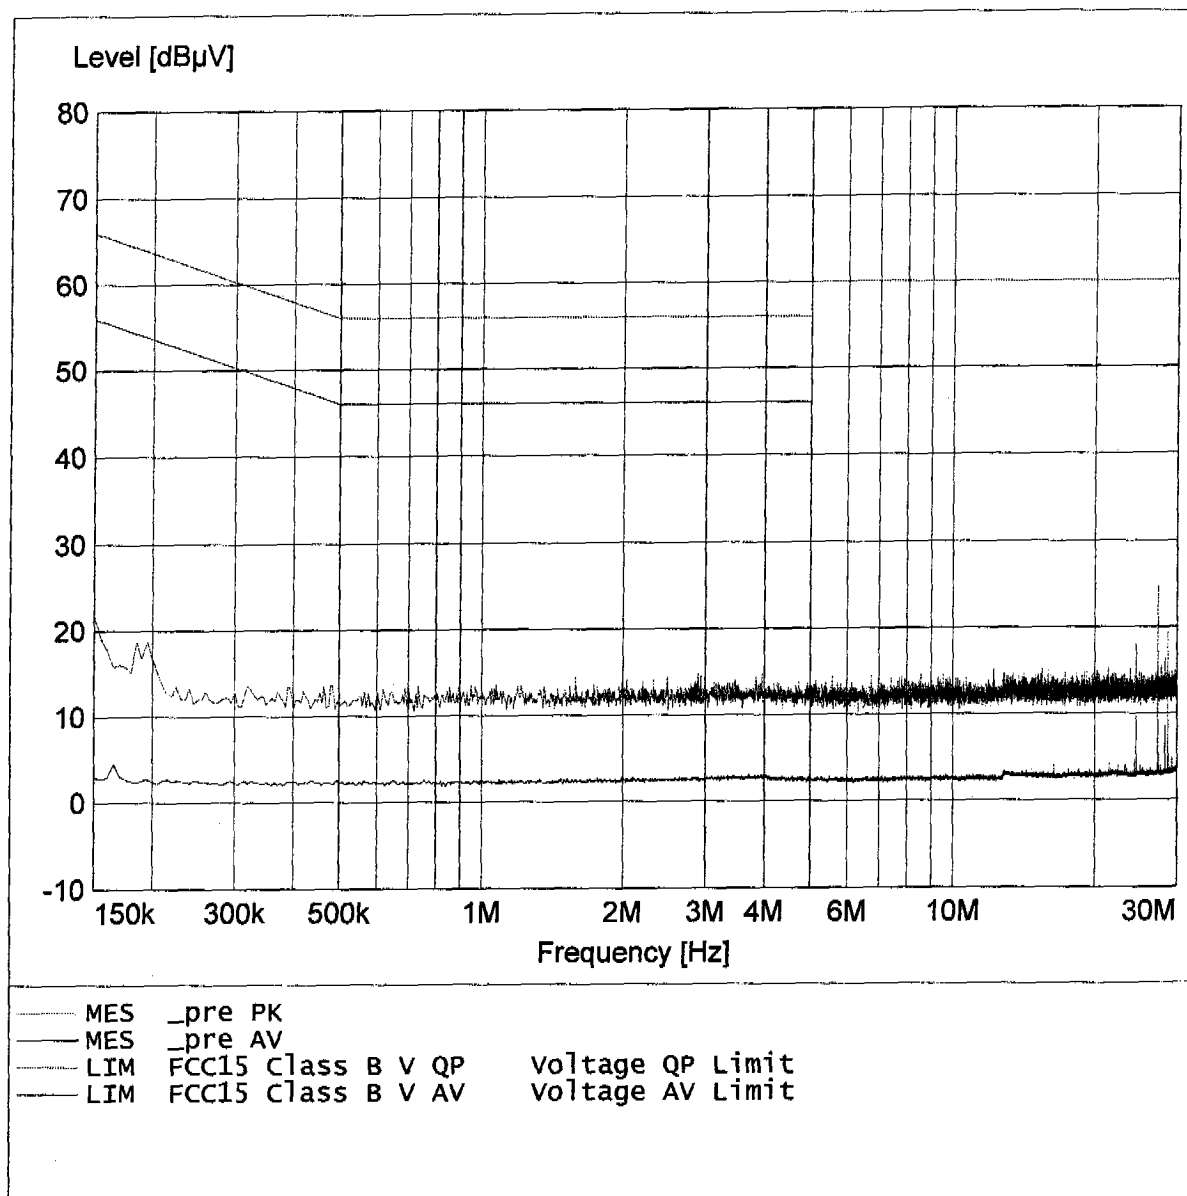

EMI voltage test in the ac-mains according to FCC Part 15

Class B


EUT: 2.4GHz Cordless Phone CH50
Approval Holder: Coby Manufacturing Co.,Ltd.
Operating Condition: Unom: 120VAC (AC/DC adaptor), Tnom: 25°C
Test Site: ETS
Operator: Catey Lee
Test Specification: V-network: ESH3-Z5 N
Comment: model: CT-P8800

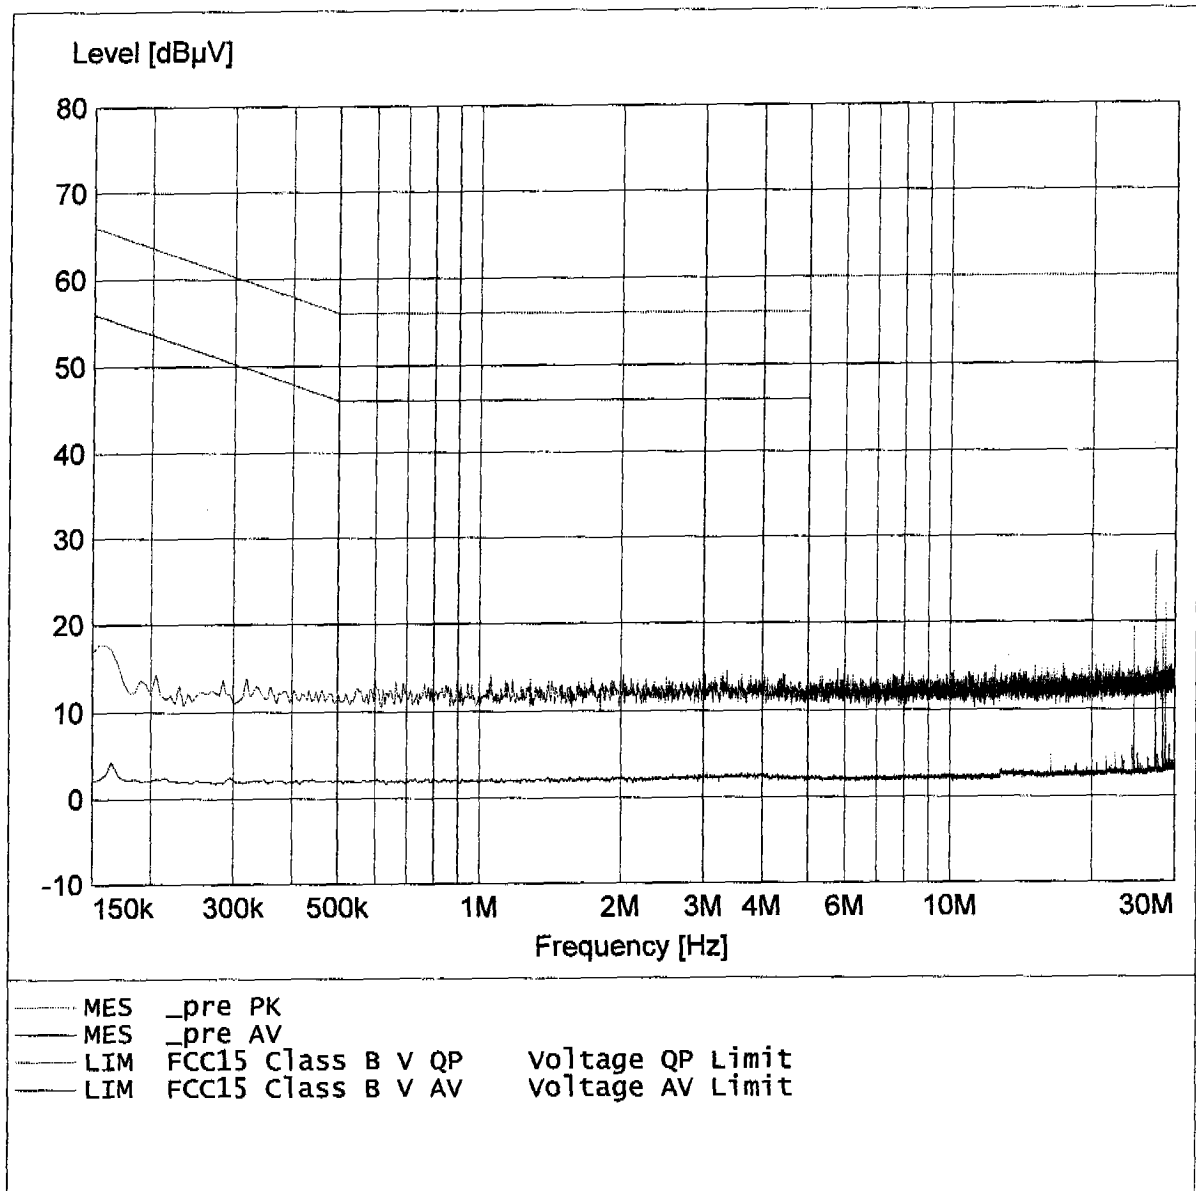

EMI voltage test in the ac-mains according to FCC Part 15

Class B

EUT: 2.4GHz Cordless Phone Charge
Approval Holder: Coby Manufacturing Co.,Ltd.
Operating Condition: Unom: 120VAC (AC/DC adaptor), Tnom: 25°C
Test Site: ETS
Operator: Catey Lee
Test Specification: V-network: ESH3-Z5 L1
Comment: model: CT-P8800

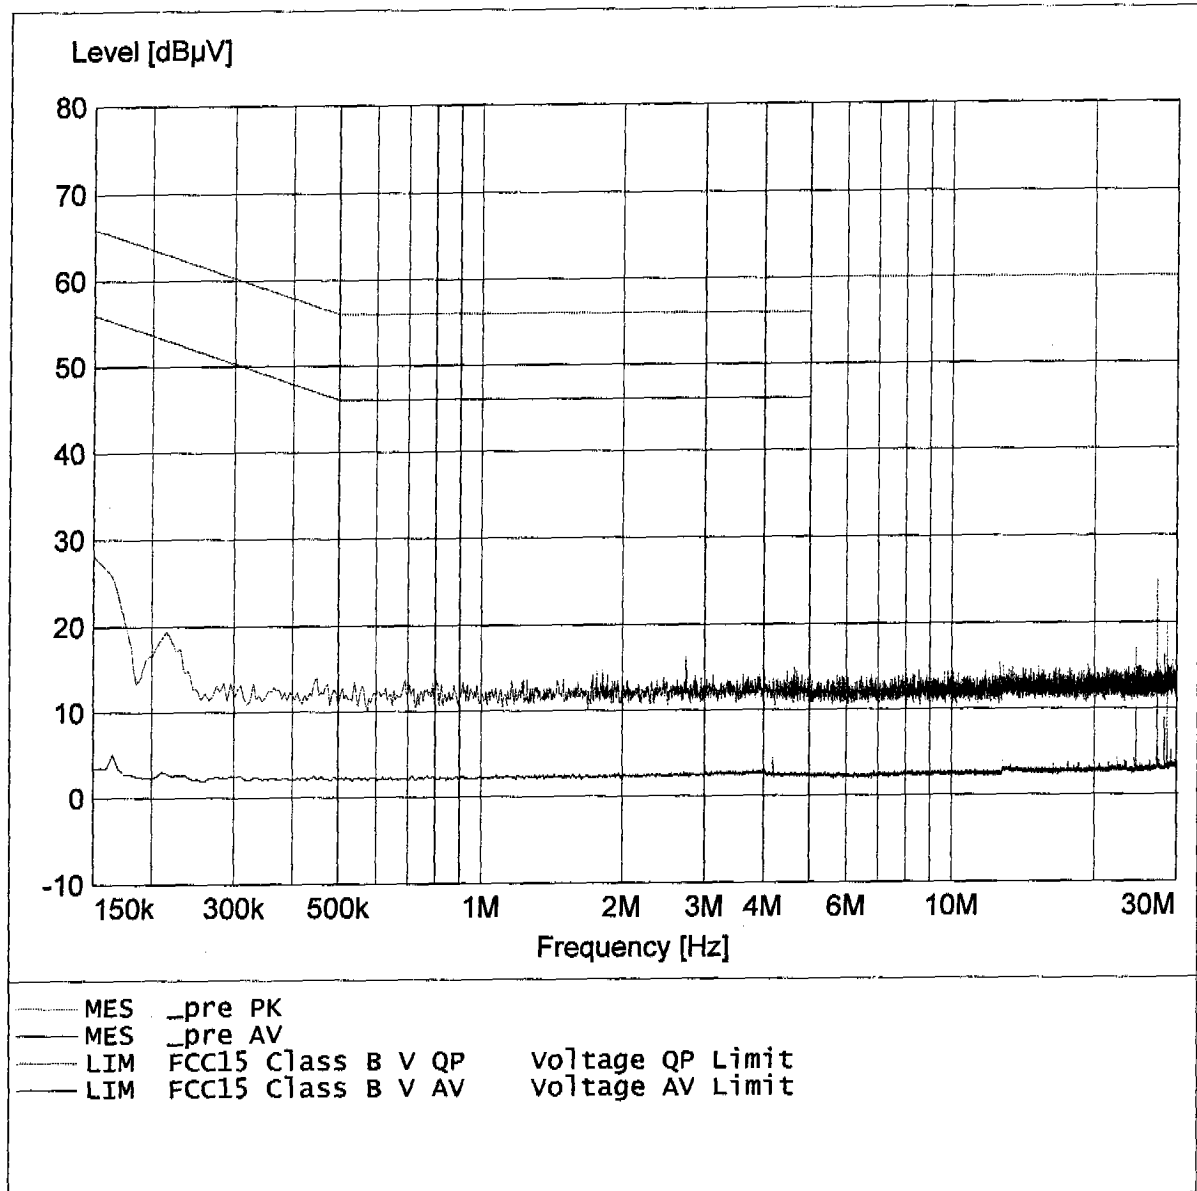

EMI voltage test in the ac-mains according to FCC Part 15

Class B

EUT: 2.4GHz Cordless Phone Charge
Approval Holder: Coby Manufacturing Co.,Ltd.
Operating Condition: Unom: 120VAC (AC/DC adaptor), Tnom: 25°C
Test Site: ETS
Operator: Catey Lee
Test Specification: V-network: ESH3-Z5 N
Comment: model: CT-P8800

