

1 5 FEB 2005

IMPORTANT SAFETY INSTRUCTIONS

When using electrical appliances, basic safety precautions should always be followed, including the following:

READ ALL INSTRUCTIONS BEFORE USING

Lighted Lamp is **HOT**

WARNING — To reduce the risk of **FIRE, ELECTRIC SHOCK, EXPOSURE TO EXCESSIVE UV, RADIATION, OR INJURY TO PERSONS** :

1. Turn off / unplug and allow to cool before replacing lamp.
2. Lamp gets **HOT** quickly! Only contact switch / plug when turning on.
3. Do not touch hot lamp containment barrier .
4. Do not remain in light if skin feels warm .
5. Do not look directly at lighted lamp.
6. Keep lamp away from materials that may burn.
7. Use only with a 28 watt or smaller lamp.
8. Do not operate the portable luminaire with a missing or damaged guard, lamp containment barrier.

SAVE THESE INSTRUCTIONS

Power Outlet Instructions

To reduce the risk of electric shock, this lamp has a grounding type plug that has a third (grounding) pin. This plug will only fit into a grounding type power outlet. If the does not fit into the outlet, contact a qualified electrician to install the proper outlet. Never use with an extension cord unless plug can be fully inserted. Do not alter the plug in any way.

Precautions

1. Do not use with power supply voltage other than 120VAC.
2. Do not use outdoors, or in locations with high humidity, such as bathrooms.
3. Do not install above sources of high heat, such as a stove or heater.
4. Do not touch the lamp while it is lit or immediately after turning the lamp off.

Maintenance

Caution : If any malfunction occurs, do not try to repair to yourself. Return it to in authorized facility, or return it to manufacturer. The appliance has no user serviceable parts.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B ISM equipment, pursuant to Part 18 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

No 4 1 1 0 7
1 5 FEB 2005

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio TV technician for help.

Note: This product may cause interference to radio equipment and should not be installed near maritime safety communications equipment or other critical navigation or communication equipment operating between 0.45-30 MHz.

15 FEB 2005

Assembly

- Attach the spacer by screwing it into the top of the base.
- Connect the lamp/bulb into the lamp socket.
- Pushing the bulb into the lamp socket clamp and then into the clamp on the opposite side.
- Place the lampshade onto the spacer and secure it by screwing on the lampshade cap.

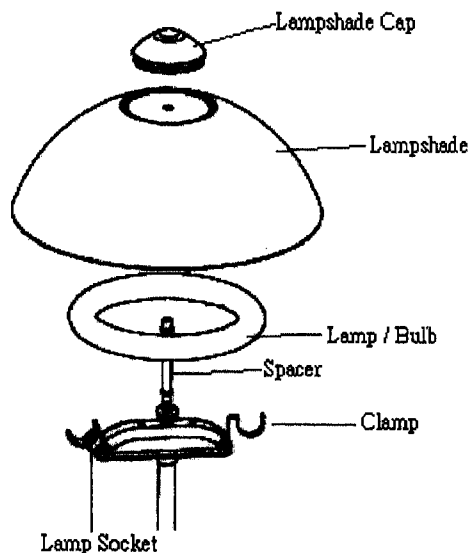


Figure A

Operation

1. Plug the lamp into a 110-120V power outlet.
2. Turn the power control knob slightly clockwise to the maximum brightness setting.
3. To reduce the brightness, turn the power control knob clockwise.

Note : Dimming feature works best after the lamp has warmed up for about one minute.
(See Figure B below)

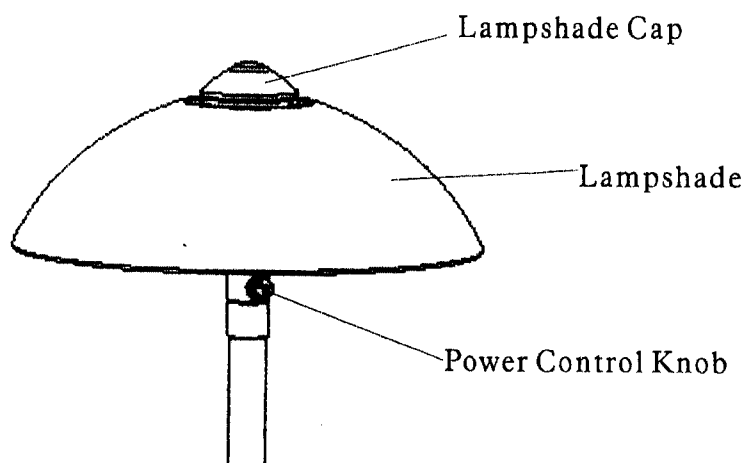


Figure B

1 5 FEB 2005

Lamp Replacement

- Replacement lamp bulbs are available from the sharper Image. Call 1-800-344-4444 and order item number SI929.
 - Lift the lamp / bulb from the clamp opposite the socket and pivot upward. Pull the remaining side out from the socket and clamp.
- Reverse the procedure in install the new lamp/bulb.

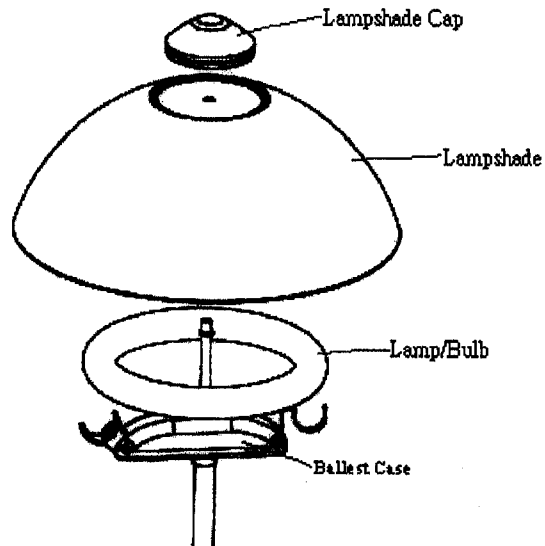


Figure C