

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-8037 Fax : +82-31-631-8039

Test Report for FCC

FCC ID : ROYSA366PBWC

Report Number		ESTF151508-001		
Applicant	Company name	Trinus Systems Inc.		
	Address	8F, RM801, UNITECHVILLE ILSAN-RO 142, ILSANDONG-GU, GOYANG-SI, GYEONGGI-DO, SOUTH KOREA Zip Code : 410-722		
	Telephone	82-31-904-5588		
	Contact person	Ahnse Lee		
Product	Product name	Body Worn Camera System		
	Model No.	ARB-SA366	Manufacturer	Trinus Systems Inc.
	Serial No.	None	Country of origin	KOREA
Test date	2015-07-10 ~ 2015-08-03		Date of issue	7-Aug-15
Testing location	347-69, Jungbu-daero 147beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do 467-811, R. O. Korea			
Standard	FCC PART 15 Subpart C (15.247), ANSI C 63.10(2009), KDB 558074 D01(2015)			
Measurement facility registration number		659627		
Tested by	Senior Engineer K.H. Chung		(Signature)	
Reviewed by	Engineering Manager J.M. Yang		(Signature)	
Abbreviation	OK, Pass = Passed, Fail = Failed, N/A = not applicable			
* Note - This test report is not permitted to copy partly without our permission - This test result is dependent on only equipment to be used - This test result based on a single evaluation of one sample of the above mentioned				



ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel ; +02-31-031-0037 Fax ; +02-31-031-0039

Contents

1. Laboratory Information	3
2. Description of EUT	4
3. Test Standards	5
4. Measurement condition	6
5. DTS bandwidth	10
5.1 Test procedure	10
5.2 Test instruments and measurement setup	10
5.3 Measurement results	10
5.4 Trace data	11
6. Maximum Peak Output Power	13
6.1 Test procedure	13
6.2 Test instruments and measurement setup	13
6.3 Measurement results	13
7. Maximum conducted (average) output power	14
7.1 Test procedure	14
7.2 Test instruments and measurement setup	14
7.3 Measurement results	14
7.4 Trace data(Peak, Average).....	15
8. Maximum power spectral density level in the fundamental emission	18
8.1 Test procedure	18
8.2 Test instruments and measurement setup	18
8.3 Measurement results	18
8.4 Trace data	19
9. Emissions in non-restricted frequency bands	21
9.1 Test procedure	21
9.2 Test instruments and measurement setup	21
9.3 Measurement results	21
9.4 Trace data of band-edge & out of emissioin	22
10. Measurement of radiated emission	26
10.1 Measurement equipment	26
10.2 Environmental conditions	26
10.3 Measurement Instrument setting for Radiated Emission	27
10.4 Test Data	28
11. Measurement of conducted emission	36
11.1 Measurement equipment	36
11.2 Environmental conditions	36
11.3 Test Data	37
12. Photographs of test setup	38
12.1.Setup for Radiated Test : (30 ~ 1 000) MHz	38
12.2.Setup for Radiated Test : Above 1 GHz	39
12.3. Setup for Conducted Test : (0.15 ~ 30) MHz.....	40
12.4. Photographs of EUT	41

Appendix 1. Special diagram

Appendix 2. Antenna Requirement



ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-031-0037 Fax : +82-31-031-0039

1. Laboratory Information

1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report.

ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

1.2 Test Lab.

Corporation Name : ESTECH Co., Ltd.

Head Office : Suite 1015 World Meridian II, 123 Gasan Digital 2-ro, Geumcheon-gu, Seoul 153-759, R. O. Korea

EMC/Telecom/Safety Test Lab : 347-69, Jungbu-daero 147beon-gil, Majang-myeon, Icheon-si,
Gyeonggi-do 467-811, R. O. Korea

1.3 Official Qualification(s)

MSIP : Granted Accreditation from Ministry of Information & Communication for EMC, Safety and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC requirements

FCC : Conformity Assessment Body(CAB) with registration number 659627 under APEC TEL MRA between the RRA and the FCC

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

2. Description of EUT

2.1 Summary of Equipment Under Test

Modulation Type	: 802.11n (OFDM)
Transfer Rate	: MCS(0 ~ 7)
Number of Channel	: 11 ch
PEAK Output Power	: 9.76 dBm
Rating	: DC 3.7 V
Receipt Date	: 25-Jun-15
X-tal list(s) or Frequencies generated	: The highest operating frequency is 2 462 MHz

2.2 General descriptions of EUT

Category	Item	Specification
Camera	Resolution	1280 X 720
	View Angle (Horizontal)	130
	Recording Speed	30fps
	Minimum Illuminance	Color : 1.2lx, BW : 0.9lx
	Night Mode	Yes
General	Optional Camera	Yes
	Robustness	MIL810G
	Dust / Waterproof	IP54
	Dimensions	Controller -> 64.2 X 83.9 X 21mm 2nd Camera -> 22.5Ø X 37.5mm
	Weight	Controller -> 130g (With Battery) 2nd Camera -> 17g
	Storage	32GB
	Operating Temperature	-20 to 50°C
	Storage Temperature	-30 to 60°C
Recording	Video Compression	H.264
	Audio Format	AAC
	Time / Date Stamp	Yes

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-031-0037 Fax : +02-31-031-0039

3. Test Standards

Test Standard : FCC PART 15 Subpart C (15.247)

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

Test Method : ANSI C 63.10 (2009) & KDB558074 D01(2015)

This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.

Summary of Test Results

Applied Standard : 47 CFR Part 15 Subpart C				remark
Standard	Test Type	Result	Remark	Limit
15.207	AC Power Conducted Emission	Pass	Meet the requirement	
15.205 & 15.209	Restricted band / Intentional Radiated Emission	Pass	Meet the requirement	
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement	Min. 500 kHz
	Occupied Bandwidth			
15.247(b)(3)	Maximum Peak/average output power	Pass	Meet the requirement	Max. 30 dBm
15.247(c)	Transmitter Radiated Emission	Pass	Meet the requirement	Table 15.209
15.247(e)	Power Spectral Density	Pass	Meet the requirement	Max. 8 dBm
15.247(d)	Band Edge Measurement	Pass	Meet the requirement	20 dB less

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

4. Measurement Condition

4.1 EUT Operation

a. Channel

Ch.	Frequency	Ch.	Frequency
1	2 412 MHz	9	2 452 MHz
2	2 417 MHz	10	2 457 MHz
3	2 422 MHz	11	2 462 MHz
4	2 427 MHz		
5	2 432 MHz		
6	2 437 MHz		
7	2 442 MHz		
8	2 447 MHz		

b. Measurement Channel : 802.11n : Low(2 412 MHz), Middle(2 437 MHz),High(2 462 MHz)

c. Test Mode : Continuous Output, OFDM

d. Test rate : 65 Mbps




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel ; +02-31-631-0037 Fax ; +02-31-631-0039

4.2 EUT Operation.

- The EUT was in the following operation mode during all testing
 - * Execute a RF test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
 - * Transmit mode were measured each channels(Low,Middle,High)
 - * The EUT was measured up to tenth harmonic or 40 GHz of the highest operating frequency.
 - * To check normal operating used the note pc and spectrum analyzer.

4.3 Configuration and Peripherals

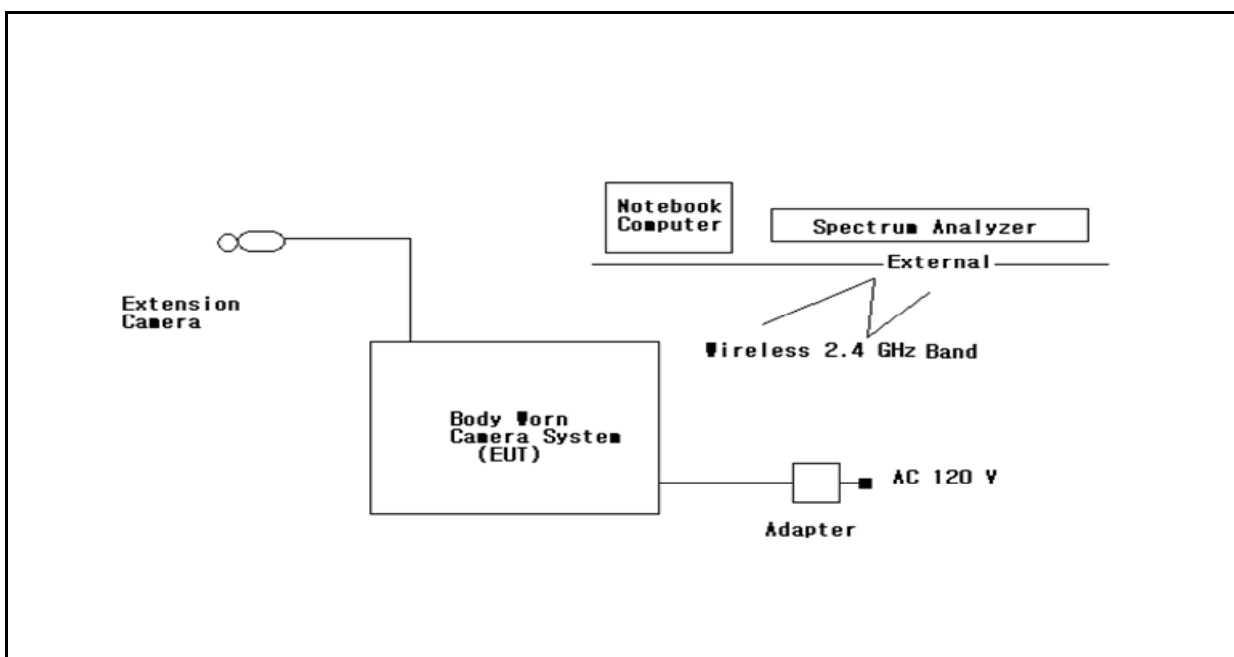

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-031-0037 Fax : +02-31-031-0039

4.4 EUT and Support equipment

Equipment Name	Model Name	S/N	Manufacturer	Remark (FCC ID)
Body Worn Camera System	ARB-SA366	NONE	Trinus Systems Inc.	EUT
Extension Camera(SUB)	NONE	NONE	Trinus Systems Inc.	
Adapter	ETA-U90KWK	RT4D530V/B-E	SAMSUNG	

4.5 Cable Connecting

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
Body Worn Camera System	WIRELESS (2.4 GHz)	Spectrum Analyzer (External)	WIRELESS (2.4 GHz)	-	-	
Body Worn Camera System	WIRELESS (2.4 GHz)	Notebook Computer	WIRELESS (2.4 GHz)	-	-	
Body Worn Camera System	Mini-HDMI	Extension Camera	-	1.0	Shielded	SUB Camera
Body Worn Camera System	5 PIN-USB	Adapter	USB	1.0	Shielded	Charging Mode (Conducted)




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-031-0037 Fax : +02-31-031-0039

4.6 DUTY CYCLE OF TEST SIGNAL

Duty cycle is < 98%, duty factor shall be considered.

duty cycle = $1.928/1.949=0.989$, duty factor = $10 \cdot \log(1/0.989)=0.048$

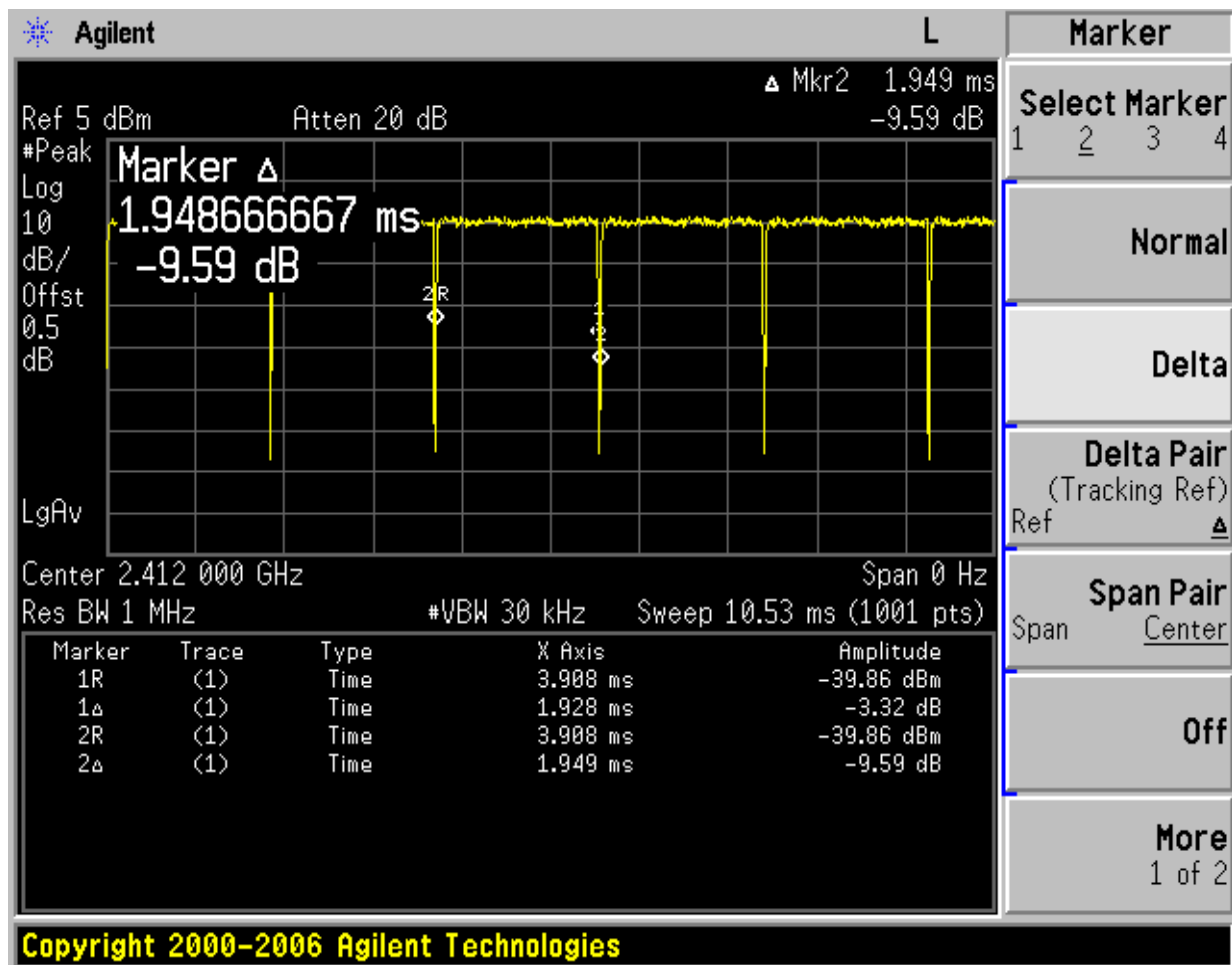

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

5. DTS bandwidth

5.1 Test procedure

558074 D01 DTS Meas Guidance v03r03 8.2 Option 2

5.2 Test instruments and measurement setup

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq$ 3 X RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq$ 6 dB.

Limits : FCC § 15.247(a)(2)

6dB Bandwidth Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E4440A	US42041291	15-Jan-16
RF Cable	Length: 10 cm	–	
–Spectrum Analyzer $\Leftrightarrow$ EUT	Loss: 0.5dB	–	

5.3 Measurement results

EUT	Body Worn Camera System	MODEL	ARB-SA366
MODE	OFDM	ENVIRONMENTAL CONDITION	24.0 °C, 44.0 % R.H.
INPUT POWER	3.7 Vd.c.		


Channel Frequency (MHz)	Occupied Bandwidth(MHz)	Bandwidth at 6dB below(MHz)	Minimum Limit (MHz)	PASS/FAIL
2 412	18.03	16.93	0.5	PASS
2 437	17.60	16.17	0.5	PASS
2 462	17.55	15.32	0.5	PASS




ESTECH CO., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

5.4 Trace data (ch_1)

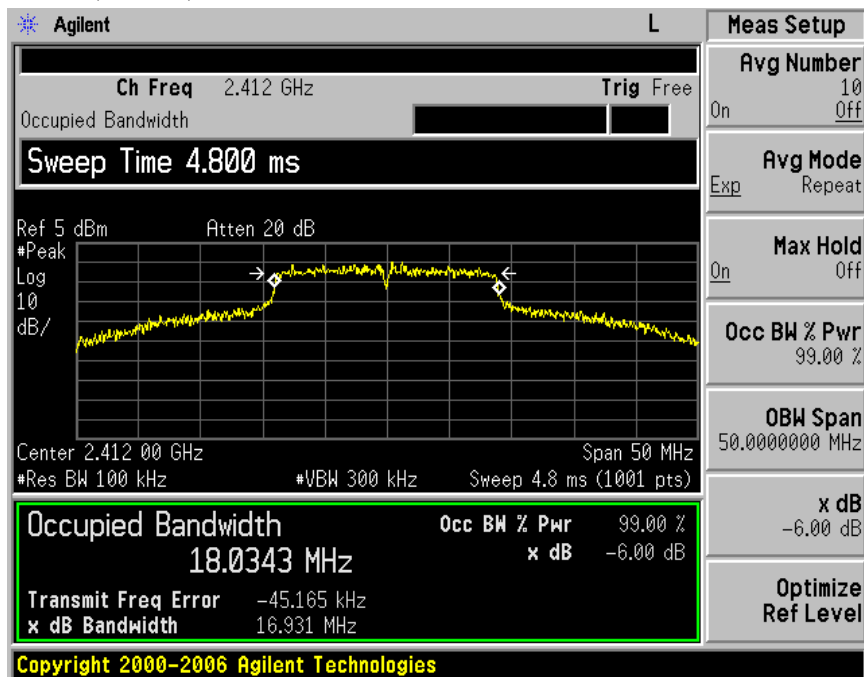

(ch_6)

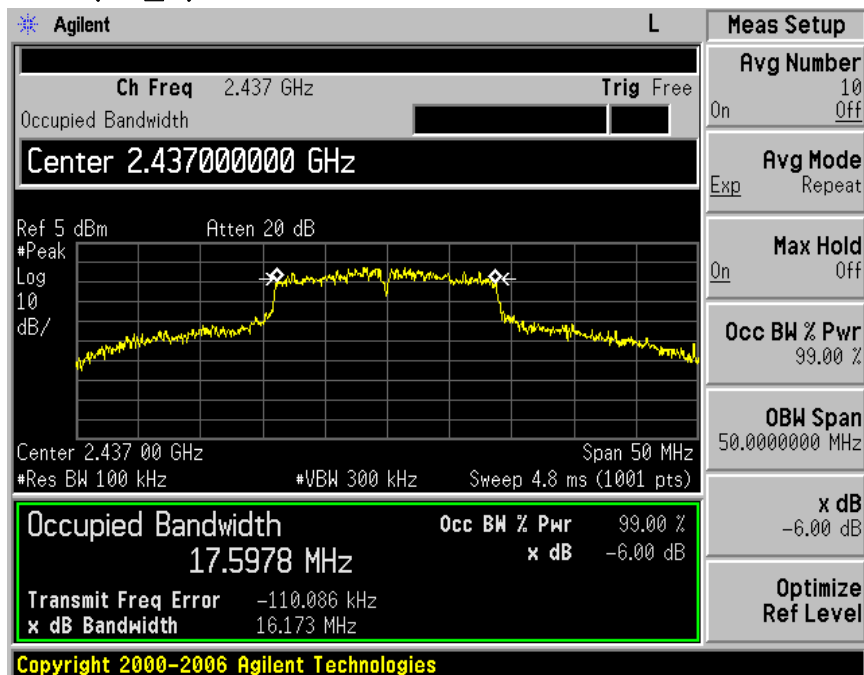



The screenshot displays the Agilent Spectrum Analyzer interface. The main display shows a frequency spectrum with a yellow trace. The center frequency is 2.462 GHz, and the span is 50 MHz. The occupied bandwidth is measured as 17.5514 MHz. The transmit frequency error is -103.341 kHz, and the bandwidth is 15.315 MHz. The occupied bandwidth percentage is 99.00%, and the power is -6.00 dB.

Agilent L Sweep

Ch Freq 2.462 GHz **Trig** Free

Occupied Bandwidth

Sweep Time 4.800 ms

Ref 5 dBm Atten 20 dB

#Peak

Log

10

dB/

Center 2.462 00 GHz Span 50 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (1001 pts)

Occupied Bandwidth	Occ BW % Pwr
17.5514 MHz	99.00 %
	x dB -6.00 dB

Transmit Freq Error -103.341 kHz

x dB Bandwidth 15.315 MHz

Sweep Time 4.800 ms

Auto Man

Sweep

Single Cont

Auto Sweep

Time

Norm Accy

Points

1001

Copyright 2000-2006 Agilent Technologies

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-8037 Fax : +82-31-631-8039

6. Maximum peak conducted output power

6.1 Test procedure

KDB 558074 D01 DTS Meas Guidance V03r03 9.1.1 Integrated band power method

6.2 Test instruments and measurement setup

- Set the RBW = 1 MHz.
- Set VBW $\geq 3 \times$ RBW.
- Set span $\geq 3 \times$ RBW
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Limits : FCC § 15.247

Maximum Peak Output Power Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E4440A	US42041291	15-Jan-16
RF Cable	Length: 10 cm	–	
–Spectrum Analyzer <=> EUT	Loss: 0.5 dB	–	

6.3 Measurement results

EUT	Body Worn Camera System	MODEL	ARB-SA366
MODE	OFDM	ENVIRONMENTAL CONDITION	24.0 °C, 43.0 % R.H.
INPUT POWER	3.7 Vd.c.		

CHANNEL	Channel frequency (MHz)	Conducted Power Output(dBm)			Limit[1W] (dBm)	PASS/FAIL
		Detector	(dBm)	(mW)		
1	2 412	PEAK	9.76	9.46	30.0	PASS
6	2 437	PEAK	9.29	8.49	30.0	PASS
11	2 462	PEAK	8.13	6.50	30.0	PASS

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-8037 Fax : +82-31-631-8039

7. Maximum conducted (average) output power

7.1 Test procedure

KDB 558074 D01 DTS Meas Guidance V03r03 9.2.2.2 Method AVGSA-1 (trace averaging with the EUT transmitting at full power throughout each sweep)

7.2 Test instruments and measurement setup

- Set span to at least 1.5 times the OBW.
- Set RBW = 1–5% of the OBW, not to exceed 1 MHz.
- Set VBW $\geq 3 \times$ RBW.
- Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This gives bin-to-bin spacing $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Maximum Peak Output Power Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E4440A	US42041291	15-Jan-16
RF Cable	Length: 10 cm	–	
–Spectrum Analyzer $\Leftrightarrow$ EUT	Loss: 0.5 dB	–	

7.3 Measurement results


EUT	Body Worn Camera System	MODEL			ARB-SA366	
MODE	OFDM	ENVIRONMENTAL CONDITION			24 °C, 43 % R.H.	
INPUT POWER	3.7Vdc					
CHANNEL	Channel frequency (MHz)	Conducted Power Output(dBm)			Measured + Duty Cycle(dBm)	Measured + Duty Cycle(mW)
		Detector	(dBm)	Duty Cycle		
1	2 412	AVG	–0.42	0.048	–0.37	0.918
6	2 437	AVG	–1.6	0.048	–1.55	0.700
11	2 462	AVG	–3.21	0.048	–3.16	0.483




ESTECH CO., Ltd.

347-89, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

7.4 Trace data (Peak, Average) (ch_1) (Peak)

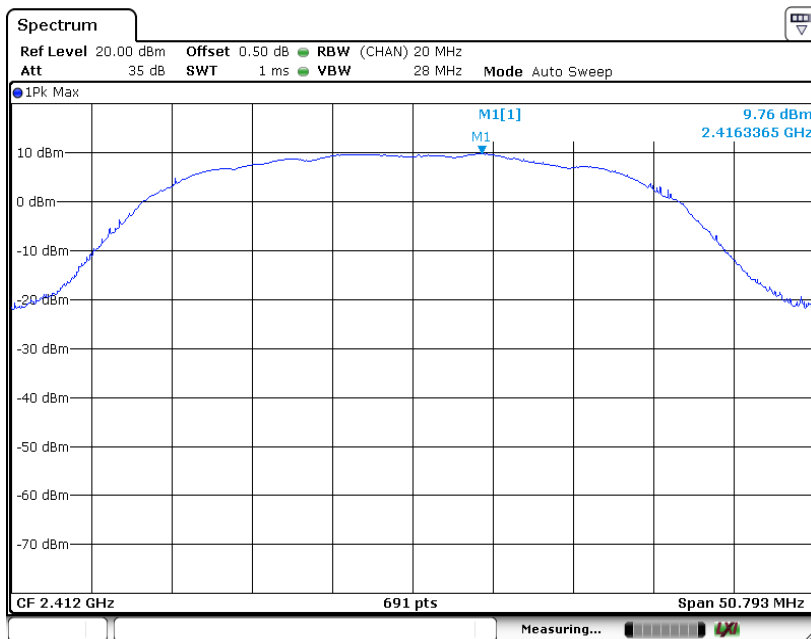

(Avg)

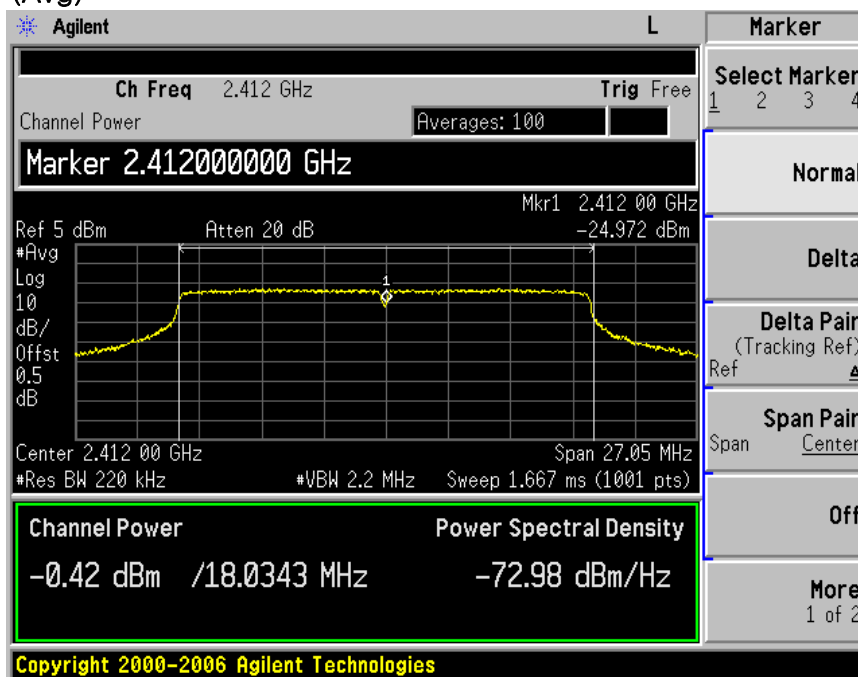




ESTECH CO., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

(ch_6)

(Peak)

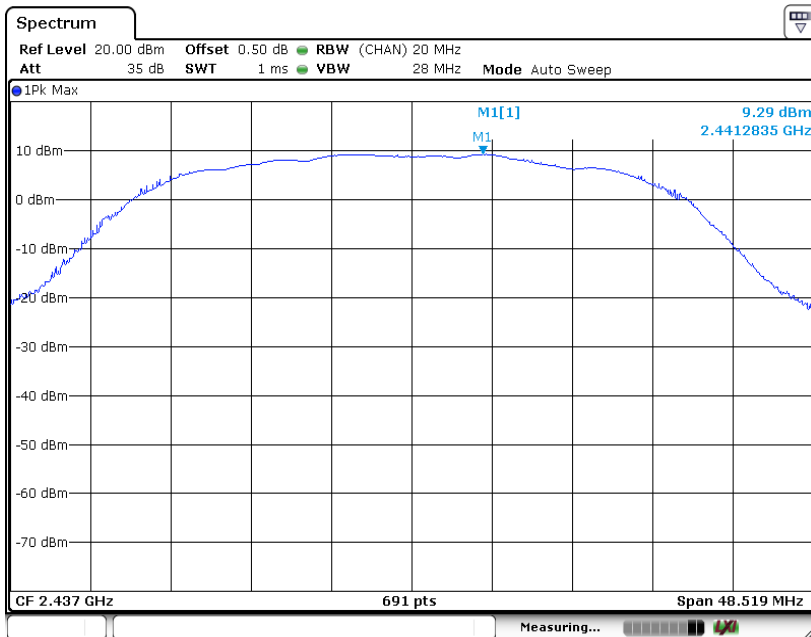

(Avg)

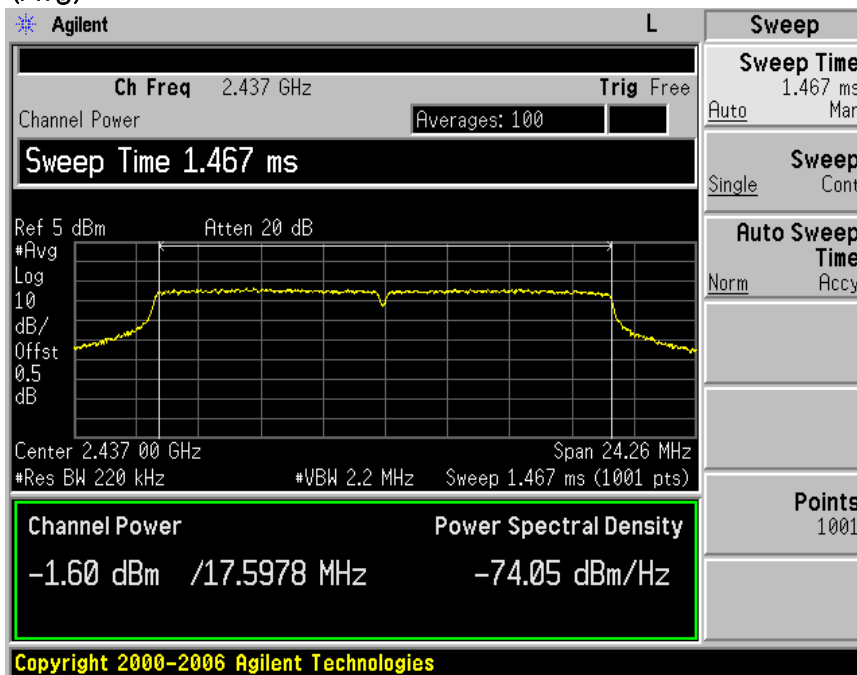




ESTECH CO., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

(ch_11)

(Peak)

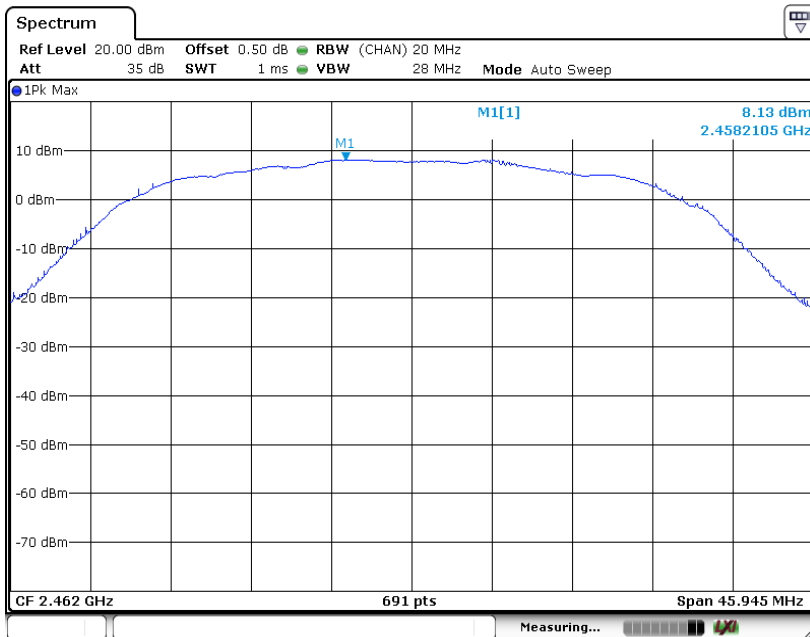

(Avg)

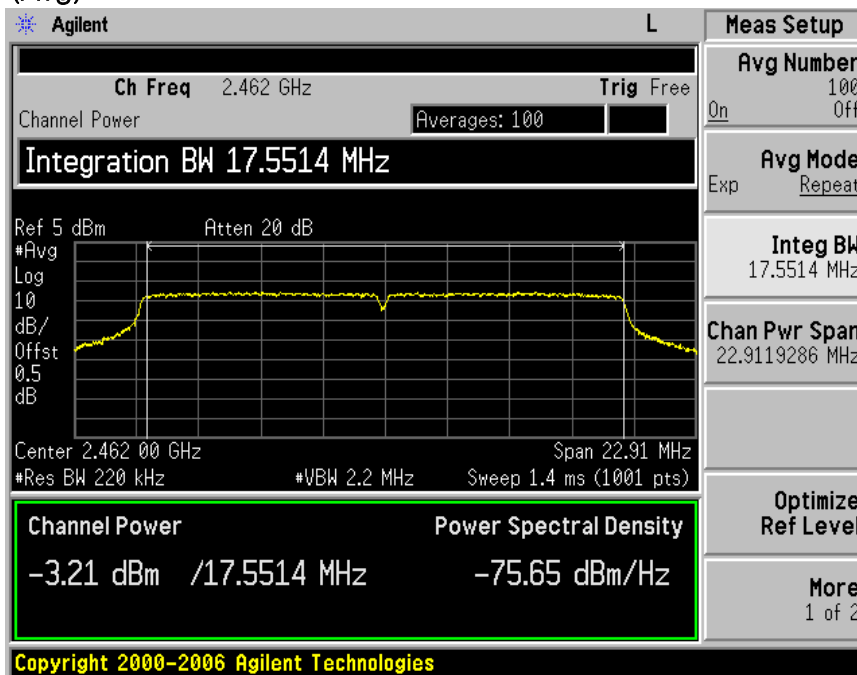

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

8. Maximum power spectral density level in the fundamental emission

8.1 Test procedure

KDB 558074 D01 DTS Meas Guidance V03r03 10.2 Method PKPSD (peak PSD)

8.2 Test instruments and measurement setup

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Limits FCC § 15.247

The peak power density Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E440A	US42041291	15-Jan-16
RF Cable	Length: 10 cm	–	
–Spectrum Analyzer <=> EUT	Loss: 0.5 dB	–	

8.3 Measurement results


EUT	Body Worn Camera System	MODEL	ARB-SA366	
MODE	OFDM	ENVIRONMENTAL CONDITION	23.0 °C, 43.0 % R.H.	
INPUT POWER	3.7 Vd.c.			
CHANNEL	Channel Frequency (MHz)	Measured Power Spectral Density (dBm)	Maximum Permissible Power Density (dBm/3kHz)	Margin
1	2 412	–17.28	8.0	25.28
6	2 437	–20.52	8.0	28.52
11	2 462	–19.34	8.0	27.34




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

8.4 Trace data (ch_1)

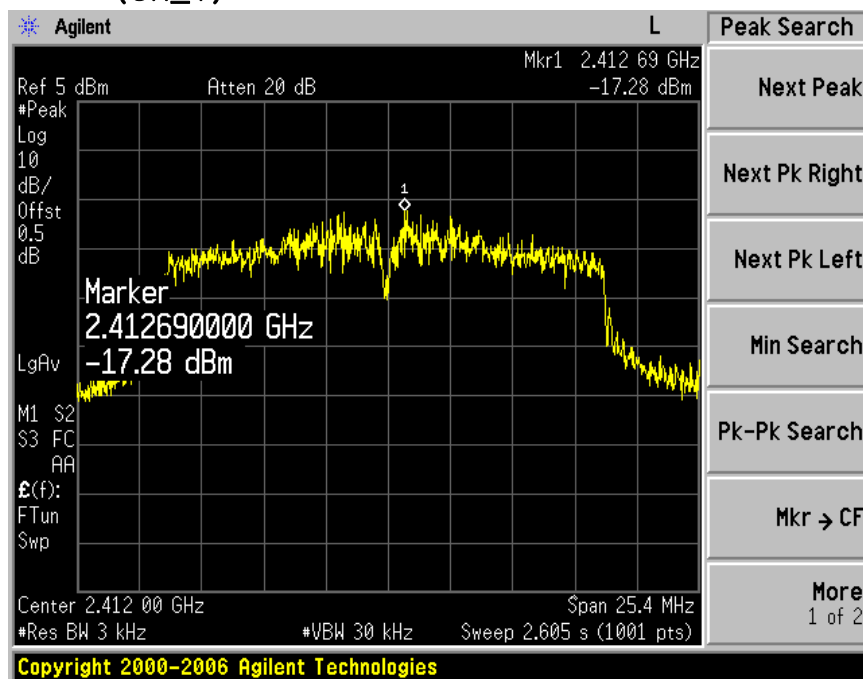

(ch_6)

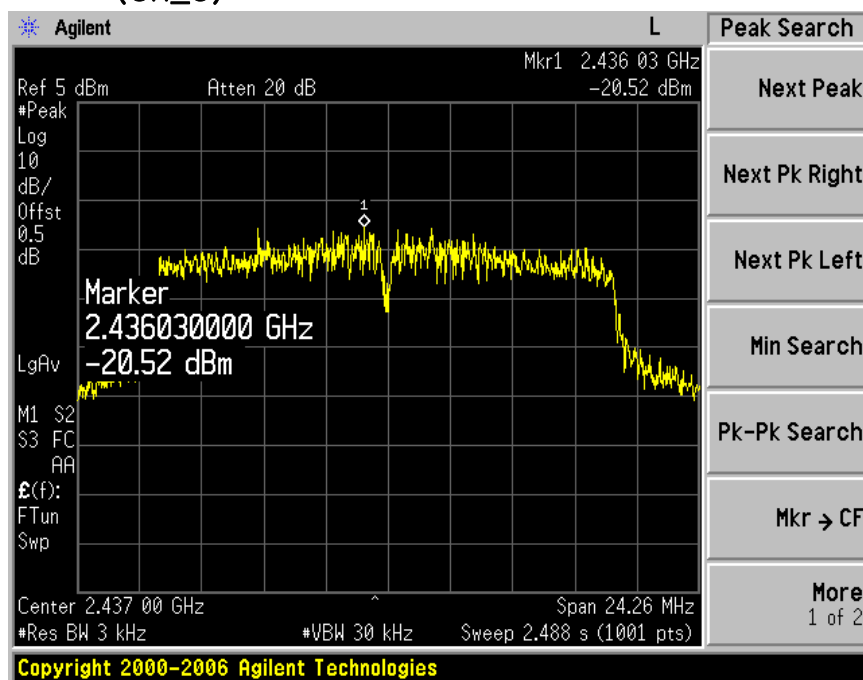




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-031-0037 Fax : +02-31-031-0039

(ch_11)

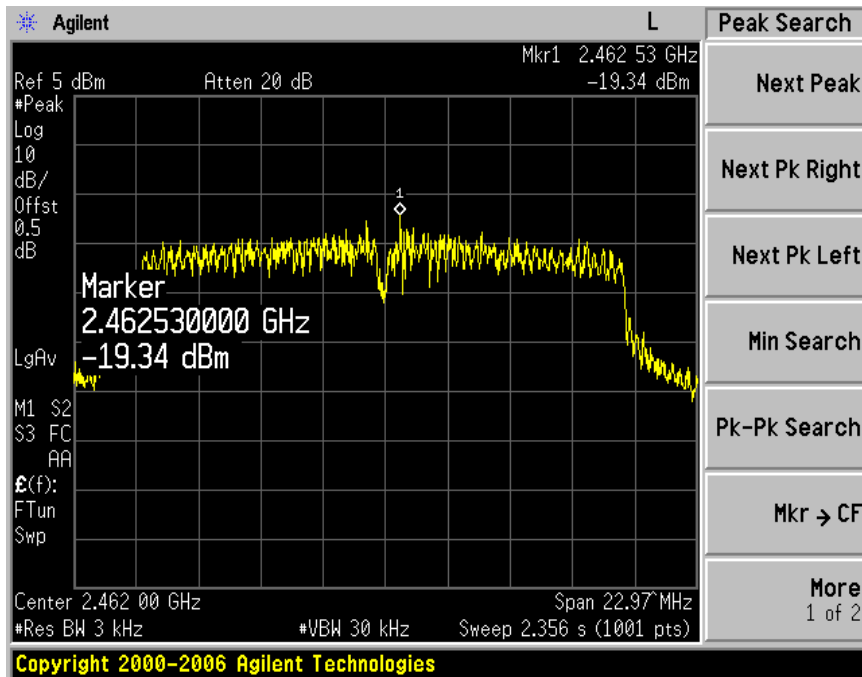

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

9. Emissions in non-restricted frequency bands

9.1 Test procedure

KDB 558074 D01 DTS Meas Guidance V03r03 11.0 Emissions in non-restricted frequency

9.2 Test instruments and measurement setup

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions(15.247(d))

- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 times the DTS bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

Limits FCC § 15.247

Band Edge&Out of Emission Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E4440A	US42041291	15-Jan-16
RF Cable	Length: 6cm		—
—Spectrum Analyzer <=> EUT	Loss: 0.5dB		—

9.3 Measurement results of band-edge & out of emission

EUT	Body Worn Camera System	MODEL	ARB-SA366
MODE	OFDM	ENVIRONMENTAL CONDITION	23.0 °C, 43.0 % R.H.
INPUT POWER	3.7 Vd.c.		



CHANNEL	Channel Frequency (MHz)	limit	PASS/FAIL
1	2 412	20dBc	PASS
11	2 462	20dBc	PASS



ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-6037 Fax : +82-31-631-6039



9.4 Trace data of band-edge & Out of Emission (ch_1)

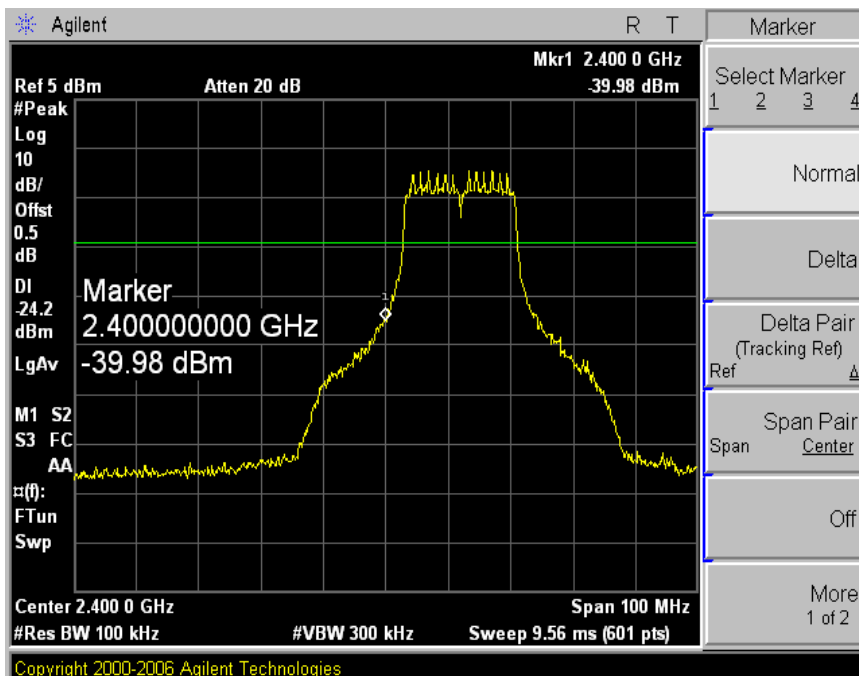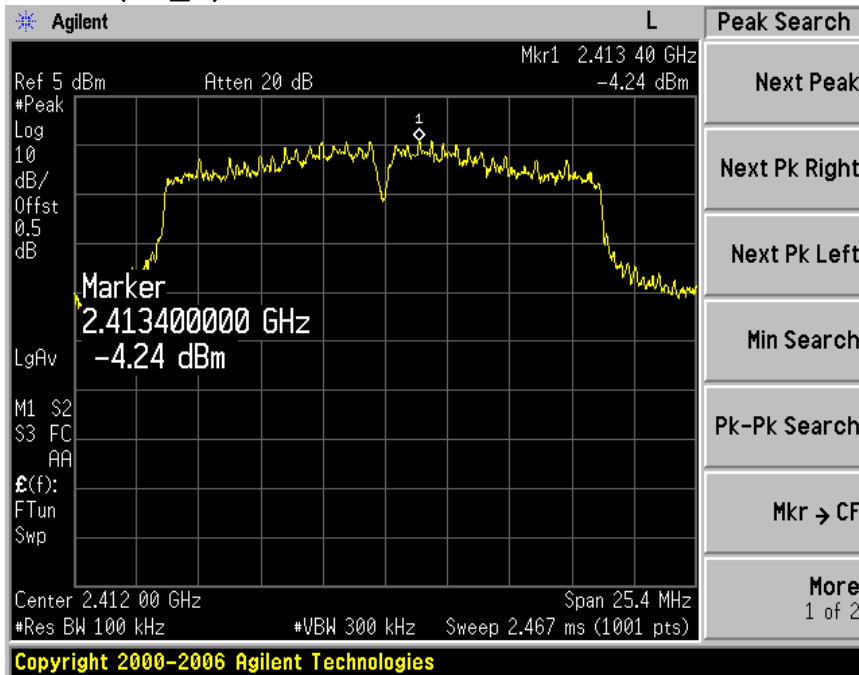



ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-031-0037 Fax : +02-31-031-0039

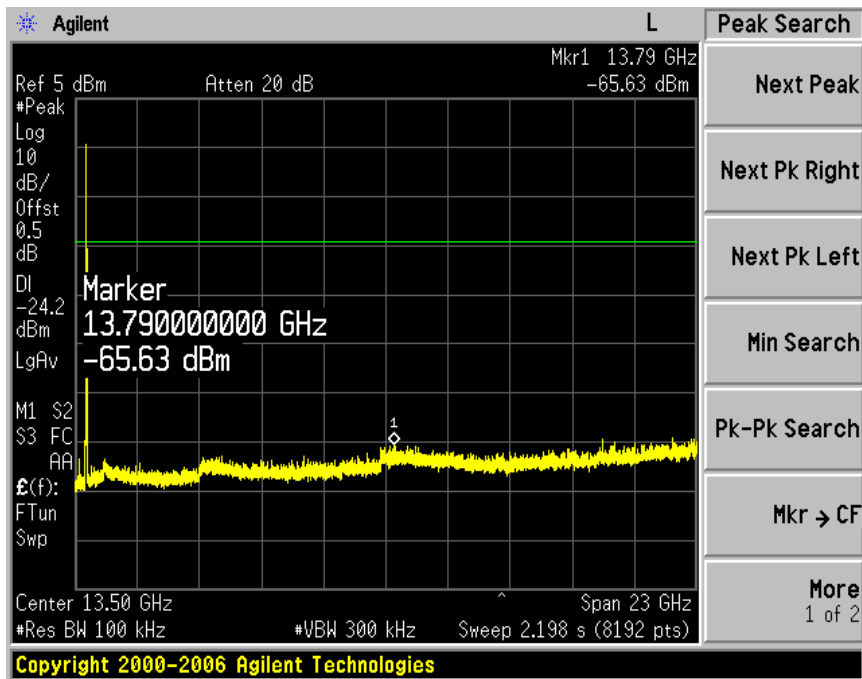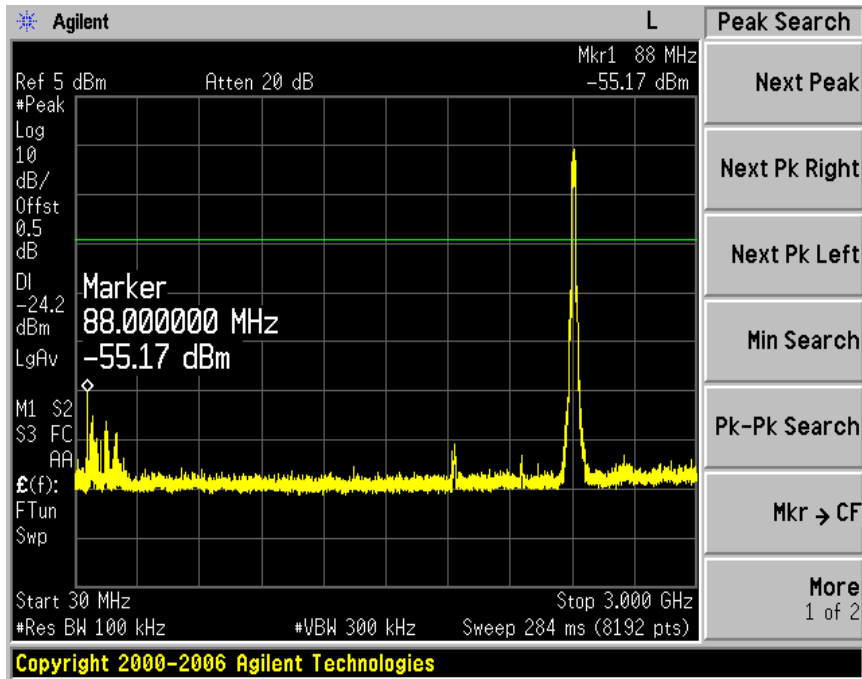




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-031-0037 Fax : +02-31-031-0039



(ch_6)

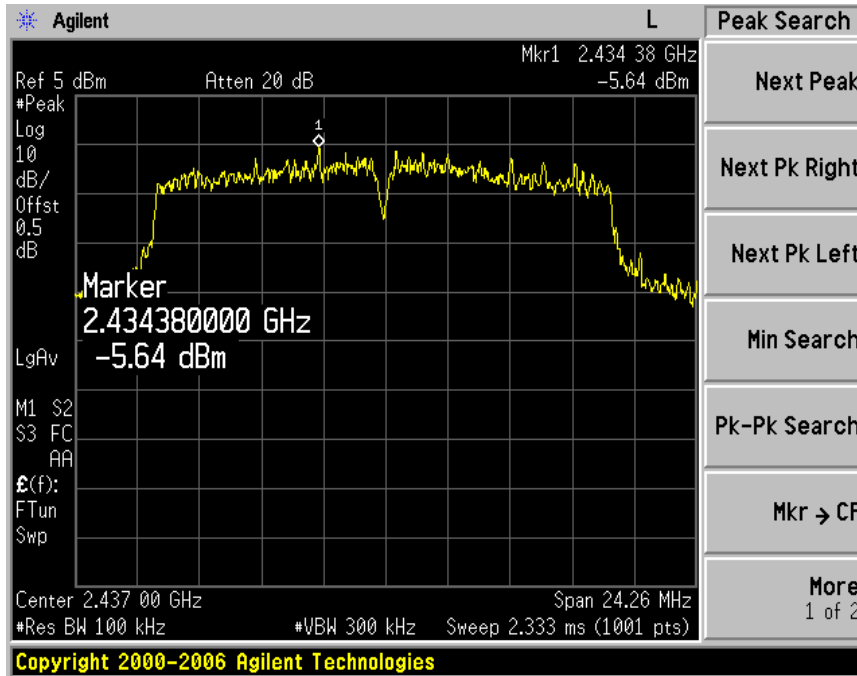



ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

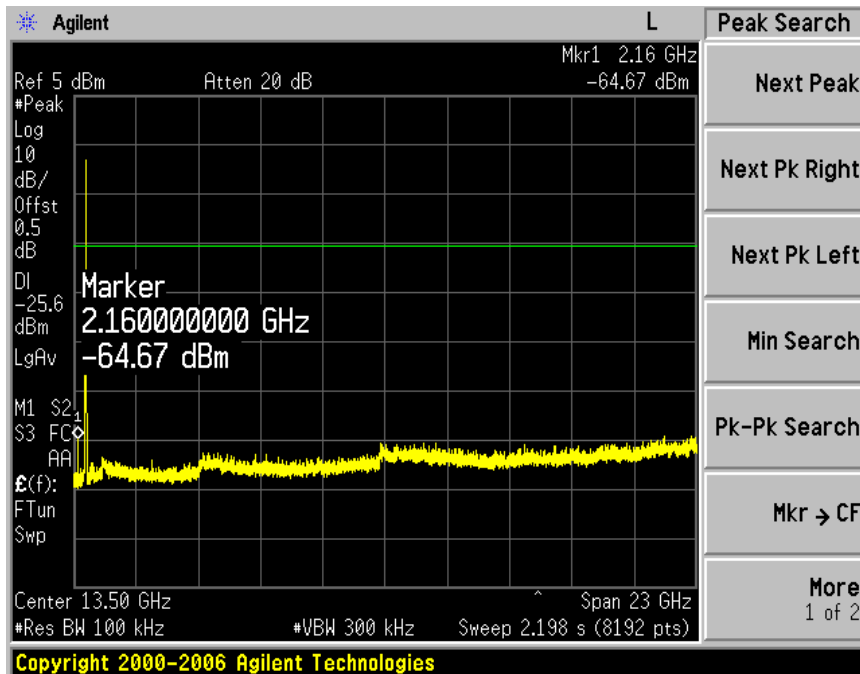
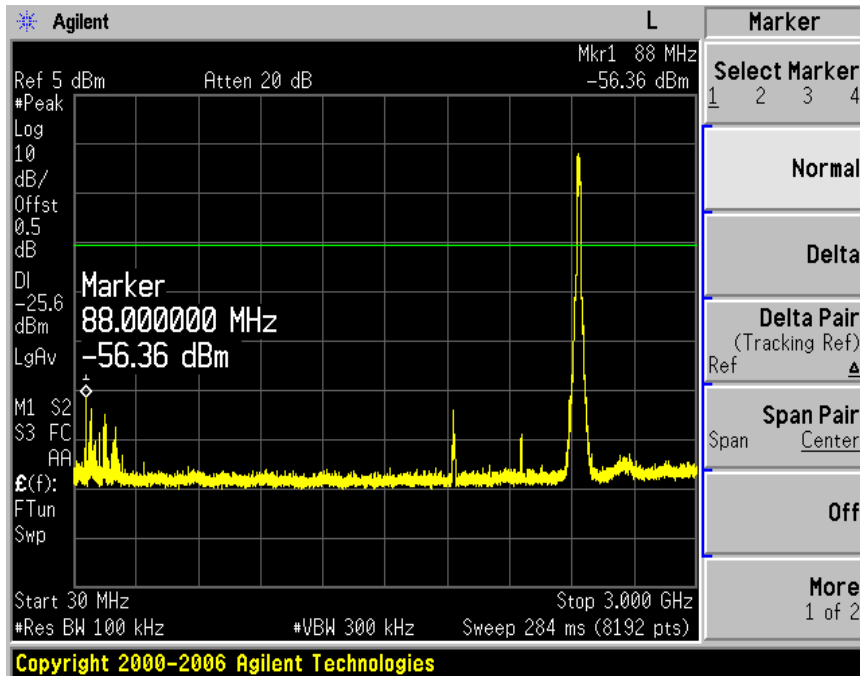




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039



(ch_11)

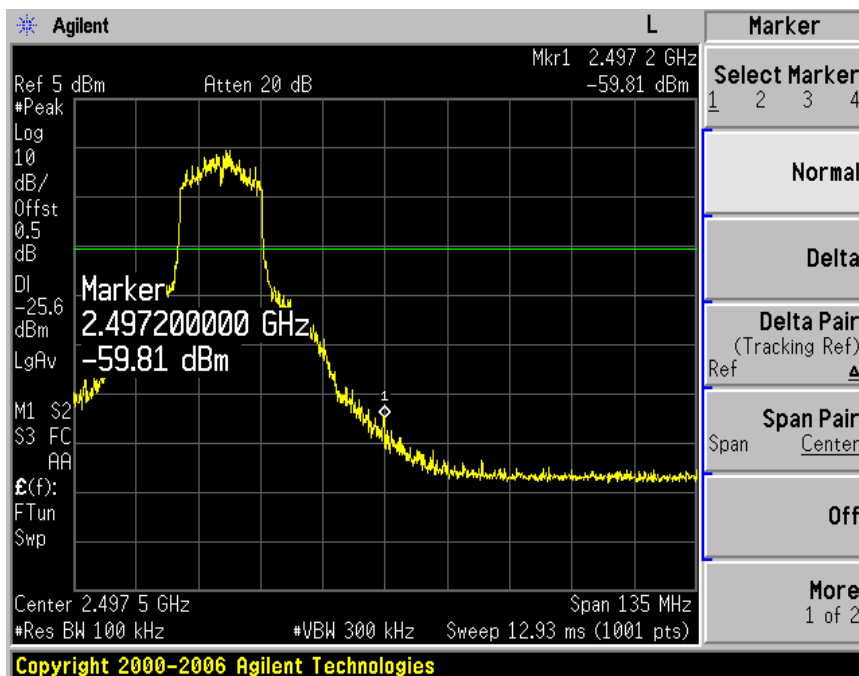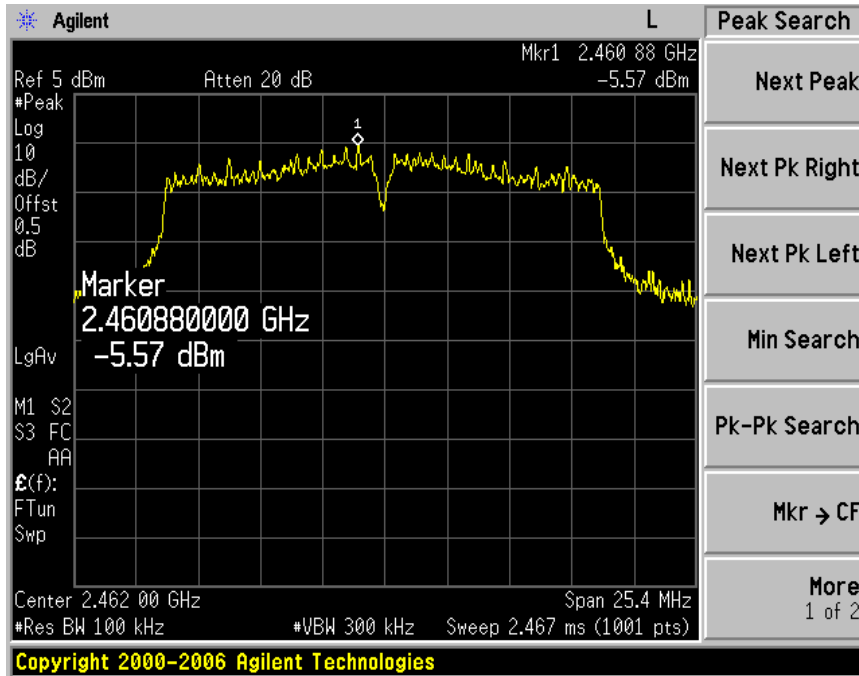



ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

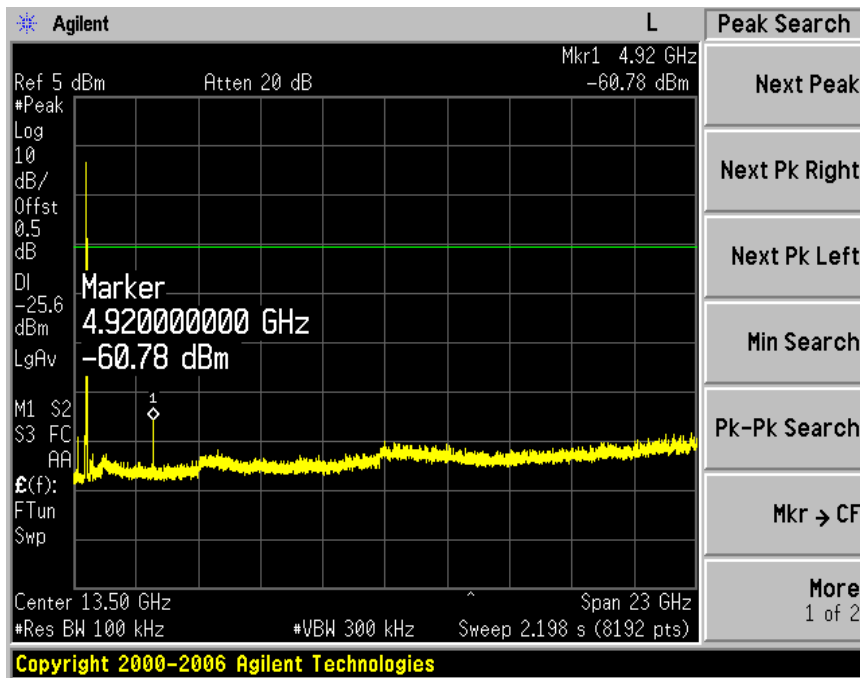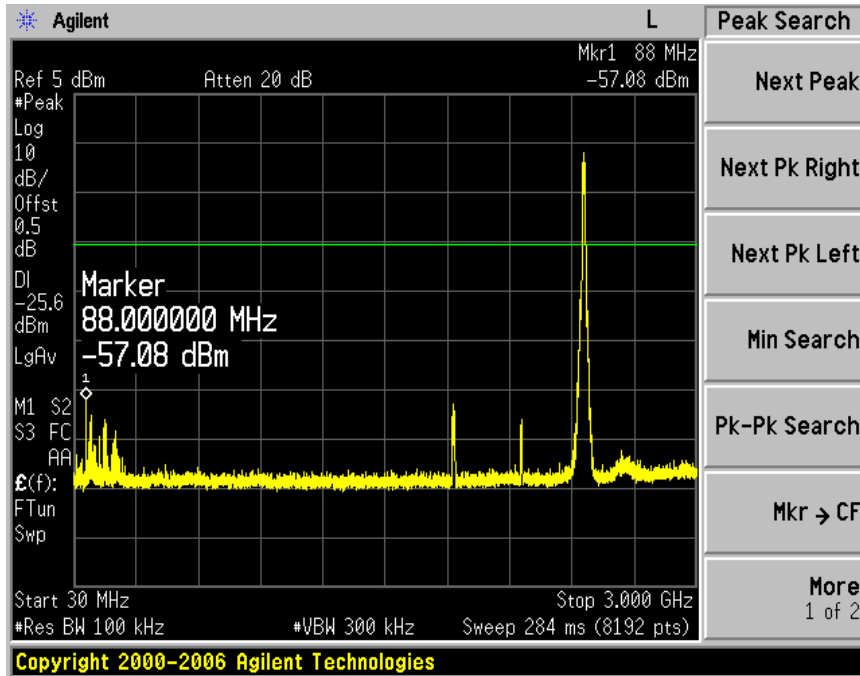

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-8037 Fax : +82-31-631-8039

10. Measurement of radiated disturbance

Above 30 MHz Electric Field strength was measured in accordance with FCC PART 15.205, 15.209 . The test setup was made according to ANSI C 63.10 (2009) & KDB 558074 D01 Semi-anechoic chamber, which allows a 3 m distance measurement. The EUT was placed in the center of styrofoam. turntable. The height of this table was 0.8 m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test setup.

10.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST Receiver	ESC17	ROHDE & SCHWARZ	100916	13-Jan-16
Logbicon Antenna	VULB 9168	SCHWARZBECK	237	4-Mar-16
Turn Table	DT3000-2t	Innco System GmbH	N/A	-
Antenna Mast	MA4000-EP	Innco System GmbH	N/A	-
PREAMPLIFIER	8449B	AGILENT	3008A00595	13-Jan-16
Horn Antenna	BBHA9120D	SCHWARZBECK	352	7-May-16
Test Receiver	ESPI7	ROHDE & SCHWARZ	100185	13-Jan-16
Spectrum Analyzer	R3273	ADVANTEST	110600592	13-Jan-16
Turn Table	DT1500-S	Innco System GmbH	N/A	-
Antenna Mast	MA4000-EP	Innco System GmbH	N/A	-
Pyramidal Horn Antenna	3160-09-01	EST-LINDGREN	102642	14-Nov-15
Antenna Master & Turn table controller	CO2000-P	Innco System GmbH	CO2000/642 /28051111/L	-

10.2 Environmental Condition

Below 1 GHz -Test Place : 10 m Semi-anechoic chamber

802.11n MODE(6 CH)

Temperature (°C) : 20.9 °C

Humidity (% R.H.) : 54.8 % R.H.

Above 1 GHz-Test Place : 3 m Semi-anechoic chamber

802.11n MODE(1/6/11 CH)

Temperature (°C) : (20.4 ~ 20.9) °C

Humidity (% R.H.) : (54.7 ~ 55.5) % R.H.

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

10.3 Measurement Instrument setting for Radiated Emission

10.3.1 Frequency range below 1 GHz

Detector : Quasi-Peak

10.3.2 Frequency range above 1 GHz

Peak Power Measurement Procedure (KDB 558074 section 12.2.4)

- a. RBW : 1 MHz , VBW : 3 MHz
- b. Trace mode = max hold
- c. Detector : Peak
- d. Sweep time = auto

Average Power Measurement Procedures (KDB 558074 section 12.2.5.2)

- a. Set analyzer center frequency to the frequency associated with the emission
- b. RBW : 1 MHz , VBW : 3 MHz
- c. Detector : RMS
- d. Sweep time = auto

Note

Band	Duty cycle(%)	Ton (ms)	Ton + Toff (ms)	DCF=10*log(1/Duty) (dB)
802.11n	98.9	1.928	1.949	0.05

* This was not applied of duty cycle factor for average value because of measured with the EUT transmitting continuously more than 98 % duty cycle at its maximum power control level.

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

10.4 Test Data

Test Date : 10-Jul-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
102.10	16.23	H	3.5	8.72	1.75	43.50	26.70	16.80
199.70	26.46	H	2.8	9.19	2.42	43.50	38.07	5.43
215.60	19.21	H	2.9	9.95	2.51	43.50	31.67	11.83
468.00	9.72	V	1.8	17.32	3.70	46.00	30.73	15.27
599.00	18.81	V	2.0	20.00	4.18	46.00	42.99	3.01
838.70	8.35	H	1.4	23.26	4.99	46.00	36.60	9.40
Remark	H : Horizontal, V : Vertical TEST MODE : 802.11n (CH : 6 - 2 437 MHz) *Checked in all 3 axis and the maximum measured data were reported.(Worst data is Z axis of position) *CL = Cable Loss(In case of below 1 000 MHz) *Result Value = Reading + Ant Factor + Cable loss *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1 GHz.							

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

10.4-1 Test Data

Test Date : 31-Jul-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction(dB)	Result Value		
				Ant Factor (dB)	AMP & Cable (dB)		Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
PEAK(RBW: 1 MHz VBW: 3 MHz)									
2390.00	50.09	H	1.0	27.27	-28.24	0.00	74.00	49.12	24.88
2390.00	51.31	V	1.0	27.27	-28.24	0.00	74.00	50.34	23.66
4826.20	45.61	H	1.0	31.40	-24.14	0.00	74.00	52.87	21.13
4826.20	46.22	V	1.0	31.40	-24.14	0.00	74.00	53.48	20.52
AV(RBW: 1 MHz VBW: 3 MHz)									
2390.00	37.48	H	1.0	27.27	-28.24	0.00	54.00	36.51	17.49
2390.00	38.77	V	1.0	27.27	-28.24	0.00	54.00	37.80	16.20
4826.20	33.12	H	1.0	31.40	-24.14	0.00	54.00	40.38	13.62
4826.20	34.65	V	1.0	31.40	-24.14	0.00	54.00	41.91	12.09
Remark	H : Horizontal, V : Vertical TEST MODE : CH : 1 – 2 412 MHz(802.11n)								
	*The TX signal wasn't detected from 3th harmonics.								
	*Checked in all 3 axis and the maximum measured data were reported.(Worst data is Z axis of position)								
	*Total = Reading Value + Antenna Factor + Cable Loss – Amp Gain + Duty Cycle Correction								

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

10.4-2 Test Data

Test Date : 31-Jul-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction(dB)	Result Value		
				Ant Factor (dB)	AMP & Cable (dB)		Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
PEAK(RBW: 1 MHz VBW: 3 MHz)									
2389.00	50.82	H	1.0	27.27	-28.24	0.00	74.00	49.85	24.15
2389.00	51.22	V	1.0	27.27	-28.24	0.00	74.00	50.25	23.75
4875.10	46.11	H	1.0	31.50	-23.99	0.00	74.00	53.62	20.38
4875.10	47.31	V	1.0	31.50	-23.99	0.00	74.00	54.82	19.18
AV(RBW: 1 MHz VBW: 3 MHz)									
2389.00	37.42	H	1.0	27.27	-28.24	0.00	54.00	36.45	17.55
2389.00	38.85	V	1.0	27.27	-28.24	0.00	54.00	37.88	16.12
4875.10	33.65	H	1.0	31.50	-23.99	0.00	54.00	41.16	12.84
4875.10	34.01	V	1.0	31.50	-23.99	0.00	54.00	41.52	12.48
Remark	H : Horizontal, V : Vertical TEST MODE : CH : 6 – 2 437 MHz(802.11n)								
	*The TX signal wasn't detected from 3th harmonics.								
	*Checked in all 3 axis and the maximum measured data were reported.(Worst data is Z axis of position)								
	*Total = Reading Value + Antenna Factor + Cable Loss – Amp Gain + Duty Cycle Correction								

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

10.4-3 Test Data

Test Date : 31-Jul-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction(dB)	Result Value		
				Ant Factor (dB)	AMP & Cable (dB)		Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
PEAK(RBW: 1 MHz VBW: 3 MHz)									
2483.60	48.58	H	1.0	27.55	-28.11	0.00	74.00	48.02	25.98
2483.60	47.59	V	1.0	27.55	-28.11	0.00	74.00	47.03	26.97
4926.20	46.88	H	1.0	31.61	-23.90	0.00	74.00	54.60	19.40
4926.20	47.95	V	1.0	31.61	-23.90	0.00	74.00	55.67	18.33
AV(RBW: 1 MHz VBW: 3 MHz)									
2483.60	39.60	H	1.0	27.55	-28.11	0.00	54.00	39.04	14.96
2483.60	38.09	V	1.0	27.55	-28.11	0.00	54.00	37.53	16.47
4926.20	32.33	H	1.0	31.61	-23.90	0.00	54.00	40.05	13.95
4926.20	33.92	V	1.0	31.61	-23.90	0.00	54.00	41.64	12.36
Remark	H : Horizontal, V : Vertical TEST MODE : CH : 11 - 2 462 MHz(802.11n)								
	*The TX signal wasn't detected from 3th harmonics.								
	*Checked in all 3 axis and the maximum measured data were reported.(Worst data is Z axis of position)								
	*Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Correction								



ESTECH CO., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

10.4-4 Restricted Band Edges

Band Edges(CH Low)

Detector mode:Peak


Polarity:Horizontal

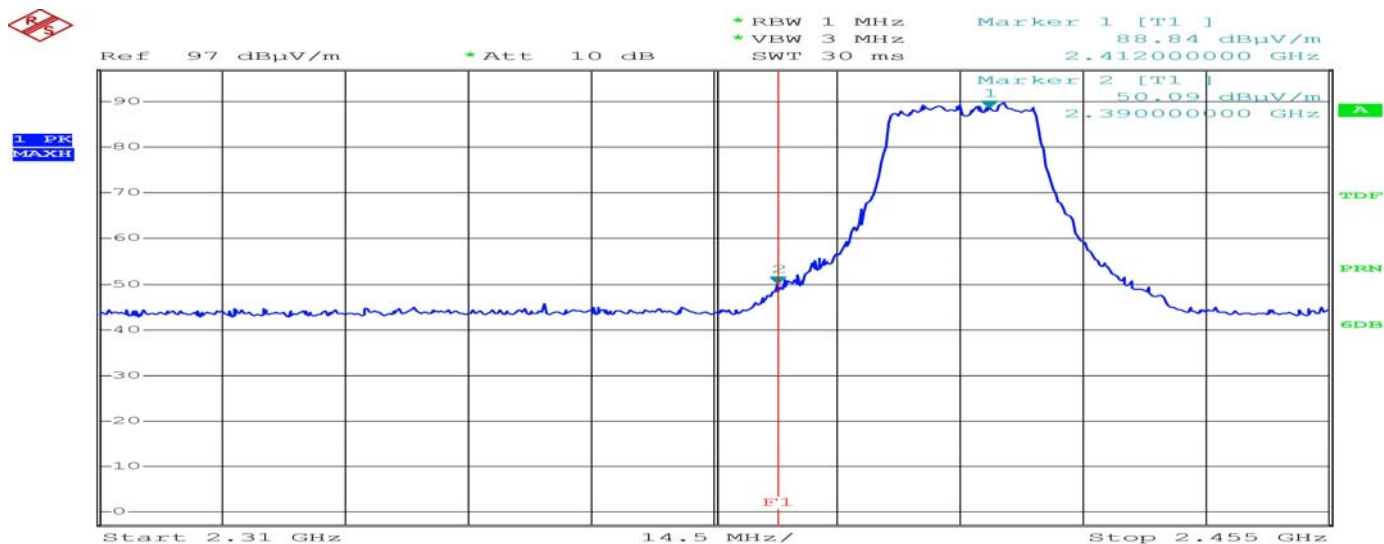

Comment: 15-01302_HOR(1 CH_PK)
Date: 31.JUL.2015 12:34:38

Detector mode:Average

Polarity:Horizontal

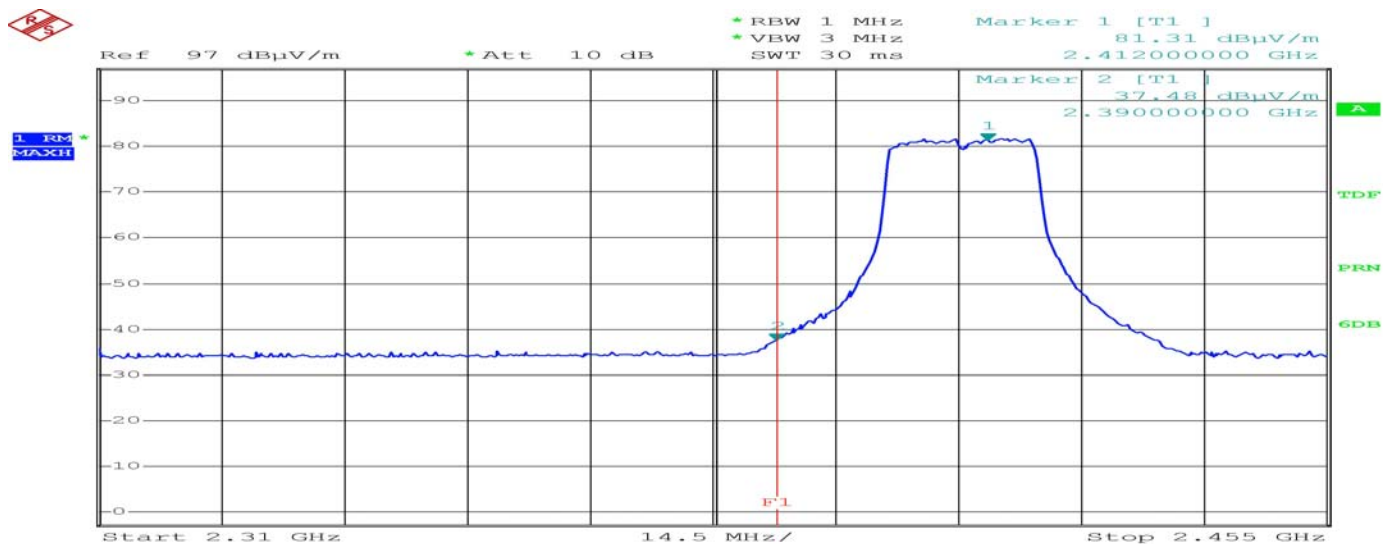

Comment: 15-01302_HOR(1 CH_RMS)
Date: 31.JUL.2015 12:32:19




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

Band Edges(CH Low)

Detector mode:Peak


Polarity:Vertical

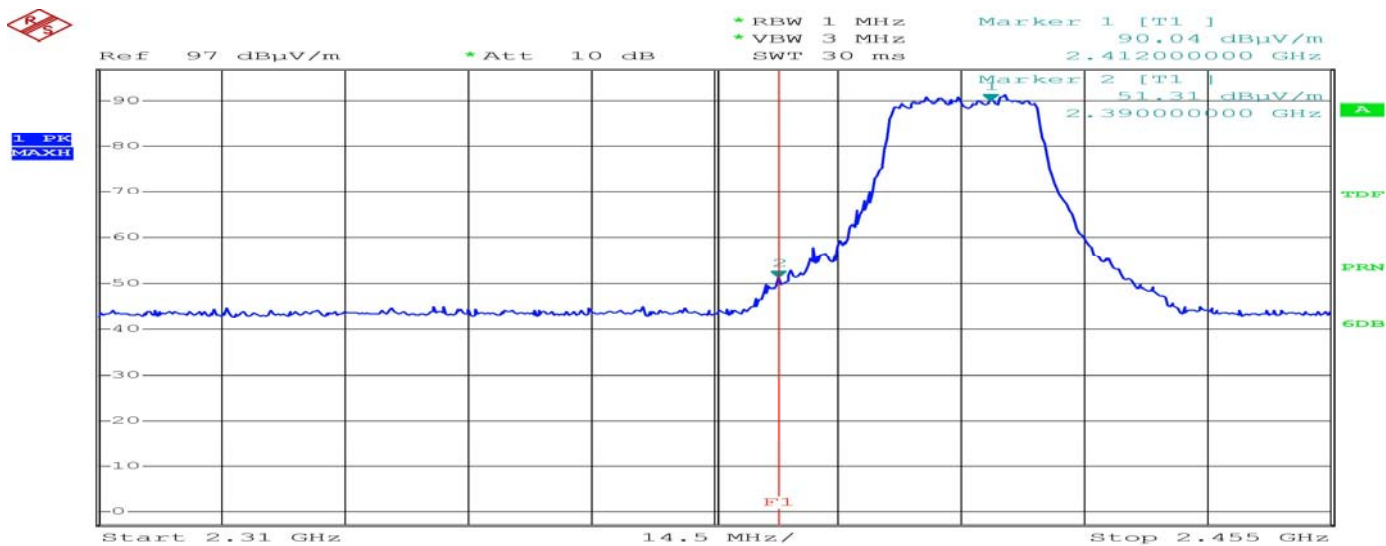

Comment: 15-01302_VER(1 CH_PK)
Date: 31.JUL.2015 12:35:58

Detector mode:Average

Polarity:Vertical

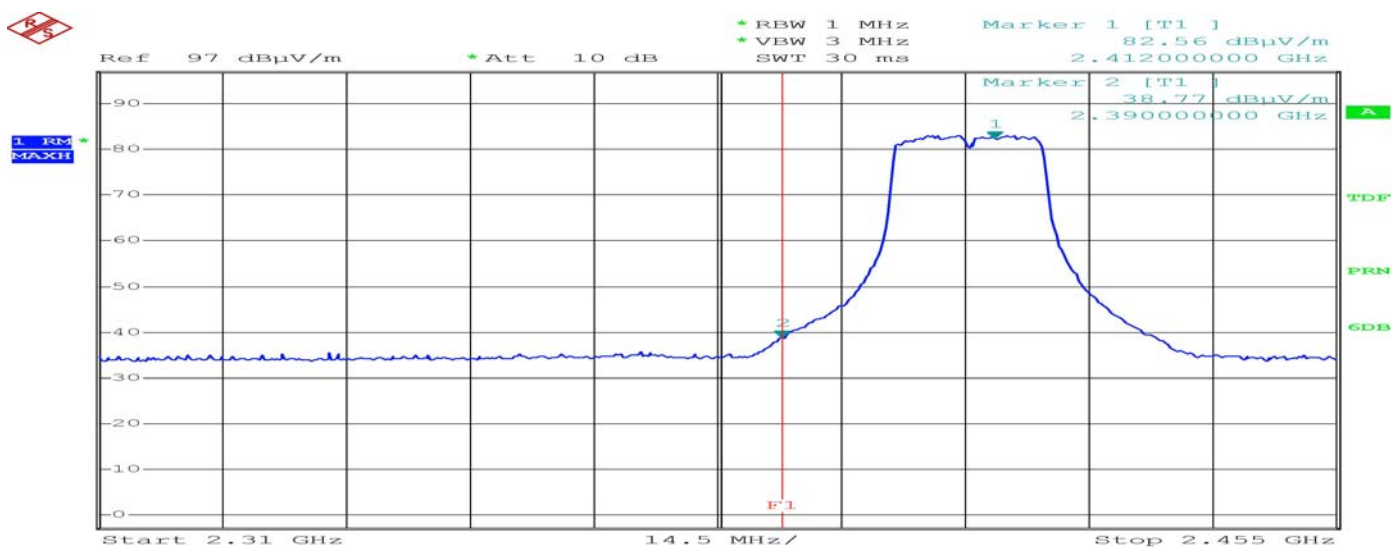

Comment: 15-01302_VER(1 CH_RMS)
Date: 31.JUL.2015 12:38:08




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

Band Edges(CH High)

Detector mode:Peak


Polarity:Horizontal

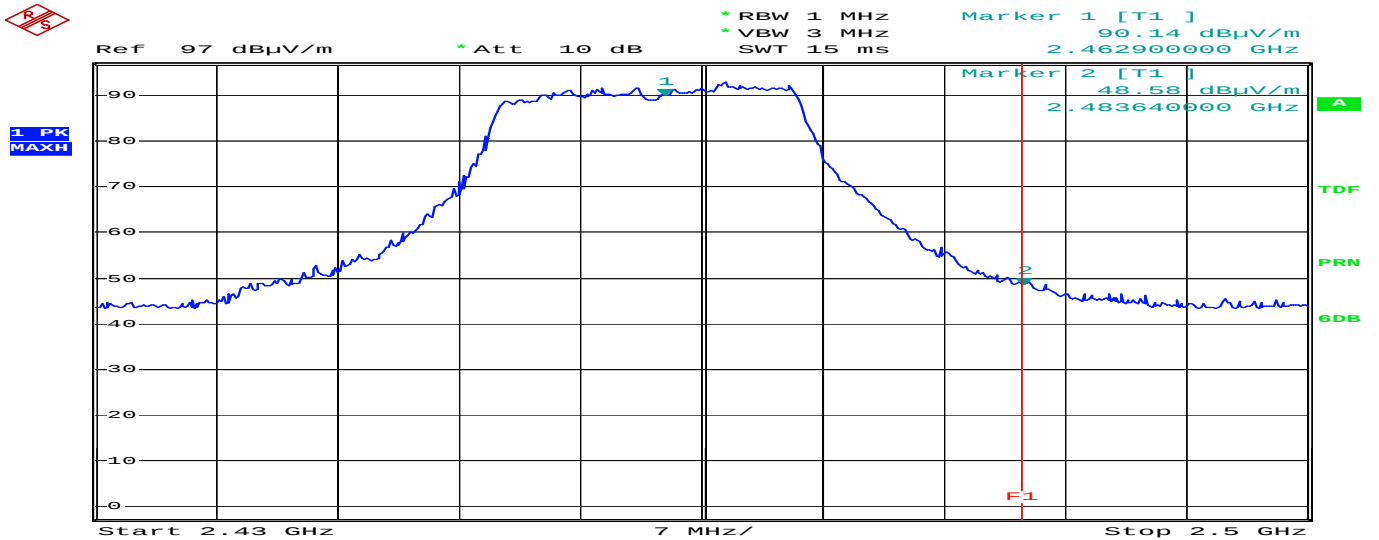

Comment : 15-01302_HOR(11 CH_PK)
Date : 31.JUL.2015 11:55:41

Detector mode:Average

Polarity:Horizontal

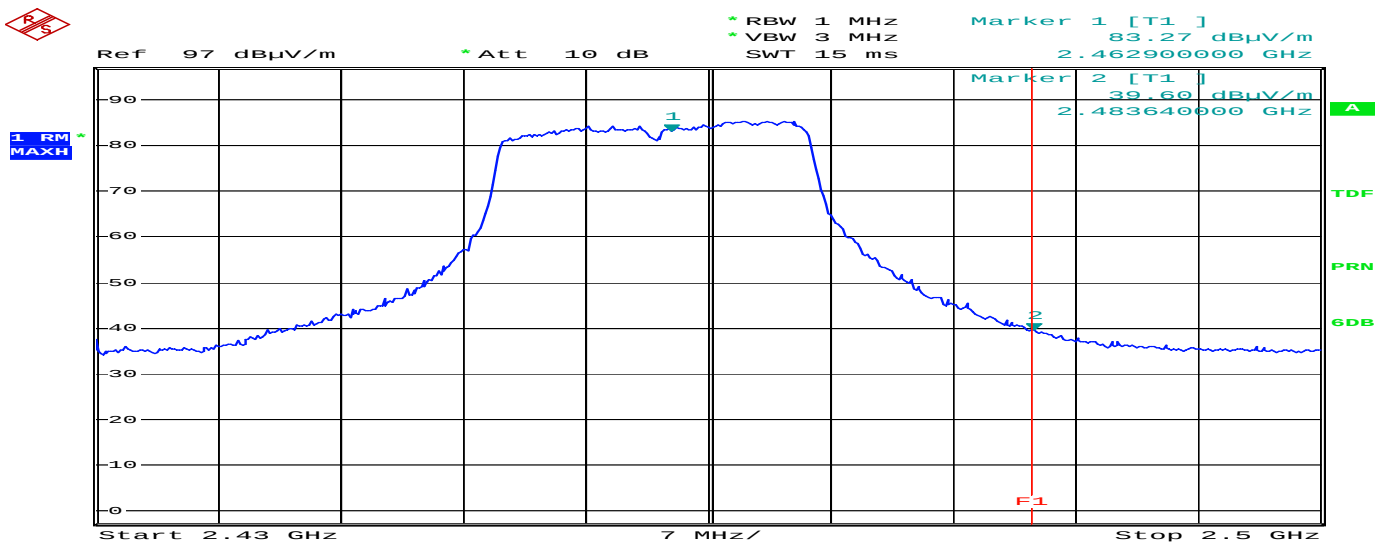

Comment : 15-01302_HOR(11 CH_RMS)
Date : 31.JUL.2015 12:12:46




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

Band Edges(CH High)

Detector mode:Peak


Polarity:Vertical

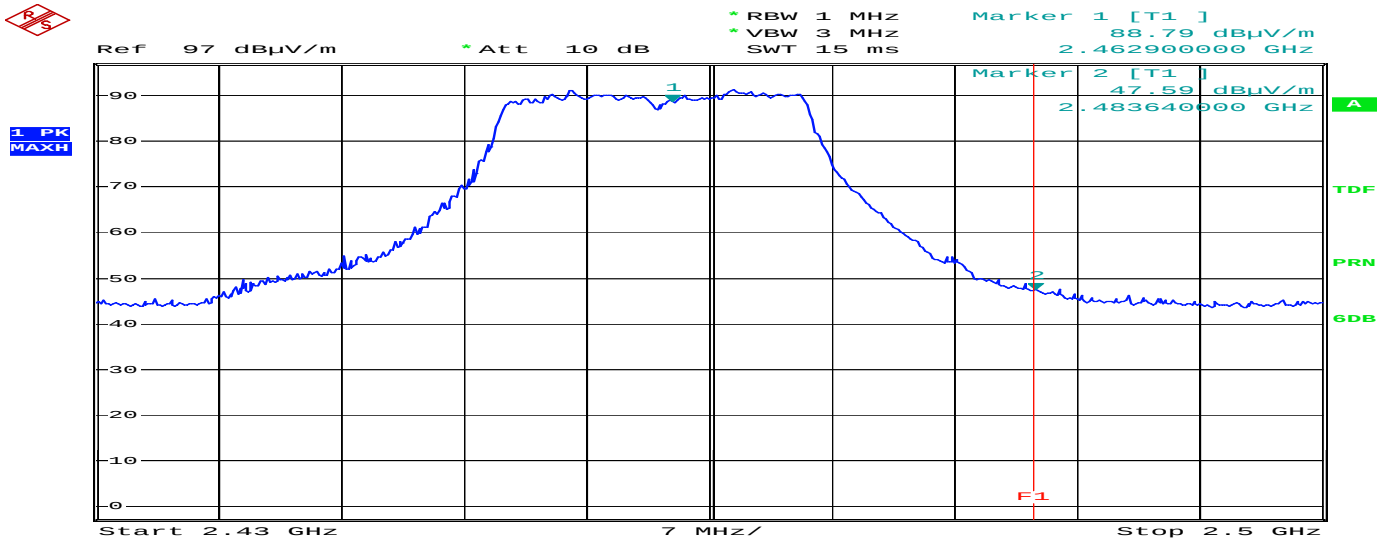

Comment : 15-01302_VER(11 CH_PK)
Date : 31.JUL.2015 12:08:31

Detector mode:Average

Polarity:Vertical

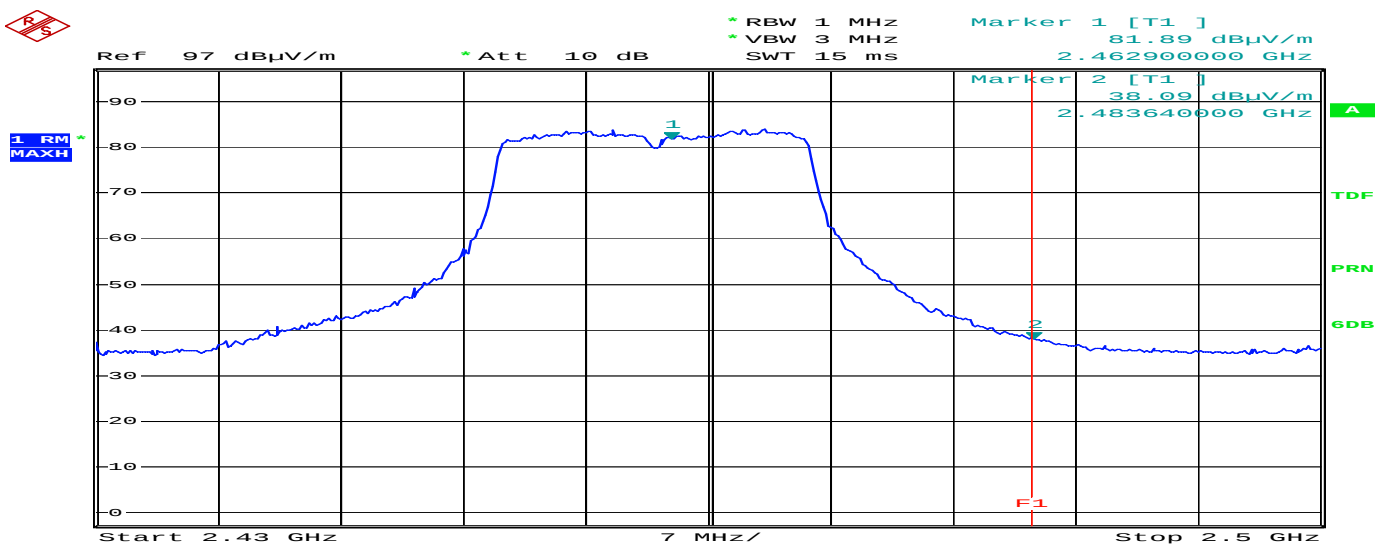

Comment : 15-01302_VER(11 CH_RMS)
Date : 31.JUL.2015 12:10:06

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

11. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.15 MHz to 30 MHz was measured in accordance to FCC PART 15.207. The test setup was made according to ANSI C 63.10 (2009) in a shielded room. The EUT was placed on a non-conductive table at least 0.8 m above the ground plan. A grounded vertical reference plane was positioned in a distance of 0.4 m from the EUT. The distance from the EUT to other metal surfaces was at least 0.8 m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0 m. The test receiver with Quasi Peak detector complies with CISPR 16.

11.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST RECEIVER	ESPI	Rohde & Schwarz	100005	13-Jan-16
LISN	ESH3-Z5	Rohde & Schwarz	836679/025	13-Jan-16
Pulse Limiter	ESH3Z2	Rohde & Schwarz	NONE	13-Jan-16

11.2 Environmental Condition

Test Place : Shielded Room

Temperature (°C) : 22.6 °C

Humidity (% R.H.) : 39.5 % R.H.

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

11.3 Test Data

Test Date : 20-Jul-15

Frequency (MHz)	Correction Factor		Line (H/N)	Quasi-peak Value			Average Value		
	Lisn (dB)	Cable (dB)		Limit (dB μ V)	Reading (dB μ V)	Result (dB μ V)	Limit (dB μ V)	Reading (dB μ V)	Result (dB)
0.15	0.10	0.12	N	66.00	40.60	40.82	56.00		
0.16	0.12	0.12	H	65.46	38.96	39.20	55.46		
0.16	0.10	0.12	N	65.46	40.98	41.20	55.46		
0.17	0.12	0.12	H	64.96	37.58	37.82	54.96		
0.17	0.10	0.12	N	64.96	40.04	40.26	54.96		
23.96	0.65	0.44	H	60.00	39.90	40.99	50.00		
Remark	H : Hot Line, N : Neutral Line *Correction Factor = Lisn + Cable *Result = Correction Factor + Reading								



ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-8037 Fax : +82-31-631-8039

12. Photographs of test setup

12.1. Setup for Radiated Test : (30 ~ 1 000) MHz

[Front]



[Rear]






ESTECH CO., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-8037 Fax : +82-31-631-8039

12.2. Setup for Radiated Test : Above 1 GHz

[Front]

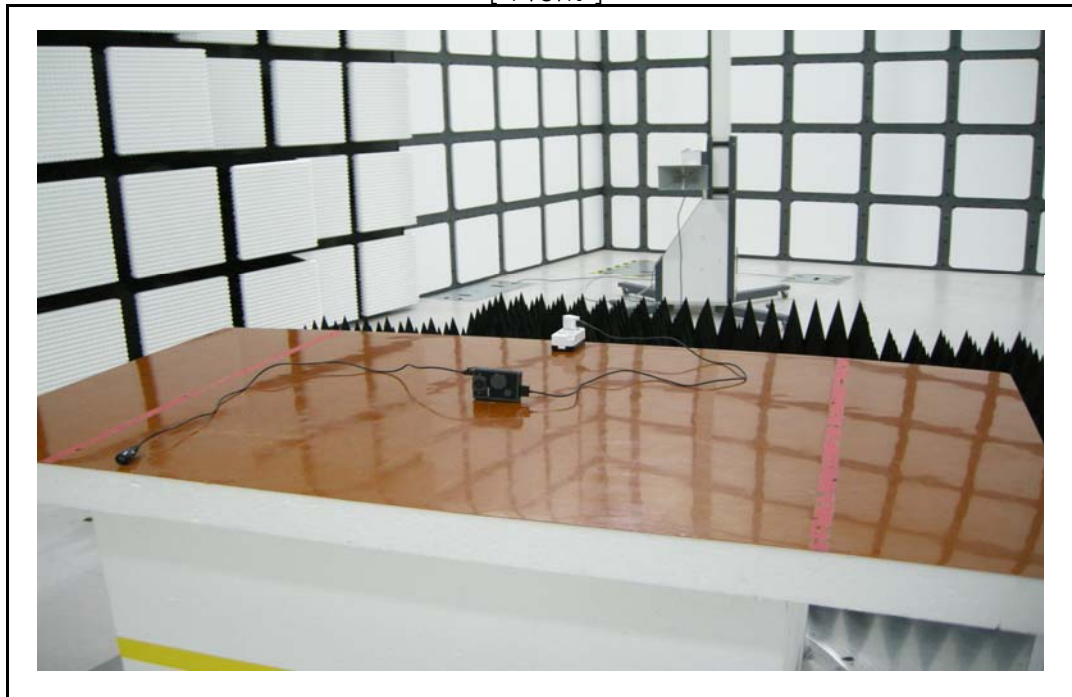

[Rear]

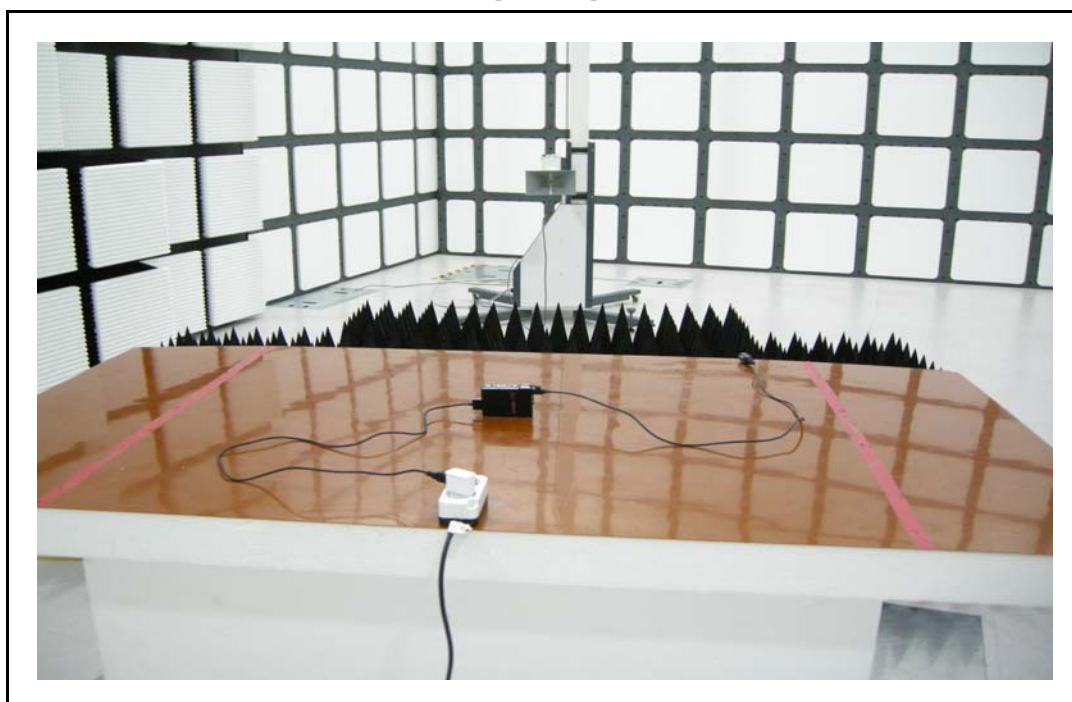



ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

12.3. Setup for Conducted Test : (0.15 ~ 30) MHz

[Front]



[Rear]





ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

12.4. Photographs of EUT

[Front]




[Rear]




Appendix 1. Special diagram

* HOT LINE

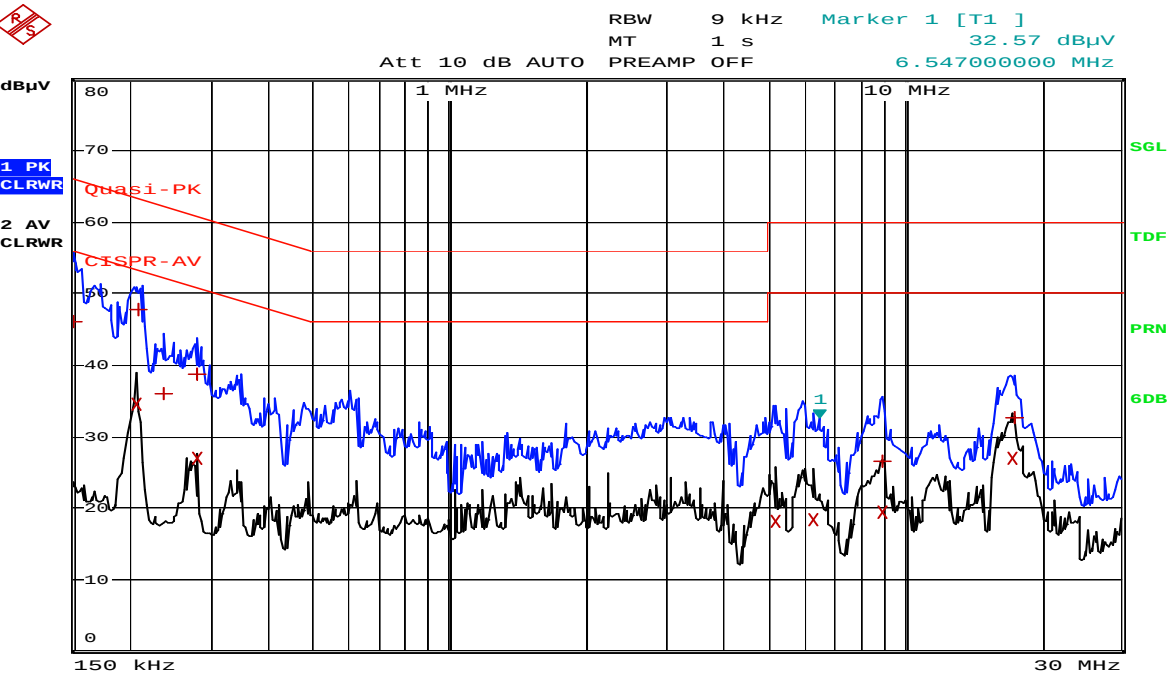

Comment: 15-01390_HOT(5 PIN USB)
Date: 20.JUL.2015 11:13:57

* NEUTRAL LINE

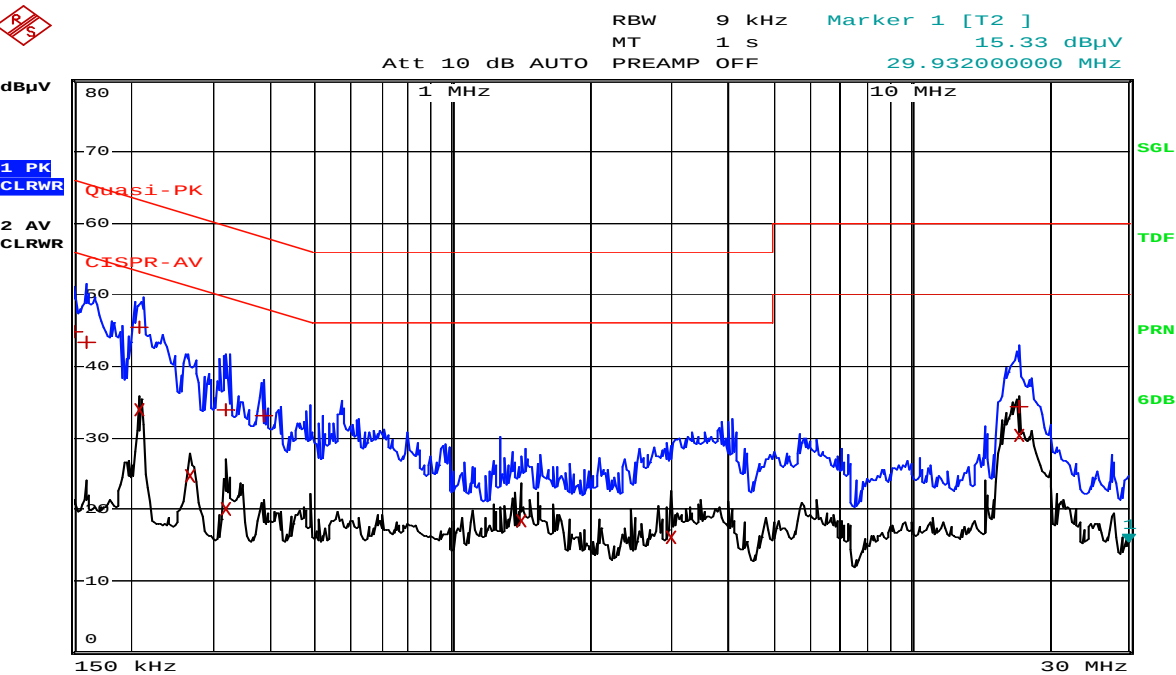

Comment: 15-01390_NEUTRAL(5 PIN USB)
Date: 20.JUL.2015 11:17:06

Appendix 2. Antenna Requirement

1. Antenna Requirement

1.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.204

1.2 Antenna Connected Construction

The antenna types used in this product are Intergrated Chip antenna . The maximum Gain of this antenna is 1.55 dBi.