



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street,  
Bao'an District, Shenzhen, China

## FCC PART 15 SUBPART C TEST REPORT

### FCC PART 15.249

Report Reference No.....: CTA22022800901

FCC ID.....: RP8SL-9109F

Compiled by

( position+printed name+signature): File administrators Kevin Liu

Kevin Liu

Supervised by

( position+printed name+signature): Project Engineer Kevin Liu

Kevin Liu

Approved by

( position+printed name+signature): RF Manager Eric Wang

Eric Wang

Date of issue.....: Feb. 28, 2022

Testing Laboratory Name.....: Shenzhen CTA Testing Technology Co., Ltd.

Address.....: Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community,  
Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name.....: DongGuan KingSheng Electronics&Tech Co. Ltd

Address.....: Building 39, Arising Sun Industrial City, LinCun Village, TangXia Town  
City, DongGuan City, China

Test specification.....:

Standard.....: FCC CFR Title 47 Part 15 Subpart C Section 15.249  
ANSI C63.10:2013

**Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Equipment description.....: 2.4Ghz wireless controller

Trade Mark.....: N/A

Manufacturer.....: DongGuan KingSheng Electronics&Tech Co. Ltd

Model/Type reference.....: SL-9109F

Listed Models .....: GC201(B0894RCSV4)

Modulation .....: GFSK

Frequency.....: From 2412MHz to 2475MHz

Ratings.....: DC 5.0V from USB Port

Result.....: PASS -

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China  
Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

## TEST REPORT

Equipment under Test : 2.4Ghz wireless controller

Model /Type : SL-9109F

Listed Models : GC201(B0894RCSV4)

**Applicant** : DongGuan KingSheng Electronics&Tech Co. Ltd

**Address** : Building 39, Arising Sun Industrial City,LinCun Village, TangXia Town  
City, DongGuan City, China

**Manufacturer** : DongGuan KingSheng Electronics&Tech Co. Ltd

**Address** : Building 39, Arising Sun Industrial City,LinCun Village, TangXia Town  
City, DongGuan City, China

|                     |             |
|---------------------|-------------|
| <b>Test Result:</b> | <b>PASS</b> |
|---------------------|-------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

|          |                                                     |           |
|----------|-----------------------------------------------------|-----------|
| <b>1</b> | <b>TEST STANDARDS .....</b>                         | <b>4</b>  |
| <b>2</b> | <b>SUMMARY .....</b>                                | <b>5</b>  |
| 2.1      | General Remarks                                     | 5         |
| 2.2      | Product Description                                 | 5         |
| 2.3      | Equipment Under Test                                | 5         |
| 2.4      | Short description of the Equipment under Test (EUT) | 5         |
| 2.5      | EUT operation mode                                  | 6         |
| 2.6      | Block Diagram of Test Setup                         | 7         |
| 2.7      | Related Submittal(s) / Grant (s)                    | 7         |
| 2.8      | Modifications                                       | 7         |
| <b>3</b> | <b>TEST ENVIRONMENT .....</b>                       | <b>8</b>  |
| 3.1      | Address of the test laboratory                      | 8         |
| 3.2      | Test Facility                                       | 8         |
| 3.3      | Environmental conditions                            | 8         |
| 3.4      | Summary of measurement results                      | 9         |
| 3.5      | Statement of the measurement uncertainty            | 9         |
| 3.6      | Equipments Used during the Test                     | 10        |
| <b>4</b> | <b>TEST CONDITIONS AND RESULTS .....</b>            | <b>11</b> |
| 4.1      | AC Power Conducted Emission                         | 11        |
| 4.2      | Radiated Emissions and Band Edge                    | 14        |
| 4.3      | Bandwidth of Frequency Band Edge                    | 19        |
| 4.4      | Channel Bandwidth                                   | 20        |
| 4.5      | Antenna Requirement                                 | 25        |
| <b>5</b> | <b>TEST SETUP PHOTOS OF THE EUT .....</b>           | <b>27</b> |
| <b>6</b> | <b>PHOTOS OF THE EUT .....</b>                      | <b>29</b> |

## 1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.249](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz and 24.0-24.25 GHz

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V05r02](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.249

## 2 SUMMARY

### 2.1 General Remarks

|                                |   |               |
|--------------------------------|---|---------------|
| Date of receipt of test sample | : | Feb. 18, 2022 |
| Testing commenced on           | : | Feb. 19, 2022 |
| Testing concluded on           | : | Feb. 25, 2022 |

### 2.2 Product Description

|                                                                  |                                                                                                                                                              |
|------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Description:                                             | 2.4Ghz wireless controller                                                                                                                                   |
| Model/Type reference:                                            | SL-9109F                                                                                                                                                     |
| Listed Models:                                                   | GC201(B0894RCSV4)                                                                                                                                            |
| Model Different.:                                                | All above models are identical in the same PCB layout, interior structure and electrical circuits. The only difference is model name for commercial purpose. |
| Power supply:                                                    | DC 5.0V from USB Port                                                                                                                                        |
| Adapter information<br>(Auxiliary test supplied by testing Lab): | Model: EP-TA20CBC<br>Input:AC 100-240V 50/60Hz<br>Output:DC 5V 2A                                                                                            |
| Testing sample ID:                                               | CTA220228009-01                                                                                                                                              |
| <b>2.4G</b>                                                      |                                                                                                                                                              |
| Supported type:                                                  | 2.4G                                                                                                                                                         |
| Modulation:                                                      | GFSK                                                                                                                                                         |
| Operation frequency:                                             | 2412MHz to 2475MHz                                                                                                                                           |
| Channel number:                                                  | 38                                                                                                                                                           |
| Channel separation:                                              | 1 MHz / 2 MHz                                                                                                                                                |
| Antenna type:                                                    | PCB antenna                                                                                                                                                  |
| Antenna gain:                                                    | 0.00 dBi                                                                                                                                                     |

### 2.3 Equipment Under Test

#### Power supply system utilised

|                      |   |                                                                   |                                   |
|----------------------|---|-------------------------------------------------------------------|-----------------------------------|
| Power supply voltage | : | <input type="radio"/> 230V / 50 Hz                                | <input type="radio"/> 120V / 60Hz |
|                      |   | <input type="radio"/> 12 V DC                                     | <input type="radio"/> 24 V DC     |
|                      |   | <input checked="" type="radio"/> Other (specified in blank below) |                                   |

DC 5.0V from USB Port

### 2.4 Short description of the Equipment under Test (EUT)

This is a 2.4Ghz wireless controller.

For more details, refer to the user's manual of the EUT.

## 2.5 EUT operation mode


The Applicant provides communication tools software(Engineer mode) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 38 channels provided to the EUT and Channel 1/18/38 were selected to test.

### Operation Frequency:

| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                   | 2412 MHz  | 11      | 2428 MHz  | 21      | 2446 MHz  | 31      | 2461 MHz  |
| 2                                   | 2413 MHz  | 12      | 2430 MHz  | 22      | 2448 MHz  | 32      | 2463 MHz  |
| 3                                   | 2415 MHz  | 13      | 2431 MHz  | 23      | 2449 MHz  | 33      | 2465 MHz  |
| 4                                   | 2416 MHz  | 14      | 2433 MHz  | 24      | 2450 MHz  | 34      | 2467 MHz  |
| 5                                   | 2418 MHz  | 15      | 2434 MHz  | 25      | 2452 MHz  | 35      | 2470 MHz  |
| 6                                   | 2420 MHz  | 16      | 2437 MHz  | 26      | 2453 MHz  | 36      | 2471 MHz  |
| 7                                   | 2421 MHz  | 17      | 2439 MHz  | 27      | 2455 MHz  | 37      | 2473 MHz  |
| 8                                   | 2423 MHz  | 18      | 2440 MHz  | 28      | 2456 MHz  | 38      | 2475 MHz  |
| 9                                   | 2424 MHz  | 19      | 2443 MHz  | 29      | 2458 MHz  | 39      |           |
| 10                                  | 2426 MHz  | 20      | 2444 MHz  | 30      | 2459 MHz  | 40      |           |

| Channel             | Frequency |
|---------------------|-----------|
| The lowest channel  | 2412 MHz  |
| The middle channel  | 2440 MHz  |
| The Highest channel | 2475 MHz  |

## 2.6 Block Diagram of Test Setup



## 2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

## 2.8 Modifications

No modifications were implemented to meet testing criteria.

### 3 TEST ENVIRONMENT

#### 3.1 Address of the test laboratory

**Shenzhen CTA Testing Technology Co., Ltd.**

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

#### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

**FCC-Registration No.: 517856 Designation Number: CN1318**

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

**A2LA-Lab Cert. No.: 6534.01**

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

#### 3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 23 °C        |
|                       |              |
| Humidity:             | 44 %         |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

AC Main Conducted testing:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 24 °C        |
|                       |              |
| Humidity:             | 47 %         |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

Conducted testing:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 24 °C        |
|                       |              |
| Humidity:             | 46 %         |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

**Shenzhen CTA Testing Technology Co., Ltd.**

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

### 3.4 Summary of measurement results

| FCC Part15 (15.249) , Subpart C |                                                      |          |        |
|---------------------------------|------------------------------------------------------|----------|--------|
| Standard Section                | Test Item                                            | Judgment | Remark |
| FCC part 15.203                 | Antenna requirement                                  | PASS     |        |
| FCC part 15.207                 | AC Power Line Conducted Emission                     | PASS     |        |
| FCC part 15.249                 | Fundamental & Radiated Spurious Emission Measurement | PASS     |        |
| FCC part 15.249 (a)(2)          | 20dB Channel Bandwidth                               | PASS     |        |
| FCC part 15.205                 | Band Edge                                            | PASS     |        |

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report
3. "N/A" denotes test is not applicable in this Test Report

### 3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen CTA Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen CTA Testing Technology Co., Ltd. :

| Test                  | Range      | Measurement Uncertainty | Notes |
|-----------------------|------------|-------------------------|-------|
| Radiated Emission     | 30~1000MHz | 4.06 dB                 | (1)   |
| Radiated Emission     | 1~18GHz    | 5.14 dB                 | (1)   |
| Radiated Emission     | 18-40GHz   | 5.38 dB                 | (1)   |
| Conducted Disturbance | 0.15~30MHz | 2.14 dB                 | (1)   |

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


### 3.6 Equipments Used during the Test

| Test Equipment                 | Manufacturer           | Model No.   | Equipment No. | Calibration Date | Calibration Due Date |
|--------------------------------|------------------------|-------------|---------------|------------------|----------------------|
| LISN                           | R&S                    | ENV216      | CTA-308       | 2021/08/06       | 2022/08/05           |
| LISN                           | R&S                    | ENV216      | CTA-314       | 2021/08/06       | 2022/08/05           |
| EMI Test Receiver              | R&S                    | ESPI        | CTA-307       | 2021/08/06       | 2022/08/05           |
| EMI Test Receiver              | R&S                    | ESCI        | CTA-306       | 2021/08/06       | 2022/08/05           |
| Spectrum Analyzer              | Agilent                | N9020A      | CTA-301       | 2021/08/06       | 2022/08/05           |
| Spectrum Analyzer              | R&S                    | FSP         | CTA-337       | 2021/08/06       | 2022/08/05           |
| Vector Signal generator        | Agilent                | N5182A      | CTA-305       | 2021/08/06       | 2022/08/05           |
| Analog Signal Generator        | R&S                    | SML03       | CTA-304       | 2021/08/06       | 2022/08/05           |
| Universal Radio Communication  | CMW500                 | R&S         | CTA-302       | 2021/08/06       | 2022/08/05           |
| Temperature and humidity meter | Chigo                  | ZG-7020     | CTA-326       | 2021/08/06       | 2022/08/05           |
| Ultra-Broadband Antenna        | Schwarzbeck            | VULB9163    | CTA-310       | 2021/08/07       | 2022/08/06           |
| Horn Antenna                   | Schwarzbeck            | BBHA 9120D  | CTA-309       | 2021/08/07       | 2022/08/06           |
| Loop Antenna                   | Zhinan                 | ZN30900C    | CTA-311       | 2021/08/07       | 2022/08/06           |
| Horn Antenna                   | Beijing Hangwei Dayang | OBH100400   | CTA-336       | 2021/08/06       | 2022/08/05           |
| Amplifier                      | Schwarzbeck            | BBV 9745    | CTA-312       | 2021/08/06       | 2022/08/05           |
| Amplifier                      | Taiwan chengyi         | EMC051845B  | CTA-313       | 2021/08/06       | 2022/08/05           |
| Directional coupler            | NARDA                  | 4226-10     | CTA-303       | 2021/08/06       | 2022/08/05           |
| High-Pass Filter               | XingBo                 | XBLBQ-GTA18 | CTA-402       | 2021/08/06       | 2022/08/05           |
| High-Pass Filter               | XingBo                 | XBLBQ-GTA27 | CTA-403       | 2021/08/06       | 2022/08/05           |
| Automated filter bank          | Tonscend               | JS0806-F    | CTA-404       | 2021/08/06       | 2022/08/05           |
| Power Sensor                   | Agilent                | U2021XA     | CTA-405       | 2021/08/06       | 2022/08/05           |
| Amplifier                      | Schwarzbeck            | BBV9719     | CTA-406       | 2021/08/06       | 2022/08/05           |

## 4 TEST CONDITIONS AND RESULTS

### 4.1 AC Power Conducted Emission

#### TEST CONFIGURATION

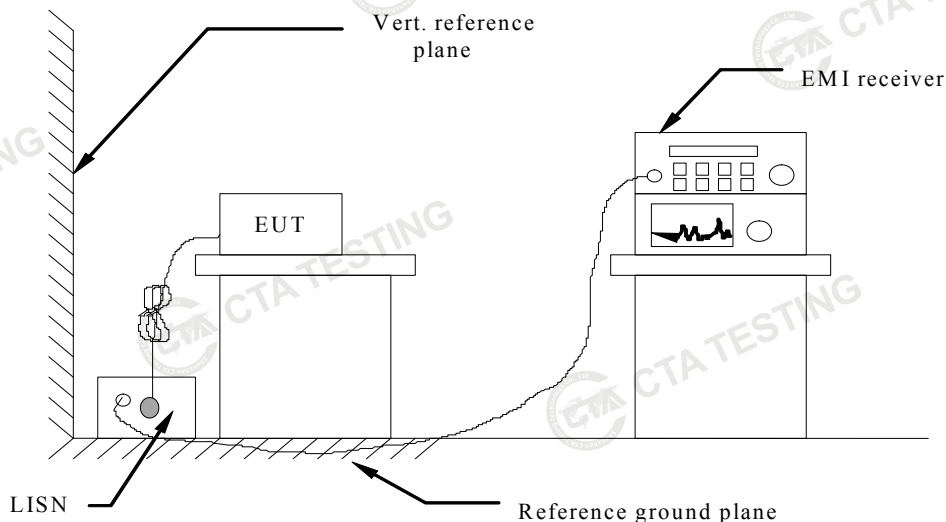

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |

\* Decreases with the logarithm of the frequency.

#### TEST RESULTS

Shenzhen CTA Testing Technology Co., Ltd.


Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China  
Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

Power supply:

DC 5V from Adapter AC  
120V/60Hz

Polarization

L

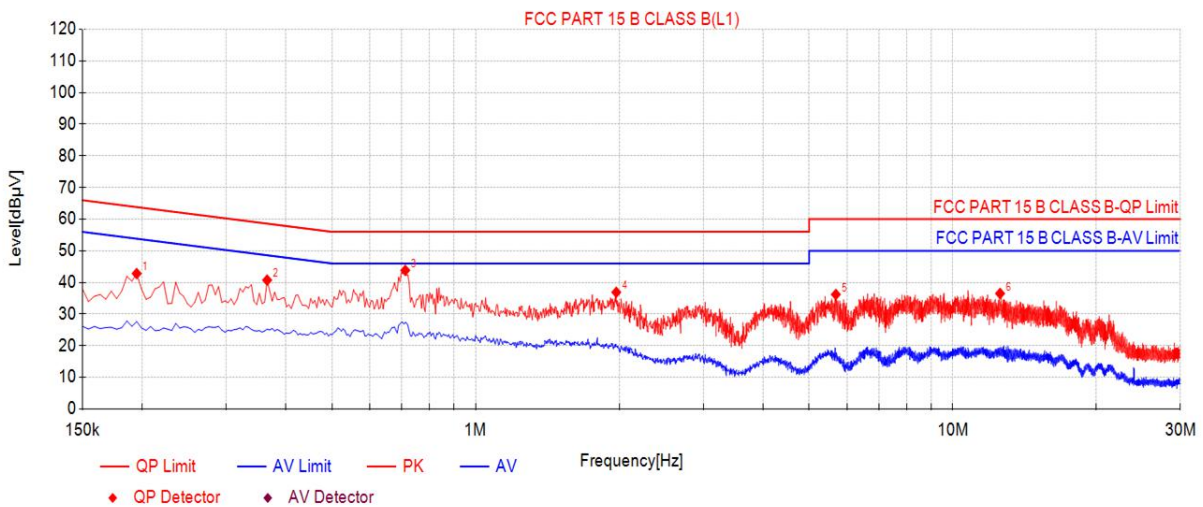

## Suspected List


| NO. | Freq.<br>[MHz] | Reading<br>[dBμV] | Level<br>[dBμV] | Factor<br>[dB] | Limit<br>[dBμV] | Margin<br>[dB] | Detector | Type | Verdict |
|-----|----------------|-------------------|-----------------|----------------|-----------------|----------------|----------|------|---------|
| 1   | 0.195          | 32.31             | 42.81           | 10.50          | 63.82           | 21.01          | PK       | L1   | PASS    |
| 2   | 0.366          | 30.24             | 40.74           | 10.50          | 58.59           | 17.85          | PK       | L1   | PASS    |
| 3   | 0.7125         | 33.31             | 43.81           | 10.50          | 56.00           | 12.19          | PK       | L1   | PASS    |
| 4   | 1.9725         | 26.40             | 36.90           | 10.50          | 56.00           | 19.10          | PK       | L1   | PASS    |
| 5   | 5.6895         | 25.70             | 36.20           | 10.50          | 60.00           | 23.80          | PK       | L1   | PASS    |
| 6   | 12.5655        | 26.00             | 36.50           | 10.50          | 60.00           | 23.50          | PK       | L1   | PASS    |

Note:1).Level (dBμV)= Reading (dBμV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBμV) - Level (dBμV)

|               |                                    |              |   |
|---------------|------------------------------------|--------------|---|
| Power supply: | DC 5V from Adapter AC<br>120V/60Hz | Polarization | N |
|---------------|------------------------------------|--------------|---|

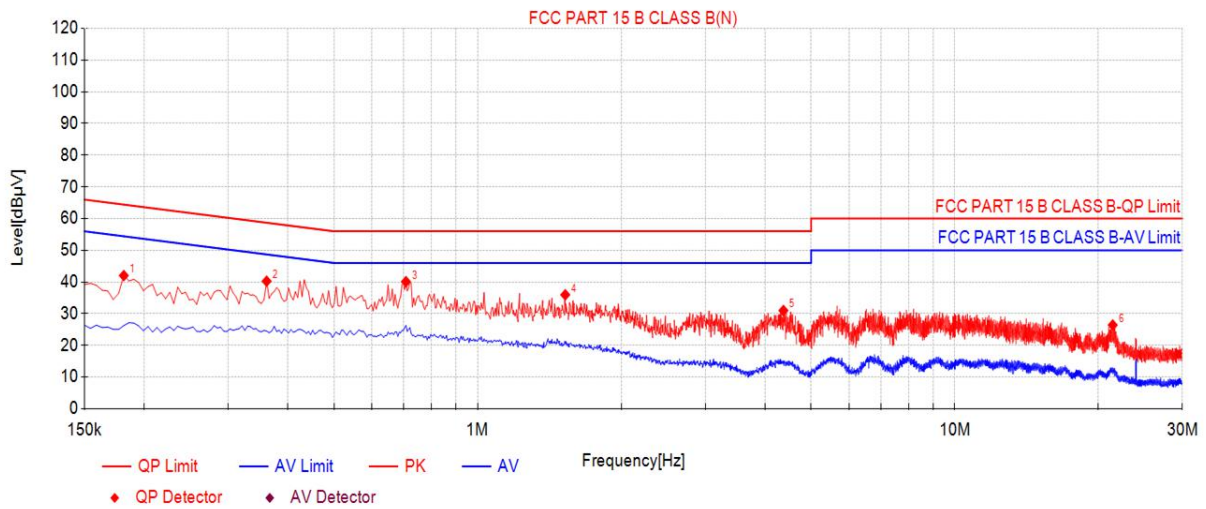

### Suspected List

| NO. | Freq. [MHz] | Reading [dBμV] | Level [dBμV] | Factor [dB] | Limit [dBμV] | Margin [dB] | Detector | Type | Verdict |
|-----|-------------|----------------|--------------|-------------|--------------|-------------|----------|------|---------|
| 1   | 0.1815      | 31.53          | 42.03        | 10.50       | 64.42        | 22.39       | PK       | N    | PASS    |
| 2   | 0.3615      | 29.75          | 40.25        | 10.50       | 58.69        | 18.44       | PK       | N    | PASS    |
| 3   | 0.708       | 29.62          | 40.12        | 10.50       | 56.00        | 15.88       | PK       | N    | PASS    |
| 4   | 1.527       | 25.46          | 35.96        | 10.50       | 56.00        | 20.04       | PK       | N    | PASS    |
| 5   | 4.3755      | 20.50          | 31.00        | 10.50       | 56.00        | 25.00       | PK       | N    | PASS    |
| 6   | 21.435      | 15.92          | 26.42        | 10.50       | 60.00        | 33.58       | PK       | N    | PASS    |

Note: 1). Level (dBμV) = Reading (dBμV) + Factor (dB)


2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)

3). Margin (dB) = Limit (dBμV) - Level (dBμV)


## 4.2 Radiated Emissions and Band Edge

### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

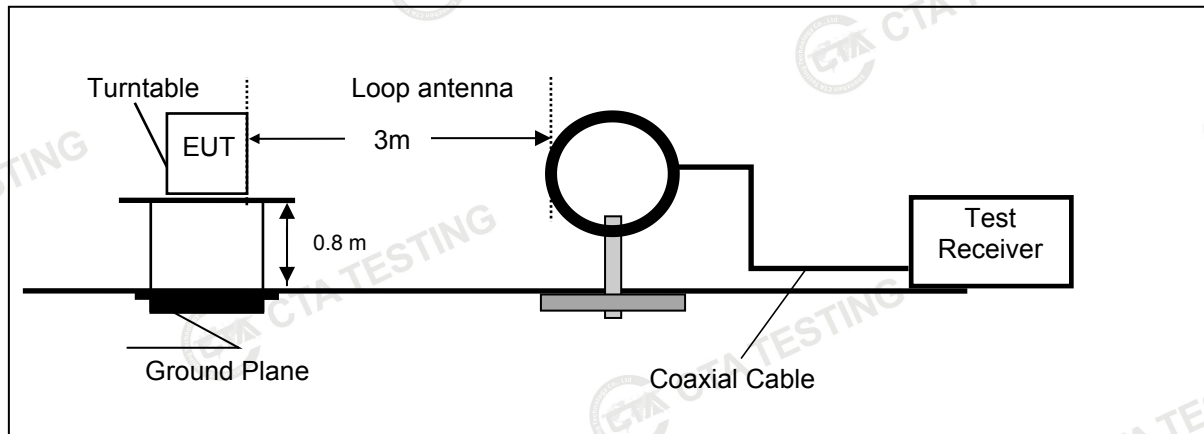

Frequency range 30MHz – 1000MHz

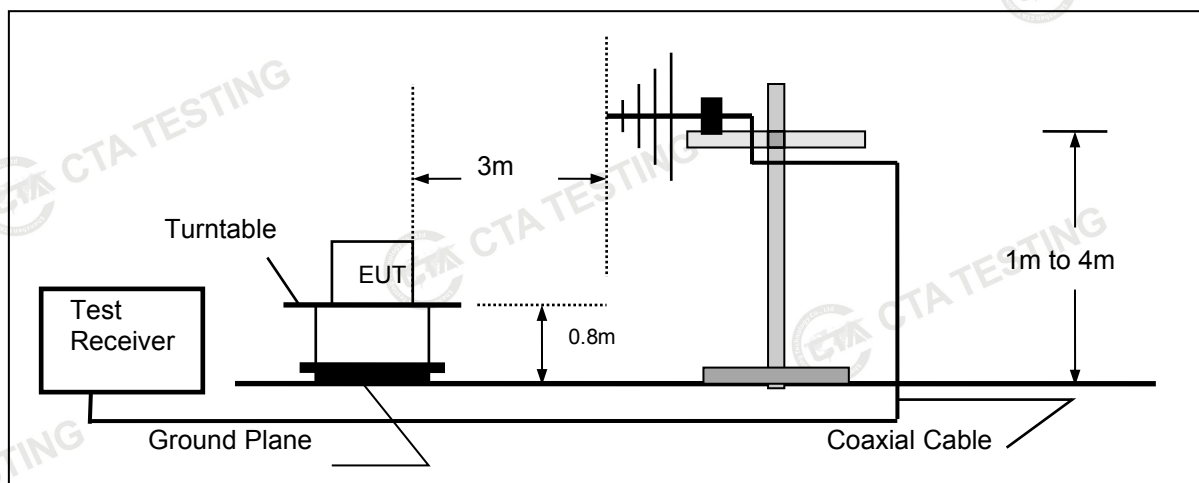

Frequency range above 1GHz-25GHz

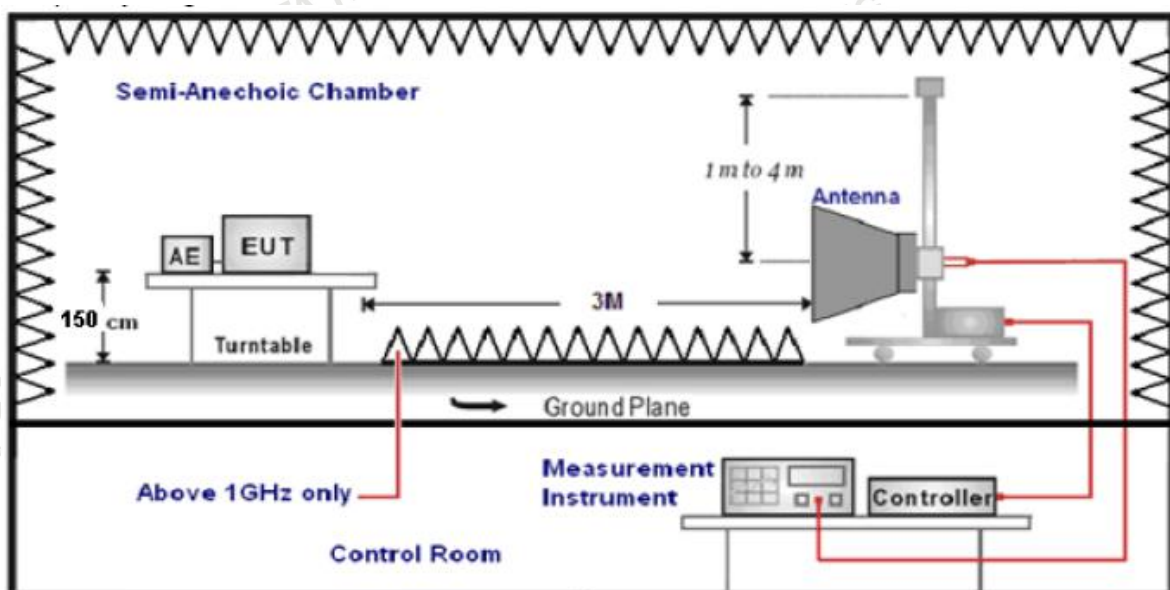

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China  
Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

**TEST PROCEDURE**

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 2480MHz.so radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type          | Test Distance |
|----------------------|----------------------------|---------------|
| 9KHz-30MHz           | Active Loop Antenna        | 3             |
| 30MHz-1GHz           | Ultra-Broadband Antenna    | 3             |
| 1GHz-18GHz           | Double Ridged Horn Antenna | 3             |
| 18GHz-25GHz          | Horn Antenna               | 1             |

7. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting                                                                            | Detector |
|----------------------|-----------------------------------------------------------------------------------------------------------|----------|
| 9KHz-150KHz          | RBW=200Hz/VBW=3KHz,Sweep time=Auto                                                                        | QP       |
| 150KHz-30MHz         | RBW=9KHz/VBW=100KHz,Sweep time=Auto                                                                       | QP       |
| 30MHz-1GHz           | RBW=120KHz/VBW=1000KHz,Sweep time=Auto                                                                    | QP       |
| 1GHz-40GHz           | Peak Value: RBW=1MHz/VBW=3MHz,<br>Sweep time=Auto<br>Average Value: RBW=1MHz/VBW=10Hz,<br>Sweep time=Auto | Peak     |

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

|                           |                                            |
|---------------------------|--------------------------------------------|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |                                            |

$$\text{Transd}=AF +CL-AG$$

**RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

| Frequency (MHz) | Distance (Meters) | Radiated (dBµV/m)                          | Radiated (µV/m)       |
|-----------------|-------------------|--------------------------------------------|-----------------------|
| 0.009-0.49      | 3                 | $20\log(2400/F(\text{KHz}))+40\log(300/3)$ | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 3                 | $20\log(24000/F(\text{KHz}))+40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30        | 3                 | $20\log(30)+40\log(30/3)$                  | 30                    |
| 30-88           | 3                 | 40.0                                       | 100                   |
| 88-216          | 3                 | 43.5                                       | 150                   |
| 216-960         | 3                 | 46.0                                       | 200                   |
| Above 960       | 3                 | 54.0                                       | 500                   |


Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China  
Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

**TEST RESULTS**

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. 2.4G 1Mbps were tested at Low, Middle, and High channel and recorded worst mode at 2.4G 1Mbps.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

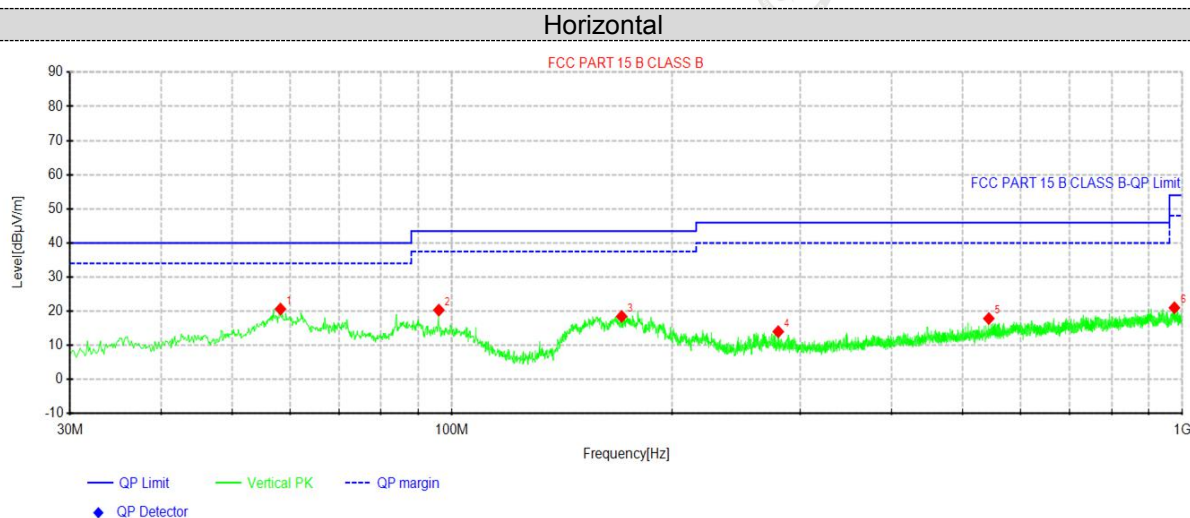
**For 30MHz-1GHz****Suspected Data List**

| NO. | Freq. [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|----------|
| 1   | 58.2512     | 38.48          | 20.65          | -17.83        | 40.00          | 19.35       | 100         | 328       | Vertical |
| 2   | 95.96       | 39.34          | 20.35          | -18.99        | 43.50          | 23.15       | 100         | 3         | Vertical |
| 3   | 170.771     | 39.50          | 18.50          | -21.00        | 43.50          | 25.00       | 100         | 125       | Vertical |
| 4   | 279.775     | 31.73          | 14.03          | -17.70        | 46.00          | 31.97       | 100         | 320       | Vertical |
| 5   | 543.251     | 31.61          | 17.87          | -13.74        | 46.00          | 28.13       | 100         | 219       | Vertical |
| 6   | 975.265     | 29.71          | 21.03          | -8.68         | 54.00          | 32.97       | 100         | 102       | Vertical |

Note:1).Level (dBμV/m)= Reading (dBμV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBμV/m) - Level (dBμV/m)

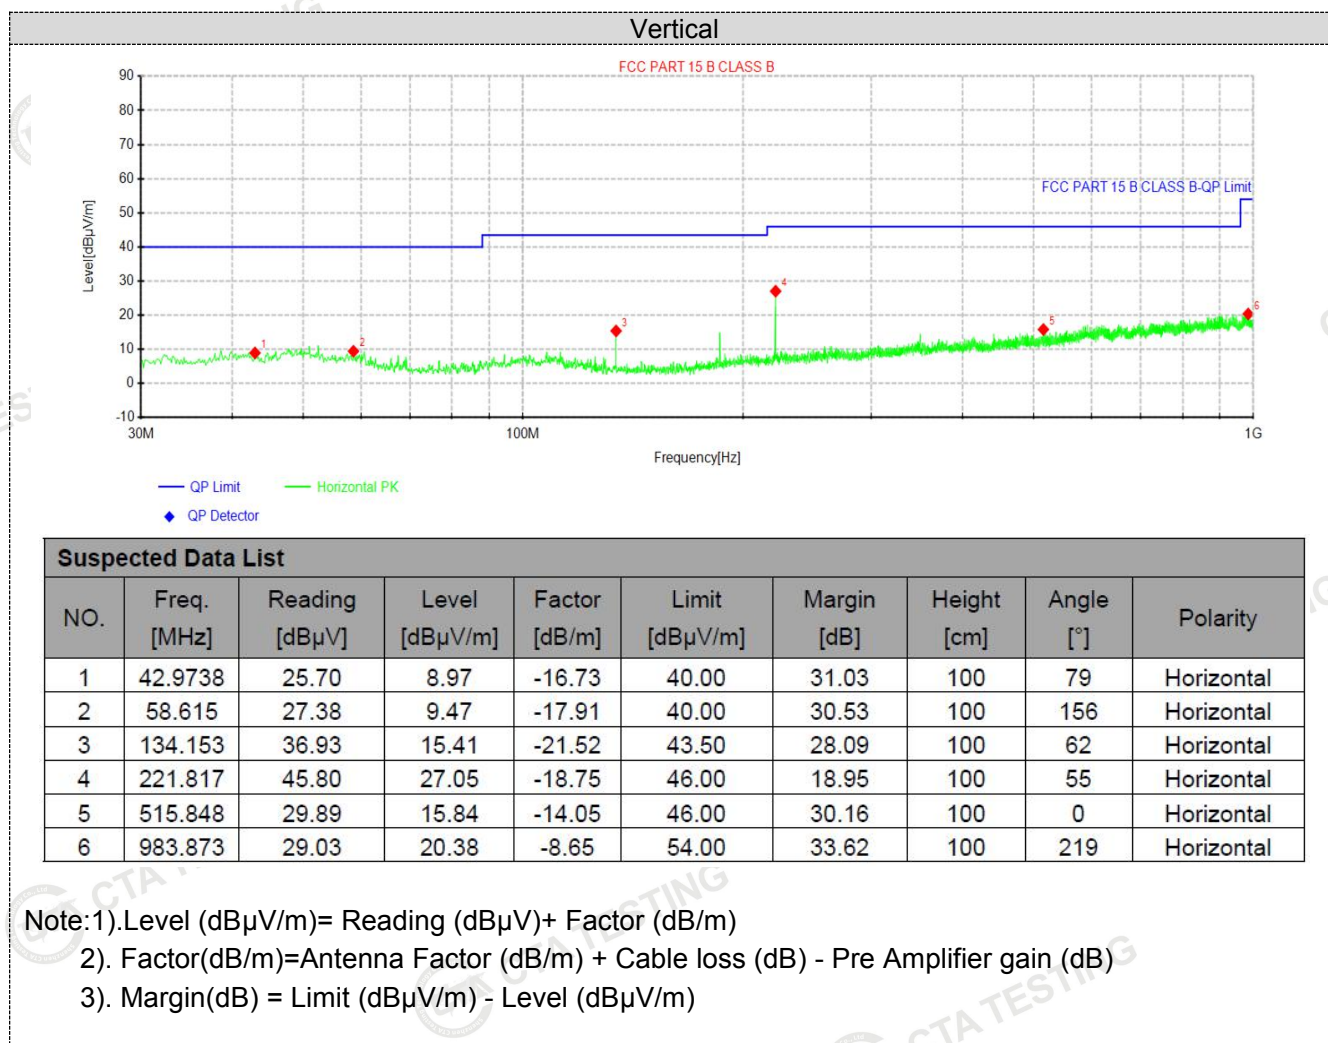

For 1GHz to 25GHz

**GFSK (above 1GHz)**

| Frequency(MHz): |                   |                       | 2412            |                    |                | Peak value          |                 |              |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4824.00         | 56.87             | 21.52                 | 3.52            | 33.12              | 48.79          | 74                  | -25.21          | Vertical     |
| 4824.00         | 51.24             | 23.65                 | 4.56            | 33.08              | 46.37          | 74                  | -27.63          | Vertical     |
| 7236.00         | 55.36             | 21.52                 | 3.52            | 33.12              | 47.28          | 74                  | -26.72          | Horizontal   |
| 7236.00         | 50.16             | 23.65                 | 4.56            | 33.08              | 45.29          | 74                  | -28.71          | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4824.00         | 50.15             | 21.52                 | 3.52            | 33.12              | 42.07          | 54                  | -11.93          | Vertical     |
| 4824.00         | 45.66             | 23.65                 | 4.56            | 33.08              | 40.79          | 54                  | -13.21          | Vertical     |
| 7236.00         | 50.11             | 21.52                 | 3.52            | 33.12              | 42.03          | 54                  | -11.97          | Horizontal   |
| 7236.00         | 44.63             | 23.65                 | 4.56            | 33.08              | 39.76          | 54                  | -14.24          | Horizontal   |

| Frequency(MHz): |                   |                       | 2440            |                    |                | Peak value          |                 |              |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4880.00         | 57.16             | 21.78                 | 3.58            | 33.27              | 49.25          | 74                  | -24.75          | Vertical     |
| 4880.00         | 52.42             | 24.15                 | 4.57            | 33.87              | 47.27          | 74                  | -26.73          | Vertical     |
| 7320.00         | 56.45             | 21.78                 | 3.58            | 33.27              | 48.54          | 74                  | -25.46          | Horizontal   |
| 7320.00         | 50.14             | 24.15                 | 4.57            | 33.87              | 44.99          | 74                  | -29.01          | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4882.00         | 49.98             | 21.78                 | 3.58            | 33.27              | 42.07          | 54                  | -11.93          | Vertical     |
| 4882.00         | 45.52             | 24.15                 | 4.57            | 33.87              | 40.37          | 54                  | -13.63          | Vertical     |
| 7320.00         | 48.58             | 21.78                 | 3.58            | 33.27              | 40.67          | 54                  | -13.33          | Horizontal   |
| 7320.00         | 43.46             | 24.15                 | 4.57            | 33.87              | 38.31          | 54                  | -15.69          | Horizontal   |

| Frequency(MHz): |                   |                       | 2475            |                    |                | Peak value          |                 |              |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 4950.00         | 57.76             | 22.56                 | 4.17            | 33.75              | 50.74          | 74                  | -23.26          | Vertical     |
| 4950.00         | 52.36             | 24.78                 | 5.36            | 33.17              | 49.33          | 74                  | -24.67          | Vertical     |
| 7425.00         | 55.49             | 22.56                 | 4.17            | 33.75              | 48.47          | 74                  | -25.53          | Horizontal   |
| 7425.00         | 50.45             | 24.78                 | 5.36            | 33.17              | 47.42          | 74                  | -26.58          | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4950.00         | 48.45             | 22.56                 | 4.17            | 33.75              | 41.43          | 54                  | -12.57          | Vertical     |
| 4950.00         | 43.85             | 24.78                 | 5.36            | 33.17              | 40.82          | 54                  | -13.18          | Vertical     |
| 7425.00         | 46.59             | 22.56                 | 4.17            | 33.75              | 39.57          | 54                  | -14.43          | Horizontal   |
| 7425.00         | 41.21             | 24.78                 | 5.36            | 33.17              | 38.18          | 54                  | -15.82          | Horizontal   |

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “\*” , means this data is the too weak instrument of signal is unable to test.

**Shenzhen CTA Testing Technology Co., Ltd.**

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China  
 Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

### 4.3 BANDWIDTH OF FREQUENCY BAND EDGE

#### 4.3.1 Test Requirement:

|                       |                                                                                                    |          |      |      |         |
|-----------------------|----------------------------------------------------------------------------------------------------|----------|------|------|---------|
| Test Requirement:     | FCC Part15 C Section 15.209 and 15.205                                                             |          |      |      |         |
| Test Method:          | ANSI C63.10: 2013                                                                                  |          |      |      |         |
| Test Frequency Range: | All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed. |          |      |      |         |
| Test site:            | Measurement Distance: 3m                                                                           |          |      |      |         |
| Receiver setup:       | Frequency                                                                                          | Detector | RBW  | VBW  | Value   |
|                       | Above 1GHz                                                                                         | Peak     | 1MHz | 3MHz | Peak    |
|                       |                                                                                                    | Average  | 1MHz | 3MHz | Average |

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation

#### 4.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

#### 4.3.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.4 TEST SETUP

## Radiated Emission Test-Up Frequency Above 1GHz

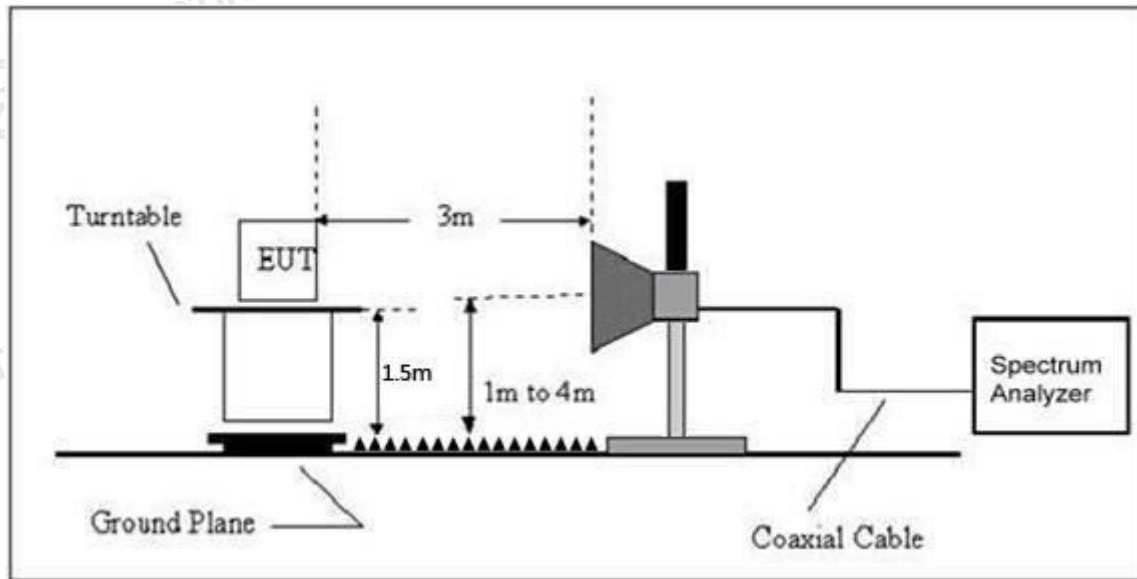

## 4.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

## 4.3.6 TEST RESULT

2412MHz  
Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2310            | 54.26             | 21.25                 | 3.26            | 33.14              | 45.63          | 74                  | -28.37          | Horizontal   |
| 2400            | 51.45             | 21.75                 | 3.54            | 33.42              | 43.32          | 74                  | -30.68          | Horizontal   |
| 2310            | 52.15             | 21.25                 | 3.26            | 33.14              | 43.52          | 74                  | -30.48          | Vertical     |
| 2400            | 50.27             | 21.75                 | 3.54            | 33.42              | 42.14          | 74                  | -31.86          | Vertical     |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2310            | 38.78             | 21.25                 | 3.26            | 33.14              | 30.15          | 54                  | -23.85          | Horizontal   |
| 2400            | 36.44             | 21.75                 | 3.54            | 33.42              | 28.31          | 54                  | -25.69          | Horizontal   |
| 2310            | 37.49             | 21.25                 | 3.26            | 33.14              | 28.86          | 54                  | -25.14          | Vertical     |
| 2400            | 35.55             | 21.75                 | 3.54            | 33.42              | 27.42          | 54                  | -26.58          | Vertical     |

2475MHz  
Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.5          | 52.34             | 22.12                 | 3.65            | 33.54              | 44.57          | 74                  | -29.43          | Horizontal   |
| 2500            | 50.14             | 22.35                 | 3.98            | 33.27              | 43.20          | 74                  | -30.80          | Horizontal   |
| 2483.5          | 51.58             | 22.12                 | 3.65            | 33.54              | 43.81          | 74                  | -30.19          | Vertical     |
| 2500            | 50.08             | 22.35                 | 3.98            | 33.27              | 43.14          | 74                  | -30.86          | Vertical     |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.5          | 38.88             | 22.12                 | 3.65            | 33.54              | 31.11          | 54                  | -22.89          | Horizontal   |
| 2500            | 36.56             | 22.35                 | 3.98            | 33.27              | 29.62          | 54                  | -24.38          | Horizontal   |
| 2483.5          | 37.75             | 22.12                 | 3.65            | 33.54              | 29.98          | 54                  | -24.02          | Vertical     |
| 2500            | 35.45             | 22.35                 | 3.98            | 33.27              | 28.51          | 54                  | -25.49          | Vertical     |

Remark: Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor  
All of the restriction bands were tested, and only the data of worst case was exhibited.

Measurement data:

Field Strength of The Fundamental Signal

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2412            | 104.16            | 22.55                 | 3.25            | 33.45              | 96.51          | 114                 | -17.49          | Vertical     |
| 2412            | 102.34            | 22.55                 | 3.25            | 33.45              | 94.69          | 114                 | -19.31          | Horizontal   |
| 2440            | 101.21            | 23.05                 | 3.36            | 33.15              | 94.47          | 114                 | -19.53          | Vertical     |
| 2440            | 100.53            | 23.05                 | 3.36            | 33.15              | 93.79          | 114                 | -20.21          | Horizontal   |
| 2475            | 99.45             | 23.57                 | 3.67            | 33.68              | 93.01          | 114                 | -20.99          | Vertical     |
| 2475            | 98.15             | 23.57                 | 3.67            | 33.68              | 91.71          | 114                 | -22.29          | Horizontal   |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2412            | 87.56             | 22.55                 | 3.25            | 33.45              | 79.91          | 94                  | -14.09          | Vertical     |
| 2412            | 86.41             | 22.55                 | 3.25            | 33.45              | 78.76          | 94                  | -15.24          | Horizontal   |
| 2440            | 85.13             | 23.05                 | 3.36            | 33.15              | 78.39          | 94                  | -15.61          | Vertical     |
| 2440            | 84.56             | 23.05                 | 3.36            | 33.15              | 77.82          | 94                  | -16.18          | Horizontal   |
| 2475            | 83.15             | 23.57                 | 3.67            | 33.68              | 76.71          | 94                  | -17.29          | Vertical     |
| 2475            | 82.63             | 23.57                 | 3.67            | 33.68              | 76.19          | 94                  | -17.81          | Horizontal   |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

#### 4.4 Channel Bandwidth

|                   |                             |
|-------------------|-----------------------------|
| Test Requirement: | FCC Part15 C Section 15.215 |
| Test Method:      | ANSI C63.10: 2013           |

##### 4.4.1 Applied procedures / limit

| FCC Part15 (15.215) , Subpart C |           |                       |        |
|---------------------------------|-----------|-----------------------|--------|
| Section                         | Test Item | Frequency Range (MHz) | Result |
| 15.215                          | Bandwidth | 2400-2483.5           | PASS   |

##### 4.4.2 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

##### 4.4.3 DEVIATION FROM STANDARD

No deviation.

##### 4.4.4 TEST SETUP



##### 4.4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 4.4.6 TEST RESULTS

|              |      |                    |       |
|--------------|------|--------------------|-------|
| Temperature: | 26°C | Relative Humidity: | 54%   |
| Test Mode :  | GFSK | Test Voltage :     | DC 5V |

| Test channel | Channel Bandwidth (MHz) | Result |
|--------------|-------------------------|--------|
| Lowest       | 0.932                   | Pass   |
| Middle       | 0.931                   |        |
| Highest      | 0.930                   |        |



Lowest channel



Middle channel



Highest channel

## 4.5 Antenna Requirement

### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):


(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.


### Antenna Connected Construction

The maximum gain of antenna was 0.00 dBi.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen CTA Testing Technology Co., Ltd. does not assume any responsibility.

## 5 Test Setup Photos of the EUT

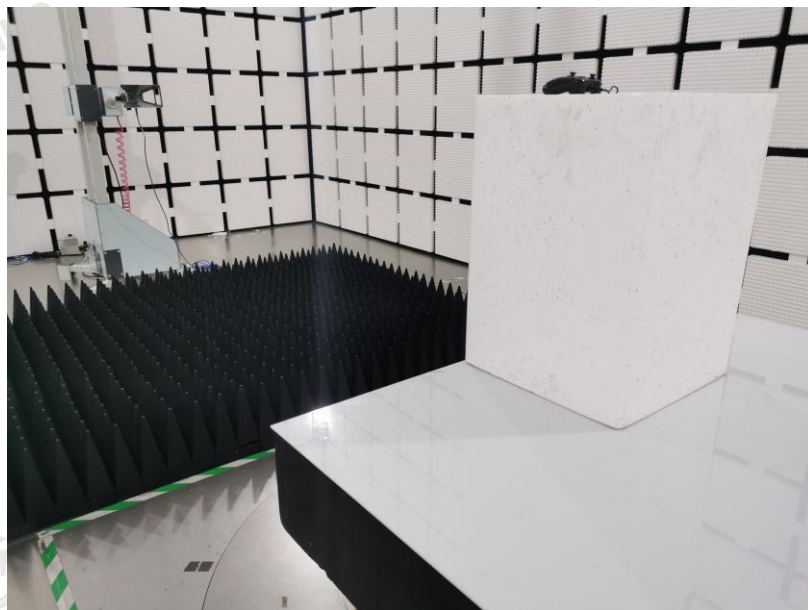

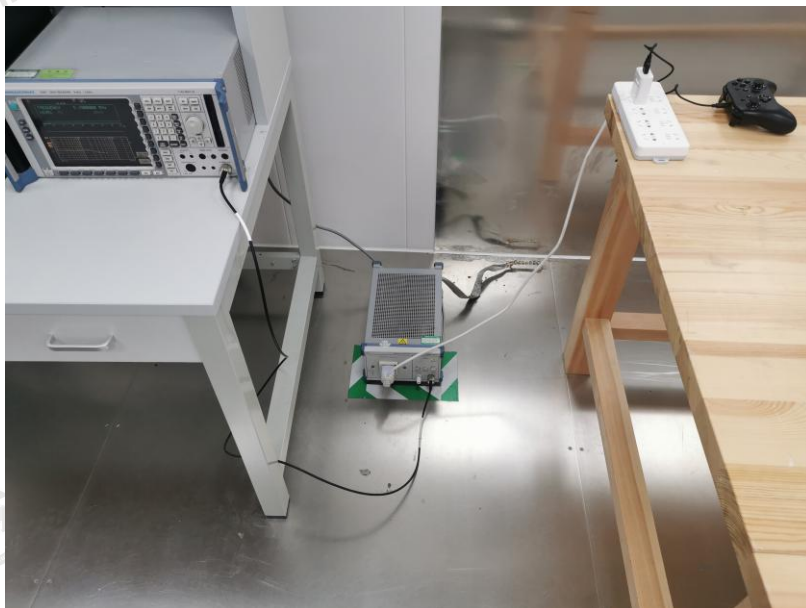



## 6 Photos of the EUT











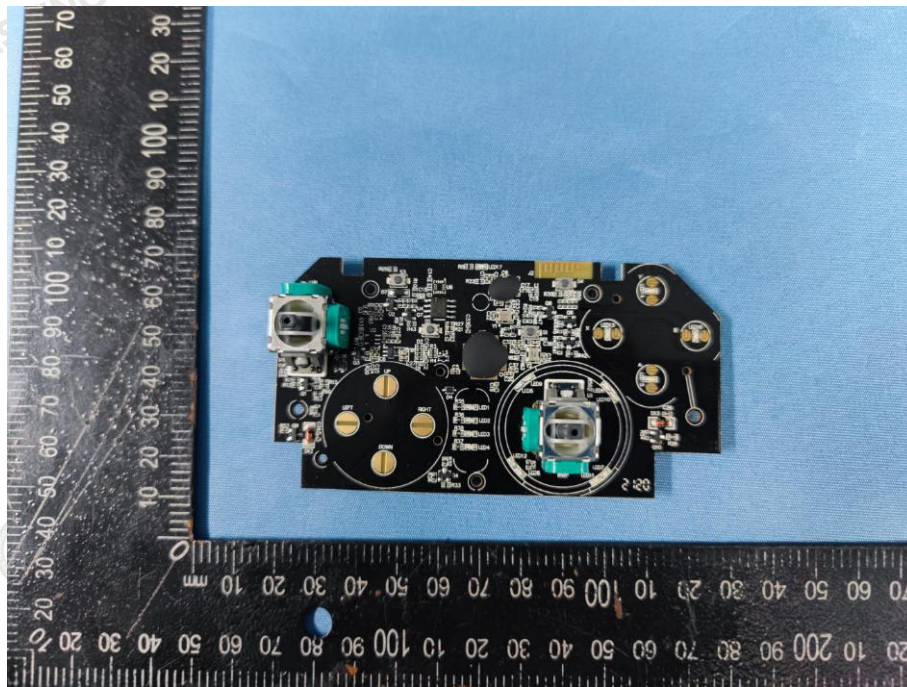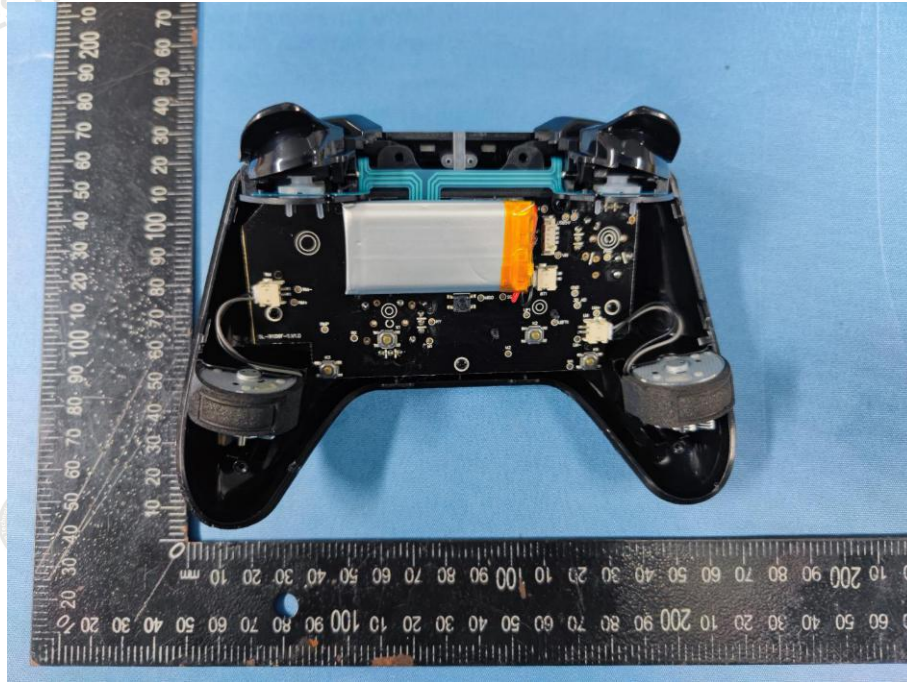

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China  
Tel: +86-755 2322 5875 E-mail: cta@cta-test.cn Web: <http://www.cta-test.cn>

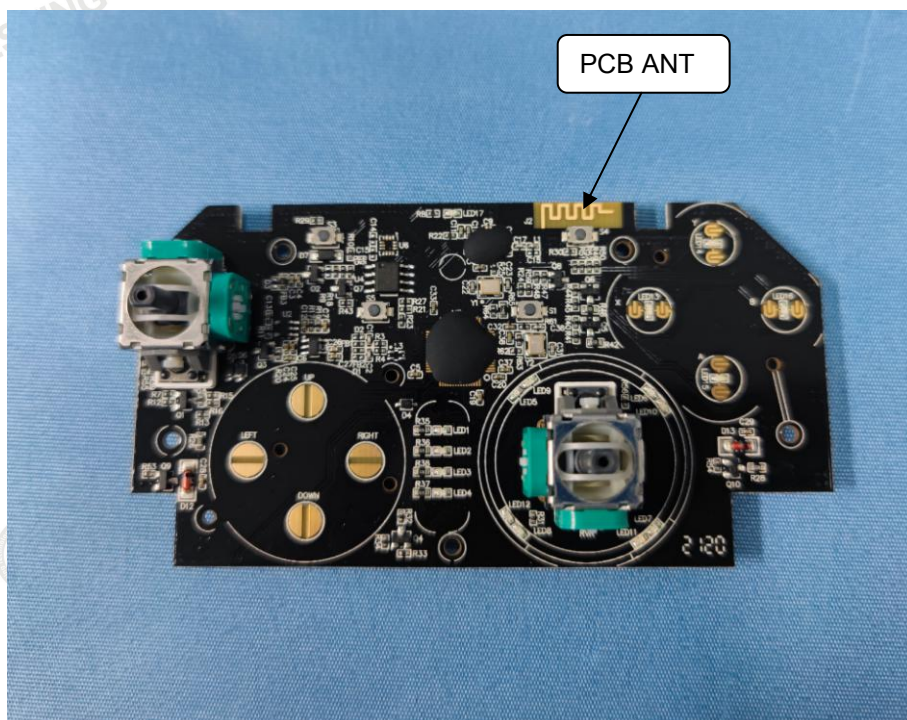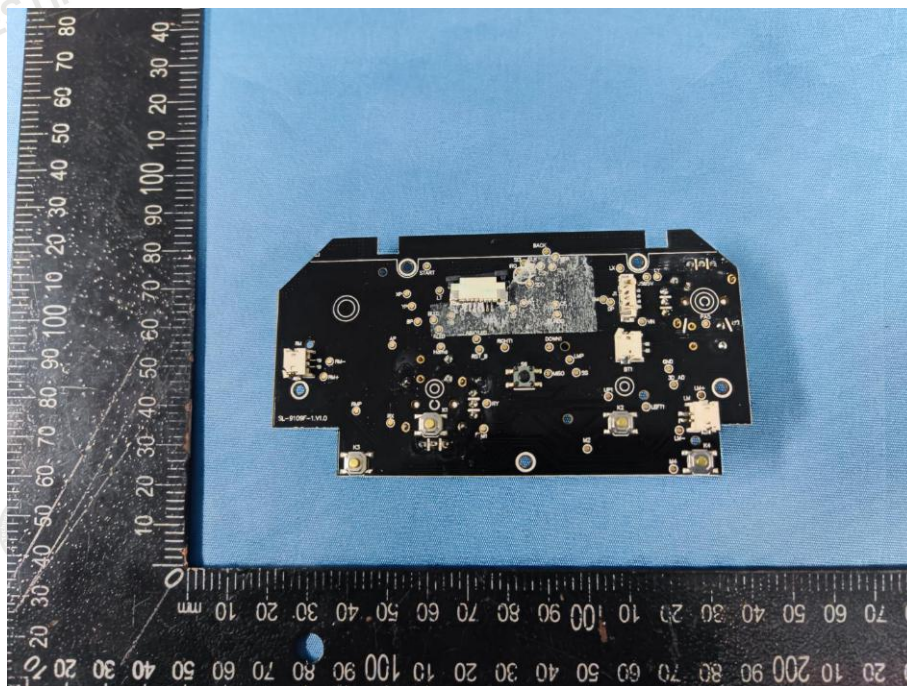

\*\*\*\*\* End of Report \*\*\*\*\*