


Site: AC1	Time: 2018/04/09 - 10:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by DH5 at channel 2402MHz	

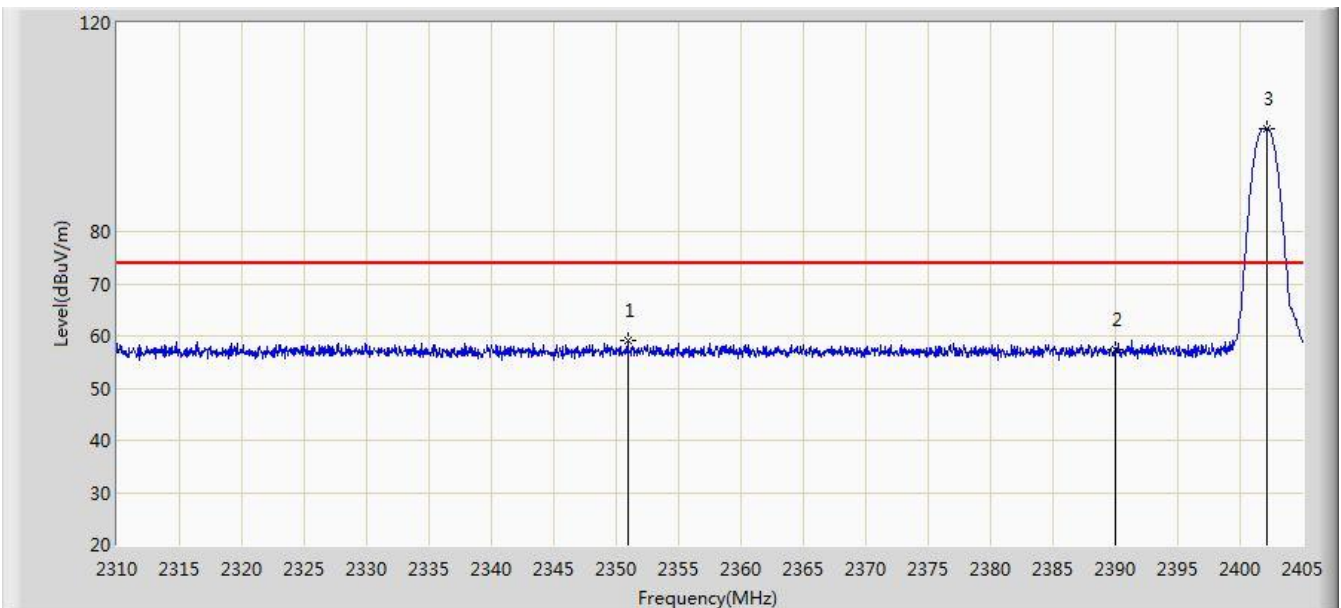


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2350.897	59.004	26.606	-14.996	74.000	32.398	PK
2			2390.000	57.508	25.181	-16.492	74.000	32.327	PK
3		*	2402.150	99.836	67.532	N/A	N/A	32.304	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 10:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by DH5 at channel 2402MHz	

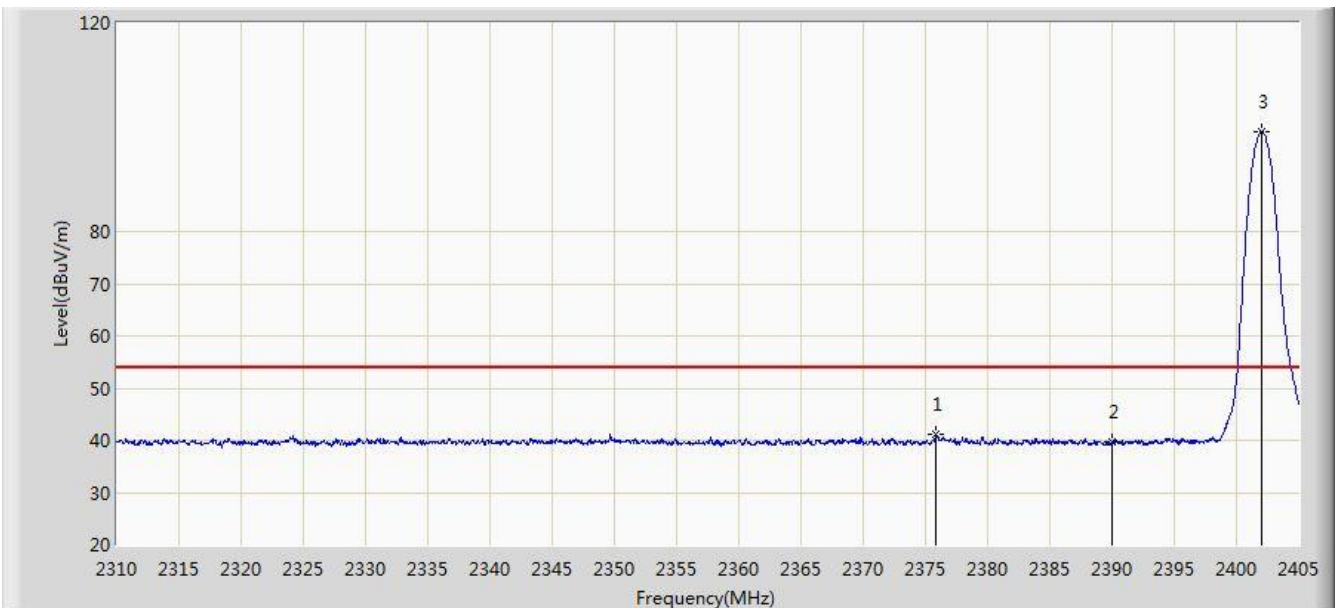


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2375.883	41.084	8.737	-12.916	54.000	32.346	AV
2			2390.000	39.752	7.425	-14.248	54.000	32.327	AV
3		*	2402.055	99.081	66.777	N/A	N/A	32.304	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 10:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by DH5 at channel 2480MHz	

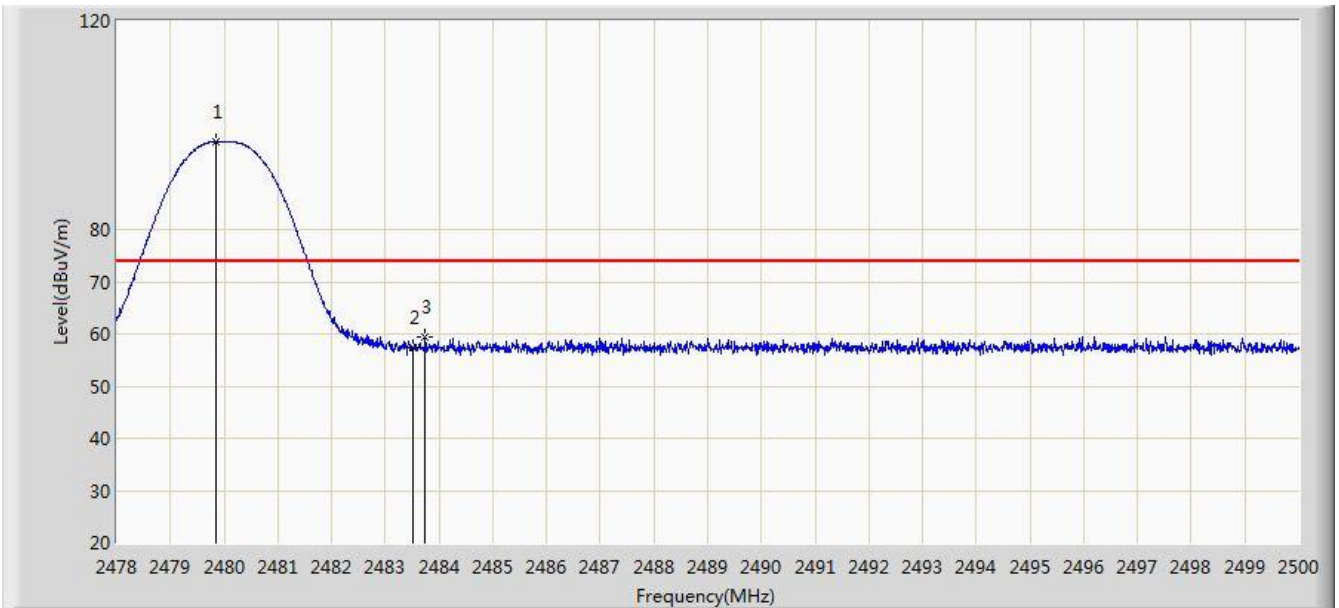


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.848	96.817	64.492	N/A	N/A	32.325	PK
2			2483.500	57.443	25.104	-16.557	74.000	32.340	PK
3			2483.742	59.287	26.947	-14.713	74.000	32.340	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 10:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by DH5 at channel 2480MHz	

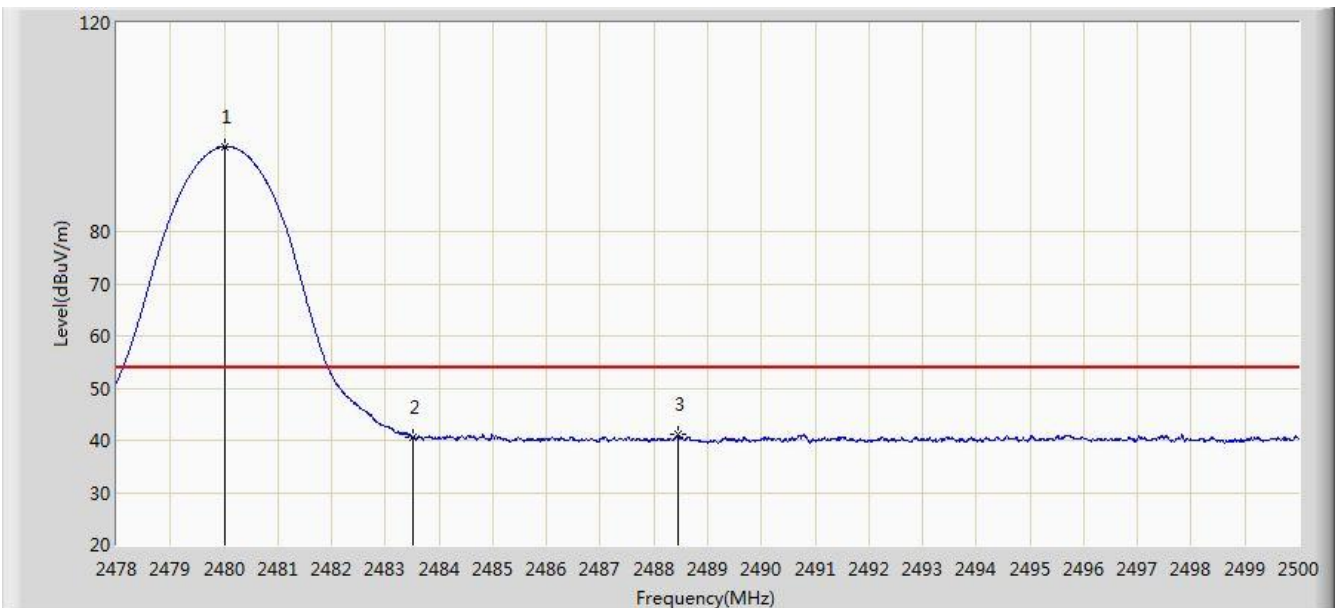


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.024	96.293	63.968	N/A	N/A	32.325	AV
2			2483.500	40.561	8.222	-13.439	54.000	32.340	AV
3			2488.450	41.089	8.730	-12.911	54.000	32.359	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 10:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by DH5 at channel 2480MHz	

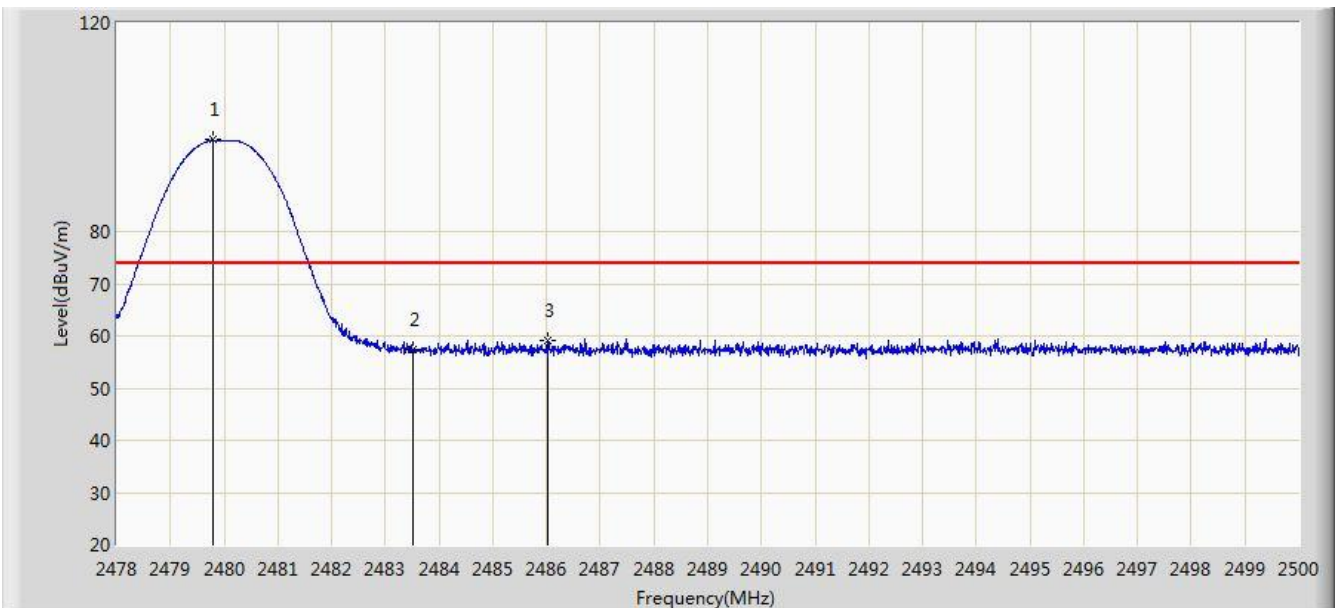


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.782	97.606	65.281	N/A	N/A	32.325	PK
2			2483.500	57.320	24.981	-16.680	74.000	32.340	PK
3			2486.030	58.998	26.649	-15.002	74.000	32.349	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 10:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by DH5 at channel 2480MHz	

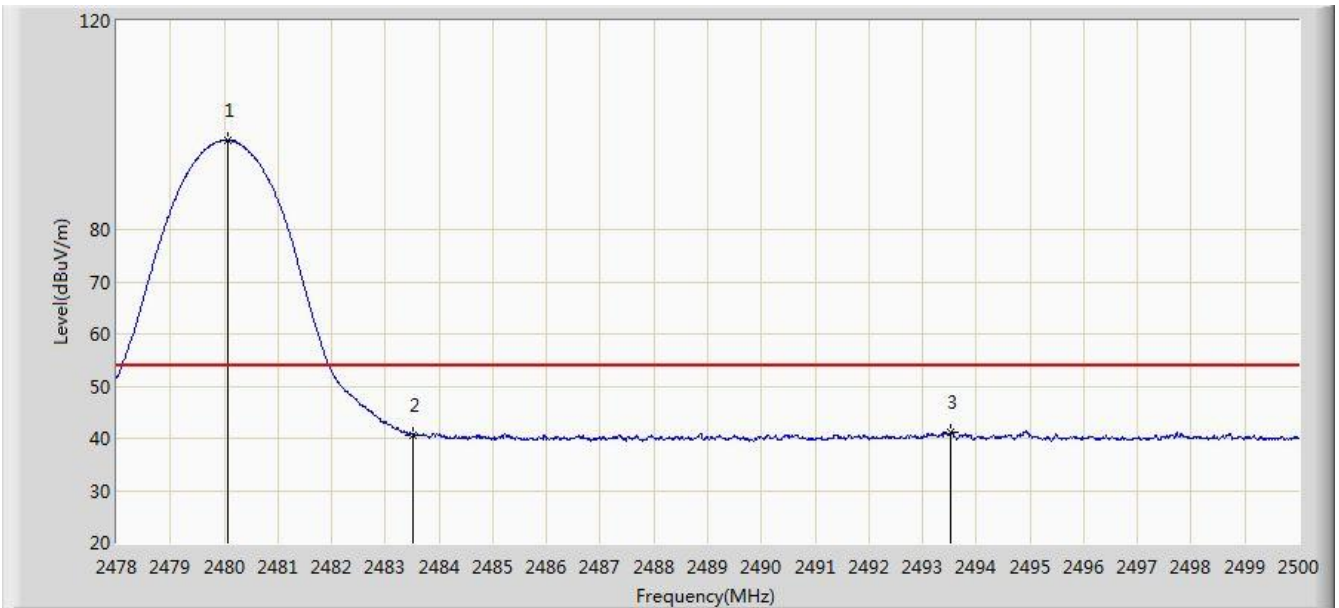


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.057	97.114	64.788	N/A	N/A	32.325	AV
2			2483.500	40.652	8.313	-13.348	54.000	32.340	AV
3			2493.521	41.245	8.867	-12.755	54.000	32.379	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 10:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by 2DH5 at channel 2402MHz	

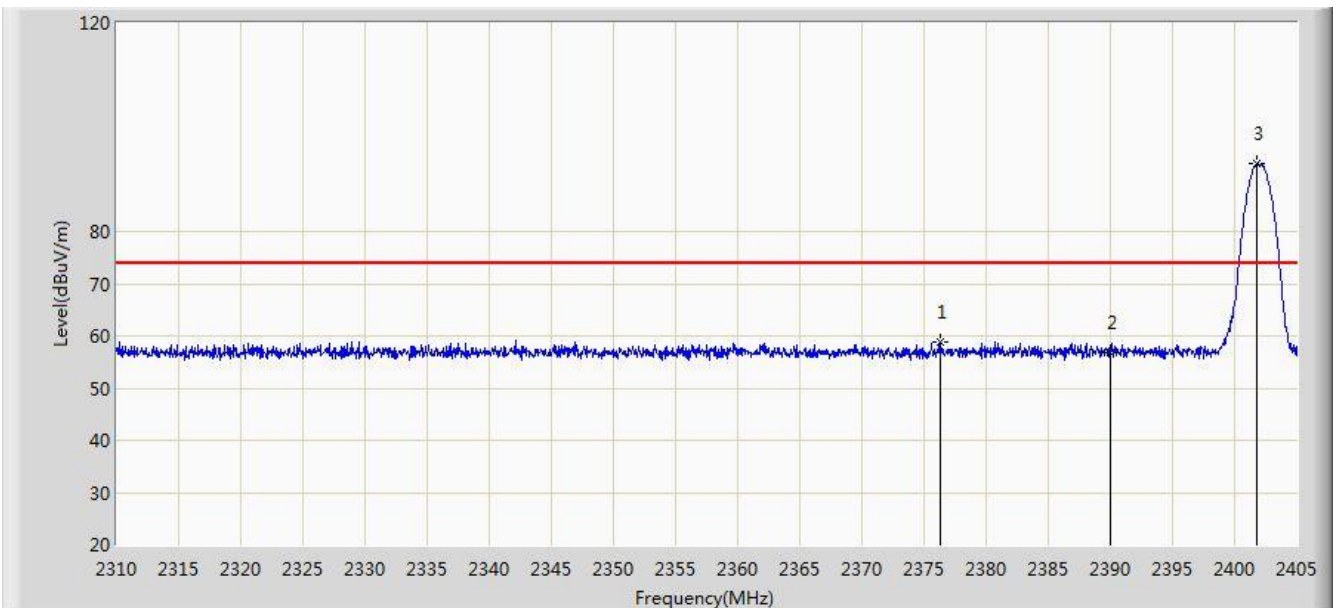


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2376.357	58.789	26.443	-15.211	74.000	32.346	PK
2			2390.000	56.680	24.353	-17.320	74.000	32.327	PK
3		*	2401.770	92.999	60.694	N/A	N/A	32.305	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 10:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by 2DH5 at channel 2402MHz	

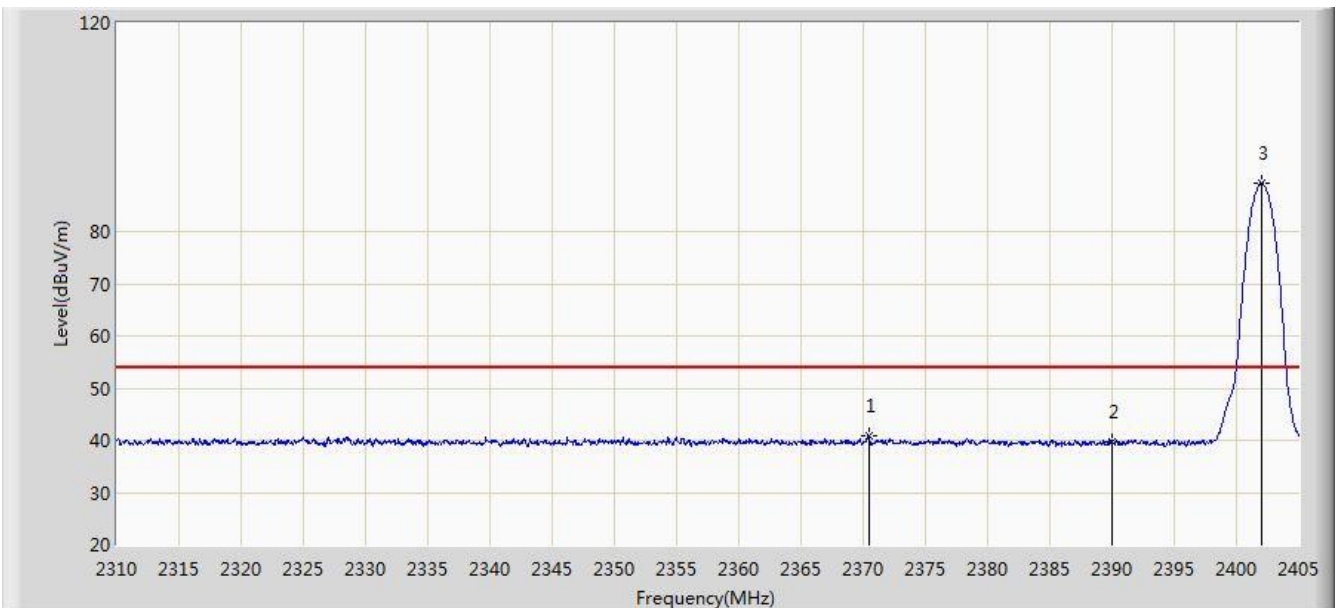


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2370.420	40.787	8.430	-13.213	54.000	32.357	AV
2			2390.000	39.793	7.466	-14.207	54.000	32.327	AV
3		*	2402.008	89.302	56.998	N/A	N/A	32.305	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 10:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by 2DH5 at channel 2402MHz	

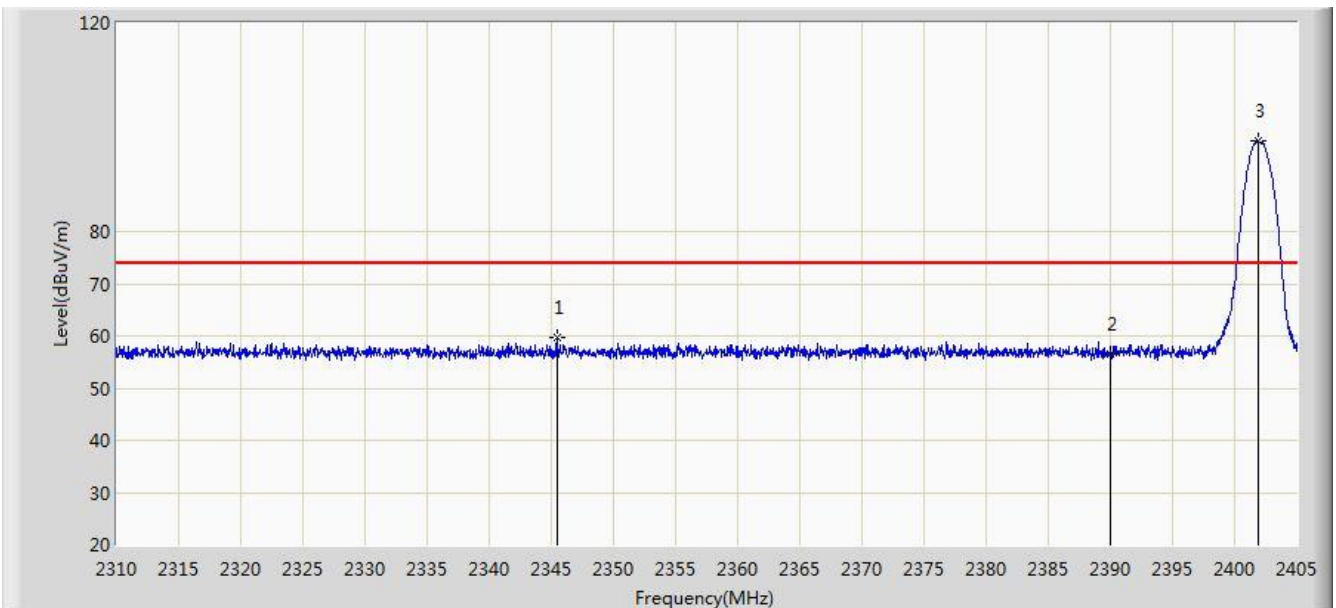


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2345.435	59.580	27.167	-14.420	74.000	32.414	PK
2			2390.000	56.501	24.174	-17.499	74.000	32.327	PK
3		*	2401.865	97.429	65.124	N/A	N/A	32.305	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 10:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by 2DH5 at channel 2402MHz	

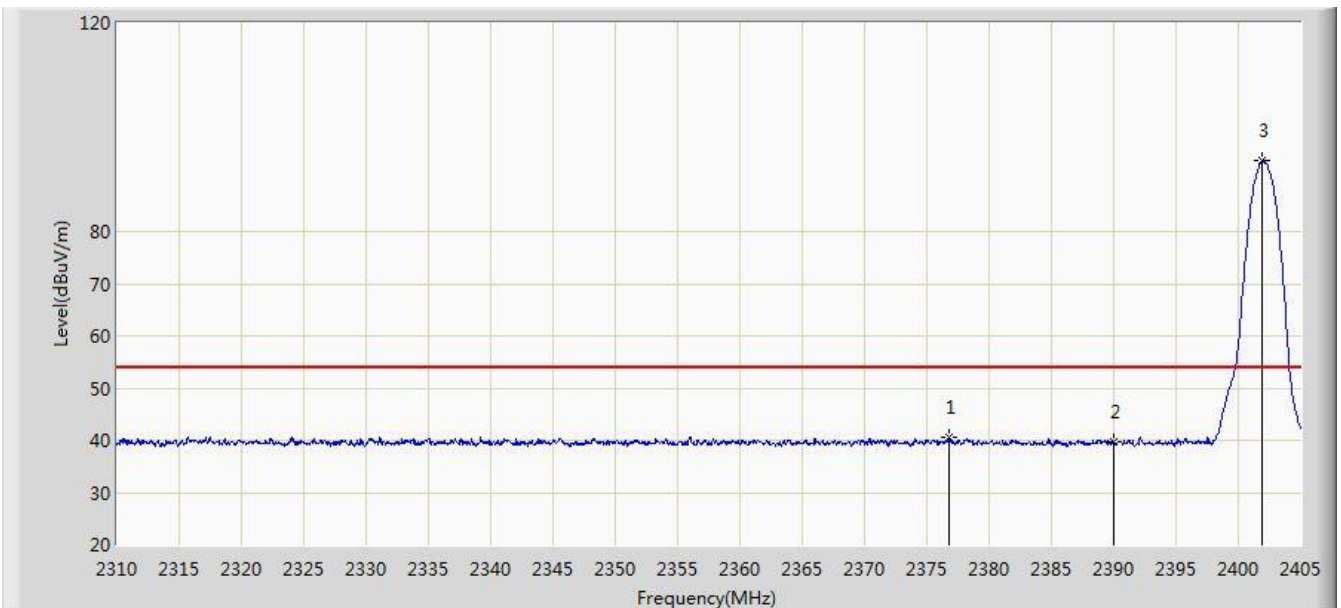


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2376.738	40.446	8.101	-13.554	54.000	32.345	AV
2			2390.000	39.683	7.356	-14.317	54.000	32.327	AV
3		*	2401.913	93.488	61.183	N/A	N/A	32.305	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 10:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by 2DH5 at channel 2480MHz	

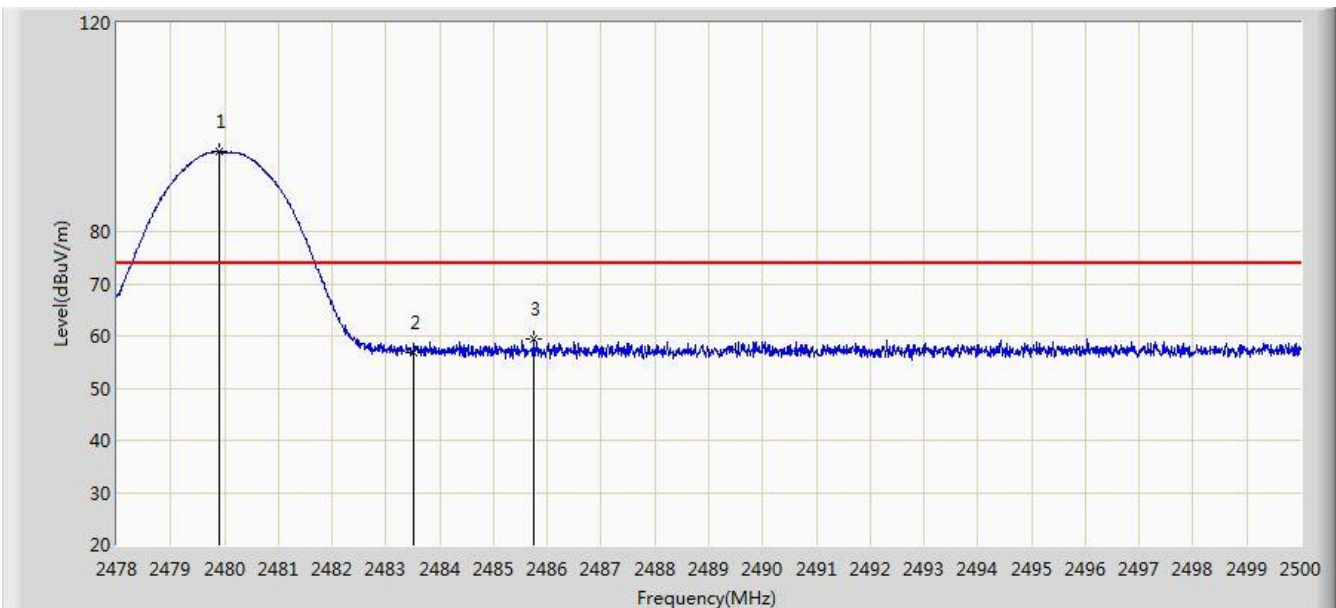

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.903	95.380	63.055	N/A	N/A	32.325	PK
2			2483.500	56.915	24.576	-17.085	74.000	32.340	PK
3			2485.755	59.484	27.136	-14.516	74.000	32.348	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 10:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by 2DH5 at channel 2480MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.057	91.506	59.180	N/A	N/A	32.325	AV
2			2483.500	40.608	8.269	-13.392	54.000	32.340	AV
3			2483.588	41.451	9.112	-12.549	54.000	32.340	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 10:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by 2DH5 at channel 2480MHz	

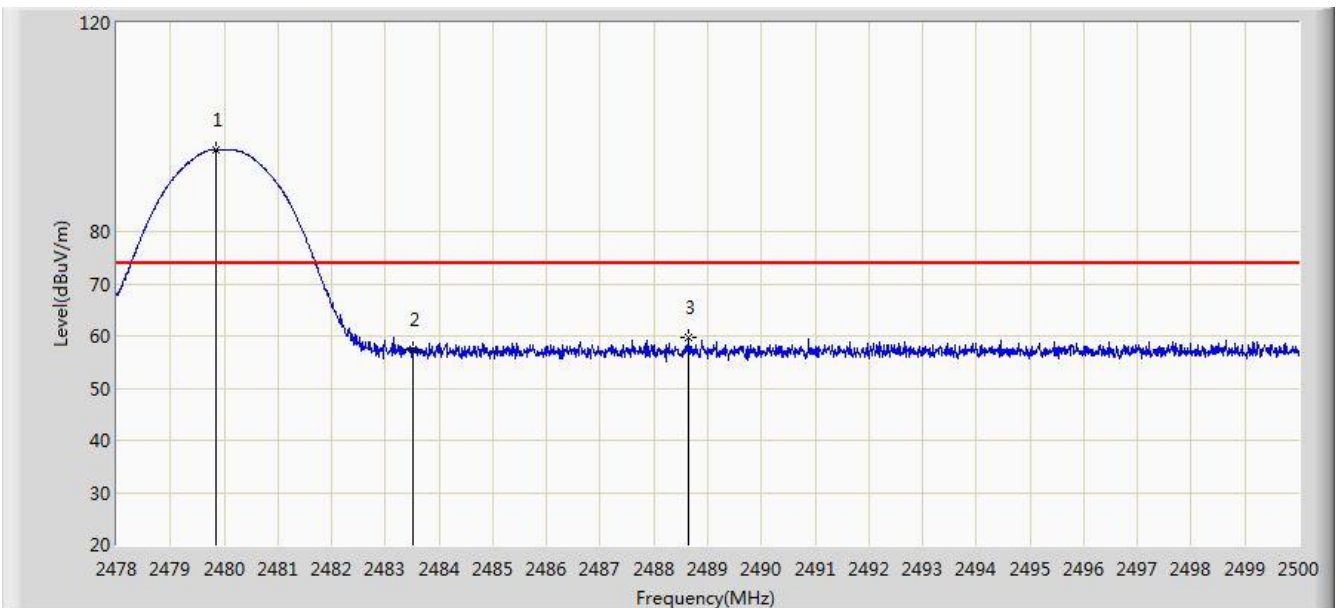


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.837	95.781	63.456	N/A	N/A	32.325	PK
2			2483.500	57.448	25.109	-16.552	74.000	32.340	PK
3			2488.648	59.593	27.234	-14.407	74.000	32.359	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 10:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by 2DH5 at channel 2480MHz	

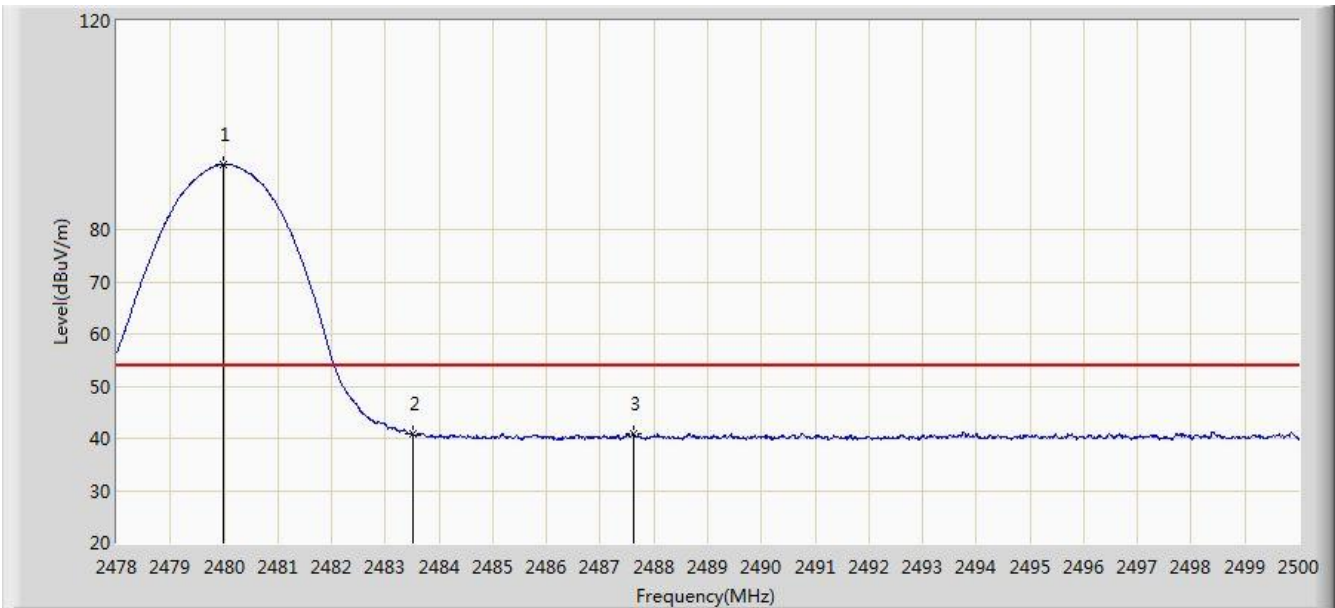


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.991	92.608	60.283	N/A	N/A	32.325	AV
2			2483.500	40.756	8.417	-13.244	54.000	32.340	AV
3			2487.614	40.997	8.642	-13.003	54.000	32.355	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 10:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by 3DH5 at channel 2402MHz	

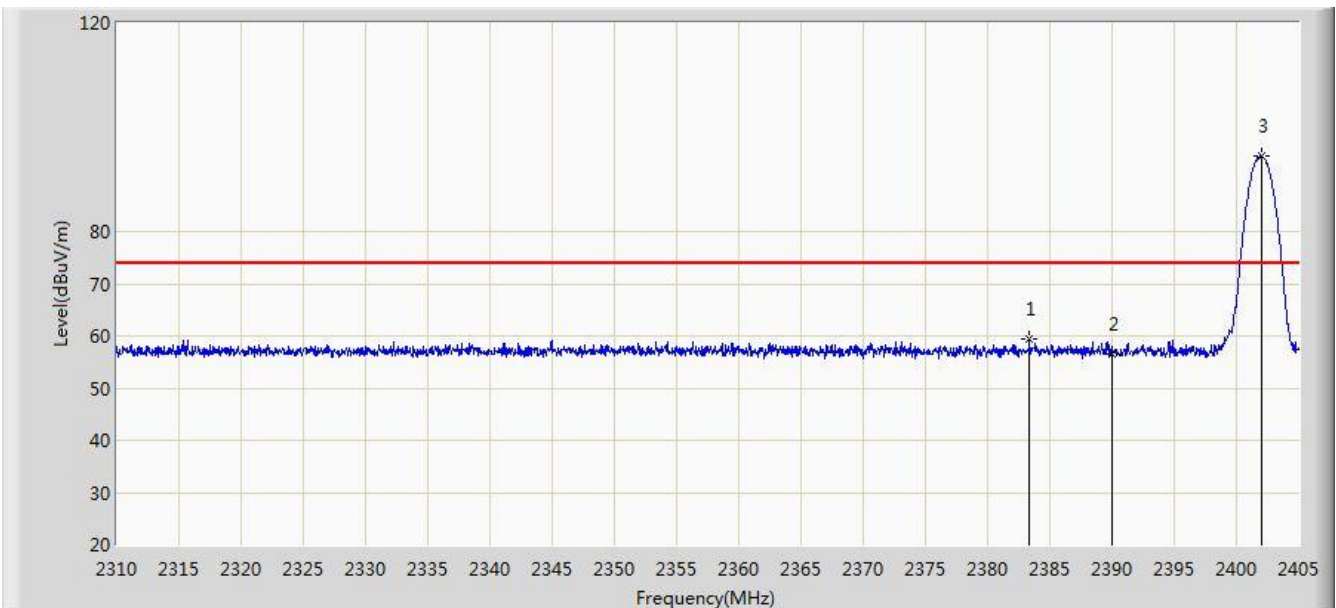


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.387	59.309	26.973	-14.691	74.000	32.336	PK
2			2390.000	56.452	24.125	-17.548	74.000	32.327	PK
3		*	2402.055	94.442	62.138	N/A	N/A	32.304	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 11:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by 3DH5 at channel 2402MHz	

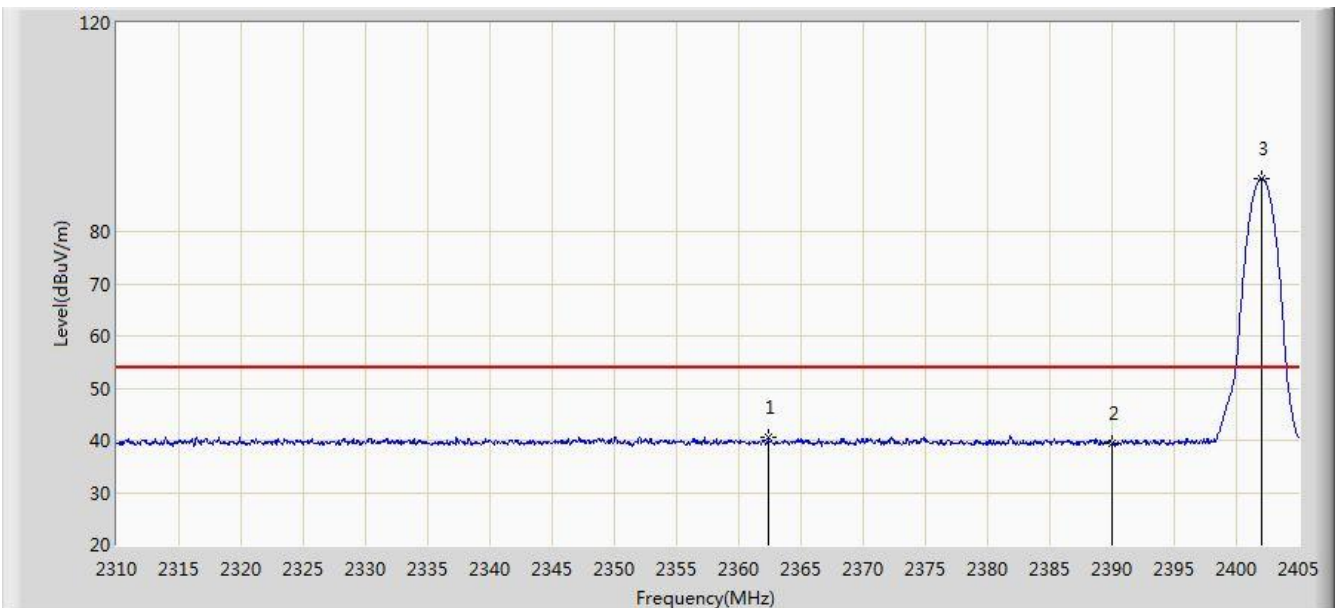


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2362.393	40.598	8.226	-13.402	54.000	32.373	AV
2			2390.000	39.358	7.031	-14.642	54.000	32.327	AV
3		*	2402.008	90.158	57.854	N/A	N/A	32.305	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 11:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by 3DH5 at channel 2402MHz	

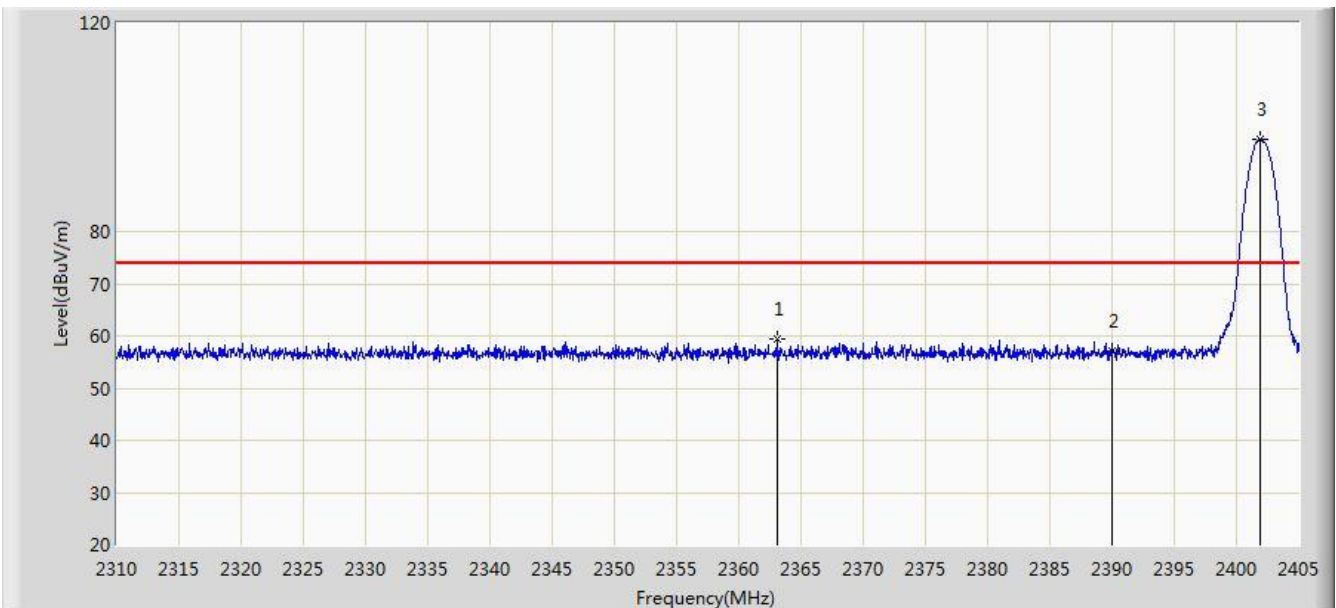


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2363.105	59.304	26.933	-14.696	74.000	32.371	PK
2			2390.000	57.236	24.909	-16.764	74.000	32.327	PK
3		*	2401.960	97.776	65.471	N/A	N/A	32.305	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 11:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by 3DH5 at channel 2402MHz	

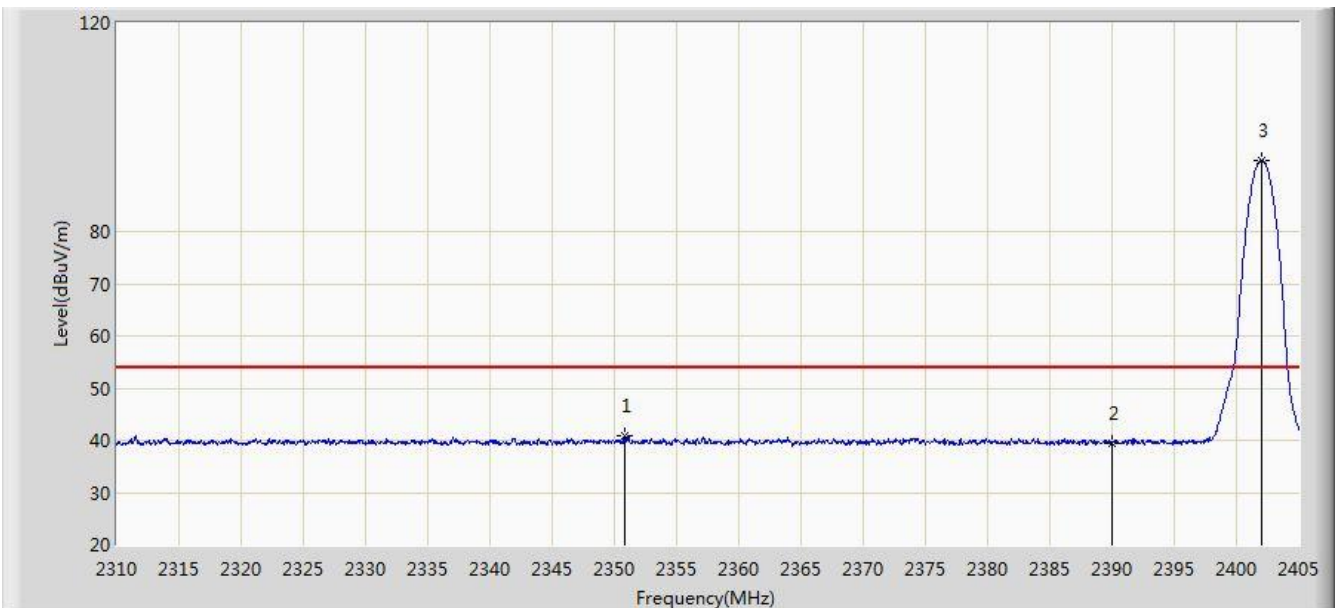


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2350.802	40.869	8.471	-13.131	54.000	32.398	AV
2			2390.000	39.436	7.109	-14.564	54.000	32.327	AV
3		*	2402.055	93.649	61.345	N/A	N/A	32.304	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 11:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by 3DH5 at channel 2480MHz	

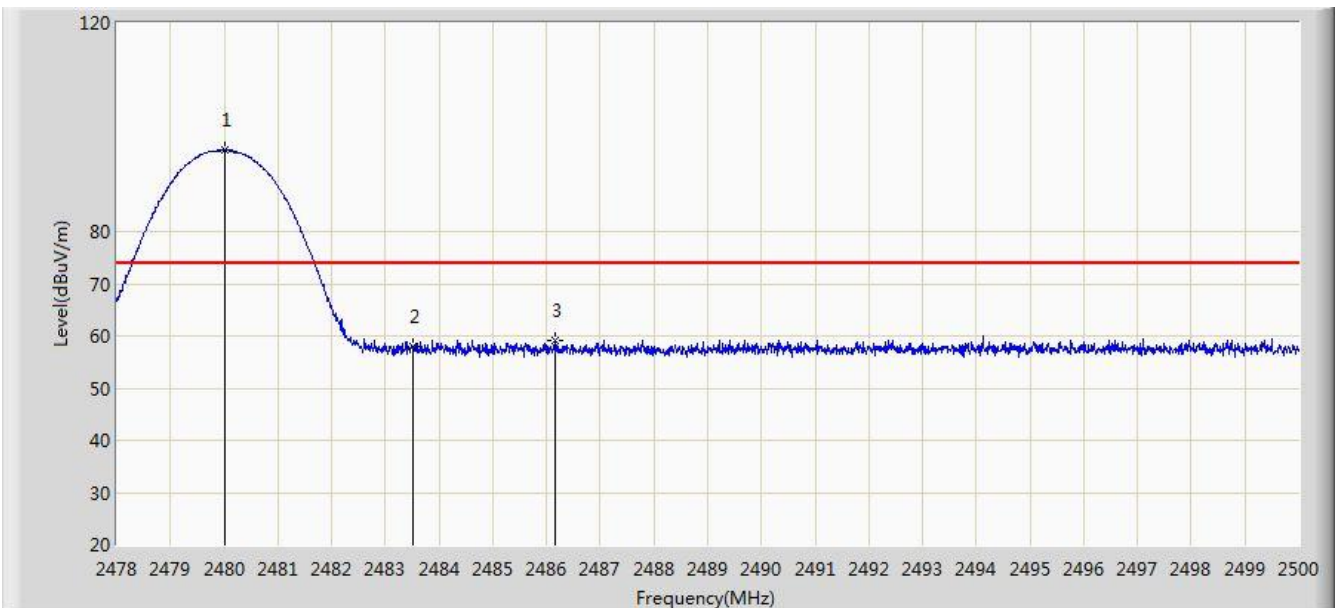

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.002	95.687	63.362	N/A	N/A	32.325	PK
2			2483.500	57.890	25.551	-16.110	74.000	32.340	PK
3			2486.151	59.146	26.796	-14.854	74.000	32.349	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 11:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by 3DH5 at channel 2480MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.024	91.556	59.231	N/A	N/A	32.325	AV
2			2483.500	41.285	8.946	-12.715	54.000	32.340	AV
3			2483.533	41.481	9.142	-12.519	54.000	32.340	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 11:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by 3DH5 at channel 2480MHz	

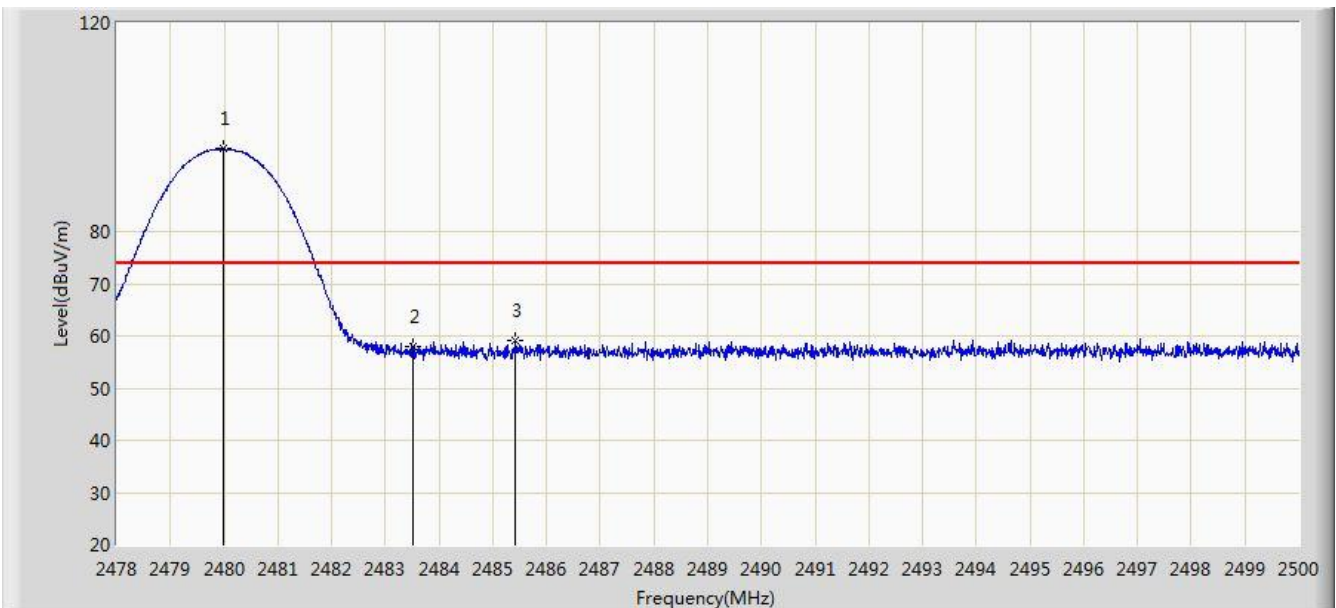


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.980	95.930	63.605	N/A	N/A	32.325	PK
2			2483.500	57.859	25.520	-16.141	74.000	32.340	PK
3			2485.425	59.176	26.829	-14.824	74.000	32.347	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/09 - 11:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Test Mode: Transmit by 3DH5 at channel 2480MHz	

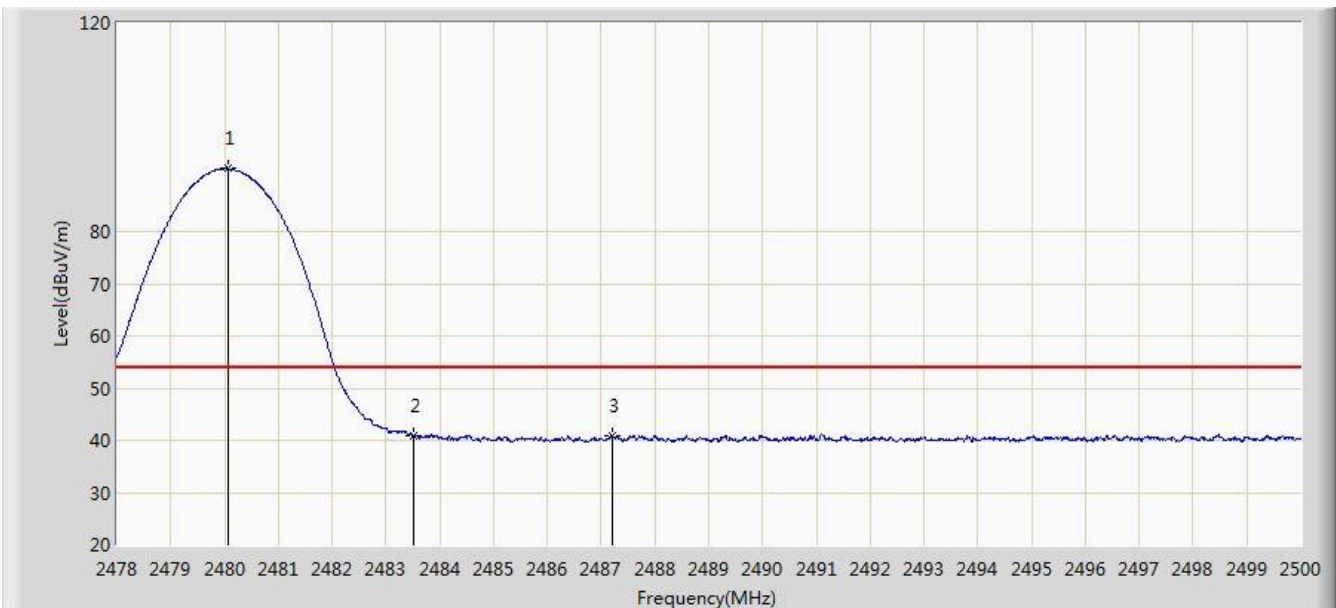


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.057	92.094	59.768	N/A	N/A	32.325	AV
2			2483.500	40.731	8.392	-13.269	54.000	32.340	AV
3			2487.207	40.792	8.438	-13.208	54.000	32.353	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

For Car Radio With Bluetooth with DAB

Site: AC1	Time: 2018/04/10 - 06:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by DH5 at Channel 2402MHz	

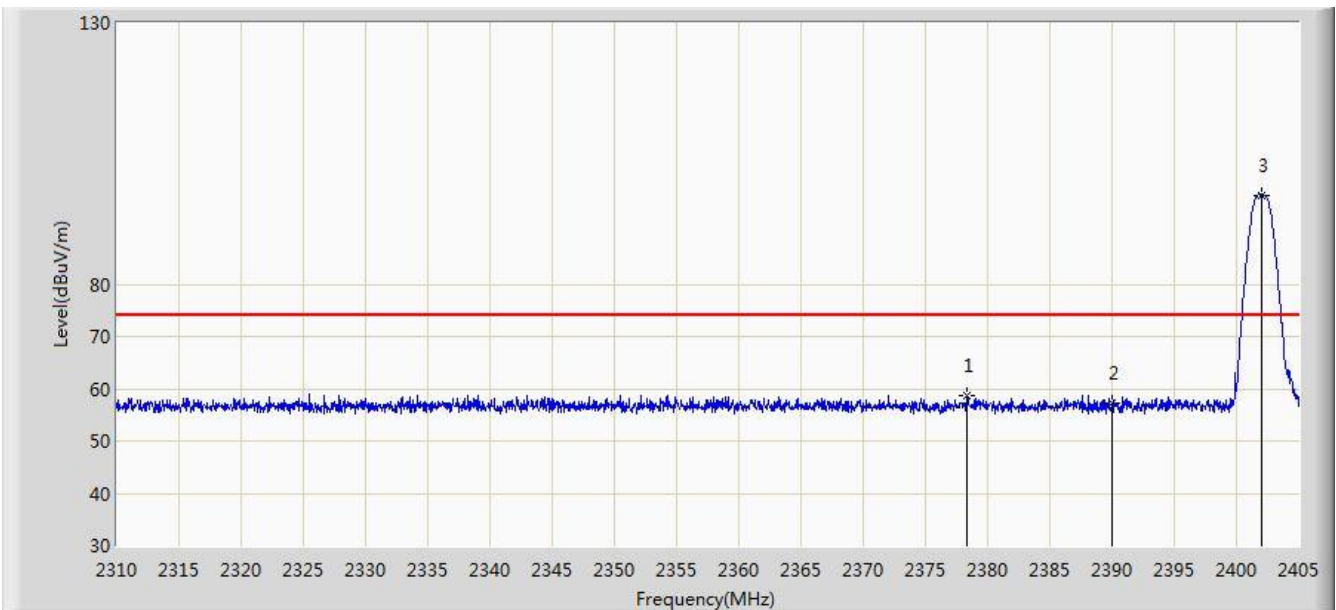


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2378.353	58.761	26.418	-15.239	74.000	32.343	PK
2			2390.000	57.239	24.912	-16.761	74.000	32.327	PK
3		*	2402.008	97.087	64.783	N/A	N/A	32.305	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by DH5 at Channel 2402MHz	

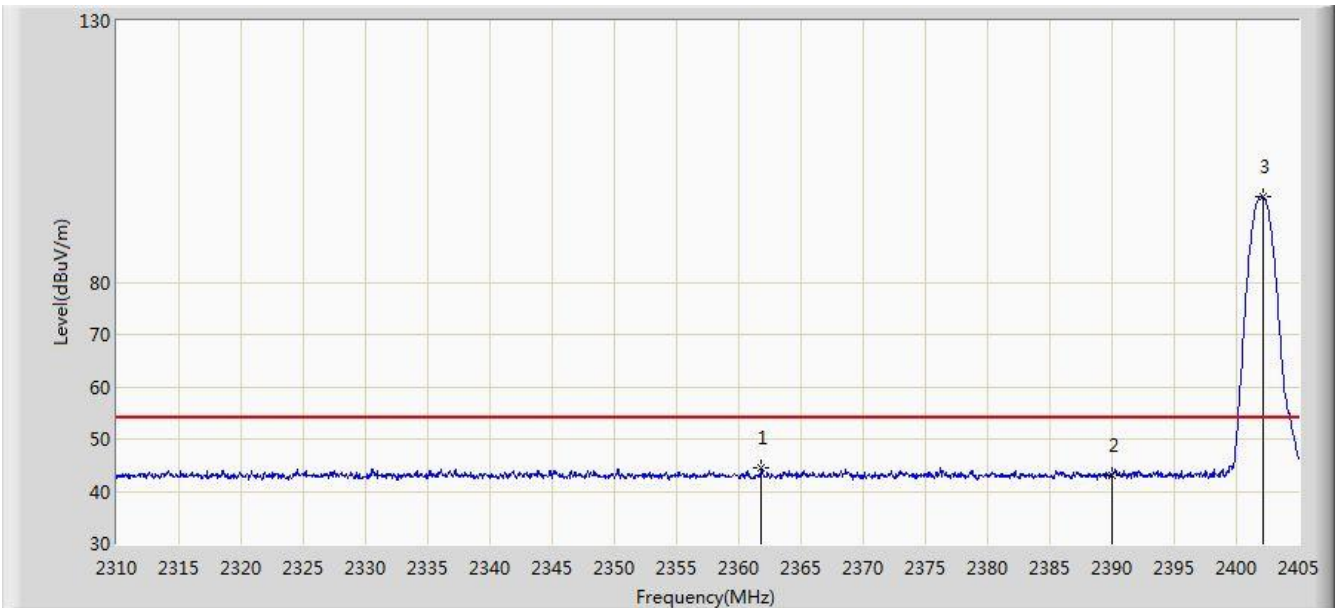


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2361.775	44.508	12.135	-9.492	54.000	32.373	AV
2			2390.000	43.025	10.698	-10.975	54.000	32.327	AV
3		*	2402.150	96.443	64.139	N/A	N/A	32.304	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by DH5 at Channel 2402MHz	

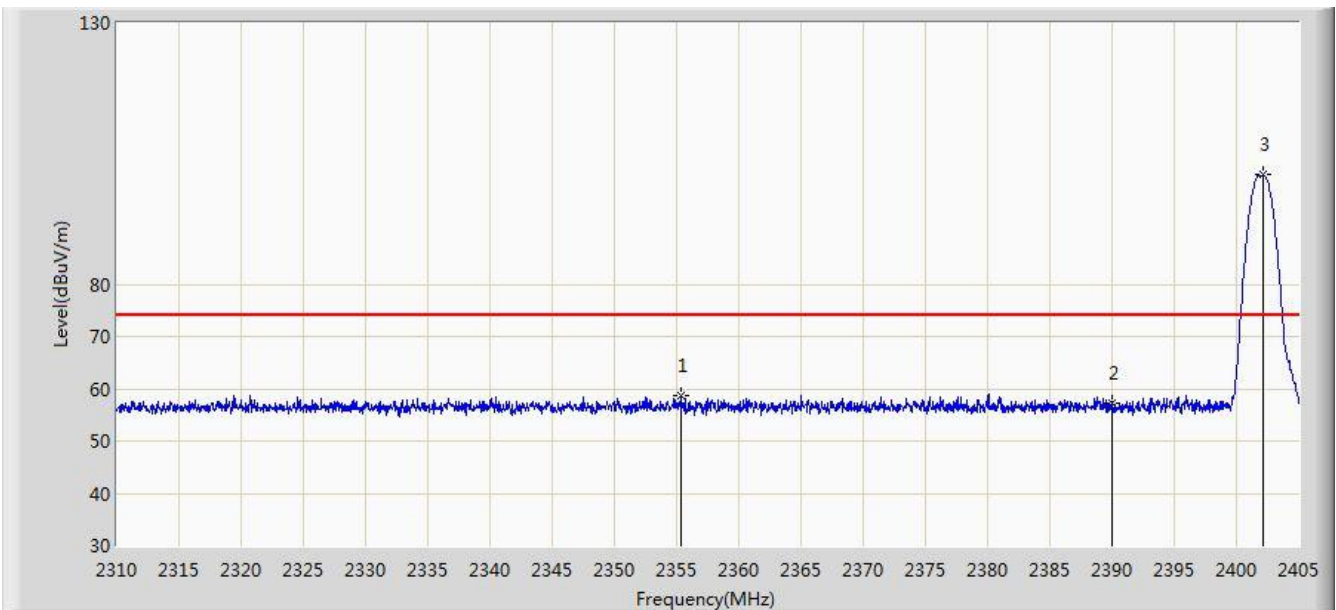


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2355.315	58.674	26.288	-15.326	74.000	32.386	PK
2			2390.000	57.314	24.987	-16.686	74.000	32.327	PK
3		*	2402.150	100.898	68.594	N/A	N/A	32.304	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by DH5 at Channel 2402MHz	

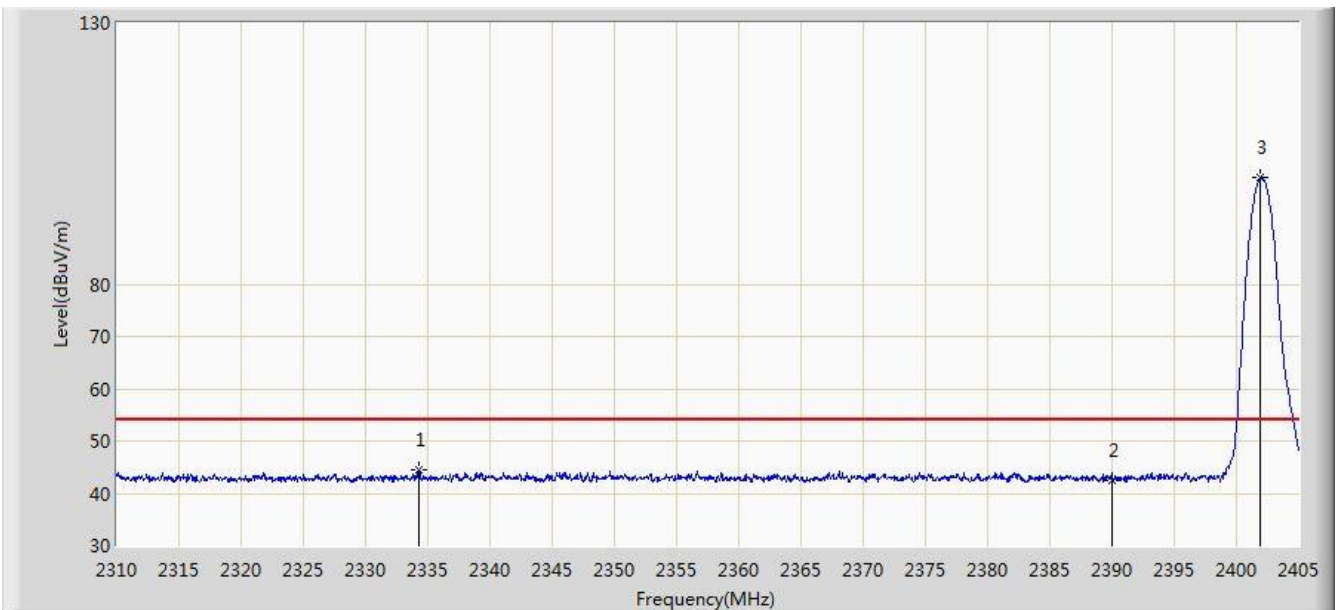


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2334.320	44.446	11.990	-9.554	54.000	32.456	AV
2			2390.000	42.352	10.025	-11.648	54.000	32.327	AV
3		*	2401.960	100.380	68.075	N/A	N/A	32.305	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by DH5 at Channel 2480MHz	

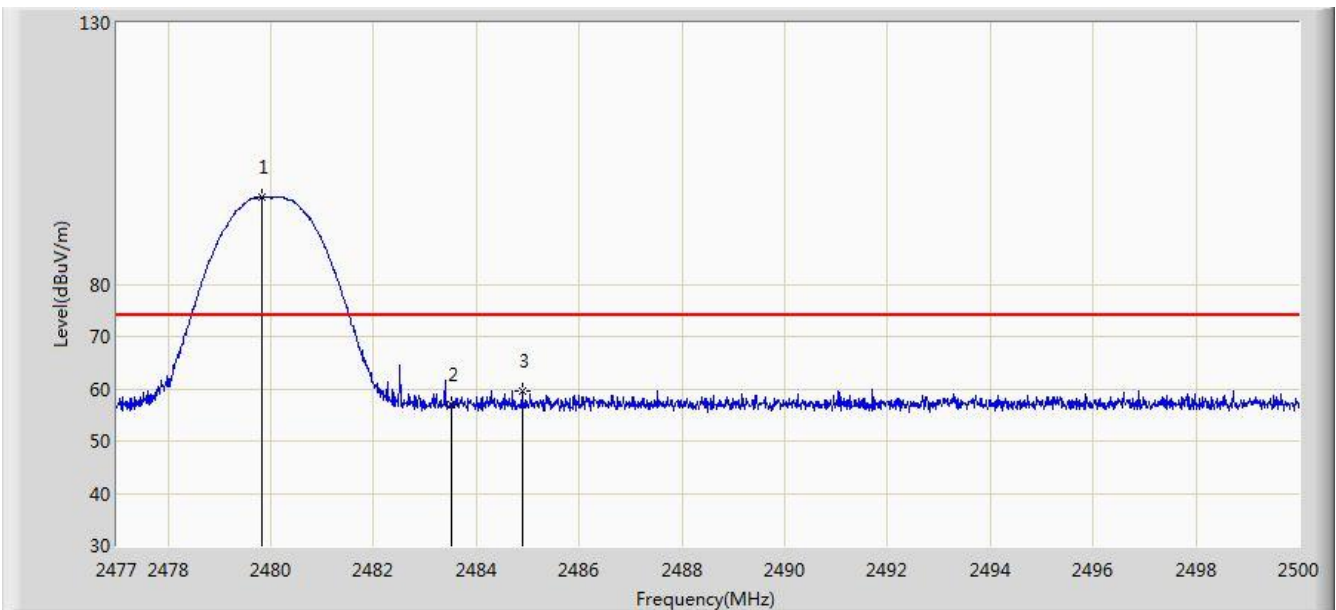


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.817	96.693	64.368	N/A	N/A	32.325	PK
2			2483.500	57.071	24.732	-16.929	74.000	32.340	PK
3			2484.889	59.489	27.144	-14.511	74.000	32.344	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by DH5 at Channel 2480MHz	

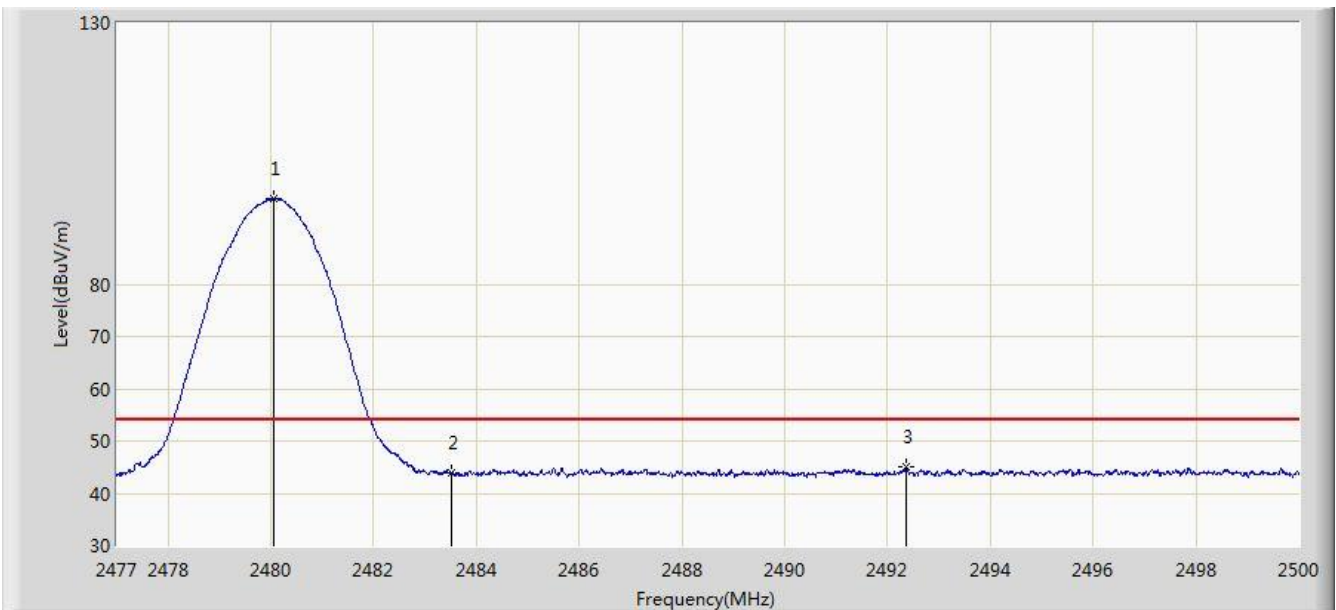


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.048	96.307	63.981	N/A	N/A	32.325	AV
2			2483.500	44.032	11.693	-9.968	54.000	32.340	AV
3			2492.364	45.157	12.783	-8.843	54.000	32.374	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by DH5 at Channel 2480MHz	

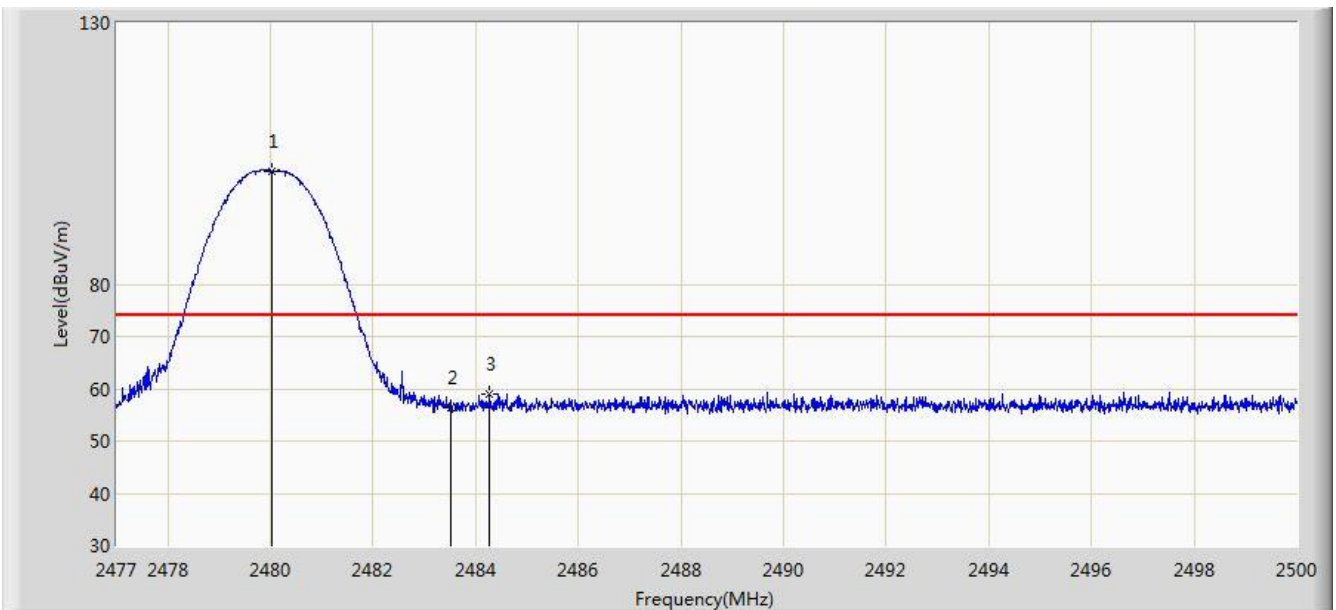

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.024	101.686	69.361	N/A	N/A	32.325	PK
2			2483.500	56.303	23.964	-17.697	74.000	32.340	PK
3			2484.268	59.107	26.765	-14.893	74.000	32.342	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by DH5 at Channel 2480MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.956	101.301	68.976	N/A	N/A	32.325	AV
2			2483.500	44.730	12.391	-9.270	54.000	32.340	AV
3			2488.466	45.141	12.782	-8.859	54.000	32.359	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by 2DH5 at Channel 2402MHz	

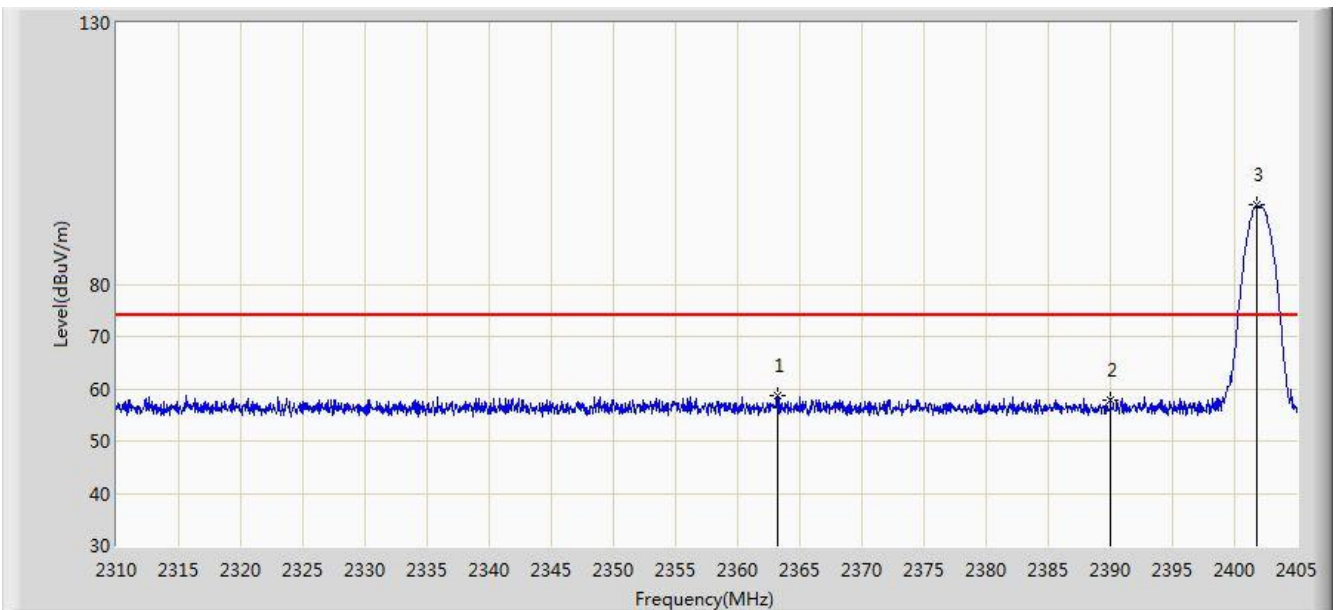


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2363.200	58.743	26.372	-15.257	74.000	32.370	PK
2			2390.000	57.846	25.519	-16.154	74.000	32.327	PK
3		*	2401.770	95.091	62.786	N/A	N/A	32.305	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by 2DH5 at Channel 2402MHz	

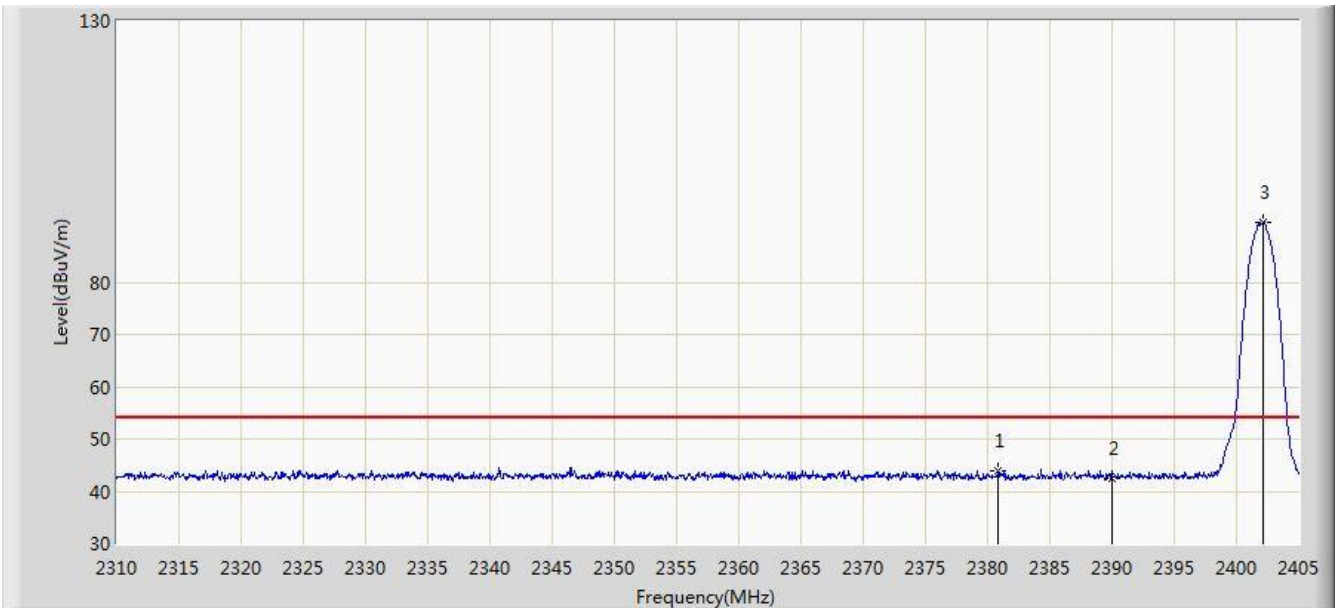


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2380.823	43.949	11.610	-10.051	54.000	32.340	AV
2			2390.000	42.464	10.137	-11.536	54.000	32.327	AV
3		*	2402.150	91.549	59.245	N/A	N/A	32.304	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by 2DH5 at Channel 2402MHz	

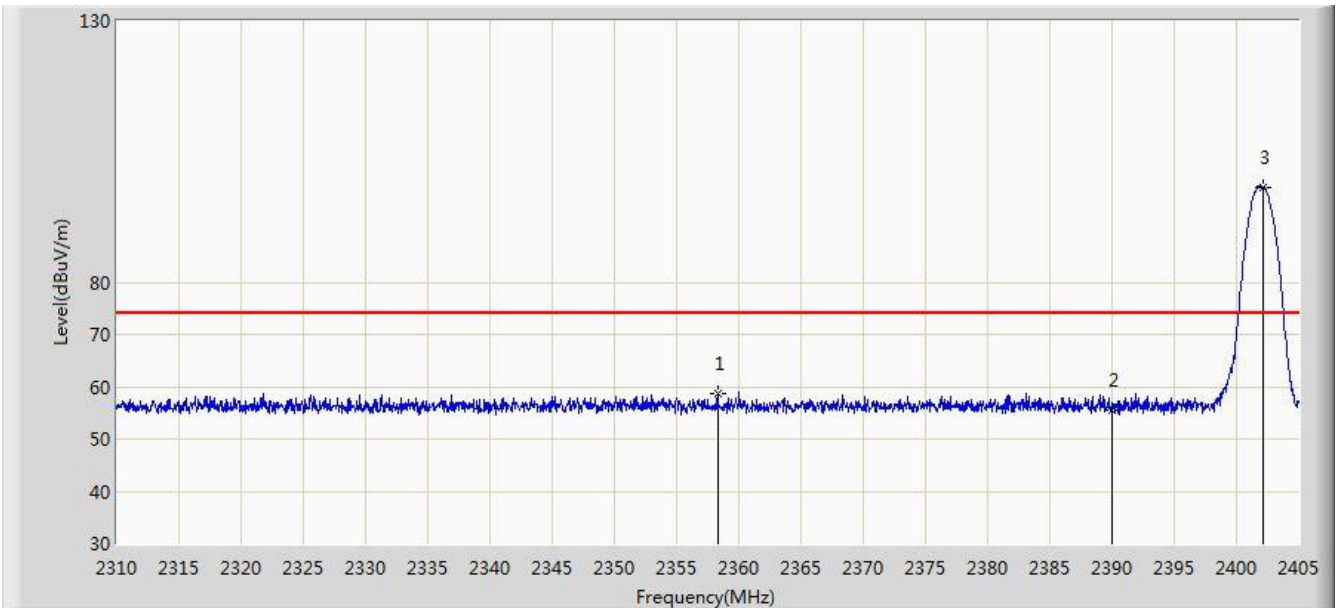


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2358.308	58.795	26.416	-15.205	74.000	32.379	PK
2			2390.000	55.451	23.124	-18.549	74.000	32.327	PK
3		*	2402.150	98.194	65.890	N/A	N/A	32.304	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by 2DH5 at Channel 2402MHz	

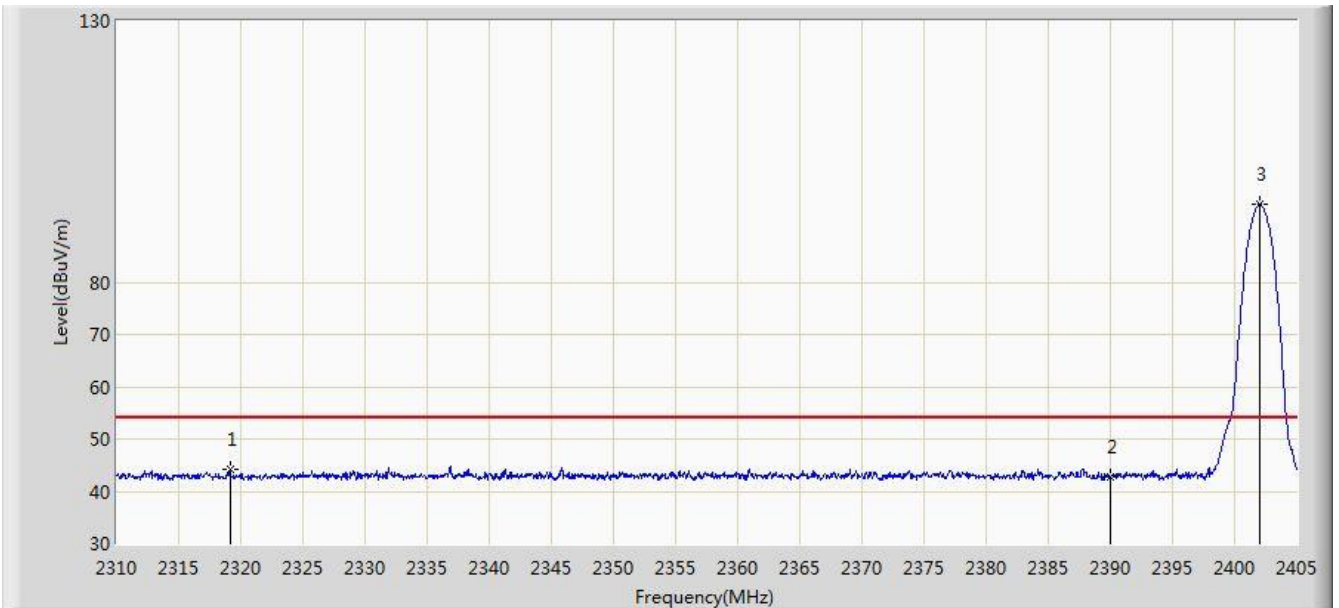


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2319.120	44.134	11.615	-9.866	54.000	32.519	AV
2			2390.000	42.714	10.387	-11.286	54.000	32.327	AV
3		*	2402.008	94.835	62.531	N/A	N/A	32.305	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by 2DH5 at Channel 2480MHz	

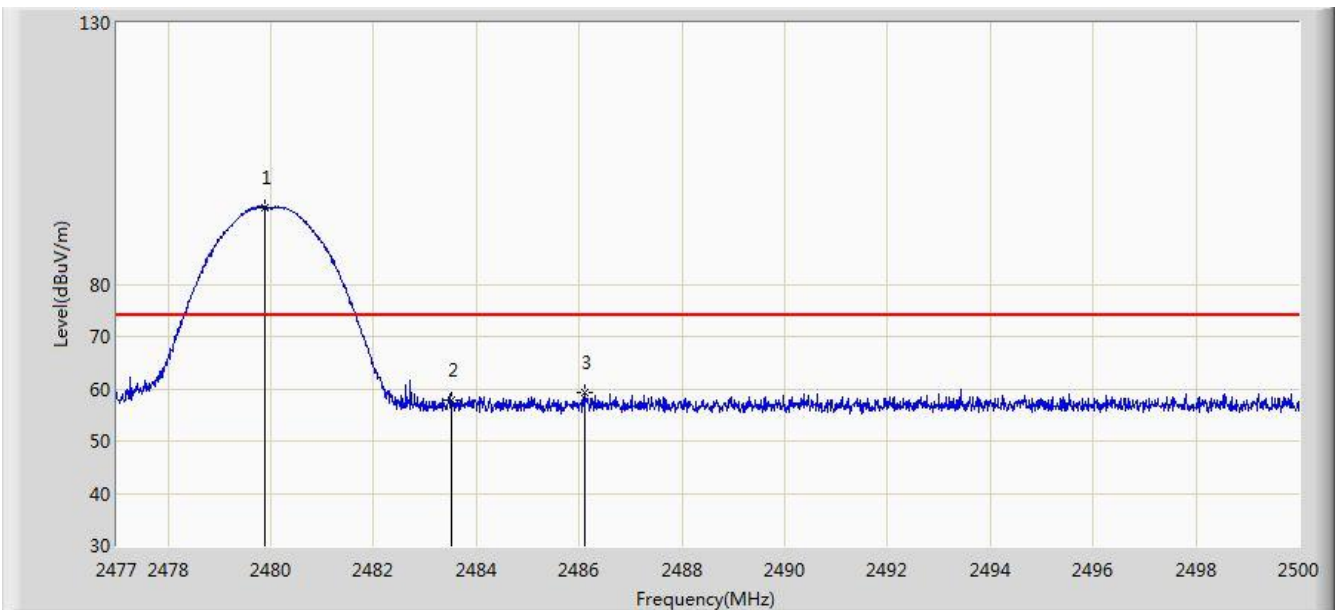


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.886	94.763	62.438	N/A	N/A	32.325	PK
2			2483.500	57.956	25.617	-16.044	74.000	32.340	PK
3			2486.119	59.201	26.852	-14.799	74.000	32.349	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by 2DH5 at Channel 2480MHz	

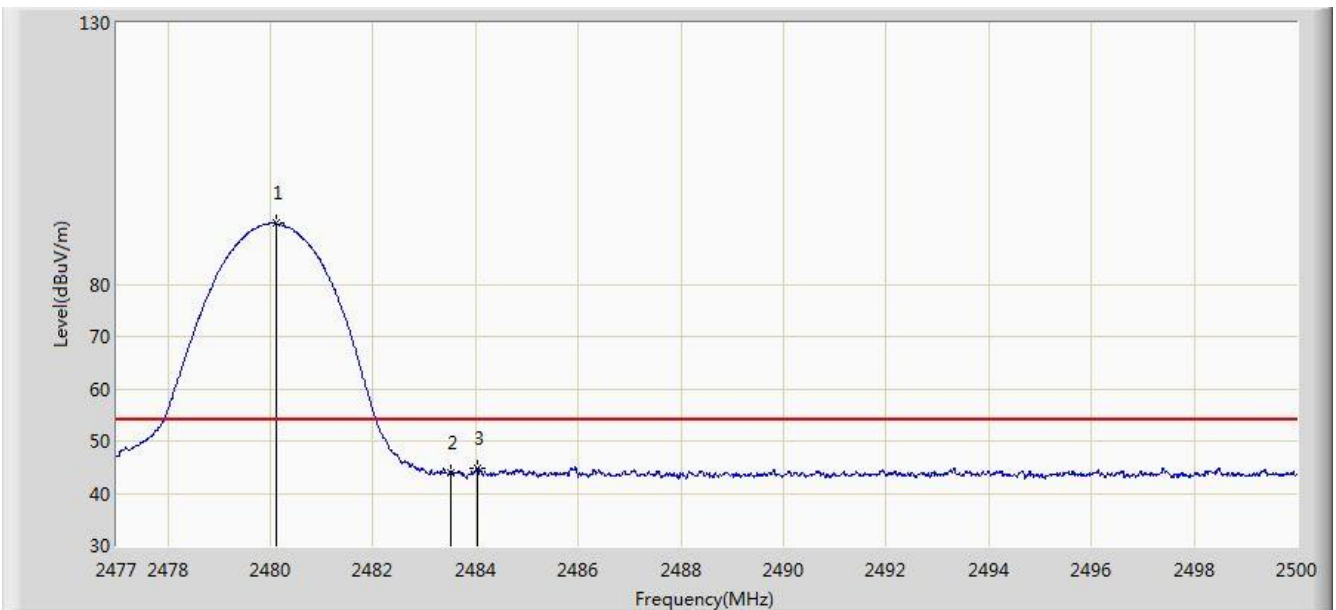


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.105	91.698	59.372	N/A	N/A	32.325	AV
2			2483.500	43.877	11.538	-10.123	54.000	32.340	AV
3			2484.038	44.900	12.559	-9.100	54.000	32.342	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by 2DH5 at Channel 2480MHz	

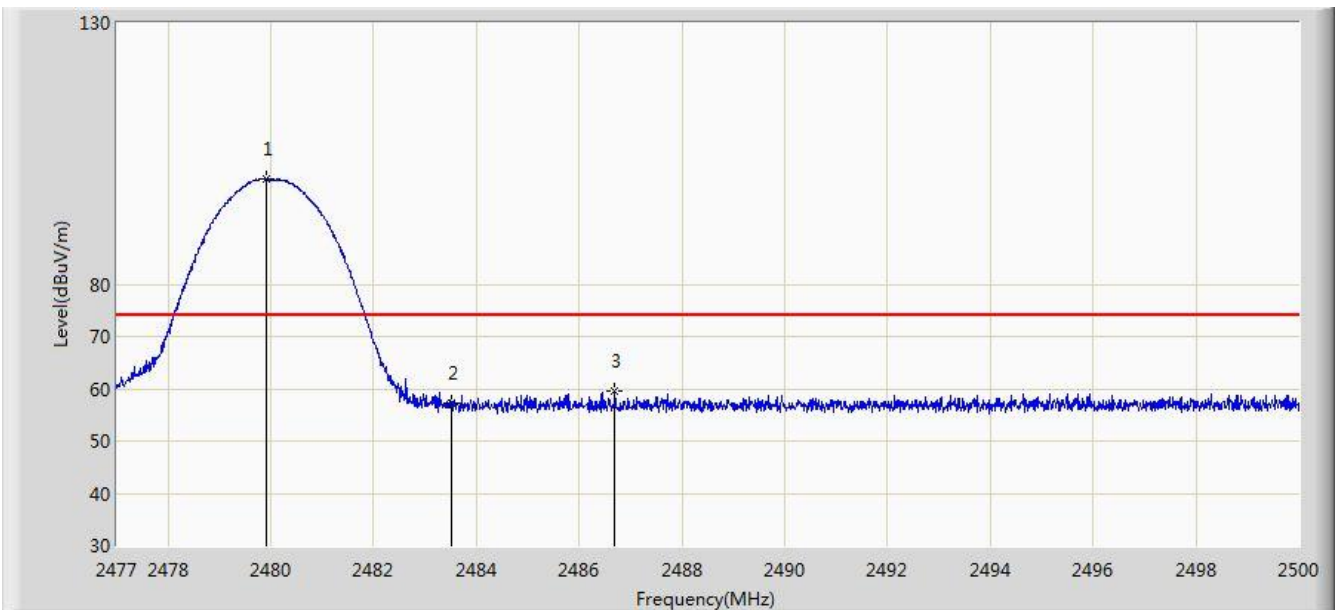


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.921	100.234	67.909	N/A	N/A	32.325	PK
2			2483.500	57.351	25.012	-16.649	74.000	32.340	PK
3			2486.683	59.687	27.335	-14.313	74.000	32.351	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by 2DH5 at Channel 2480MHz	

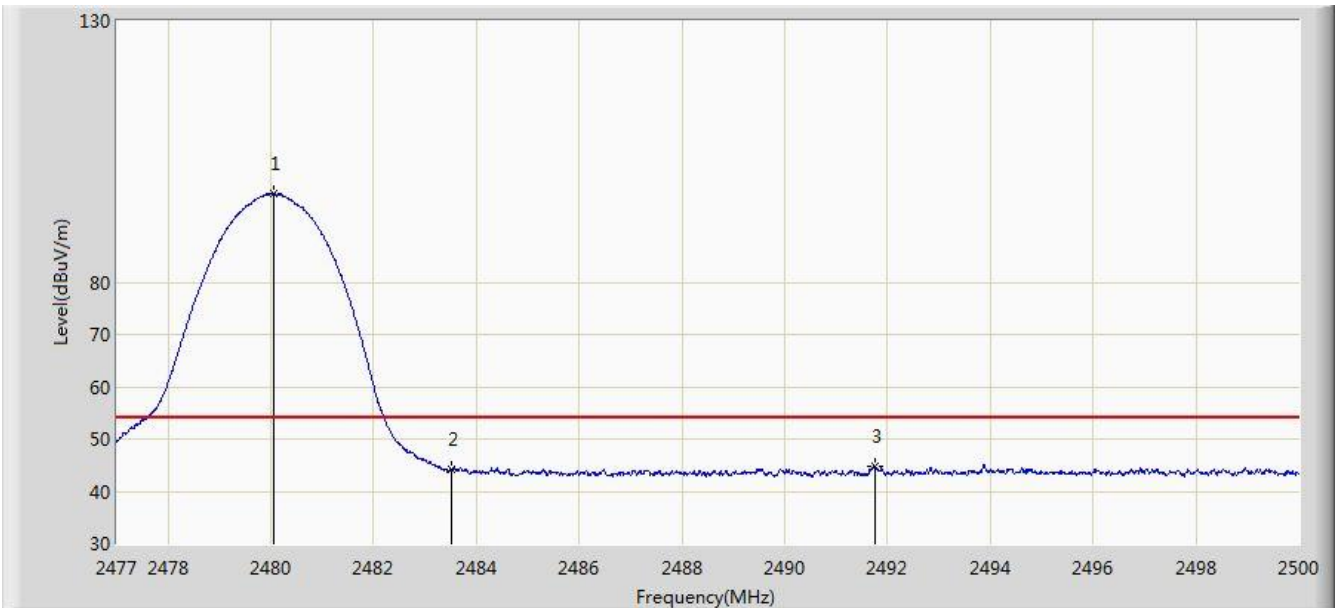


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.059	96.859	64.533	N/A	N/A	32.325	AV
2			2483.500	44.163	11.824	-9.837	54.000	32.340	AV
3			2491.743	44.878	12.506	-9.122	54.000	32.372	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by 3DH5 at Channel 2402MHz	

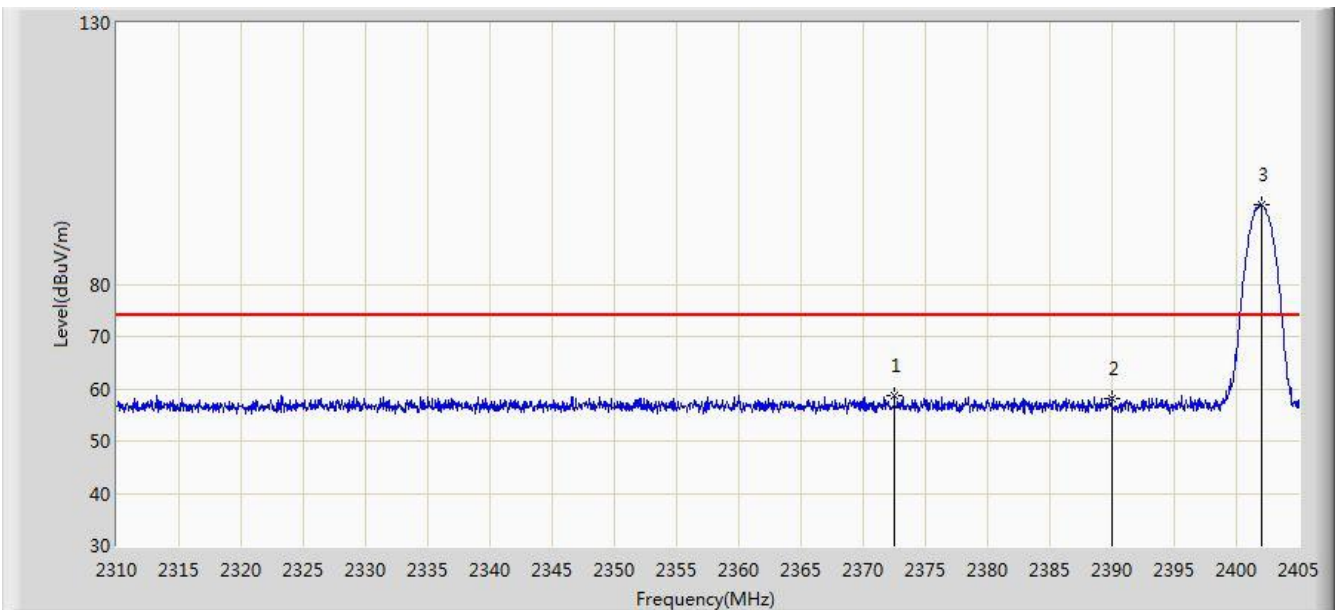


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2372.510	58.739	26.386	-15.261	74.000	32.353	PK
2			2390.000	58.072	25.745	-15.928	74.000	32.327	PK
3		*	2402.055	95.267	62.963	N/A	N/A	32.304	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by 3DH5 at Channel 2402MHz	

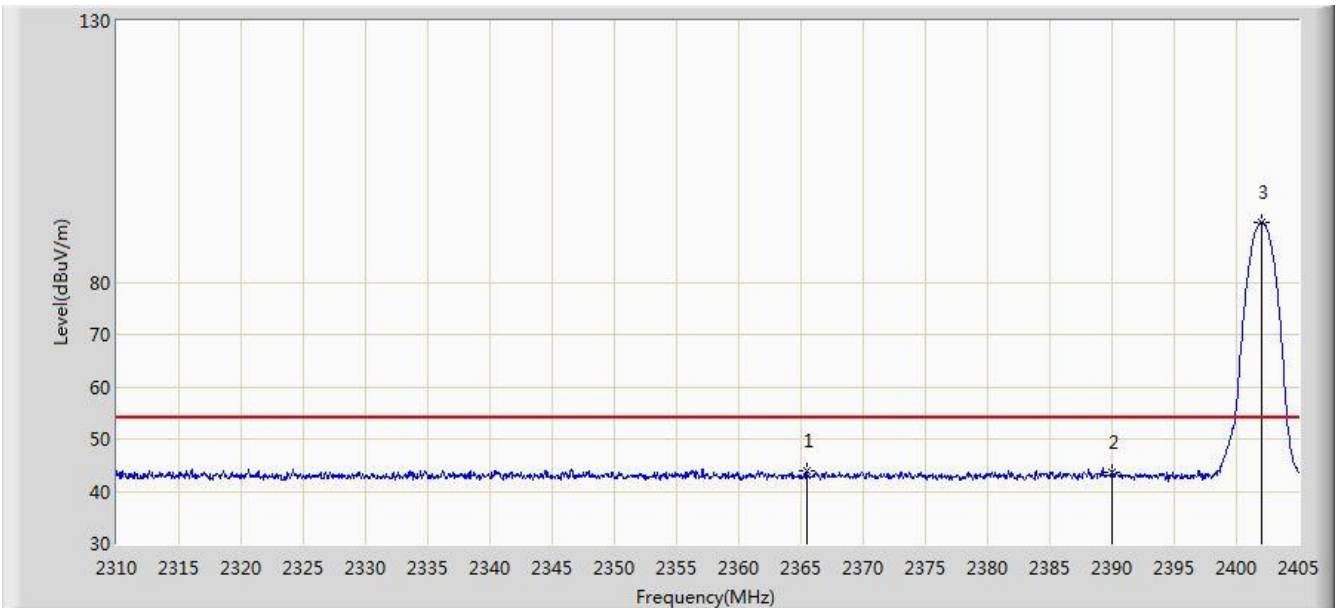


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2365.480	43.851	11.485	-10.149	54.000	32.367	AV
2			2390.000	43.719	11.392	-10.281	54.000	32.327	AV
3		*	2402.008	91.424	59.120	N/A	N/A	32.305	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by 3DH5 at Channel 2402MHz	

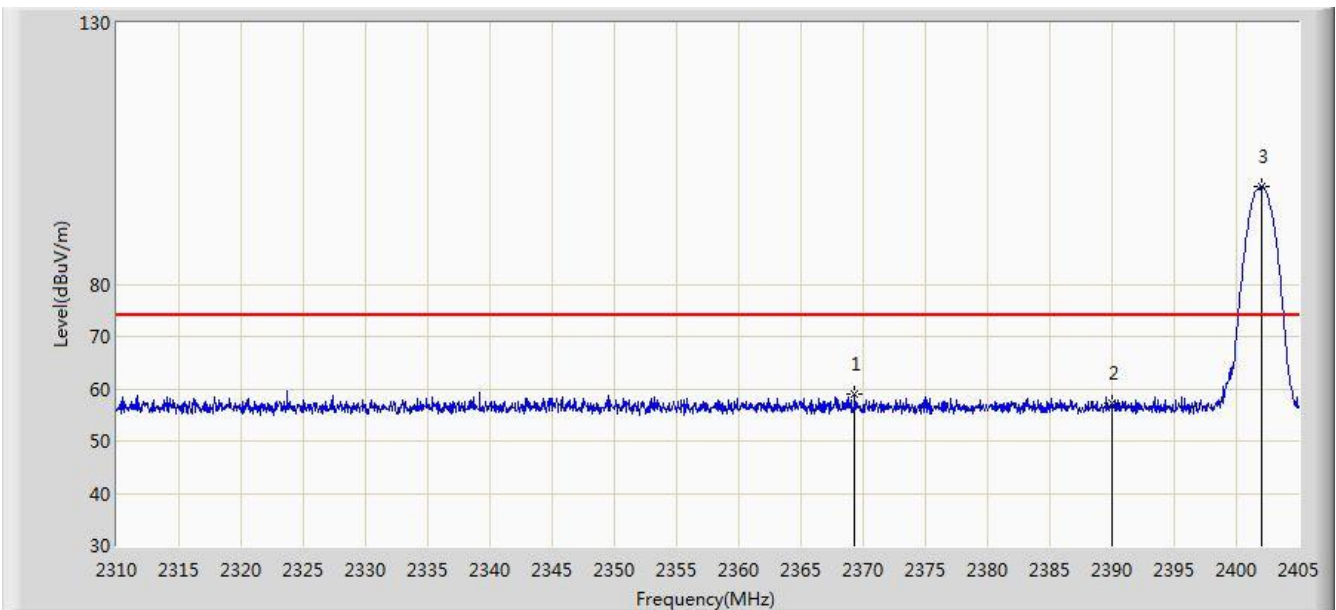


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2369.327	58.930	26.571	-15.070	74.000	32.360	PK
2			2390.000	57.143	24.816	-16.857	74.000	32.327	PK
3		*	2402.055	98.827	66.523	N/A	N/A	32.304	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by 3DH5 at Channel 2402MHz	

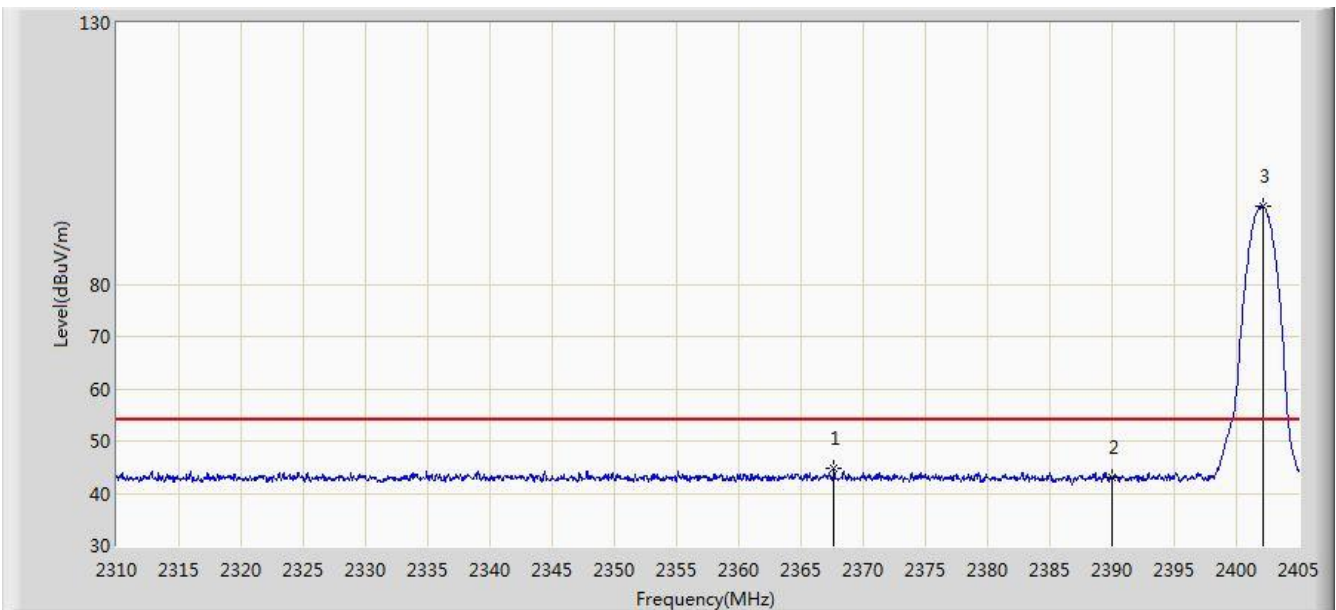


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2367.665	44.772	12.410	-9.228	54.000	32.362	AV
2			2390.000	43.017	10.690	-10.983	54.000	32.327	AV
3		*	2402.150	94.919	62.615	N/A	N/A	32.304	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by 3DH5 at Channel 2480MHz	

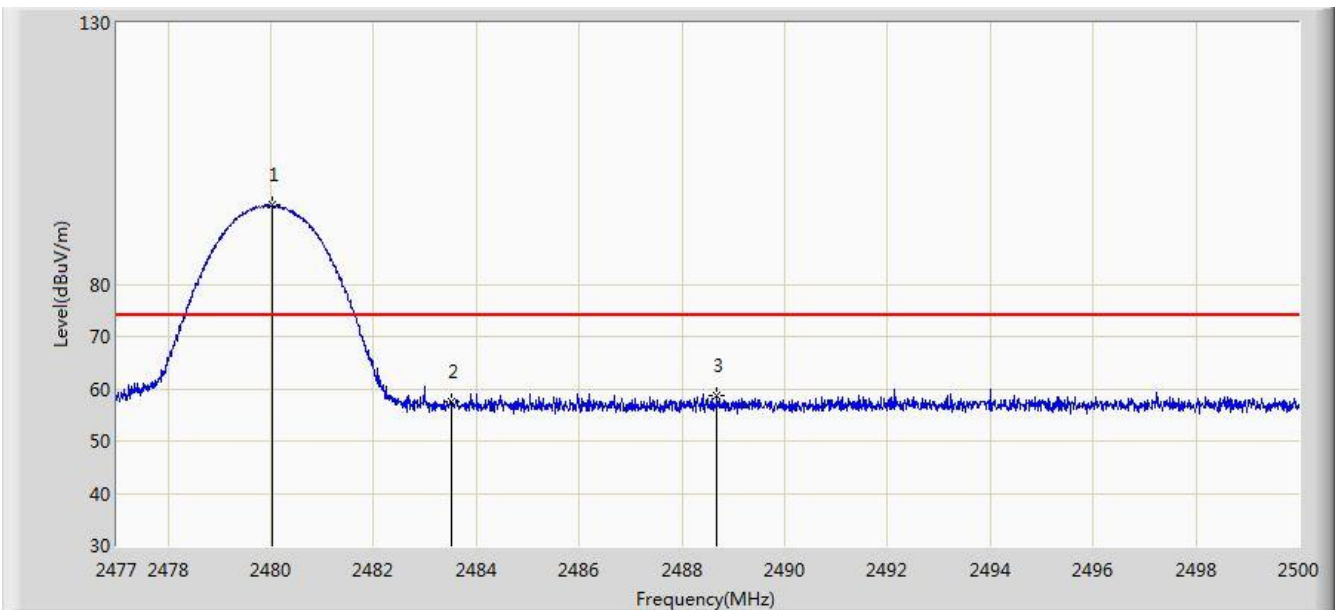


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.024	95.139	62.814	N/A	N/A	32.325	PK
2			2483.500	57.642	25.303	-16.358	74.000	32.340	PK
3			2488.684	58.759	26.400	-15.241	74.000	32.360	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by 3DH5 at Channel 2480MHz	

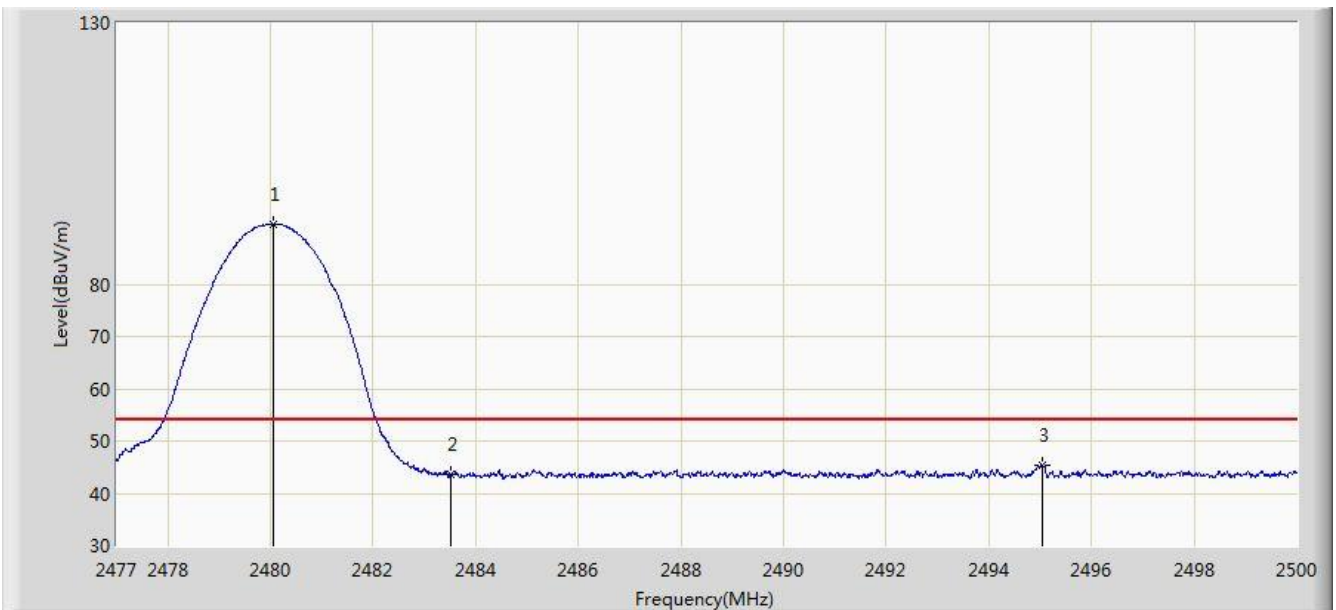


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.059	91.516	59.190	N/A	N/A	32.325	AV
2			2483.500	43.679	11.340	-10.321	54.000	32.340	AV
3			2495.043	45.416	13.032	-8.584	54.000	32.384	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by 3DH5 at Channel 2480MHz	

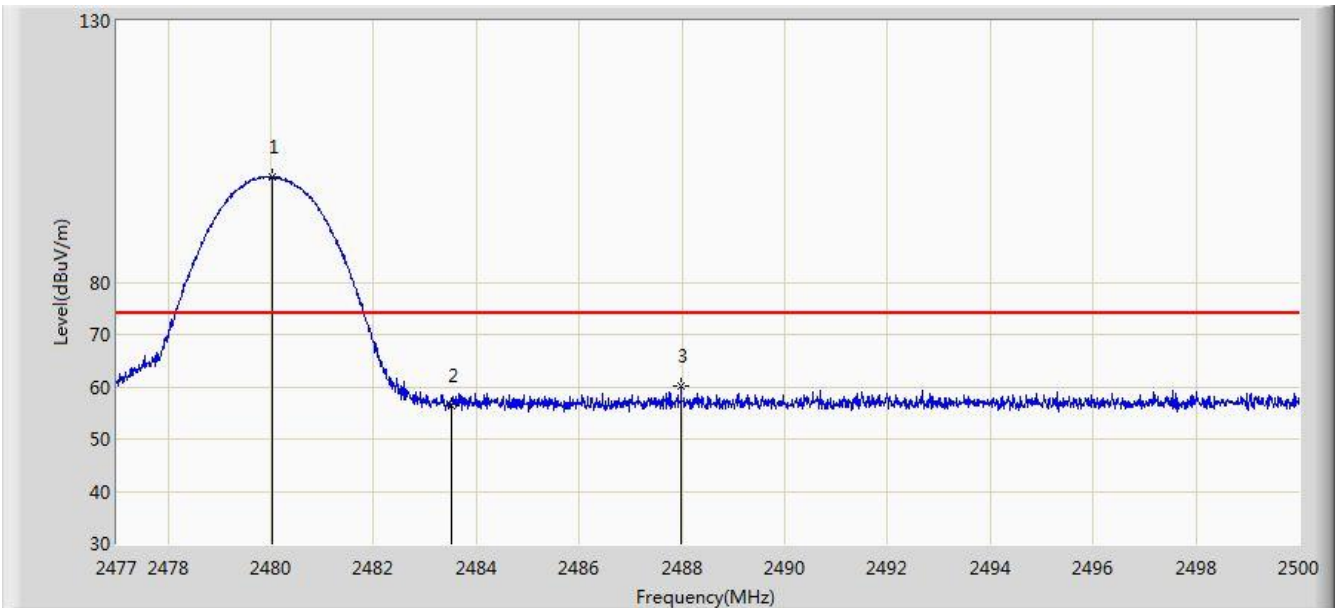


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.036	100.156	67.830	N/A	N/A	32.325	PK
2			2483.500	56.245	23.906	-17.755	74.000	32.340	PK
3			2487.982	60.019	27.662	-13.981	74.000	32.357	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/04/10 - 06:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Car Radio With Bluetooth	Power: DC 12V
Note: Transmit by 3DH5 at Channel 2480MHz	

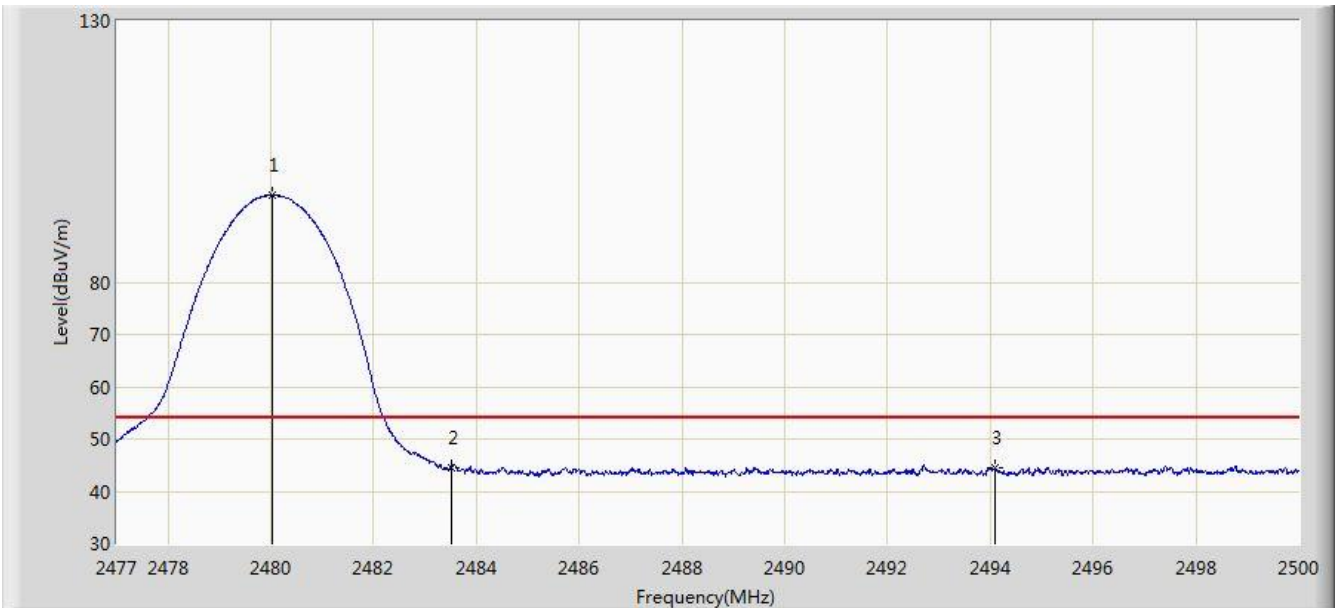

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.024	96.620	64.295	N/A	N/A	32.325	AV
2			2483.500	44.485	12.146	-9.515	54.000	32.340	AV
3			2494.089	44.630	12.249	-9.370	54.000	32.381	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.11.AC Conducted Emissions Measurement


7.11.1.Test Limit

FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits		
Frequency (MHz)	QP (dBμV)	Average (dBμV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.11.2.Test Setup

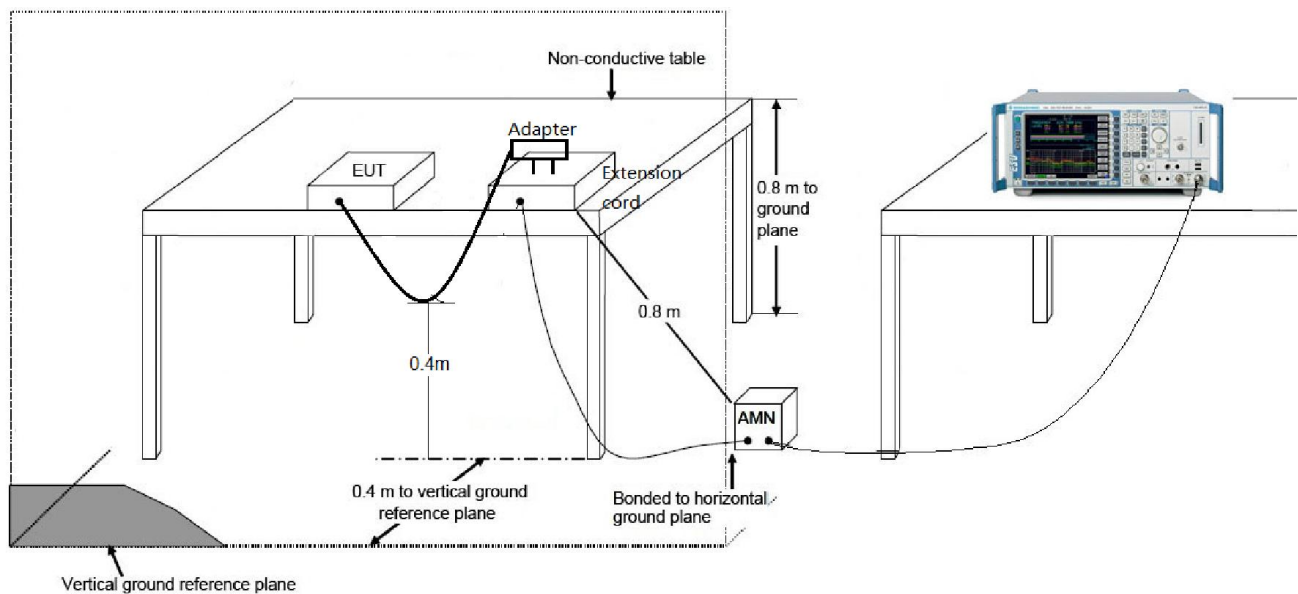

7.11.3.Test Result

Power supply is by 12V DC Source, so this item is not evaluated.

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15C of the FCC Rules.

The End