



RADIO TEST REPORT

FCC ID : RRK-W1700A3
Equipment : Wi-Fi 7 Router
Brand Name : Quantum Fiber from AT&T / Lumen
Model Name : W1700A
Applicant : Alpha Networks Inc.
No.8 Li-Hsin 7th Rd., Hsinchu Science Park,
Hsinchu 300094. Taiwan, R.O.C.
Standard : 47 CFR FCC Part 15.247

The product was received on Feb. 04, 2026, and testing was started from Feb. 04, 2026 and completed on May 19, 2026. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	9
1.3 Testing Location Information	9
1.4 Measurement Uncertainty	9
2 Test Configuration of EUT	10
2.1 Test Channel Mode	10
2.2 The Worst Case Measurement Configuration	11
2.3 EUT Operation during Test	13
2.4 Accessories	13
2.5 Support Equipment.....	14
2.6 Test Setup Diagram	16
3 Transmitter Test Result	21
3.1 AC Power-line Conducted Emissions	21
3.2 DTS Bandwidth.....	23
3.3 Maximum Conducted Output Power	24
3.4 Power Spectral Density	27
3.5 Emissions in Non-restricted Frequency Bands	29
3.6 Emissions in Restricted Frequency Bands.....	30
4 Test Equipment and Calibration Data	35
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Results of Radiated Emission Co-location	
Appendix H. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A10_10 Ver1.3



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen

Report Producer: Muse Chan



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20), VHT20, ax (HEW20), be (EHT20)	2412-2462	1-11 [11]
2400-2483.5	n (HT40), VHT40, ax (HEW40), be (EHT40)	2422-2452	3-9 [7]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11 b, 802.11 g, 802.11 n HT20, VHT20, 802.11 ax HEW20, 802.11 be EHT20	20	4TX
	802.11 n HT20-BF, VHT20-BF, 802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	4TX
	802.11 n HT40, VHT40, 802.11 ax HEW40, 802.11 be EHT40	40	4TX
	802.11 n HT40-BF, VHT40-BF, 802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	4TX

Note:

- ♦ 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- ♦ 11g, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ HEW20, HEW40 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.


1.1.2 Antenna Information

Ant.	RF Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	1	AOT	ANT-M2458-AL17	PIFA	I-PEX(MHF)	Note 1
2	2	AOT	ANT-M2458-AL15	PIFA	I-PEX(MHF)	
3	3	AOT	ANT-M2458-AL14	PIFA	I-PEX(MHF)	
4	4	AOT	ANT-M2458-AL16	PIFA	I-PEX(MHF)	
5	1	AOT	ANT-P5972-AL21	PIFA	I-PEX(MHF)	
6	2	AOT	ANT-M5972-AL18	PIFA	I-PEX(MHF)	
7	3	AOT	ANT-M5972-AL19	PIFA	I-PEX(MHF)	
8	4	AOT	ANT-P5972-AL20	PIFA	I-PEX(MHF)	
9	1	AOT	ANT-GPSL1-AL22	PIFA	I-PEX(MHF)	
10	1	N/A	Print on board	Monopole	I-PEX	

Note1:

Table 1:

Ant.	Antenna Gain (dBi)					
	WLAN 2.4GHz	WLAN 5GHz UNII 1-3				
	2.45GHz	5.2GHz	5.3GHz	5.6GHz	5.785GHz	
1	3.08	3.28	3.12	2.53	2.49	
2	2.69	2.18	2.2	4.18	4.13	
3	2.1	2.11	2.04	3.04	3.35	
4	2.09	2.14	2.33	2.87	4.32	
Ant.	WLAN 6GHz UNII 5-8				Bluetooth / Zigbee	GPS
	6.175GHz	6.475GHz	6.695GHz	6.995GHz		
5	5.27	4.43	3.07	3.59	-	-
6	2.61	2.85	3.72	2.91	-	-
7	3.62	2.06	3.4	3.55	-	-
8	5.1	4.94	3.46	3.8	-	-
9	-	-	-	-	-	5.2
10	-	-	-	-	1.5	-

Directional Gain (dBi)									
Item	WLAN 2.4GHz	WLAN 5GHz UNII 1-3				WLAN 6GHz UNII 5-8			
	2.45GHz	5.2GHz	5.3GHz	5.6GHz	5.785GHz	6.175GHz	6.475GHz	6.695GHz	6.995GHz
4T1S	6.75	5.06	4.96	6.14	5.96	5.56	5.31	4.62	5.33
4T2S	3.75	3.28	3.12	4.18	4.32	5.27	4.94	3.72	3.8
4T4S	3.08	3.28	3.12	4.18	4.32	5.27	4.94	3.72	3.8



Note 2: The above information (excepting Ant. 1-8 antenna gain and directional gain) was declared by Manufacturer.

Note 3: Maximum Directional Gain following KDB662911 D03.

Note 4: **2.4GHz IEEE 802.11b/g/n/VHT/ax/be mode (4TX/4RX)**

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

5GHz (UNII 1-3) IEEE 802.11a/n/ac/ax/be mode (4TX/4RX)

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

6GHz (UNII 5-8) IEEE 802.11ax/be mode (4TX/4RX)

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

Bluetooth and Zigbee mode (1TX/1RX)

Only Port 1 can be used as transmitting/receiving antenna.

GPS mode (1RX)

Only Port 1 can be used as receiving antenna.

1.1.3 Mode Test Duty Cycle

For Non-beamforming mode:

Mode	DC	DCF (dB)	T (s)	VBW (Hz) 1/T
802.11b_Nss 1,(1D)	0.849	0.71	688.438u	2k
802.11g_Nss 1,(6D)	0.991	0.04	1.976m	10Hz (DC>=0.98)
802.11be EHT20_Nss 1,(M0)	0.978	0.1	5.453m	200
802.11be EHT40_Nss 1,(M0)	0.979	0.09	5.488m	300

For Beamforming mode:

Mode	DC	DCF (dB)	T (s)	VBW (Hz) 1/T
802.11be EHT20-BF_Nss 1,(M0)	0.976	0.11	5.276m	200
802.11be EHT40-BF_Nss 1,(M0)	0.979	0.09	5.167m	200

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	Power from Adapter			
Beamforming Function	☒	With beamforming	☐	Without beamforming
	The product has beamforming function for n/VHT/ax/be in 2.4GHz, n/ac/ax/be in 5GHz and ax/be in 6GHz.			
Function	☒	Point-to-multipoint	☐	Point-to-point
Support RU	☒	Full RU	☐	Partial RU
Test Software Version	QSPR 6.00.00232.1			

Note: The above information was declared by manufacturer.



1.1.5 Table for Multiple Listing

The brand/model names in the following table are all refer to the identical product.

Equipment Name	Brand Name	Model Name	Description of Models
Wi-Fi 7 Router	Quantum Fiber by AT&T	W1700A	1. For different marketing purposes. 2. The hardware and software of the product are identical; the only difference is the brand printed on the enclosure.
	Lumen		

Note 1: From the above models, Brand: Lumen and model: W1700A was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.247
- ♦ ANSI C63.10-2020

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 662911 D03 v01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH03-CB	Black Lu	20~21.3 / 64~68	Mar. 18, 2026~ May 04, 2026
Radiated Below 1GHz	03CH06-CB	Sean Ku	21.9~23.1 / 60~62	Apr. 08, 2026~ May 04, 2026
Radiated Above 1GHz	03CH01-CB	George Fan	21.3~22.3 / 58~61	Feb. 04, 2026~ Apr. 11, 2026
	03CH02-CB		21.5~23.3 / 58~61	
Radiated Co-location Emission	03CH03-CB	George Fan	21.6~23.1 / 58~62	May 08, 2026
AC Conduction	CO01-CB	Ryan Huang	22~23 / 55~56	May 13, 2026~ May 19, 2026

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.7 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%
Bandwidth Measurement	1.0 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

For Non-beamforming mode:

Mode
802.11b_Nss1,(1Mbps)_4TX
2412MHz
2437MHz
2462MHz
802.11g_Nss1,(6Mbps)_4TX
2412MHz
2437MHz
2462MHz
802.11be EHT20_Nss1,(MCS0)_4TX
2412MHz
2417MHz
2437MHz
2462MHz
802.11be EHT40_Nss1,(MCS0)_4TX
2422MHz
2437MHz
2452MHz

For Beamforming mode:

Mode
802.11be EHT20-BF_Nss1,(MCS0)_4TX
2412MHz
2437MHz
2462MHz
802.11be EHT40-BF_Nss1,(MCS0)_4TX
2422MHz
2437MHz
2452MHz

Note:

- ♦ EHT20 / EHT40 covers HT20 / HT40 / VHT20 / VHT40 / HEW20 / HEW40 due to similar modulation. The power setting for HT20 / HT40 / VHT20 / VHT40 / HEW20 / HEW40 is the same or lower than EHT20 / EHT40.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	EUT + Bluetooth + Adapter 1
2	EUT + Bluetooth + Adapter 2
3	EUT + Bluetooth + Adapter 3
4	EUT + Bluetooth + Adapter 4
Mode 1 has been evaluated to be the worst case among Mode 1~4, thus measurement for Mode 5~8 will follow this same test mode.	
5	EUT + Zigbee + Adapter 1
6	EUT + WLAN 2.4GHz + Adapter 1
7	EUT + WLAN 5GHz + Adapter 1
8	EUT + WLAN 6GHz + Adapter 1
For operating mode 5 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains
1	Non-beamforming mode
2	Beamforming mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
	After evaluating, the worst axis was found at Z axis for Bluetooth and Zigbee mode, Y axis for WLAN 2.4GHz, WLAN 5GHz and WLAN 6GHz mode from radiated emission above 1GHz, so the measurement will follow this same test configuration.
1	EUT in Z axis + Bluetooth + Adapter 1
2	EUT in Z axis + Bluetooth + Adapter 2
3	EUT in Z axis + Bluetooth + Adapter 3
4	EUT in Z axis + Bluetooth + Adapter 4
Mode 1 has been evaluated to be the worst case among Mode 1~4, thus measurement for Mode 5~8 will follow this same test mode.	
5	EUT in Z axis + Zigbee + Adapter 1
6	EUT in Y axis + WLAN 2.4GHz + Adapter 1
7	EUT in Y axis + WLAN 5GHz + Adapter 1
8	EUT in Y axis + WLAN 6GHz + Adapter 1
For operating mode 1 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
	After evaluating, and the worst case was found at Y axis, so it was selected to perform test and its test result was written in the report.
1	EUT in Y axis_Non-beamforming mode
2	EUT in Y axis_Beamforming mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
	After evaluating, and the worst case was found at Y axis, so it was selected to perform test and its test result was written in the report.
1	EUT in Y axis_WLAN 2.4GHz + WLAN 5GHz
Refer to Appendix G for Radiated Emission Co-location.	



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz + Bluetooth
2	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz + Zigbee
Refer to Sporton Test Report No.: FA5D3015 for Co-location RF Exposure Evaluation.	

2.3 EUT Operation during Test

For CTX Mode:

non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

beamforming mode:

During the test, the following programs under WIN 11 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by WLAN AP and transmit duty cycle no less than 98%.

For Normal Link Mode:

During the test, the EUT operation to normal function.

2.4 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter 1	LUCENT TRANS	1A133-LHHL	Input: 100-125V~1.4A, 50/60Hz Output: 12.0V, 4.0A, 48.0W
Adapter 2	Frecom	F48L1-120400SPAU	Input: 100-240V~50/60Hz, 1.4A Output: 12.0V, 4.0A, 48.0W
Adapter 3	LEI	ML48-8120400-A1	Input: 100-120V~ 50/60Hz, 1.5A Output: 12V, 4A
Adapter 4	mentech	MAUS-1204004811	Input: 100-240V~50/60Hz, 1.2A Output: 12V, 4.0A



2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E6430	N/A

For Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A

For Radiated (above 1GHz other tests):

<Non-beamforming mode>:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A

<Beamforming mode>:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	WLAN AP	Alpha Networks Inc.	W1700V3	N/A
C	Notebook	DELL	E4300	N/A

For Radiated (above 1GHz co-location):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	2.4G Notebook	DELL	E4300	N/A
C	5G Notebook	DELL	E4300	N/A


**For RF Conducted:****<Non-beamforming mode>:**


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	Lenovo	T470	N/A

<Beamforming mode>:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	Lenovo	T470	N/A
B	Notebook	Lenovo	T470	N/A
C	RX Device	Lumen	W1700A	RRK-W1700A3

2.6 Test Setup Diagram

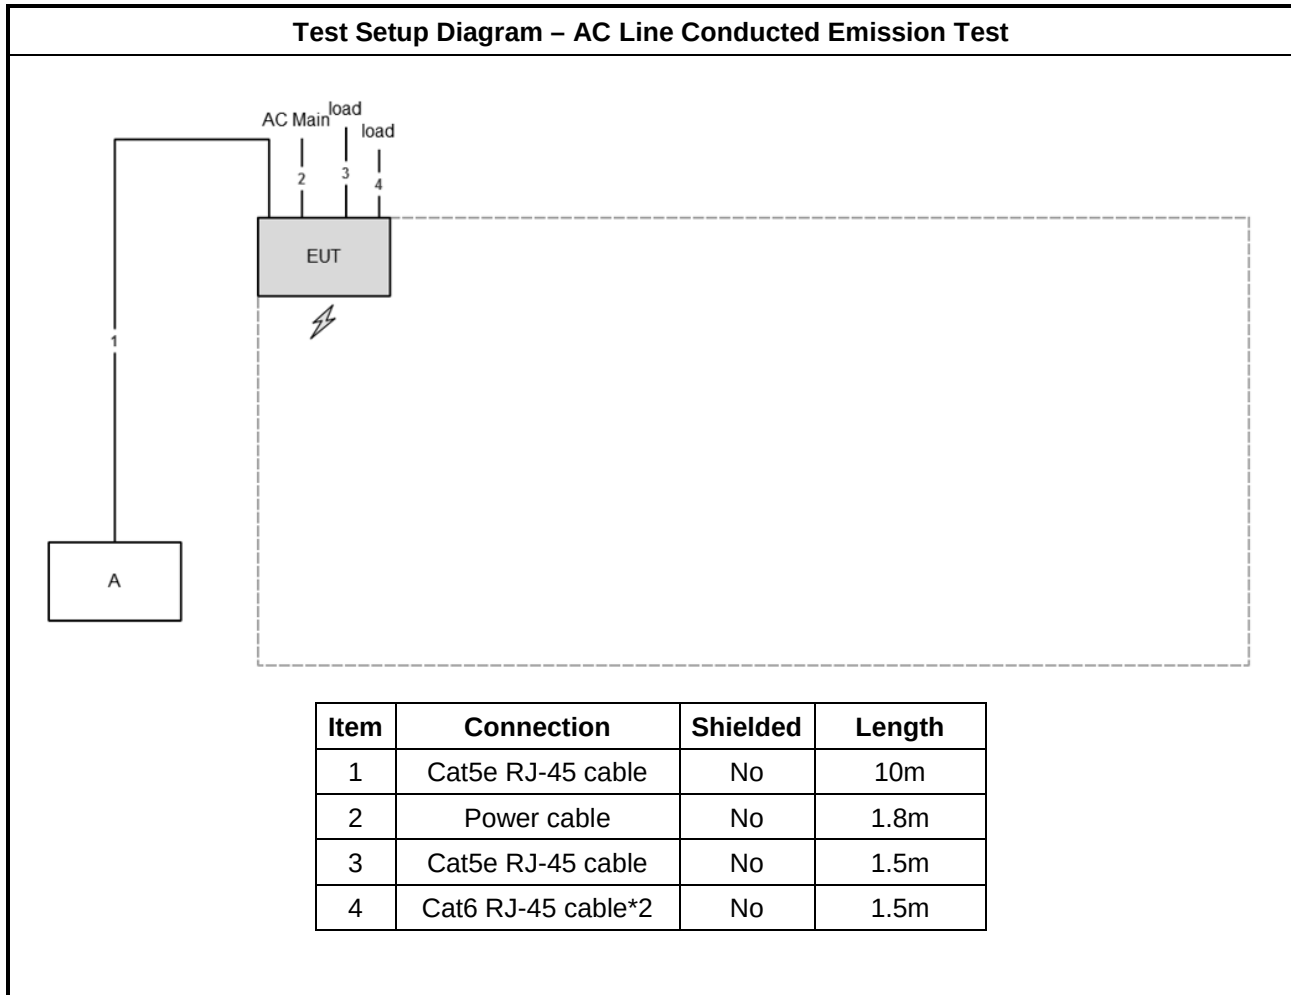


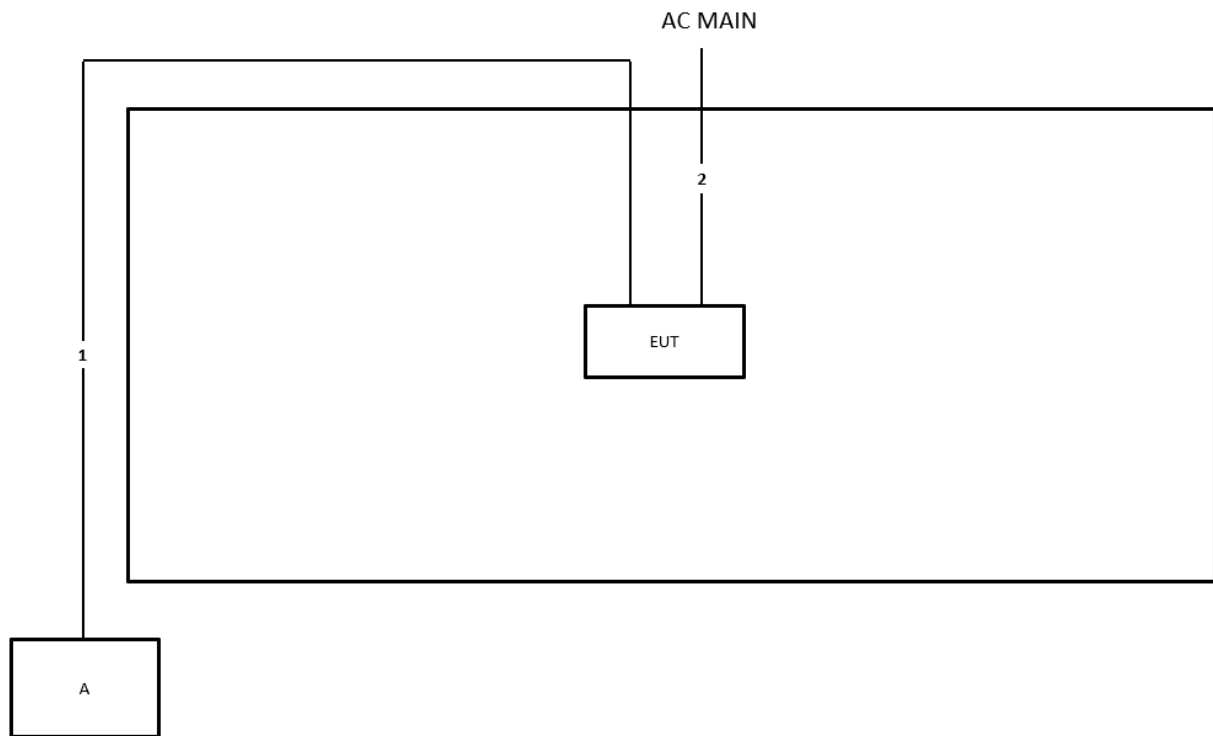Test Setup Diagram - Radiated Test < 1GHz


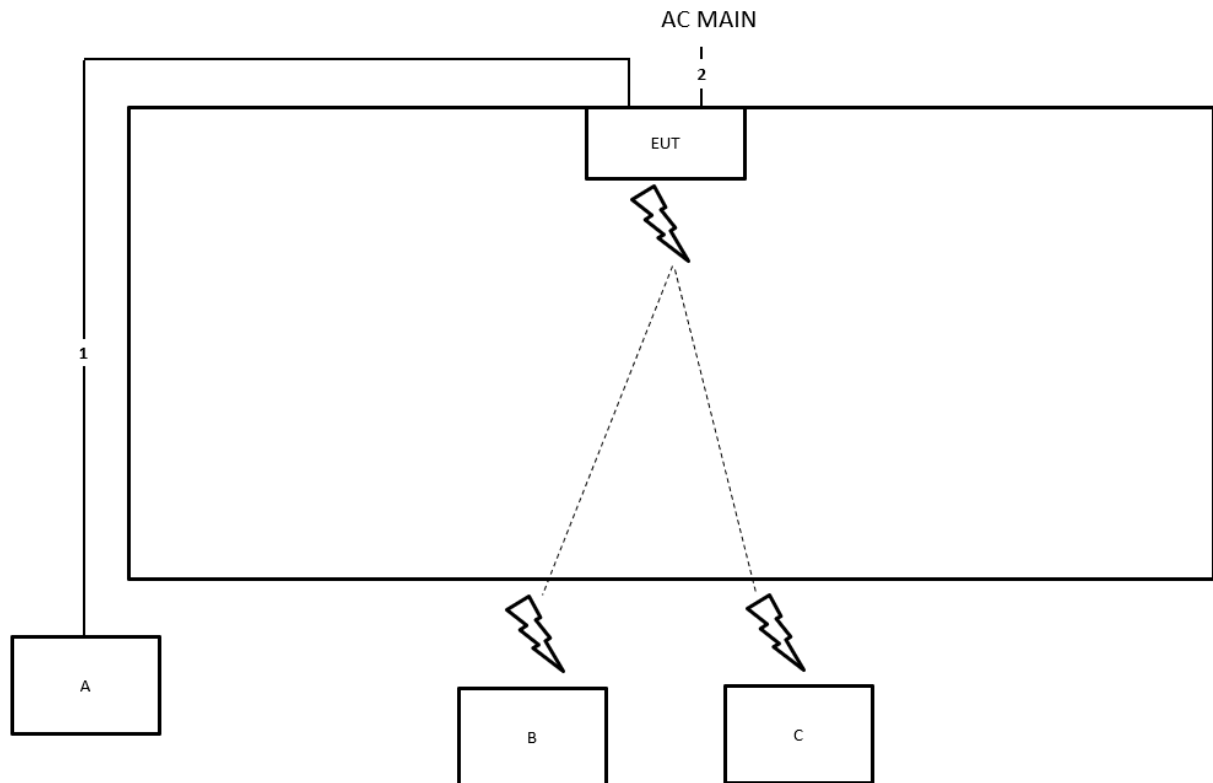
Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.8m

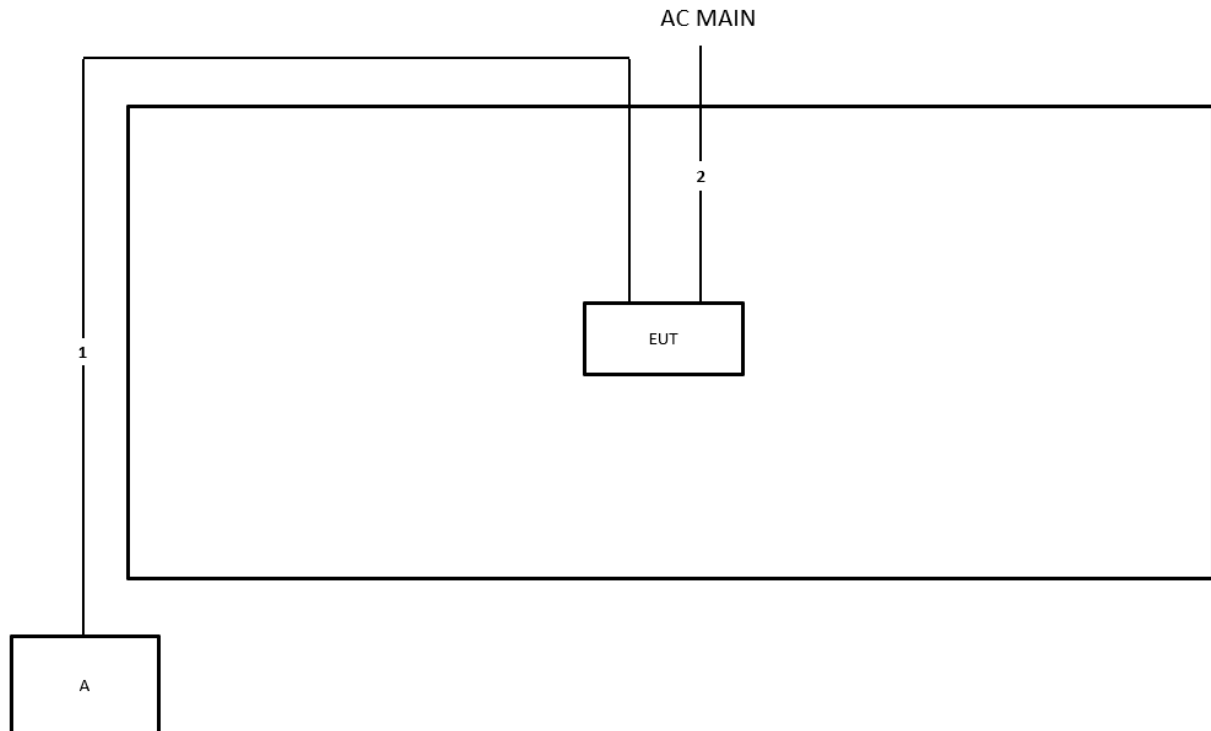Test Setup Diagram - Radiated Test > 1GHz <Non-beamforming mode>


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.8m

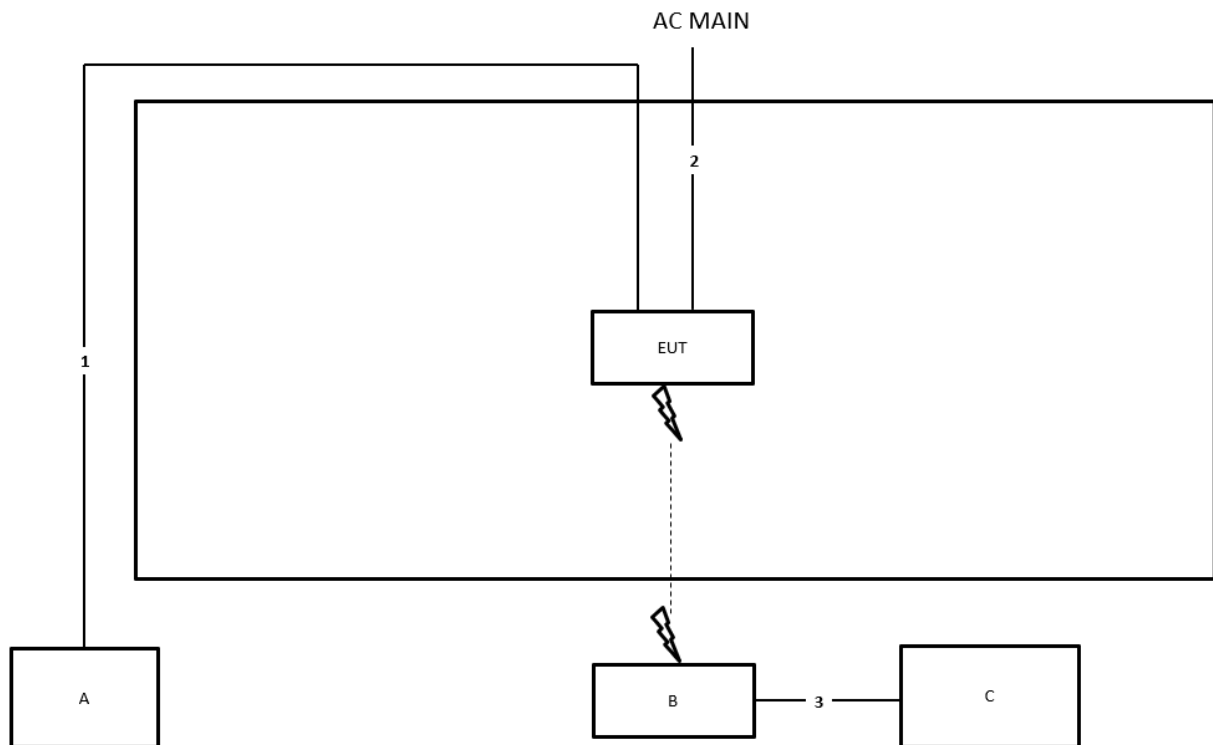Test Setup Diagram - Radiated Test > 1GHz <Beamforming mode>


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.8m
3	RJ-45 cable	No	10m

Test Setup Diagram - Radiated Test > 1GHz <Co-location>


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.8m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2020, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

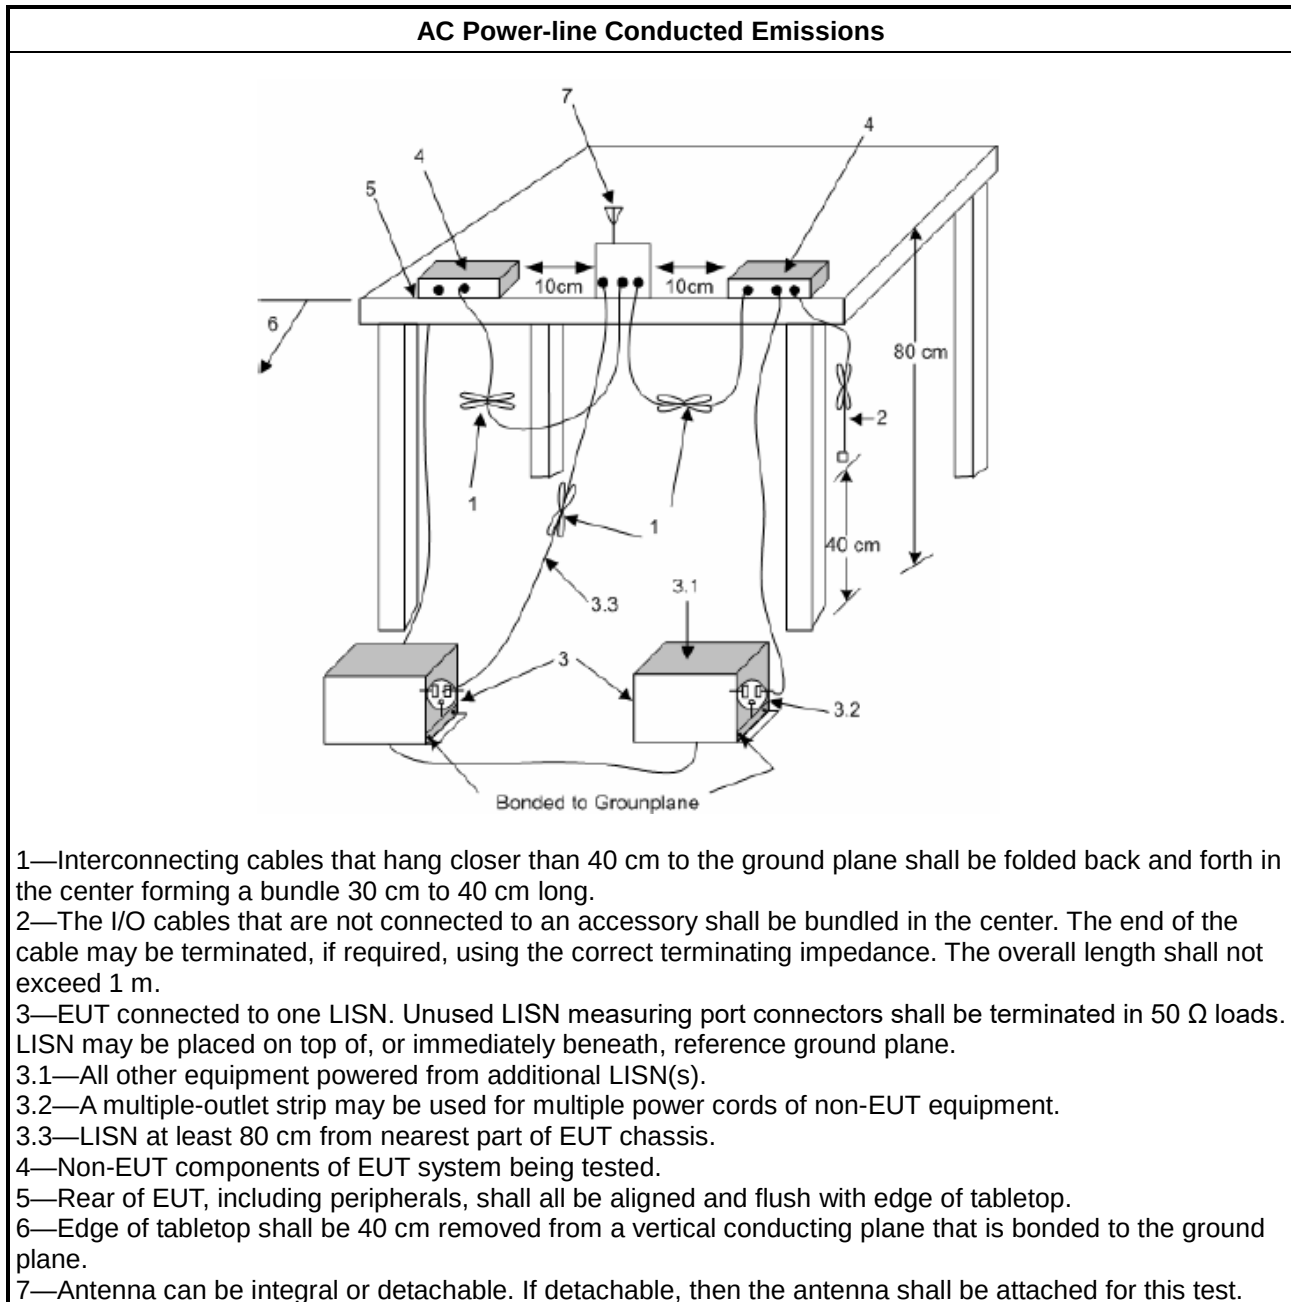

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
For the emission bandwidth shall be measured using one of the options below:
☒ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
☐ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
☐ Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

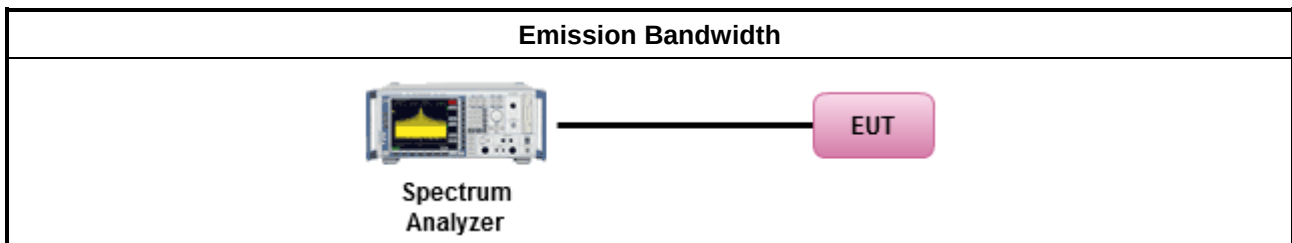

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

**3.3.3 Test Procedures**

Test Method	
▪ Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
☐	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
▪ Maximum Conducted Output Power	
[duty cycle ≥ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
☐	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
☒	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
▪ For conducted measurement.	
▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

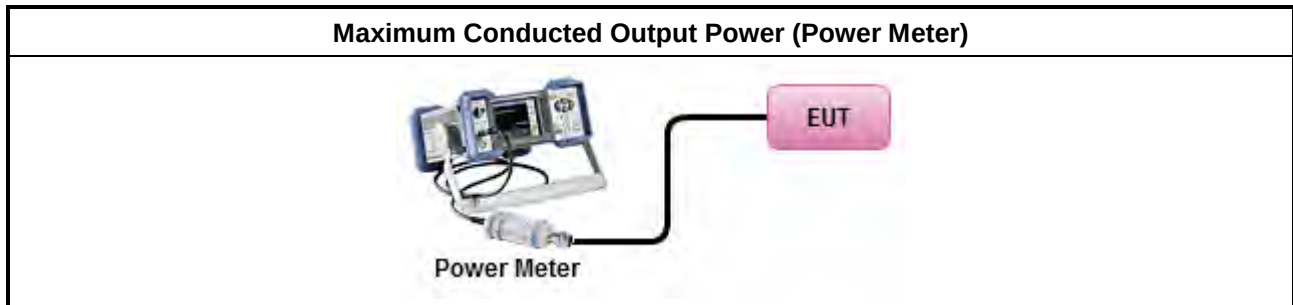

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).	
☒	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD.
▪ For conducted measurement.	
▪ If The EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

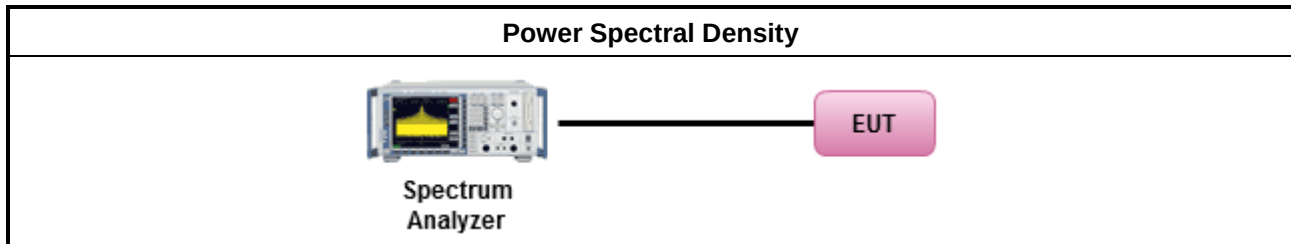

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

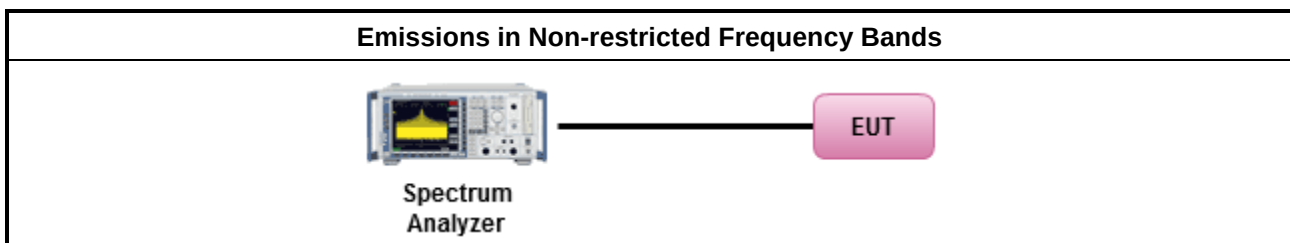

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.





3.6.3 Test Procedures

Test Method	
▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
▪ For the transmitter unwanted emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
▪ For the transmitter band-edge emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074 clause 8.7 & C63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	▪ Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	▪ Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

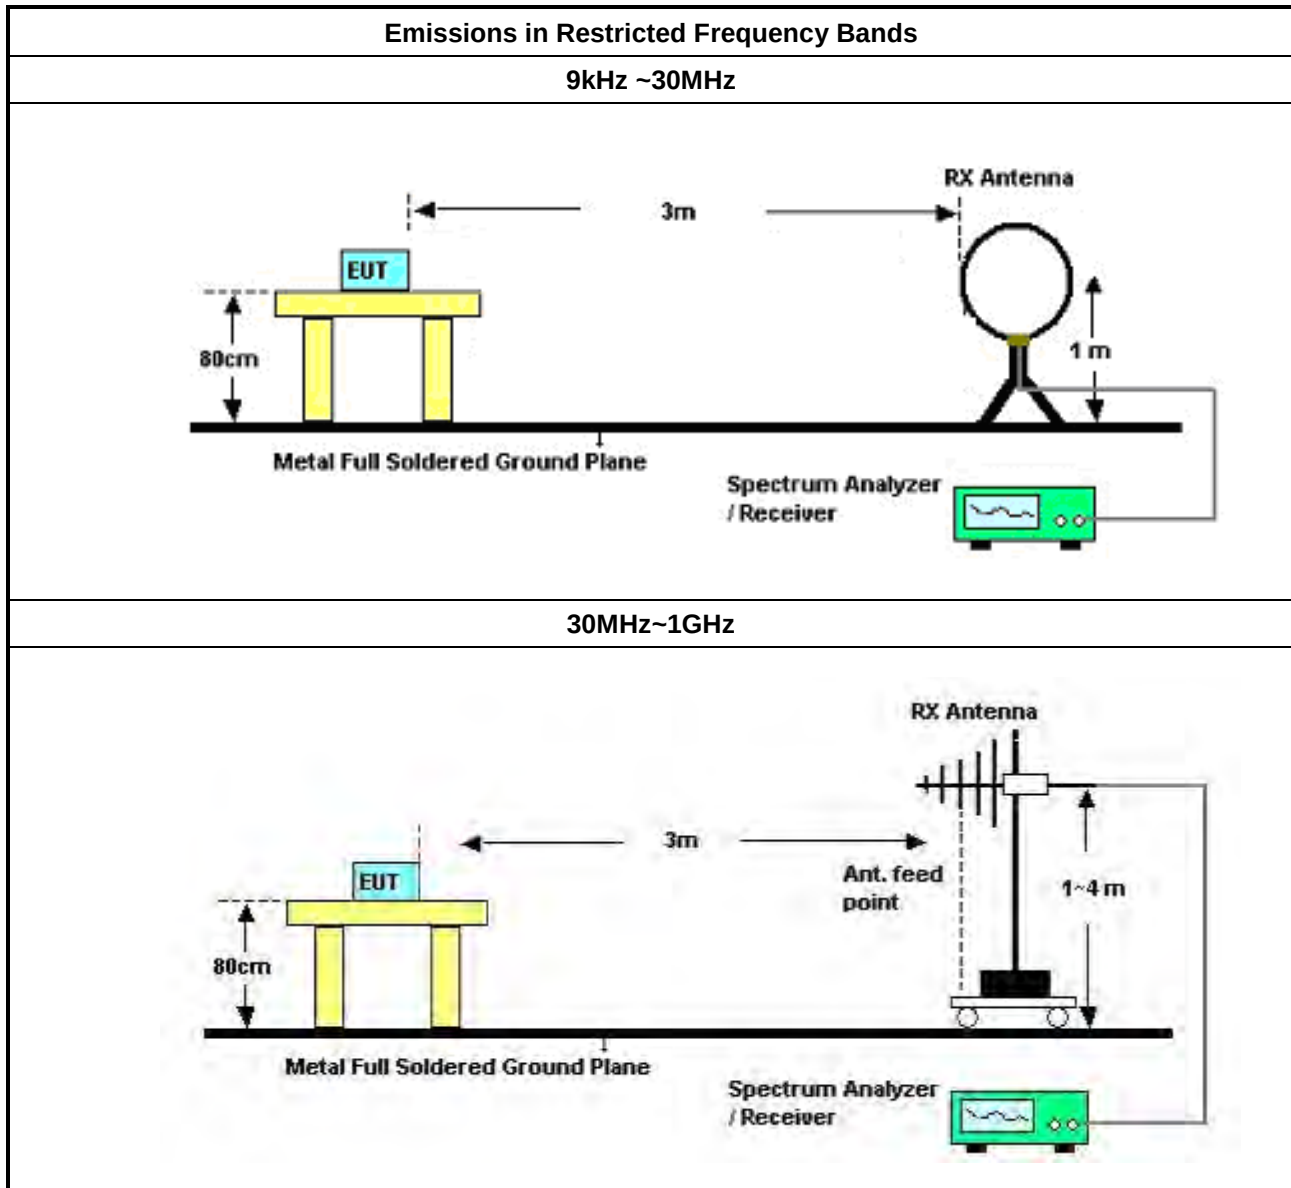

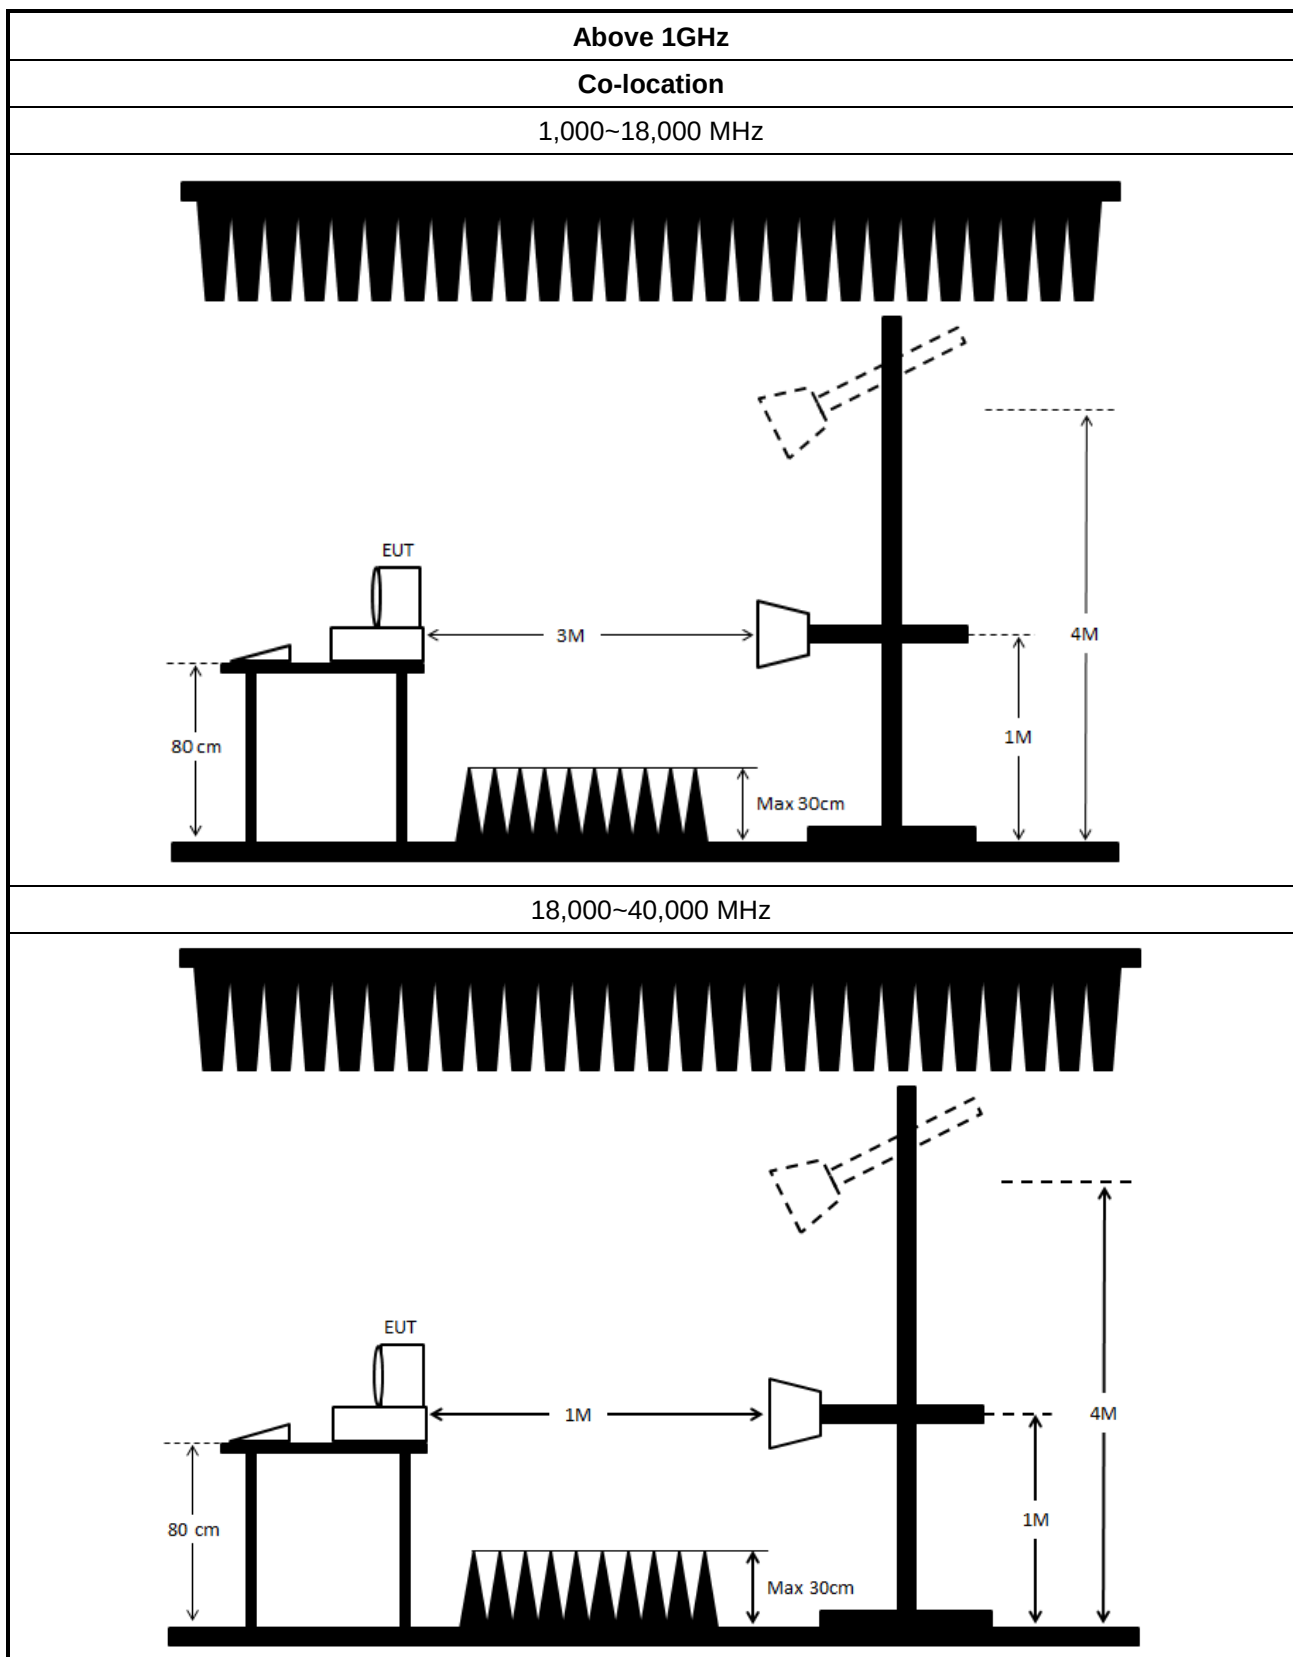

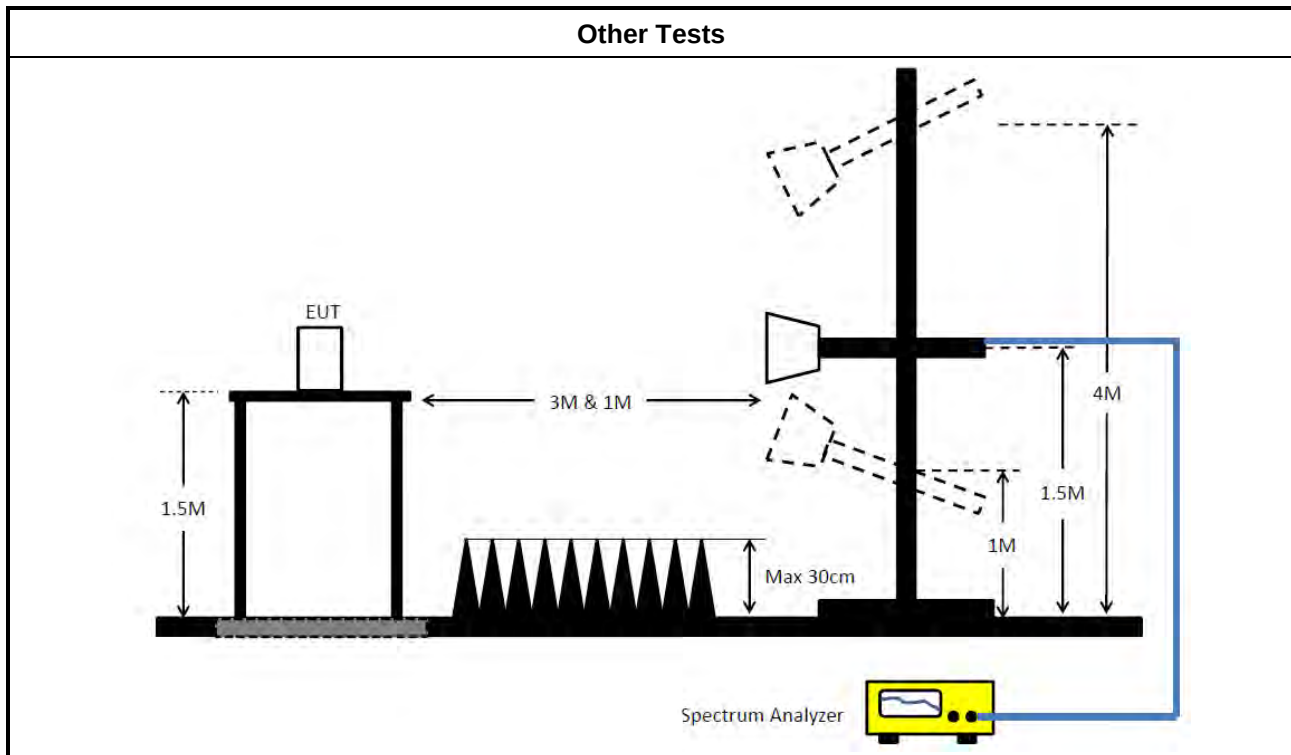

3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 12, 2026	Mar. 11, 2027	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 04, 2026	Feb. 03, 2027	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Apr. 10, 2026	Apr. 09, 2027	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Sep. 14, 2025	Sep. 13, 2026	Conduction (CO01-CB)
COND Cable	Woken	Cable	CO01	9kHz ~ 30MHz	Sep. 14, 2025	Sep. 13, 2026	Conduction (CO01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 20, 2025	Oct. 19, 2026	Radiation (03CH06-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH06-CB	30 MHz ~ 1 GHz	Aug. 01, 2025	Jul. 31, 2026	Radiation (03CH06-CB)
Bilog Antenna with 6 dB attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37878 & AT-N0606	20MHz ~ 2GHz	Jul. 28, 2025	Jul. 27, 2026	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	310N	187290	0.1MHz ~ 1GHz	Nov. 27, 2025	Nov. 26, 2026	Radiation (03CH06-CB)
Signal analyzer	R&S	FSV3044	101667	9kHz~44GHz	Aug. 27, 2025	Aug. 26, 2026	Radiation (03CH06-CB)
EMI Test Receiver	R&S	ESR7	102172	9kHz ~ 7GHz	Oct. 29, 2025	Oct. 28, 2026	Radiation (03CH06-CB)
RF Cable-low	Woken	RG402	Low Cable-05+68	30MHz~1GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.10	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH06-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH01-CB	1GHz ~18GHz 3m	May 03, 2025	May 02, 2026	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1370	1GHz~18GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 16, 2025	May 15, 2026	Radiation (03CH01-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH01-CB)
Signal Analyzer	R&S	FSV3044	101437	10kHz ~ 44GHz	Dec. 12, 2025	Dec. 11, 2026	Radiation (03CH01-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-16	1 GHz ~ 18 GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16+17	1 GHz ~ 18 GHz	Jan. 26, 2026	Jan. 25, 2027	Radiation (03CH01-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH01-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.27	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Radiation (03CH01-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 23, 2025	Mar. 22, 2026	Radiation (03CH02-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 21, 2026	Mar. 20, 2027	Radiation (03CH02-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 15, 2025	Apr. 14, 2026	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH02-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH02-CB)
Signal Analyzer	R&S	FSV3044	101536	10kHz ~ 44GHz	Aug. 20, 2025	Aug. 19, 2026	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Jun. 19, 2025	Jun. 18, 2026	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Jun. 19, 2025	Jun. 18, 2026	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.27	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Radiation (03CH02-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 01, 2026	Apr. 30, 2027	Radiation (03CH03-CB)
Horn Antenna	ETS-Lindgren	3115	6821	750MHz~18GHz	Feb. 06, 2026	Feb. 05, 2027	Radiation (03CH03-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH03-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH03-CB)
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jul. 17, 2025	Jul. 16, 2026	Radiation (03CH03-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-20+29	1GHz ~ 18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-29	1GHz ~ 18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH03-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.10	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH03-CB)
Spectrum analyzer	R&S	FSV40	101028	9kHz~40GHz	Jan. 14, 2026	Jan. 13, 2027	Conducted (TH03-CB)
Power Sensor	Anritsu	MA2411B	1726195	300MHz~40GHz	Sep. 12, 2025	Sep. 11, 2026	Conducted (TH03-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 12, 2025	Sep. 11, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-11	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-12	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-13	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-14	1 GHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-15	1 GHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
Switch	SPTCB	SP-SWI	SWI-03	1~18GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH03-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.27	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Conducted (TH03-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 5	Pass	AV	483k	36.83	46.29	-9.46	Line

Mode 5

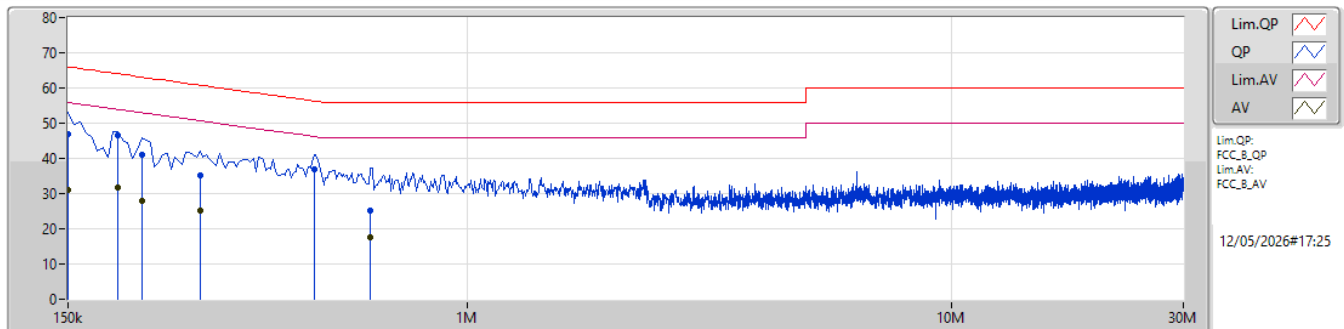

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	150k	46.91	66.00	-19.09	10.13	Line	-	36.78	0.15	0.10	9.88						
AV	150k	31.11	56.00	-24.89	10.13	Line	-	20.98	0.15	0.10	9.88						
QP	190.5k	46.43	64.01	-17.58	9.99	Line	-	36.44	0.14	0.07	9.78						
AV	190.5k	31.61	54.01	-22.40	9.99	Line	-	21.62	0.14	0.07	9.78						
QP	213k	41.18	63.09	-21.91	9.98	Line	-	31.20	0.14	0.07	9.77						
AV	213k	27.80	53.09	-25.29	9.98	Line	-	17.82	0.14	0.07	9.77						
QP	280.5k	35.27	60.80	-25.53	10.07	Line	-	25.20	0.15	0.09	9.83						
AV	280.5k	25.27	50.80	-25.53	10.07	Line	-	15.20	0.15	0.09	9.83						
QP	483k	36.73	56.29	-19.56	10.20	Line	-	26.53	0.17	0.13	9.90						
AV	483k	36.83	46.29	-9.46	10.20	Line	"Worst"	26.63	0.17	0.13	9.90						
QP	631.5k	25.13	56.00	-30.87	10.21	Line	-	14.92	0.18	0.13	9.90						
AV	631.5k	17.70	46.00	-28.30	10.21	Line	-	7.49	0.18	0.13	9.90						

Mode 5

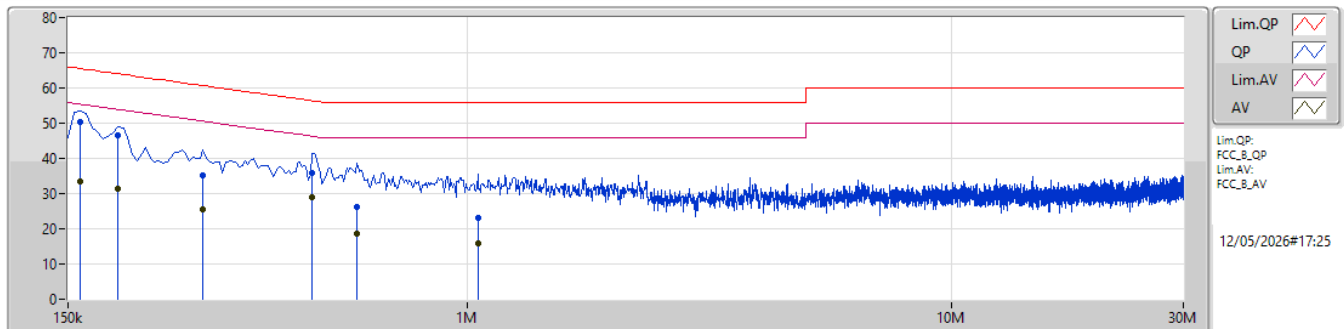

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	159k	50.40	65.52	-15.12	10.08	Neutral	"Worst"	40.32	0.14	0.09	9.85						
AV	159k	33.60	55.52	-21.92	10.08	Neutral	-	23.52	0.14	0.09	9.85						
QP	190.5k	46.44	64.01	-17.57	9.99	Neutral	-	36.45	0.14	0.07	9.78						
AV	190.5k	31.35	54.01	-22.66	9.99	Neutral	-	21.36	0.14	0.07	9.78						
QP	285k	35.33	60.67	-25.34	10.06	Neutral	-	25.27	0.14	0.09	9.83						
AV	285k	25.57	50.67	-25.10	10.06	Neutral	-	15.51	0.14	0.09	9.83						
QP	478.5k	35.85	56.36	-20.51	10.18	Neutral	-	25.67	0.15	0.13	9.90						
AV	478.5k	28.97	46.36	-17.39	10.18	Neutral	-	18.79	0.15	0.13	9.90						
QP	591k	26.22	56.00	-29.78	10.18	Neutral	-	16.04	0.15	0.13	9.90						
AV	591k	18.69	46.00	-27.31	10.18	Neutral	-	8.51	0.15	0.13	9.90						
QP	1.05M	23.03	56.00	-32.97	10.20	Neutral	-	12.83	0.17	0.15	9.88						
AV	1.05M	15.97	46.00	-30.03	10.20	Neutral	-	5.77	0.17	0.15	9.88						

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_4TX	8.085M	13.08M	13M1G1D	5.39M	12.764M
802.11g_Nss1,(6Mbps)_4TX	16.445M	16.92M	16M9D1D	16.115M	16.66M
802.11be EHT20_Nss1,(MCS0)_4TX	19.14M	19.097M	19M1D1D	18.7M	18.937M
802.11be EHT40_Nss1,(MCS0)_4TX	38.17M	38.075M	38M1D1D	36.52M	37.777M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	8.085M	12.823M	6.38M	13.015M	6.325M	12.856M	7.755M	12.764M
2437MHz	Pass	500k	8.03M	12.936M	5.39M	13.006M	5.61M	12.969M	7.865M	12.934M
2462MHz	Pass	500k	7.26M	13.08M	7.59M	13.005M	6.985M	12.973M	7.205M	12.995M
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	16.445M	16.693M	16.28M	16.701M	16.445M	16.665M	16.445M	16.702M
2437MHz	Pass	500k	16.335M	16.798M	16.28M	16.66M	16.225M	16.702M	16.39M	16.754M
2462MHz	Pass	500k	16.115M	16.92M	16.39M	16.725M	16.335M	16.76M	16.445M	16.779M
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	19.14M	19.009M	19.085M	19.002M	18.92M	18.937M	18.7M	18.986M
2437MHz	Pass	500k	19.03M	19.042M	19.03M	18.99M	19.14M	18.993M	19.14M	19.036M
2462MHz	Pass	500k	19.14M	19.071M	19.085M	18.994M	19.03M	19.034M	19.14M	19.097M
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	500k	37.73M	37.777M	37.84M	38.075M	38.06M	37.961M	37.84M	37.925M
2437MHz	Pass	500k	37.95M	37.897M	37.95M	37.953M	37.84M	37.896M	38.06M	37.852M
2452MHz	Pass	500k	36.52M	37.927M	38.06M	37.926M	38.17M	37.931M	38.06M	38.008M



Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX
EBW
2412MHz

18/03/2026

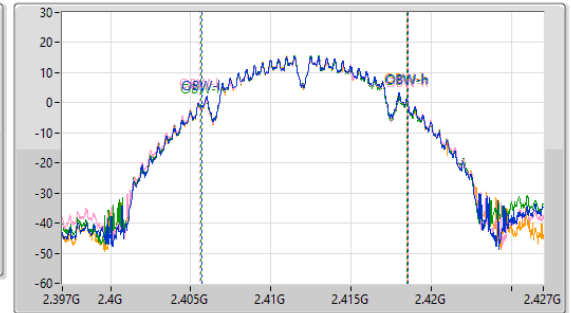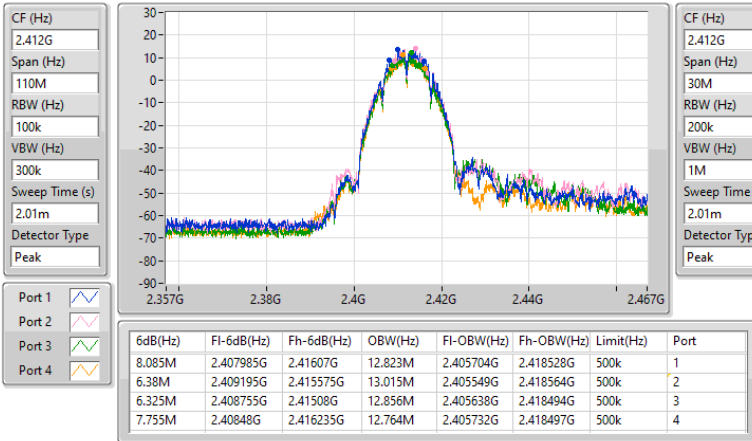

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX
EBW
2437MHz

18/03/2026

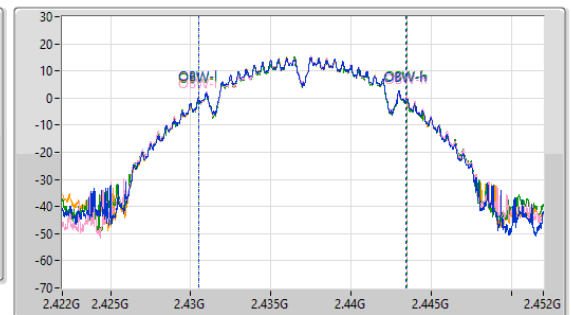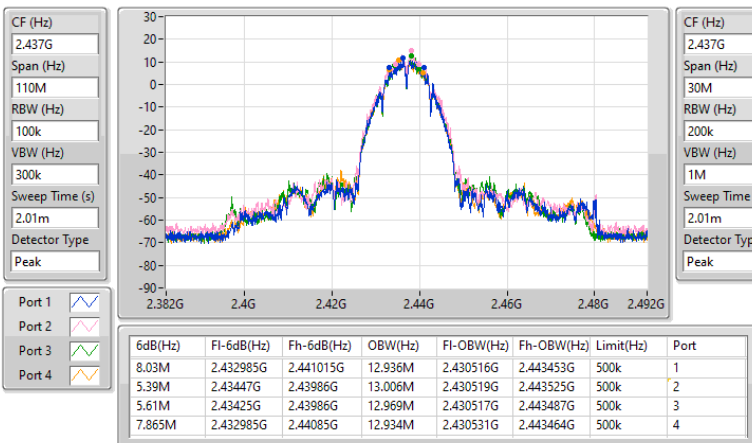


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX
EBW
2462MHz

18/03/2026

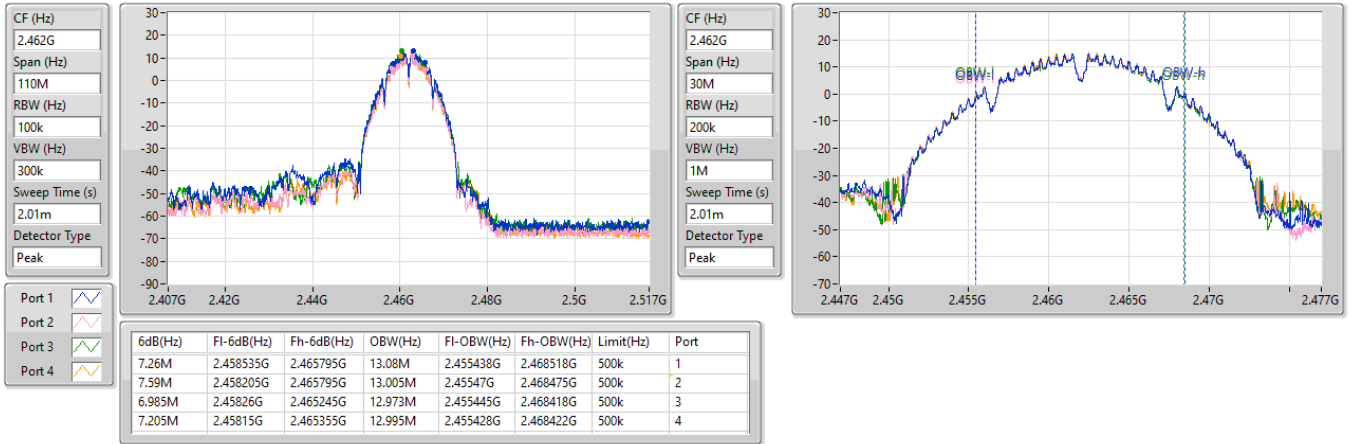

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX
EBW
2412MHz

18/03/2026

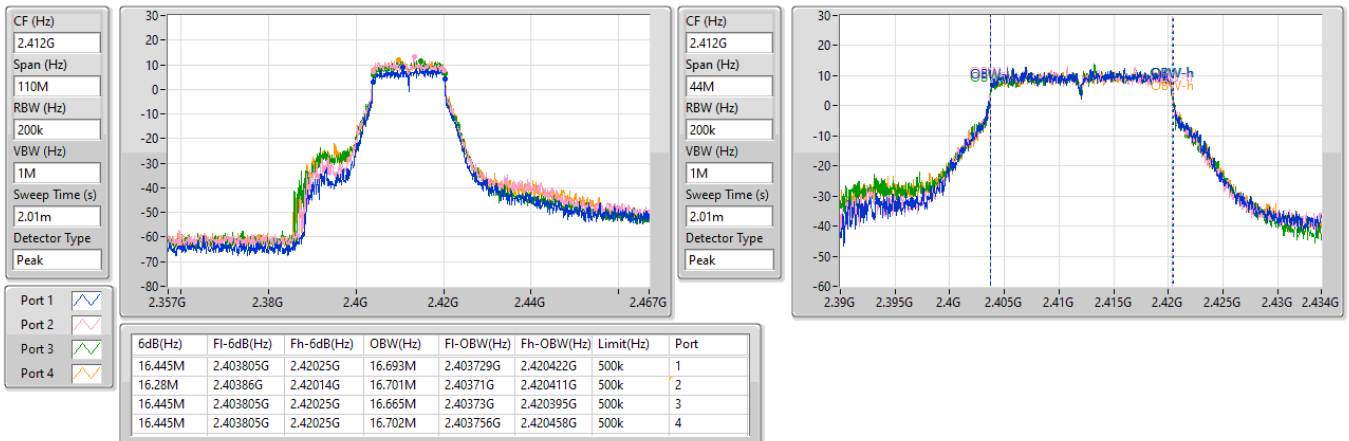


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX
EBW
2437MHz

18/03/2026


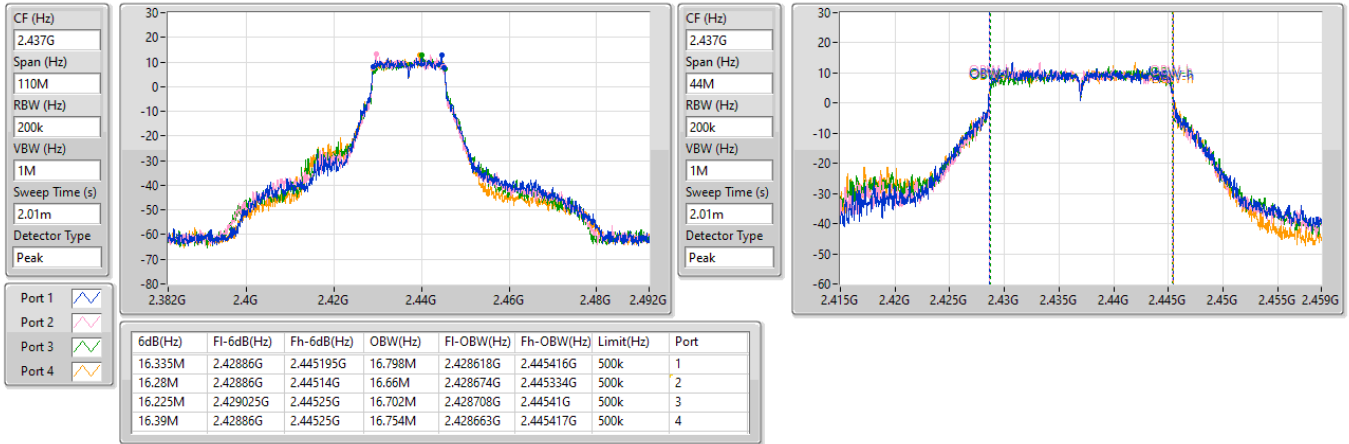

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX
EBW
2462MHz

18/03/2026


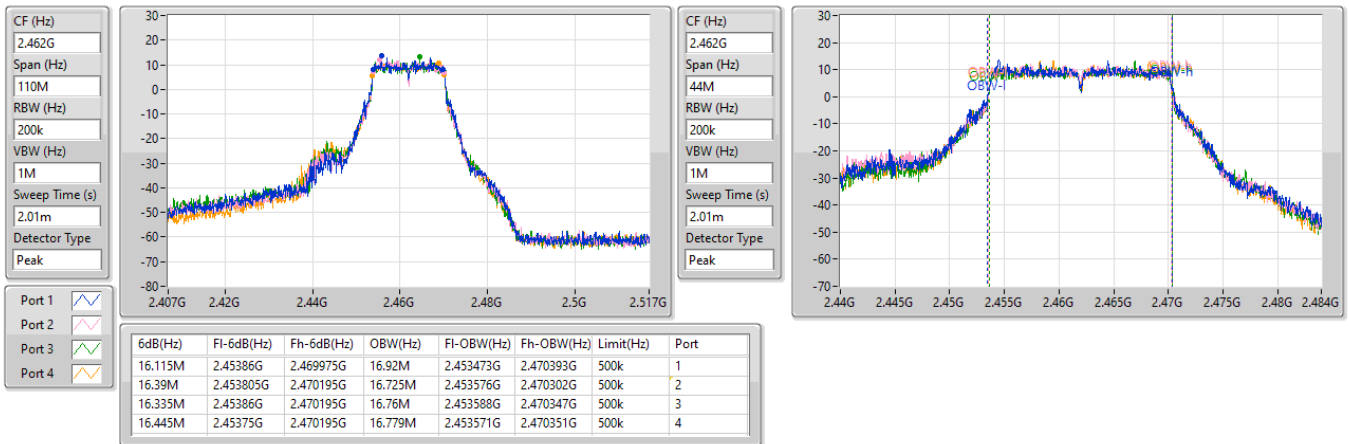


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX
EBW
2412MHz

18/03/2026

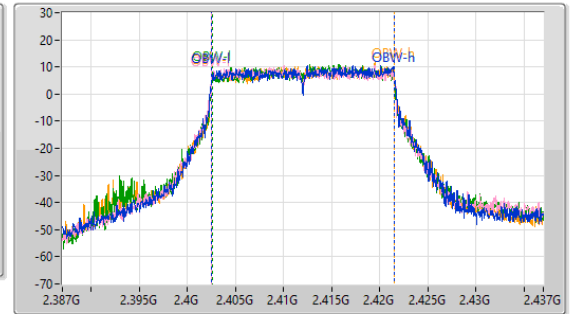
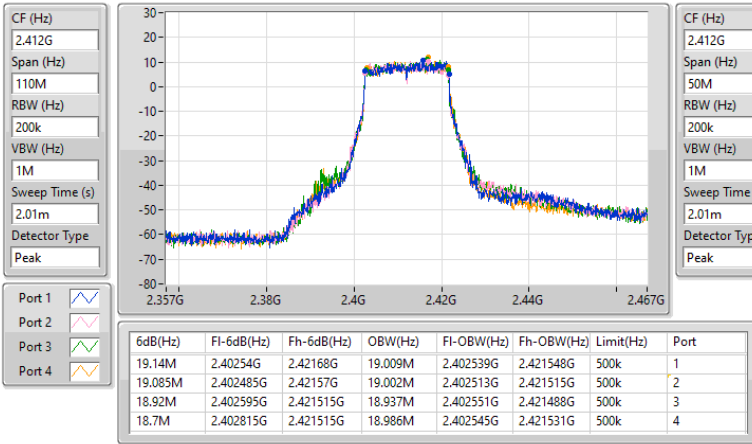

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX
EBW
2437MHz

18/03/2026

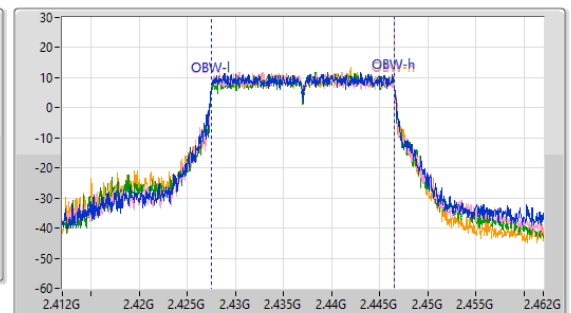
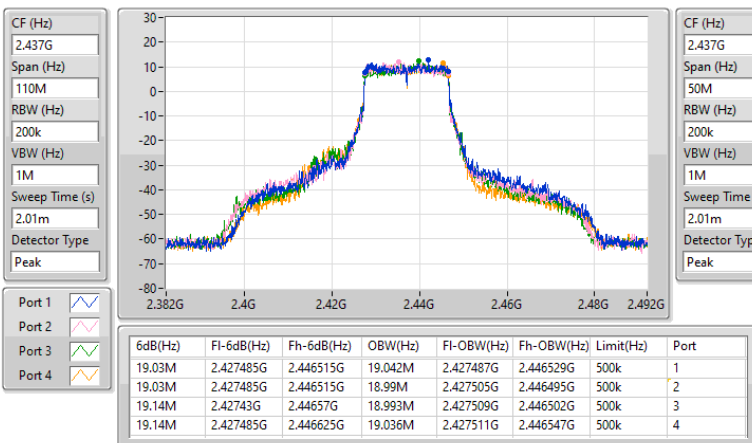


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX
EBW
2462MHz

18/03/2026

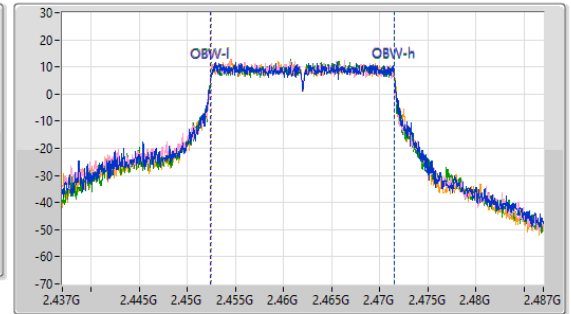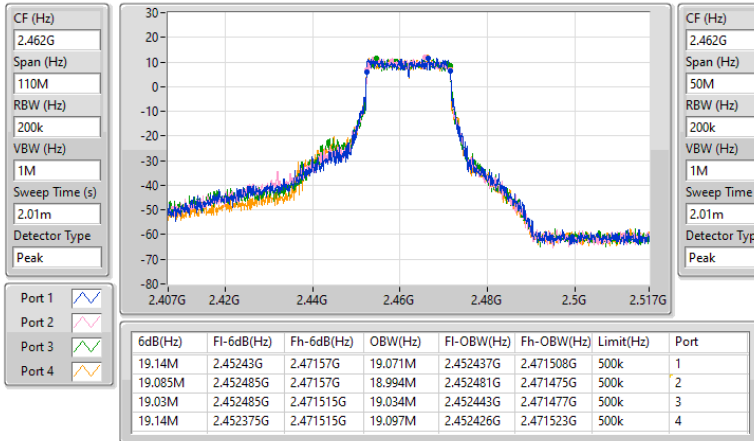

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX
EBW
2422MHz

18/03/2026

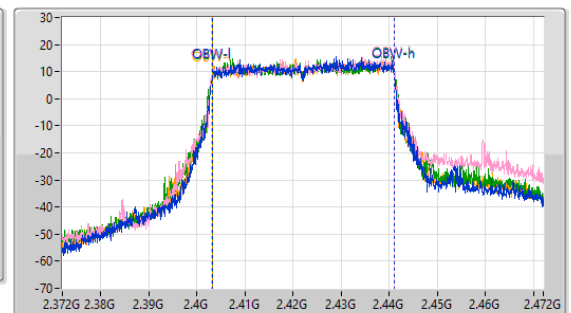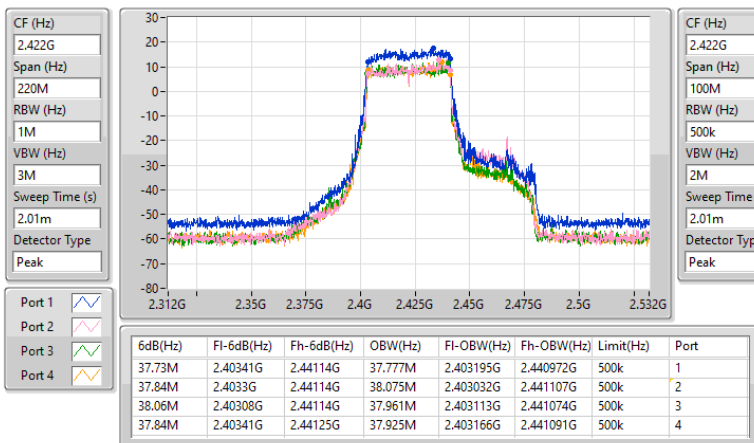


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX
EBW
2437MHz

18/03/2026

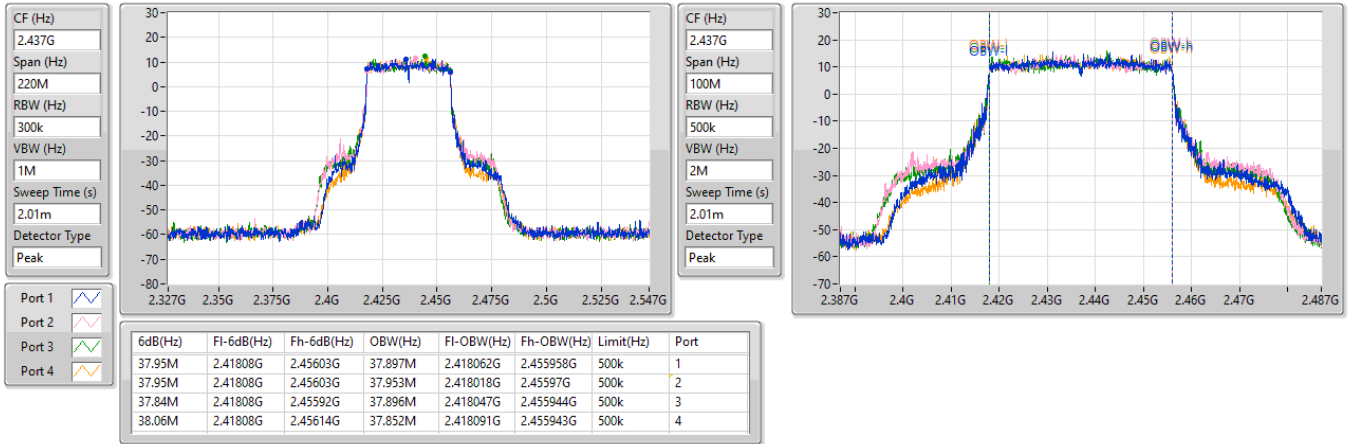
2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX
EBW
2452MHz

18/03/2026

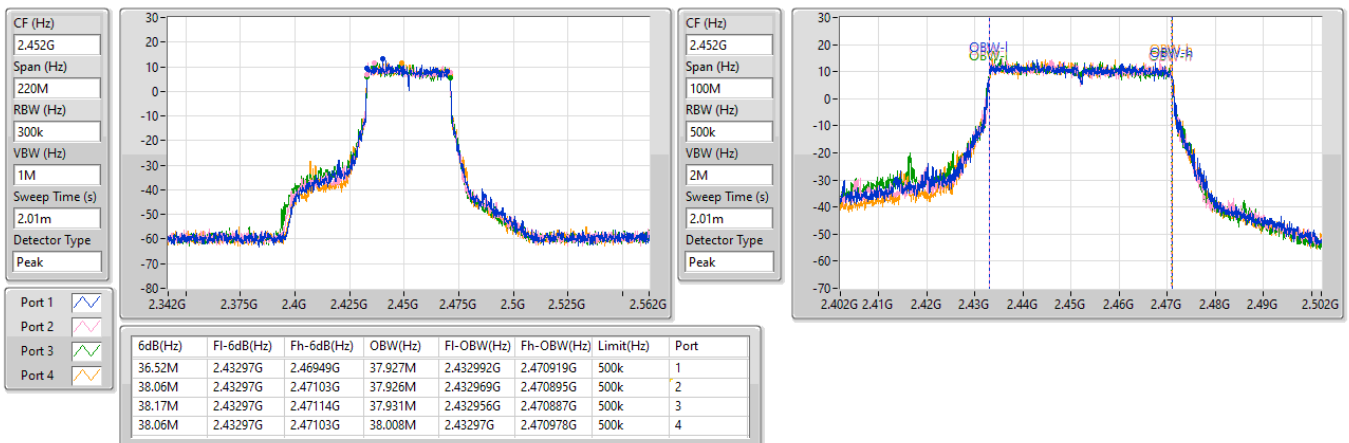

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	19.05M	19.082M	19M1D1D	10.125M	18.757M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	35.6M	38.24M	38M2D1D	4.9M	37.377M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	18.925M	18.992M	18.775M	19.022M	18.2M	19.016M	10.125M	18.757M
2437MHz	Pass	500k	18.9M	19.082M	17.95M	19.026M	18.75M	19.035M	18.575M	19.028M
2462MHz	Pass	500k	18.75M	19.064M	14.875M	19.012M	19.05M	19.017M	17.3M	19.02M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	500k	32.4M	37.879M	33.25M	38.105M	35.6M	37.965M	33.65M	37.884M
2437MHz	Pass	500k	30.75M	37.902M	29.7M	37.377M	8.75M	37.776M	29.45M	37.906M
2452MHz	Pass	500k	32.75M	38.011M	23.25M	37.759M	31.2M	38.24M	4.9M	38.019M


Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX
EBW
2412MHz

24/04/2026

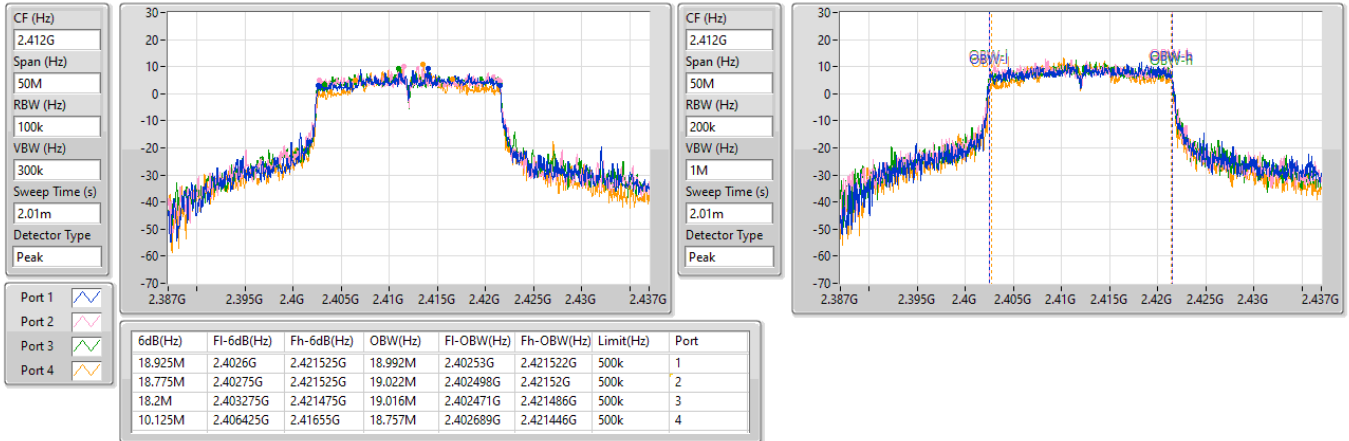

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX
EBW
2437MHz

24/04/2026

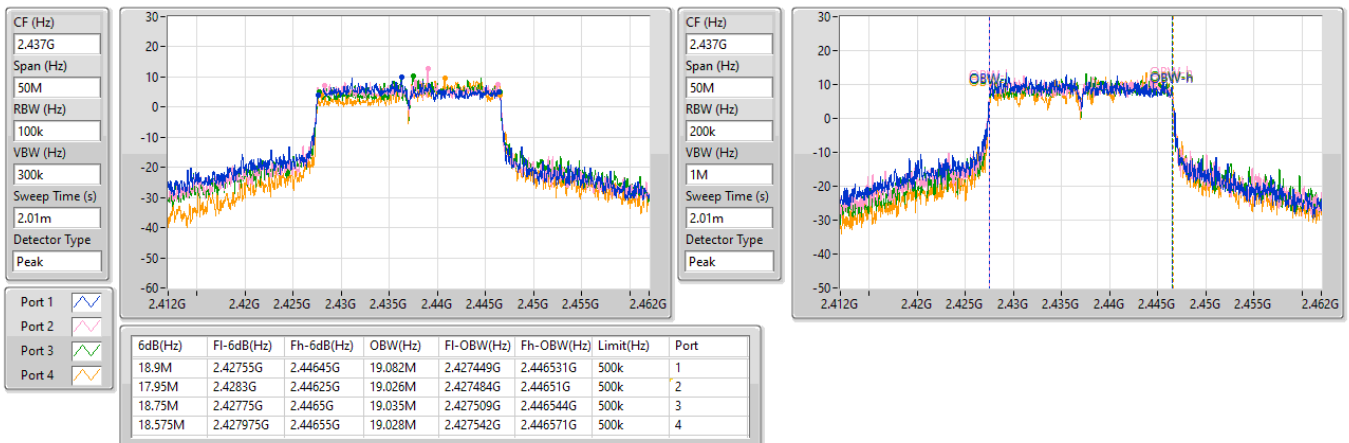


2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX
EBW
2462MHz

24/04/2026

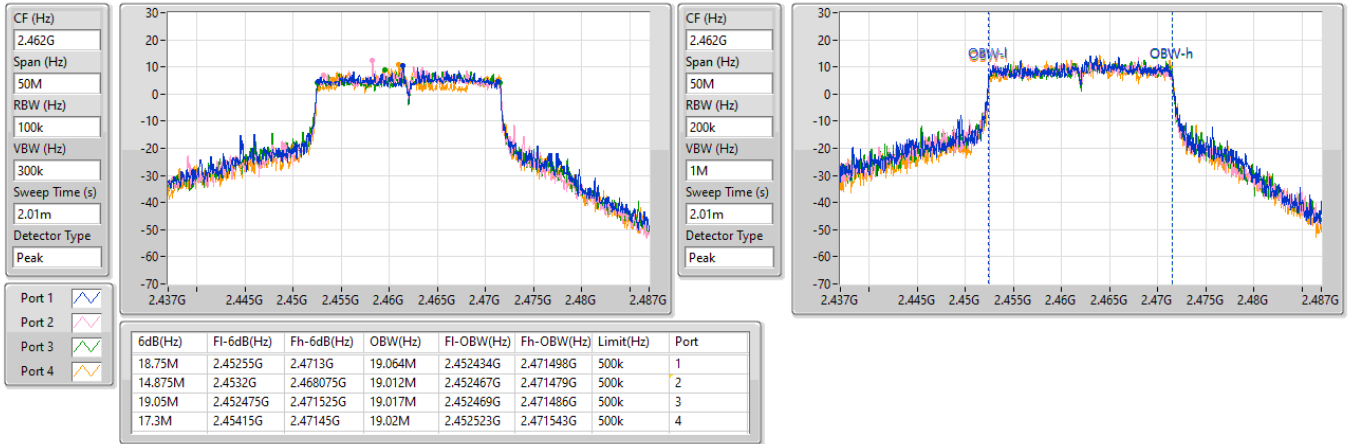

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX
EBW
2422MHz

24/04/2026

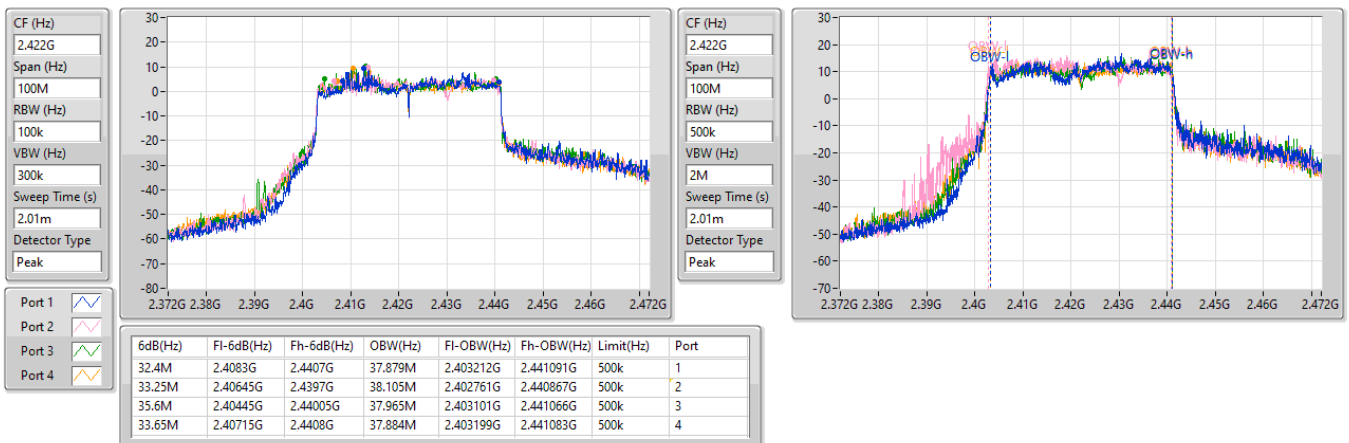


2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX
EBW
2437MHz

24/04/2026

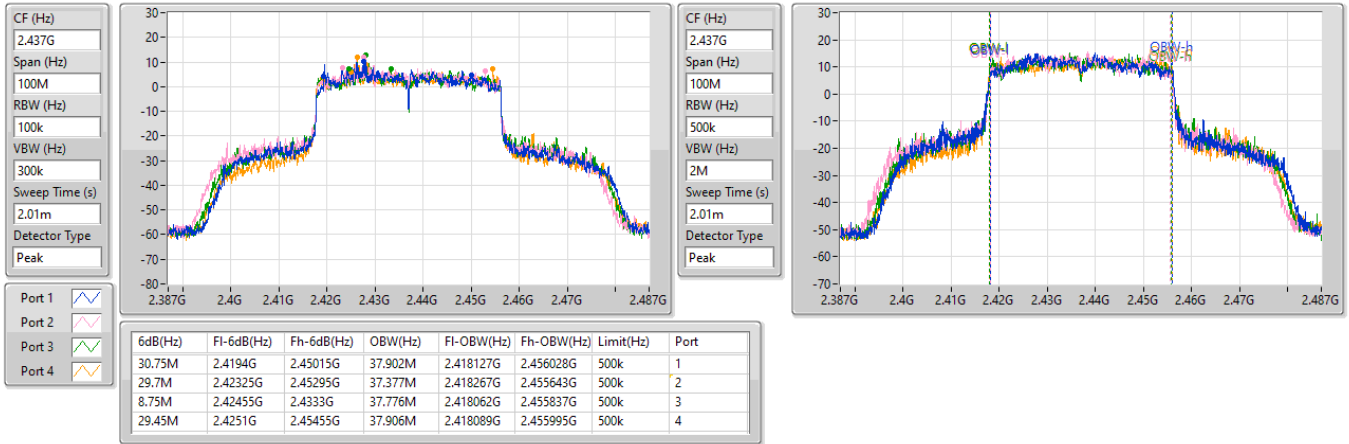
2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX
EBW
2452MHz

24/04/2026

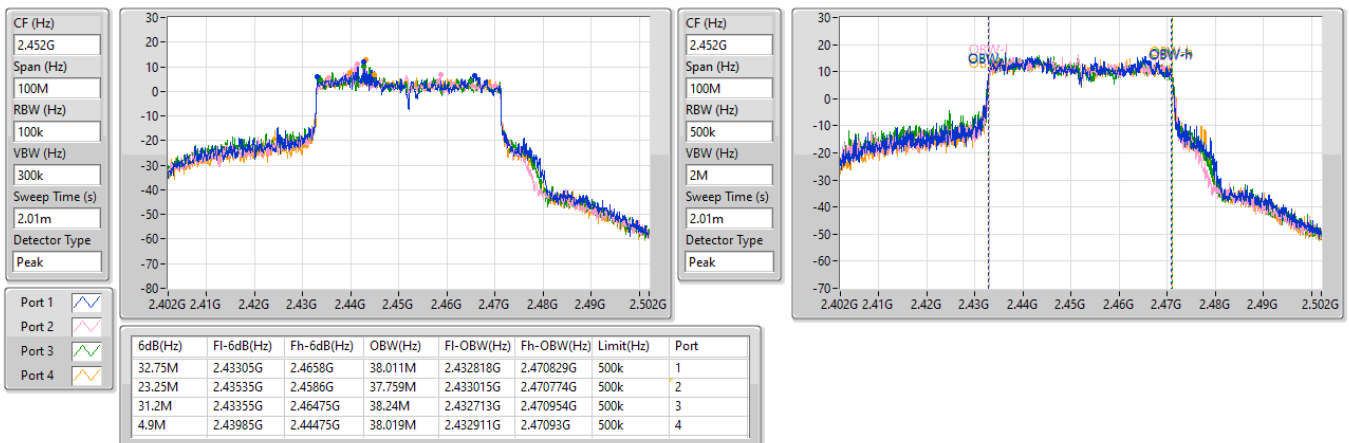



Average Power_Test Mode: Mode 1

Appendix C.1

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_4TX	29.83	0.96161
802.11g_Nss1,(6Mbps)_4TX	29.78	0.95060
802.11be EHT20_Nss1,(MCS0)_4TX	29.76	0.94624
802.11be EHT40_Nss1,(MCS0)_4TX	29.94	0.98628

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	3.08	23.76	23.92	23.85	23.69	29.83	30.00
2437MHz	Pass	3.08	23.80	23.60	23.44	23.44	29.59	30.00
2462MHz	Pass	3.08	23.43	23.56	23.51	23.52	29.53	30.00
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	3.08	23.78	23.82	23.72	23.73	29.78	30.00
2437MHz	Pass	3.08	23.79	23.79	23.68	23.59	29.73	30.00
2462MHz	Pass	3.08	23.63	23.78	23.61	23.52	29.66	30.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	3.08	22.31	22.03	22.06	22.29	28.19	30.00
2417MHz	Pass	3.08	23.70	23.68	23.77	23.80	29.76	30.00
2437MHz	Pass	3.08	23.72	23.67	23.40	23.61	29.62	30.00
2462MHz	Pass	3.08	23.58	23.65	23.40	23.56	29.57	30.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	3.08	23.92	24.18	23.80	23.75	29.94	30.00
2437MHz	Pass	3.08	23.65	23.61	23.68	23.72	29.69	30.00
2452MHz	Pass	3.08	23.41	23.42	23.27	23.19	29.34	30.00

DG = Directional Gain; Port X = Port X output power;
Inf = There's no restriction for the limit.



Average Power_Test Mode: Mode 2

Appendix C.2

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	28.66	0.73451
802.11be EHT40-BF_Nss1,(MCS0)_4TX	28.66	0.73451



Average Power_Test Mode: Mode 2

Appendix C.2

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	6.75	21.94	22.04	22.07	22.15	28.07	29.25
2437MHz	Pass	6.75	22.54	22.81	22.71	22.48	28.66	29.25
2462MHz	Pass	6.75	22.81	22.65	22.54	22.41	28.63	29.25
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	6.75	22.59	22.81	22.37	22.53	28.60	29.25
2437MHz	Pass	6.75	22.55	22.84	22.62	22.56	28.66	29.25
2452MHz	Pass	6.75	22.17	22.55	22.32	22.66	28.45	29.25

DG = Directional Gain; Port X = Port X output power;
Inf = There's no restriction for the limit.



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_4TX	5.60
802.11g_Nss1,(6Mbps)_4TX	0.22
802.11be EHT20_Nss1,(MCS0)_4TX	-0.69
802.11be EHT40_Nss1,(MCS0)_4TX	-2.30

RBW = 3kHz;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	6.75	-1.38	-1.95	-2.00	-1.39	4.06	7.25
2437MHz	Pass	6.75	-1.47	-0.12	-0.56	-0.49	4.76	7.25
2462MHz	Pass	6.75	-0.42	-0.46	-0.38	-0.08	5.60	7.25
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	6.75	-4.36	-5.60	-4.84	-3.66	0.05	7.25
2437MHz	Pass	6.75	-5.70	-5.64	-5.51	-4.85	0.20	7.25
2462MHz	Pass	6.75	-5.27	-5.71	-3.39	-4.37	0.22	7.25
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	6.75	-5.93	-5.99	-5.91	-5.70	-1.96	7.25
2437MHz	Pass	6.75	-4.93	-4.12	-4.45	-4.21	-0.98	7.25
2462MHz	Pass	6.75	-4.18	-4.60	-4.76	-4.52	-0.69	7.25
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	6.75	-7.23	-6.55	-6.49	-6.48	-2.30	7.25
2437MHz	Pass	6.75	-7.27	-6.85	-6.80	-7.29	-3.33	7.25
2452MHz	Pass	6.75	-6.99	-6.38	-7.47	-6.76	-2.97	7.25


DG = Directional Gain; RBW = 3kHz;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

PSD

2412MHz

18/03/2026

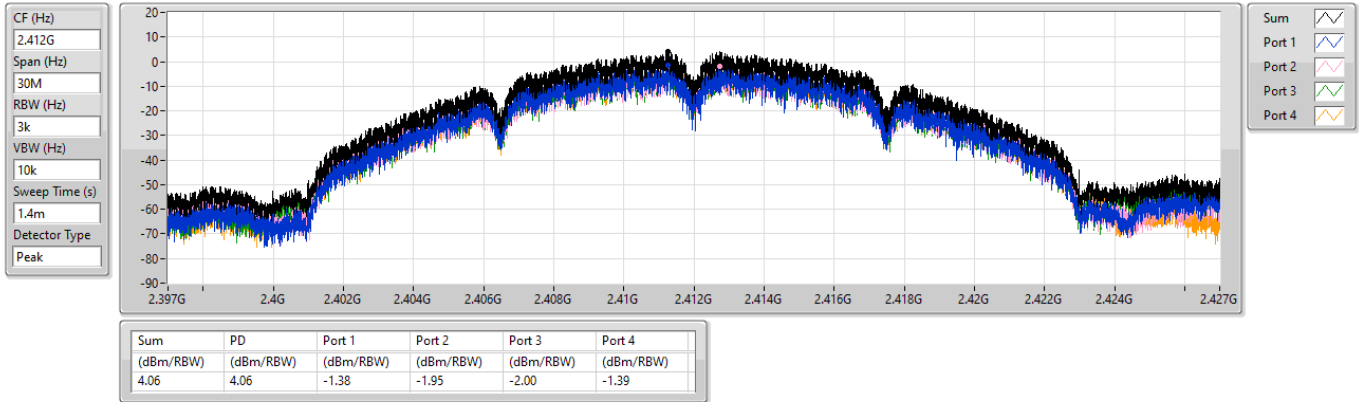


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

PSD

2437MHz

18/03/2026

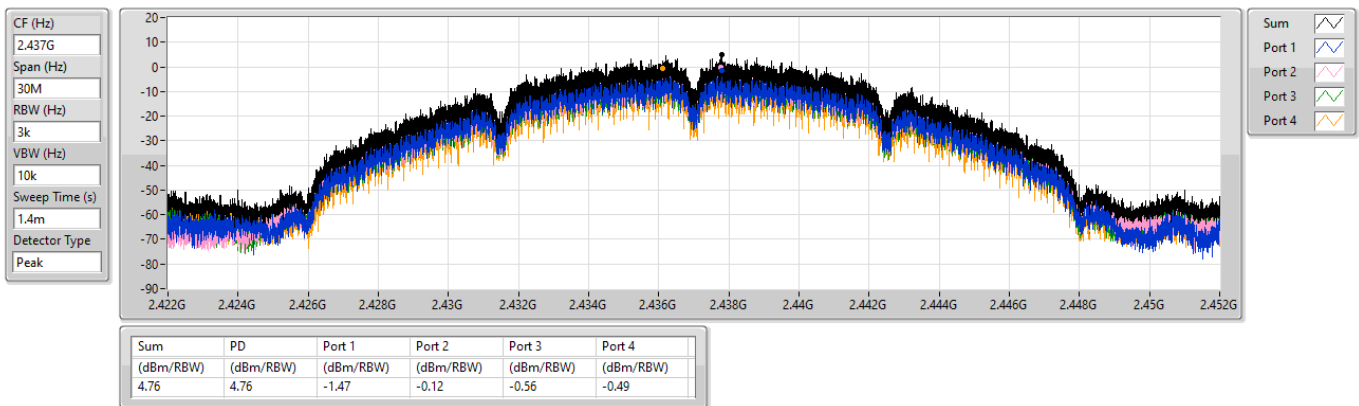


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

PSD

2462MHz

18/03/2026

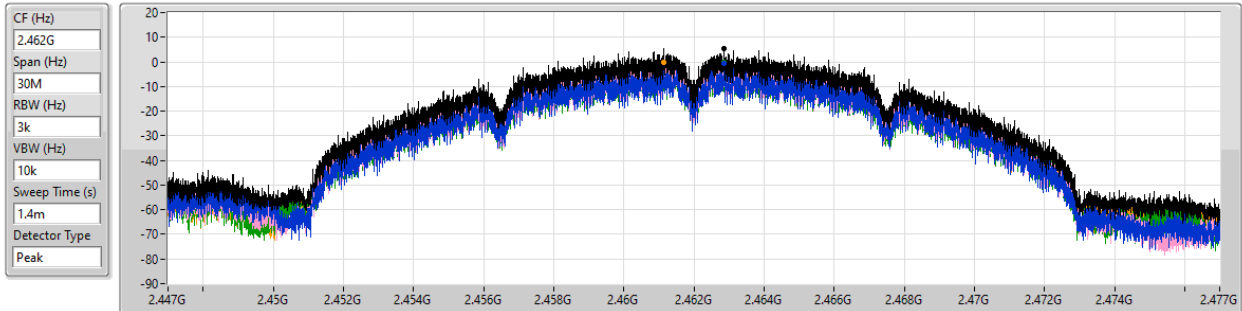


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.60	5.60	-0.42	-0.46	-0.38	-0.08

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

PSD

2412MHz

18/03/2026

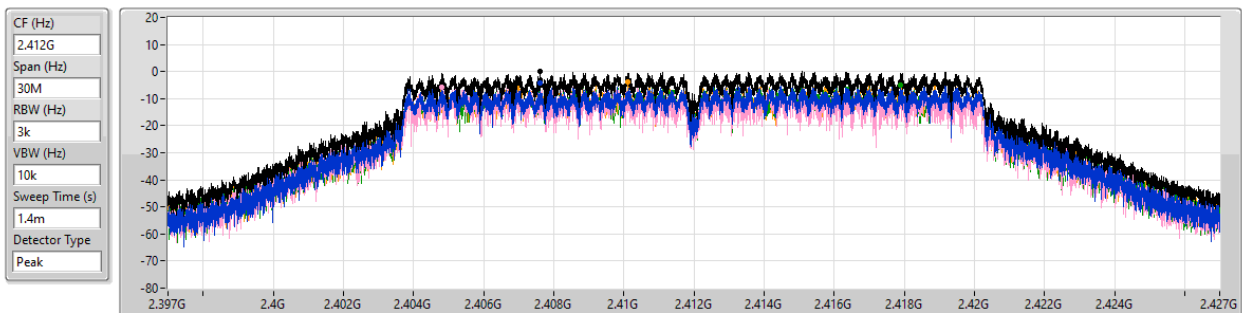


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.05	0.05	-4.36	-5.60	-4.84	-3.66

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

PSD

2437MHz

18/03/2026

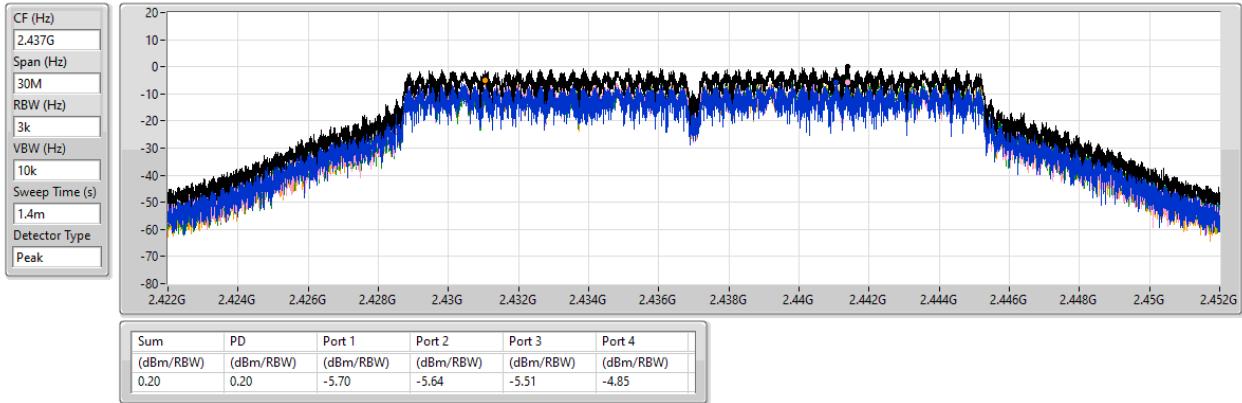


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

PSD

2462MHz

18/03/2026

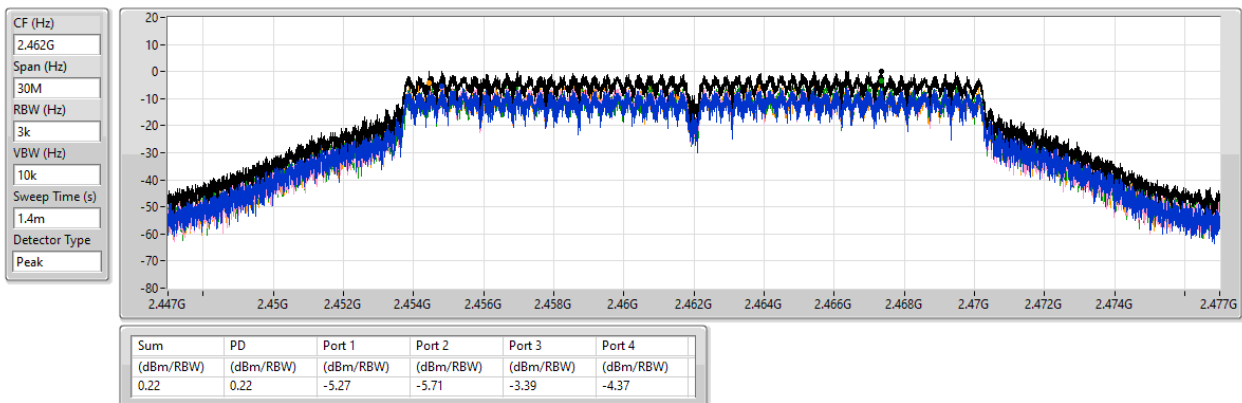

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

2412MHz

18/03/2026

CF (Hz)
2.412G


Span (Hz)
30M

RBW (Hz)
3k

VBW (Hz)
10k

Sweep Time (s)
1.4m

Detector Type
Peak

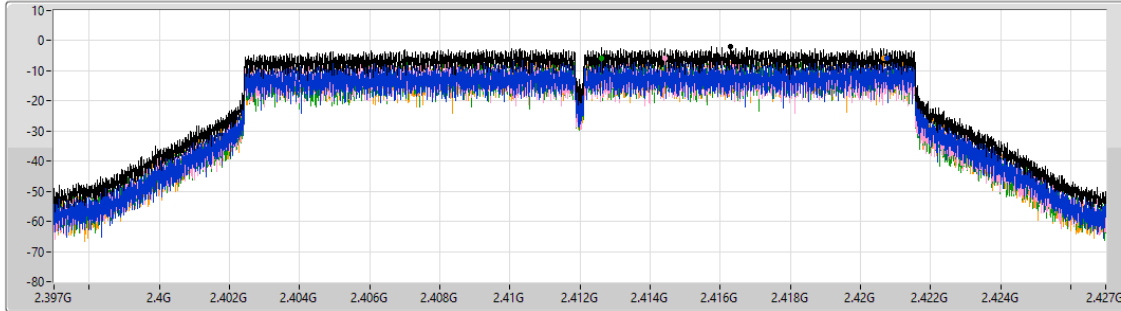

Sum

Port 1

Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.96	-1.96	-5.93	-5.99	-5.91	-5.70

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

2437MHz

18/03/2026

CF (Hz)
2.437G


Span (Hz)
30M

RBW (Hz)
3k

VBW (Hz)
10k

Sweep Time (s)
1.4m

Detector Type
Peak

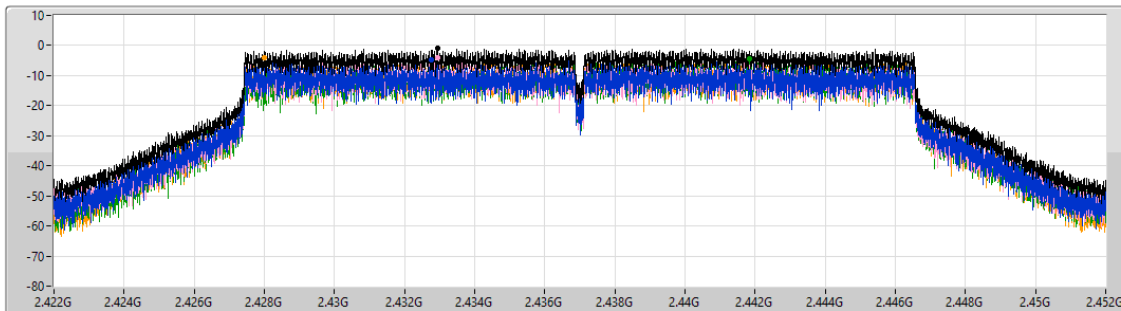

Sum

Port 1

Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.98	-0.98	-4.93	-4.12	-4.45	-4.21

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

2462MHz

18/03/2026

CF (Hz)
2.462G


Span (Hz)
30M

RBW (Hz)
3k

VBW (Hz)
10k

Sweep Time (s)
1.4m

Detector Type
Peak

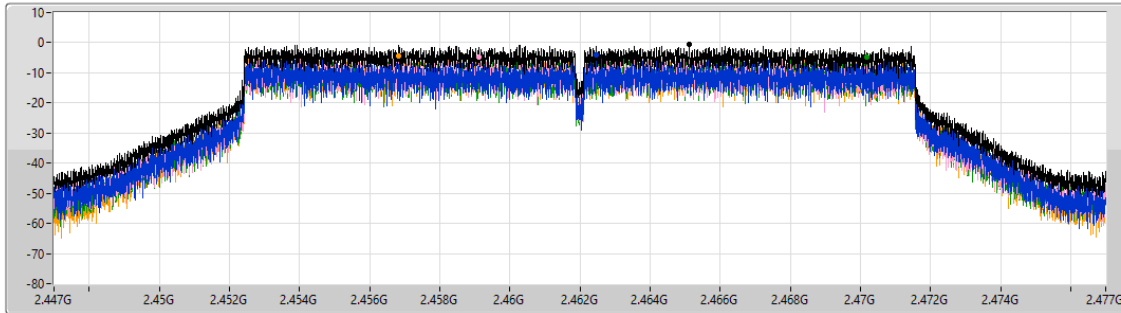

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.69	-0.69	-4.18	-4.60	-4.76	-4.52

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

2422MHz

18/03/2026

CF (Hz)
2.422G


Span (Hz)
60M

RBW (Hz)
3k

VBW (Hz)
10k

Sweep Time (s)
2.79m

Detector Type
Peak

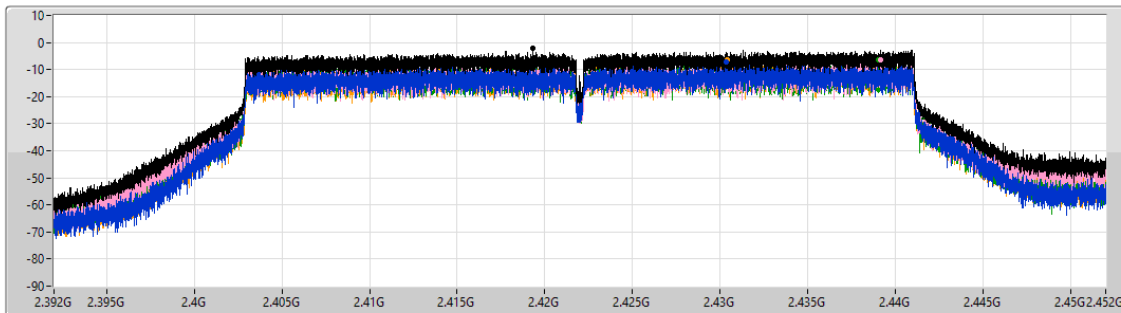


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.30	-2.30	-7.23	-6.55	-6.49	-6.48

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

2437MHz

18/03/2026

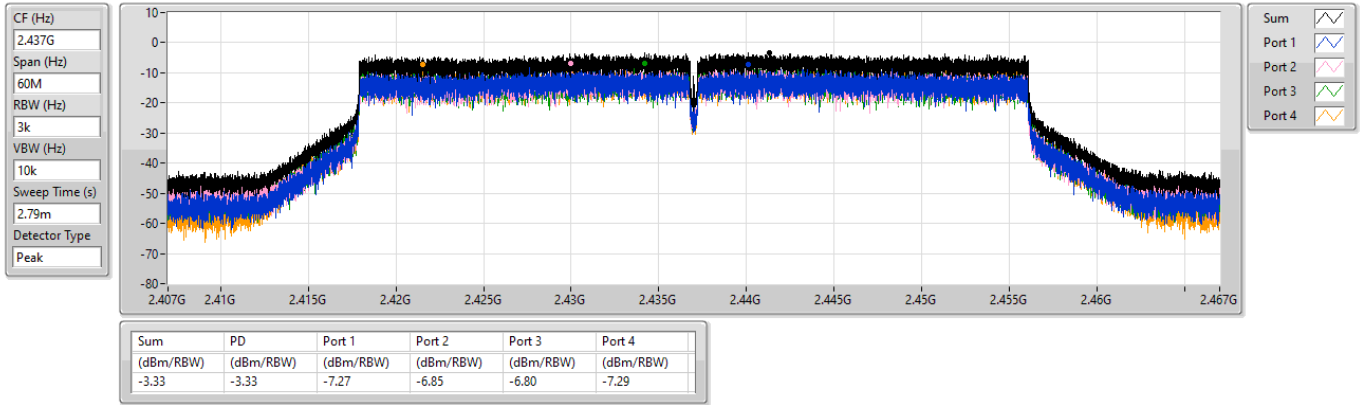


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

2452MHz

18/03/2026

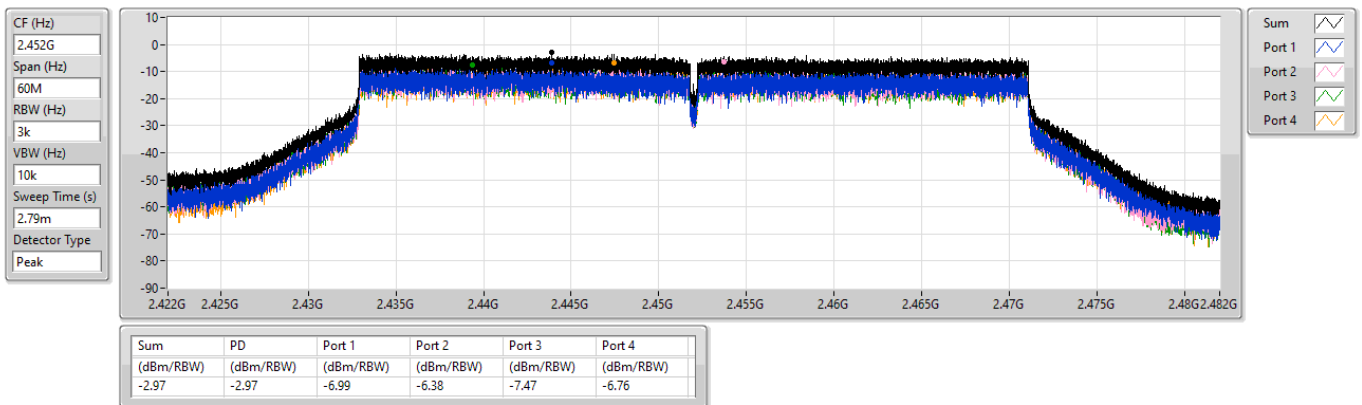



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-0.85
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-0.30

RBW = 3kHz;



Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	6.75	-3.65	-5.71	-5.80	-4.73	-1.14	7.25
2437MHz	Pass	6.75	-5.44	-4.97	-3.22	-2.78	-0.85	7.25
2462MHz	Pass	6.75	-4.40	-4.98	-5.68	-3.49	-1.12	7.25
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	6.75	-7.20	-5.74	-3.98	-1.46	-0.34	7.25
2437MHz	Pass	6.75	-2.01	-1.58	-6.85	-8.00	-0.30	7.25
2452MHz	Pass	6.75	-6.10	-3.82	-6.24	-7.20	-2.26	7.25


DG = Directional Gain; RBW = 3kHz;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

2412MHz

24/04/2026

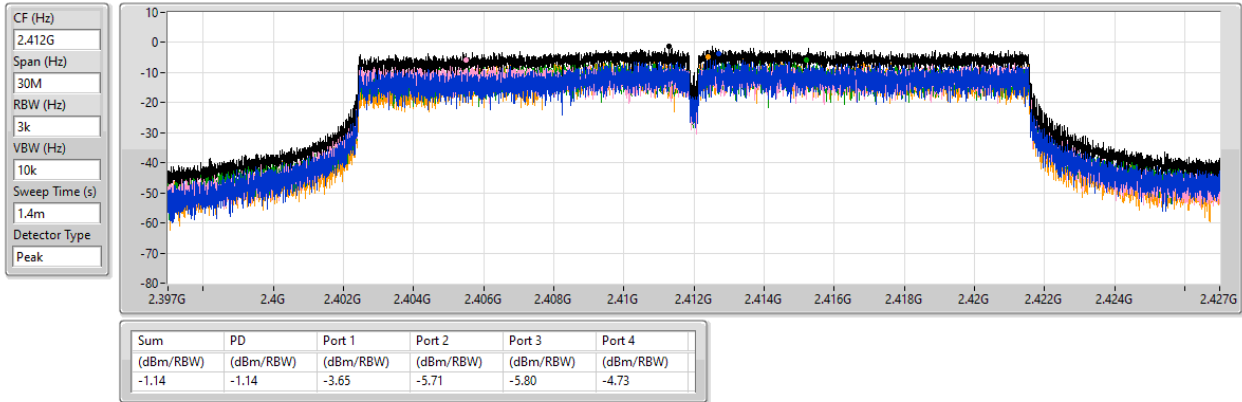


2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

2437MHz

24/04/2026

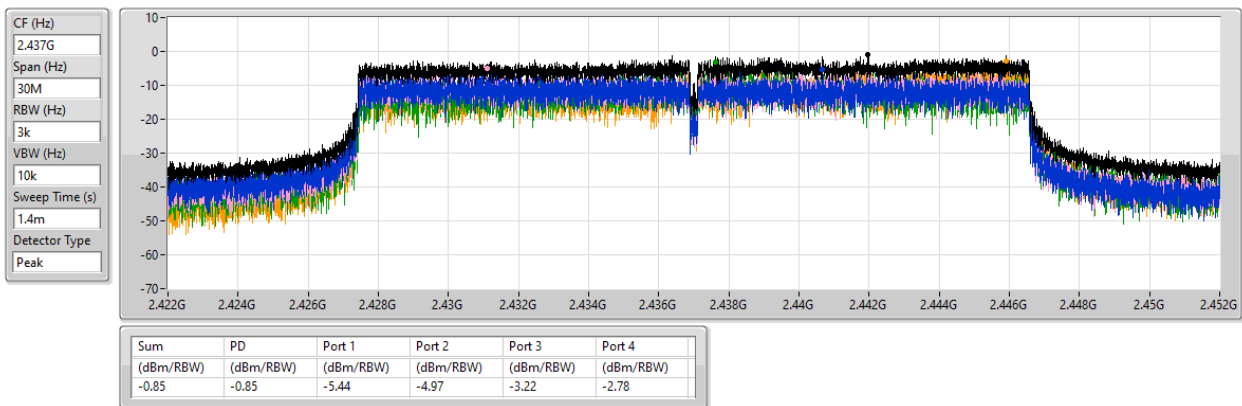


2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

2462MHz

24/04/2026

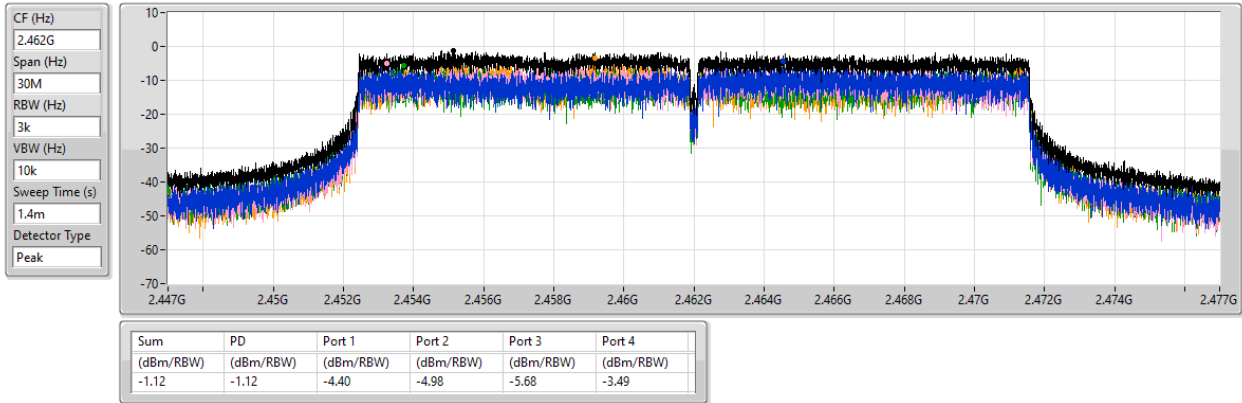


2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

2422MHz

24/04/2026

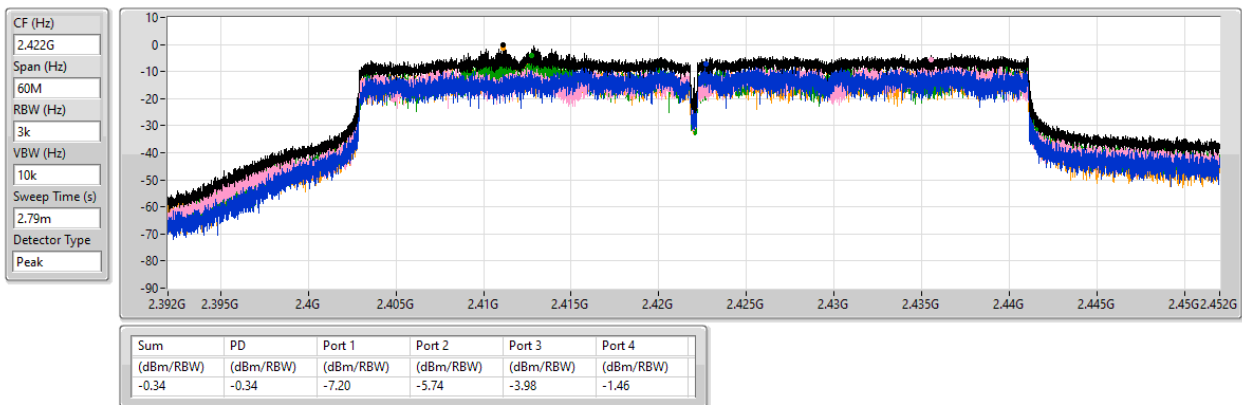


2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

2437MHz

24/04/2026

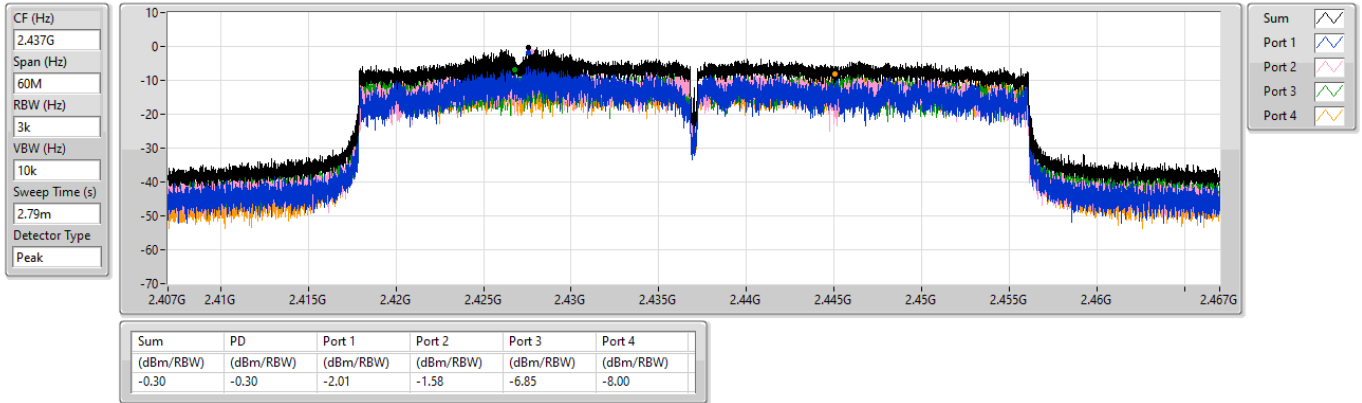


2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

2452MHz

24/04/2026

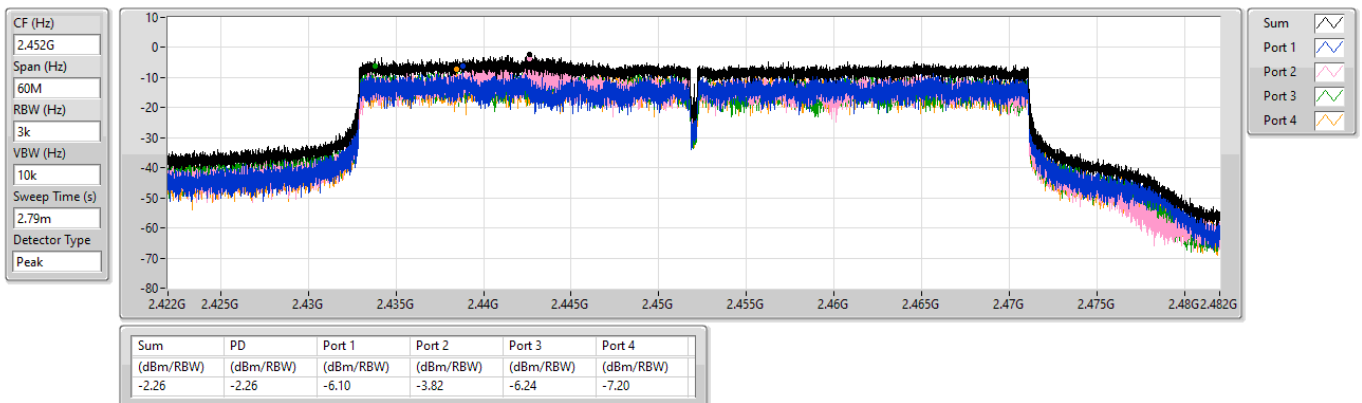

**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_4TX	Pass	2.41236G	14.20	-15.80	2.04196G	-54.10	2.39848G	-38.15	2.4G	-39.48	2.50414G	-53.88	7.23795G	-45.01	2
802.11g_Nss1,(6Mbps)_4TX	Pass	2.41687G	12.86	-17.14	2.19923G	-54.58	2.39984G	-23.02	2.4G	-19.91	2.51438G	-54.29	21.887G	-46.90	4
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	2.43941G	12.29	-17.71	2.1736G	-54.70	2.4G	-21.57	2.4G	-21.94	2.51102G	-54.29	21.96286G	-46.97	2
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	2.43691G	11.07	-18.93	1.85628G	-54.85	2.39952G	-19.41	2.4G	-20.51	2.5531G	-54.34	21.85328G	-46.59	2

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.41236G	14.20	-15.80	2.30641G	-54.34	2.39856G	-40.67	2.4G	-42.27	2.51734G	-54.44	7.23795G	-46.30	1
2412MHz	Pass	2.41236G	14.20	-15.80	2.04196G	-54.10	2.39848G	-38.15	2.4G	-39.48	2.50414G	-53.88	7.23795G	-45.01	2
2412MHz	Pass	2.41236G	14.20	-15.80	2.02099G	-54.28	2.39856G	-39.16	2.4G	-39.90	2.51158G	-54.33	21.90948G	-45.62	3
2412MHz	Pass	2.41236G	14.20	-15.80	1.72741G	-54.05	2.39856G	-41.63	2.4G	-39.76	2.52086G	-54.16	7.23514G	-45.39	4
2437MHz	Pass	2.41236G	14.20	-15.80	1.65285G	-55.19	2.39912G	-52.74	2.4G	-52.69	2.51926G	-54.23	21.76057G	-45.98	1
2437MHz	Pass	2.41236G	14.20	-15.80	648.62M	-54.22	2.3996G	-49.99	2.4G	-52.37	2.50622G	-53.85	21.40376G	-46.96	2
2437MHz	Pass	2.41236G	14.20	-15.80	2.05361G	-54.94	2.3992G	-49.04	2.4G	-50.86	2.52262G	-54.53	21.92915G	-45.40	3
2437MHz	Pass	2.41236G	14.20	-15.80	1.78333G	-54.74	2.4G	-51.84	2.4G	-52.68	2.51718G	-53.85	21.93477G	-47.02	4
2462MHz	Pass	2.41236G	14.20	-15.80	1.9872G	-54.72	2.39968G	-51.25	2.4G	-52.43	2.51694G	-54.27	21.82519G	-47.12	1
2462MHz	Pass	2.41236G	14.20	-15.80	2.06642G	-54.85	2.39984G	-50.28	2.4G	-51.45	2.51006G	-53.49	22.00501G	-46.92	2
2462MHz	Pass	2.41236G	14.20	-15.80	2.19341G	-54.73	2.39936G	-52.37	2.4G	-52.42	2.5135G	-54.14	21.61448G	-46.96	3
2462MHz	Pass	2.41236G	14.20	-15.80	30M	-54.56	2.4G	-51.93	2.4G	-51.38	2.50638G	-54.34	21.52176G	-47.20	4
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.41687G	12.86	-17.14	1.85905G	-54.99	2.39992G	-23.03	2.4G	-22.13	2.51998G	-53.99	21.94882G	-47.62	1
2412MHz	Pass	2.41687G	12.86	-17.14	2.09904G	-54.91	2.4G	-22.59	2.4G	-20.68	2.5231G	-53.57	21.57514G	-46.69	2
2412MHz	Pass	2.41687G	12.86	-17.14	2.18642G	-55.01	2.39992G	-23.08	2.4G	-19.95	2.50142G	-54.00	21.44028G	-47.52	3
2412MHz	Pass	2.41687G	12.86	-17.14	2.19923G	-54.58	2.39984G	-23.02	2.4G	-19.91	2.51438G	-54.29	21.887G	-46.90	4
2437MHz	Pass	2.41687G	12.86	-17.14	2.12933G	-54.21	2.39984G	-49.38	2.4G	-50.01	2.51382G	-53.94	21.79991G	-46.87	1
2437MHz	Pass	2.41687G	12.86	-17.14	2.13283G	-54.20	2.39952G	-47.45	2.4G	-45.65	2.50374G	-54.36	21.78024G	-46.92	2
2437MHz	Pass	2.41687G	12.86	-17.14	2.1538G	-55.28	2.39992G	-46.04	2.4G	-45.17	2.50062G	-54.37	21.85048G	-45.95	3
2437MHz	Pass	2.41687G	12.86	-17.14	2.11885G	-54.25	2.39968G	-49.41	2.4G	-50.94	2.5163G	-54.29	21.88139G	-47.13	4
2462MHz	Pass	2.41687G	12.86	-17.14	2.19457G	-54.65	2.3992G	-52.26	2.4G	-52.75	2.50742G	-53.97	21.91229G	-46.94	1
2462MHz	Pass	2.41687G	12.86	-17.14	1.83925G	-55.05	2.39936G	-51.34	2.4G	-51.53	2.50982G	-54.31	21.86172G	-47.24	2
2462MHz	Pass	2.41687G	12.86	-17.14	1.64469G	-54.21	2.39936G	-49.39	2.4G	-51.38	2.5027G	-54.77	21.77181G	-46.56	3
2462MHz	Pass	2.41687G	12.86	-17.14	1.75304G	-54.77	2.3996G	-53.87	2.4G	-54.35	2.5123G	-54.30	21.83924G	-47.53	4
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43941G	12.29	-17.71	34.66M	-54.40	2.4G	-24.75	2.4G	-24.24	2.51726G	-54.11	21.88139G	-46.14	1
2412MHz	Pass	2.43941G	12.29	-17.71	2.1736G	-54.70	2.4G	-21.57	2.4G	-21.94	2.51102G	-54.29	21.96286G	-46.97	2
2412MHz	Pass	2.43941G	12.29	-17.71	2.15147G	-54.67	2.39952G	-23.05	2.4G	-23.48	2.5211G	-54.64	21.88139G	-47.15	3
2412MHz	Pass	2.43941G	12.29	-17.71	54.47M	-53.94	2.39984G	-23.81	2.4G	-22.44	2.50694G	-53.53	21.91791G	-46.35	4
2437MHz	Pass	2.43941G	12.29	-17.71	2.15846G	-54.06	2.39968G	-47.02	2.4G	-46.55	2.52006G	-54.31	21.74934G	-46.02	1
2437MHz	Pass	2.43941G	12.29	-17.71	2.16545G	-54.37	2.39944G	-44.53	2.4G	-44.92	2.52214G	-53.71	21.96286G	-46.84	2
2437MHz	Pass	2.43941G	12.29	-17.71	1.79265G	-54.54	2.4G	-45.38	2.4G	-46.67	2.52086G	-54.34	21.87015G	-46.59	3
2437MHz	Pass	2.43941G	12.29	-17.71	1.71692G	-55.17	2.4G	-48.88	2.4G	-48.50	2.51014G	-54.42	21.92072G	-46.90	4
2462MHz	Pass	2.43941G	12.29	-17.71	1.95342G	-54.58	2.39912G	-53.68	2.4G	-53.91	2.51086G	-54.12	21.90105G	-47.37	1
2462MHz	Pass	2.43941G	12.29	-17.71	31.17M	-54.39	2.39864G	-52.36	2.4G	-52.52	2.51414G	-53.86	21.93196G	-47.61	2
2462MHz	Pass	2.43941G	12.29	-17.71	1.98371G	-54.13	2.4G	-51.68	2.4G	-52.38	2.51718G	-54.20	21.41219G	-46.65	3
2462MHz	Pass	2.43941G	12.29	-17.71	2.30758G	-53.97	2.39992G	-52.63	2.4G	-54.50	2.5159G	-53.79	21.77181G	-46.13	4
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.43691G	11.07	-18.93	1.98566G	-54.38	2.4G	-25.75	2.4G	-25.09	2.5499G	-54.37	21.79439G	-46.72	1
2422MHz	Pass	2.43691G	11.07	-18.93	1.85628G	-54.85	2.39952G	-19.41	2.4G	-20.51	2.5531G	-54.34	21.85328G	-46.59	2
2422MHz	Pass	2.43691G	11.07	-18.93	2.15283G	-54.00	2.39984G	-23.08	2.4G	-22.70	2.53886G	-54.13	21.8645G	-46.46	3
2422MHz	Pass	2.43691G	11.07	-18.93	2.03375G	-53.77	2.4G	-22.50	2.4G	-22.83	2.5283G	-54.36	21.87852G	-46.55	4
2437MHz	Pass	2.43691G	11.07	-18.93	2.02345G	-54.54	2.39984G	-31.54	2.4G	-35.41	2.5275G	-54.41	21.74951G	-47.20	1
2437MHz	Pass	2.43691G	11.07	-18.93	2.0681G	-54.05	2.39952G	-26.80	2.4G	-35.34	2.50142G	-54.74	21.82804G	-47.06	2
2437MHz	Pass	2.43691G	11.07	-18.93	2.30741G	-54.27	2.39712G	-28.60	2.4G	-33.54	2.56062G	-54.88	21.46625G	-45.71	3
2437MHz	Pass	2.43691G	11.07	-18.93	31.15M	-52.45	2.39968G	-30.59	2.4G	-37.75	2.5267G	-54.75	21.93181G	-47.21	4


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2452MHz	Pass	2.43691G	11.07	-18.93	1.63186G	-54.65	2.39968G	-39.74	2.4G	-39.56	2.5187G	-48.22	21.73829G	-47.10	1
2452MHz	Pass	2.43691G	11.07	-18.93	35.73M	-54.47	2.39952G	-35.09	2.4G	-36.44	2.50014G	-53.82	21.85609G	-47.51	2
2452MHz	Pass	2.43691G	11.07	-18.93	2.12535G	-54.98	2.39952G	-29.20	2.4G	-37.49	2.50078G	-54.40	21.53637G	-46.92	3
2452MHz	Pass	2.43691G	11.07	-18.93	2.30626G	-54.84	2.39952G	-37.53	2.4G	-39.39	2.55614G	-55.25	21.9907G	-46.29	4

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

CSEndB

2412MHz

18/03/2026

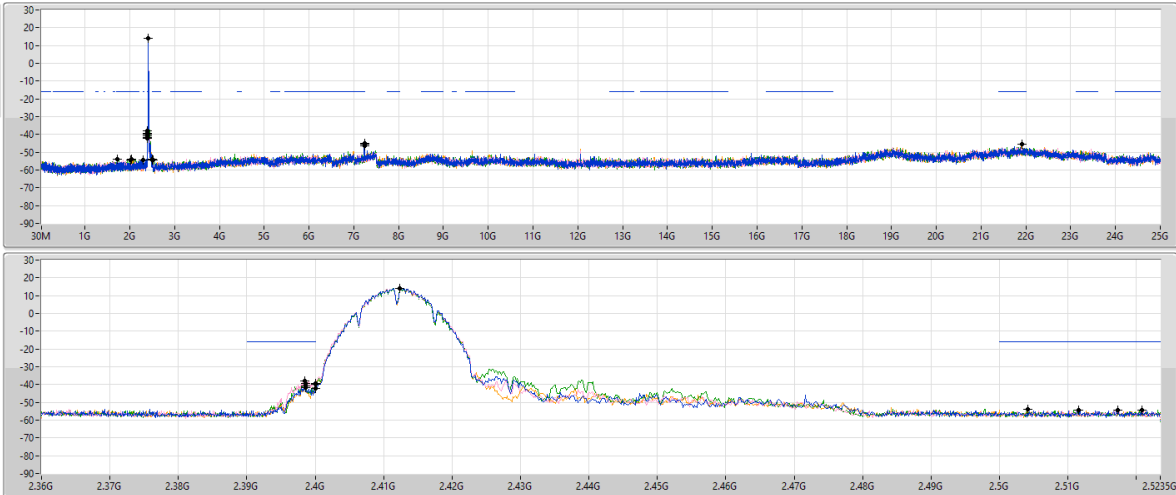RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.41236G	14.20	-15.80	2.30641G	-54.34	2.39856G	-40.67	2.4G	-42.27	2.51734G	-54.44	7.23795G	-46.30	1
2.41236G	14.20	-15.80	2.04196G	-54.10	2.39848G	-38.15	2.4G	-39.48	2.50414G	-53.88	7.23795G	-45.01	2
2.41236G	14.20	-15.80	2.02099G	-54.28	2.39856G	-39.16	2.4G	-39.90	2.51158G	-54.33	21.90948G	-45.62	3
2.41236G	14.20	-15.80	1.72741G	-54.05	2.39856G	-41.63	2.4G	-39.76	2.52086G	-54.16	7.23514G	-45.39	4

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

CSEndB

2437MHz

18/03/2026

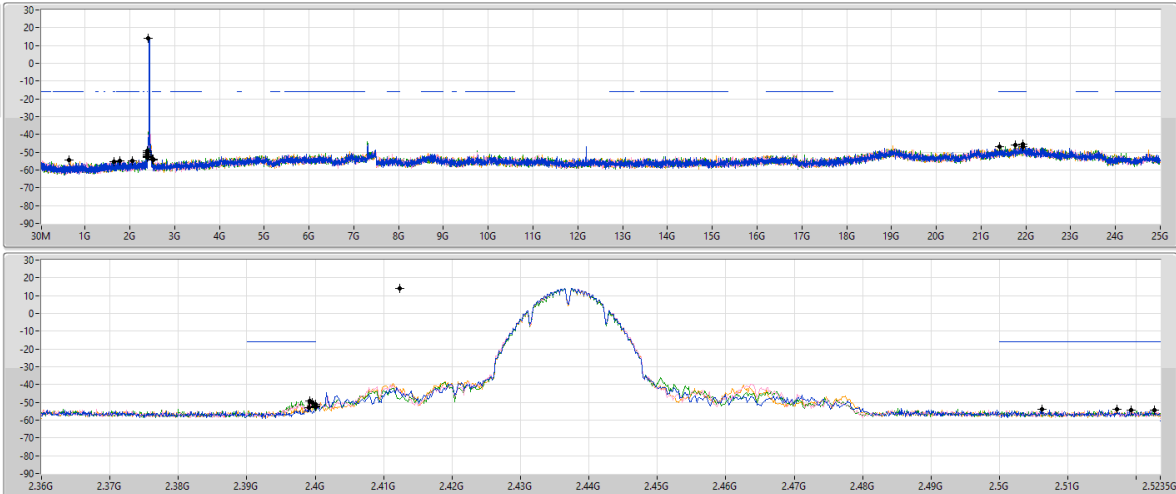RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.41236G	14.20	-15.80	1.65285G	-55.19	2.39912G	-52.74	2.4G	-52.69	2.51926G	-54.23	21.76057G	-45.98	1
2.41236G	14.20	-15.80	648.62M	-54.22	2.3996G	-49.99	2.4G	-52.37	2.50622G	-53.85	21.40376G	-46.96	2
2.41236G	14.20	-15.80	2.05361G	-54.94	2.3992G	-49.04	2.4G	-50.86	2.52262G	-54.33	21.92915G	-45.40	3
2.41236G	14.20	-15.80	1.78333G	-54.74	2.4G	-51.84	2.4G	-52.68	2.51718G	-53.85	21.93477G	-47.02	4

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

CSNdB

2462MHz

18/03/2026

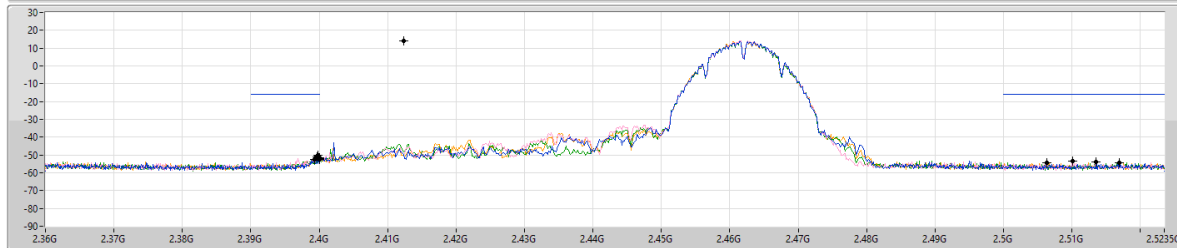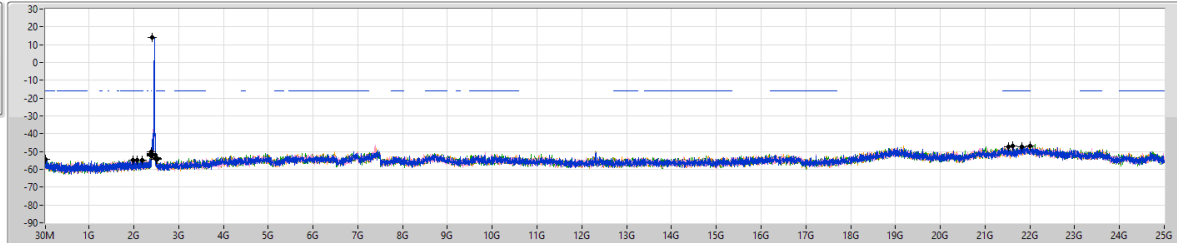RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.41236G	14.20	-15.80	1.9872G	-54.72	2.39968G	-51.25	2.4G	-52.43	2.51694G	-54.27	21.82519G	-47.12	1
2.41236G	14.20	-15.80	2.06642G	-54.85	2.39984G	-50.28	2.4G	-51.45	2.51006G	-53.49	22.00501G	-46.92	2
2.41236G	14.20	-15.80	2.19341G	-54.73	2.39936G	-52.37	2.4G	-52.42	2.5135G	-54.14	21.61448G	-46.96	3
2.41236G	14.20	-15.80	30M	-54.56	2.4G	-51.93	2.4G	-51.38	2.50638G	-54.34	21.52176G	-47.20	4

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

CSNdB

2412MHz

18/03/2026

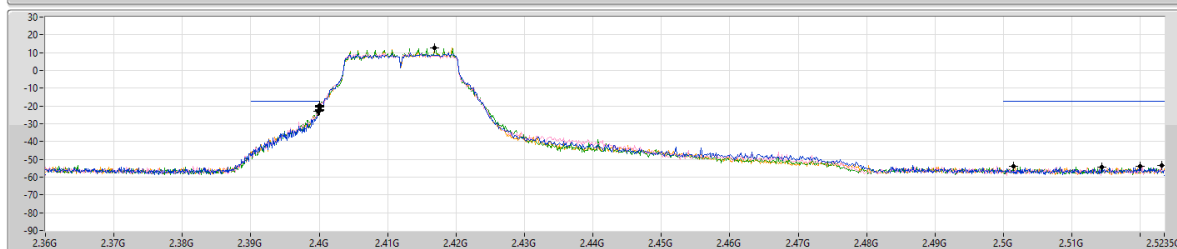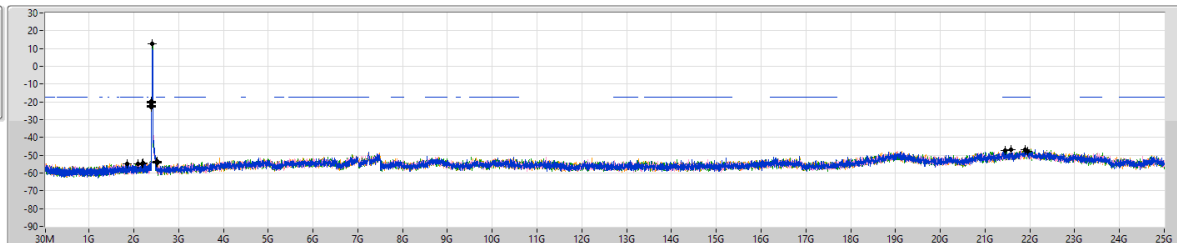RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.41687G	12.86	-17.14	1.85905G	-54.99	2.39992G	-23.03	2.4G	-22.13	2.51998G	-53.99	21.94882G	-47.62	1
2.41687G	12.86	-17.14	2.09904G	-54.91	2.4G	-22.59	2.4G	-20.68	2.5231G	-53.57	21.57514G	-46.69	2
2.41687G	12.86	-17.14	2.18642G	-55.01	2.39992G	-23.08	2.4G	-19.95	2.50142G	-54.00	21.44028G	-47.52	3
2.41687G	12.86	-17.14	2.19923G	-54.58	2.39904G	-23.02	2.4G	-19.91	2.51438G	-54.29	21.887G	-46.90	4

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

CSEndB

2437MHz

18/03/2026

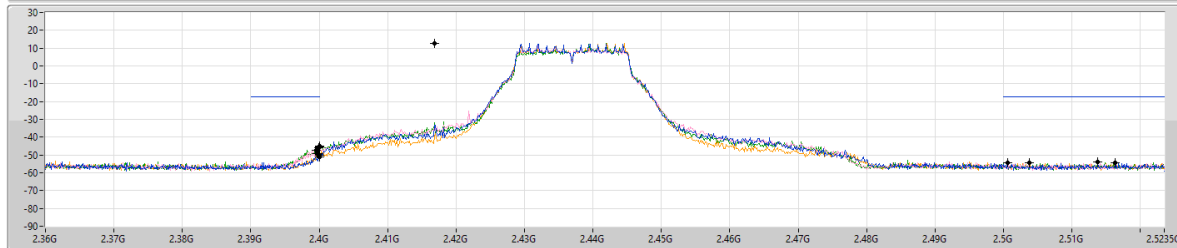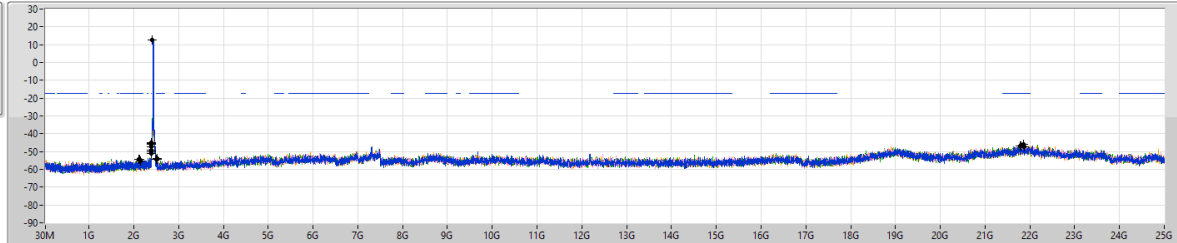RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.41687G	12.86	-17.14	2.12933G	-54.21	2.39984G	-49.38	2.4G	-50.01	2.51382G	-53.94	21.79991G	-46.87	1
2.41687G	12.86	-17.14	2.13283G	-54.20	2.39952G	-47.45	2.4G	-45.65	2.50374G	-54.36	21.78024G	-46.92	2
2.41687G	12.86	-17.14	2.1538G	-55.28	2.39992G	-46.04	2.4G	-45.17	2.50062G	-54.37	21.85048G	-45.95	3
2.41687G	12.86	-17.14	2.11885G	-54.25	2.39968G	-49.41	2.4G	-50.94	2.5163G	-54.29	21.88139G	-47.13	4

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

CSEndB

2462MHz

18/03/2026

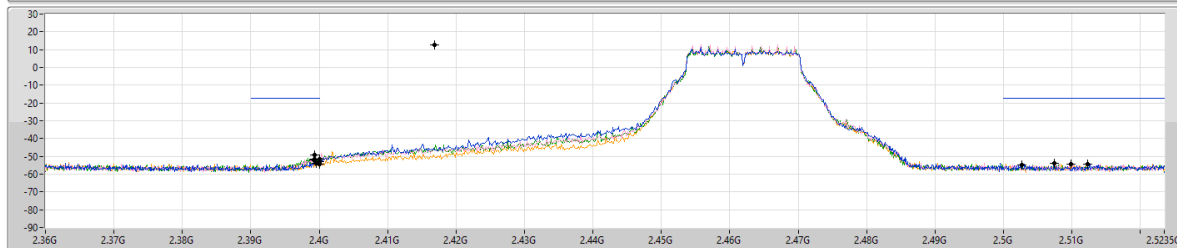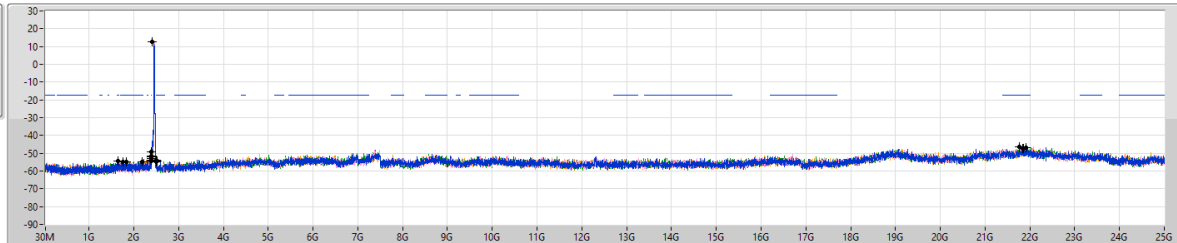RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.41687G	12.86	-17.14	2.19457G	-54.65	2.3992G	-52.26	2.4G	-52.75	2.50742G	-53.97	21.91229G	-46.94	1
2.41687G	12.86	-17.14	1.83925G	-55.05	2.39938G	-51.34	2.4G	-51.53	2.50982G	-54.31	21.86172G	-47.24	2
2.41687G	12.86	-17.14	1.64469G	-54.21	2.39936G	-49.39	2.4G	-51.38	2.5027G	-54.77	21.77181G	-46.56	3
2.41687G	12.86	-17.14	1.75304G	-54.77	2.3996G	-53.87	2.4G	-54.35	2.5123G	-54.30	21.83924G	-47.53	4

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSNdB

2412MHz

18/03/2026

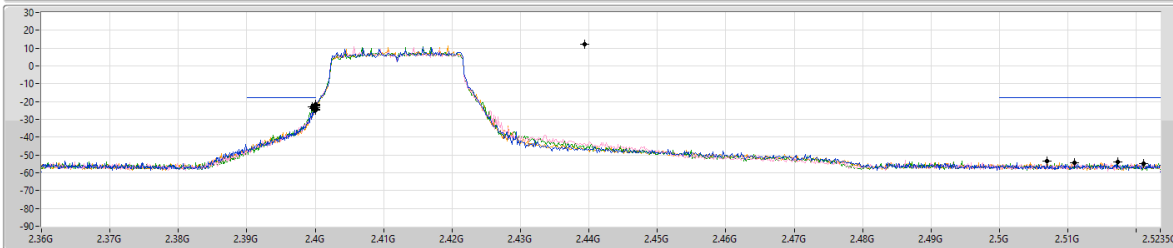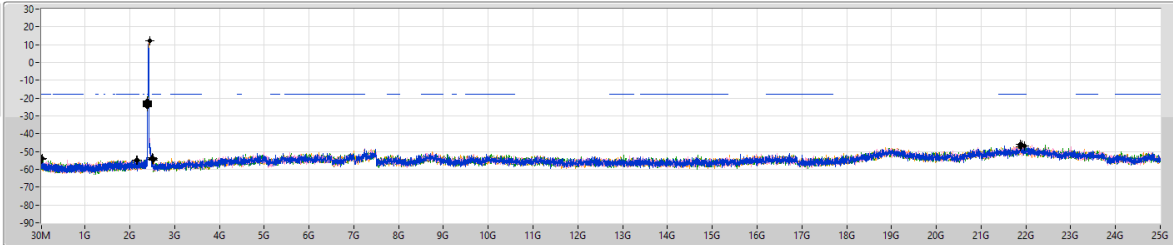RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43941G	12.29	-17.71	34.66M	-54.40	2.4G	-24.75	2.4G	-24.24	2.51726G	-54.11	21.88139G	-46.14	1
2.43941G	12.29	-17.71	2.1736G	-54.70	2.4G	-21.57	2.4G	-21.94	2.51102G	-54.29	21.96286G	-46.97	2
2.43941G	12.29	-17.71	2.15147G	-54.67	2.39953G	-23.05	2.4G	-23.48	2.5211G	-54.64	21.88139G	-47.15	3
2.43941G	12.29	-17.71	54.47M	-53.94	2.39984G	-23.81	2.4G	-22.44	2.50694G	-53.53	21.91791G	-46.35	4

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSNdB

2437MHz

18/03/2026

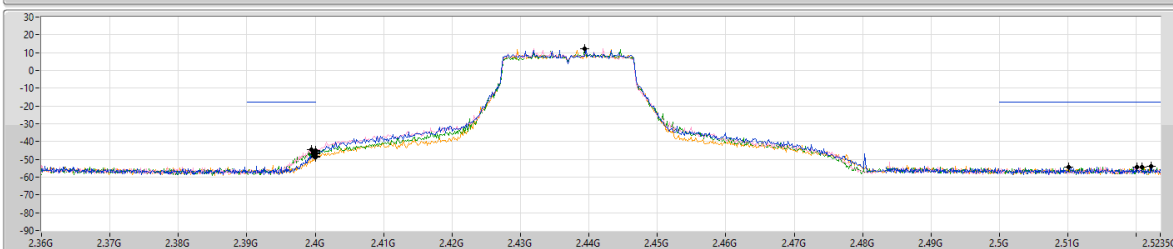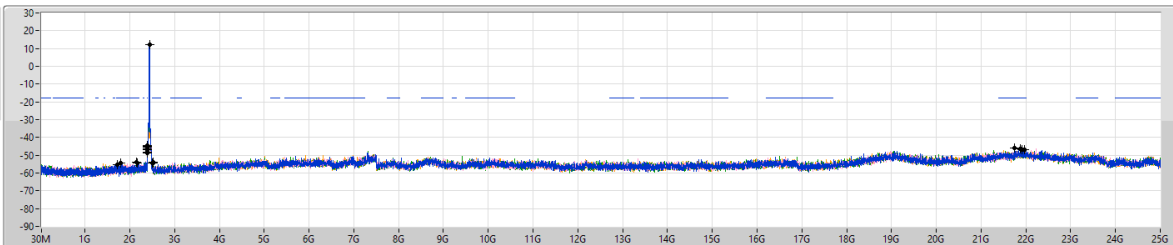RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43941G	12.29	-17.71	2.15846G	-54.06	2.39968G	-47.02	2.4G	-46.55	2.52006G	-54.31	21.74934G	-46.02	1
2.43941G	12.29	-17.71	2.16545G	-54.37	2.39944G	-44.53	2.4G	-44.92	2.52214G	-53.71	21.96286G	-46.84	2
2.43941G	12.29	-17.71	1.79255G	-54.54	2.4G	-45.38	2.4G	-46.67	2.52086G	-54.34	21.87015G	-46.59	3
2.43941G	12.29	-17.71	1.71692G	-55.17	2.4G	-48.88	2.4G	-48.50	2.51014G	-54.42	21.92072G	-46.90	4

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSNdB

2462MHz

18/03/2026

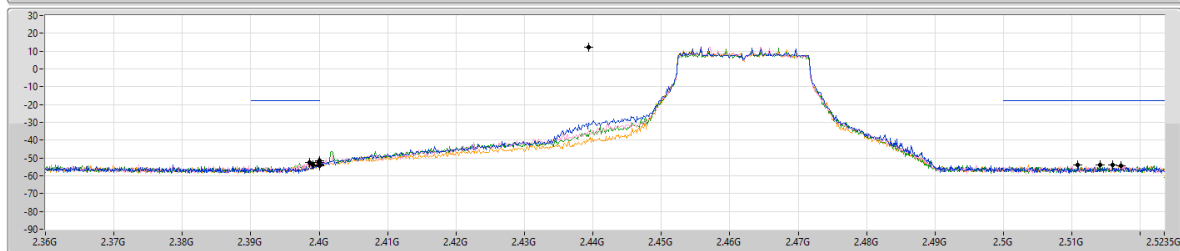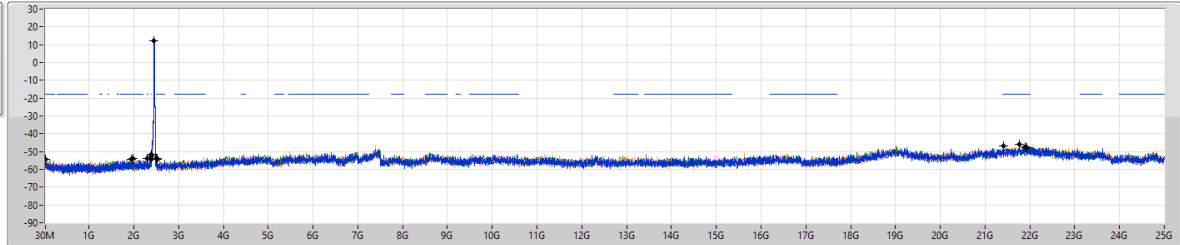RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43941G	12.29	-17.71	1.95342G	-54.58	2.39912G	-53.68	2.4G	-53.91	2.51086G	-54.12	21.90105G	-47.37	1
2.43941G	12.29	-17.71	31.17M	-54.39	2.39864G	-52.36	2.4G	-52.52	2.51414G	-53.86	21.93196G	-47.61	2
2.43941G	12.29	-17.71	1.98371G	-54.13	2.4G	-51.68	2.4G	-52.38	2.51718G	-54.20	21.41219G	-46.65	3
2.43941G	12.29	-17.71	2.30758G	-53.97	2.39992G	-52.63	2.4G	-54.50	2.5159G	-53.79	21.77181G	-46.13	4

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSNdB

2422MHz

18/03/2026

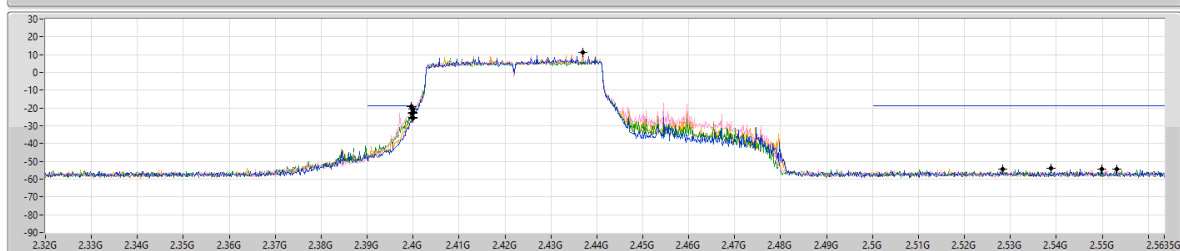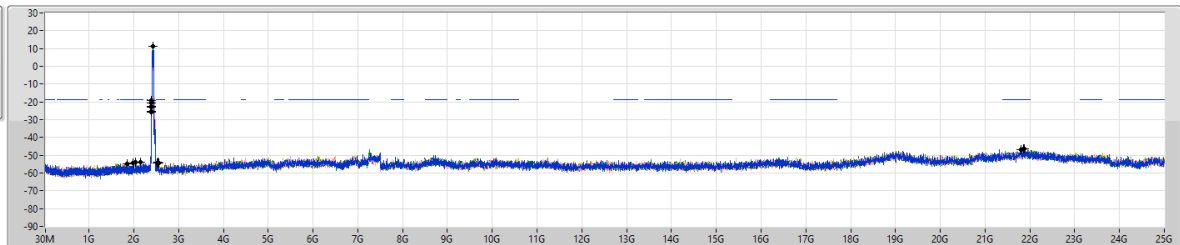RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43691G	11.07	-18.93	1.98566G	-54.38	2.4G	-25.75	2.4G	-25.09	2.5499G	-54.37	21.79439G	-46.72	1
2.43691G	11.07	-18.93	1.85628G	-54.85	2.39552G	-19.41	2.4G	-20.51	2.5531G	-54.34	21.85328G	-46.59	2
2.43691G	11.07	-18.93	2.15283G	-54.00	2.3984G	-23.08	2.4G	-22.70	2.53886G	-54.13	21.8645G	-46.46	3
2.43691G	11.07	-18.93	2.0375G	-53.77	2.4G	-22.50	2.4G	-22.83	2.5283G	-54.36	21.87852G	-46.55	4

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSNdB

2437MHz

18/03/2026

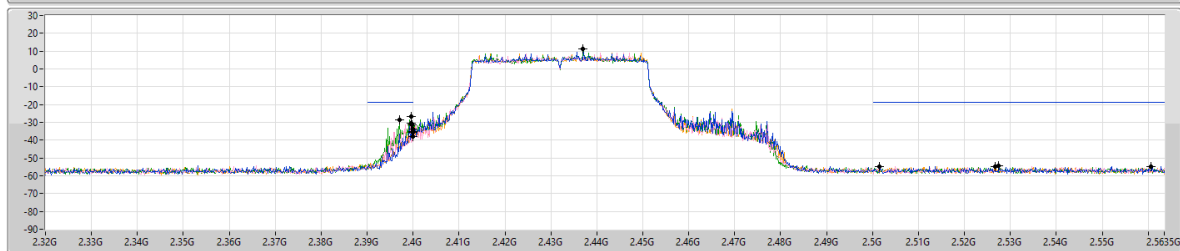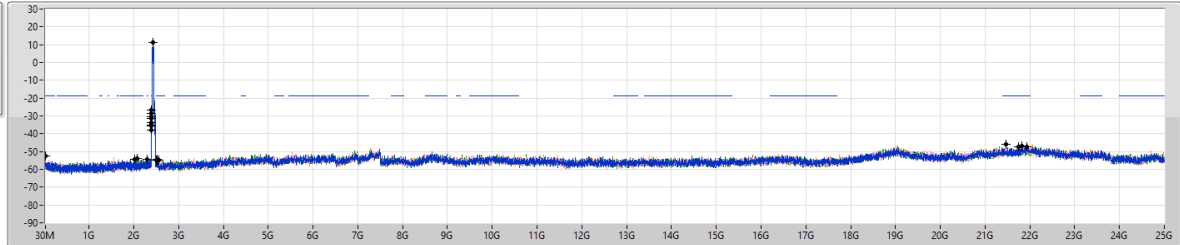RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43691G	11.07	-18.93	2.02345G	-54.54	2.39984G	-31.54	2.4G	-35.41	2.5275G	-54.41	21.74951G	-47.20	1
2.43691G	11.07	-18.93	2.0681G	-54.05	2.39952G	-26.80	2.4G	-35.34	2.50142G	-54.74	21.82804G	-47.06	2
2.43691G	11.07	-18.93	2.30741G	-54.27	2.39712G	-28.60	2.4G	-33.54	2.56062G	-54.88	21.46625G	-45.71	3
2.43691G	11.07	-18.93	31.15M	-52.45	2.39968G	-30.59	2.4G	-37.75	2.5267G	-54.75	21.93181G	-47.21	4

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSNdB

2452MHz

18/03/2026

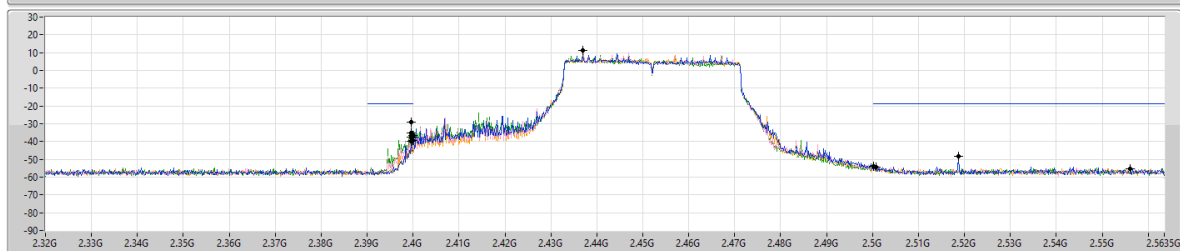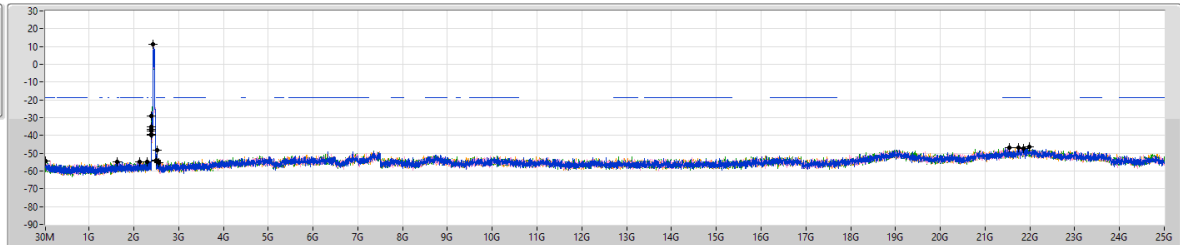RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43691G	11.07	-18.93	1.63186G	-54.65	2.39988G	-39.74	2.4G	-39.56	2.5187G	-48.22	21.73829G	-47.10	1
2.43691G	11.07	-18.93	35.73M	-54.47	2.39952G	-35.09	2.4G	-36.44	2.50014G	-53.82	21.85509G	-47.51	2
2.43691G	11.07	-18.93	2.12535G	-54.98	2.39952G	-29.20	2.4G	-37.49	2.50078G	-54.40	21.53837G	-46.92	3
2.43691G	11.07	-18.93	2.30626G	-54.84	2.39952G	-37.53	2.4G	-39.39	2.55614G	-55.25	21.9907G	-46.29	4



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	Pass	2.4354G	13.97	-16.03	2.01866G	-50.16	2.39952G	-16.78	2.4G	-20.46	2.5231G	-49.32	21.76338G	-41.75	1
802.11be EHT40-BF_Nss1,(MCS0)_4TX	Pass	2.42856G	14.69	-15.31	1.81849G	-49.43	2.3992G	-23.06	2.4G	-20.68	2.56318G	-50.01	21.82524G	-41.05	2

Result


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.4354G	13.97	-16.03	2.01866G	-50.16	2.39952G	-16.78	2.4G	-20.46	2.5231G	-49.32	21.76338G	-41.75	1
2412MHz	Pass	2.4354G	13.97	-16.03	2.16428G	-49.16	2.3996G	-17.48	2.4G	-19.70	2.51326G	-48.95	21.97129G	-41.91	2
2412MHz	Pass	2.4354G	13.97	-16.03	1.92546G	-49.49	2.39952G	-18.43	2.4G	-21.16	2.52318G	-50.01	21.75215G	-41.58	3
2412MHz	Pass	2.4354G	13.97	-16.03	1.99419G	-49.74	2.39944G	-20.57	2.4G	-18.10	2.50182G	-48.89	21.78586G	-41.04	4
2437MHz	Pass	2.4354G	13.97	-16.03	2.02565G	-49.75	2.4G	-40.35	2.4G	-38.61	2.50622G	-49.54	21.96005G	-41.02	1
2437MHz	Pass	2.4354G	13.97	-16.03	1.74022G	-49.84	2.39976G	-30.75	2.4G	-31.24	2.51566G	-49.23	21.96286G	-41.96	2
2437MHz	Pass	2.4354G	13.97	-16.03	2.05827G	-49.53	2.39952G	-39.74	2.4G	-39.56	2.52206G	-49.57	21.71281G	-40.60	3
2437MHz	Pass	2.4354G	13.97	-16.03	2.06642G	-48.84	2.4G	-36.57	2.4G	-38.86	2.50278G	-49.47	21.85891G	-41.30	4
2462MHz	Pass	2.4354G	13.97	-16.03	1.88585G	-49.53	2.39648G	-48.56	2.4G	-50.13	2.51774G	-49.63	21.86453G	-41.05	1
2462MHz	Pass	2.4354G	13.97	-16.03	2.30641G	-49.57	2.398G	-46.53	2.4G	-47.97	2.50558G	-49.76	21.80272G	-41.53	2
2462MHz	Pass	2.4354G	13.97	-16.03	167.47M	-50.17	2.4G	-46.14	2.4G	-48.69	2.50326G	-49.64	21.8561G	-39.87	3
2462MHz	Pass	2.4354G	13.97	-16.03	2.30874G	-48.71	2.39904G	-48.89	2.4G	-50.22	2.5015G	-49.18	21.85329G	-41.31	4
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.42856G	14.69	-15.31	1.81391G	-48.97	2.4G	-24.91	2.4G	-21.75	2.5043G	-49.35	21.92059G	-40.79	1
2422MHz	Pass	2.42856G	14.69	-15.31	1.81849G	-49.43	2.3992G	-23.06	2.4G	-20.68	2.56318G	-50.01	21.82524G	-41.05	2
2422MHz	Pass	2.42856G	14.69	-15.31	1.8975G	-49.40	2.39888G	-22.63	2.4G	-22.01	2.51518G	-50.04	21.8645G	-39.94	3
2422MHz	Pass	2.42856G	14.69	-15.31	1.84254G	-50.20	2.39984G	-22.43	2.4G	-24.40	2.53742G	-50.28	21.98229G	-40.93	4
2437MHz	Pass	2.42856G	14.69	-15.31	31.15M	-49.56	2.39968G	-29.32	2.4G	-24.80	2.54462G	-49.47	21.47186G	-41.73	1
2437MHz	Pass	2.42856G	14.69	-15.31	1.81849G	-49.90	2.39936G	-24.03	2.4G	-23.92	2.55918G	-50.10	21.6205G	-41.38	2
2437MHz	Pass	2.42856G	14.69	-15.31	1.92154G	-49.47	2.39936G	-25.63	2.4G	-25.19	2.55838G	-49.66	21.78597G	-41.04	3
2437MHz	Pass	2.42856G	14.69	-15.31	2.19291G	-50.19	2.39984G	-26.83	2.4G	-26.76	2.5107G	-50.13	21.84487G	-41.44	4
2452MHz	Pass	2.42856G	14.69	-15.31	2.19062G	-50.02	2.39984G	-31.29	2.4G	-32.57	2.50062G	-49.49	21.80841G	-40.74	1
2452MHz	Pass	2.42856G	14.69	-15.31	2.19291G	-50.08	2.4G	-28.13	2.4G	-29.56	2.55854G	-49.71	21.83084G	-40.31	2
2452MHz	Pass	2.42856G	14.69	-15.31	2.14596G	-50.04	2.4G	-27.93	2.4G	-28.13	2.50062G	-47.90	21.91779G	-40.84	3
2452MHz	Pass	2.42856G	14.69	-15.31	1.83452G	-50.16	2.39936G	-30.21	2.4G	-30.71	2.5523G	-49.25	21.91498G	-41.43	4

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

CSEndB

2412MHz

24/04/2026

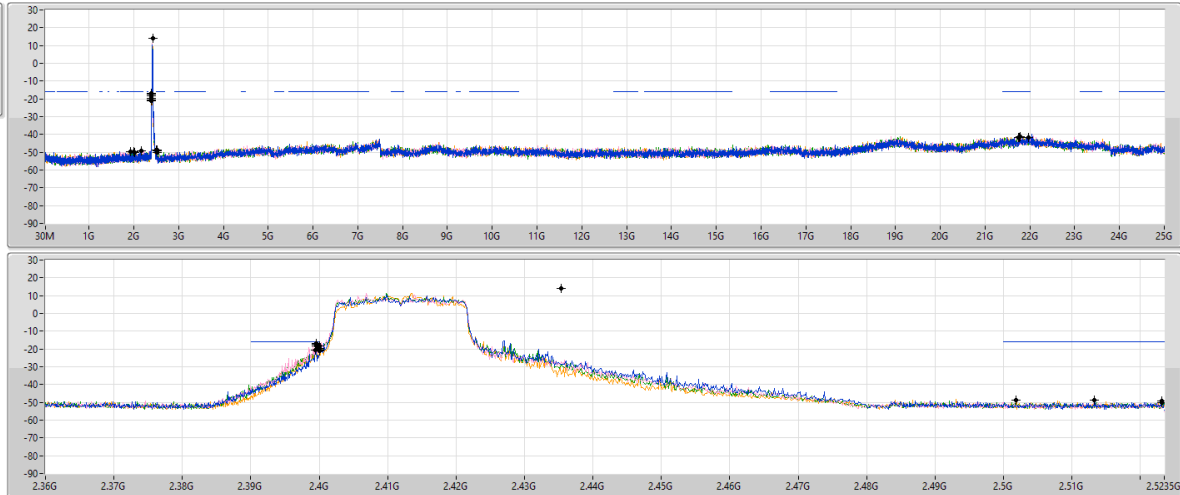RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.4354G	13.97	-16.03	2.01866G	-50.16	2.39952G	-16.78	2.4G	-20.46	2.5231G	-49.32	21.76338G	-41.75	1
2.4354G	13.97	-16.03	2.16428G	-49.16	2.3996G	-17.48	2.4G	-19.70	2.51326G	-48.95	21.97129G	-41.91	2
2.4354G	13.97	-16.03	1.92546G	-49.49	2.39952G	-18.43	2.4G	-21.16	2.52318G	-50.01	21.75215G	-41.58	3
2.4354G	13.97	-16.03	1.99419G	-49.74	2.39944G	-20.57	2.4G	-18.10	2.50182G	-48.89	21.78586G	-41.04	4

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

CSEndB

2437MHz

24/04/2026

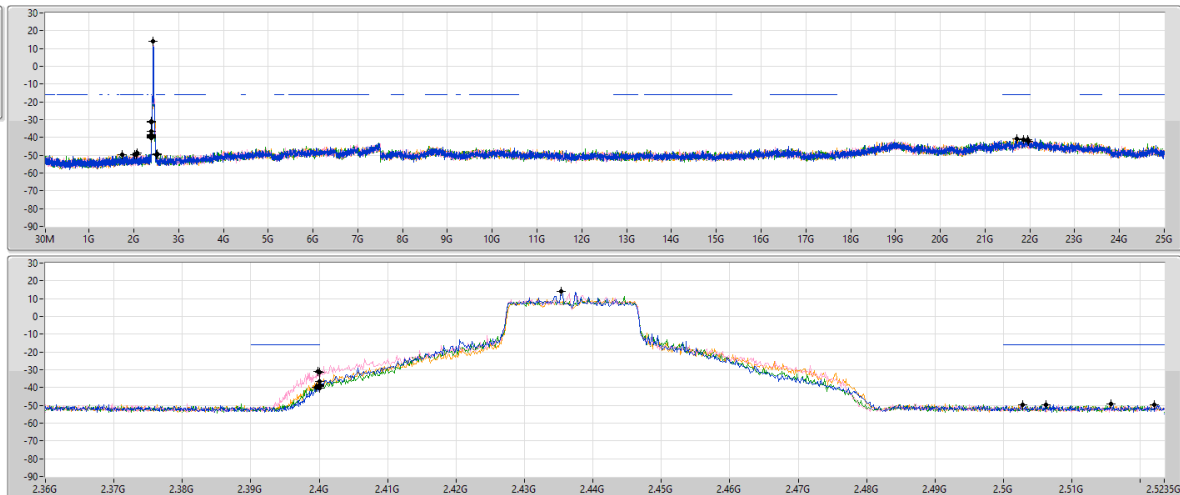RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.4354G	13.97	-16.03	2.02565G	-49.75	2.4G	-40.35	2.4G	-38.61	2.50622G	-49.54	21.96005G	-41.02	1
2.4354G	13.97	-16.03	1.74022G	-49.84	2.39976G	-30.75	2.4G	-31.24	2.51566G	-49.23	21.96286G	-41.96	2
2.4354G	13.97	-16.03	2.05827G	-49.53	2.39952G	-39.74	2.4G	-39.56	2.52206G	-49.57	21.71281G	-40.60	3
2.4354G	13.97	-16.03	2.06642G	-48.84	2.4G	-36.57	2.4G	-38.86	2.50278G	-49.47	21.85891G	-41.30	4

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

CSEndB

2462MHz

24/04/2026

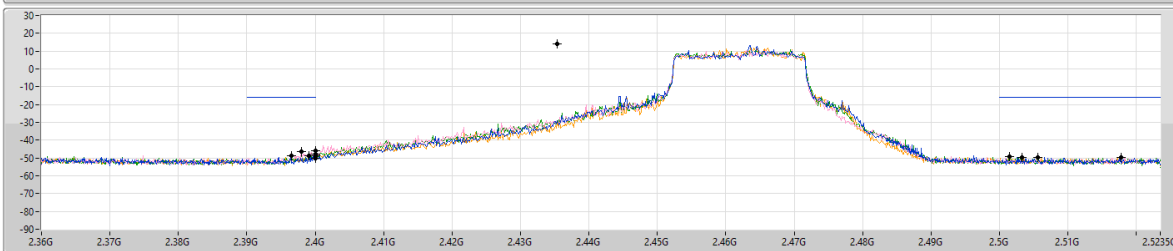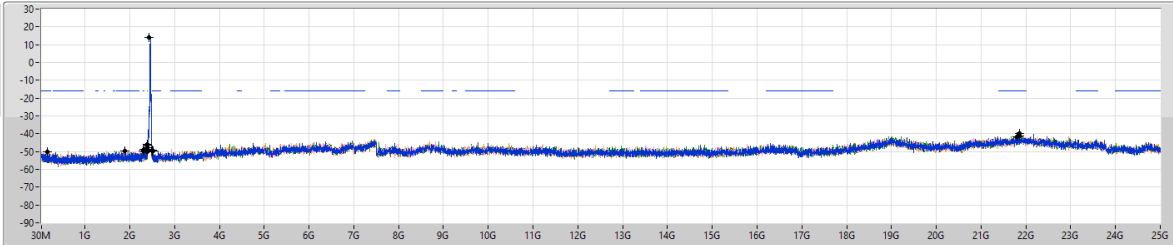RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.4354G	13.97	-16.03	1.88585G	-49.53	2.39648G	-48.56	2.4G	-50.13	2.51774G	-49.63	21.86453G	-41.05	1
2.4354G	13.97	-16.03	2.30641G	-49.57	2.398G	-46.53	2.4G	-47.97	2.50558G	-49.76	21.80272G	-41.53	2
2.4354G	13.97	-16.03	167.47M	-50.17	2.4G	-46.14	2.4G	-48.69	2.50326G	-49.64	21.8561G	-39.87	3
2.4354G	13.97	-16.03	2.30874G	-48.71	2.39904G	-48.89	2.4G	-50.22	2.5015G	-49.18	21.85329G	-41.31	4

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

CSEndB

2422MHz

24/04/2026

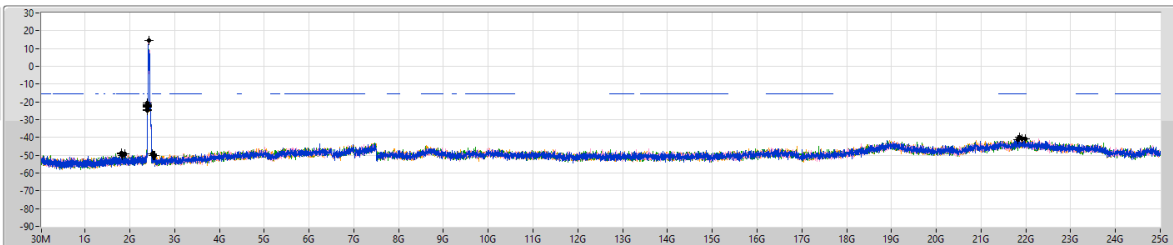RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.42856G	14.69	-15.31	1.81391G	-48.97	2.4G	-24.91	2.4G	-21.75	2.5043G	-49.35	21.92059G	-40.79	1
2.42856G	14.69	-15.31	1.81849G	-49.43	2.3992G	-23.06	2.4G	-20.68	2.56318G	-50.01	21.82504G	-41.05	2
2.42856G	14.69	-15.31	1.8975G	-49.40	2.39888G	-22.63	2.4G	-22.01	2.51518G	-50.04	21.8645G	-39.94	3
2.42856G	14.69	-15.31	1.84254G	-50.20	2.39904G	-22.43	2.4G	-24.40	2.53742G	-50.28	21.98229G	-40.93	4

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

CSNdB

2437MHz

24/04/2026

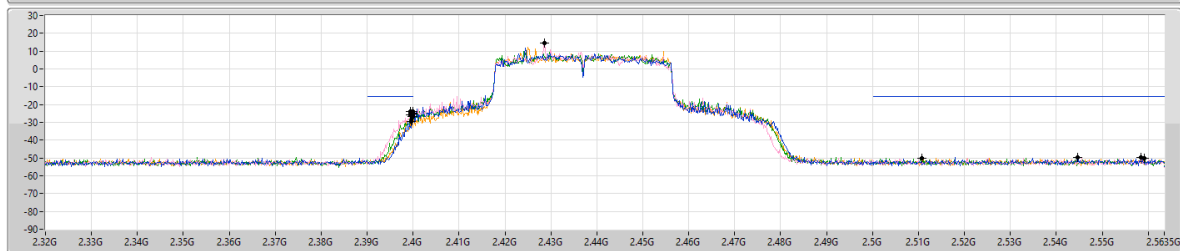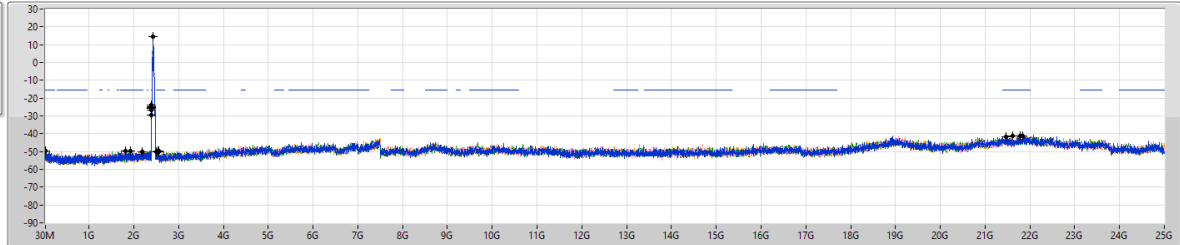RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.42856G	14.69	-15.31	31.15M	-49.56	2.39968G	-29.32	2.4G	-24.80	2.54462G	-49.47	21.47186G	-41.73	1
2.42856G	14.69	-15.31	1.81849G	-49.90	2.39936G	-24.03	2.4G	-23.92	2.55918G	-50.10	21.6205G	-41.38	2
2.42856G	14.69	-15.31	1.92154G	-49.47	2.39936G	-25.63	2.4G	-25.19	2.55838G	-49.66	21.78597G	-41.04	3
2.42856G	14.69	-15.31	2.19291G	-50.19	2.39984G	-26.83	2.4G	-26.76	2.5107G	-50.13	21.84487G	-41.44	4

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

CSNdB

2452MHz

24/04/2026

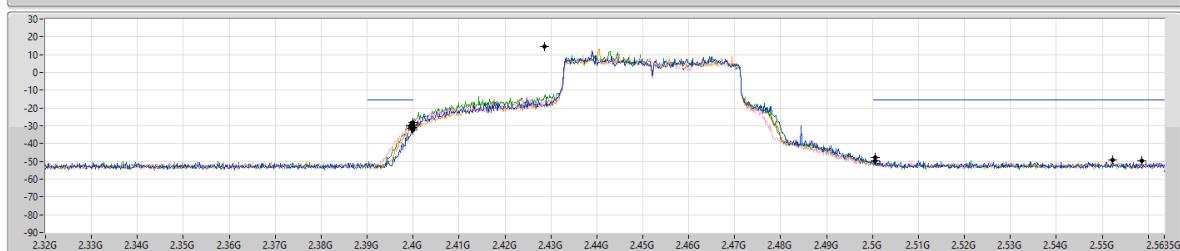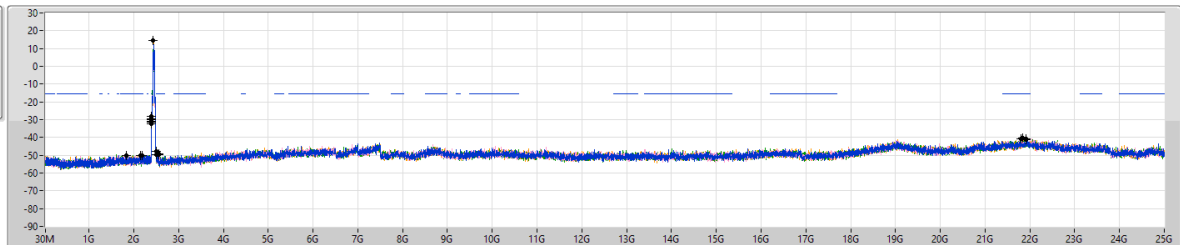RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.42856G	14.69	-15.31	2.19062G	-50.02	2.39984G	-31.29	2.4G	-32.57	2.50062G	-49.49	21.80841G	-40.74	1
2.42856G	14.69	-15.31	2.19291G	-50.08	2.4G	-28.13	2.4G	-29.56	2.55854G	-49.71	21.83084G	-40.31	2
2.42856G	14.69	-15.31	2.14596G	-50.04	2.4G	-27.93	2.4G	-28.13	2.50062G	-47.90	21.91779G	-40.84	3
2.42856G	14.69	-15.31	1.83452G	-50.16	2.39936G	-30.21	2.4G	-30.71	2.5523G	-49.25	21.91498G	-41.43	4




Radiated Emissions below 1GHz

Appendix F.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	QP	53.28M	36.59	40.00	-3.41	Vertical

Radiated Emissions below 1GHz_Mode 1

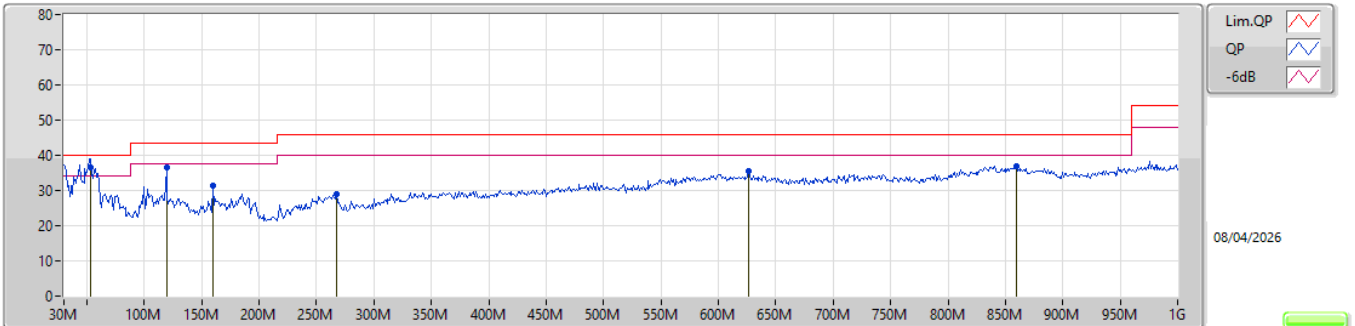

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
QP	53.28M	36.59	40.00	-3.41	-29.99	3	Vertical	360	1.00	"Worst"	66.58	13.38	1.32	44.69		
PK	119.24M	36.66	43.50	-6.84	-24.66	3	Vertical	38	1.25	-	61.32	18.08	1.93	44.67		
PK	159.98M	31.35	43.50	-12.15	-26.51	3	Vertical	239	1.00	-	57.86	15.85	2.23	44.59		
PK	267.65M	28.80	46.00	-17.20	-22.27	3	Vertical	235	1.50	-	51.07	19.23	2.87	44.37		
PK	626.55M	35.36	46.00	-10.64	-14.37	3	Vertical	181	1.00	-	49.73	25.24	4.25	43.86		
PK	859.35M	36.93	46.00	-9.07	-12.09	3	Vertical	201	3.00	-	49.02	26.51	4.96	43.56		

Radiated Emissions below 1GHz_Mode 1

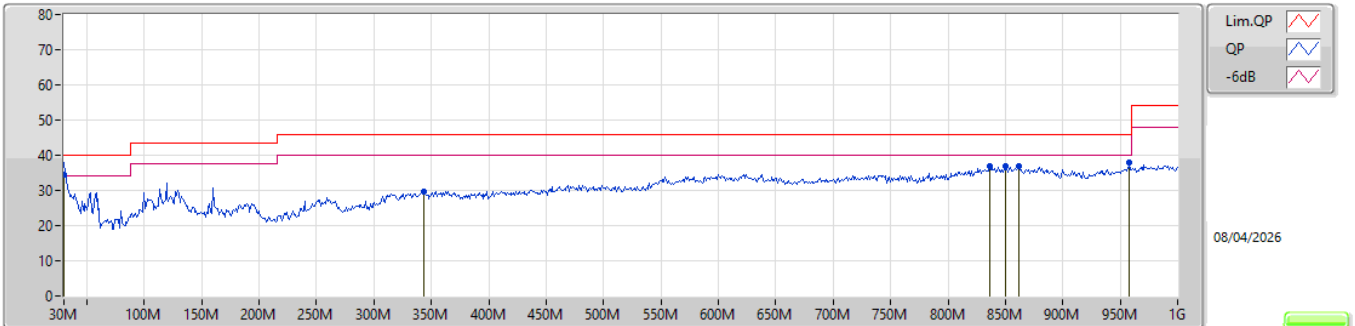

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
QP	30M	34.53	40.00	-5.47	-19.12	3	Horizontal	201	2.00	"Worst"	53.65	24.35	0.96	44.43		
PK	343.31M	29.81	46.00	-16.19	-21.26	3	Horizontal	305	1.00	-	51.07	19.82	3.24	44.32		
PK	836.07M	36.78	46.00	-9.22	-12.37	3	Horizontal	313	1.25	-	49.15	26.33	4.90	43.60		
PK	850.62M	37.02	46.00	-8.98	-12.16	3	Horizontal	360	1.50	-	49.18	26.49	4.93	43.58		
PK	861.29M	36.81	46.00	-9.19	-12.08	3	Horizontal	52	1.25	-	48.89	26.52	4.96	43.56		
PK	958.29M	37.82	46.00	-8.18	-11.05	3	Horizontal	357	2.00	-	48.87	27.26	5.22	43.53		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	AV	2.3864G	53.92	54.00	-0.08	3	Horizontal	306	1.99	-

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

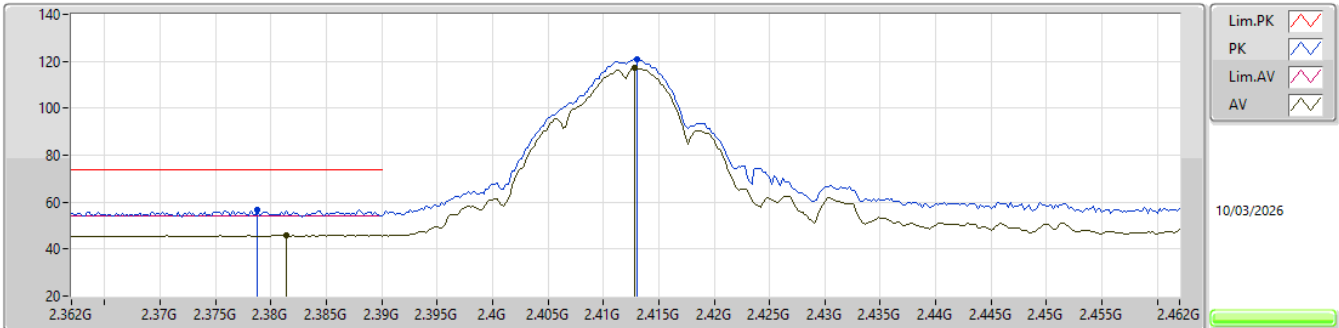


EUT_Y_4TX
Setting 25.5
02-D-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3788G	56.67	74.00	-17.33	23.82	3	Vertical	13	2.39	-	28.49	4.36	-				
AV	2.3814G	45.98	54.00	-8.02	13.12	3	Vertical	13	2.39	-	28.50	4.36	-				
PK	2.413G	121.11	Inf	-Inf	88.29	3	Vertical	13	2.39	-	28.43	4.39	-				
AV	2.4128G	117.41	Inf	-Inf	84.59	3	Vertical	13	2.39	-	28.43	4.39	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

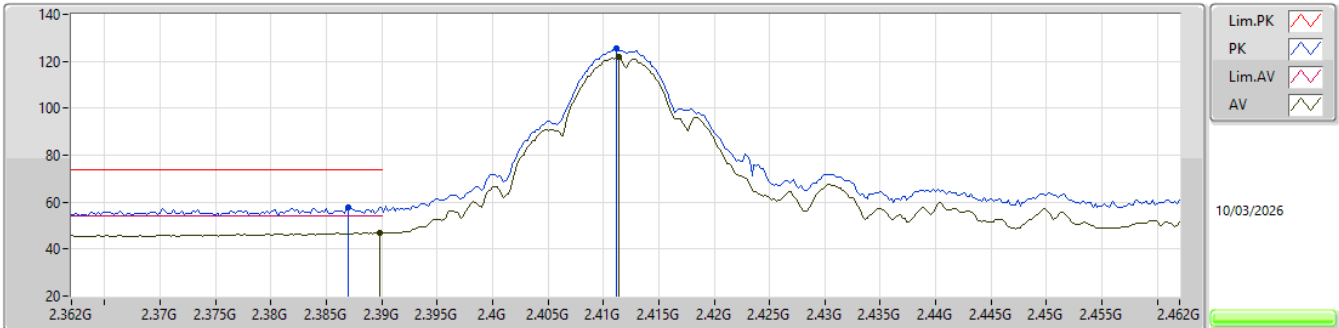


EUT_Y_4TX
Setting 25.5
02-D-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.387G	57.66	74.00	-16.34	24.80	3	Horizontal	333	1.64	-	28.50	4.36	-			
AV	2.3898G	46.99	54.00	-7.01	14.13	3	Horizontal	333	1.64	-	28.50	4.36	-			
PK	2.4112G	125.41	Inf	-Inf	92.61	3	Horizontal	333	1.64	-	28.41	4.39	-			
AV	2.4114G	122.01	Inf	-Inf	89.21	3	Horizontal	333	1.64	-	28.41	4.39	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

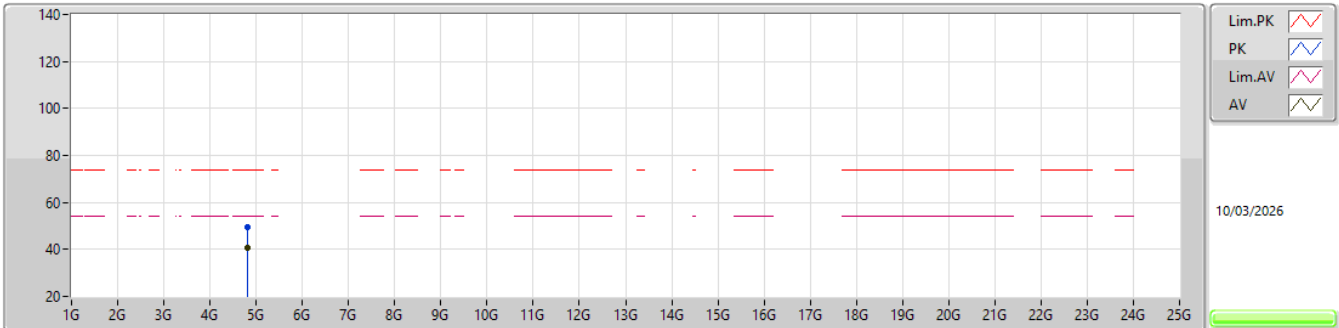


EUT_Y_4TX
Setting 25.5
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.82386G	49.27	74.00	-24.73	39.04	3	Vertical	195	1.50	-	32.95	7.41	30.13			
AV	4.824G	40.93	54.00	-13.07	30.70	3	Vertical	195	1.50	-	32.95	7.41	30.13			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

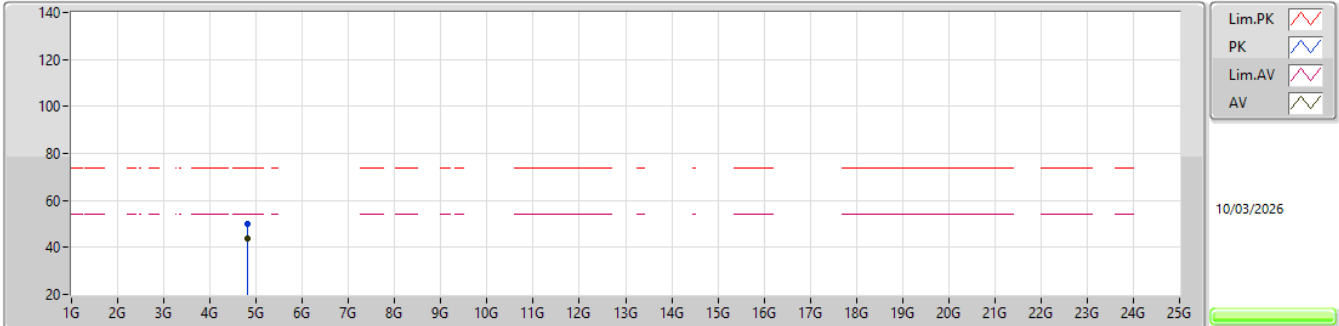


EUT_Y_4TX
Setting 25.5
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.82396G	50.05	74.00	-23.95	39.82	3	Horizontal	22	1.88	-	32.95	7.41	30.13			
AV	4.82402G	43.75	54.00	-10.25	33.52	3	Horizontal	22	1.88	-	32.95	7.41	30.13			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

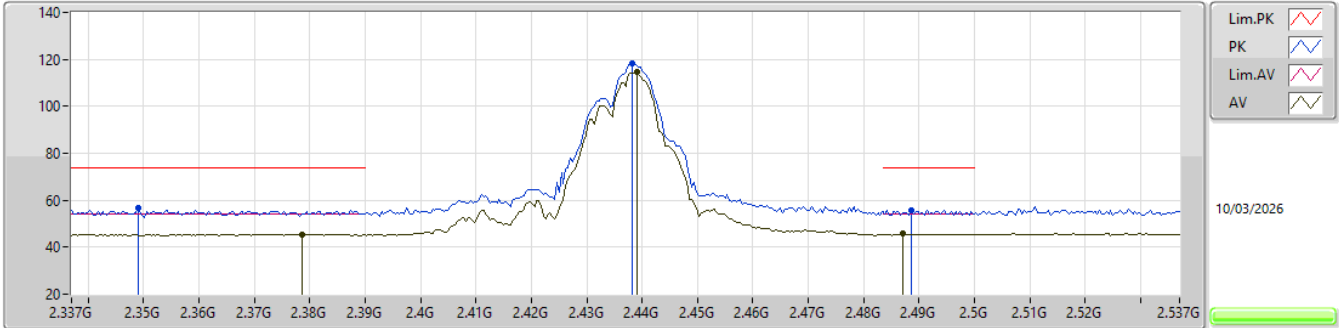


EUT_Y_4TX
Setting 25.5
02-D-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.349G	56.57	74.00	-17.43	23.94	3	Vertical	320	2.34	-	28.29	4.34	-			
AV	2.3786G	45.53	54.00	-8.47	12.68	3	Vertical	320	2.34	-	28.49	4.36	-			
PK	2.4382G	118.11	Inf	-Inf	85.29	3	Vertical	320	2.34	-	28.40	4.42	-			
AV	2.439G	114.57	Inf	-Inf	81.75	3	Vertical	320	2.34	-	28.40	4.42	-			
PK	2.4886G	55.79	74.00	-18.21	22.81	3	Vertical	320	2.34	-	28.49	4.49	-			
AV	2.487G	45.61	54.00	-8.39	12.65	3	Vertical	320	2.34	-	28.47	4.49	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

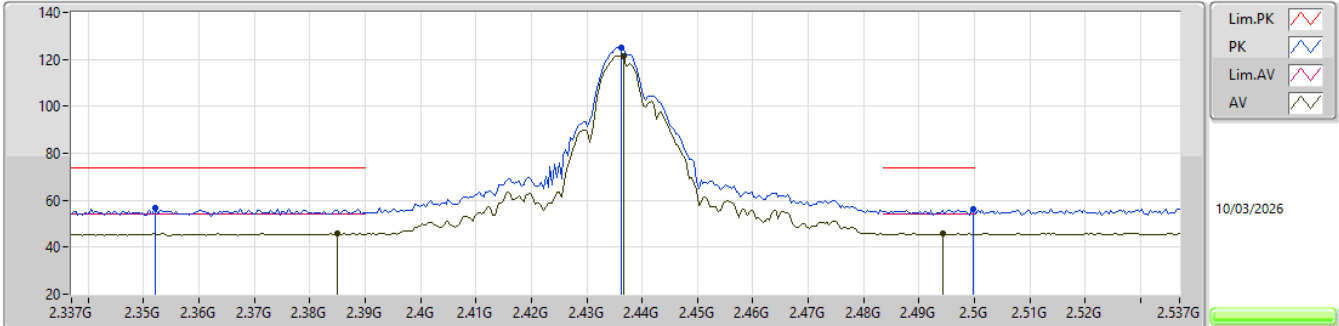


EUT_Y_4TX
Setting 25.5
02-D-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3522G	56.49	74.00	-17.51	23.85	3	Horizontal	331	2.13	-	28.30	4.34	-			
AV	2.385G	45.77	54.00	-8.23	12.91	3	Horizontal	331	2.13	-	28.50	4.36	-			
PK	2.4362G	125.25	Inf	-Inf	92.43	3	Horizontal	331	2.13	-	28.40	4.42	-			
AV	2.4366G	121.55	Inf	-Inf	88.73	3	Horizontal	331	2.13	-	28.40	4.42	-			
PK	2.4998G	55.95	74.00	-18.05	22.85	3	Horizontal	331	2.13	-	28.60	4.50	-			
AV	2.4942G	45.99	54.00	-8.01	12.95	3	Horizontal	331	2.13	-	28.54	4.50	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

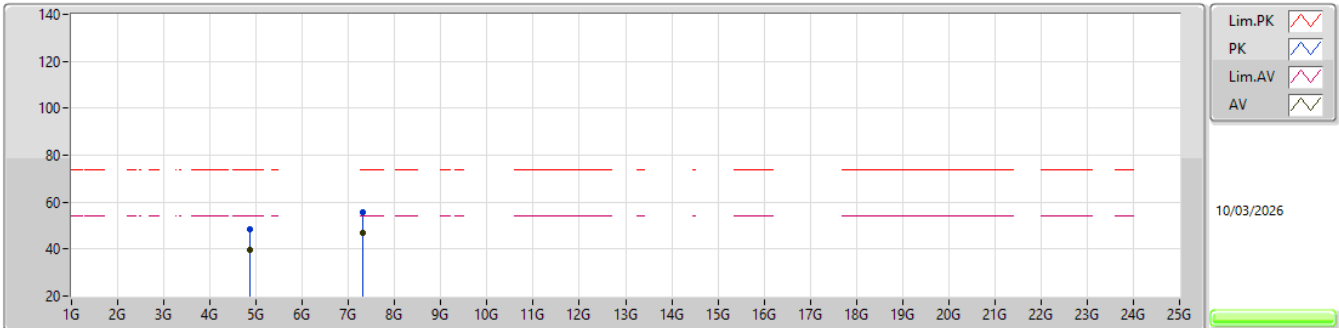


EUT_Y_4TX
Setting 25.5
02-D-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.8738G	48.37	74.00	-25.63	37.93	3	Vertical	14	1.79	-	33.10	7.45	30.11				
AV	4.87398G	39.57	54.00	-14.43	29.13	3	Vertical	14	1.79	-	33.10	7.45	30.11				
PK	7.31156G	55.88	74.00	-18.12	41.23	3	Vertical	58	2.04	-	36.52	9.02	30.89				
AV	7.30964G	46.70	54.00	-7.30	32.05	3	Vertical	58	2.04	-	36.52	9.02	30.89				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

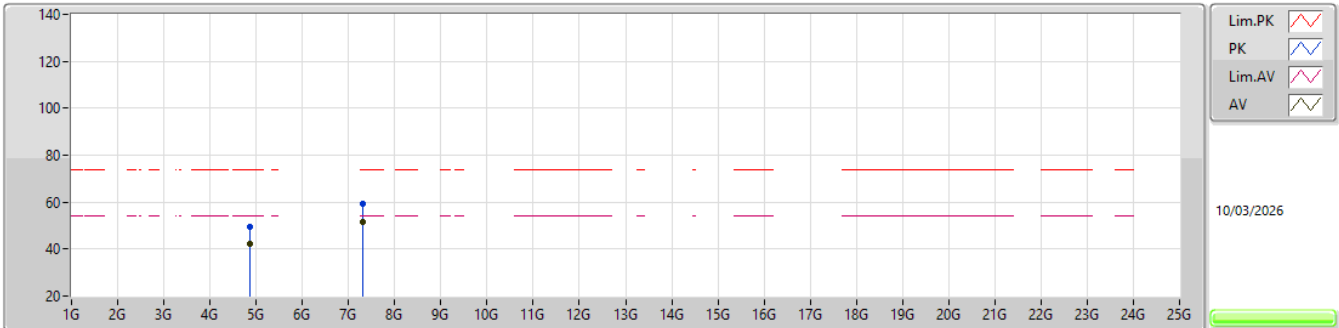


EUT_Y_4TX
Setting 25.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87402G	49.65	74.00	-24.35	39.21	3	Horizontal	17	1.95	-	33.10	7.45	30.11				
AV	4.87402G	42.46	54.00	-11.54	32.02	3	Horizontal	17	1.95	-	33.10	7.45	30.11				
PK	7.30946G	59.09	74.00	-14.91	44.44	3	Horizontal	66	1.19	-	36.52	9.02	30.89				
AV	7.30972G	51.34	54.00	-2.66	36.69	3	Horizontal	66	1.19	-	36.52	9.02	30.89				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

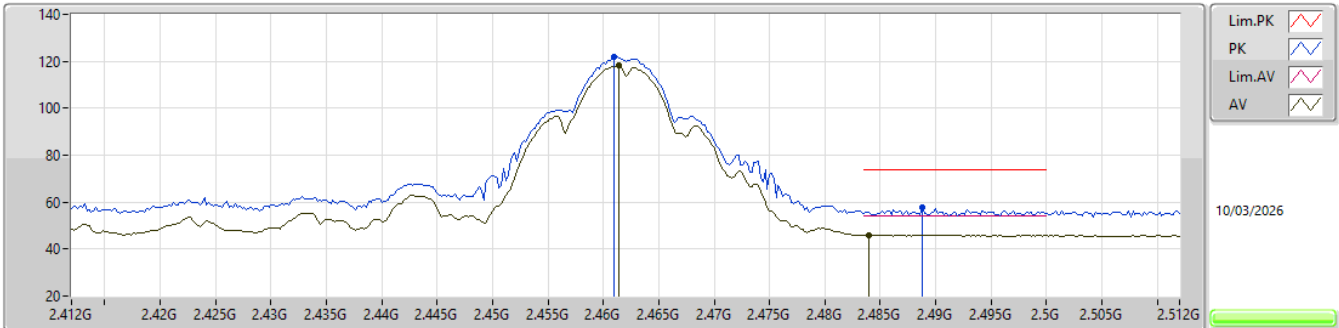


EUT_Y_4TX
Setting 25.5
02-D-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.461G	121.89	Inf	-Inf	89.04	3	Vertical	9	2.55	-	28.40	4.45	-				
AV	2.4614G	118.40	Inf	-Inf	85.55	3	Vertical	9	2.55	-	28.40	4.45	-				
PK	2.4888G	57.66	74.00	-16.34	24.68	3	Vertical	9	2.55	-	28.49	4.49	-				
AV	2.484G	46.03	54.00	-7.97	13.11	3	Vertical	9	2.55	-	28.44	4.48	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

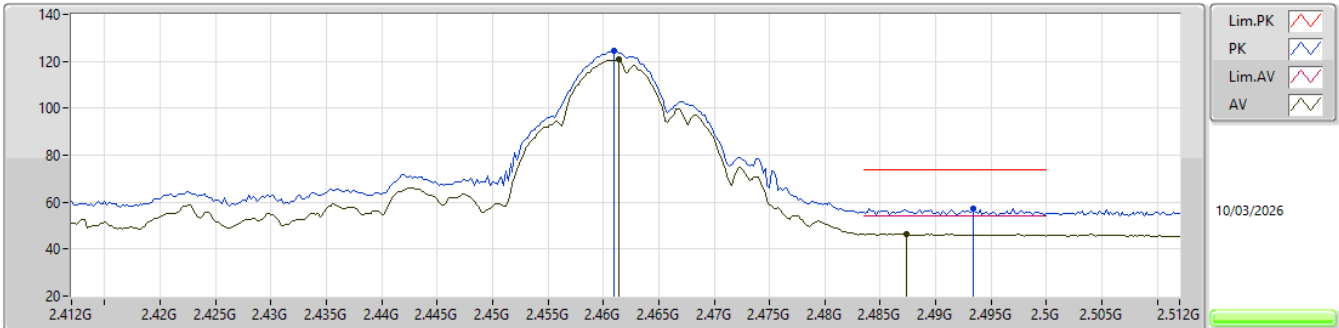


EUT_Y_4TX
Setting 25.5
02-D-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.4614G	124.35	Inf	-Inf	91.50	3	Horizontal	335	1.88	-	28.40	4.45	-				
AV	2.4614G	120.61	Inf	-Inf	87.76	3	Horizontal	335	1.88	-	28.40	4.45	-				
PK	2.4934G	57.35	74.00	-16.65	24.32	3	Horizontal	335	1.88	-	28.53	4.50	-				
AV	2.4874G	46.40	54.00	-7.60	13.44	3	Horizontal	335	1.88	-	28.47	4.49	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

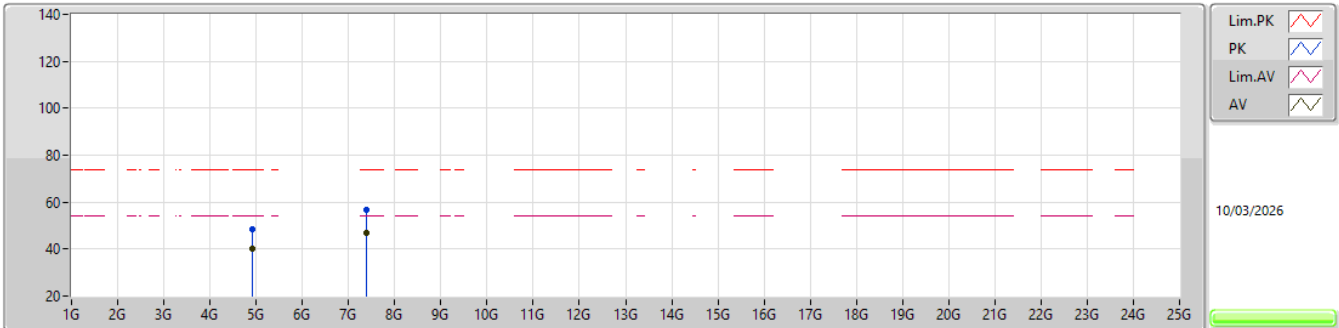


EUT_Y_4TX
Setting 25.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.92418G	48.46	74.00	-25.54	37.80	3	Vertical	360	2.69	-	33.25	7.49	30.08				
AV	4.92396G	40.08	54.00	-13.92	29.42	3	Vertical	360	2.69	-	33.25	7.49	30.08				
PK	7.38392G	56.78	74.00	-17.22	41.97	3	Vertical	57	2.00	-	36.67	9.03	30.89				
AV	7.38476G	47.02	54.00	-6.98	32.21	3	Vertical	57	2.00	-	36.67	9.03	30.89				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

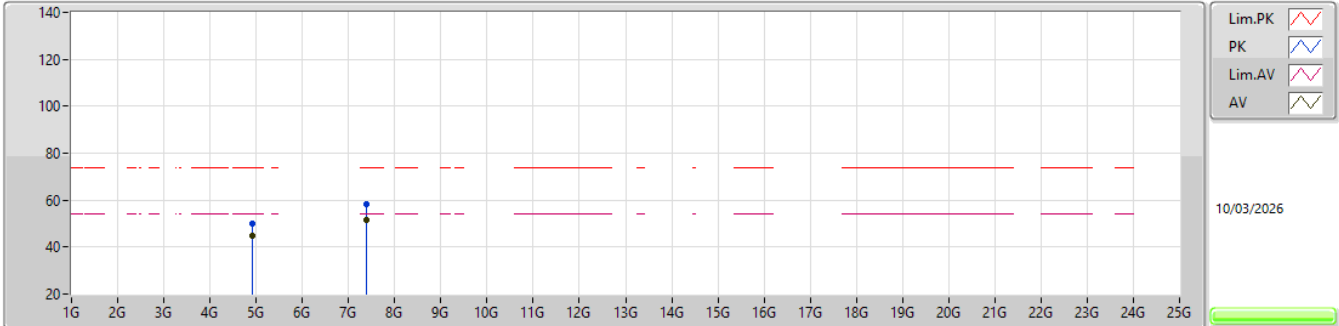


EUT_Y_4TX
Setting 25.5
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	4.92392G	49.86	74.00	-24.14	39.20	3	Horizontal	16	2.02	-	33.25	7.49	30.08				
AV	4.92404G	44.76	54.00	-9.24	34.10	3	Horizontal	16	2.02	-	33.25	7.49	30.08				
PK	7.38498G	58.44	74.00	-15.56	43.63	3	Horizontal	66	1.29	-	36.67	9.03	30.89				
AV	7.38468G	51.54	54.00	-2.46	36.73	3	Horizontal	66	1.29	-	36.67	9.03	30.89				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

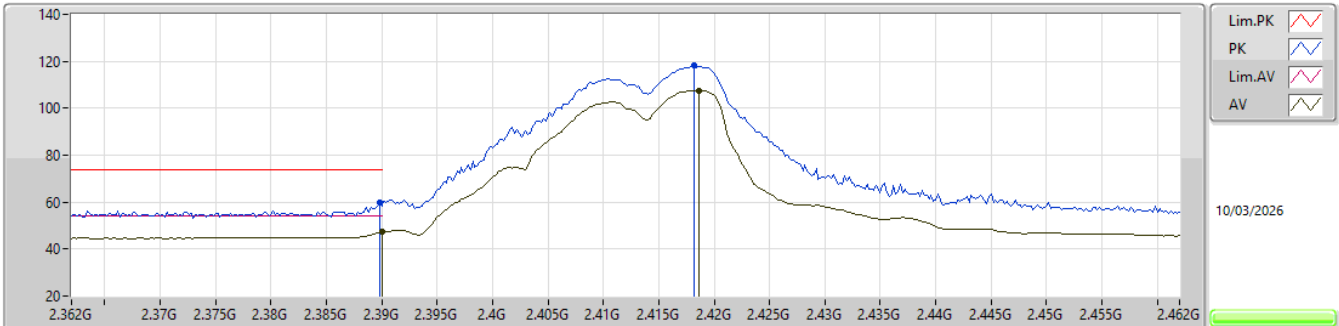


EUT_Y_4TX
Setting 23
02-D-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3898G	59.96	74.00	-14.04	27.10	3	Vertical	355	2.17	-	28.50	4.36	-				
AV	2.39G	47.20	54.00	-6.80	14.34	3	Vertical	355	2.17	-	28.50	4.36	-				
PK	2.4182G	118.04	Inf	-Inf	85.17	3	Vertical	355	2.17	-	28.48	4.39	-				
AV	2.4186G	107.67	Inf	-Inf	74.78	3	Vertical	355	2.17	-	28.49	4.40	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

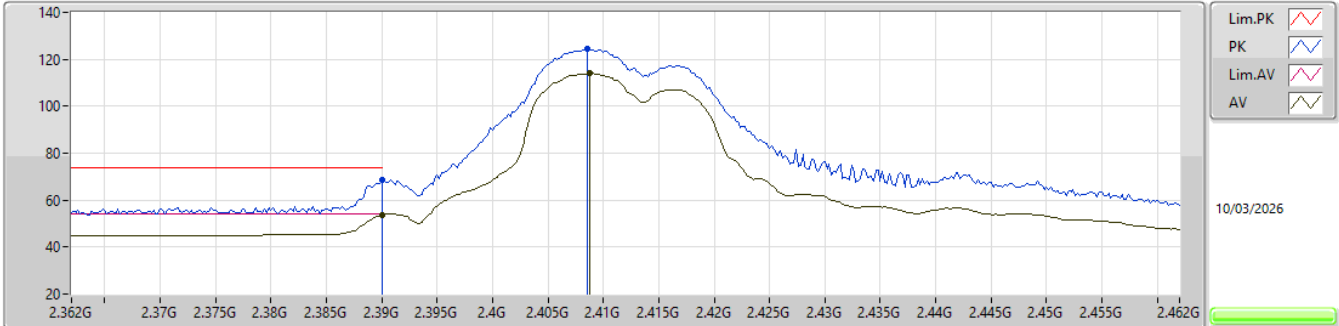


EUT_Y_4TX
Setting 23
02-D-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.39G	68.43	74.00	-5.57	35.57	3	Horizontal	309	2.02	-	28.50	4.36	-			
AV	2.39G	53.81	54.00	-0.19	20.95	3	Horizontal	309	2.02	-	28.50	4.36	-			
PK	2.4086G	124.39	Inf	-Inf	91.61	3	Horizontal	309	2.02	-	28.40	4.38	-			
AV	2.4088G	113.99	Inf	-Inf	81.21	3	Horizontal	309	2.02	-	28.40	4.38	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

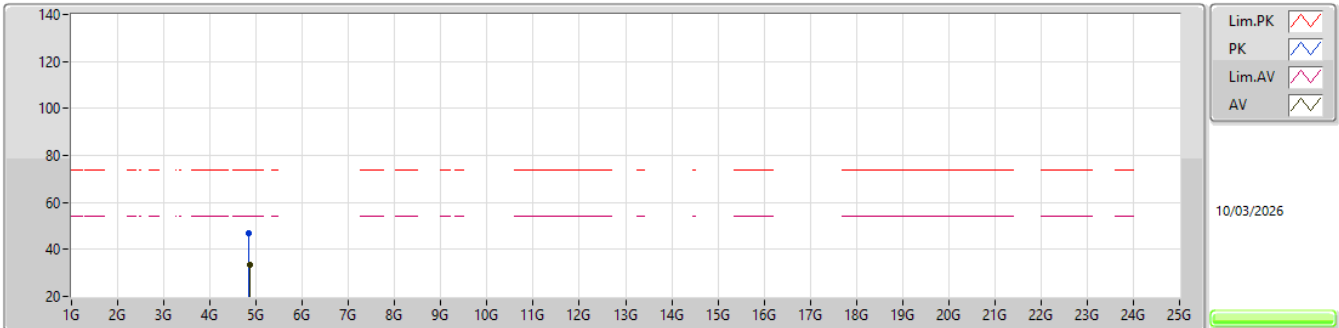


EUT_Y_4TX
Setting 23
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.84428G	46.72	74.00	-27.28	36.42	3	Vertical	106	1.66	-	32.99	7.43	30.12			
AV	4.854G	33.42	54.00	-20.58	23.08	3	Vertical	106	1.66	-	33.02	7.43	30.11			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

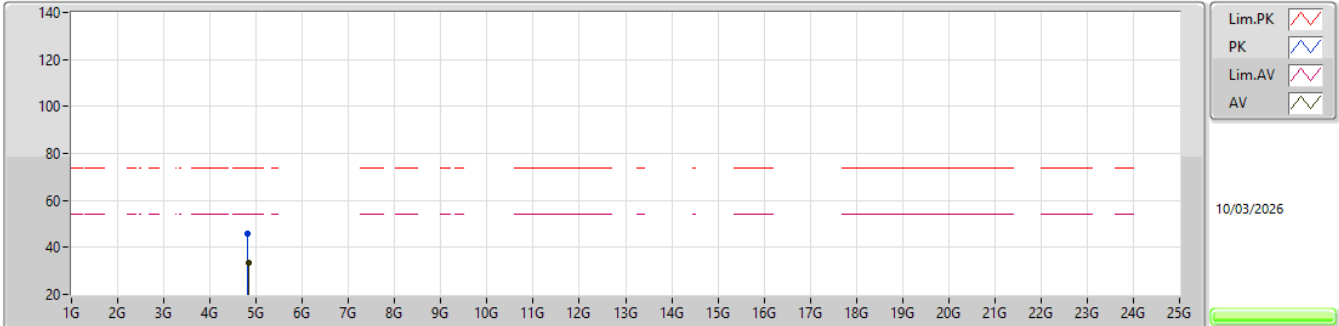


EUT_Y_4TX
Setting 23
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.81944G	46.10	74.00	-27.90	35.88	3	Horizontal	263	1.08	-	32.94	7.41	30.13			
AV	4.836G	33.53	54.00	-20.47	23.26	3	Horizontal	263	1.08	-	32.97	7.42	30.12			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

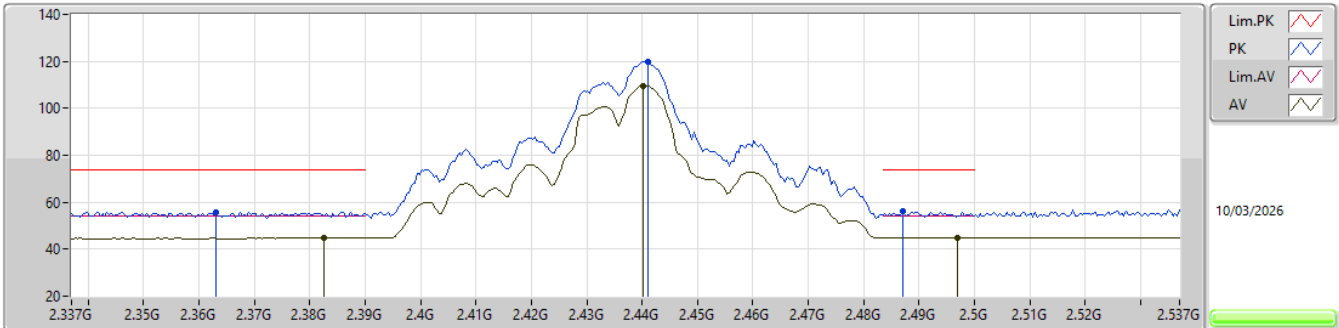


EUT_Y_4TX
Setting 25.5
02-D-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.363G	55.89	74.00	-18.11	23.21	3	Vertical	336	2.36	-	28.33	4.35	-				
AV	2.3826G	44.70	54.00	-9.30	11.84	3	Vertical	336	2.36	-	28.50	4.36	-				
PK	2.441G	119.99	Inf	-Inf	87.16	3	Vertical	336	2.36	-	28.40	4.43	-				
AV	2.4402G	109.64	Inf	-Inf	76.82	3	Vertical	336	2.36	-	28.40	4.42	-				
PK	2.487G	56.13	74.00	-17.87	23.17	3	Vertical	336	2.36	-	28.47	4.49	-				
AV	2.497G	44.80	54.00	-9.20	11.73	3	Vertical	336	2.36	-	28.57	4.50	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

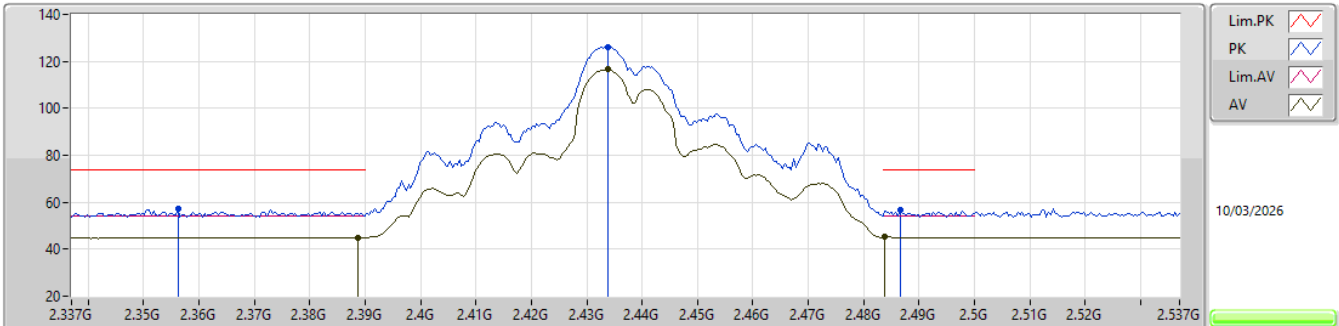


EUT_Y_4TX
Setting 25.5
02-D-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3562G	57.02	74.00	-16.98	24.38	3	Horizontal	306	1.97	-	28.30	4.34	-			
AV	2.3886G	45.03	54.00	-8.97	12.17	3	Horizontal	306	1.97	-	28.50	4.36	-			
PK	2.4338G	126.28	Inf	-Inf	93.46	3	Horizontal	306	1.97	-	28.40	4.42	-			
AV	2.4338G	116.47	Inf	-Inf	83.65	3	Horizontal	306	1.97	-	28.40	4.42	-			
PK	2.4866G	56.47	74.00	-17.53	23.51	3	Horizontal	306	1.97	-	28.47	4.49	-			
AV	2.4838G	45.15	54.00	-8.85	12.23	3	Horizontal	306	1.97	-	28.44	4.48	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

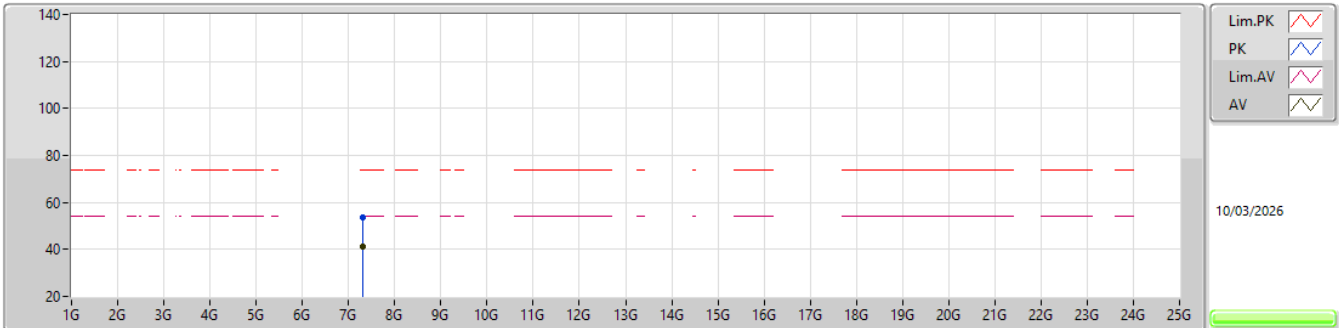


EUT_Y_4TX
Setting 25.5
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.31804G	53.38	74.00	-20.62	38.71	3	Vertical	54	2.05	-	36.54	9.02	30.89			
AV	7.3102G	41.00	54.00	-13.00	26.35	3	Vertical	54	2.05	-	36.52	9.02	30.89			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

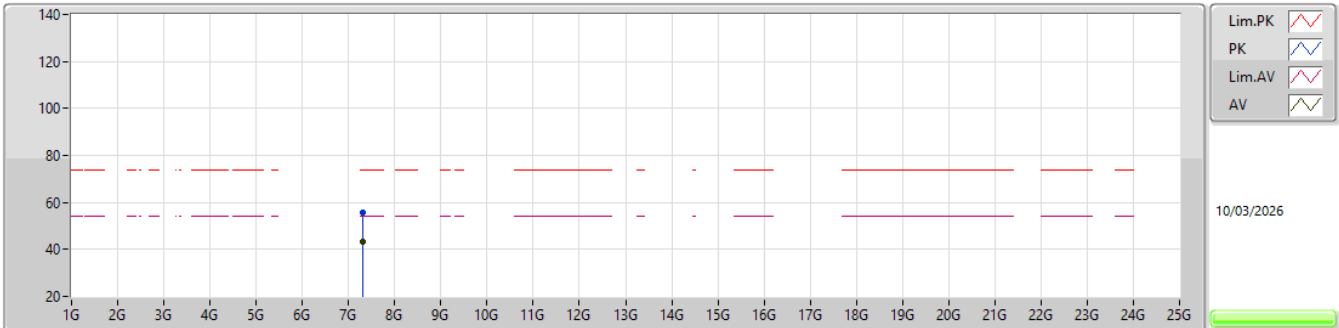


EUT_Y_4TX
Setting 25.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.3102G	55.94	74.00	-18.06	41.29	3	Horizontal	64	1.24	-	36.52	9.02	30.89			
AV	7.31004G	43.30	54.00	-10.70	28.65	3	Horizontal	64	1.24	-	36.52	9.02	30.89			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

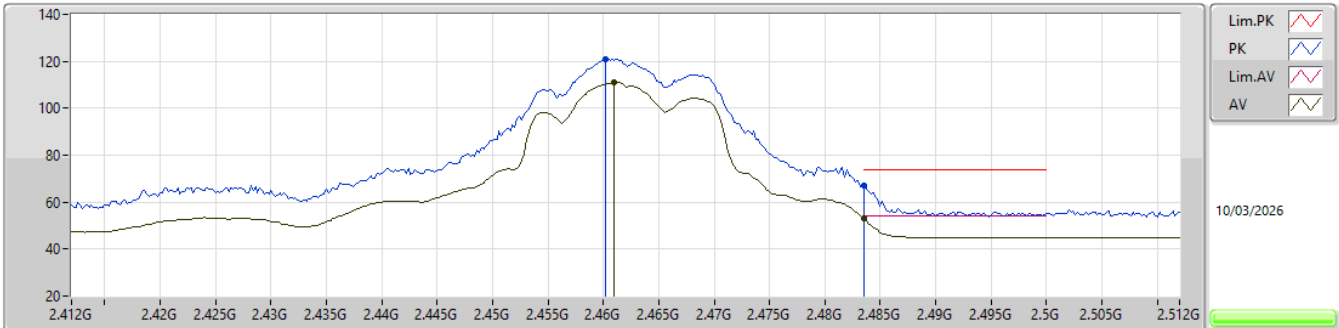


EUT_Y_4TX
Setting 24.5
02-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.4602G	120.81	Inf	-Inf	87.96	3	Vertical	8	2.56	-	28.40	4.45	-				
AV	2.461G	110.96	Inf	-Inf	78.11	3	Vertical	8	2.56	-	28.40	4.45	-				
PK	2.4835G	67.04	74.00	-6.96	34.12	3	Vertical	8	2.56	-	28.44	4.48	-				
AV	2.4835G	53.33	54.00	-0.67	20.41	3	Vertical	8	2.56	-	28.44	4.48	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

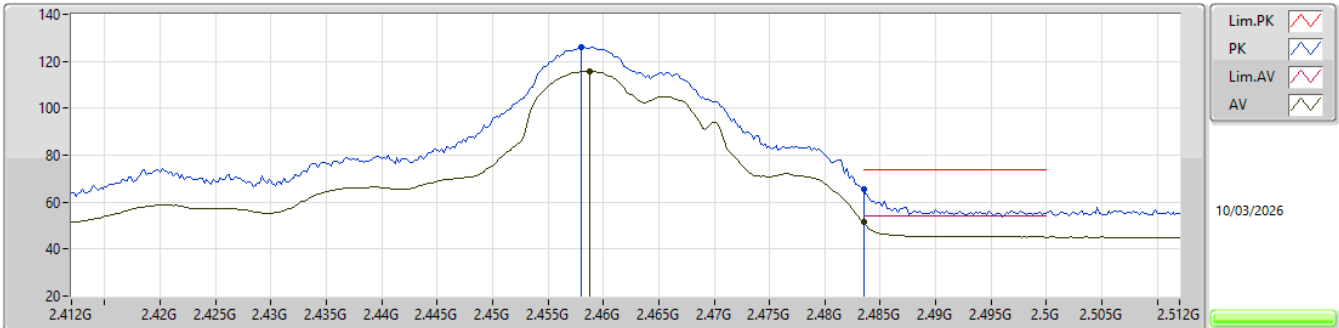


EUT_Y_4TX
Setting 24.5
02-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	2.458G	125.95	Inf	-Inf	93.10	3	Horizontal	313	2.15	-	28.40	4.45	-			
AV	2.4588G	115.88	Inf	-Inf	83.03	3	Horizontal	313	2.15	-	28.40	4.45	-			
PK	2.4835G	65.44	74.00	-8.56	32.52	3	Horizontal	313	2.15	-	28.44	4.48	-			
AV	2.4835G	51.72	54.00	-2.28	18.80	3	Horizontal	313	2.15	-	28.44	4.48	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

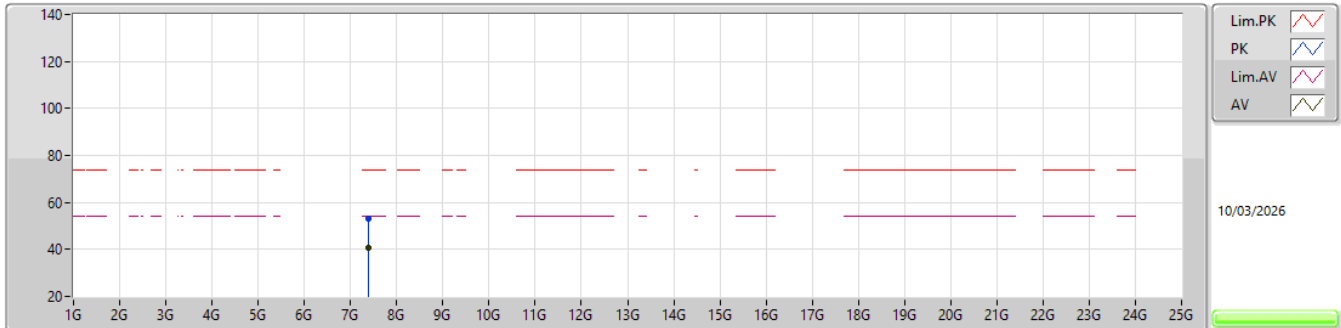


EUT_Y_4TX
Setting 24.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.38608G	53.24	74.00	-20.76	38.43	3	Vertical	45	2.20	-	36.67	9.03	30.89			
AV	7.38486G	40.54	54.00	-13.46	25.73	3	Vertical	45	2.20	-	36.67	9.03	30.89			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

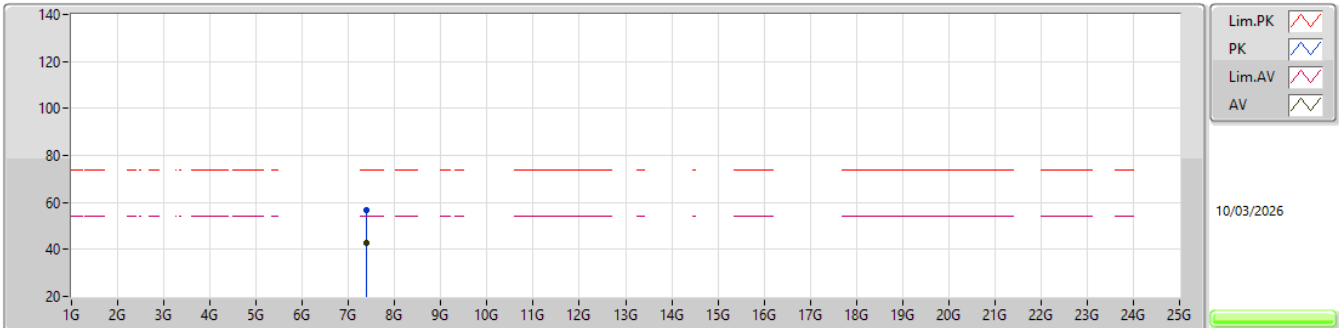


EUT_V_4TX
Setting 24.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.38482G	56.77	74.00	-17.23	41.96	3	Horizontal	67	1.29	-	36.67	9.03	30.89			
AV	7.385G	42.72	54.00	-11.28	27.91	3	Horizontal	67	1.29	-	36.67	9.03	30.89			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2412MHz_TX

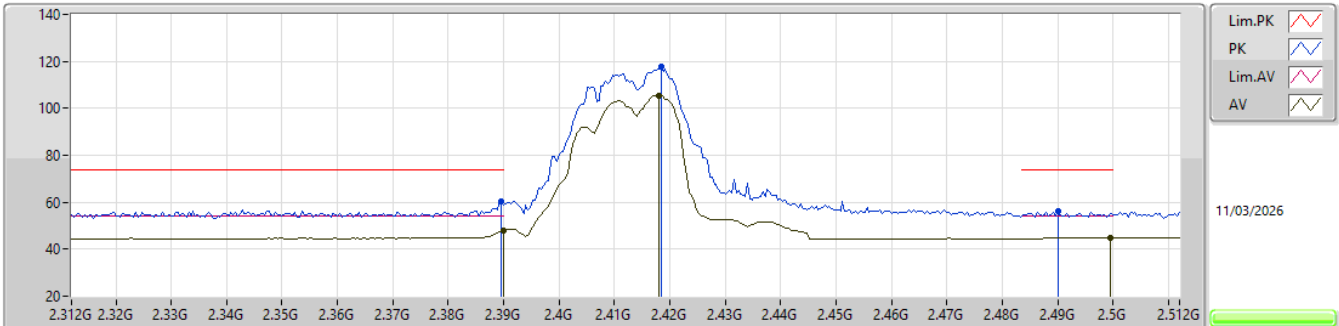


EUT_Y_4TX
Setting 21.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3896G	60.55	74.00	-13.45	27.69	3	Vertical	354	2.16	-	28.50	4.36	-			
AV	2.39G	47.95	54.00	-6.05	15.09	3	Vertical	354	2.16	-	28.50	4.36	-			
PK	2.4184G	117.98	Inf	-Inf	85.11	3	Vertical	354	2.16	-	28.48	4.39	-			
AV	2.418G	105.49	Inf	-Inf	72.62	3	Vertical	354	2.16	-	28.48	4.39	-			
PK	2.49G	55.98	74.00	-18.02	22.99	3	Vertical	354	2.16	-	28.50	4.49	-			
AV	2.4996G	44.80	54.00	-9.20	11.70	3	Vertical	354	2.16	-	28.60	4.50	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2412MHz_TX

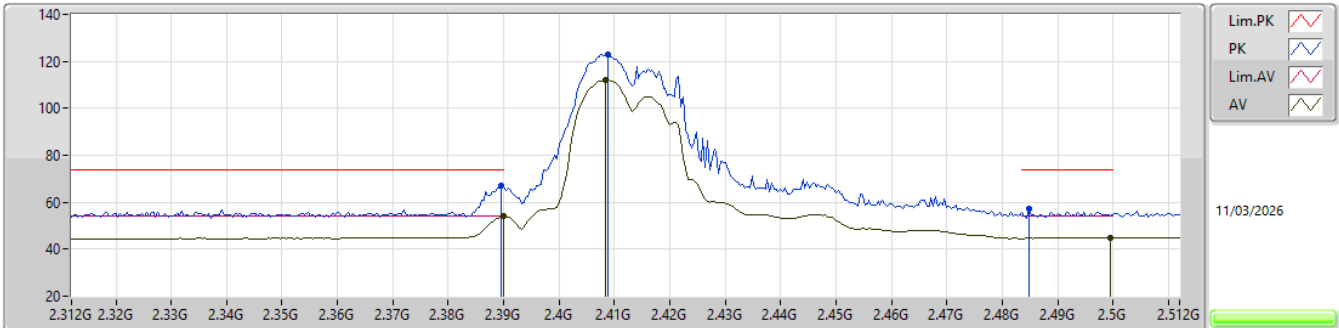


EUT_Y_4TX
Setting 21.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3896G	67.04	74.00	-6.96	34.18	3	Horizontal	305	2.03	-	28.50	4.36	-			
AV	2.39G	53.90	54.00	-0.10	21.04	3	Horizontal	305	2.03	-	28.50	4.36	-			
PK	2.4088G	122.79	Inf	-Inf	90.01	3	Horizontal	305	2.03	-	28.40	4.38	-			
AV	2.4084G	111.92	Inf	-Inf	79.14	3	Horizontal	305	2.03	-	28.40	4.38	-			
PK	2.4848G	57.00	74.00	-17.00	24.07	3	Horizontal	305	2.03	-	28.45	4.48	-			
AV	2.4996G	44.80	54.00	-9.20	11.70	3	Horizontal	305	2.03	-	28.60	4.50	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2412MHz_TX

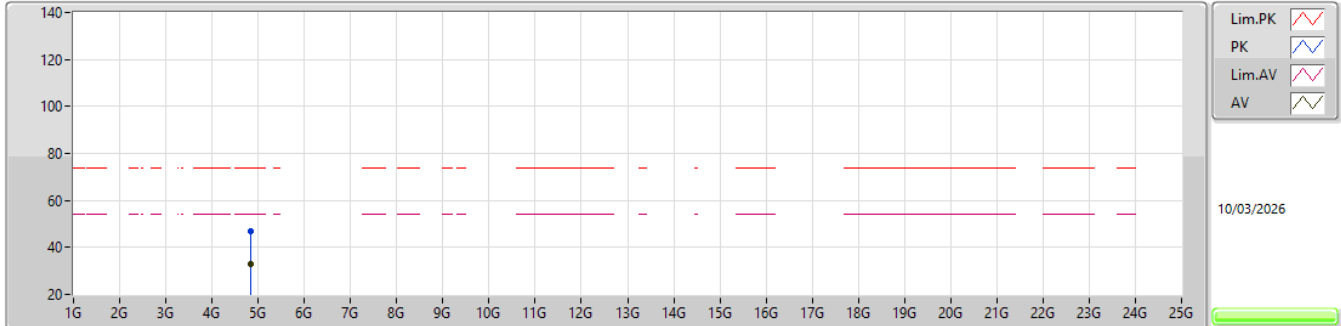


EUT_Y_4TX
Setting 21.5
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.82754G	46.74	74.00	-27.26	36.50	3	Vertical	221	2.03	-	32.96	7.41	30.13			
AV	4.82736G	33.15	54.00	-20.85	22.92	3	Vertical	221	2.03	-	32.95	7.41	30.13			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2412MHz_TX

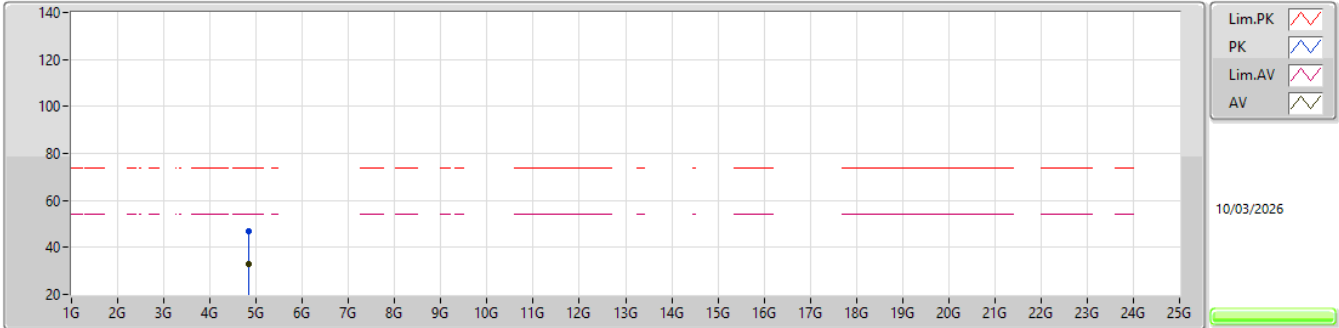


EUT_Y_4TX
Setting 21.5
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.82686G	46.67	74.00	-27.33	36.44	3	Horizontal	38	2.78	-	32.95	7.41	30.13			
AV	4.82776G	33.15	54.00	-20.85	22.91	3	Horizontal	38	2.78	-	32.96	7.41	30.13			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2417MHz_TX

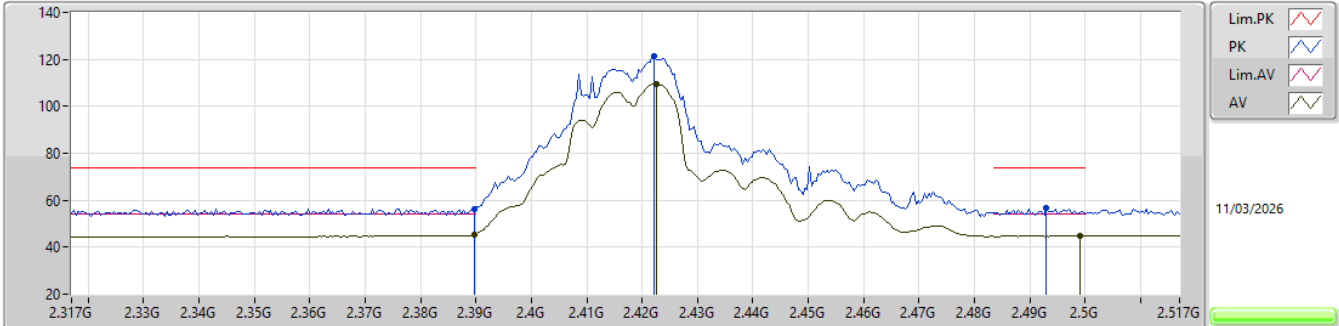


EUT_Y_4TX
Setting 25.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3898G	56.46	74.00	-17.54	23.60	3	Vertical	351	2.17	-	28.50	4.36	-				
AV	2.3898G	45.57	54.00	-8.43	12.71	3	Vertical	351	2.17	-	28.50	4.36	-				
PK	2.4222G	121.44	Inf	-Inf	88.56	3	Vertical	351	2.17	-	28.48	4.40	-				
AV	2.4226G	109.46	Inf	-Inf	76.59	3	Vertical	351	2.17	-	28.47	4.40	-				
PK	2.493G	56.83	74.00	-17.17	23.80	3	Vertical	351	2.17	-	28.53	4.50	-				
AV	2.499G	44.72	54.00	-9.28	11.63	3	Vertical	351	2.17	-	28.59	4.50	-				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2417MHz_TX

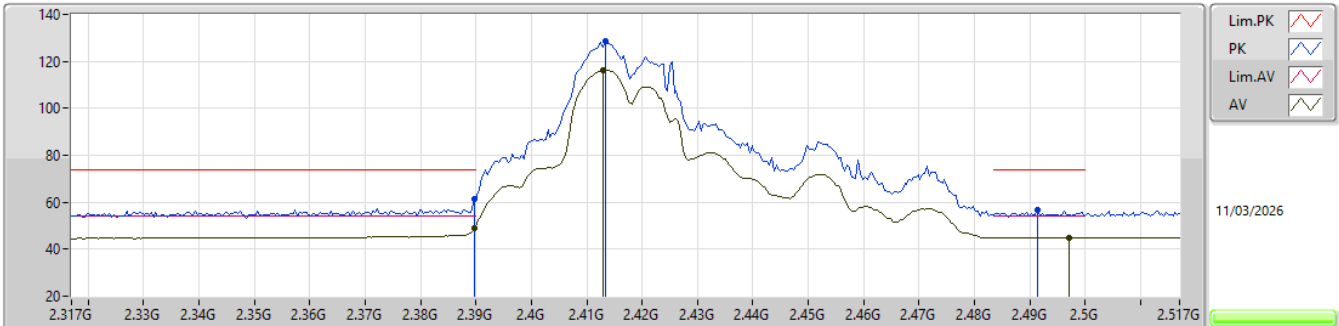


EUT_Y_4TX
Setting 25.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	61.24	74.00	-12.76	28.38	3	Horizontal	302	2.02	-	28.50	4.36	-			
AV	2.3898G	49.09	54.00	-4.91	16.23	3	Horizontal	302	2.02	-	28.50	4.36	-			
PK	2.4134G	128.38	Inf	-Inf	95.56	3	Horizontal	302	2.02	-	28.43	4.39	-			
AV	2.413G	116.13	Inf	-Inf	83.31	3	Horizontal	302	2.02	-	28.43	4.39	-			
PK	2.4914G	56.56	74.00	-17.44	23.56	3	Horizontal	302	2.02	-	28.51	4.49	-			
AV	2.497G	44.88	54.00	-9.12	11.81	3	Horizontal	302	2.02	-	28.57	4.50	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2437MHz_TX

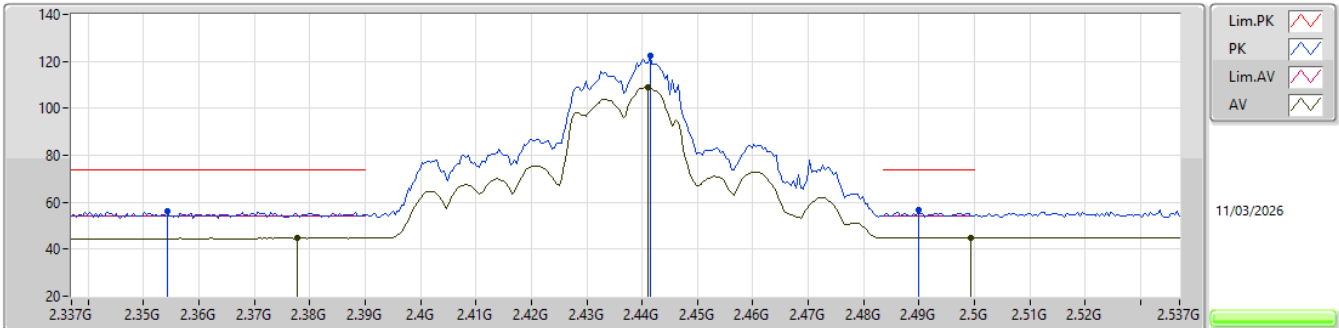


EUT_Y_4TX
Setting 25.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3542G	56.18	74.00	-17.82	23.54	3	Vertical	340	2.37	-	28.30	4.34	-				
AV	2.3778G	44.67	54.00	-9.33	11.83	3	Vertical	340	2.37	-	28.48	4.36	-				
PK	2.4414G	122.18	Inf	-Inf	89.35	3	Vertical	340	2.37	-	28.40	4.43	-				
AV	2.441G	108.88	Inf	-Inf	76.05	3	Vertical	340	2.37	-	28.40	4.43	-				
PK	2.4898G	56.58	74.00	-17.42	23.59	3	Vertical	340	2.37	-	28.50	4.49	-				
AV	2.4994G	44.75	54.00	-9.25	11.66	3	Vertical	340	2.37	-	28.59	4.50	-				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2437MHz_TX

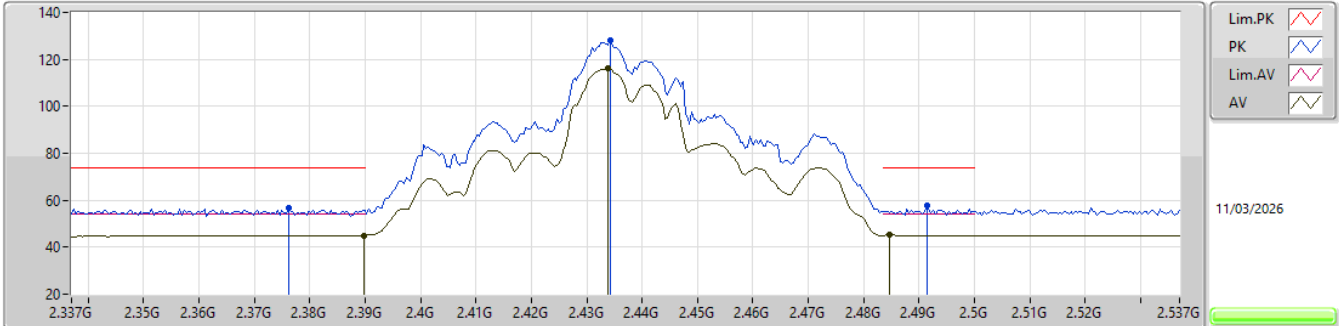


EUT_Y_4TX
Setting 25.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3762G	56.90	74.00	-17.10	24.09	3	Horizontal	302	1.96	-	28.46	4.35	-			
AV	2.3898G	44.99	54.00	-9.01	12.13	3	Horizontal	302	1.96	-	28.50	4.36	-			
PK	2.4342G	128.18	Inf	-Inf	95.36	3	Horizontal	302	1.96	-	28.40	4.42	-			
AV	2.4338G	115.99	Inf	-Inf	83.17	3	Horizontal	302	1.96	-	28.40	4.42	-			
PK	2.4914G	57.64	74.00	-16.36	24.64	3	Horizontal	302	1.96	-	28.51	4.49	-			
AV	2.4846G	45.13	54.00	-8.87	12.20	3	Horizontal	302	1.96	-	28.45	4.48	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2437MHz_TX

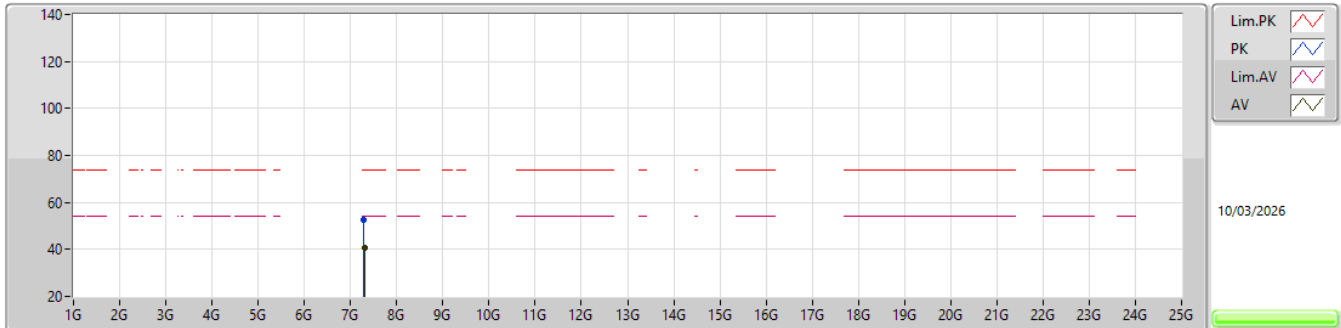


EUT_V_4TX
Setting 25.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.28892G	52.75	74.00	-21.25	38.17	3	Vertical	62	2.04	-	36.46	9.01	30.89			
AV	7.31028G	40.71	54.00	-13.29	26.06	3	Vertical	62	2.04	-	36.52	9.02	30.89			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2437MHz_TX

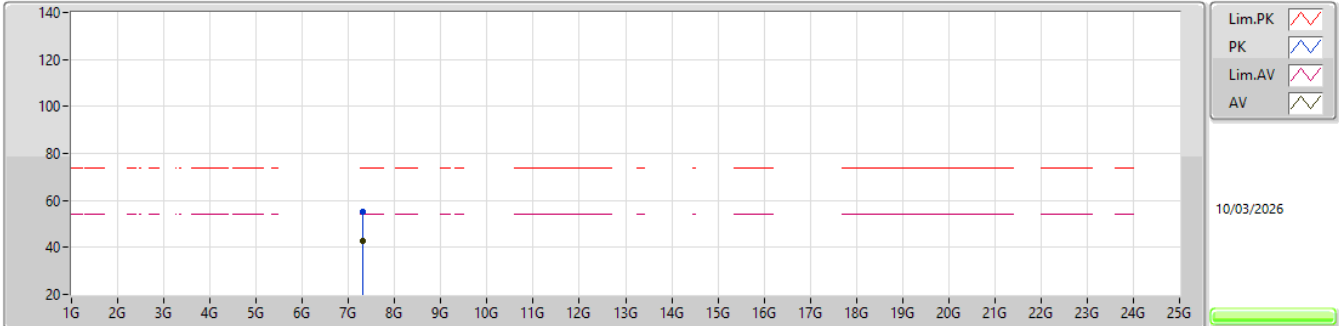


EUT_Y_4TX
Setting 25.5
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.31076G	55.26	74.00	-18.74	40.61	3	Horizontal	64	1.32	-	36.52	9.02	30.89			
AV	7.30992G	42.63	54.00	-11.37	27.98	3	Horizontal	64	1.32	-	36.52	9.02	30.89			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2462MHz_TX

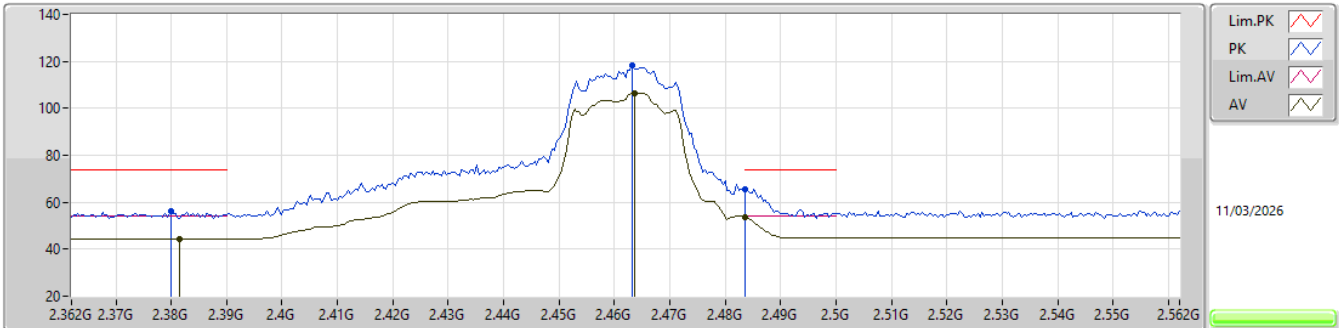


EUT_Y_4TX
Setting 25
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.38G	56.35	74.00	-17.65	23.49	3	Vertical	209	2.53	-	28.50	4.36	-			
AV	2.3816G	44.55	54.00	-9.45	11.69	3	Vertical	209	2.53	-	28.50	4.36	-			
PK	2.4632G	118.51	Inf	-Inf	85.65	3	Vertical	209	2.53	-	28.40	4.46	-			
AV	2.4636G	106.60	Inf	-Inf	73.74	3	Vertical	209	2.53	-	28.40	4.46	-			
PK	2.4835G	65.75	74.00	-8.25	32.83	3	Vertical	209	2.53	-	28.44	4.48	-			
AV	2.4835G	53.71	54.00	-0.29	20.79	3	Vertical	209	2.53	-	28.44	4.48	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX


2462MHz_TX

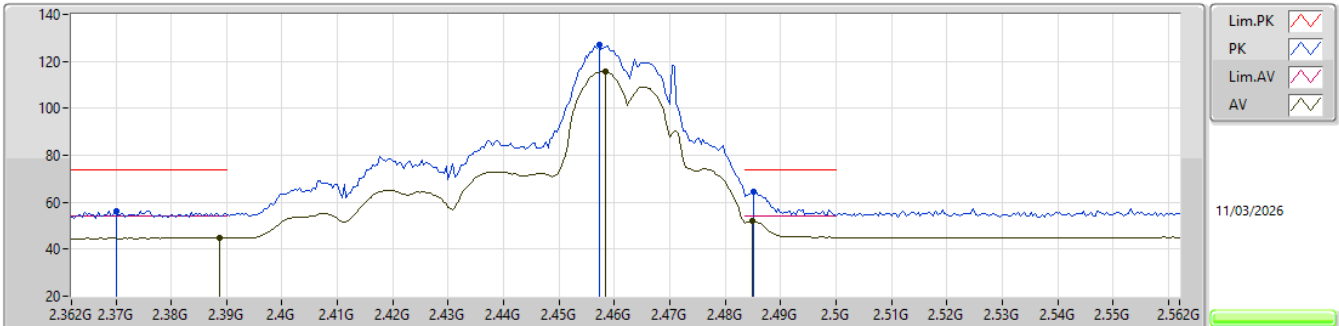EUT_Y_4TX
Setting 25
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.37G	56.25	74.00	-17.75	23.50	3	Horizontal	299	1.94	-	28.40	4.35	-			
AV	2.3888G	44.67	54.00	-9.33	11.81	3	Horizontal	299	1.94	-	28.50	4.36	-			
PK	2.4572G	126.83	Inf	-Inf	93.98	3	Horizontal	299	1.94	-	28.40	4.45	-			
AV	2.4584G	115.66	Inf	-Inf	82.81	3	Horizontal	299	1.94	-	28.40	4.45	-			
PK	2.4852G	64.53	74.00	-9.47	31.59	3	Horizontal	299	1.94	-	28.45	4.49	-			
AV	2.4848G	51.88	54.00	-2.12	18.95	3	Horizontal	299	1.94	-	28.45	4.48	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2462MHz_TX

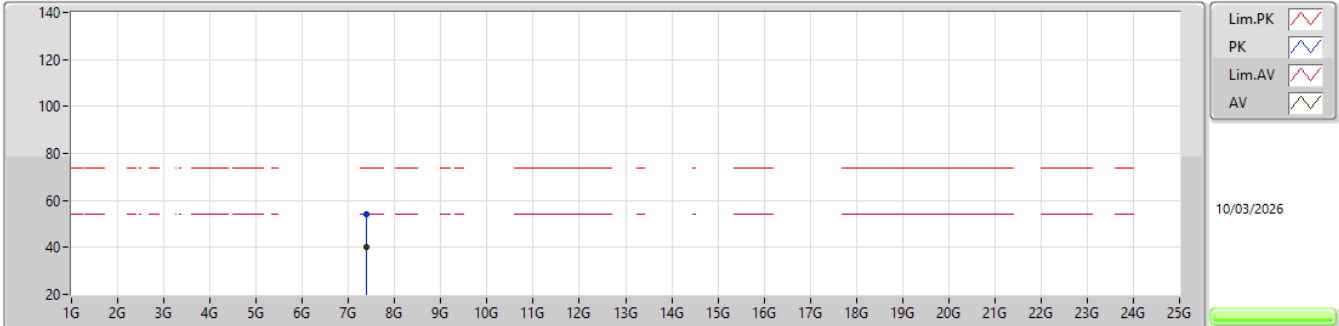


EUT_Y_4TX
Setting 25
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.38528G	53.99	74.00	-20.01	39.18	3	Vertical	50	1.92	-	36.67	9.03	30.89			
AV	7.38492G	40.12	54.00	-13.88	25.31	3	Vertical	50	1.92	-	36.67	9.03	30.89			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2462MHz_TX

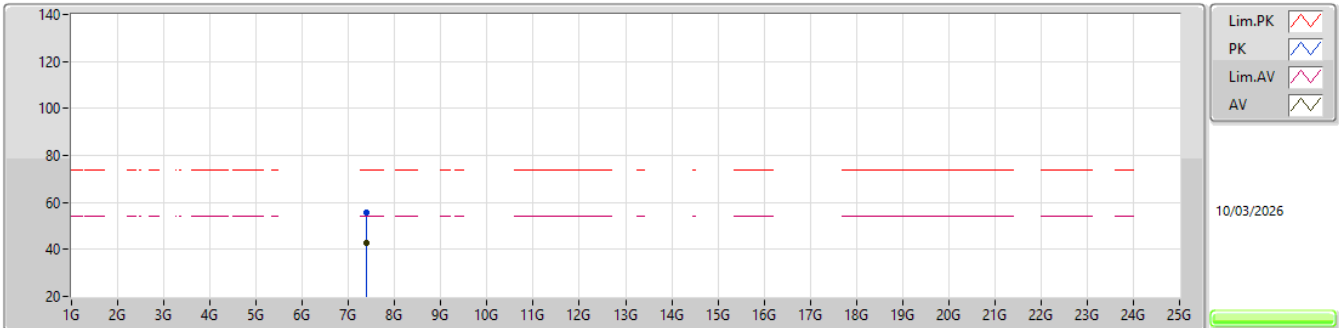


EUT_V_4TX
Setting 25
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.38456G	55.78	74.00	-18.22	40.97	3	Horizontal	69	1.28	-	36.67	9.03	30.89			
AV	7.38492G	42.81	54.00	-11.19	28.00	3	Horizontal	69	1.28	-	36.67	9.03	30.89			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2422MHz_TX

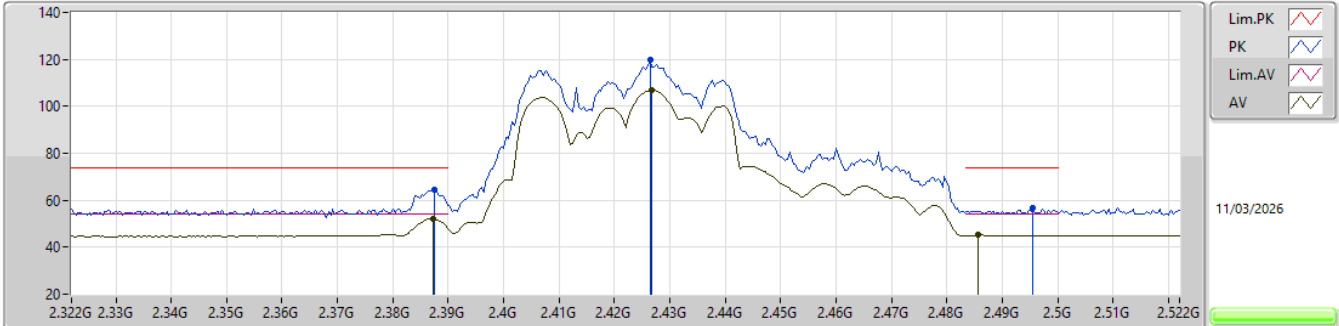


EUT_Y_4TX
Setting 25
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	2.3876G	64.59	74.00	-9.41	31.73	3	Vertical	343	2.18	-	28.50	4.36	-					
AV	2.3872G	52.25	54.00	-1.75	19.39	3	Vertical	343	2.18	-	28.50	4.36	-					
PK	2.4264G	119.66	Inf	-Inf	86.81	3	Vertical	343	2.18	-	28.44	4.41	-					
AV	2.4268G	106.79	Inf	-Inf	73.95	3	Vertical	343	2.18	-	28.43	4.41	-					
PK	2.4956G	56.60	74.00	-17.40	23.54	3	Vertical	343	2.18	-	28.56	4.50	-					
AV	2.4856G	45.14	54.00	-8.86	12.19	3	Vertical	343	2.18	-	28.46	4.49	-					

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2422MHz_TX

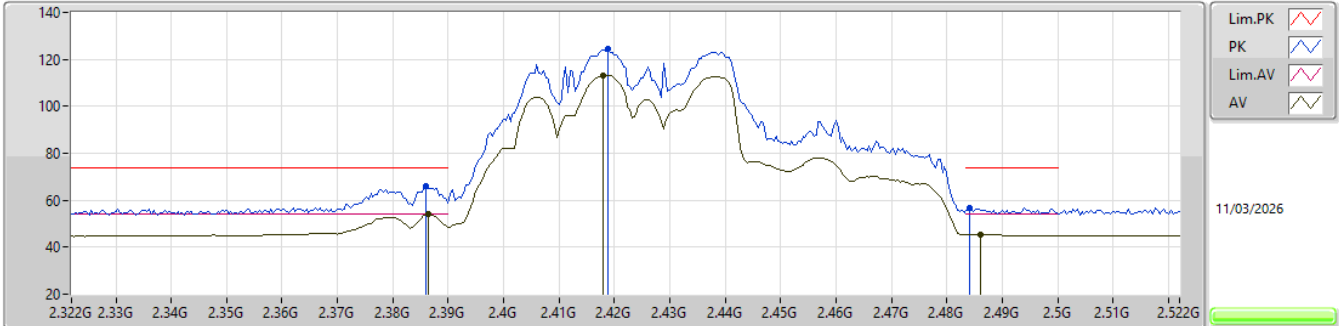


EUT_Y_4TX
Setting 25
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.386G	65.80	74.00	-8.20	32.94	3	Horizontal	306	1.99	-	28.50	4.36	-			
AV	2.3864G	53.92	54.00	-0.08	21.06	3	Horizontal	306	1.99	-	28.50	4.36	-			
PK	2.4188G	124.59	Inf	-Inf	91.70	3	Horizontal	306	1.99	-	28.49	4.40	-			
AV	2.418G	113.23	Inf	-Inf	80.36	3	Horizontal	306	1.99	-	28.48	4.39	-			
PK	2.484G	56.65	74.00	-17.35	23.73	3	Horizontal	306	1.99	-	28.44	4.48	-			
AV	2.486G	45.55	54.00	-8.45	12.60	3	Horizontal	306	1.99	-	28.46	4.49	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2422MHz_TX

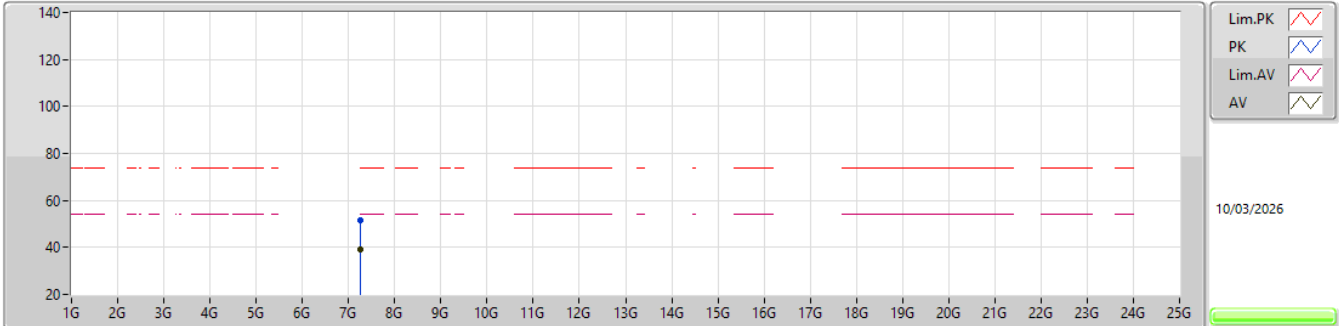


EUT_Y_4TX
Setting 25
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.2654G	51.74	74.00	-22.26	37.26	3	Vertical	17	2.32	-	36.36	9.01	30.89			
AV	7.2662G	39.26	54.00	-14.74	24.78	3	Vertical	17	2.32	-	36.36	9.01	30.89			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2422MHz_TX

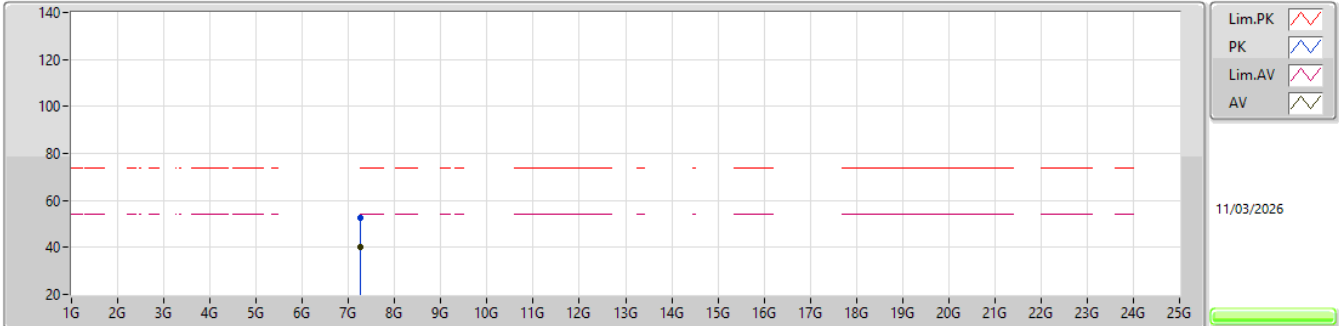


EUT_Y_4TX
Setting 25
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.2564G	52.61	74.00	-21.39	38.16	3	Horizontal	65	1.01	-	36.33	9.01	30.89			
AV	7.2574G	40.36	54.00	-13.64	25.91	3	Horizontal	65	1.01	-	36.33	9.01	30.89			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2437MHz_TX

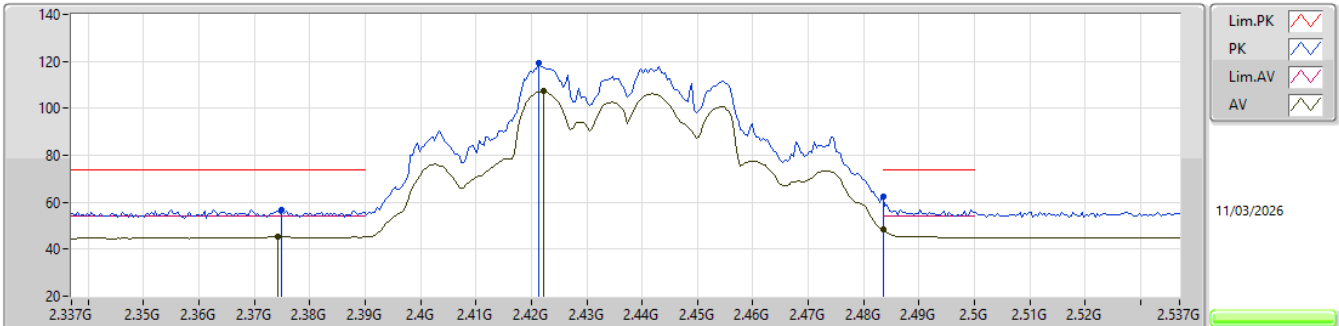


EUT_Y_4TX
Setting 25.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.375G	56.56	74.00	-17.44	23.76	3	Vertical	346	2.17	-	28.45	4.35	-			
AV	2.3742G	45.59	54.00	-8.41	12.80	3	Vertical	346	2.17	-	28.44	4.35	-			
PK	2.4214G	119.31	Inf	-Inf	86.42	3	Vertical	346	2.17	-	28.49	4.40	-			
AV	2.4222G	107.19	Inf	-Inf	74.31	3	Vertical	346	2.17	-	28.48	4.40	-			
PK	2.4835G	62.60	74.00	-11.40	29.68	3	Vertical	346	2.17	-	28.44	4.48	-			
AV	2.4835G	48.24	54.00	-5.76	15.32	3	Vertical	346	2.17	-	28.44	4.48	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2437MHz_TX

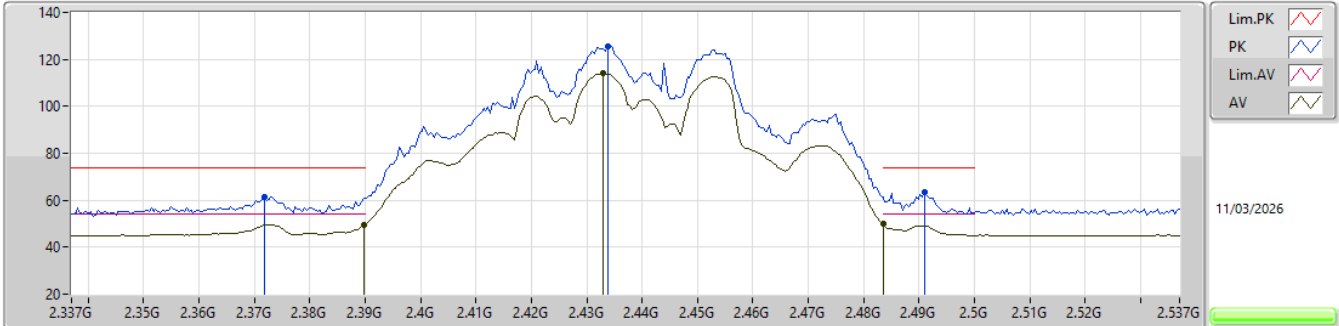


EUT_Y_4TX
Setting 25.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3718G	61.63	74.00	-12.37	28.86	3	Horizontal	299	2.23	-	28.42	4.35	-			
AV	2.3898G	49.51	54.00	-4.49	16.65	3	Horizontal	299	2.23	-	28.50	4.36	-			
PK	2.4338G	125.76	Inf	-Inf	92.94	3	Horizontal	299	2.23	-	28.40	4.42	-			
AV	2.433G	114.02	Inf	-Inf	81.21	3	Horizontal	299	2.23	-	28.40	4.41	-			
PK	2.491G	63.57	74.00	-10.43	30.57	3	Horizontal	299	2.23	-	28.51	4.49	-			
AV	2.4835G	50.05	54.00	-3.95	17.13	3	Horizontal	299	2.23	-	28.44	4.48	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2437MHz_TX

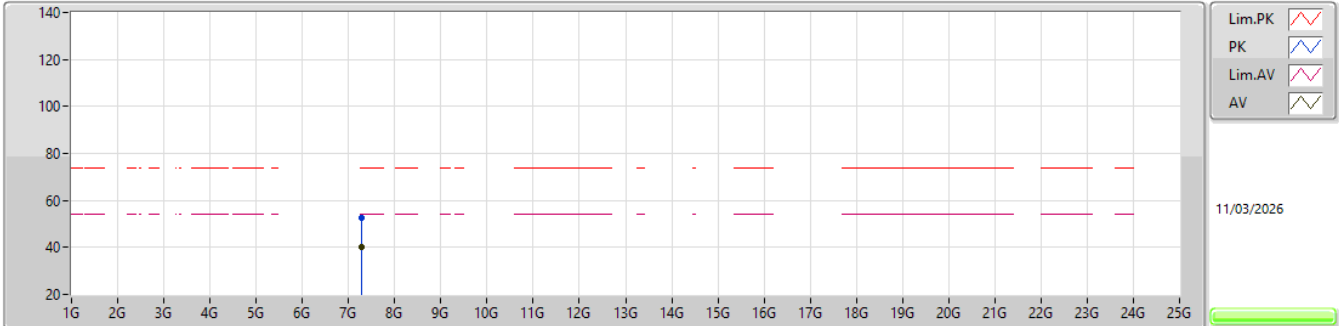


EUT_Y_4TX
Setting 25.5
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.2812G	52.83	74.00	-21.17	38.29	3	Vertical	60	2.00	-	36.42	9.01	30.89			
AV	7.2816G	40.22	54.00	-13.78	25.67	3	Vertical	60	2.00	-	36.43	9.01	30.89			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2437MHz_TX

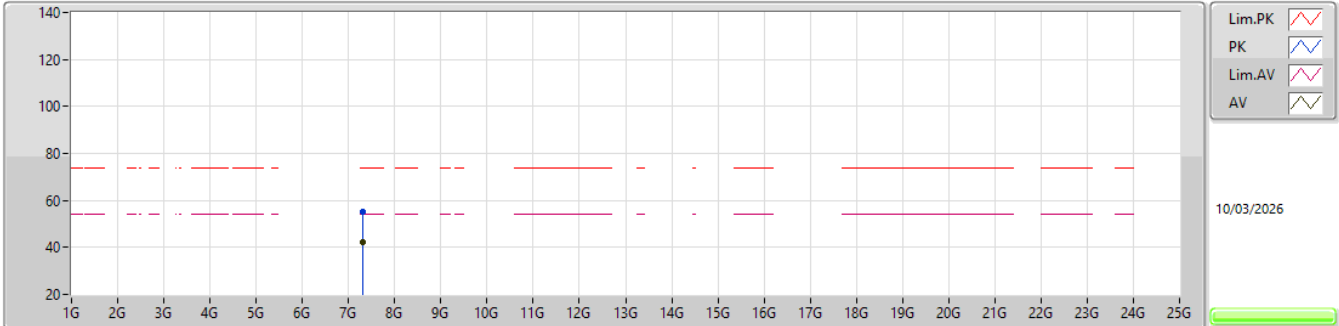


EUT_Y_4TX
Setting 25.5
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.3112G	55.41	74.00	-18.59	40.76	3	Horizontal	68	1.16	-	36.52	9.02	30.89			
AV	7.3098G	42.14	54.00	-11.86	27.49	3	Horizontal	68	1.16	-	36.52	9.02	30.89			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2452MHz_TX

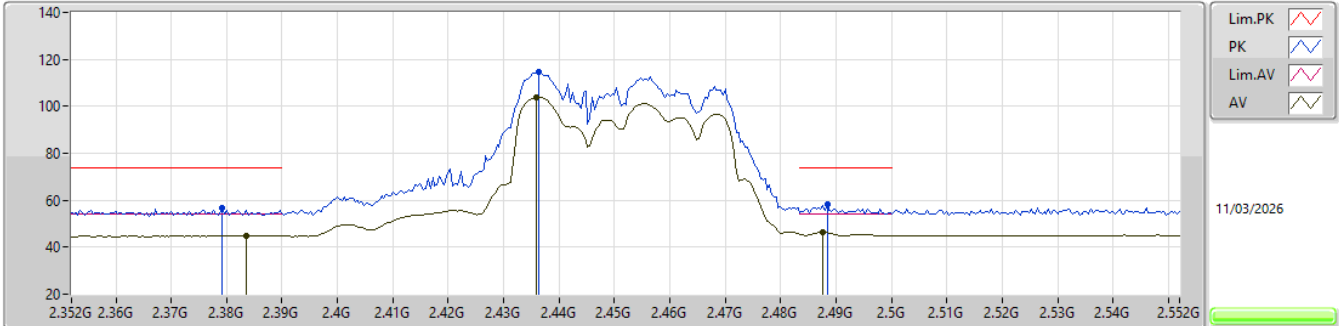


EUT_Y_4TX
Setting 23
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3792G	56.65	74.00	-17.35	23.80	3	Vertical	340	2.17	-	28.49	4.36	-			
AV	2.3836G	44.75	54.00	-9.25	11.89	3	Vertical	340	2.17	-	28.50	4.36	-			
PK	2.4364G	114.66	Inf	-Inf	81.84	3	Vertical	340	2.17	-	28.40	4.42	-			
AV	2.436G	103.84	Inf	-Inf	71.02	3	Vertical	340	2.17	-	28.40	4.42	-			
PK	2.4884G	58.08	74.00	-15.92	25.11	3	Vertical	340	2.17	-	28.48	4.49	-			
AV	2.4876G	46.43	54.00	-7.57	13.46	3	Vertical	340	2.17	-	28.48	4.49	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2452MHz_TX

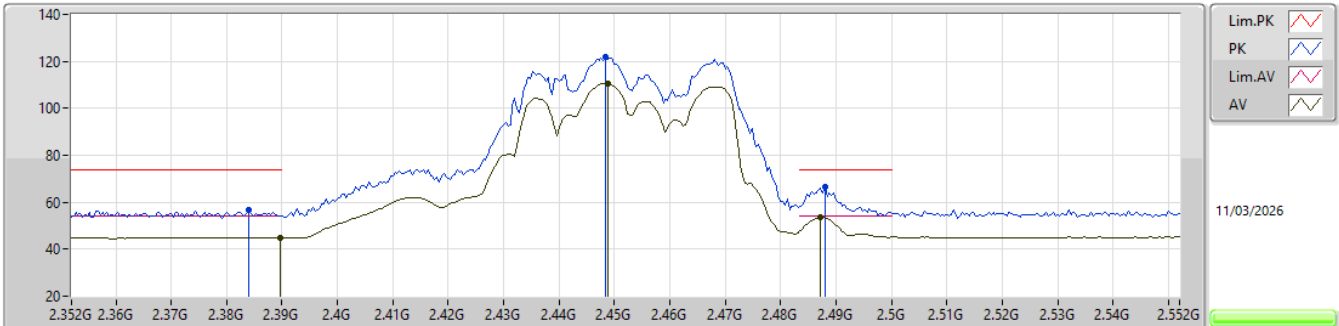


EUT_Y_4TX
Setting 23
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.384G	56.68	74.00	-17.32	23.82	3	Horizontal	305	1.93	-	28.50	4.36	-
AV	2.3896G	44.90	54.00	-9.10	12.04	3	Horizontal	305	1.93	-	28.50	4.36	-
PK	2.4484G	121.91	Inf	-Inf	89.07	3	Horizontal	305	1.93	-	28.40	4.44	-
AV	2.4488G	110.62	Inf	-Inf	77.78	3	Horizontal	305	1.93	-	28.40	4.44	-
PK	2.488G	66.31	74.00	-7.69	33.34	3	Horizontal	305	1.93	-	28.48	4.49	-
AV	2.4872G	53.59	54.00	-0.41	20.63	3	Horizontal	305	1.93	-	28.47	4.49	-

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2452MHz_TX

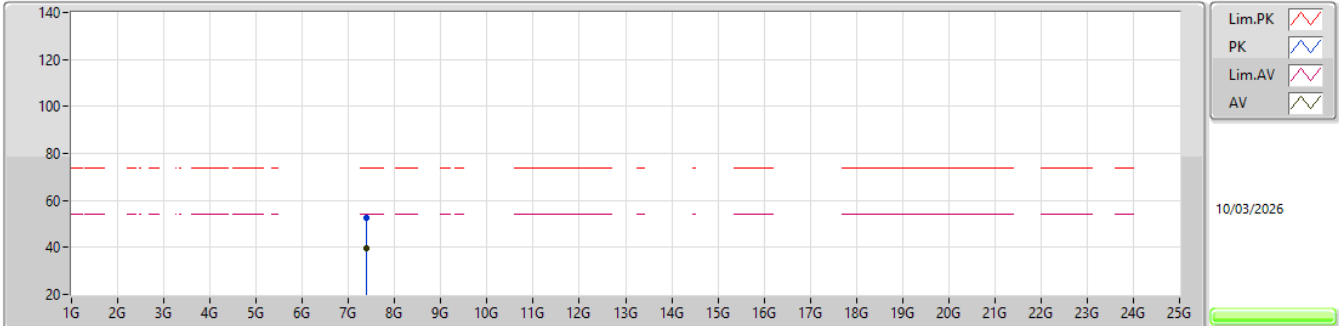


EUT_V_4TX
Setting 23
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.3978G	52.60	74.00	-21.40	37.76	3	Vertical	101	1.71	-	36.70	9.03	30.89			
AV	7.3946G	39.91	54.00	-14.09	25.08	3	Vertical	101	1.71	-	36.69	9.03	30.89			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2452MHz_TX

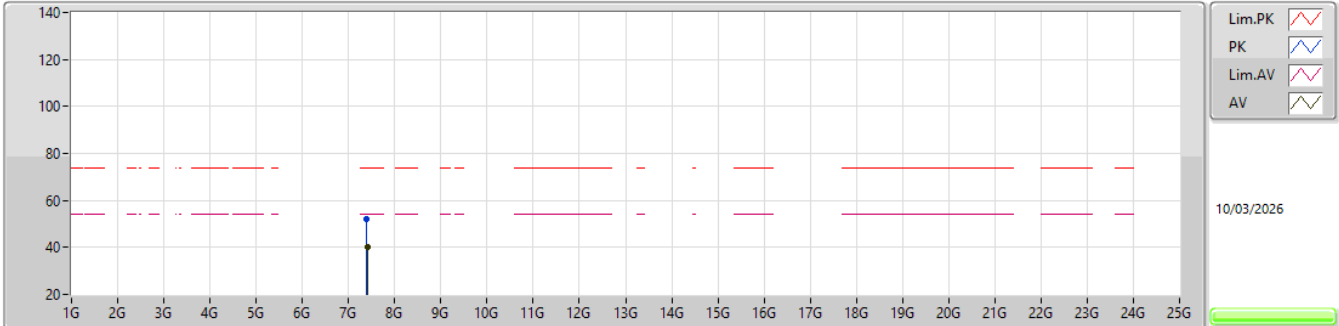

EUT_Y_4TX
Setting 23
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.381G	52.23	74.00	-21.77	37.43	3	Horizontal	319	2.80	-	36.66	9.03	30.89			
AV	7.402G	39.98	54.00	-14.02	25.14	3	Horizontal	319	2.80	-	36.70	9.03	30.89			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	Pass	AV	2.4835G	53.97	54.00	-0.03	3	Horizontal	299	1.79	-

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

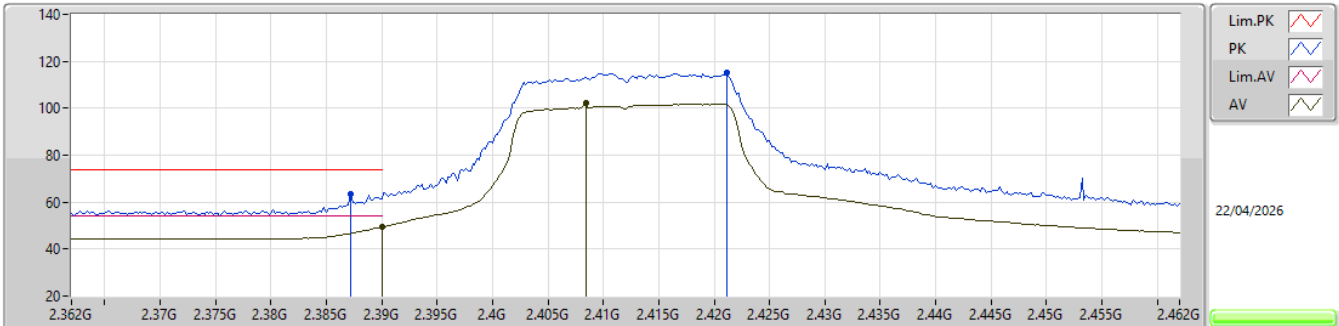


EUT_Y_4TX
Setting 28
01-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3872G	63.27	74.00	-10.73	30.56	3	Vertical	360	2.78	-	27.37	5.34	-			
AV	2.39G	49.40	54.00	-4.60	16.65	3	Vertical	360	2.78	-	27.40	5.35	-			
PK	2.4212G	115.42	Inf	-Inf	82.52	3	Vertical	360	2.78	-	27.51	5.39	-			
AV	2.4084G	101.99	Inf	-Inf	69.11	3	Vertical	360	2.78	-	27.50	5.38	-			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

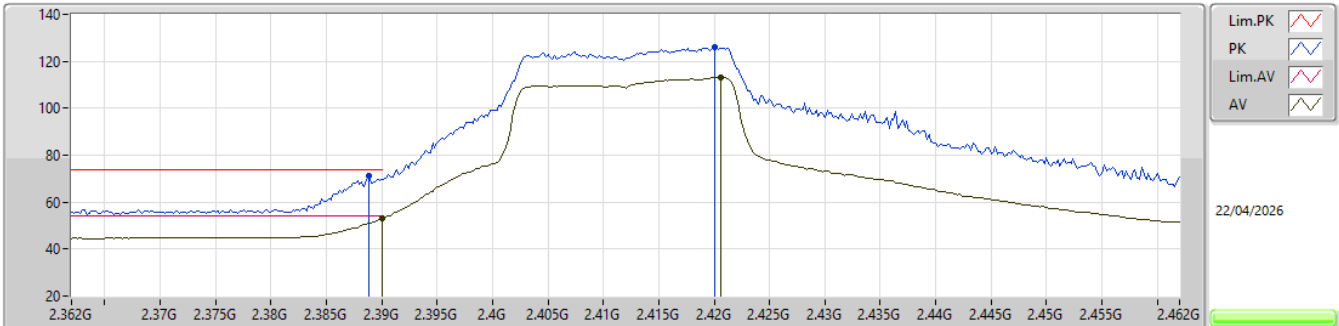


EUT_Y_4TX
Setting 28
01-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3888G	71.13	74.00	-2.87	38.39	3	Horizontal	301	1.80	-	27.39	5.35	-			
AV	2.39G	52.91	54.00	-1.09	20.16	3	Horizontal	301	1.80	-	27.40	5.35	-			
PK	2.42G	126.05	Inf	-Inf	93.16	3	Horizontal	301	1.80	-	27.50	5.39	-			
AV	2.4206G	113.12	Inf	-Inf	80.22	3	Horizontal	301	1.80	-	27.51	5.39	-			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

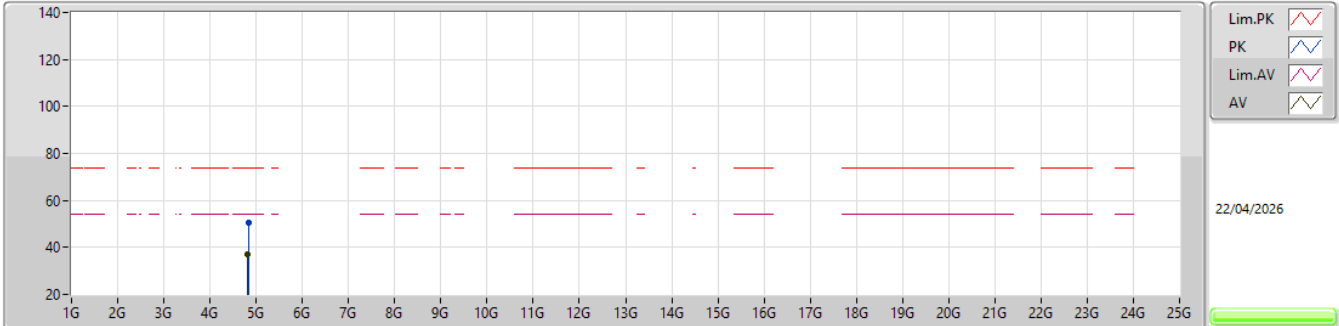


EUT_Y_4TX
Setting 28
01-E-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.82571G	50.67	74.00	-23.33	41.52	3	Vertical	185	1.22	-	32.45	9.27	32.57			
AV	4.82463G	37.14	54.00	-16.86	27.99	3	Vertical	185	1.22	-	32.45	9.27	32.57			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

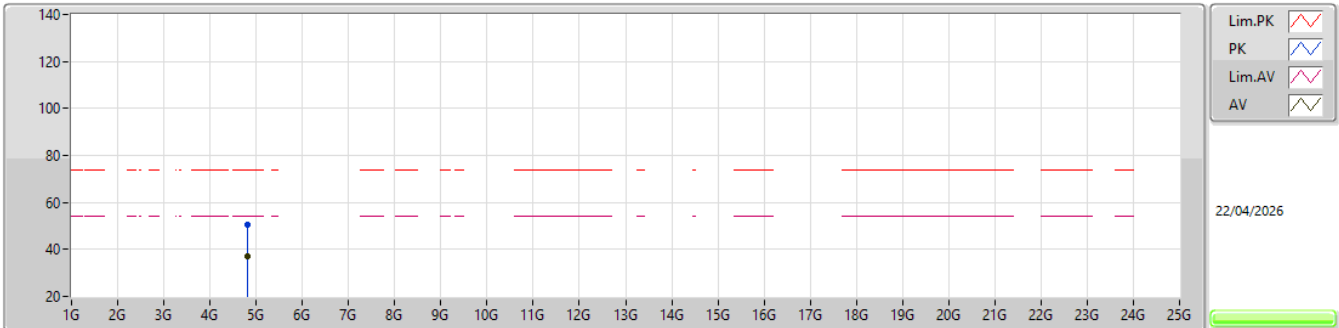


EUT_V_4TX
Setting 28
01-E-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.82273G	50.52	74.00	-23.48	41.38	3	Horizontal	318	1.82	-	32.44	9.27	32.57			
AV	4.82411G	37.05	54.00	-16.95	27.91	3	Horizontal	318	1.82	-	32.44	9.27	32.57			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

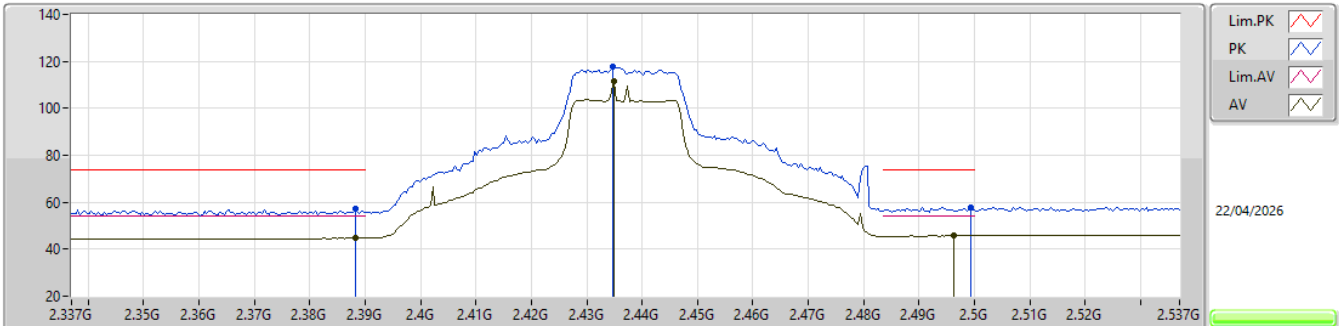


EUT_Y_4TX
Setting 33
01-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3882G	57.09	74.00	-16.91	24.36	3	Vertical	360	2.52	-	27.38	5.35	-				
AV	2.3882G	44.75	54.00	-9.25	12.02	3	Vertical	360	2.52	-	27.38	5.35	-				
PK	2.4346G	117.57	Inf	-Inf	84.56	3	Vertical	360	2.52	-	27.60	5.41	-				
AV	2.435G	111.49	Inf	-Inf	78.48	3	Vertical	360	2.52	-	27.60	5.41	-				
PK	2.4994G	58.01	74.00	-15.99	24.54	3	Vertical	360	2.52	-	28.00	5.47	-				
AV	2.4962G	45.75	54.00	-8.25	12.28	3	Vertical	360	2.52	-	28.00	5.47	-				

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

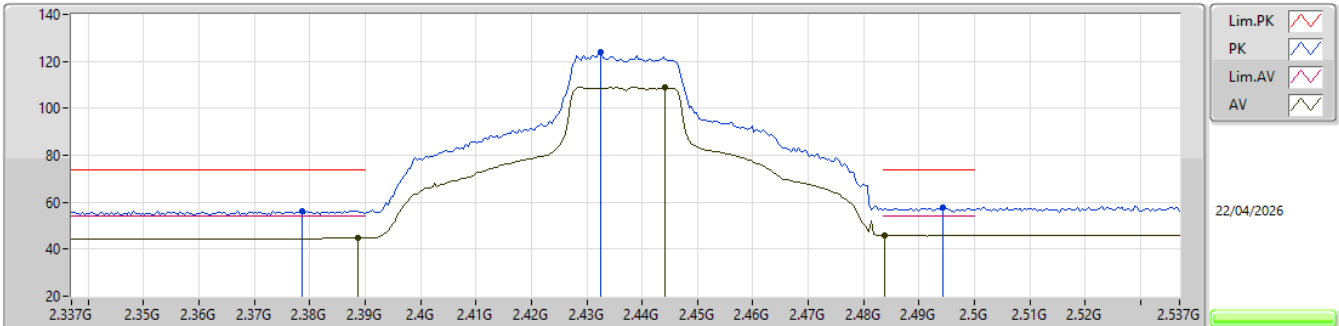


EUT_Y_4TX
Setting 33
01-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3786G	56.24	74.00	-17.76	23.61	3	Horizontal	299	1.80	-	27.30	5.33	-				
AV	2.3886G	44.90	54.00	-9.10	12.16	3	Horizontal	299	1.80	-	27.39	5.35	-				
PK	2.4326G	124.06	Inf	-Inf	91.06	3	Horizontal	299	1.80	-	27.60	5.40	-				
AV	2.4442G	109.19	Inf	-Inf	76.17	3	Horizontal	299	1.80	-	27.60	5.42	-				
PK	2.4942G	57.52	74.00	-16.48	24.05	3	Horizontal	299	1.80	-	28.00	5.47	-				
AV	2.4838G	45.88	54.00	-8.12	12.48	3	Horizontal	299	1.80	-	27.94	5.46	-				

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

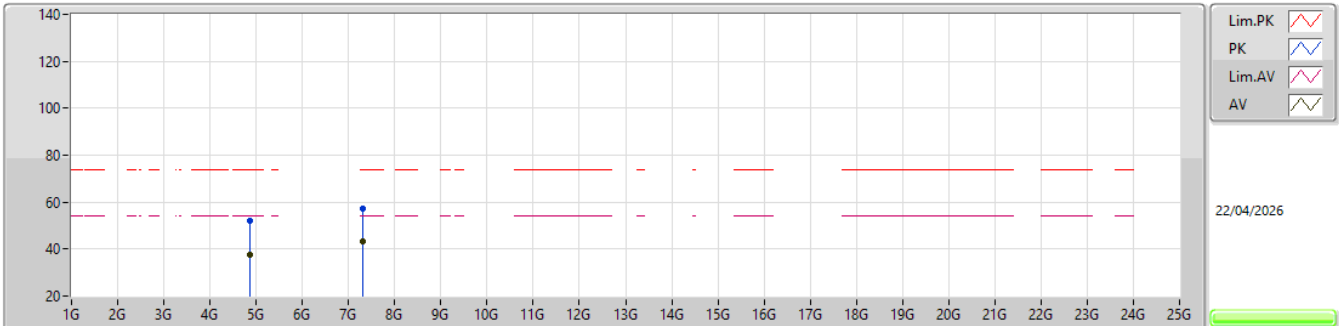


EUT_Y_4TX
Setting 33
01-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87624G	52.01	74.00	-21.99	42.56	3	Vertical	328	2.83	-	32.65	9.38	32.58				
AV	4.87369G	37.49	54.00	-16.51	28.04	3	Vertical	328	2.83	-	32.65	9.37	32.57				
PK	7.30975G	57.29	74.00	-16.71	41.24	3	Vertical	5	1.09	-	36.96	11.72	32.63				
AV	7.30917G	43.46	54.00	-10.54	27.41	3	Vertical	5	1.09	-	36.96	11.72	32.63				

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

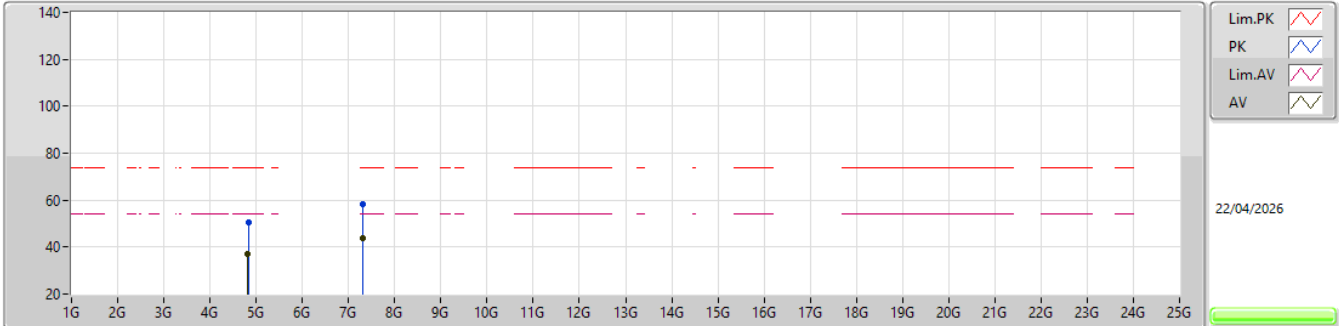


EUT_Y_4TX
Setting 33
01-E-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	4.82506G	50.77	74.00	-23.23	41.62	3	Horizontal	24	1.13	-	32.45	9.27	32.57				
AV	4.82425G	37.16	54.00	-16.84	28.01	3	Horizontal	24	1.13	-	32.45	9.27	32.57				
PK	7.31152G	58.21	74.00	-15.79	42.16	3	Horizontal	8	2.54	-	36.95	11.73	32.63				
AV	7.30931G	43.73	54.00	-10.27	27.68	3	Horizontal	8	2.54	-	36.96	11.72	32.63				

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

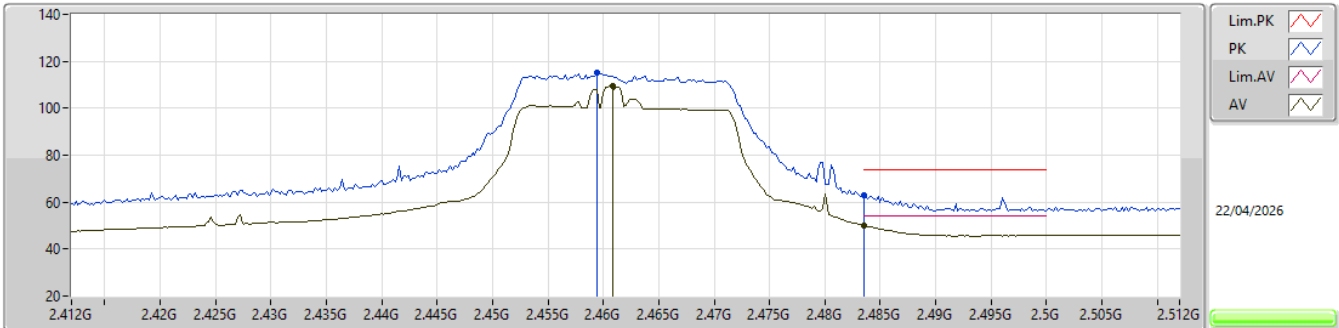


EUT_Y_4TX
Setting 29
01-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4594G	115.26	Inf	-Inf	82.23	3	Vertical	360	3.00	-	27.60	5.43	-			
AV	2.4608G	109.63	Inf	-Inf	76.58	3	Vertical	360	3.00	-	27.62	5.43	-			
PK	2.4835G	62.88	74.00	-11.12	29.49	3	Vertical	360	3.00	-	27.93	5.46	-			
AV	2.4835G	50.05	54.00	-3.95	16.66	3	Vertical	360	3.00	-	27.93	5.46	-			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

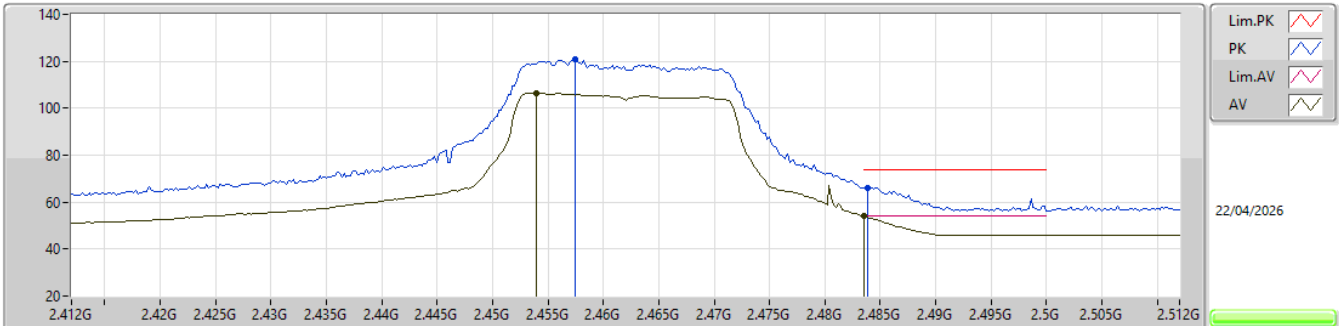


EUT_Y_4TX
Setting 29
01-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4574G	120.85	Inf	-Inf	87.82	3	Horizontal	299	1.79	-	27.60	5.43	-			
AV	2.454G	106.59	Inf	-Inf	73.56	3	Horizontal	299	1.79	-	27.60	5.43	-			
PK	2.4838G	66.28	74.00	-7.72	32.88	3	Horizontal	299	1.79	-	27.94	5.46	-			
AV	2.4835G	53.97	54.00	-0.03	20.58	3	Horizontal	299	1.79	-	27.93	5.46	-			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

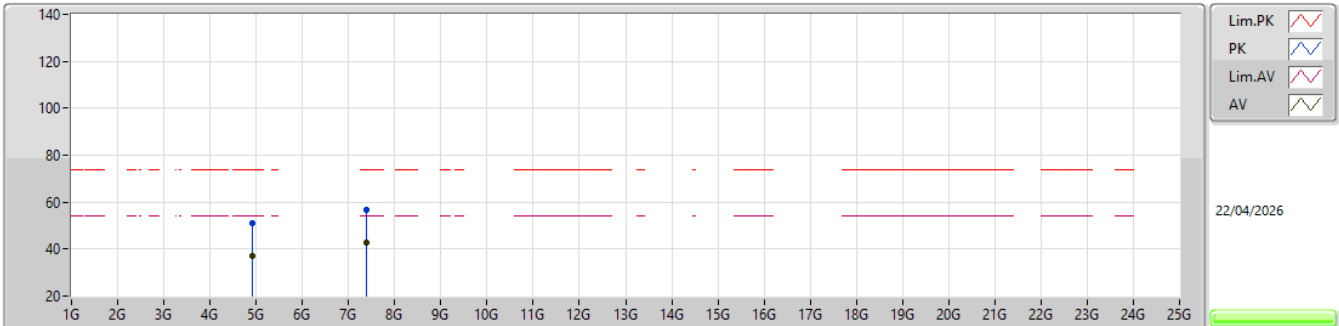


EUT_Y_4TX
Setting 29
01-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.92515G	51.06	74.00	-22.94	41.31	3	Vertical	17	1.01	-	32.85	9.48	32.58			
AV	4.92225G	37.17	54.00	-16.83	27.44	3	Vertical	17	1.01	-	32.83	9.48	32.58			
PK	7.38657G	56.62	74.00	-17.38	40.84	3	Vertical	10	1.40	-	36.51	11.87	32.60			
AV	7.38496G	42.88	54.00	-11.12	27.09	3	Vertical	10	1.40	-	36.52	11.87	32.60			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

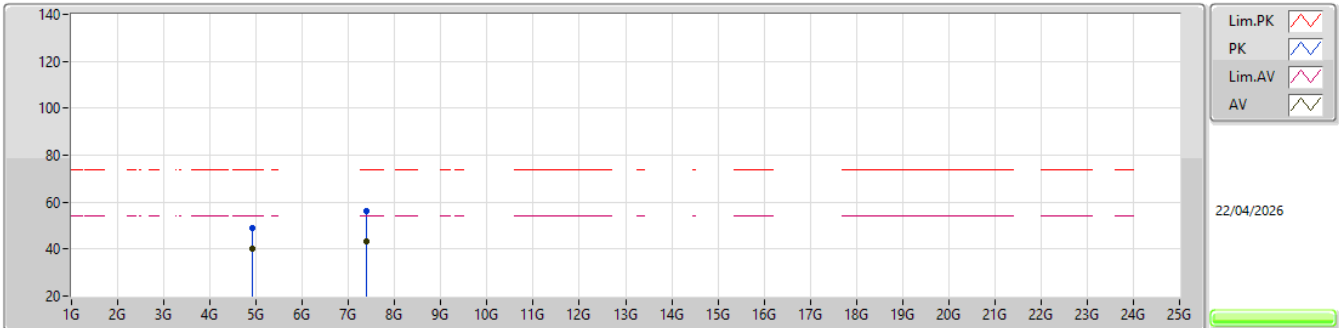


EUT_Y_4TX
Setting 29
01-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.92399G	48.77	74.00	-25.23	39.03	3	Horizontal	306	1.80	-	32.84	9.48	32.58			
AV	4.92399G	40.27	54.00	-13.73	30.53	3	Horizontal	306	1.80	-	32.84	9.48	32.58			
PK	7.38547G	56.45	74.00	-17.55	40.66	3	Horizontal	322	2.13	-	36.52	11.87	32.60			
AV	7.38384G	43.48	54.00	-10.52	27.68	3	Horizontal	322	2.13	-	36.53	11.87	32.60			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2422MHz_TX

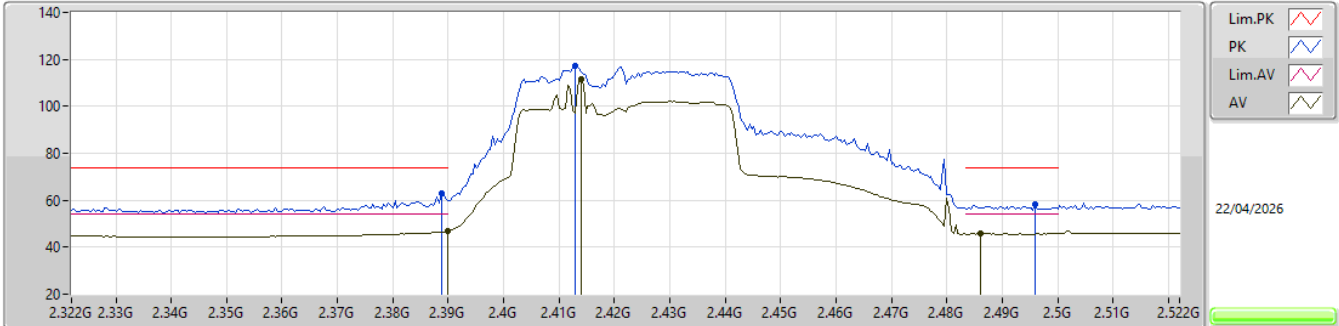


EUT_Y_4TX
Setting 29
01-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3888G	62.95	74.00	-11.05	30.21	3	Vertical	13	2.39	-	27.39	5.35	-			
AV	2.39G	46.97	54.00	-7.03	14.22	3	Vertical	13	2.39	-	27.40	5.35	-			
PK	2.4128G	117.04	Inf	-Inf	84.16	3	Vertical	13	2.39	-	27.50	5.38	-			
AV	2.414G	111.47	Inf	-Inf	78.59	3	Vertical	13	2.39	-	27.50	5.38	-			
PK	2.496G	58.35	74.00	-15.65	24.88	3	Vertical	13	2.39	-	28.00	5.47	-			
AV	2.486G	45.72	54.00	-8.28	12.30	3	Vertical	13	2.39	-	27.96	5.46	-			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2422MHz_TX

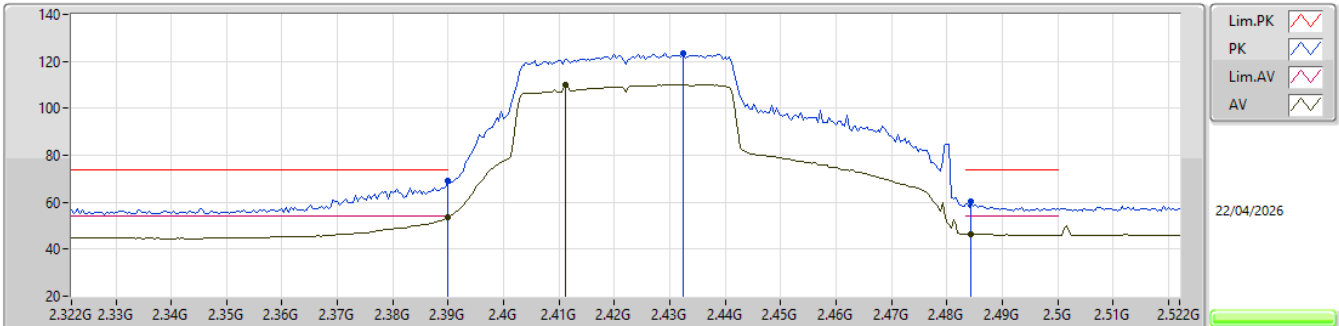


EUT_Y_4TX
Setting 29
01-E-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	2.39G	69.17	74.00	-4.83	36.42	3	Horizontal	299	1.80	-	27.40	5.35	-			
AV	2.39G	53.59	54.00	-0.41	20.84	3	Horizontal	299	1.80	-	27.40	5.35	-			
PK	2.4324G	123.58	Inf	-Inf	90.58	3	Horizontal	299	1.80	-	27.60	5.40	-			
AV	2.4112G	110.14	Inf	-Inf	77.26	3	Horizontal	299	1.80	-	27.50	5.38	-			
PK	2.4844G	60.52	74.00	-13.48	27.12	3	Horizontal	299	1.80	-	27.94	5.46	-			
AV	2.4844G	46.43	54.00	-7.57	13.03	3	Horizontal	299	1.80	-	27.94	5.46	-			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2422MHz_TX

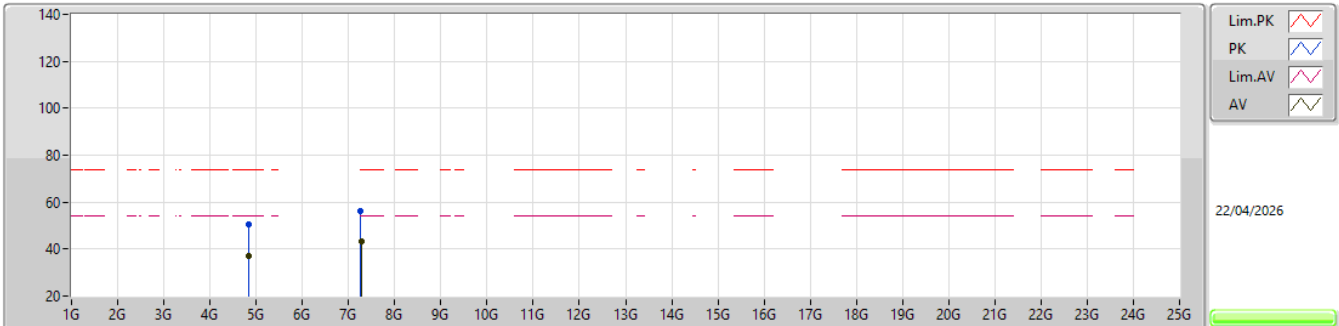


EUT_Y_4TX
Setting 29
01-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.85052G	50.43	74.00	-23.57	41.07	3	Vertical	15	2.46	-	32.60	9.33	32.57				
AV	4.84516G	37.26	54.00	-16.74	27.95	3	Vertical	15	2.46	-	32.57	9.31	32.57				
PK	7.26148G	55.99	74.00	-18.01	39.93	3	Vertical	122	1.60	-	37.08	11.63	32.65				
AV	7.27416G	43.02	54.00	-10.98	26.97	3	Vertical	122	1.60	-	37.05	11.65	32.65				

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2422MHz_TX

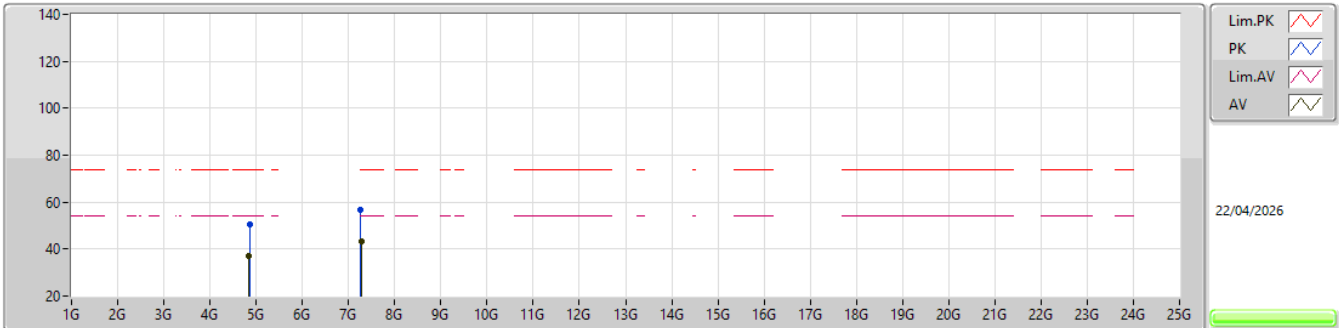


EUT_Y_4TX
Setting 29
01-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.85192G	50.51	74.00	-23.49	41.15	3	Horizontal	262	1.79	-	32.60	9.33	32.57				
AV	4.84792G	37.19	54.00	-16.81	27.85	3	Horizontal	262	1.79	-	32.59	9.32	32.57				
PK	7.25784G	56.49	74.00	-17.51	40.44	3	Horizontal	53	2.52	-	37.08	11.62	32.65				
AV	7.27572G	43.08	54.00	-10.92	27.02	3	Horizontal	53	2.52	-	37.05	11.66	32.65				

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2437MHz_TX

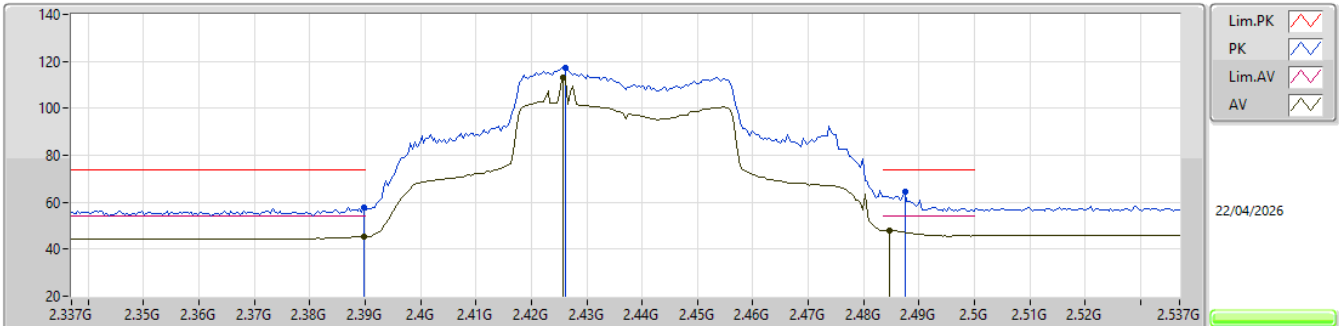


EUT_Y_4TX
Setting 29
01-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	57.80	74.00	-16.20	25.05	3	Vertical	360	3.00	-	27.40	5.35	-			
AV	2.3898G	45.36	54.00	-8.64	12.61	3	Vertical	360	3.00	-	27.40	5.35	-			
PK	2.4262G	117.35	Inf	-Inf	84.39	3	Vertical	360	3.00	-	27.56	5.40	-			
AV	2.4258G	113.14	Inf	-Inf	80.18	3	Vertical	360	3.00	-	27.56	5.40	-			
PK	2.4874G	64.41	74.00	-9.59	30.98	3	Vertical	360	3.00	-	27.97	5.46	-			
AV	2.4846G	47.97	54.00	-6.03	14.56	3	Vertical	360	3.00	-	27.95	5.46	-			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2437MHz_TX

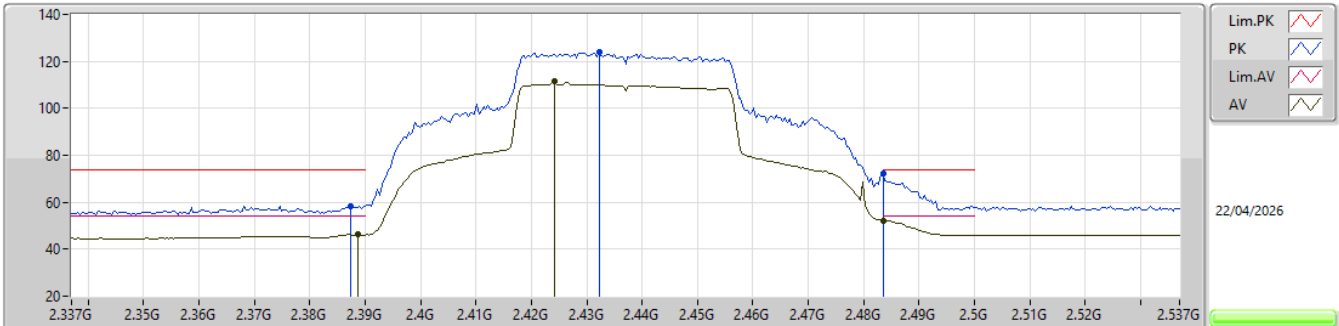


EUT_Y_4TX
Setting 29
01-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3874G	58.24	74.00	-15.76	25.53	3	Horizontal	303	1.80	-	27.37	5.34	-			
AV	2.3886G	46.18	54.00	-7.82	13.44	3	Horizontal	303	1.80	-	27.39	5.35	-			
PK	2.4322G	124.09	Inf	-Inf	91.09	3	Horizontal	303	1.80	-	27.60	5.40	-			
AV	2.4242G	111.52	Inf	-Inf	78.58	3	Horizontal	303	1.80	-	27.54	5.40	-			
PK	2.4835G	72.46	74.00	-1.54	39.07	3	Horizontal	303	1.80	-	27.93	5.46	-			
AV	2.4835G	52.26	54.00	-1.74	18.87	3	Horizontal	303	1.80	-	27.93	5.46	-			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2437MHz_TX

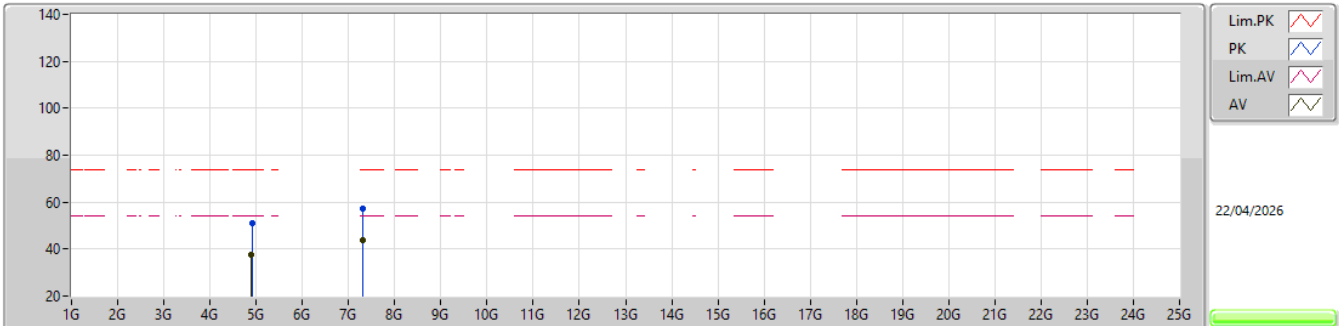


EUT_Y_4TX
Setting 29
01-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.9234G	50.97	74.00	-23.03	41.23	3	Vertical	125	2.18	-	32.84	9.48	32.58			
AV	4.8938G	37.61	54.00	-16.39	28.08	3	Vertical	125	2.18	-	32.69	9.42	32.58			
PK	7.30196G	57.32	74.00	-16.68	41.26	3	Vertical	122	1.36	-	36.99	11.71	32.64			
AV	7.30528G	43.66	54.00	-10.34	27.59	3	Vertical	122	1.36	-	36.98	11.72	32.63			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2437MHz_TX

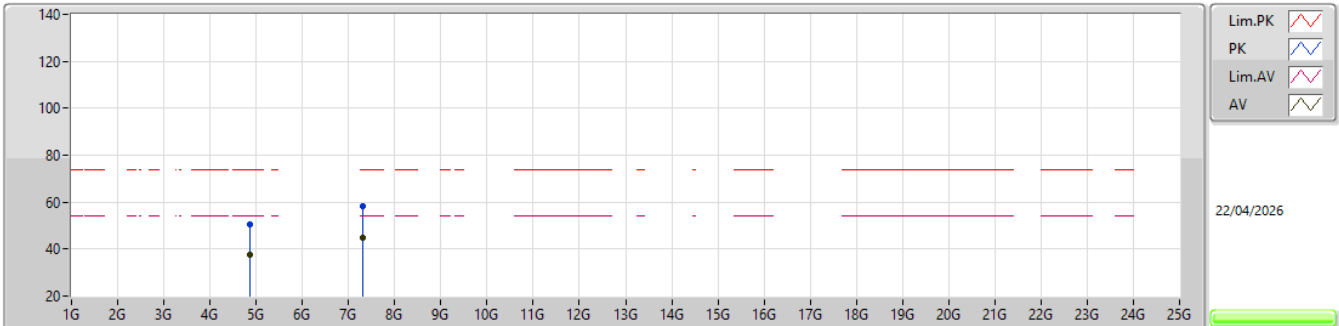


EUT_Y_4TX
Setting 29
01-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.87596G	50.63	74.00	-23.37	41.18	3	Horizontal	157	2.46	-	32.65	9.38	32.58			
AV	4.8764G	37.35	54.00	-16.65	27.90	3	Horizontal	157	2.46	-	32.65	9.38	32.58			
PK	7.30312G	58.39	74.00	-15.61	42.32	3	Horizontal	197	2.49	-	36.99	11.71	32.63			
AV	7.30384G	44.60	54.00	-9.40	28.54	3	Horizontal	197	2.49	-	36.98	11.71	32.63			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2452MHz_TX

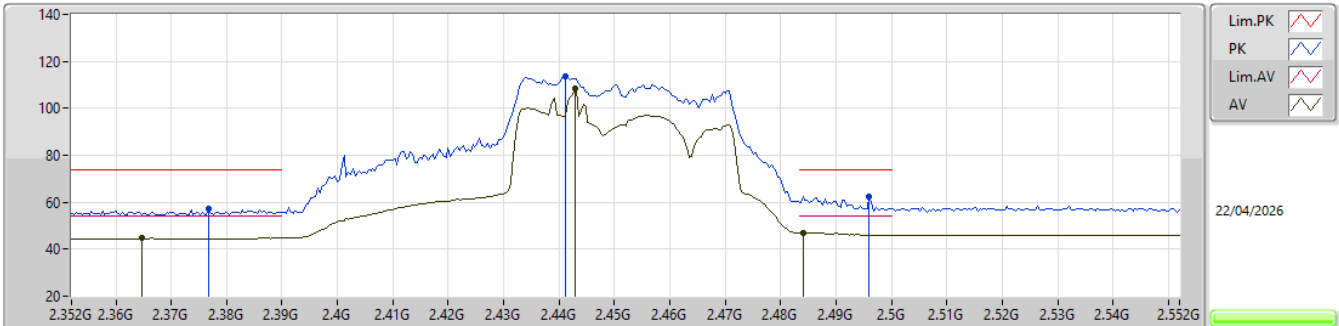


EUT_Y_4TX
Setting 29
01-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3768G	56.99	74.00	-17.01	24.37	3	Vertical	12	2.73	-	27.30	5.32	-			
AV	2.3648G	44.74	54.00	-9.26	12.09	3	Vertical	12	2.73	-	27.35	5.30	-			
PK	2.4412G	113.79	Inf	-Inf	80.78	3	Vertical	12	2.73	-	27.60	5.41	-			
AV	2.4428G	108.33	Inf	-Inf	75.32	3	Vertical	12	2.73	-	27.60	5.41	-			
PK	2.496G	62.40	74.00	-11.60	28.93	3	Vertical	12	2.73	-	28.00	5.47	-			
AV	2.484G	47.00	54.00	-7.00	13.60	3	Vertical	12	2.73	-	27.94	5.46	-			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2452MHz_TX

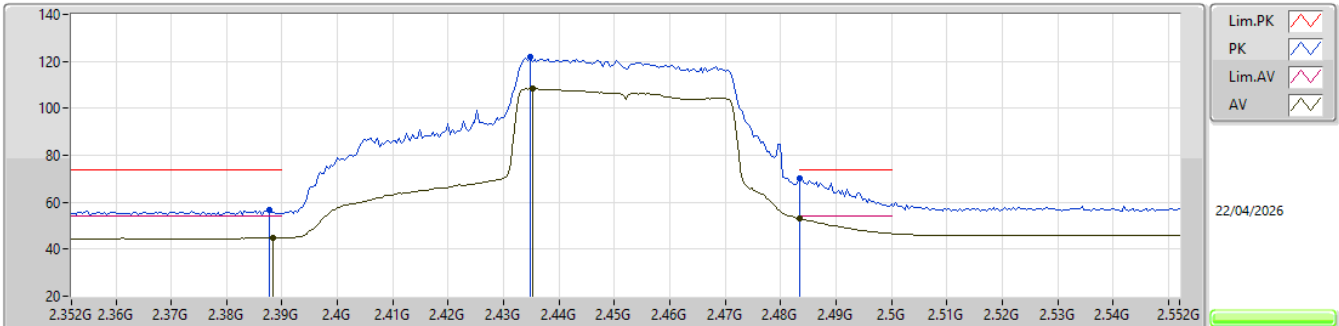


EUT_Y_4TX
Setting 29
01-E-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	2.3876G	56.54	74.00	-17.46	23.82	3	Horizontal	301	1.80	-	27.38	5.34	-			
AV	2.3884G	44.79	54.00	-9.21	12.06	3	Horizontal	301	1.80	-	27.38	5.35	-			
PK	2.4348G	121.78	Inf	-Inf	88.77	3	Horizontal	301	1.80	-	27.60	5.41	-			
AV	2.4352G	108.34	Inf	-Inf	75.33	3	Horizontal	301	1.80	-	27.60	5.41	-			
PK	2.4835G	70.16	74.00	-3.84	36.77	3	Horizontal	301	1.80	-	27.93	5.46	-			
AV	2.4835G	53.06	54.00	-0.94	19.67	3	Horizontal	301	1.80	-	27.93	5.46	-			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2452MHz_TX

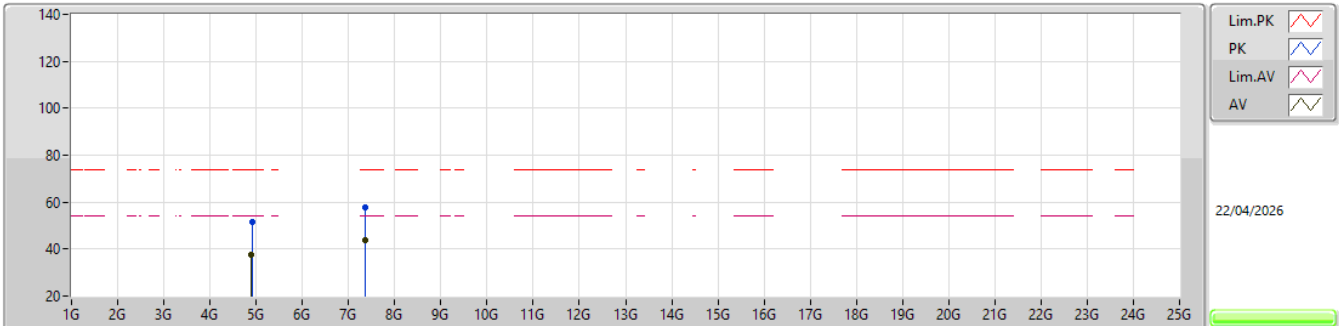


EUT_Y_4TX
Setting 29
01-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.91024G	51.63	74.00	-22.37	42.00	3	Vertical	1	1.80	-	32.76	9.45	32.58				
AV	4.9018G	37.80	54.00	-16.20	28.24	3	Vertical	1	1.80	-	32.71	9.43	32.58				
PK	7.3578G	57.91	74.00	-16.09	41.96	3	Vertical	210	1.80	-	36.74	11.82	32.61				
AV	7.35968G	43.84	54.00	-10.16	27.91	3	Vertical	210	1.80	-	36.72	11.82	32.61				

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2452MHz_TX

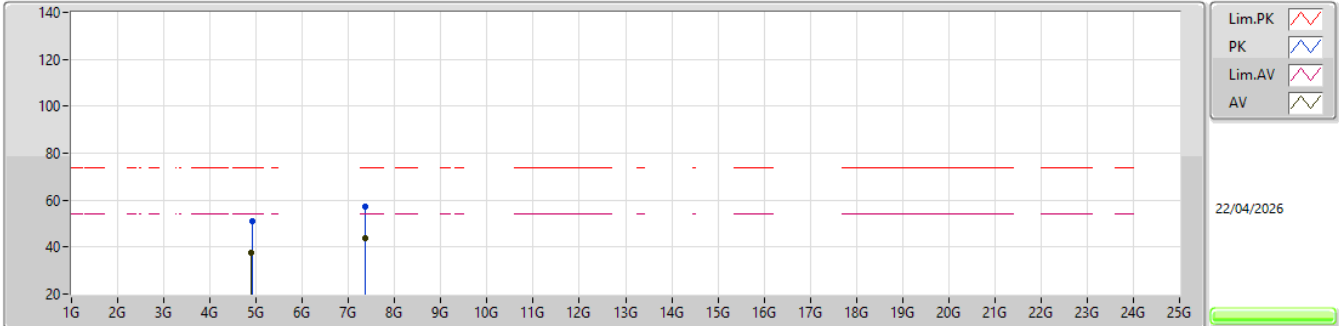

EUT_Y_4TX
Setting 29
01-E-S-2


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.904G	51.00	74.00	-23.00	41.42	3	Horizontal	87	2.21	-	32.72	9.44	32.58				
AV	4.89656G	37.61	54.00	-16.39	28.08	3	Horizontal	87	2.21	-	32.69	9.42	32.58				
PK	7.35956G	57.38	74.00	-16.62	41.45	3	Horizontal	223	2.99	-	36.72	11.82	32.61				
AV	7.36188G	43.91	54.00	-10.09	27.99	3	Horizontal	223	2.99	-	36.70	11.83	32.61				



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	1.77074G	48.36	54.00	-5.64	Horizontal

Radiated Emissions above 1GHz_Mode 1

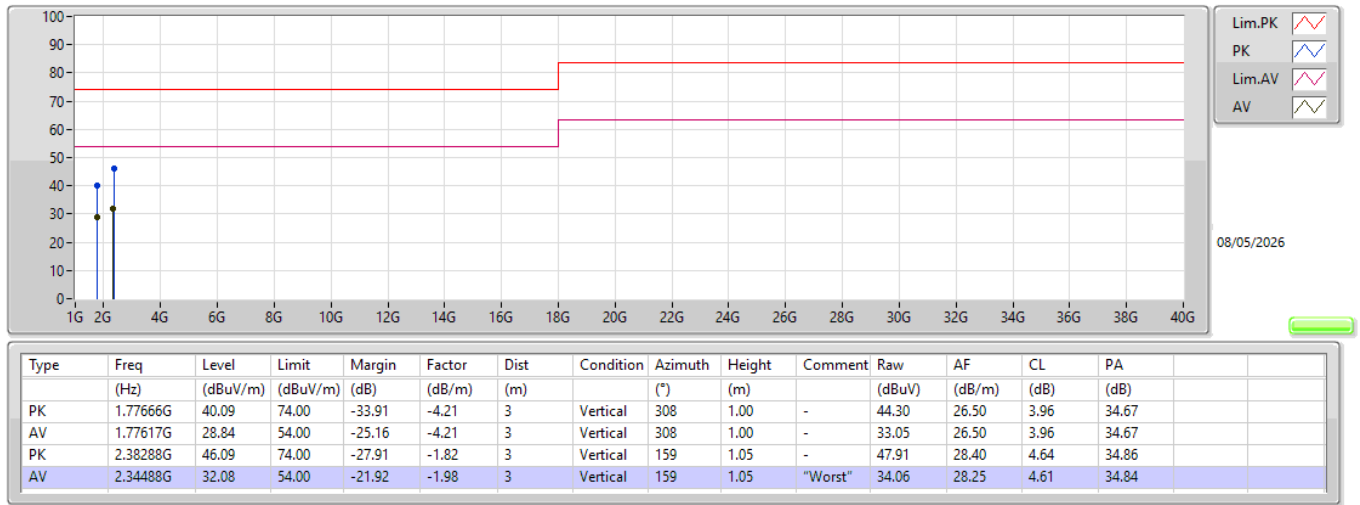

Radiated Emissions above 1GHz_Mode 1

