



Wide Adjustable Sector High Power Panel

Electrical Specifications

Frequency Range	2305-2360 MHz	
Sector HPBW	120	160
Gain dBi	13.0	11.5
VSWR	<1.35:1	
Front to Back	-21 dB	
Power Input	2000 W avg	
Vertical Beamwidth	7°	
Polarization	Vertical	
Input	1-5/8" EIA	


Mechanical Specifications

Length x Depth	40" x 6"	
Width	5.0"	7.0"
Weight	22.0 lbs	
Shipping Weight	28.0 lbs	
Shipping Dimensions	L	44"
	W	24"
	H	12"
Projected Area	1.32 ft ²	1.75 ft ²
Lateral Thrust @ 100mph	53 lbs	70 lbs
Wind Gust Rating	125 mph	


Environmental Specifications

Operating Temperature	-40° to +140°F (-40°C to 60°C)	
IP Rating	66	


**Mount Hardware Included*

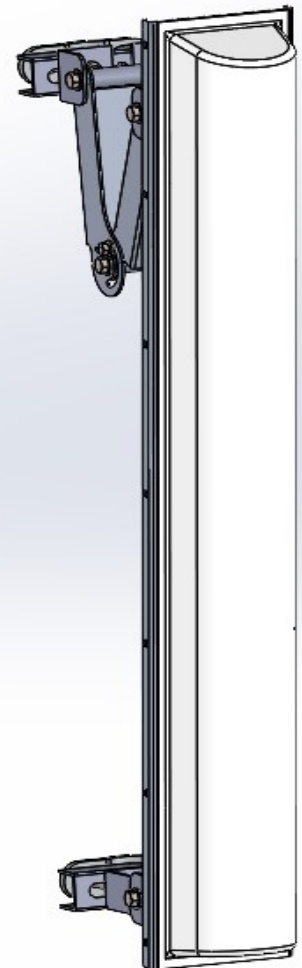

Azimuth

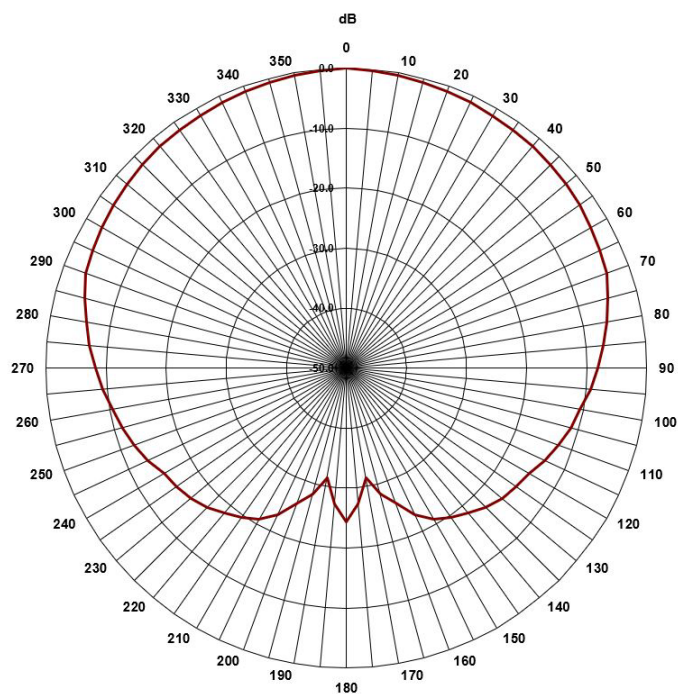

120°

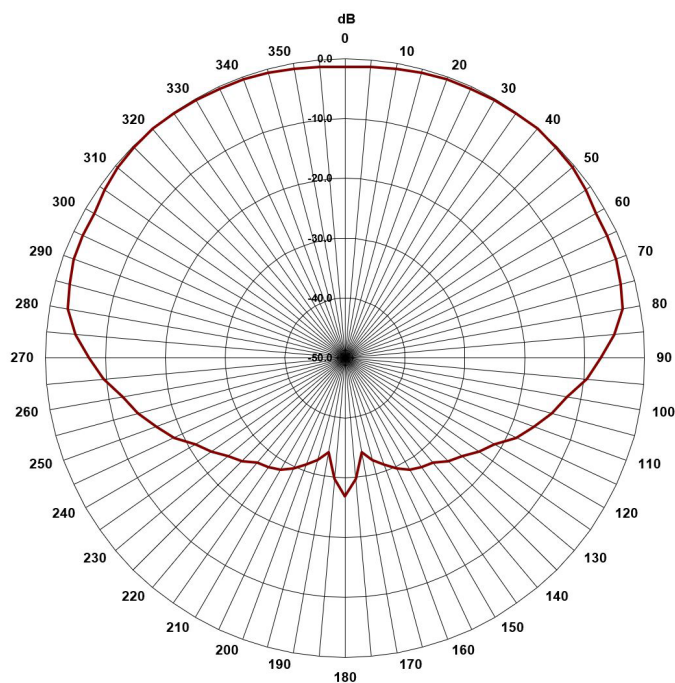

160°

Elevation Pattern

