

Hasbro Far East Limited

Application
For
Certification
Two Way Radio with FRS and Messaging

(FCC ID: RS4HB001)

April 20, 2005

0505959
TL/ Ann Choy
April 20, 2005

- The test results reported in this report shall refer only to the sample actually tested and shall not refer or be deemed a refer to bulk from which such a sample may be said to have been obtained.
- This report shall not be reproduced except in full without prior authorization from Intertek Testing Services Hong Kong Limited
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2371 0521 Website: www.hk.intertek-etlsemko.com

INTERTEK TESTING SERVICES

SUMMARY OF CONTENTS

LIST OF EXHIBITS

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	RF Power Output
<i>EXHIBIT 4:</i>	Modulation Characteristics
<i>EXHIBIT 5:</i>	Occupied Bandwidth
<i>EXHIBIT 6:</i>	Spurious Emission
<i>EXHIBIT 7:</i>	Frequency Stability
<i>EXHIBIT 8:</i>	Digital Data Transmission
<i>EXHIBIT 9:</i>	Technical Specifications
<i>EXHIBIT 10:</i>	Product Labelling
<i>EXHIBIT 11:</i>	Photographs
<i>EXHIBIT 12:</i>	Instruction Manual
<i>EXHIBIT 13:</i>	Tune Up Procedure
<i>EXHIBIT 14:</i>	Part List
<i>EXHIBIT 15:</i>	Input Current
<i>EXHIBIT 16:</i>	RF Exposure Info
<i>EXHIBIT 17:</i>	Confidentiality Request

INTERTEK TESTING SERVICES

MEASUREMENT/TECHNICAL REPORT

Application : Hasbro Far East Limited
Trade Name/Model No : Hasbro/ 75071 (Chat Now single pack - Flip)
Hasbro/ 75028 (Chat Now Communicator 2pk Assortment)
Hasbro/ 72970 (Chat Now Communicator single pk Assortment)
Hasbro/ 74885 (Chat Now 2pk - Flip)
Date : April 20, 2005

This report concerns (check one:) Original Grant ☒ Class II Change ☐

Equipment Type: FRF – Part 95 Family Radio Face Held Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes ☐ No ☒

If yes, defer until:
date

Company Name agrees to notify the Commission by:
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

Tommy Leung
Intertek Testing Services
2/F., Garment Centre,
576 Castle Peak Road,
Kowloon, Hong Kong.
Phone: 852-2173-8536
Fax: 852-2741-1693

INTERTEK TESTING SERVICES

Table of Contents

1.0	<u>General Description</u>	2
1.1	Product Description	2
1.2	Related Submittal(s) Grants	3
1.3	Test Methodology	3
1.4	Test Facility	3
2.0	<u>System Test Configuration</u>	5
2.1	Justification	5
2.2	EUT Exercising Software	6
2.3	Special Accessories	6
2.4	Measurement Uncertainty	6
2.5	Equipment Modification	6
2.6	Support Equipment	6
3.0	<u>RF Output Power (Section 95.639(d))</u>	8
4.0	<u>Modulation Characteristics (Section 95.637(a))</u>	12
4.1	Modulation Frequency Response	13
4.2	Modulation Limiting Characteristic	15
5.0	<u>Occupied Bandwidth (Section 95.633(c))</u>	18
6.0	<u>Spurious Emission (Section 95.635(b))</u>	20
6.1	Field Strength of Spurious Radiation	21
7.0	<u>Frequency Stability (Section 95.627)</u>	27
7.1	Frequency Tolerance	28
7.2	Temperature Extreme Condition	30
7.3	Voltage Extreme Condition	33
8.0	<u>Digital Data Transmittion (Section 95.193(b)(2))</u>	36
9.0	<u>Technical Specifications</u>	38
10.0	<u>Product Labelling</u>	43
11.0	<u>Equipment Photographs</u>	45
12.0	<u>Instruction Manual</u>	47
13.0	<u>Tune Up Procedure</u>	49
14.0	<u>Part List</u>	51
15.0	<u>Input Current</u>	53
16.0	<u>RF Exposure Info</u>	55
17.0	<u>Confidentiality Request</u>	57

INTERTEK TESTING SERVICES

List of attached file

Exhibit type	File Description	Filename
Operation Description	Technical Description	descri.pdf
Test Report	Bandwidth Plot	bw.pdf
Test Report	Modulation Frequency Response	mfr.pdf
Test Report	Modulation Limit Characteristic	mlc.pdf
Test Report	Spurious Emission	spurious.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated Emission	config photos.doc
Internal Photo	Internal Photo	internal photos.doc
External Photo	External Photo	external photos.doc
Test Report	Tune Up Procedure	tuneup.pdf
Test Report	Part List	partlist.pdf
Test Report	Digital Data Transmission	ddt.pdf
Cover Letter	Confidentiality Request	request.pdf

INTERTEK TESTING SERVICES

EXHIBIT 1

GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

1.0 General Description

1.1 Product Description

The Equipment Under Test (EUT) is a Two Way Radio with FRS operating between 462.5625MHz and 467.7125MHz. The EUT can conduct two-way voice communication with another person on the same channel (1-14). Also, the EUT can send a brief text message to another specific person on the pre-set channel. The EUT is powered by 6V (4 x "AAA" size 1.5V alkaline batteries).

Transmitter Portion

- (i) Type of Emission : FRS - 10K5F3E, 5K50F2D
- (ii) Frequency Range : FRS - 462.5625MHz to 462.7125MHz (7 Channels)
FRS - 467.5625MHz to 467.7125MHz (7 Channels)
- (iii) Maximum Power Rating : FRS (Channel 1-7) - 0.08W ERP
FRS (Channel 8-14) - 0.06W ERP
- (iv) Antenna Type : Integral

The flip type communicator in the Model: Hasbro 75028 (Chat Now Communicator 2pk Assortment), Hasbro 72970 (Chat Now Communicator single pk Assortment), and the Model: Hasbro 74885 (Chat Now 2pk - Flip) are same as the Model: Hasbro 75071 (Chat Now single pack - Flip) in hardware aspect. The model numbers are difference in package. The model numbers are identical in electrical, mechanical, and physical design. The difference in model number serves as marketing strategy.

The brief circuit description is saved with filename: descri.pdf

INTERTEK TESTING SERVICES

1.2 Related Submittal(s) Grants

This is an Application for Certification of the transmitter portion of a FRS Transceiver. The receiver section of this Transceiver and digital device portion are subject to verification process.

1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.4 (2001) and ANSI/TIA/EIA-603-A-2001. All measurement were performed in Open Area Test Sites. Preliminary scans were performed in the Open Area Test Sites only to determine worst case modes. For each scan, the procedure of maximizing emissions in Appendices D and E were followed. All Radiated tests were performed at an antenna the EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the emission data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. The test facility and site measurement data have been fully placed on file with the FCC.

INTERTEK TESTING SERVICES

EXHIBIT 2

SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

2.0 System Test Configuration

2.1 Justification

The device was configured for testing in a typical fashion (as a customer would normally use it). The device was placed on a turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes. When the radiated emissions are measured.

The device was powered by 4 new "AAA" size 1.5V alkaline batteries.

The frequency range from 30 MHz to 4.69 GHz was searched for spurious emissions from the device. Only those emissions reported were detected. All other emissions were at least 20 dB below the applicable limits.

INTERTEK TESTING SERVICES

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered on, a signal is transmitted.

2.3 Special Accessories

No special accessory is needed for compliance of this device.

2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

2.5 Equipment Modification

Any modification installed previous to testing by Hasbro Far East Limited will be incorporated in each production model sold/leased in the United States.

No modification were installed by Intertek Testing Services.

2.6 Support Equipment

A headset with 1.2m unshielded cable. (Supplied by Intertek)

Confirmed by:

*Tommy Leung
Assistant Manager
Intertek Testing Services
Agent for Hasbro Far East Limited*



_____ Signature

_____ April 20, 2005 _____ Date

INTERTEK TESTING SERVICES

EXHIBIT 3

RF POWER OUTPUT

INTERTEK TESTING SERVICES

3.0 **RF Power Output (Section 2.1046(a))**

A. Equipment Used

Equipment	Brand Name	Model No.
Log Periodic Antenna	EMCO	3148
Test receiver	Rohde & Schwarz	ESVS30
Tuned Dipole Antenna	CDI	A100
Signal Generator	RFI	2023B

B. Testing Procedure

1. On a test site, the EUT shall be placed at 1.5m height on a turn table, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarisation located 3m from EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the quasi-peak detector is used for the measurement.
4. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.

INTERTEK TESTING SERVICES

6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a tuned dipole (substitution antenna).
10. The substitution antenna shall be orientated for vertical polarisation and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarisation.
17. The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.

INTERTEK TESTING SERVICES

Table 1

**Hasbro Far East Limited
Hasbro/ 75071 (Chat Now single pack - Flip)**

Transmission Power

Channel	Frequency (MHz)	Effective Radiated Power		Limit (W)	Margin (W)
		(dBm)	(W)		
1	462.5625	18.9	0.08	0.5	-0.42
2	462.5875	18.9	0.08	0.5	-0.42
3	462.6125	18.9	0.08	0.5	-0.42
4	462.6375	18.9	0.08	0.5	-0.42
5	462.6625	18.9	0.08	0.5	-0.42
6	462.6875	18.9	0.08	0.5	-0.42
7	462.7125	18.9	0.08	0.5	-0.42
8	467.5625	17.9	0.06	0.5	-0.44
9	467.5875	17.9	0.06	0.5	-0.44
10	467.6125	17.9	0.06	0.5	-0.44
11	467.6375	17.9	0.06	0.5	-0.44
12	467.6625	17.9	0.06	0.5	-0.44
13	467.6875	17.9	0.06	0.5	-0.44
14	467.7125	17.9	0.06	0.5	-0.44

Notes: Negative sign in the margin column shows the value below limits.

Test Engineer: Kenneth C. C. Lam

Date of Test: March 25-April 14, 2005

INTERTEK TESTING SERVICES

EXHIBIT 4

MODULATION CHARACTERISTICS

INTERTEK TESTING SERVICES

4.0 Modulation Characteristics

In order to satisfy the 95.637(a) requirement, Modulation Frequency Response and Modulation Limit Characteristics are attached in Exhibit 4.1 & 4.2.

Plots for each tests are saved with filename: mfr.pdf and mlc.pdf

INTERTEK TESTING SERVICES


4.1 Modulation Frequency Response

A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	HP	HP8904A
AC Millivoltmeter	Leader	LMV-182A
20 dB RF Attenuator	Bird	8304-200-N
Communication Service Monitor	Marconi	2945

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

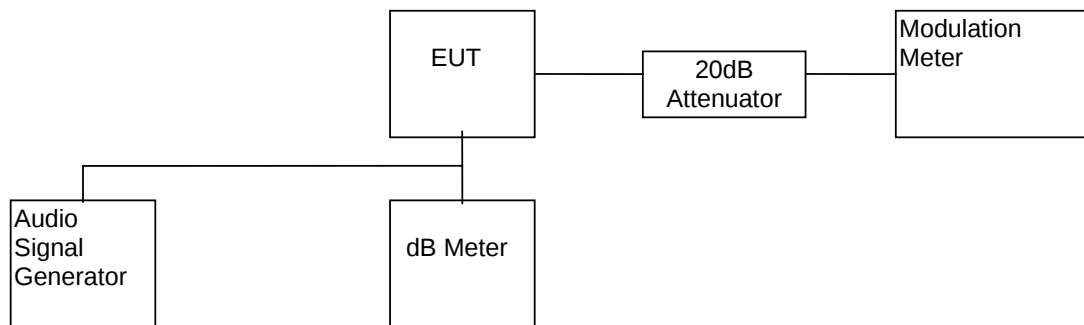

- 2) Set the audio signal generator frequency to the sound pressure level 88dBSPL at the microphone of the EUT.
- 3) The frequency of the audio signal generator is changed from 300Hz to 5kHz.
- 4) Record the frequency deviation.

INTERTEK TESTING SERVICES

C. Test Result

Table 2

Hasbro Far East Limited
Hasbro/ 75071 (Chat Now single pack - Flip)

Modulation Frequency Response

Test Channel : 4
Input level = 88dB SPL

Modulation Frequency (Hz)	Modulation index (%)
300	0.35
400	0.32
500	0.31
600	0.33
700	0.82
800	0.81
900	0.83
1000	0.85
1250	0.96
1500	1.04
1750	1.17
2000	0.95
2250	0.74
2500	0.50
2750	0.63
3000	0.67
3125	0.68
3250	0.62
3500	0.53
4000	0.27
5000	0.13

Test Engineer: Kenneth C. C. Lam Date of Test: March 25-April 14, 2005

INTERTEK TESTING SERVICES


4.2 Modulation Limiting Characteristics (Section 2.1047(b))

A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	HP	HP8904A
20 dB RF Attenuator	Bird	8304-200-N
Communication Service Monitor	Marconi	2945

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

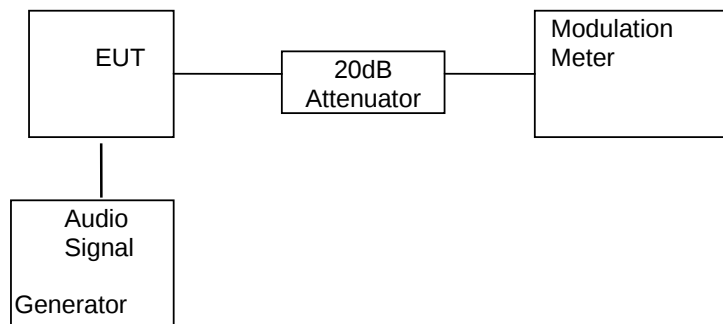

- 2) Set the frequency of the audio signal generator to 500Hz and adjust the level from 47dBSPL to 137dBSPL.
- 3) Record the maximum value of plus or minus peak frequency deviation.
- 4) Repeat the above procedure with frequency 1000Hz, 2500Hz & 3125Hz.

INTERTEK TESTING SERVICES

C. Test Result

Table 3

**Hasbro Far East Limited
Hasbro/ 75071 (Chat Now single pack - Flip)**

Modulation Limiting Characteristics

Test Channel : 4

Modulation Input (dBSPL)	Peak Frequency Deviation (kHz) at 500Hz	Peak Frequency Deviation (kHz) at 1000Hz	Peak Frequency Deviation (kHz) at 2500Hz	Peak Frequency Deviation (kHz) at 3125Hz
47	0.10	0.07	0.09	0.17
57	0.10	0.09	0.10	0.18
67	0.10	0.10	0.20	0.80
77	0.10	0.18	0.75	1.21
87	0.14	0.74	1.22	2.08
97	0.67	1.23	1.85	2.34
107	0.95	1.71	2.00	2.35
117	1.48	2.09	2.00	2.35
127	1.88	2.20	2.03	2.41
137	2.31	2.25	2.04	2.42

Test Engineer: Kenneth C. C. Lam

Date of Test: March 25-April 14, 2005

INTERTEK TESTING SERVICES

EXHIBIT 5

OCCUPIED BANDWIDTH

INTERTEK TESTING SERVICES


5.0 Occupied Bandwidth (Section 95.633(c))

A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	HP	HP8904A
AC Millivoltmeter	Leader	LMV-182A
20 dB RF Attenuator	Bird	8304-200-N
Spectrum Analyzer	HP	8951EM

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

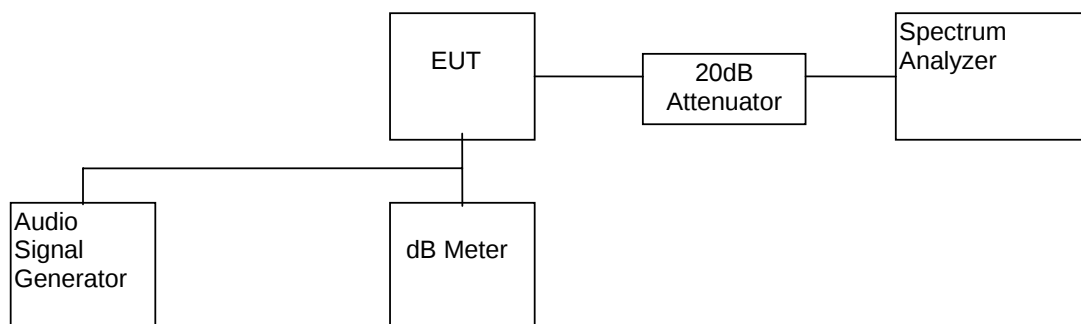

- 2) Set the level of audio signal generator to obtain 16 dB greater than required for 50% modulation for EUT's voice transmission.
- 3) The EUT is keyed into maximum 120 characteristics for EUT's data transmission.
- 4) The occupied bandwidth is measured with the spectrum analyzer set at 2kHz/div scan and 10dB/div.

C. Test Result

The occupied Bandwidth is measured to be 10.45 kHz (Voice on the Channel 4), 10.5 kHz (Voice on the Channel 11), 5.5 kHz (Data on the Channel 4) and 5.35 kHz (Data on the Channel 11)

For the electronic filing, the bandwidth plot is saved with filename: bw.pdf

Test Engineer: Kenneth C. C. Lam

Date of Test: March 25-April 14, 2005

INTERTEK TESTING SERVICES

EXHIBIT 6

SPURIOUS EMISSION

INTERTEK TESTING SERVICES

6.0 **Spurious Emission (Section 95.635)**

In order to satisfy the 95.635 requirement, the spurious emission from the EUT are measured and shown in the Exhibit 6.1.

INTERTEK TESTING SERVICES

6.1 Field Strength of Spurious Radiation (Section 95.635)

A. Test Equipment

Equipment	Brand Name	Model No.
Antenna	EMCO	A100, 3148, 3104C, 3115
Spectrum Analyzer	ADVANTEST	R3271
Test receiver	Rohde & Schwarz	ESVS30
RF Filter	Trilithic	3VF500/1000-5-50-CC

B. Testing Procedure

Radiated emission measurements were performed according to the procedures in ANSI C63.4(2001). All measurements were performed in Open Area Test Sites located at Roof Top of Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

INTERTEK TESTING SERVICES

C. Radiated Emission Configuration Photograph

Worst Case Radiated Emission

For electronic filing, the radiated emission configurations photograph is saved with filename: config photos.doc

INTERTEK TESTING SERVICES

C. Test Result

Hasbro Far East Limited
Hasbro/ 75071 (Chat Now single pack - Flip)

Table 4(a)

1) Unwanted emission from CARRIER $\pm 6.25\text{kHz}$ to CARRIER $\pm 31.25\text{kHz}$

(Refer to the plots which is saved with filename: spurious.pdf)

Region	Unwanted emission	
	Channel 4	Channel 11
CARRIER $\pm 6.25\text{kHz}$ to $\pm 12.5\text{kHz}$	<25dB	<25dB
CARRIER $\pm 12.5\text{kHz}$ to $\pm 31.25\text{kHz}$	<35dB	<35dB

INTERTEK TESTING SERVICES

Table 4(b): Channel 4

Frequency (MHz)	Effective Radiated Power (dBm)	Transmission Power (dBm)	Attenuation (dB)	Limit (dB)	Margin (dB)
925.279	-37.5	18.9	56.4	31.9	-24.5
1387.919	-34.1	18.9	53.0	31.9	-21.1
1850.559	-40.6	18.9	59.5	31.9	-27.6
2313.199	-36.8	18.9	55.7	31.9	-23.8
2775.838	-39.7	18.9	58.6	31.9	-26.7

- Remark: 1. Transmission power is 18.9 dBm or -11.1 dB(W).
2. According to Section 95.635(b7), the unwanted emission should be attenuated below TP by at least $43 + 10 \log_{10} (TP)$ dB or 31.9 dB.
3. The test is performed according to ANSI/TIA/EIA-603-A-2001.

Test Engineer: Kenneth C. C. Lam

Date of Test: March 25-April 14, 2005

INTERTEK TESTING SERVICES

Table 4(b): Channel 11

Frequency (MHz)	Effective Radiated Power (dBm)	Transmission Power (dBm)	Attenuation (dB)	Limit (dB)	Margin (dB)
935.271	-38.4	17.9	56.3	30.9	-25.4
1402.920	-32.8	17.9	50.7	30.9	-19.8
1870.560	-38.4	17.9	56.3	30.9	-25.4
2338.201	-37.7	17.9	55.6	30.9	-24.7
2805.840	-40.4	17.9	58.3	30.9	-27.4

- Remark: 1. Transmission power is 17.9 dBm or -12.1 dB(W).
2. According to Section 95.635(b7), the unwanted emission should be attenuated below TP by at least $43 + 10 \log_{10} (TP)$ dB or 30.9 dB.
3. The test is performed according to ANSI/TIA/EIA-603-A-2001.

Test Engineer: Kenneth C. C. Lam

Date of Test: March 25-April 14, 2005

INTERTEK TESTING SERVICES

EXHIBIT 7

FREQUENCY STABILITY

7.0 **Frequency Stability**

The frequency tolerance was tested in normal condition & over extreme ambient conditions with respect to voltage and temperature variation.

INTERTEK TESTING SERVICES


7.1 Frequency Tolerance (Section 95.627)

A. Test Equipment

Equipment	Brand Name	Model No.
20 dB RF Attenuator	Bird	8304-200-N
Frequency Counter	Phillips	PM6668

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:



- 2) Measure all transmit channel frequencies in MHz.

INTERTEK TESTING SERVICES

C. Test Result

Table 5

**Hasbro Far East Limited
Hasbro/ 75071 (Chat Now single pack - Flip)**

Frequency Tolerance

Channel	Frequency (MHz)	Measured Frequency (MHz)	Tolerance (%)
1	462.5625	462.56242	-0.000017
2	462.5875	462.58745	-0.000011
3	462.6125	462.61247	-0.000006
4	462.6375	462.63748	-0.000004
5	462.6625	462.66248	-0.000004
6	462.6875	462.68745	-0.000011
7	462.7125	462.71245	-0.000011
8	467.5625	467.56245	-0.000011
9	467.5875	467.58744	-0.000013
10	467.6125	467.61244	-0.000013
11	467.6375	467.63743	-0.000015
12	467.6625	467.66242	-0.000017
13	467.6875	467.68743	-0.000015
14	467.7125	467.71242	-0.000017

INTERTEK TESTING SERVICES


7.2 Frequency Stability - Temperature (Section 2.1055)

A. Test Equipment

Equipment	Brand Name	Model No.
20 dB RF Attenuator	Bird	8304-200-N
Frequency Counter	Phillips	PM6668

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

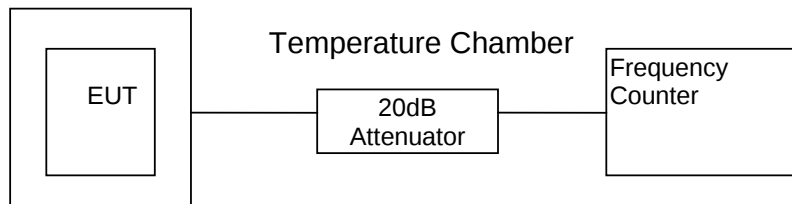

- 2) Set the Temperature Chamber to 20°C and stabilize the EUT temperature for one hour. Set transmitter ON for two minutes.
- 3) Measure the channel frequency of channel 4, 11 in MHz.
- 4) Turn the EUT OFF.
- 5) Repeat the above procedure from -20°C to 50°C with 10°C increment.

INTERTEK TESTING SERVICES

C. Test Result

Table 6(a)

**Hasbro Far East Limited
Hasbro/ 75071 (Chat Now single pack - Flip)**

Frequency Deviation with Temperature Variation

Channel : 4

Temperature (°C)	Assigned Frequency (MHz)	Measured Frequency (MHz)	Deviation (%)	*Frequency Tolerance with reference to its value at +20°C (ppm)
-20	462.6375	462.63640	-0.000238	-2.3
-10	462.6375	462.63645	-0.000227	-2.2
0	462.6375	462.63710	-0.000086	-0.8
10	462.6375	462.63725	-0.000054	-0.5
20	462.6375	462.63748	-0.000004	0.0
30	462.6375	462.63734	-0.000035	-0.3
40	462.6375	462.63742	-0.000017	-0.1
50	462.6375	462.63785	0.000076	0.8

*Remark: This column is presentable for Industry Canada Certification only.

Test Engineer: Kenneth C. C. Lam

Date of Test: March 25-April 14, 2005

INTERTEK TESTING SERVICES

C. Test Result

Table 6(b)

**Hasbro Far East Limited
Hasbro/ 75071 (Chat Now single pack - Flip)**

Frequency Deviation with Temperature Variation

Channel : 11

Temperature (°C)	Assigned Frequency (MHz)	Measured Frequency (MHz)	Deviation (%)	*Frequency Tolerance with reference to its value at +20°C (ppm)
-20	467.6375	467.63640	-0.000235	-2.2
-10	467.6375	467.63645	-0.000225	-2.1
0	467.6375	467.63706	-0.000094	-0.8
10	467.6375	467.63729	-0.000045	-0.3
20	467.6375	467.63743	-0.000015	0.0
30	467.6375	467.63733	-0.000036	-0.2
40	467.6375	467.63742	-0.000017	0.0
50	467.6375	467.63790	0.000086	1.0

*Remark: This column is presentable for Industry Canada Certification only.

Test Engineer: Kenneth C. C. Lam

Date of Test: March 25-April 14, 2005

INTERTEK TESTING SERVICES


7.3 Frequency Stability - Voltage (Section 2.995)

A. Test Equipment

Equipment	Brand Name	Model No.
Regulated Power Supply	PAD	30-35L
20 dB RF Attenuator	Bird	8304-200-N
Voltage meter	Fluke	87
Frequency Counter	Phillips	PM6668

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

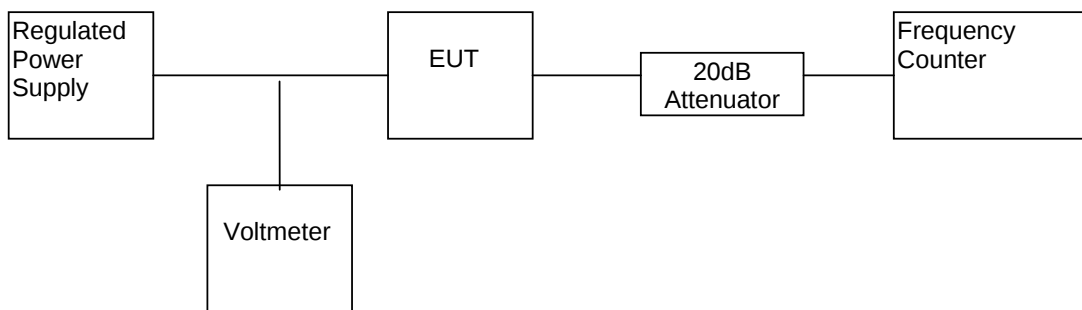

- 2) Vary the level of regulated power supply to the manufacturer specified battery end point of the EUT.
- 3) Measure the channel frequency of channel 4 and 11 in MHz.

INTERTEK TESTING SERVICES

C. Test Result

Table 7

**Hasbro Far East Limited
Hasbro/ 75071 (Chat Now single pack - Flip)**

Frequency Deviation with Voltage Variation

The manufacturer specified battery end point 3.51V

Channel	Frequency (MHz)	Measured Frequency (MHz)	Tolerance (%)
4	462.63750	462.63733	-0.000037
11	467.63750	467.63733	-0.000036

INTERTEK TESTING SERVICES

EXHIBIT 8

DIGITAL DATA TRANSMISSION

INTERTEK TESTING SERVICES


8.0 Digital Data Transmission (Section 95.193(b)(2))

A. Test Equipment


Equipment	Brand Name	Model No.
Oscilloscope	Tektronix	TDS 3012
20 dB RF Attenuator	Bird	8304-200-N
Spectrum Analyzer	HP	8951EM

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration for length of digital data measurement:



- 2) The probe interface is connected to the digital data input of EUT's modulator. The EUT is keyed into maximum 120 characteristics.
- 3) The length of digital data is measured with the oscilloscope.
- 4) Set-up the test equipment in the following configuration for period of digital data transmission measurement:



- 5) The digital data transmission of EUT is continuously initiated within 50 seconds.
- 6) The period of digital data transmission is measured with the spectrum analyzer set at 50 seconds swept time and 10dB/div.

C. Test Result

The length of digital data is measured to be 976ms and the digital data transmission cannot be repeated within 30 seconds & only be sent manually.

For the electronic filing, the digital data transmission plot is saved with filename: ddt.pdf

Test Engineer: Kenneth C. C. Lam

Date of Test: March 25-April 14, 2005

INTERTEK TESTING SERVICES

EXHIBIT 9

TECHNICAL SPECIFICATIONS

INTERTEK TESTING SERVICES

9.0 Technical Specifications

9.1 Block Diagram

For electronic filing, the block diagram of the transceiver is saved with filename: block.pdf

Figure 9.1 Block Diagram

9.2 Schematic Diagram

For electronic filing, the schematic diagram of the transceiver is saved with filename: circuit.pdf

Figure 9.2 Schematic Diagram

INTERTEK TESTING SERVICES

EXHIBIT 10

PRODUCT LABELLING

10.0 **Product Labelling**

INTERTEK TESTING SERVICES

10.1 Label Artwork & Location

Figure 10.1 Label Artwork & Location

An engineering drawing of the label which will be permanently affixed to the unit.
For electronic filing, the label artwork & location are saved with filename: label.pdf

INTERTEK TESTING SERVICES

EXHIBIT 11

PHOTOGRAPHS

INTERTEK TESTING SERVICES

11.0 Equipment Photographs

For electronic filing, photographs of the tested EUT are saved with filename: external photos.doc and internal photos.doc

INTERTEK TESTING SERVICES

EXHIBIT 12

INSTRUCTION MANUAL

INTERTEK TESTING SERVICES

12.0 Instruction Manual

This manual will be provided to the end-user with each unit sold/leased in the United States.

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf

INTERTEK TESTING SERVICES

EXHIBIT 13

TUNE UP PROCEDURE

INTERTEK TESTING SERVICES

13.0 Tune Up Procedure

For electronic filing, a preliminary copy of the Tune Up Procedure is saved with filename: tuneup.pdf

INTERTEK TESTING SERVICES

EXHIBIT 14

PART LIST

14.0 Part List

For electronic filing, a preliminary copy of the Part List is saved with filename: partlist.pdf

EXHIBIT 15
INPUT CURRENT

15.0 Input Current

The input current to final r.f. stage at 6VDC is 0.11A.

INTERTEK TESTING SERVICES

EXHIBIT 16

RF EXPOSURE INFO

16.0 RF Exposure Info

The RF Safety Information is shown on P.1 of User Manual.

INTERTEK TESTING SERVICES

EXHIBIT 17

CONFIDENTIALITY REQUEST

INTERTEK TESTING SERVICES

17.0 Confidentiality Request

For electronic filing, a confidentiality request is saved with filename: request.pdf