TIMEFLYS®

Marathon TX Marathon 350 RX

VIDEO BABY MONITOR

Night mode *

Choose Night Mode via Menu

Day mode

Choose Day Mode via Menu

* Night and Day modes of MC Devices are patent pending. Under Night Mode there is no alarm function for range. This mode is recommended to use when the Parent Unit and the Baby Unit are placed in fixed positions such as the parent's and baby's room.

User Manual

FEATURES

- Two way to talk to baby
- Infrared night vision
- Lullabies to provide comfort
- One parent unit can monitor up to 4 baby units simultaneously.
- Pan & Tilt Rotation
  Horizontal 330 Degree;
  Vertical 120 Degree
- Temperature monitoring
- Vibration

Inside the Box



Baby Unit



Parent Unit



2 USB Cables



1 USB Adapter

How to Use Baby Unit



Power Button :
When it is off, press and hold to pair with parent unit ; when it is on, press the button to use page function.

Pairing Long press when power off

On & Off ⏻
Press and hold for 2 seconds to turn the power on / off

Night light

Technique Data:

Frequency	2.4GHz
Number of channels	19
Modulation	FHSS
Screen	3.5" TFT LCD
AC adaptor	USB, 5V, 1000mA
Baby unit power	19dBm
Sensitivity of Parent unit	-83dBm
Parent unit battery	Lion 1600mAh 3.7V
Battery life	7-9h
Battery charging time	4-8h
Temperature range	10-40℃ (50-104° F)
Storage Temperature	-10-70℃ (14-158° F)
Lullaby	8

Parent Unit

Power Indicator:

- Red/Green Flash: Out of Range
- Red Flash: Low Battery
- Green Flash: Charging

Sound Level Indicator :
The Louder the sound is , the more Lights light on

Screen display on/off:
Quick press to turn on/ off screen display.Long press 2 to 3 seconds to turn on/off night light.

Pull it downwards to let the bracket slide out.



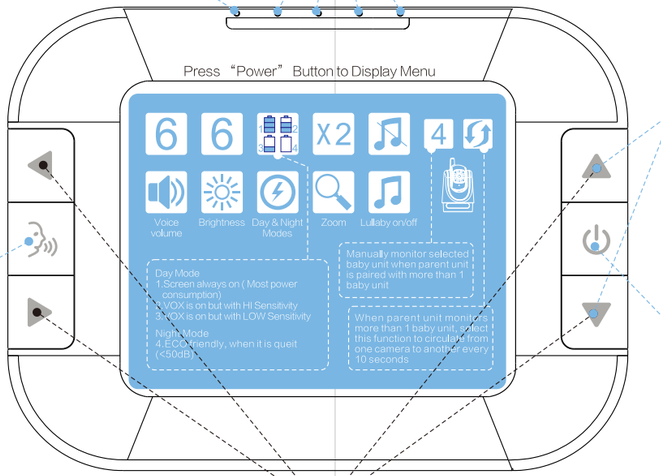

Push to Talk
Press and hold the button to talk to baby

Hold the Screen display on/off button down, and tap the up arrow button to increase the volume of lullaby, or tap the down arrow button to decrease the volume of lullaby. (The lullaby will automatically turn off after 30 minutes continuous playing.)

Power/Menu :
Long press to turn on, Quick press to go into Menu

4 Arrow buttons to: 1) control the pan & tilt camera
2) select Functions after entering menu
"Left" and "Right" Arrows to select functions
"Up" and "Down" Arrows to change the settings of selected functions

Parent alarms

Vibration setup

2 ways to set up

Only vibration → Volume set to '0'

Vibration+Audio alarm → Hold the Screen display on/off button down, and tap ▶ right arrow for 5 seconds to turn on/off

Range alarm

Constant Beep···

PU exceeding range

Red/green lights flash

Low battery alarm

Low battery

Every 30s Beep···

Every 30 seconds audio alarm

Red flash

Temperature alarm

Every 30s beep···

<16℃(61℉) flash LO

>30℃(86℉) flash HI

On/Off temperature alarm

Hold the Screen display on/ off button down, and tap ◀ left arrow for 5 seconds to turn on/off (1 beep on, 2 beeps off)

How to Use Parent Unit

Parent Unit should be at least 2 meters (6 feet) away from Baby Unit to avoid whistling.

MC DEVICES CO., LTD.
www.mcdevices.com
Email: service@mcdevices.com

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.
If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-- Reorient or relocate the receiving antenna.
-- Increase the separation between the equipment and receiver.
-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-- Consult the dealer or an experienced radio/TV technician for help.
The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction. The distance between the parent unit and the human body is less than 20cm

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna. The distance between the baby unit and the baby should be more than 20cm.
FCC ID :RS5-MARATHONTX