



RADIO TEST REPORT

FCC ID : RSL-TQ7413R
Equipment : IEEE 802.11be tri-radio 2.4G/5G/6G Wireless AP
Brand Name : Allied Telesis
Model Name : AT-TQ7413[yyyyy]
(Refer to section 1.1.5 of test report for detail information.)
Applicant : Allied Telesis K.K.
2nd. TOC Bldg.7-21-11 Nishi-Gotanda, Shinagawa-ku
Tokyo 141-0031 Japan
Manufacturer : Allied Telesis K.K.
2nd. TOC Bldg.7-21-11 Nishi-Gotanda, Shinagawa-ku
Tokyo 141-0031 Japan
Standard : 47 CFR FCC Part 15.247

The product was received on Nov. 05, 2025, and testing was started from Nov. 07, 2025 and completed on Mar. 10, 2026. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	10
1.3 Testing Location Information	10
1.4 Measurement Uncertainty	11
2 Test Configuration of EUT	12
2.1 Test Channel Mode	12
2.2 The Worst Case Measurement Configuration	13
2.3 EUT Operation during Test	15
2.4 Accessories	15
2.5 Support Equipment.....	15
2.6 Test Setup Diagram	17
3 Transmitter Test Result	21
3.1 AC Power-line Conducted Emissions	21
3.2 DTS Bandwidth.....	23
3.3 Maximum Conducted Output Power	24
3.4 Power Spectral Density	27
3.5 Emissions in Non-restricted Frequency Bands	29
3.6 Emissions in Restricted Frequency Bands.....	30
4 Test Equipment and Calibration Data	35
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Results of Radiated Emission Co-location	
Appendix H. Test Photos	
Photographs of EUT v01	



History of this test report

TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A10_10 Ver1.3

Page Number : 3 of 37
Issued Date : Mar. 27, 2026
Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen

Report Producer: Muse Chan



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20), VHT20, ax (HEW20), be (EHT20)	2412-2462	1-11 [11]
2400-2483.5	n (HT40), VHT40, ax (HEW40), be (EHT40)	2422-2452	3-9 [7]

For Radio 1:

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11b, 802.11g, 802.11n HT20, VHT20, 802.11 ax HEW20, 802.11 be EHT20	20	2TX/2RX
	802.11n HT20-BF, VHT20-BF, 802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	2TX/2RX
	802.11n HT40, VHT40, 802.11 ax HEW40, 802.11 be EHT40	40	2TX/2RX
	802.11n HT40-BF, VHT40-BF, 802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	2TX/2RX

For Scanning Radio 4:

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11 b, 802.11 g, 802.11 n HT20, VHT20, 802.11 ax HEW20	20	1RX
	802.11 n HT40, VHT40, 802.11 ax HEW40	40	1RX

**Note:**

- ♦ 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- ♦ 11g, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ HEW20, HEW40 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	RF Port	Brand Name	Model Name	Ant. Type	Connector	Gain (dBi)	Modes of Operation
1	1	WNC	95XPAD15.GDY	PIFA	I-PEX	Note 1	WLAN 2.4GHz (Radio 1)
2	2	WNC	95XPAD15.GEA	PIFA	I-PEX		WLAN 5GHz (Radio 2)
3	1	WNC	95XPAD15.GEB	PIFA	I-PEX		WLAN 6GHz (Radio 3)
4	2	WNC	95XPAD15.GEC	PIFA	I-PEX		Bluetooth, Zigbee (Radio 5)
5	1	WNC	95XPAD15.GDZ	PIFA	I-PEX		WLAN 2.4GHz WLAN 5GHz WLAN 6GHz (Radio 4)
6	1	WNC	95XPAD15.GED	PIFA	I-PEX		

Note 1:

Note 1.

Ant.	Antenna Gain (dBi)								
	WLAN 2.4GHz (Radio 1)		WLAN 5GHz (Radio 2)						
			UNII 1	UNII 2A	UNII 2C	UNII 3			
1	4.18		5.06	4.95	4.78	4.39			
2	4.96		5.28	5.01	4.78	4.86			
Ant.	WLAN 6GHz (Radio 3)								
	UNII 5	UNII 6		UNII 7		UNII 8			
	3	4.94		4.82	4.82	4.08			
4	5.91		5.91	5.91	5.99				
Ant.	Bluetooth, Zigbee (Radio 5)								
5	4.51								
Ant.	Scanning radio (Radio 4)								
	WLAN 2.4GHz	WLAN 5GHz				WLAN 6GHz			
		UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 5	UNII 6	UNII 7	UNII 8
6	3.93	5.33	4.78	5.64	4.70	5.61	5.61	5.61	5.61

Note 2: The above information was declared by Manufacturer.

Note 3: States antenna 5GHz and 6GHz transmission will be restricted per country's regulation.

Note 4: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_m} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_m} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_m} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_m} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,2) = 10^{G3/20} ; NSS1(g1,2) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

Radio 1

$$2.4G \ G1 = 4.18 \text{ dBi} ; G2 = 4.96 \text{ dBi} ; DG = 7.59 \text{ dBi}$$

Radio 2

$$5G \text{ UNII-1 } G1 = 5.06 \text{ dBi} ; G2 = 5.28 \text{ dBi} ; DG = 8.18 \text{ dBi}$$

$$5G \text{ UNII-2A } G1 = 4.95 \text{ dBi} ; G2 = 5.01 \text{ dBi} ; DG = 7.99 \text{ dBi}$$

$$5G \text{ UNII-2C } G1 = 4.78 \text{ dBi} ; G2 = 4.78 \text{ dBi} ; DG = 7.79 \text{ dBi}$$

$$5G \text{ UNII-3 } G1 = 4.39 \text{ dBi} ; G2 = 4.86 \text{ dBi} ; DG = 7.64 \text{ dBi}$$

Radio 3

$$6G \text{ UNII-5 } G1 = 4.94 \text{ dBi} ; G2 = 5.91 \text{ dBi} ; DG = 8.45 \text{ dBi}$$

$$6G \text{ UNII-6 } G1 = 4.82 \text{ dBi} ; G2 = 5.91 \text{ dBi} ; DG = 8.39 \text{ dBi}$$

$$6G \text{ UNII-7 } G1 = 4.82 \text{ dBi} ; G2 = 5.91 \text{ dBi} ; DG = 8.39 \text{ dBi}$$

$$6G \text{ UNII-8 } G1 = 4.08 \text{ dBi} ; G2 = 5.99 \text{ dBi} ; DG = 8.1 \text{ dBi}$$

Note 5: **For Radio 1:**

2.4GHz IEEE 802.11b/g/n/VHT/ax/be mode (2TX/2RX)

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Radio 2:

5GHz IEEE 802.11a/n/ac/ax/be mode (2TX/2RX)

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Radio 3:

6GHz IEEE 802.11ax/be mode (2TX/2RX)



Port 1 and Port 2 can be used as transmitting/receiving antenna.
Port 1 and Port 2 could transmit/receive simultaneously.

For Radio 4 (Scanning radio):**2.4GHz IEEE 802.11b/g/n/VHT/ax mode (1RX)****5GHz IEEE 802.11a/n/ac/ax mode (1RX)****6GHz IEEE 802.11ax mode (1RX)**

Only Port 1 can be used as receiving antenna.

For Radio 5:**Bluetooth and Zigbee mode (1TX/1RX)**

Only Port 1 can be used as transmitting/receiving antenna.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11b_Nss 1,(1D)	0.76	1.19	413.75u	3k
802.11g_Nss 1,(6D)	0.991	0.04	1.976m	10Hz (DC>=0.98)
802.11be EHT20_Nss 1,(M0)	0.967	0.15	5.453m	200
802.11be EHT40_Nss 1,(M0)	0.977	0.1	5.452m	200

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From Power Adapter / PoE			
Beamforming Function	☒	With beamforming	☐	Without beamforming
	The product has beamforming function for Radio 1 (n/VHT/ax/be in 2.4GHz), Radio 2 (n/ac/ax/be in 5GHz) and Radio 3 (ax/be in 6GHz).			
Function	☒	Point-to-multipoint	☐	Point-to-point
Support RU	☒	Full RU	☐	Partial RU
Test Software Version	For Radiated Emission Co-location: DOS [ver 6.1.7601] For others: QSPR Ver 6.00.00225.1			

Note: The above information was declared by manufacturer.

1.1.5 Table for Multiple Listing

Model Name	Description
AT-TQ7413[yyyyy] (where [y] can be A–Z, a–z, “-”, “/”, or blank. The characters in brackets are optional and used for marketing differentiation only, with no impact on safety-related construction or critical components.)	All the models are identical, the difference model served as marketing strategy.

Note 1: From the above models, model: AT-TQ7413-R was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.

**1.1.6 Table for Radio Function**

Radio \ Function	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	Bluetooth	Zigbee
1	V	-	-	-	-
2	-	V	-	-	-
3	-	-	V	-	-
4 (Scanning radio)	V	V	V	-	-
5	-	-	-	V	V

Note1: For WLAN 2.4GHz: The Radio 1 and Radio 4 (Scanning radio) can't operate at the same frequency simultaneously.

For WLAN 5GHz: The Radio2 and Radio 4 (Scanning radio) can't operate at the same frequency simultaneously.

For WLAN 6GHz: The Radio 3 and Radio 4 (Scanning radio) can't operate at the same frequency simultaneously.

Note 2: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.247
- ♦ ANSI C63.10-2020

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH03-CB	Owen Hsu	19.6~21.1 / 63~67	Nov. 12, 2025~ Dec. 17, 2025
Radiated (below 1GHz Mode 1~4)	10CH01-CB	Allen Chung	21~22 / 56~57	Jan. 15, 2026
Radiated (below 1GHz Mode 5~6)			23~24 / 58~59	Mar. 04, 2026
Radiated (above 1GHz)	03CH01-CB	Lex Lee	22.1-23.1 / 60-62	Nov. 07, 2025~ Dec. 13, 2025
	03CH05-CB		21.9-22.4 / 60-62	
Radiated (co-location emission)	03CH04-CB	Stim Sung	22.7-23.8 / 58-60	Mar. 10, 2026
AC Conduction (Mode 1~4)	CO02-CB	Allen Chung	23~24 / 57~58	Jan. 20, 2026
AC Conduction (Mode 5~6)			23~24 / 55~56	Mar. 03, 2026



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.9 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%
Bandwidth Measurement	1.0 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11b_Nss1,(1Mbps)_2TX
2412MHz
2437MHz
2462MHz
802.11g_Nss1,(6Mbps)_2TX
2412MHz
2417MHz
2437MHz
2452MHz
2462MHz
802.11be EHT20_Nss1,(MCS0)_2TX
2412MHz
2417MHz
2437MHz
2452MHz
2462MHz
802.11be EHT40_Nss1,(MCS0)_2TX
2422MHz
2427MHz
2437MHz
2452MHz
802.11be EHT20-BF_Nss1,(MCS0)_2TX
2412MHz
2417MHz
2437MHz
2452MHz
2462MHz
802.11be EHT40-BF_Nss1,(MCS0)_2TX
2422MHz
2427MHz
2437MHz
2452MHz

Note:

- ♦ EHT20 / EHT40 covers HT20 / HT40 / VHT20 / VHT40 / HEW20 / HEW40 due to similar modulation. The power setting for HT20 / HT40 / VHT20 / VHT40 / HEW20 / HEW40 is the same or lower than EHT20 / EHT40.
- ♦ The EUT supports beamforming and CDD modes, and the CDD mode is the worst case. Therefore, all test items are evaluated in the report. The beamforming mode only evaluates the output power.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	EUT_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 2.4GHz+R5: Bluetooth+Adapter
2	EUT_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 2.4GHz+R5: Bluetooth+PoE
Mode 2 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3~4 will follow this same test mode.	
3	EUT_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 2.4GHz+R5: Zigbee(TX)+PoE
4	EUT_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 2.4GHz+R5: Zigbee(RX)+PoE
Mode 2 has been evaluated to be the worst case among Mode 1~4, thus measurement for Mode 5~6 will follow this same test mode.	
5	EUT_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 5GHz+R5: Bluetooth+PoE
6	EUT_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 6GHz+R5: Bluetooth+PoE
For operating mode 2 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains
1	EUT_R1

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
	After evaluating, and the worst case was found at Z axis, so it was selected to perform test and its test result was written in the report.
1	EUT in Z axis_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 2.4GHz+R5: Bluetooth +Adapter
2	EUT in Z axis_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 2.4GHz+R5: Bluetooth +PoE
Mode 2 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3~4 will follow this same test mode.	
3	EUT in Z axis_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 2.4GHz+R5: Zigbee(TX) +PoE
4	EUT in Z axis_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 2.4GHz+R5: Zigbee(RX) +PoE
Mode 2 has been evaluated to be the worst case among Mode 1~4, thus measurement for Mode 5~6 will follow this same test mode.	
5	EUT in Z axis_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 5GHz+R5: Bluetooth +PoE
6	EUT in Z axis_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 6GHz+R5: Bluetooth +PoE
For operating mode 2 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
	After evaluating, and the worst case was found at Y axis, so it was selected to perform test and its test result was written in the report.
1	EUT in Y axis_R1

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
	After evaluating, and the worst case was found at Z axis, so it was selected to perform test and its test result was written in the report.
1	EUT in Z axis_R1: 2.4GHz+R2: 5GHz
Refer to Appendix G for Radiated Emission Co-location.	



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R5: Bluetooth
2	R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R5: Zigbee
Refer to Sporton Test Report No.: FA5N0729 for Co-location RF Exposure Evaluation.	

Note 1: R means Radio.

Note 2: The PoE is used for testing purpose; it will not be sold with the EUT

Power	Brand Name	Model Name
PoE	PHIHONG	POE60U-BTA

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link Mode:

During the test, the EUT operation to normal function.

2.4 Accessories

Bracket*1

2.5 Support Equipment

For AC Conduction and Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Flash disk2.0	Tcell	Push	N/A
B	PoE	PHIHONG	POE60U-BTA	N/A
C	PoE 2 PC	ASUS	S300TA	TX2-RTL8821CE
D	PoE 1 PC	ASUS	S300TA	TX2-RTL8821CE
E	2.4G NB	Lenovo	X260	N/A
F	5G NB	Lenovo	X260	N/A
G	Smart phone	Redmi	M1810F6LH	2AFZZ-RMSF6LG
H	6G Device	Allied Telesis	AT-TQ7413-R	RSL-TQ7413R
I	6G Device NB	Lenovo	X260	N/A


**For Radiated (above 1GHz other tests) and RF Conducted:**


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	LENOVO	L440	N/A
B	PoE	PHIHONG	POE60U-BTA	N/A

For Radiated (above 1GHz co-location):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PC	DELL	T3400	N/A
B	PoE	PHIHONG	POE60U-BTA	N/A
C	PC	DELL	T3400	N/A
D	2.4G NB	DELL	E4300	N/A
E	5G NB	DELL	E4300	N/A
F	Flash disk	Silicon Power	I-Series	N/A

2.6 Test Setup Diagram

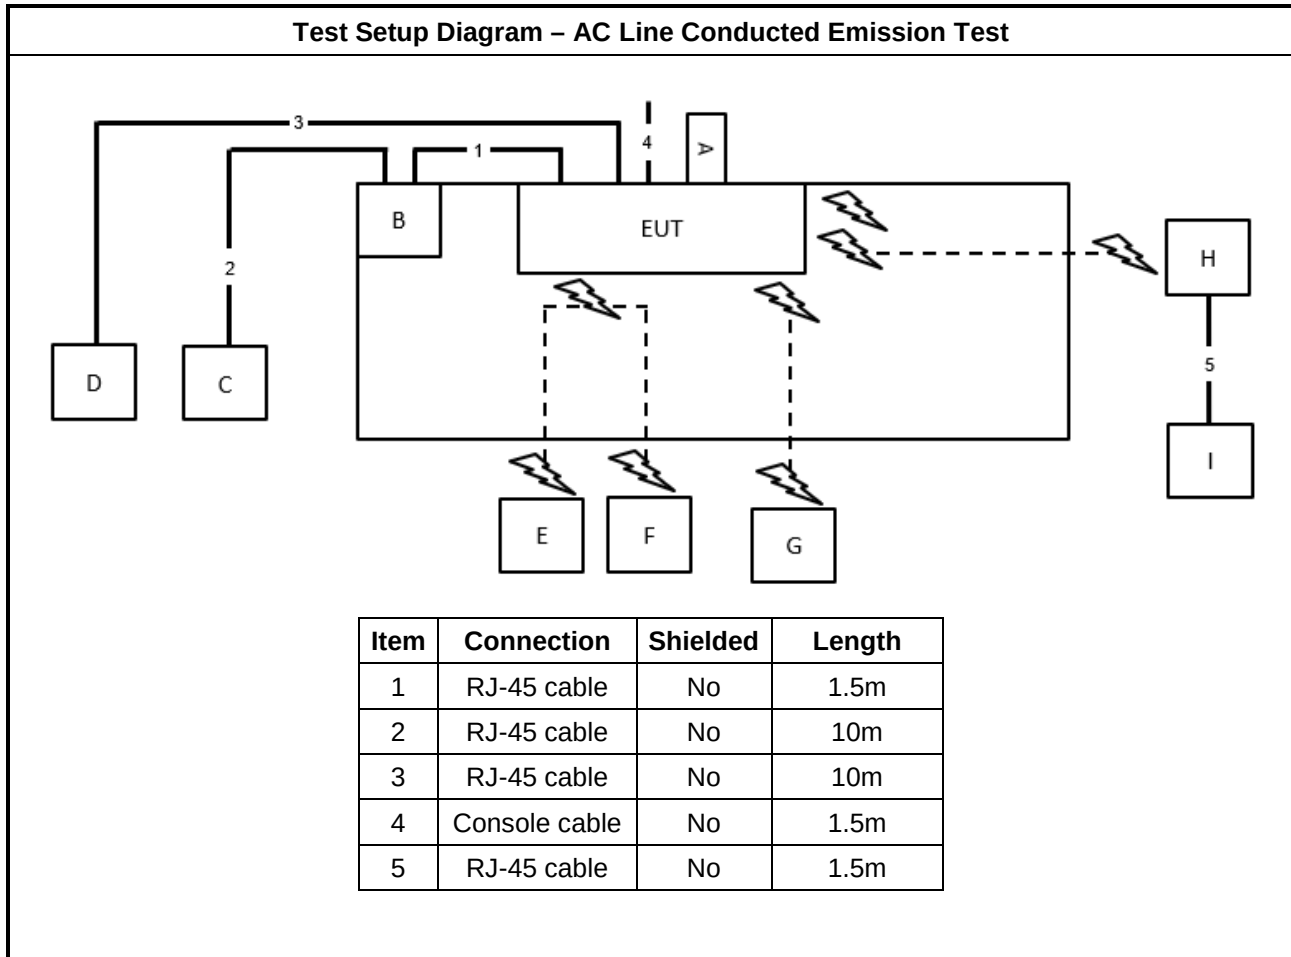


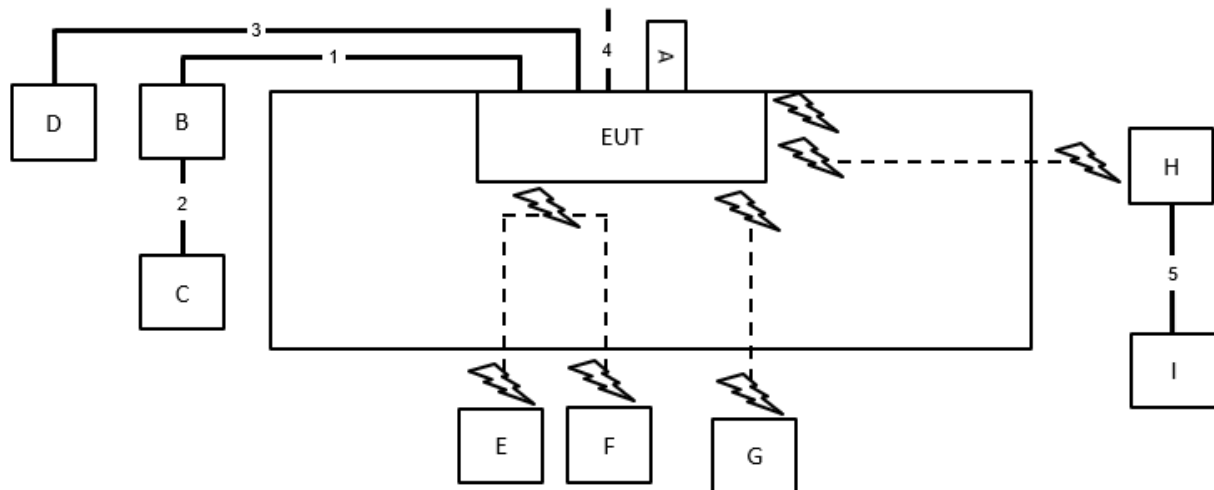Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	RJ-45 cable	No	10m
4	Console cable	No	1.5m
5	RJ-45 cable	No	1.5m

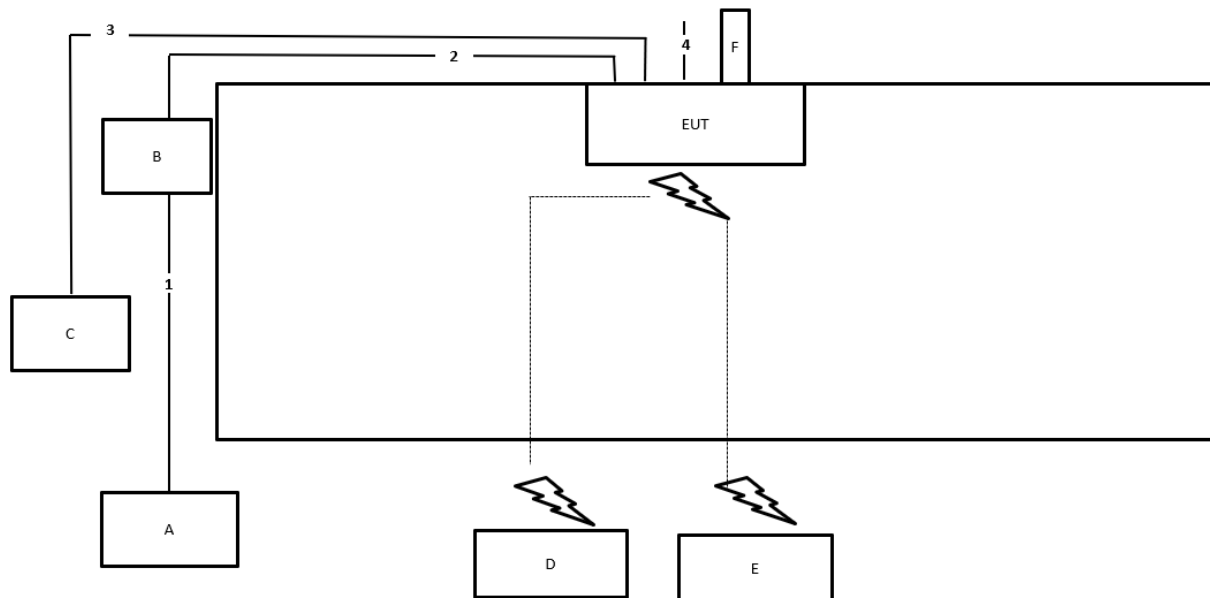Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	Console cable	Yes	1.5m

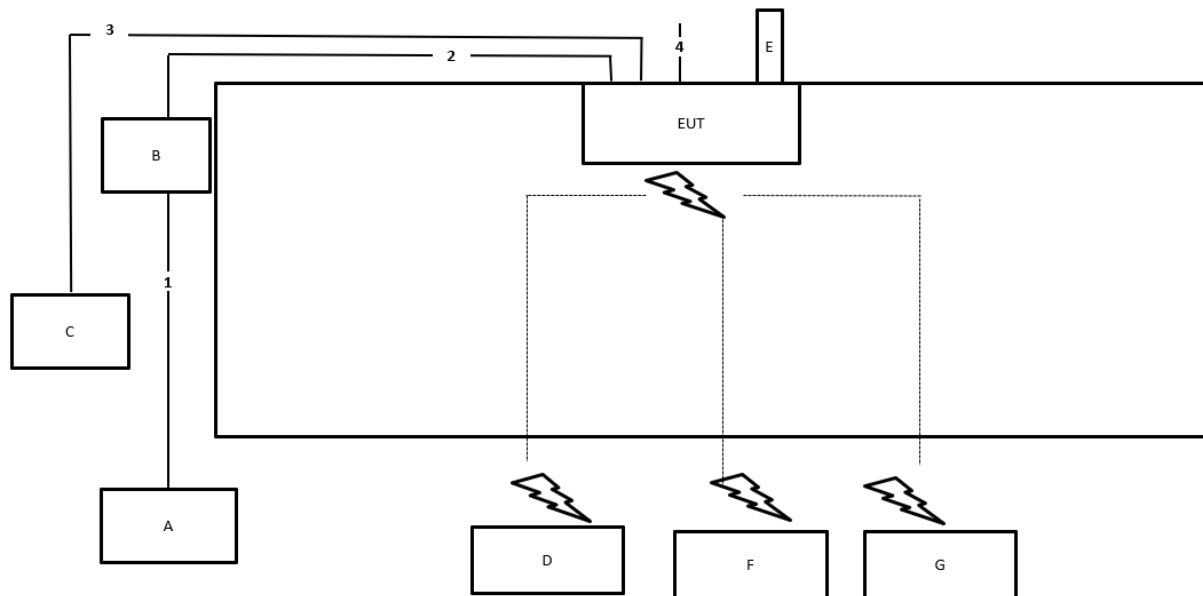Test Setup Diagram - Radiated Emission Co-location


Item	Connection	Shielded	Length
1	RJ-45 cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	Console cable	Yes	1.5m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2020, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

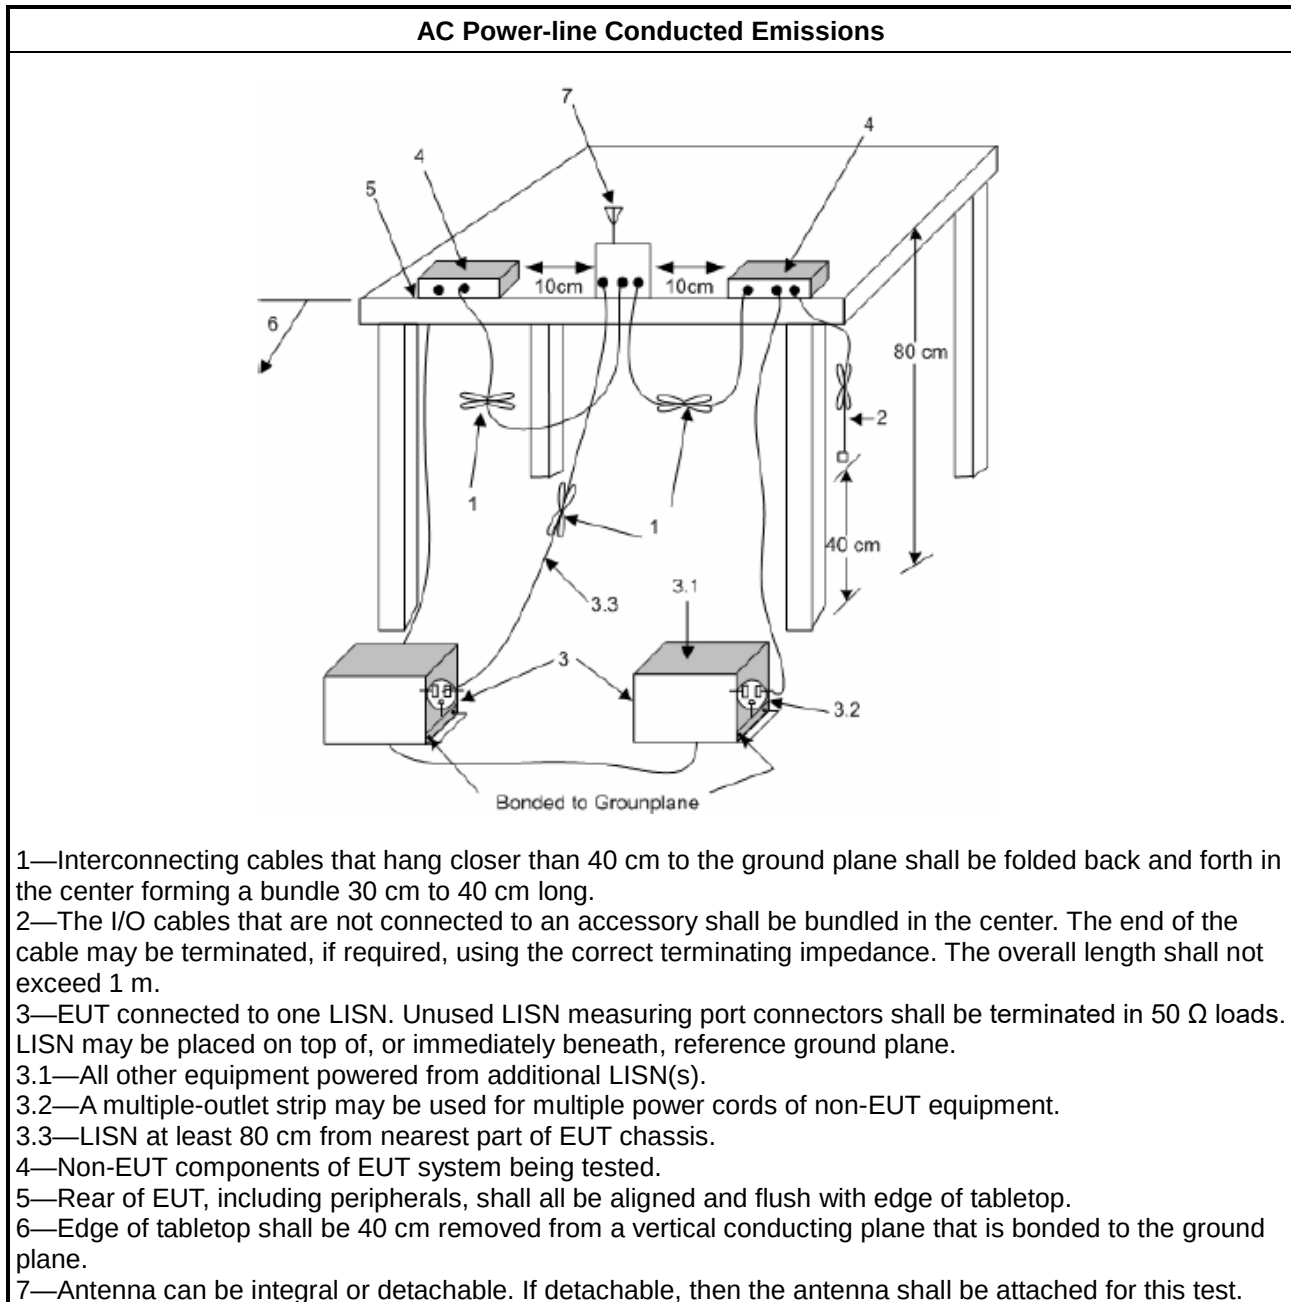

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
For the emission bandwidth shall be measured using one of the options below:
☒ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
☐ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
☐ Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

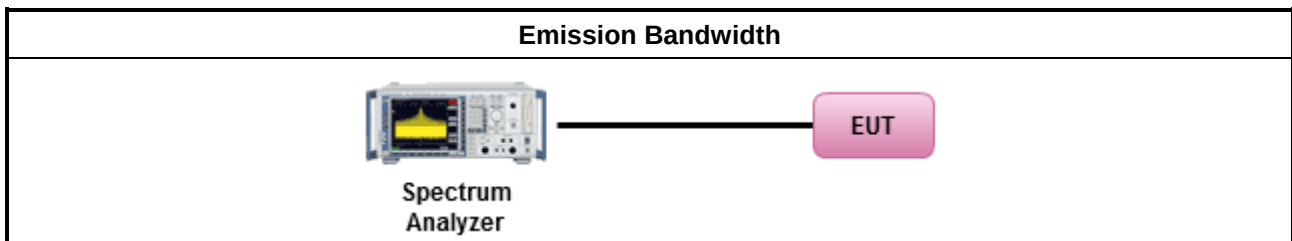

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
☐	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
Maximum Conducted Output Power	
[duty cycle ≥ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
☐	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
☒	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

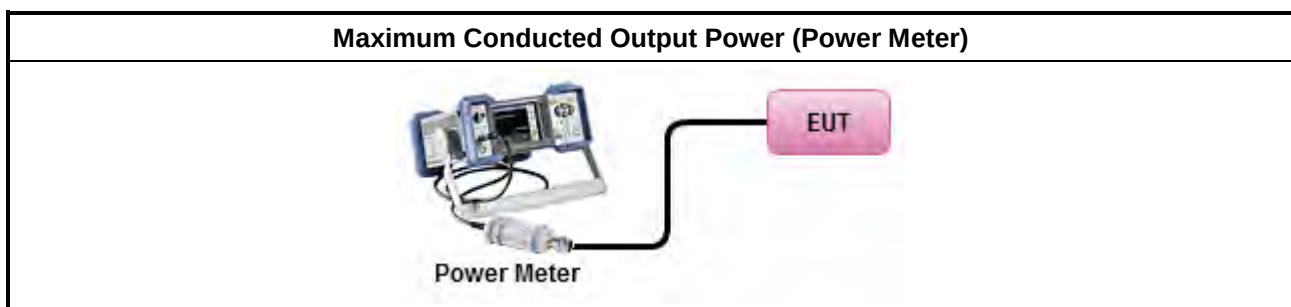



3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit	
▪	Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪	Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
☒	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD.
▪	For conducted measurement.
▪	If The EUT supports multiple transmit chains using options given below:
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

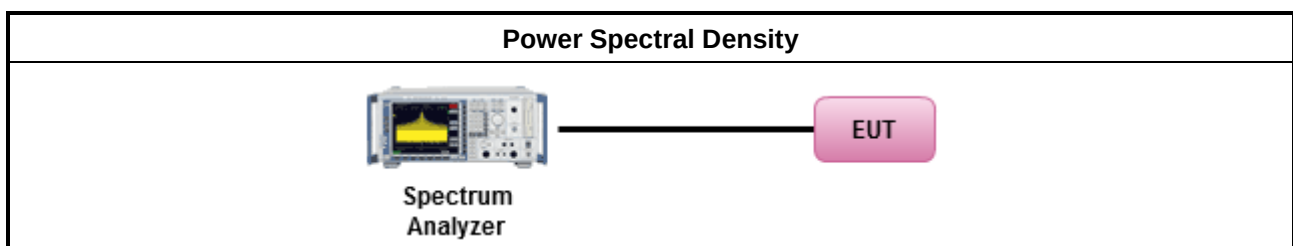



3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

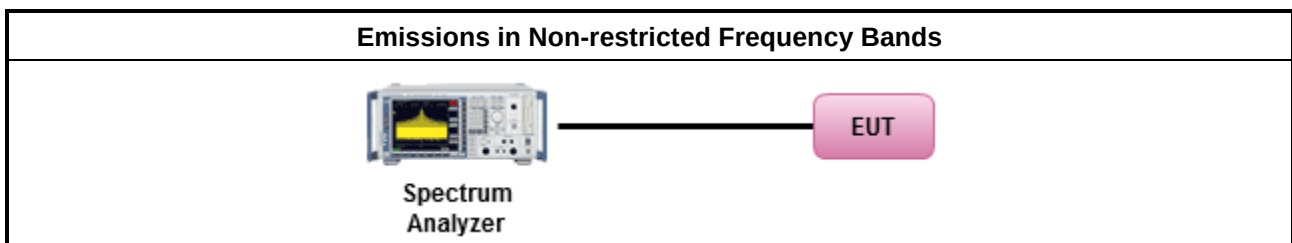

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.






3.6.3 Test Procedures

Test Method	
The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
For the transmitter band-edge emissions shall be measured using following options below:	
	Refer as FCC KDB 558074 clause 8.7 & C63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

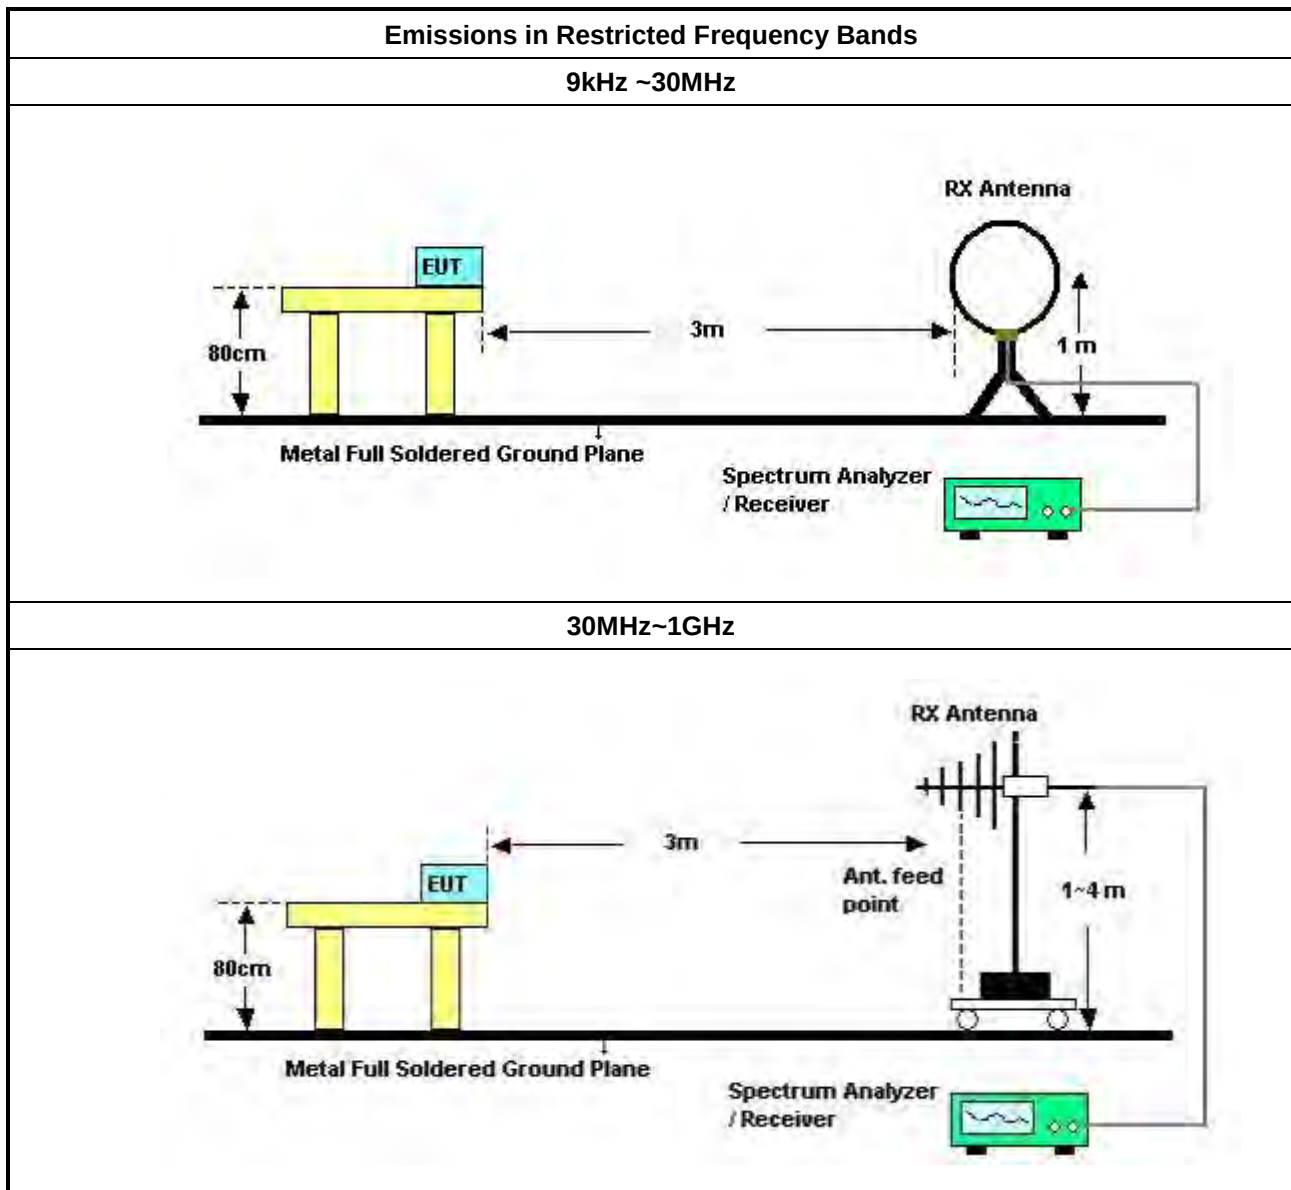

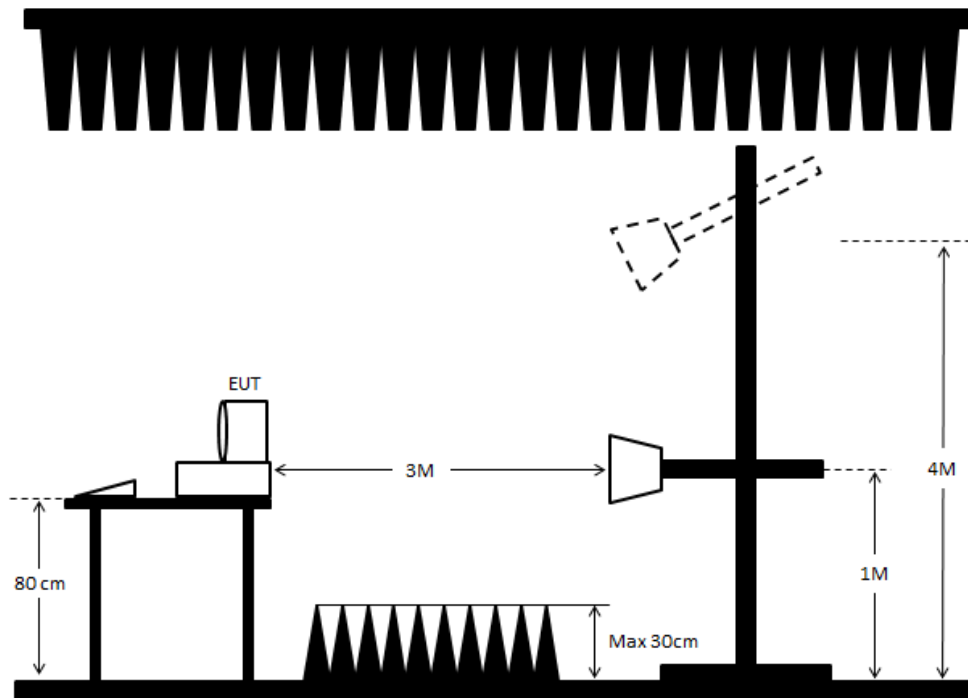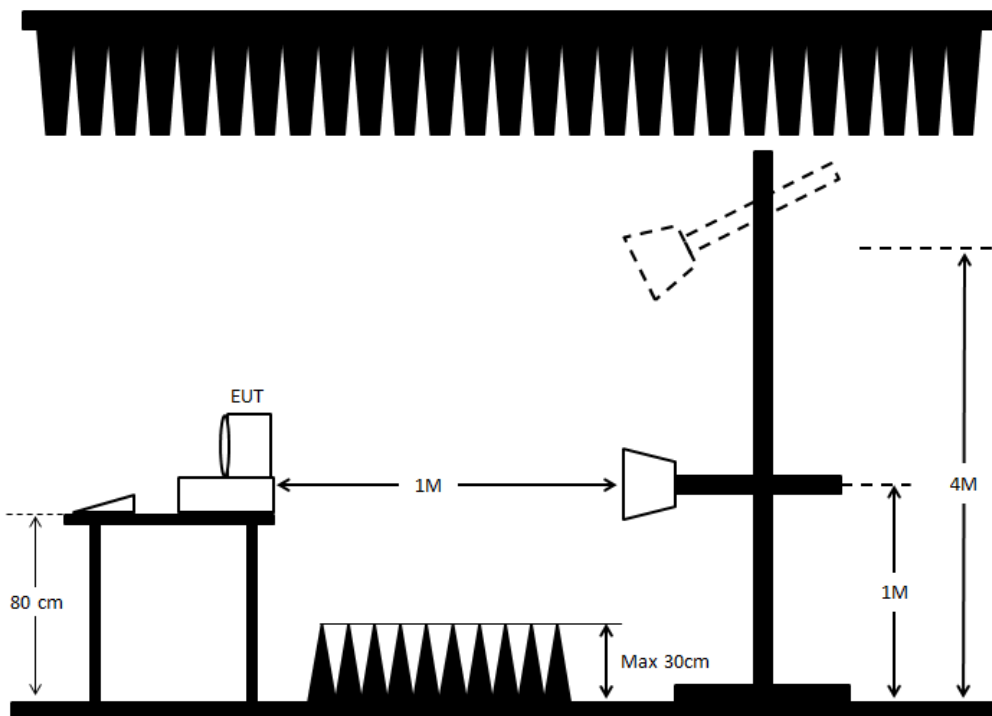Above 1GHz
Co-location
1,000~18,000 MHz

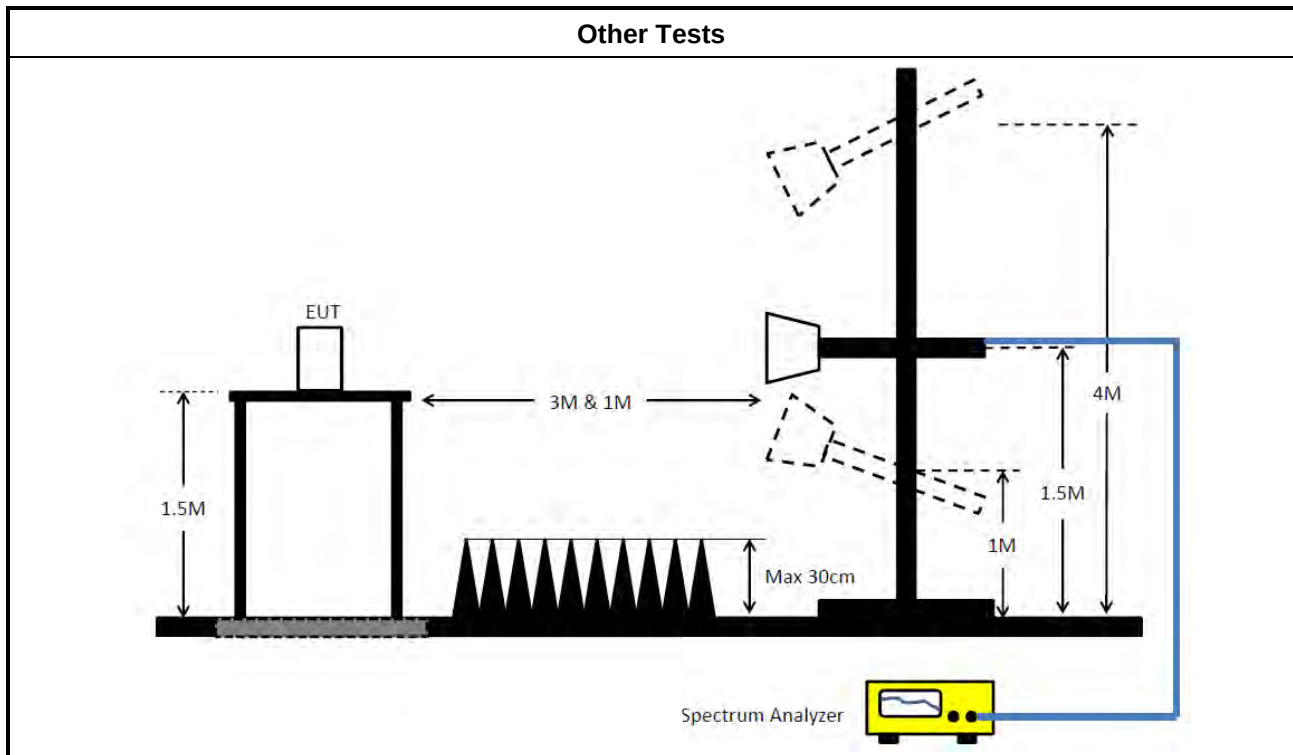18,000~40,000 MHz




3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Apr. 29, 2025	Apr. 28, 2026	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Feb. 06, 2025	Feb. 05, 2026	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Jan. 29, 2026	Jan. 28, 2027	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	May 14, 2025	May 13, 2026	Conduction (CO02-CB)
COND Cable	Woken	Cable	CO02	0.15MHz ~ 30MHz	Sep.14, 2025	Sep.13, 2026	Conduction (CO02-CB)
Pulse Limiter	Schwarzbeck	VTSD 9561F-N	00378	9kHz ~ 30MHz	Sep.14, 2025	Sep.13, 2026	Conduction (CO02-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO02-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 20, 2025	Oct. 19, 2026	Radiation (10CH01-CB)
10m Semi Anechoic Chamber NSA	TDK	SAC-10M	10CH01-CB	30MHz~1GHz 10m,3m	Jan. 14, 2026	Jan. 13, 2027	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10783	9kHz ~ 1.3GHz	Mar. 08, 2025	Mar. 07, 2026	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10784	9kHz ~ 1.3GHz	Mar. 08, 2025	Mar. 07, 2026	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-01	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-02	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
EMI Test Receiver	Rohde& Schwarz	ESR7	103076	9 kHz ~ 7GHz	Aug. 27, 2025	Aug. 26, 2026	Radiation (10CH01-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Sep. 03, 2025	Sep. 02, 2026	Radiation (10CH01-CB)
High Cable	TITAN	T318E	High cable01	30MHz ~ 18GHz	Feb. 04, 2025	Feb. 03, 2026	Radiation (10CH01-CB)
Bilog Ant & 6dB Attenuator	SCHWARZBECK & EMCI	VULB 9168 & N-6-06	1469 & AT-N06021	30MHz ~ 1GHz	Jan. 08, 2026	Jan. 07, 2027	Radiation (10CH01-CB)
Amplifier	EM	EM101	060703	10MHz ~ 1GHz	Oct. 15, 2025	Oct. 14, 2026	Radiation (10CH01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (10CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH01-CB	1GHz ~18GHz 3m	May 03, 2025	May 02, 2026	Radiation (03CH01-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1370	1GHz~18GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 16, 2025	May 15, 2026	Radiation (03CH01-CB)
Pre-Amplifier	SGH	SGH1840	20230109-3	18~40GHz	Feb. 21, 2025	Feb. 20, 2026	Radiation (03CH01-CB)
Signal Analyzer	R&S	FSV3044	101321	9kHz ~ 44GHz	Jul. 01, 2025	Jun. 30, 2026	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16	1 GHz ~ 18 GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16+17	1 GHz ~ 18 GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH01-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Apr. 30, 2025	Apr. 29, 2026	Radiation (03CH01-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.27	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Radiation (03CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH05-CB	1GHz ~18GHz 3m	Sep. 27, 2025	Sep. 26, 2026	Radiation (03CH05-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120 D-1291	1GHz~18GHz	Jun. 06, 2025	Jun. 05, 2026	Radiation (03CH05-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz ~ 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH05-CB)
Pre-Amplifier	SGH	SGH1840	20230109-3	18~40GHz	Feb. 21, 2025	Feb. 20, 2026	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Apr. 21, 2025	Apr. 20, 2026	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-28	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-04+28	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH05-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Apr. 30, 2025	Apr. 29, 2026	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.27	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH04-CB	1GHz ~18GHz 3m	Feb. 13, 2026	Feb. 12, 2027	Radiation (03CH04-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120D-01816	1GHz~18GHz	Dec. 31, 2025	Dec. 30, 2026	Radiation (03CH04-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH5265	20211115-1	1~ 26.5GHz	Jan. 13, 2026	Jan. 12, 2027	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH04-CB)
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Mar. 24, 2025	Mar. 23, 2026	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Apr. 25, 2025	Apr. 24, 2026	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+67	1GHz - 18GHz	Apr. 25, 2025	Apr. 24, 2026	Radiation (03CH04-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Apr. 30, 2025	Apr. 29, 2026	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.10	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH04-CB)
Spectrum analyzer	R&S	FSV40	101028	9kHz~40GHz	Jan. 02, 2025	Jan. 01, 2026	Conducted (TH03-CB)
Power Sensor	Anritsu	MA2411B	1726195	300MHz~40GHz	Sep. 12, 2025	Sep. 11, 2026	Conducted (TH03-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 12, 2025	Sep. 11, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-11	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-12	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-13	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-14	1 GHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-15	1 GHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
Switch	SPTCB	SP-SWI	SWI-03	1~18GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH03-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.27	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Conducted (TH03-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 2	Pass	AV	568.5k	41.65	46.00	-4.35	Line

Mode 2

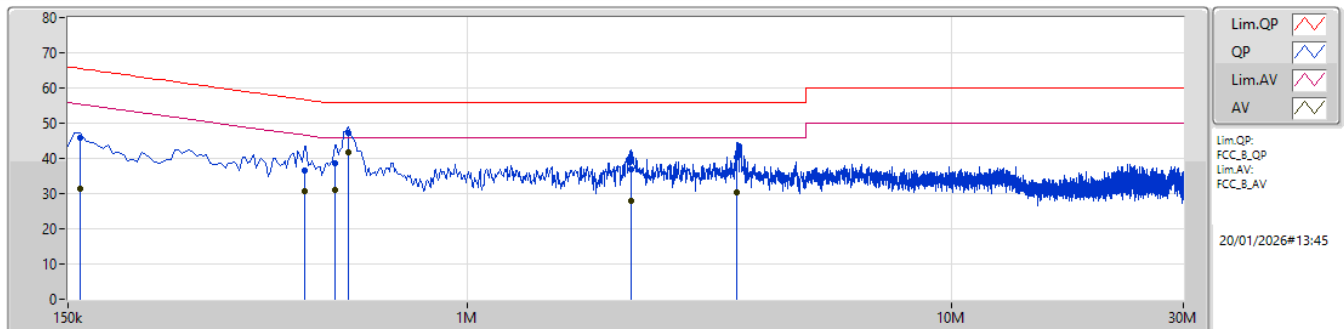

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	159k	45.82	65.52	-19.70	10.39	Line	-	35.43	0.06	0.26	10.07						
AV	159k	31.53	55.52	-23.99	10.39	Line	-	21.14	0.06	0.26	10.07						
QP	460.5k	36.43	56.69	-20.26	10.43	Line	-	26.00	0.06	0.27	10.10						
AV	460.5k	30.81	46.69	-15.88	10.43	Line	-	20.38	0.06	0.27	10.10						
QP	532.5k	38.56	56.00	-17.44	10.43	Line	-	28.13	0.06	0.27	10.10						
AV	532.5k	30.95	46.00	-15.05	10.43	Line	-	20.52	0.06	0.27	10.10						
QP	568.5k	47.18	56.00	-8.82	10.43	Line	-	36.75	0.06	0.26	10.11						
AV	568.5k	41.65	46.00	-4.35	10.43	Line	"Worst"	31.22	0.06	0.26	10.11						
QP	2.175M	37.06	56.00	-18.94	10.34	Line	-	26.72	0.09	0.26	9.99						
AV	2.175M	27.92	46.00	-18.08	10.34	Line	-	17.58	0.09	0.26	9.99						
QP	3.597M	40.24	56.00	-15.76	10.38	Line	-	29.86	0.12	0.28	9.98						
AV	3.597M	30.50	46.00	-15.50	10.38	Line	-	20.12	0.12	0.28	9.98						

Mode 2

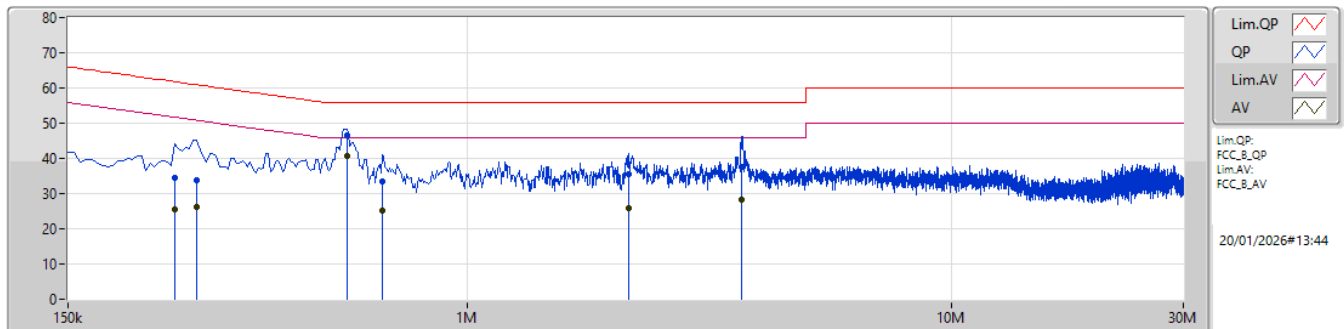

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	249k	34.37	61.79	-27.42	10.31	Neutral	-	24.06	0.07	0.23	10.01						
AV	249k	25.63	51.79	-26.16	10.31	Neutral	-	15.32	0.07	0.23	10.01						
QP	276k	33.96	60.93	-26.97	10.34	Neutral	-	23.62	0.07	0.24	10.03						
AV	276k	26.19	50.93	-24.74	10.34	Neutral	-	15.85	0.07	0.24	10.03						
QP	564k	46.40	56.00	-9.60	10.44	Neutral	-	35.96	0.07	0.27	10.10						
AV	564k	40.85	46.00	-5.15	10.44	Neutral	"Worst"	30.41	0.07	0.27	10.10						
QP	667.5k	33.32	56.00	-22.68	10.45	Neutral	-	22.87	0.08	0.26	10.11						
AV	667.5k	25.30	46.00	-20.70	10.45	Neutral	-	14.85	0.08	0.26	10.11						
QP	2.148M	35.38	56.00	-20.62	10.35	Neutral	-	25.03	0.10	0.26	9.99						
AV	2.148M	25.96	46.00	-20.04	10.35	Neutral	-	15.61	0.10	0.26	9.99						
QP	3.683M	37.59	56.00	-18.41	10.39	Neutral	-	27.20	0.13	0.28	9.98						
AV	3.683M	28.31	46.00	-17.69	10.39	Neutral	-	17.92	0.13	0.28	9.98						

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	8.55M	13.396M	13M4G1D	6.625M	13.025M
802.11g_Nss1,(6Mbps)_2TX	15.925M	16.675M	16M7D1D	12.175M	16.52M
802.11be EHT20_Nss1,(MCS0)_2TX	18.725M	18.979M	19M0D1D	14.025M	18.796M
802.11be EHT40_Nss1,(MCS0)_2TX	36.9M	37.683M	37M7D1D	21M	37.634M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	8.3M	13.025M	7.825M	13.116M
2437MHz	Pass	500k	8.5M	13.088M	8.05M	13.133M
2462MHz	Pass	500k	8.55M	13.181M	6.625M	13.396M
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	14.325M	16.52M	12.175M	16.529M
2437MHz	Pass	500k	14.425M	16.603M	12.575M	16.675M
2462MHz	Pass	500k	15.925M	16.536M	14.925M	16.584M
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	17.85M	18.892M	16.425M	18.914M
2437MHz	Pass	500k	17.75M	18.852M	18.475M	18.979M
2462MHz	Pass	500k	18.725M	18.897M	14.025M	18.796M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	500k	34.6M	37.656M	36.9M	37.664M
2437MHz	Pass	500k	29.85M	37.642M	29.5M	37.634M
2452MHz	Pass	500k	31.8M	37.683M	21M	37.646M



Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX
EBW
2412MHz

13/11/2025

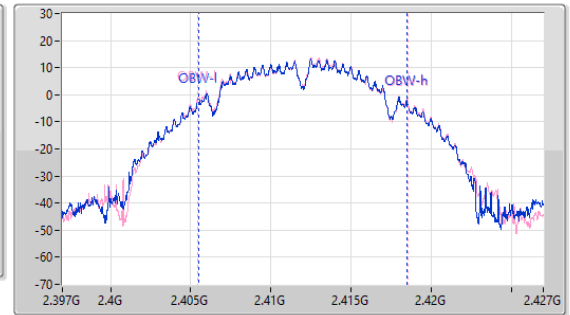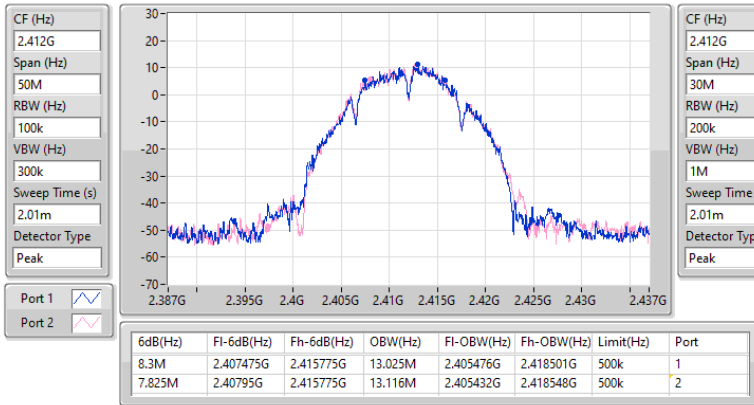

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX
EBW
2437MHz

13/11/2025

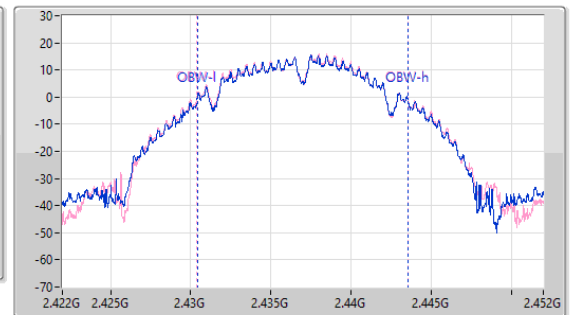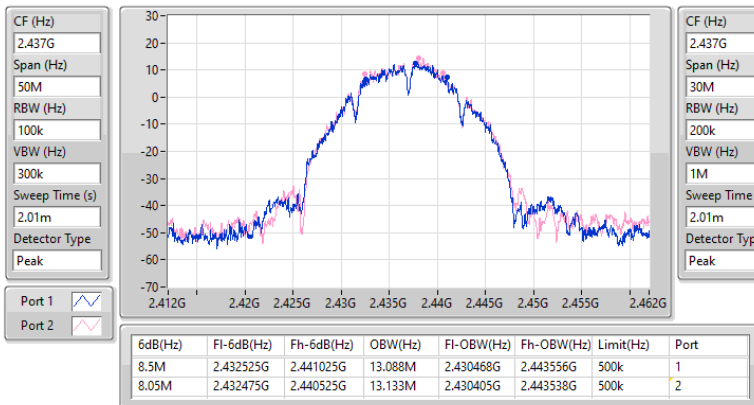


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX
EBW
2462MHz

13/11/2025

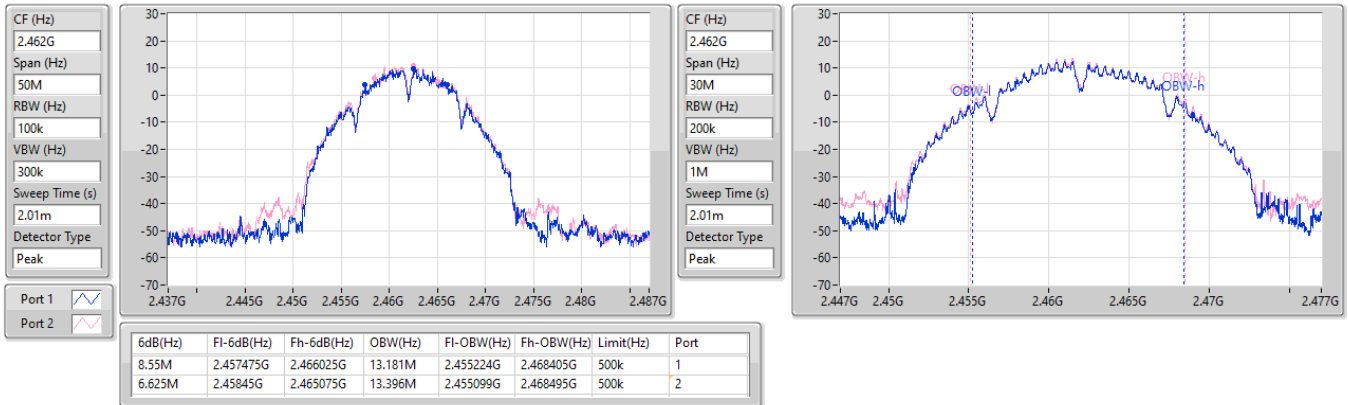

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX
EBW
2412MHz

13/11/2025

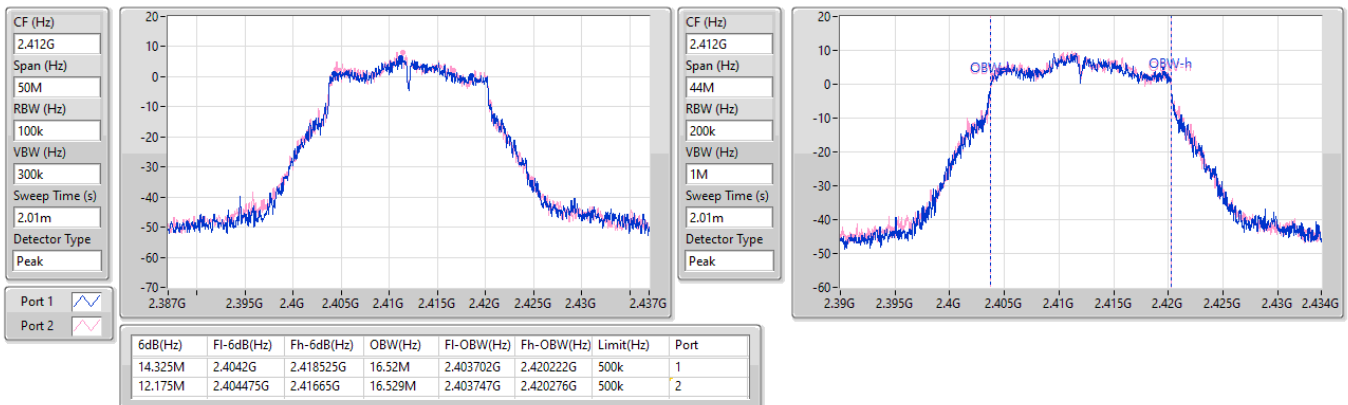


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX
EBW
2437MHz

13/11/2025

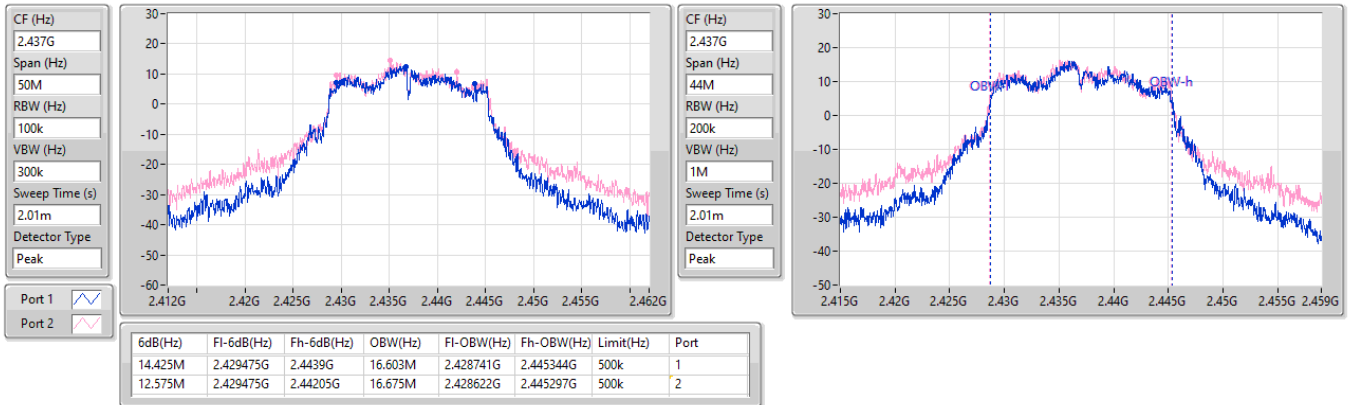

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX
EBW
2462MHz

13/11/2025

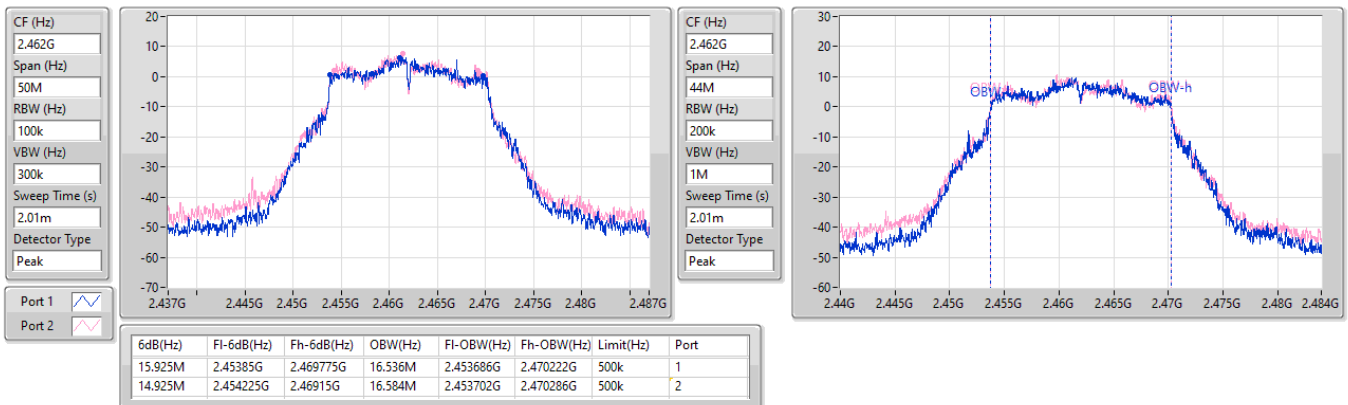


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
2412MHz

13/11/2025

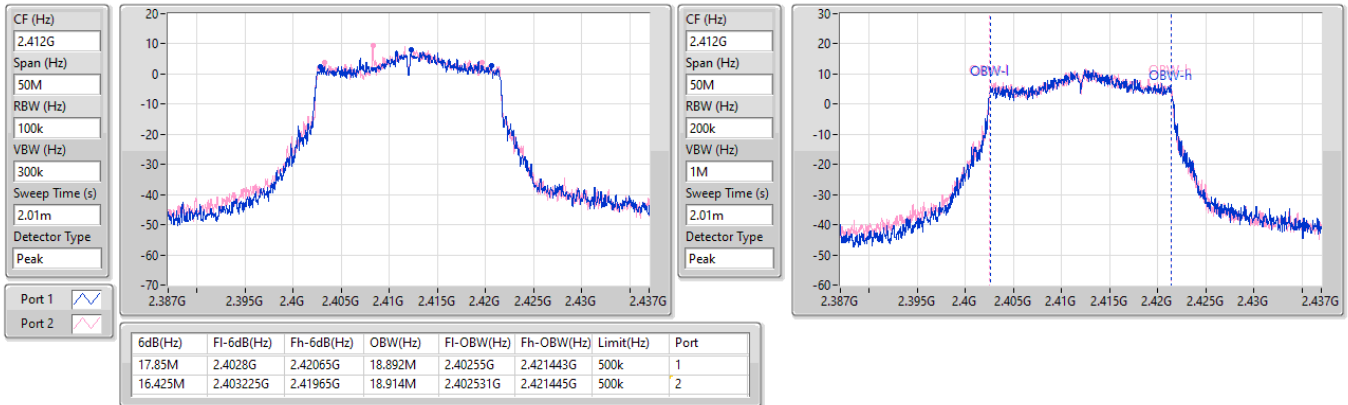

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
2437MHz

13/11/2025

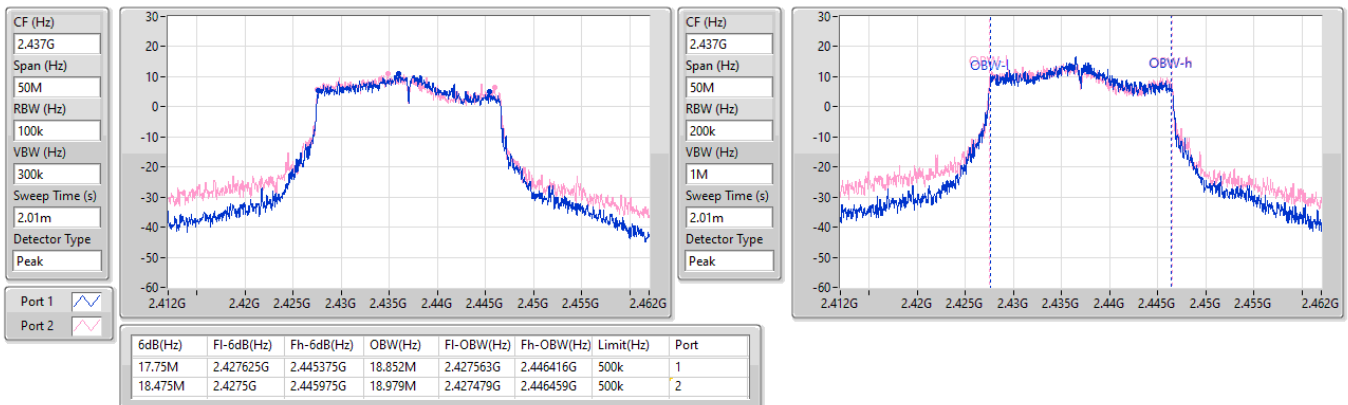


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
2462MHz

13/11/2025

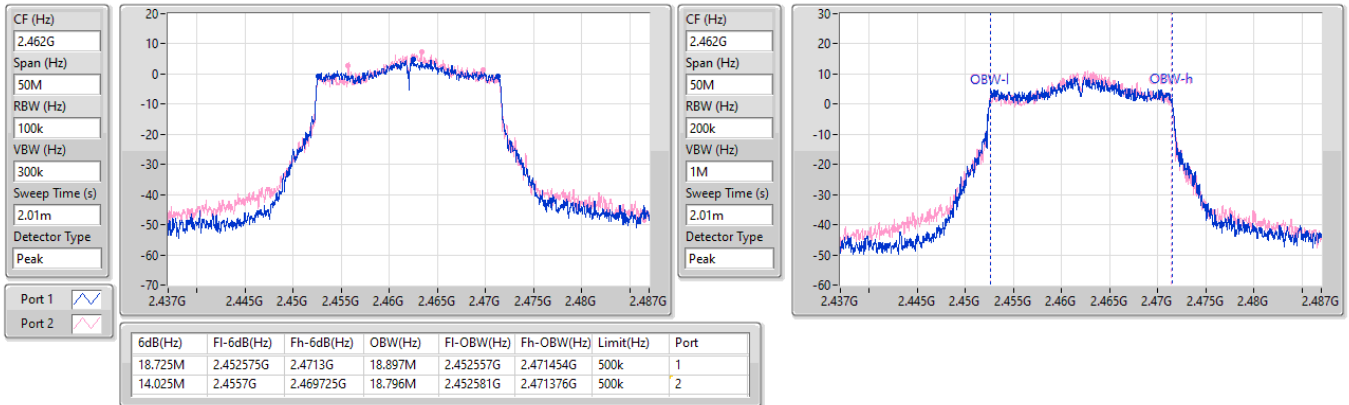

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
2422MHz

13/11/2025

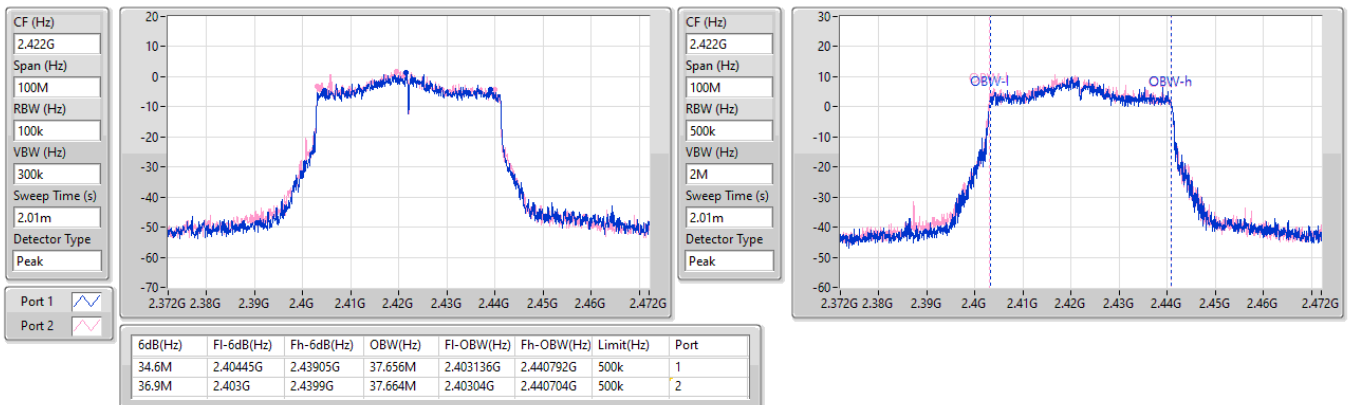


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
2437MHz

13/11/2025

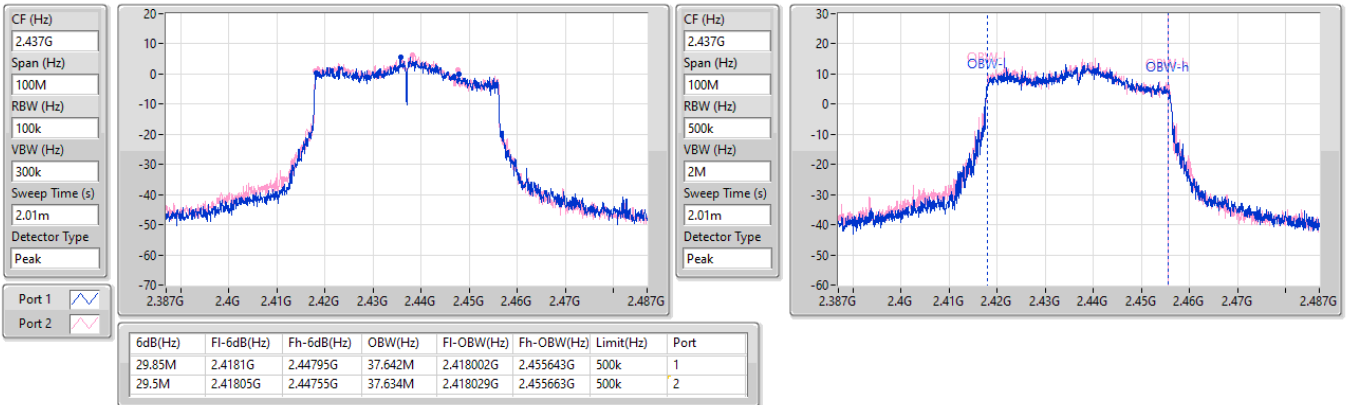
2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
2452MHz

13/11/2025

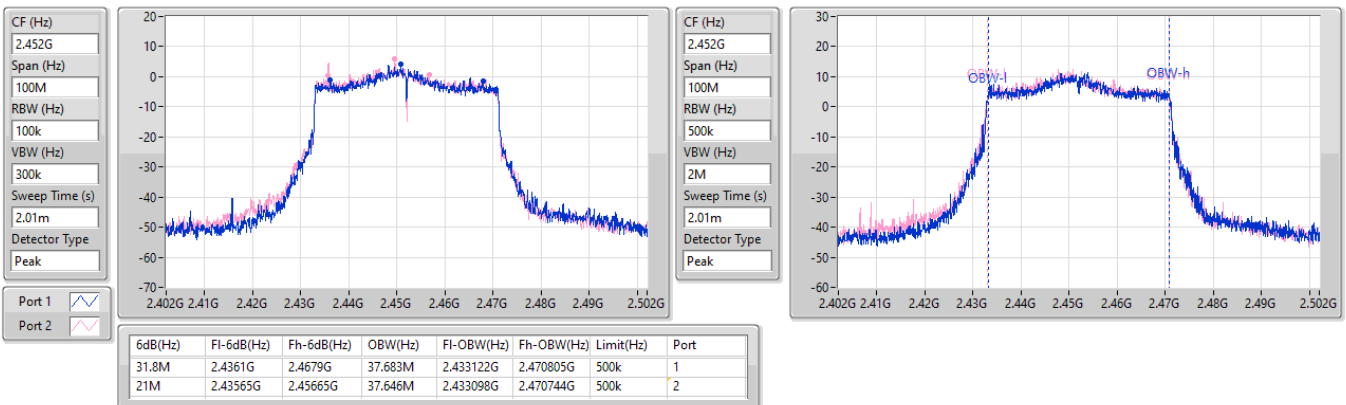



Average Power

Appendix C

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_2TX	26.64	0.46132
802.11g_Nss1,(6Mbps)_2TX	28.62	0.72778
802.11be EHT20_Nss1,(MCS0)_2TX	27.37	0.54576
802.11be EHT20-BF_Nss1,(MCS0)_2TX	27.37	0.54576
802.11be EHT40_Nss1,(MCS0)_2TX	24.24	0.26546
802.11be EHT40-BF_Nss1,(MCS0)_2TX	24.24	0.26546

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.96	21.01	21.04	24.04	30.00
2437MHz	Pass	4.96	23.54	23.72	26.64	30.00
2462MHz	Pass	4.96	20.74	20.54	23.65	30.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.96	19.31	19.38	22.36	30.00
2417MHz	Pass	4.96	22.21	22.71	25.48	30.00
2437MHz	Pass	4.96	25.45	25.77	28.62	30.00
2452MHz	Pass	4.96	23.13	23.43	26.29	30.00
2462MHz	Pass	4.96	19.47	19.46	22.48	30.00
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.96	21.19	21.15	24.18	30.00
2417MHz	Pass	4.96	22.23	22.67	25.47	30.00
2437MHz	Pass	4.96	24.17	24.54	27.37	30.00
2452MHz	Pass	4.96	22.64	22.75	25.71	30.00
2462MHz	Pass	4.96	19.26	19.06	22.17	30.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	4.96	17.41	17.22	20.33	30.00
2427MHz	Pass	4.96	20.31	20.69	23.51	30.00
2437MHz	Pass	4.96	21.15	21.31	24.24	30.00
2452MHz	Pass	4.96	18.99	19.12	22.07	30.00
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.59	21.19	21.15	24.18	28.41
2417MHz	Pass	7.59	22.23	22.67	25.47	28.41
2437MHz	Pass	7.59	24.17	24.54	27.37	28.41
2452MHz	Pass	7.59	22.64	22.75	25.71	28.41
2462MHz	Pass	7.59	19.26	19.06	22.17	28.41
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	7.59	17.41	17.22	20.33	28.41
2427MHz	Pass	7.59	20.31	20.69	23.51	28.41
2437MHz	Pass	7.59	21.15	21.31	24.24	28.41
2452MHz	Pass	7.59	18.99	19.12	22.07	28.41

DG = Directional Gain; Port X = Port X output power;
 Inf = There's no restriction for the limit.

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	2.96
802.11g_Nss1,(6Mbps)_2TX	2.94
802.11be EHT20_Nss1,(MCS0)_2TX	1.05
802.11be EHT40_Nss1,(MCS0)_2TX	-4.86

RBW = 3kHz;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.59	-2.10	-2.02	0.95	6.41
2437MHz	Pass	7.59	0.02	-0.05	2.96	6.41
2462MHz	Pass	7.59	-2.42	-3.02	-0.00	6.41
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.59	-5.94	-7.61	-4.36	6.41
2437MHz	Pass	7.59	-0.88	0.76	2.94	6.41
2462MHz	Pass	7.59	-5.65	-5.66	-3.74	6.41
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.59	-4.54	-4.20	-2.01	6.41
2437MHz	Pass	7.59	-0.96	-0.54	1.05	6.41
2462MHz	Pass	7.59	-5.80	-6.52	-3.57	6.41
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	7.59	-11.06	-11.55	-8.69	6.41
2437MHz	Pass	7.59	-6.11	-7.04	-4.86	6.41
2452MHz	Pass	7.59	-9.06	-8.76	-7.25	6.41


DG = Directional Gain; RBW = 3kHz;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

PSD

2412MHz

12/11/2025

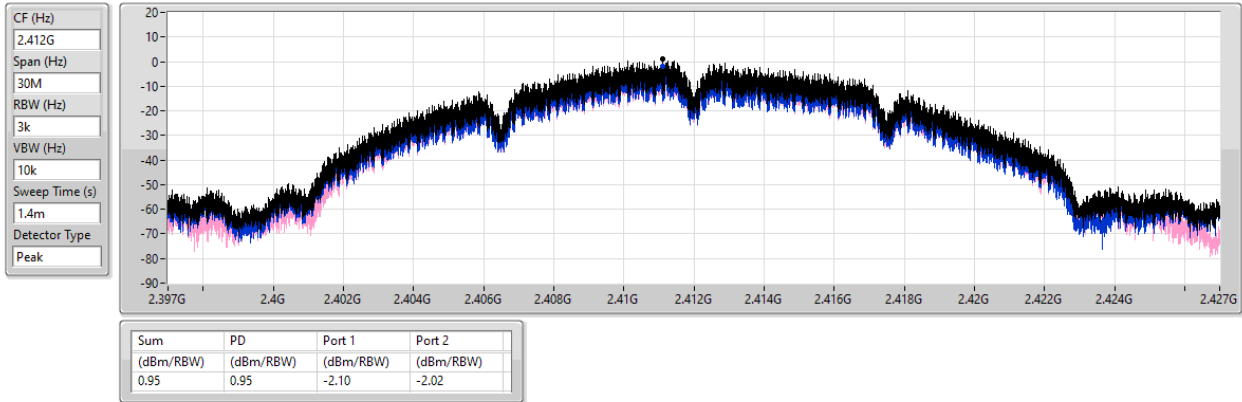


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

PSD

2437MHz

12/11/2025

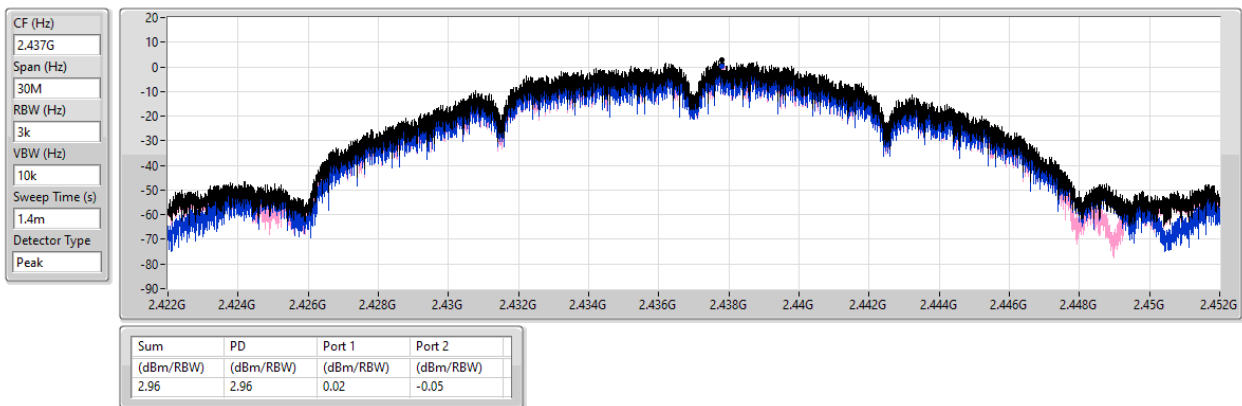

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

PSD

2462MHz

12/11/2025

CF (Hz)
2.462G


Span (Hz)
30M

RBW (Hz)
3k

VBW (Hz)
10k

Sweep Time (s)
1.4m

Detector Type
Peak

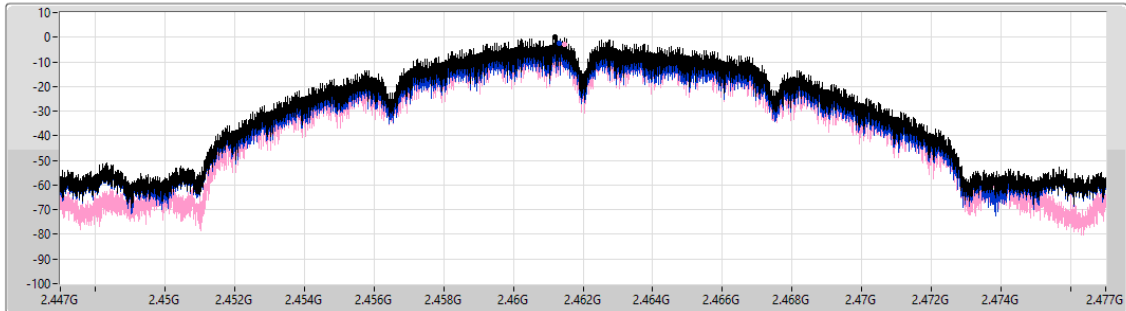

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.00	-0.00	-2.42	-3.02

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

PSD

2412MHz

12/11/2025

CF (Hz)
2.412G


Span (Hz)
30M

RBW (Hz)
3k

VBW (Hz)
10k

Sweep Time (s)
1.4m

Detector Type
Peak

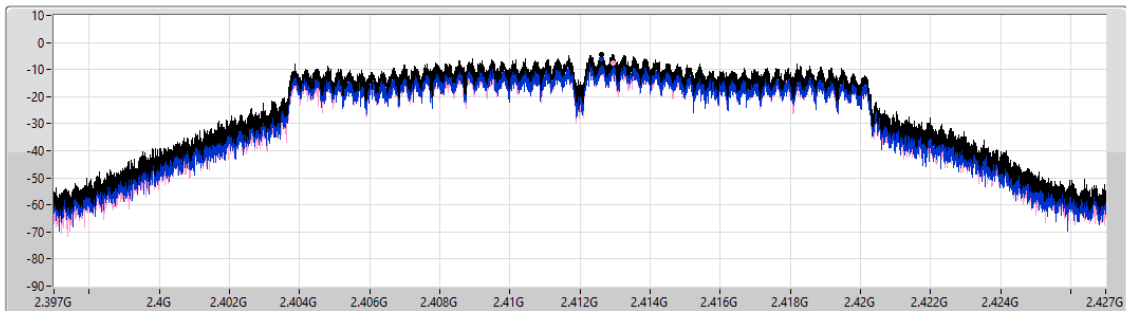


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.36	-4.36	-5.94	-7.61

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

PSD

2437MHz

12/11/2025

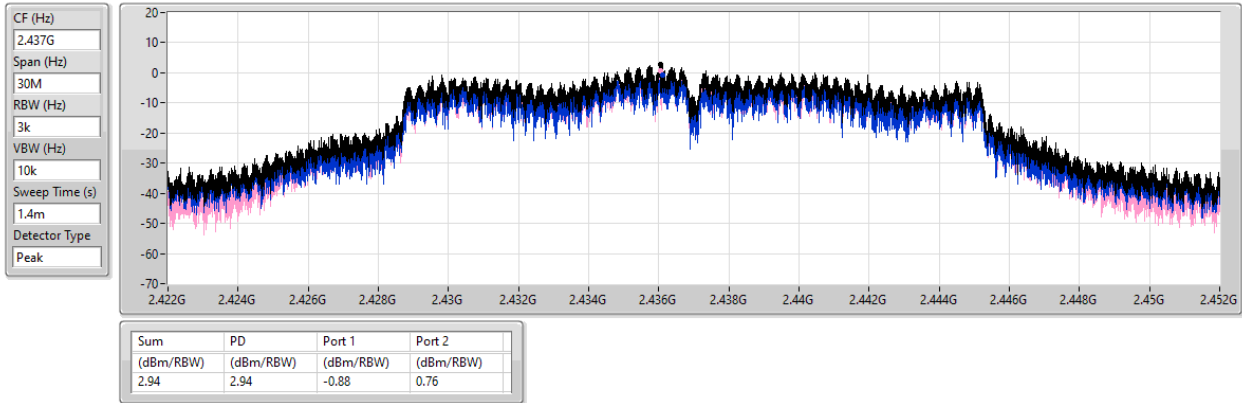


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

PSD

2462MHz

12/11/2025

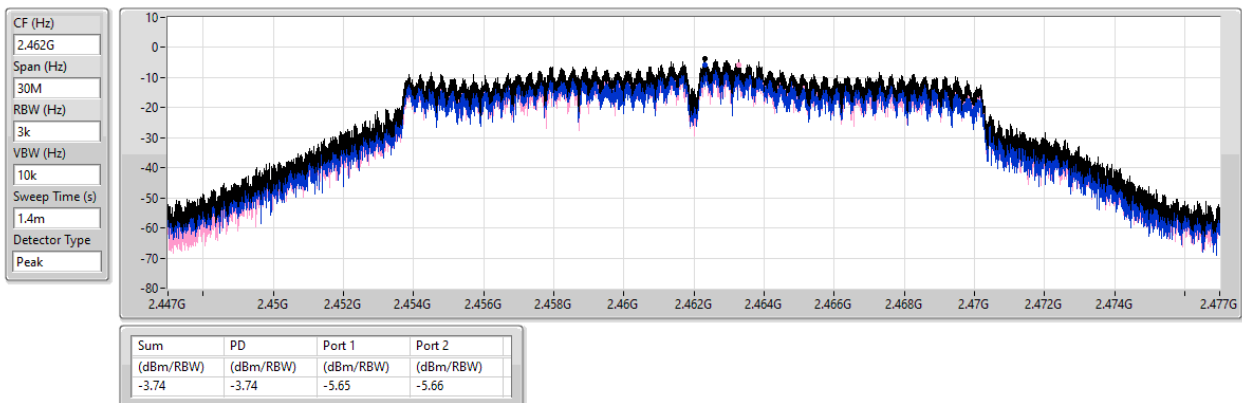


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

2412MHz

12/11/2025

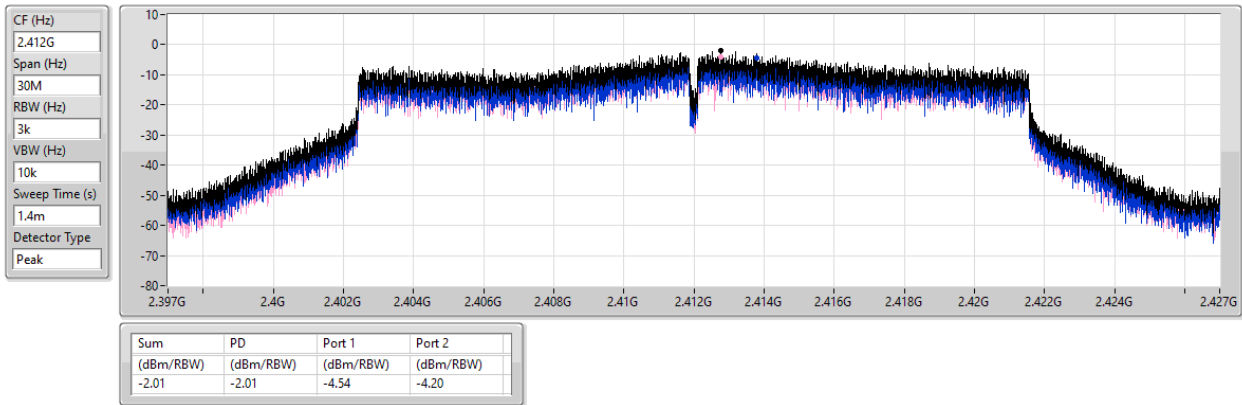


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

2437MHz

12/11/2025

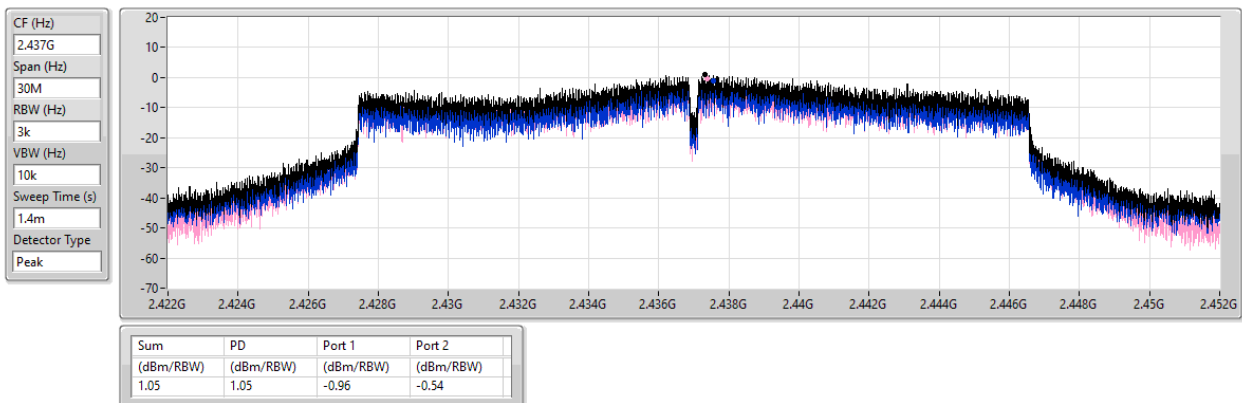


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

2462MHz

12/11/2025

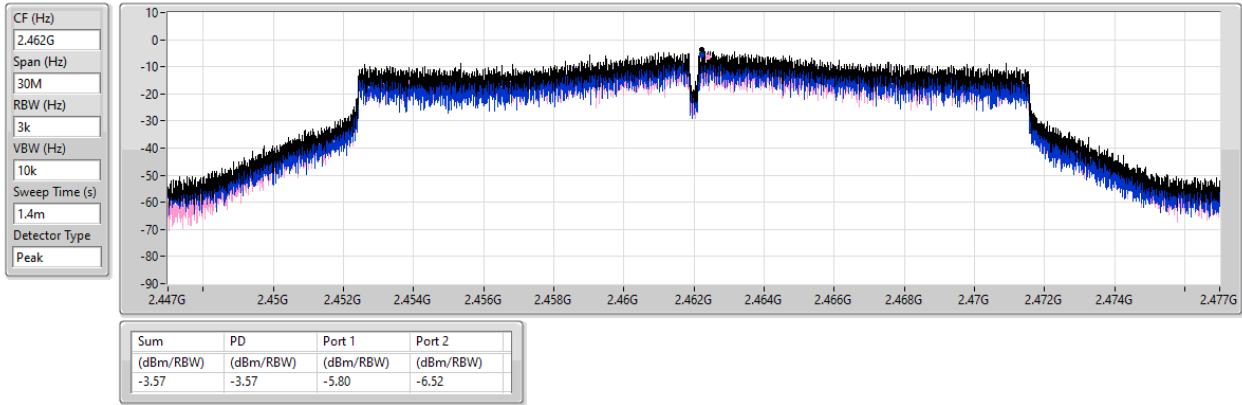


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

2422MHz

12/11/2025

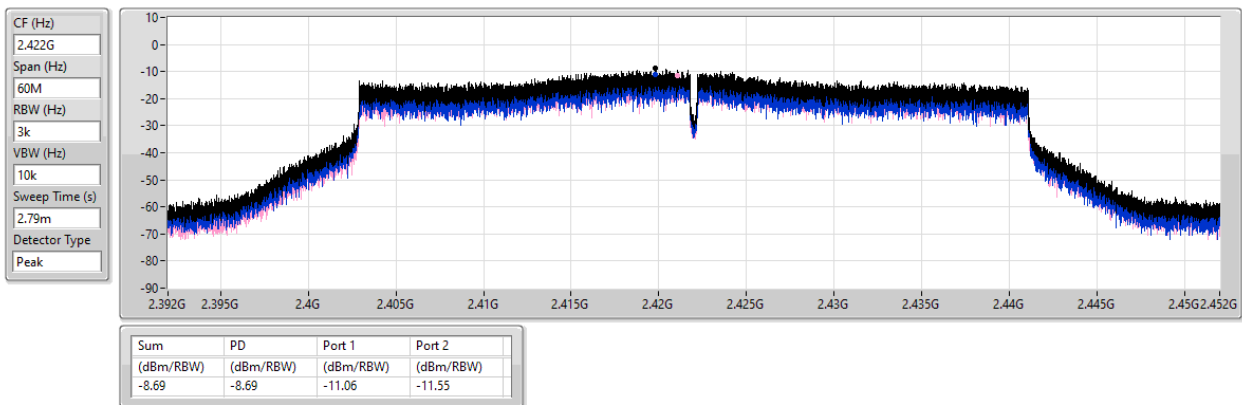


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

2437MHz

12/11/2025

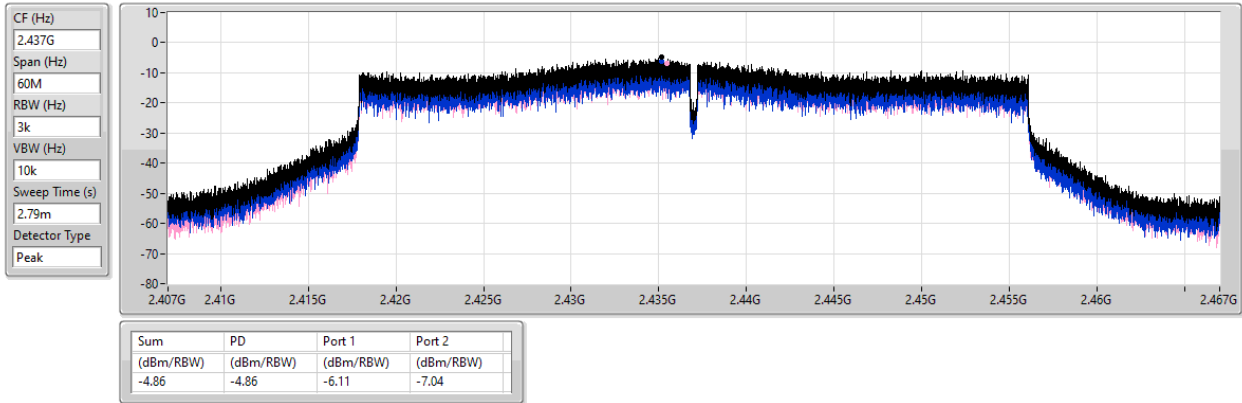


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

2452MHz

12/11/2025

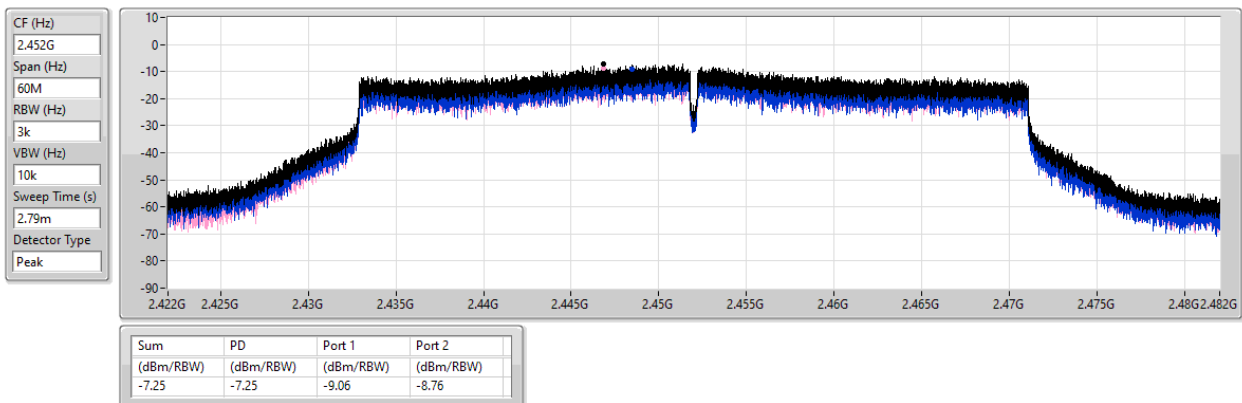

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	Pass	2.43841G	14.97	-15.03	2.30408G	-50.96	2.39848G	-37.41	2.4G	-38.44	2.5087G	-52.67	21.9432G	-46.17	1
802.11g_Nss1,(6Mbps)_2TX	Pass	2.43574G	17.57	-12.43	2.30408G	-51.98	2.39992G	-25.53	2.4G	-23.46	2.51142G	-53.12	21.76057G	-45.54	1
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	2.43824G	14.70	-15.30	2.30408G	-47.43	2.4G	-21.27	2.4G	-19.95	2.51582G	-51.83	21.769G	-45.23	1
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	2.44075G	8.94	-21.06	2.1952G	-49.12	2.4G	-27.11	2.4G	-24.35	2.51502G	-52.53	21.83365G	-45.86	2

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43841G	14.97	-15.03	2.30408G	-50.96	2.39848G	-37.41	2.4G	-38.44	2.5087G	-52.67	21.9432G	-46.17	1
2412MHz	Pass	2.43841G	14.97	-15.03	2.16079G	-45.18	2.4G	-39.83	2.4G	-40.69	2.50734G	-51.20	21.78024G	-45.79	2
2437MHz	Pass	2.43841G	14.97	-15.03	2.30641G	-50.12	2.39768G	-47.64	2.4G	-48.21	2.52302G	-51.89	21.90948G	-45.87	1
2437MHz	Pass	2.43841G	14.97	-15.03	2.16079G	-49.61	2.39952G	-49.29	2.4G	-50.25	2.50142G	-52.42	21.98253G	-46.11	2
2462MHz	Pass	2.43841G	14.97	-15.03	2.30874G	-50.46	2.39248G	-50.88	2.4G	-52.69	2.5151G	-52.58	21.93758G	-45.77	1
2462MHz	Pass	2.43841G	14.97	-15.03	2.16079G	-47.38	2.39648G	-52.64	2.4G	-53.89	2.51702G	-51.89	21.98815G	-45.55	2
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43574G	17.57	-12.43	2.30408G	-51.98	2.39992G	-25.53	2.4G	-23.46	2.51142G	-53.12	21.76057G	-45.54	1
2412MHz	Pass	2.43574G	17.57	-12.43	2.16079G	-48.00	2.39992G	-26.84	2.4G	-24.89	2.51758G	-53.14	21.52457G	-46.44	2
2437MHz	Pass	2.43574G	17.57	-12.43	2.30408G	-45.23	2.3992G	-36.81	2.4G	-38.67	2.50566G	-50.75	21.74372G	-45.59	1
2437MHz	Pass	2.43574G	17.57	-12.43	2.16079G	-37.33	2.39936G	-42.02	2.4G	-42.43	2.5051G	-50.57	21.96286G	-45.64	2
2462MHz	Pass	2.43574G	17.57	-12.43	2.30408G	-46.09	2.4G	-45.03	2.4G	-45.53	2.50014G	-50.74	21.76338G	-45.68	1
2462MHz	Pass	2.43574G	17.57	-12.43	2.16079G	-48.08	2.39696G	-52.33	2.4G	-53.65	2.50046G	-52.15	21.75215G	-46.50	2
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43824G	14.70	-15.30	2.30408G	-47.43	2.4G	-21.27	2.4G	-19.95	2.51582G	-51.83	21.769G	-45.23	1
2412MHz	Pass	2.43824G	14.70	-15.30	2.16079G	-42.05	2.4G	-22.83	2.4G	-22.48	2.50078G	-52.11	21.86734G	-45.83	2
2437MHz	Pass	2.43824G	14.70	-15.30	2.30408G	-43.99	2.39992G	-38.96	2.4G	-41.40	2.50846G	-51.40	21.85329G	-45.90	1
2437MHz	Pass	2.43824G	14.70	-15.30	2.16079G	-41.04	2.39976G	-41.26	2.4G	-39.78	2.50022G	-51.68	21.45995G	-45.66	2
2462MHz	Pass	2.43824G	14.70	-15.30	2.30408G	-45.87	2.4G	-45.76	2.4G	-45.89	2.50166G	-49.94	21.7381G	-45.27	1
2462MHz	Pass	2.43824G	14.70	-15.30	2.16079G	-48.16	2.39424G	-52.14	2.4G	-54.97	2.50158G	-50.20	21.85048G	-45.50	2
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.44075G	8.94	-21.06	2.30512G	-50.79	2.39952G	-26.10	2.4G	-25.80	2.5419G	-52.00	21.79439G	-45.65	1
2422MHz	Pass	2.44075G	8.94	-21.06	2.1952G	-49.12	2.4G	-27.11	2.4G	-24.35	2.51502G	-52.53	21.83365G	-45.86	2
2437MHz	Pass	2.44075G	8.94	-21.06	2.19291G	-49.33	2.39072G	-34.75	2.4G	-38.71	2.5019G	-45.53	21.70183G	-45.87	1
2437MHz	Pass	2.44075G	8.94	-21.06	2.16085G	-45.79	2.39456G	-39.94	2.4G	-43.21	2.50046G	-46.31	21.86169G	-45.40	2
2452MHz	Pass	2.44075G	8.94	-21.06	2.30512G	-50.47	2.39456G	-43.68	2.4G	-50.13	2.51454G	-46.33	21.97668G	-44.61	1
2452MHz	Pass	2.44075G	8.94	-21.06	2.19291G	-50.28	2.39584G	-42.53	2.4G	-50.04	2.51566G	-46.08	21.92339G	-45.82	2

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX


CSEndB

2412MHz

12/11/2025

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1
Port 2

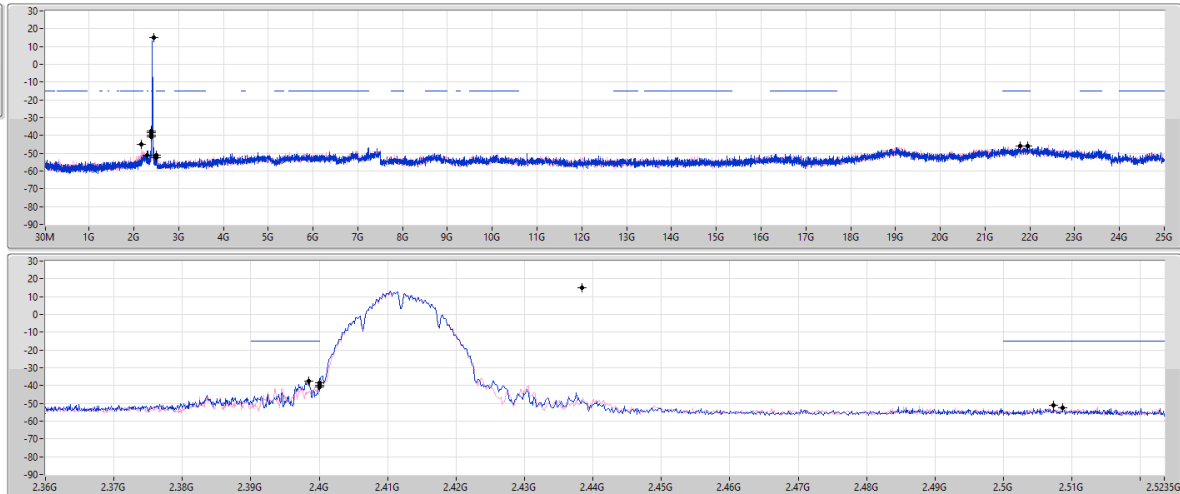

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43841G	14.97	-15.03	2.30408G	-50.96	2.39848G	-37.41	2.4G	-38.44	2.5087G	-52.67	21.9432G	-46.17	1
2.43841G	14.97	-15.03	2.16079G	-45.18	2.4G	-39.83	2.4G	-40.69	2.50734G	-51.20	21.78024G	-45.79	2

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX


CSEndB

2437MHz

12/11/2025

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1
Port 2

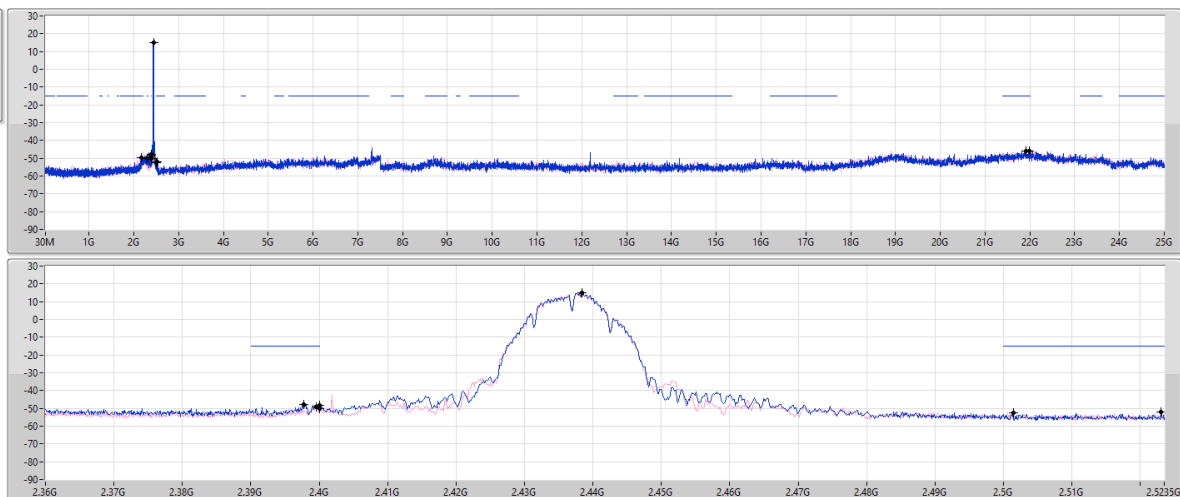


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43841G	14.97	-15.03	2.30641G	-50.12	2.39768G	-47.64	2.4G	-48.21	2.52302G	-51.89	21.90948G	-45.87	1
2.43841G	14.97	-15.03	2.16079G	-49.61	2.39952G	-49.29	2.4G	-50.25	2.50142G	-52.42	21.98253G	-46.11	2

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

CSEndB

2462MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

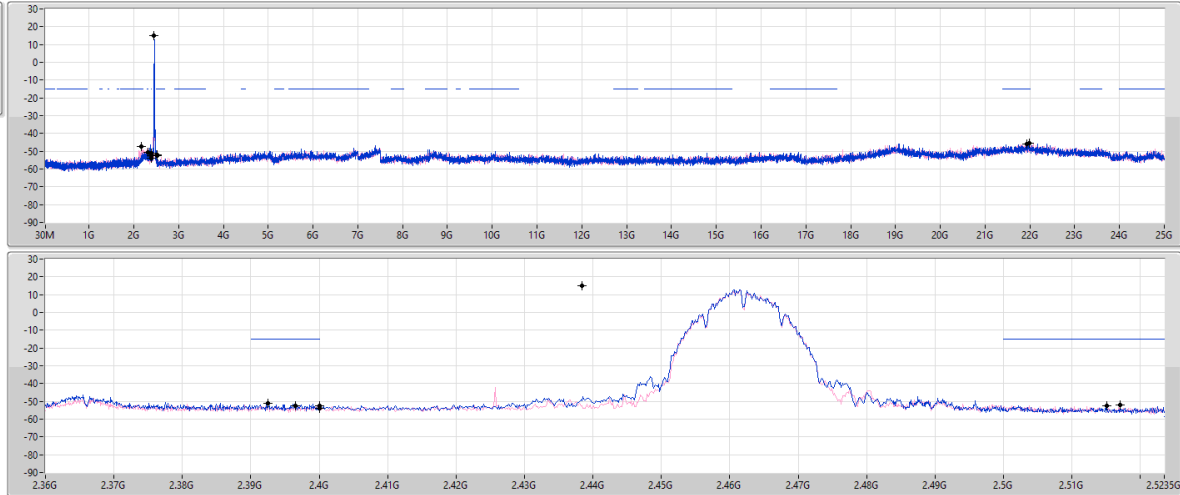


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43841G	14.97	-15.03	2.30874G	-50.46	2.39248G	-50.88	2.4G	-52.69	2.5151G	-52.58	2.193758G	-45.77	1
2.43841G	14.97	-15.03	2.16079G	-47.38	2.39648G	-52.64	2.4G	-53.89	2.51702G	-51.89	2.198815G	-45.55	2

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

CSEndB

2412MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

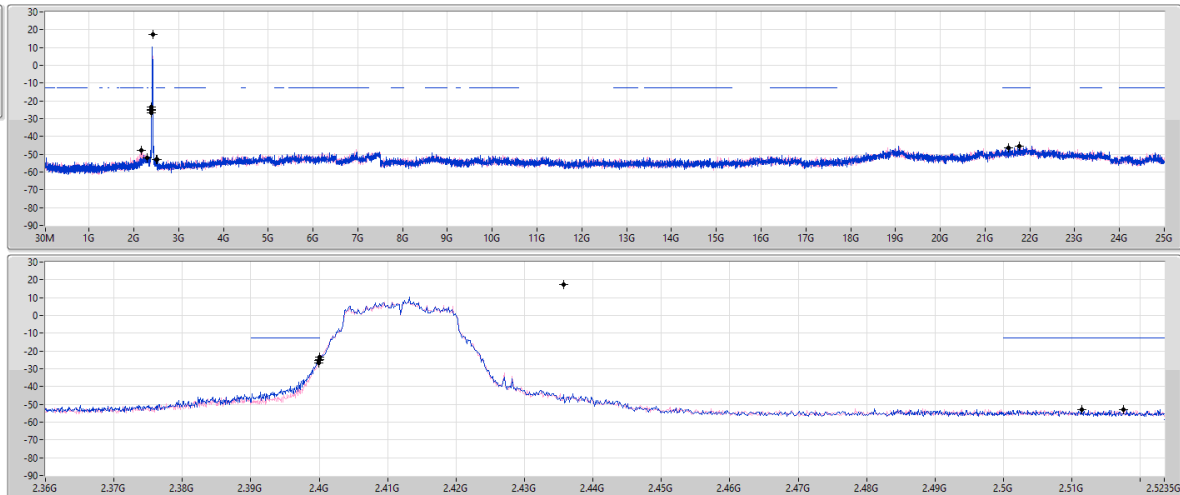

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43574G	17.57	-12.43	2.30408G	-51.98	2.39992G	-25.53	2.4G	-23.46	2.51142G	-53.12	2.176057G	-45.54	1
2.43574G	17.57	-12.43	2.16079G	-48.00	2.39992G	-26.84	2.4G	-24.89	2.51758G	-53.14	2.152457G	-46.44	2

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX


CSEndB

2437MHz

12/11/2025

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1
Port 2

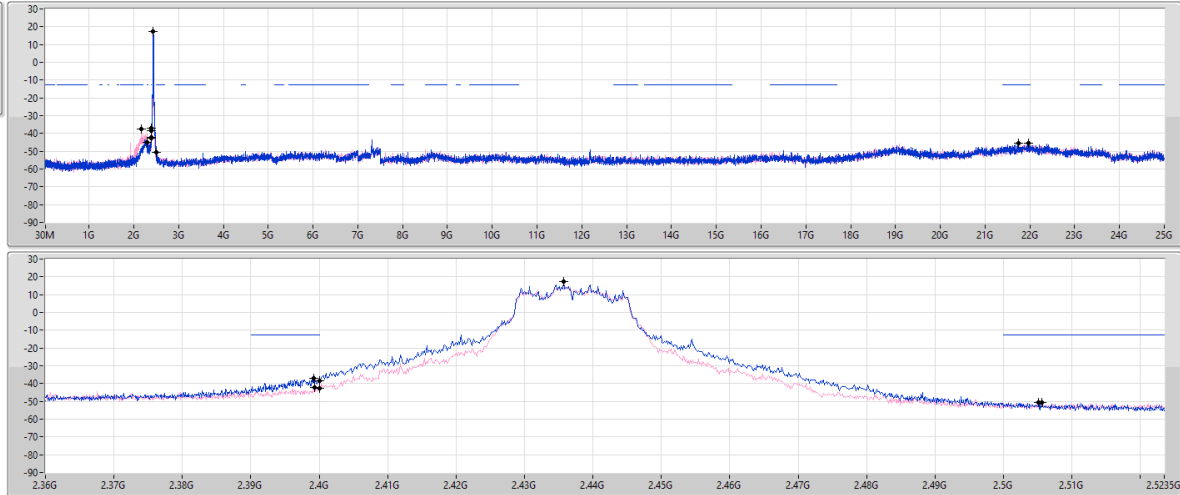

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43574G	17.57	-12.43	2.30408G	-45.23	2.3992G	-36.81	2.4G	-38.67	2.50566G	-50.75	2.1.74372G	-45.59	1
2.43574G	17.57	-12.43	2.16079G	-37.33	2.39936G	-42.02	2.4G	-42.43	2.5051G	-50.57	2.1.96286G	-45.64	2

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX


CSEndB

2462MHz

12/11/2025

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1
Port 2

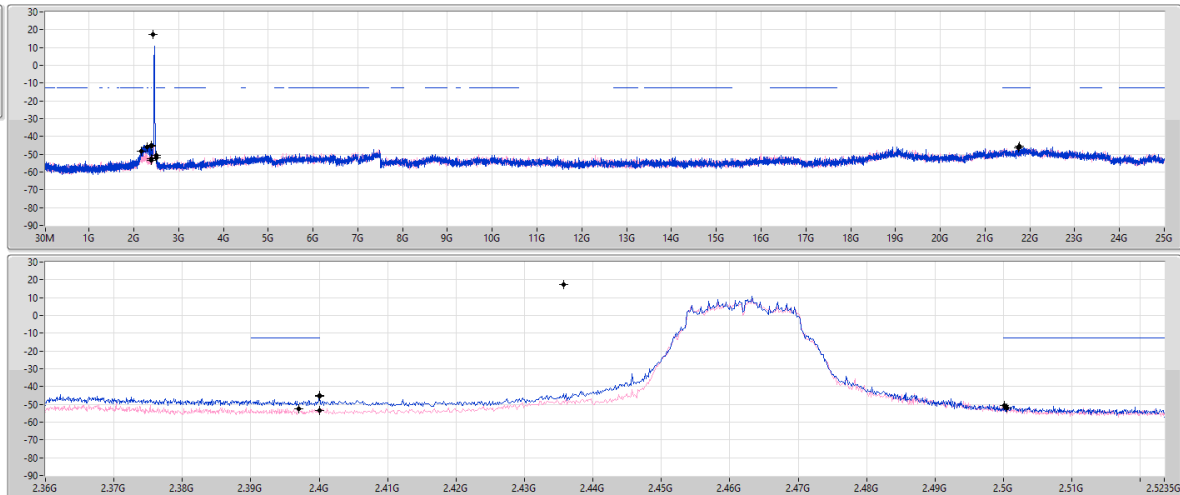


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43574G	17.57	-12.43	2.30408G	-46.09	2.4G	-45.03	2.4G	-45.53	2.50014G	-50.74	2.1.76338G	-45.68	1
2.43574G	17.57	-12.43	2.16079G	-48.08	2.39969G	-52.33	2.4G	-53.65	2.50046G	-52.15	2.1.75215G	-46.50	2

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSEndB

2412MHz

12/11/2025

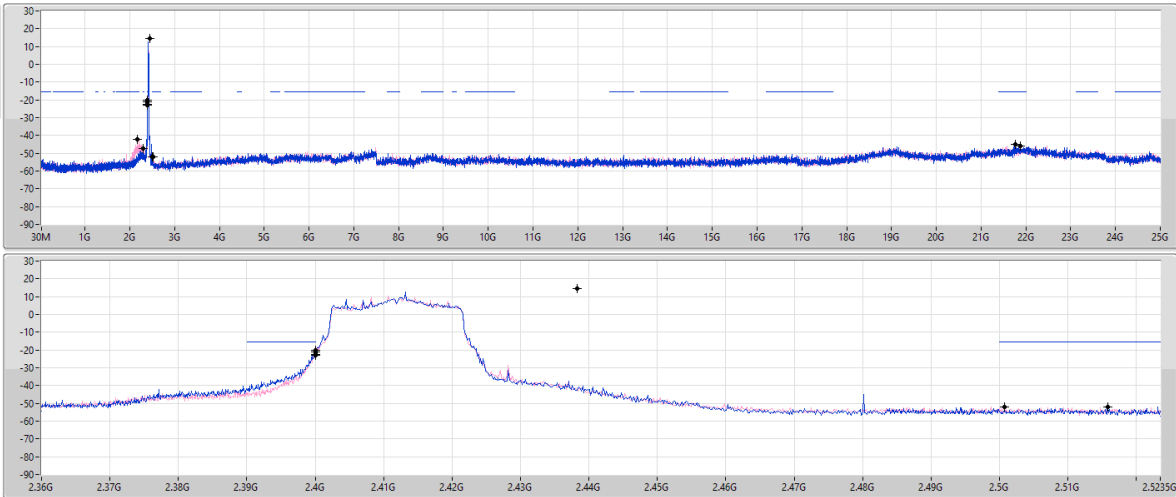RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43824G	14.70	-15.30	2.30408G	-47.43	2.4G	-21.27	2.4G	-19.95	2.51582G	-51.83	21.769G	-45.23	1
2.43824G	14.70	-15.30	2.16079G	-42.05	2.4G	-22.83	2.4G	-22.48	2.50078G	-52.11	21.86734G	-45.83	2

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSEndB

2437MHz

12/11/2025

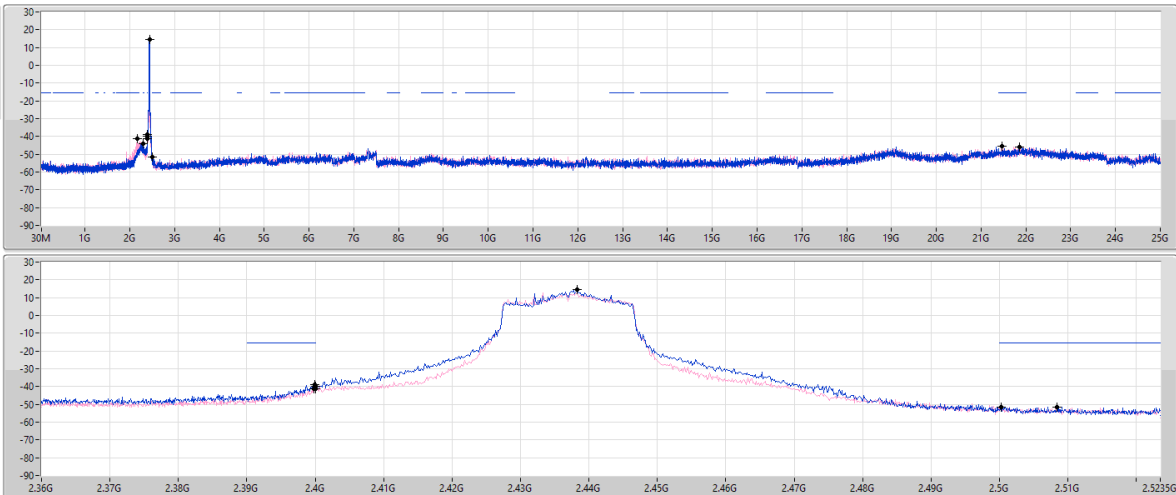RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43824G	14.70	-15.30	2.30408G	-43.99	2.39992G	-38.96	2.4G	-41.40	2.50846G	-51.40	21.85329G	-45.90	1
2.43824G	14.70	-15.30	2.16079G	-41.04	2.39976G	-41.26	2.4G	-39.78	2.50022G	-51.68	21.45995G	-45.66	2

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSEndB

2462MHz

12/11/2025

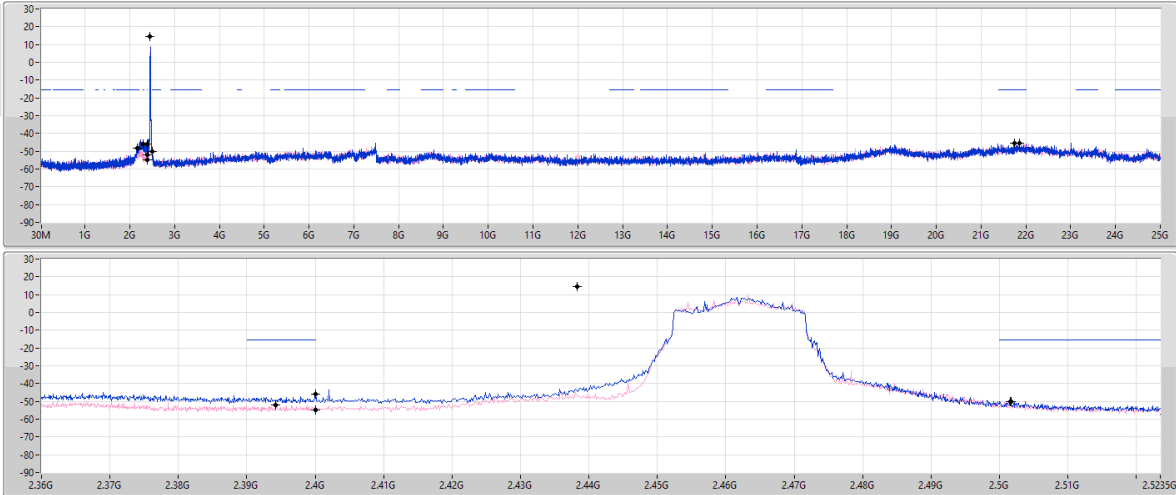
RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

CSEndB

2422MHz

12/11/2025

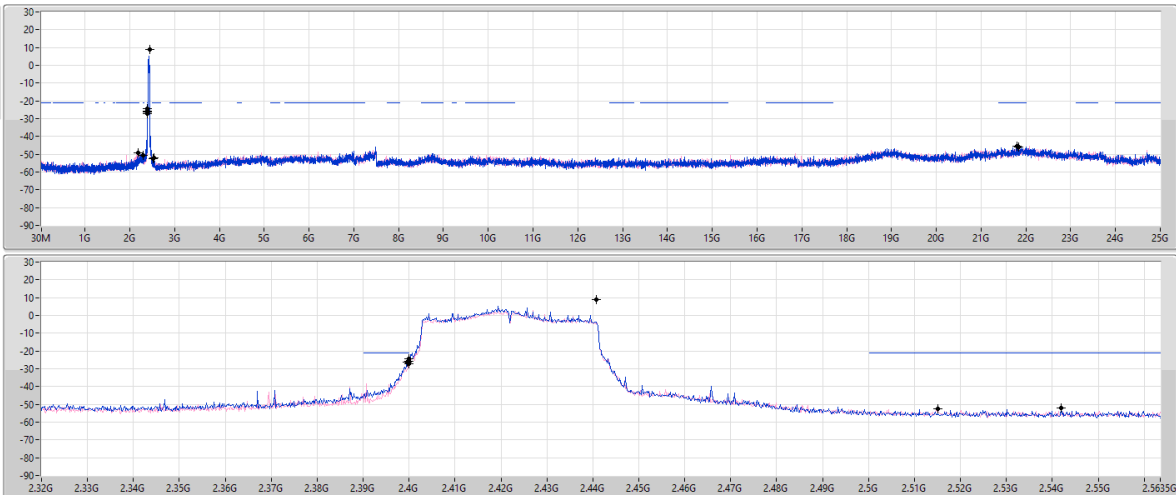
RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

CSEndB

2437MHz

12/11/2025

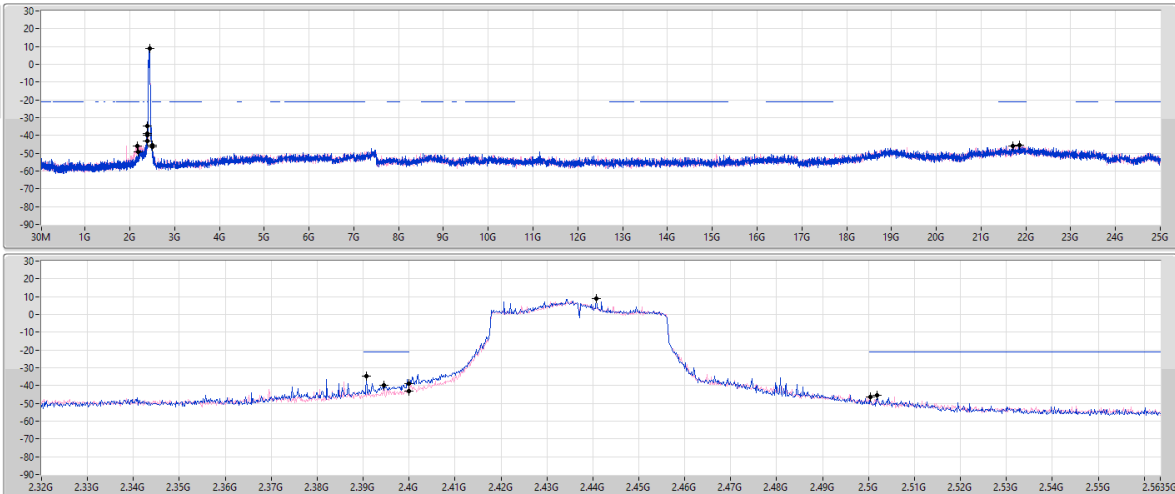RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44075G	8.94	-21.06	2.19291G	-49.33	2.39072G	-34.75	2.4G	-38.71	2.5019G	-45.53	2.170183G	-45.87	1
2.44075G	8.94	-21.06	2.16085G	-45.79	2.39456G	-39.94	2.4G	-43.21	2.50046G	-46.31	2.186169G	-45.40	2

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

CSEndB

2452MHz

12/11/2025

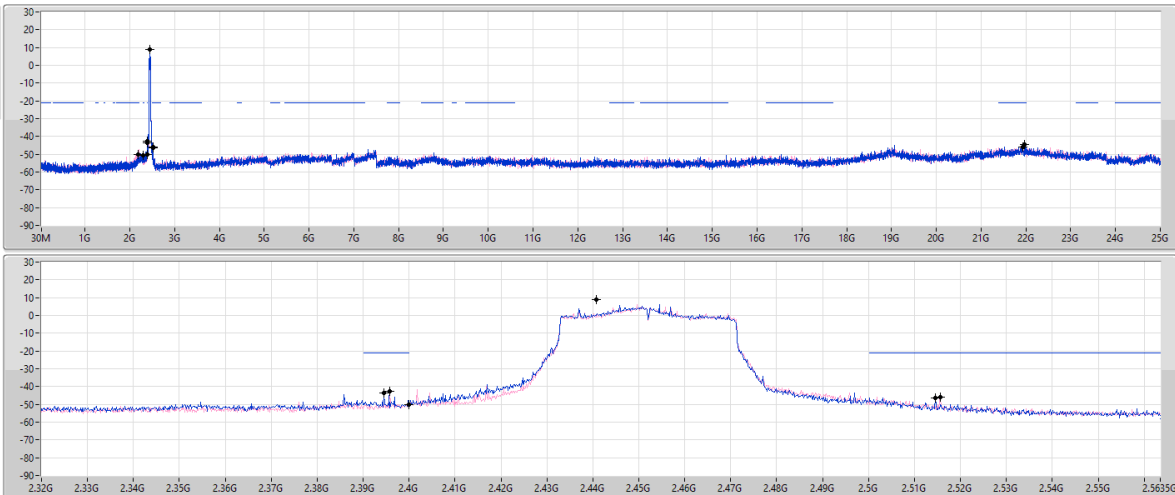RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44075G	8.94	-21.06	2.30512G	-50.47	2.39456G	-43.68	2.4G	-50.13	2.51454G	-46.33	2.197668G	-44.61	1
2.44075G	8.94	-21.06	2.19291G	-50.28	2.39584G	-42.53	2.4G	-50.04	2.51566G	-46.08	2.192339G	-45.82	2




Radiated Emissions below 1GHz

Appendix F.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 2	Pass	PK	46.49M	36.58	40.00	-3.42	Vertical

Mode 2

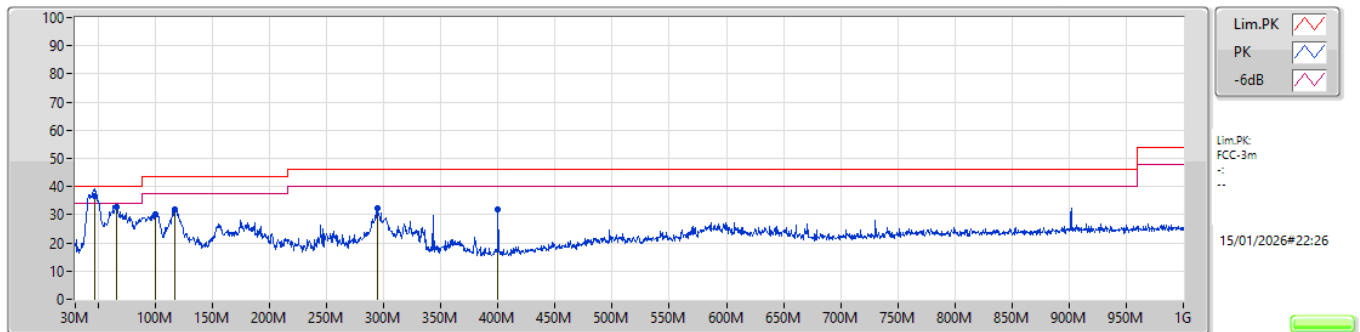

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	46.49M	36.58	40.00	-3.42	-34.12	3	Vertical	260	1.00	"Worst"	70.70	19.50	0.26	53.88		
PK	65.89M	32.88	40.00	-7.12	-35.12	3	Vertical	182	2.00	-	68.00	18.11	0.77	54.00		
PK	100.33M	30.18	43.50	-13.32	-37.95	3	Vertical	199	2.00	-	68.13	14.77	0.88	53.60		
PK	116.82M	31.77	43.50	-11.73	-35.96	3	Vertical	79	1.00	-	67.73	16.53	1.24	53.73		
PK	294.33M	32.50	46.00	-13.50	-32.42	3	Vertical	66	1.00	-	64.92	19.11	2.13	53.66		
PK	400.06M	31.84	46.00	-14.16	-29.70	3	Vertical	121	1.00	-	61.54	21.64	2.50	53.84		

Mode 2

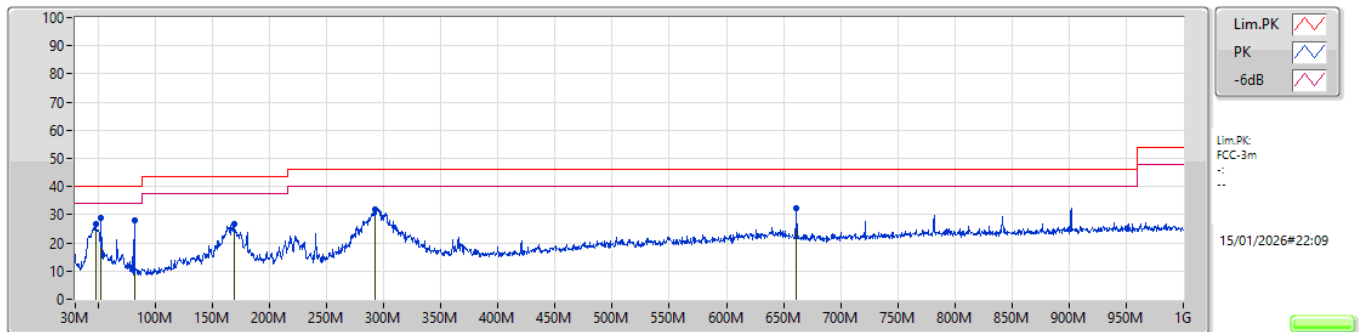

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	47.95M	26.55	40.00	-13.45	-34.12	3	Horizontal	169	3.00	-	60.67	19.58	0.30	54.00		
PK	52.8M	29.03	40.00	-10.97	-34.17	3	Horizontal	58	1.00	"Worst"	63.20	19.53	0.39	54.09		
PK	81.9M	28.15	40.00	-11.85	-39.12	3	Horizontal	77	1.00	-	67.27	14.24	0.52	53.88		
PK	169.2M	26.59	43.50	-16.91	-33.34	3	Horizontal	63	2.00	-	59.93	18.75	1.50	53.59		
PK	292.39M	32.01	46.00	-13.99	-32.48	3	Horizontal	244	2.00	-	64.49	19.05	2.12	53.65		
PK	661.47M	32.43	46.00	-13.57	-22.83	3	Horizontal	39	1.00	-	55.26	26.31	3.64	52.78		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT40_Nss1.(MCS0)_2TX	Pass	AV	2.387G	53.99	54.00	-0.01	3	Horizontal	296	1.80	-

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2412MHz_TX

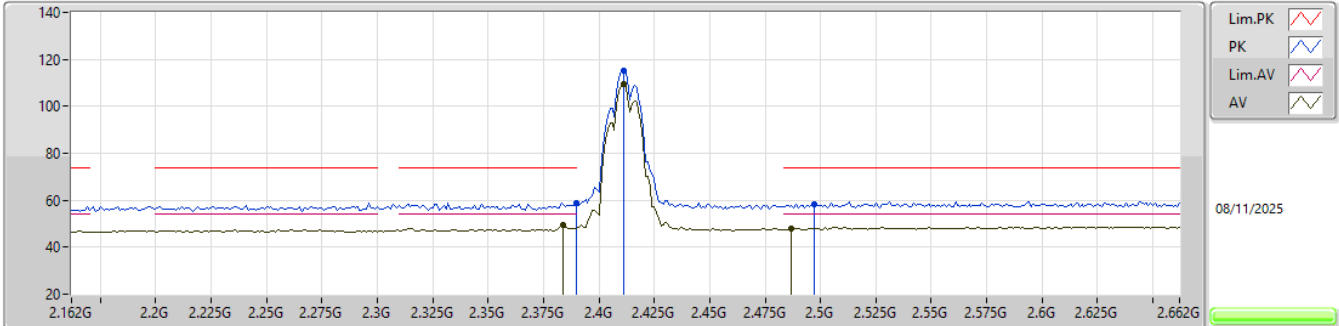


EUT_Y_2TX
Setting 21
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.39G	58.83	74.00	-15.17	26.08	3	Vertical	18	2.91	-	27.40	5.35	-			
AV	2.384G	49.70	54.00	-4.30	17.02	3	Vertical	18	2.91	-	27.34	5.34	-			
PK	2.411G	115.41	Inf	-Inf	82.53	3	Vertical	18	2.91	-	27.50	5.38	-			
AV	2.411G	109.28	Inf	-Inf	76.40	3	Vertical	18	2.91	-	27.50	5.38	-			
PK	2.497G	58.33	74.00	-15.67	24.86	3	Vertical	18	2.91	-	28.00	5.47	-			
AV	2.487G	48.03	54.00	-5.97	14.60	3	Vertical	18	2.91	-	27.97	5.46	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2412MHz_TX

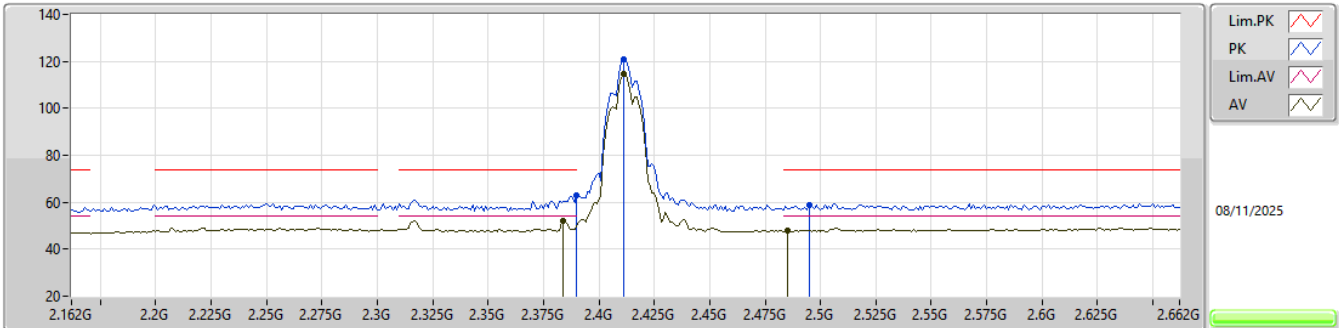


EUT_Y_2TX
Setting 21
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.39G	62.78	74.00	-11.22	30.03	3	Horizontal	296	1.99	-	27.40	5.35	-			
AV	2.384G	51.94	54.00	-2.06	19.26	3	Horizontal	296	1.99	-	27.34	5.34	-			
PK	2.411G	120.93	Inf	-Inf	88.05	3	Horizontal	296	1.99	-	27.50	5.38	-			
AV	2.411G	114.55	Inf	-Inf	81.67	3	Horizontal	296	1.99	-	27.50	5.38	-			
PK	2.495G	58.69	74.00	-15.31	25.22	3	Horizontal	296	1.99	-	28.00	5.47	-			
AV	2.485G	47.94	54.00	-6.06	14.53	3	Horizontal	296	1.99	-	27.95	5.46	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2412MHz_TX

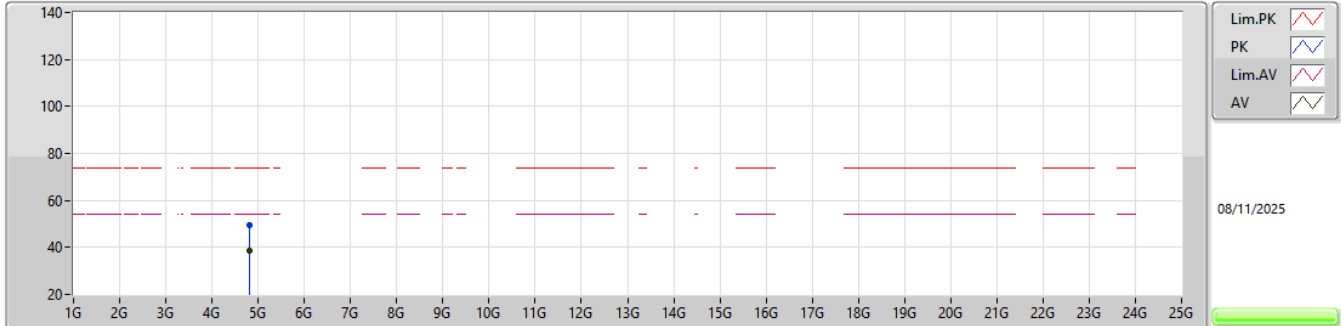


EUT_Y_2TX
Setting 21
01-X-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.82426G	49.51	74.00	-24.49	41.61	3	Vertical	227	2.58	-	32.45	8.02	32.57			
AV	4.82417G	38.44	54.00	-15.56	30.54	3	Vertical	227	2.58	-	32.45	8.02	32.57			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2412MHz_TX

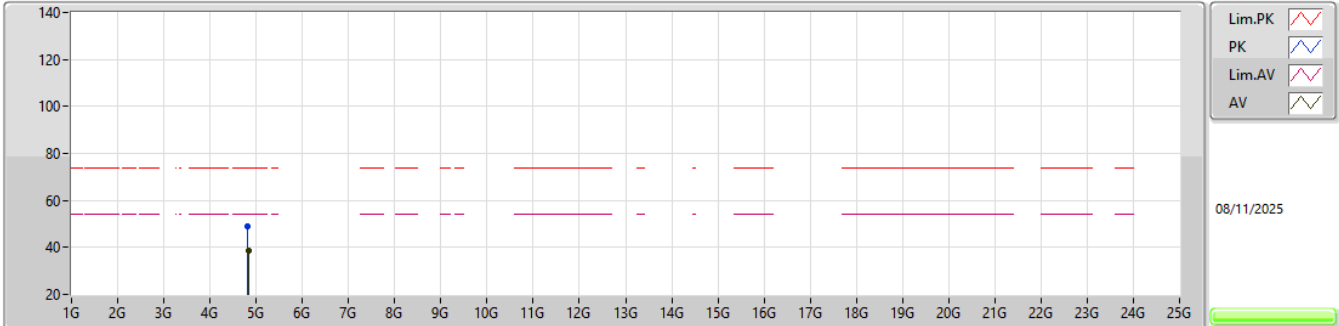


EUT_Y_2TX
Setting 21
01-X-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.82416G	48.95	74.00	-25.05	41.06	3	Horizontal	83	2.76	-	32.44	8.02	32.57			
AV	4.82478G	38.39	54.00	-15.61	30.49	3	Horizontal	83	2.76	-	32.45	8.02	32.57			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2437MHz_TX

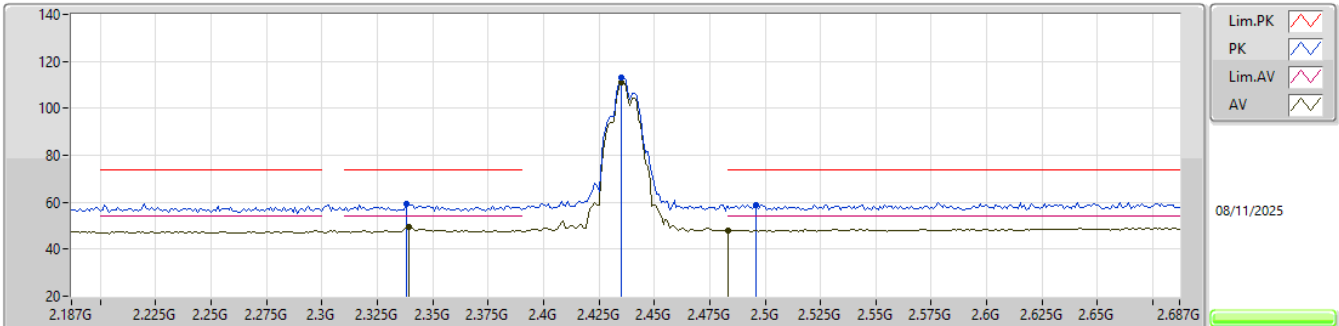


EUT Y_2TX
Setting 23
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.338G	59.23	74.00	-14.77	26.69	3	Vertical	14	2.63	-	27.30	5.24	-			
AV	2.339G	49.64	54.00	-4.36	17.10	3	Vertical	14	2.63	-	27.30	5.24	-			
PK	2.435G	113.27	Inf	-Inf	80.26	3	Vertical	14	2.63	-	27.60	5.41	-			
AV	2.435G	111.01	Inf	-Inf	78.00	3	Vertical	14	2.63	-	27.60	5.41	-			
PK	2.496G	59.05	74.00	-14.95	25.58	3	Vertical	14	2.63	-	28.00	5.47	-			
AV	2.4835G	48.14	54.00	-5.86	14.74	3	Vertical	14	2.63	-	27.94	5.46	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2437MHz_TX

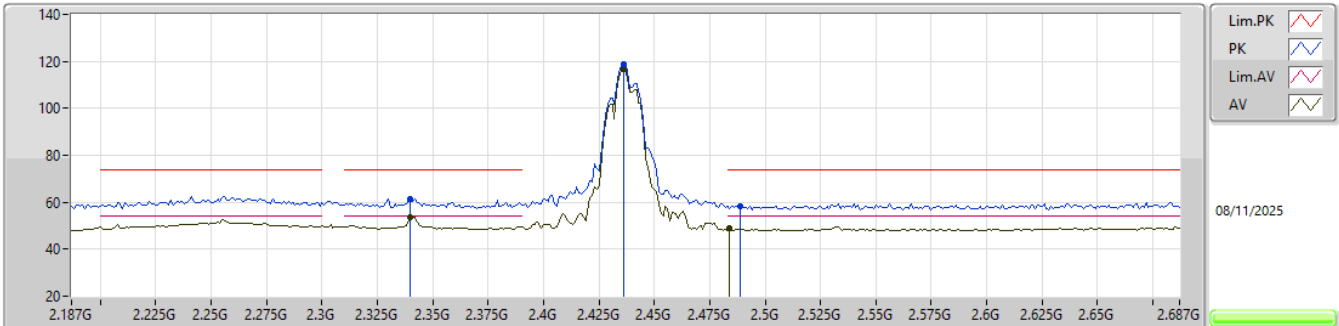


EUT_Y_2TX
Setting 23
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.34G	61.56	74.00	-12.44	29.02	3	Horizontal	296	1.80	-	27.30	5.24	-				
AV	2.34G	53.78	54.00	-0.22	21.24	3	Horizontal	296	1.80	-	27.30	5.24	-				
PK	2.436G	119.00	Inf	-Inf	85.99	3	Horizontal	296	1.80	-	27.60	5.41	-				
AV	2.436G	116.60	Inf	-Inf	83.59	3	Horizontal	296	1.80	-	27.60	5.41	-				
PK	2.489G	58.50	74.00	-15.50	25.05	3	Horizontal	296	1.80	-	27.99	5.46	-				
AV	2.484G	48.88	54.00	-5.12	15.48	3	Horizontal	296	1.80	-	27.94	5.46	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2437MHz_TX

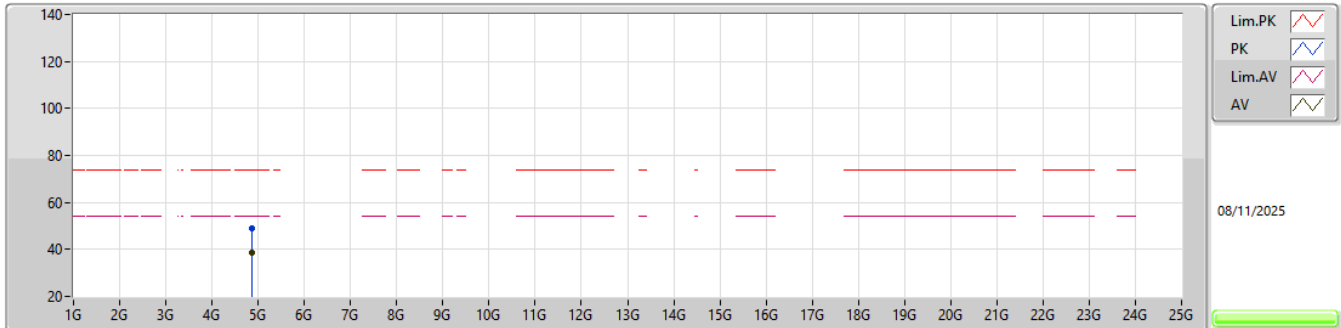


EUT_Y_2TX
Setting 23
01-X-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.87397G	49.21	74.00	-24.79	41.02	3	Vertical	194	2.55	-	32.65	8.11	32.57			
AV	4.87388G	38.41	54.00	-15.59	30.22	3	Vertical	194	2.55	-	32.65	8.11	32.57			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2437MHz_TX

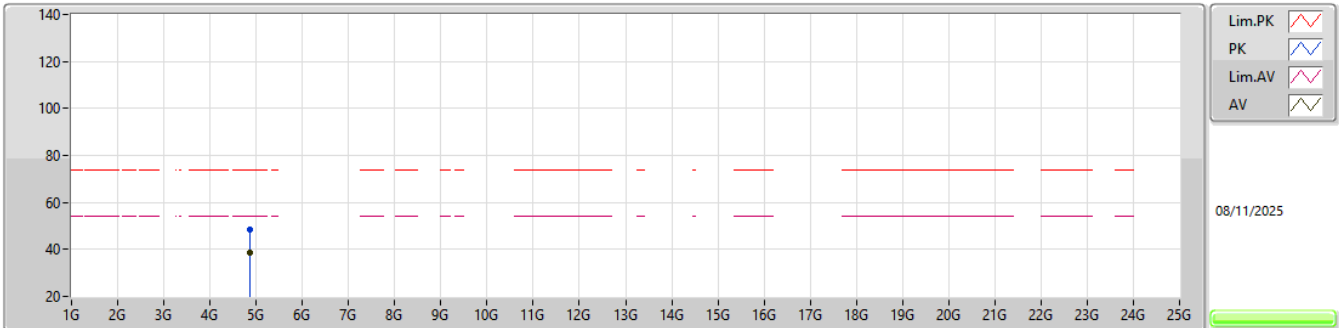


EUT_Y_2TX
Setting 23
01-X-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.87401G	48.59	74.00	-25.41	40.40	3	Horizontal	325	1.03	-	32.65	8.11	32.57			
AV	4.87422G	38.37	54.00	-15.63	30.18	3	Horizontal	325	1.03	-	32.65	8.11	32.57			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2457MHz_TX

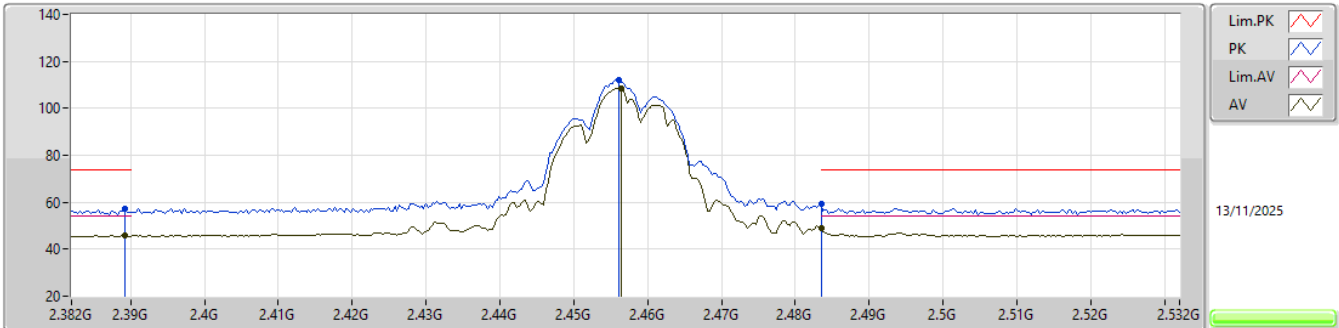


EUT_V_2TX
Setting 23
05-C-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3892G	57.34	74.00	-16.66	25.05	3	Vertical	37	2.62	-	27.29	5.00	-				
AV	2.3892G	45.87	54.00	-8.13	13.58	3	Vertical	37	2.62	-	27.29	5.00	-				
PK	2.4561G	112.30	Inf	-Inf	79.61	3	Vertical	37	2.62	-	27.60	5.09	-				
AV	2.4564G	108.62	Inf	-Inf	75.93	3	Vertical	37	2.62	-	27.60	5.09	-				
PK	2.4835G	59.22	74.00	-14.78	26.25	3	Vertical	37	2.62	-	27.84	5.13	-				
AV	2.4835G	49.05	54.00	-4.95	16.08	3	Vertical	37	2.62	-	27.84	5.13	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2457MHz_TX

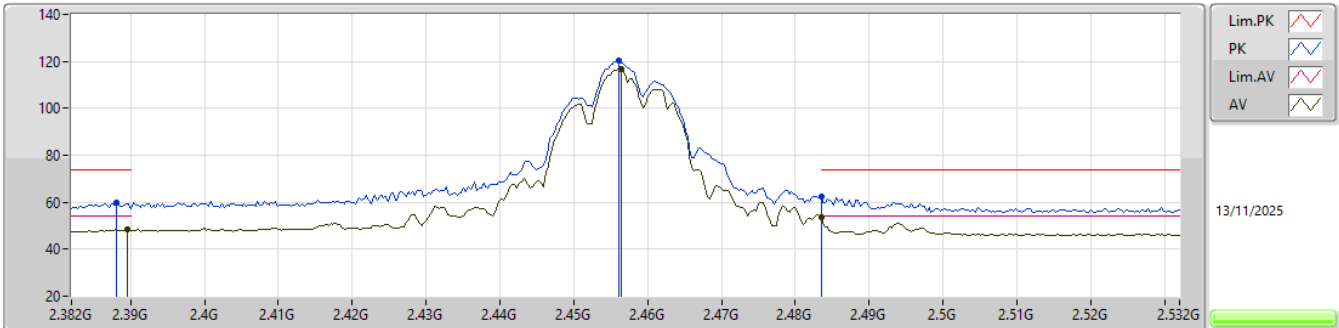


EUT V_2TX
Setting 23
05-C-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.388G	59.59	74.00	-14.41	27.31	3	Horizontal	308	1.80	-	27.28	5.00	-			
AV	2.3895G	48.48	54.00	-5.52	16.19	3	Horizontal	308	1.80	-	27.29	5.00	-			
PK	2.4561G	120.35	Inf	-Inf	87.66	3	Horizontal	308	1.80	-	27.60	5.09	-			
AV	2.4564G	116.71	Inf	-Inf	84.02	3	Horizontal	308	1.80	-	27.60	5.09	-			
PK	2.4835G	62.24	74.00	-11.76	29.27	3	Horizontal	308	1.80	-	27.84	5.13	-			
AV	2.4835G	53.52	54.00	-0.48	20.55	3	Horizontal	308	1.80	-	27.84	5.13	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

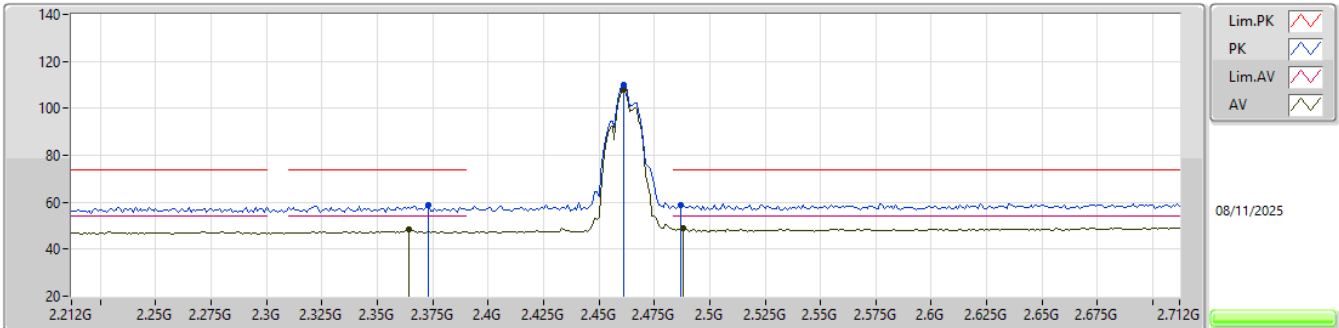


EUT_Y_2TX
Setting 20
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.373G	58.56	74.00	-15.44	25.95	3	Vertical	20	2.83	-	27.30	5.31	-			
AV	2.364G	48.63	54.00	-5.37	15.98	3	Vertical	20	2.83	-	27.36	5.29	-			
PK	2.461G	110.08	Inf	-Inf	77.03	3	Vertical	20	2.83	-	27.62	5.43	-			
AV	2.461G	108.13	Inf	-Inf	75.08	3	Vertical	20	2.83	-	27.62	5.43	-			
PK	2.487G	58.57	74.00	-15.43	25.14	3	Vertical	20	2.83	-	27.97	5.46	-			
AV	2.488G	48.96	54.00	-5.04	15.52	3	Vertical	20	2.83	-	27.98	5.46	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

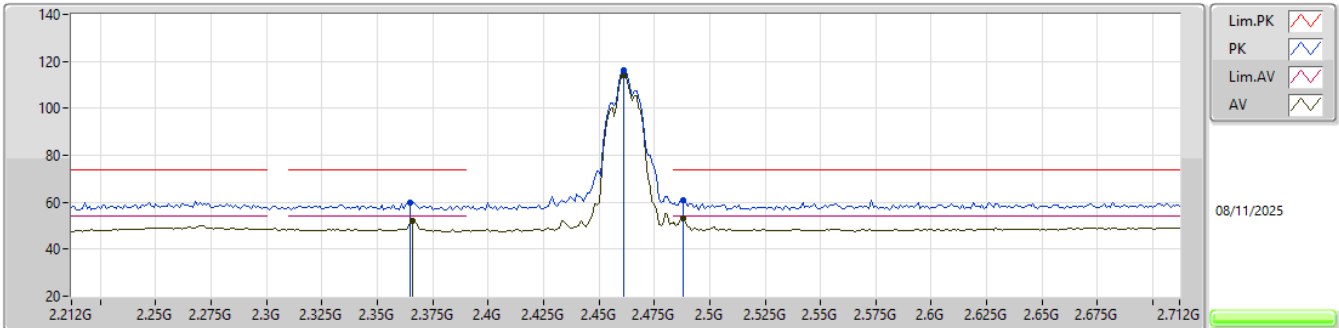


EUT_Y_2TX
Setting 20
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.365G	59.79	74.00	-14.21	27.14	3	Horizontal	294	2.15	-	27.35	5.30	-			
AV	2.366G	51.82	54.00	-2.18	19.18	3	Horizontal	294	2.15	-	27.34	5.30	-			
PK	2.461G	116.37	Inf	-Inf	83.32	3	Horizontal	294	2.15	-	27.62	5.43	-			
AV	2.461G	114.15	Inf	-Inf	81.10	3	Horizontal	294	2.15	-	27.62	5.43	-			
PK	2.488G	60.79	74.00	-13.21	27.35	3	Horizontal	294	2.15	-	27.98	5.46	-			
AV	2.488G	53.23	54.00	-0.77	19.79	3	Horizontal	294	2.15	-	27.98	5.46	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

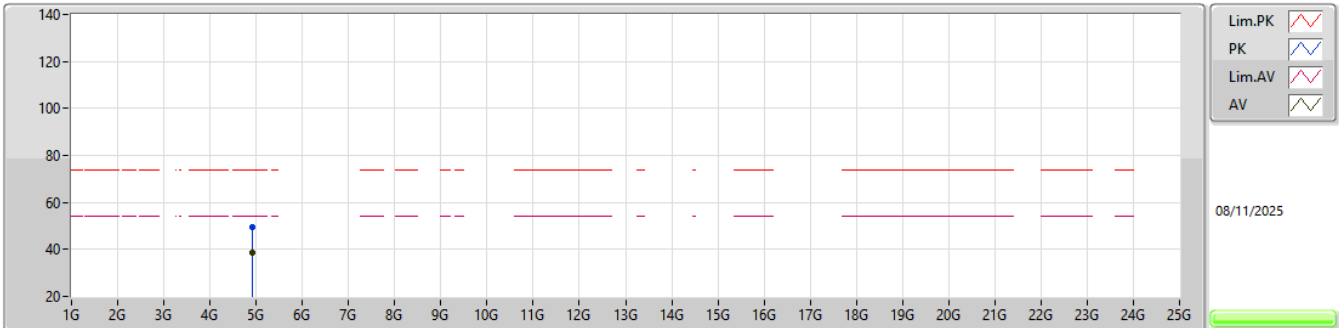


EUT_Y_2TX
Setting 20
01-X-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.92429G	49.69	74.00	-24.31	41.21	3	Vertical	289	2.57	-	32.85	8.21	32.58			
AV	4.92411G	38.41	54.00	-15.59	29.94	3	Vertical	289	2.57	-	32.84	8.21	32.58			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

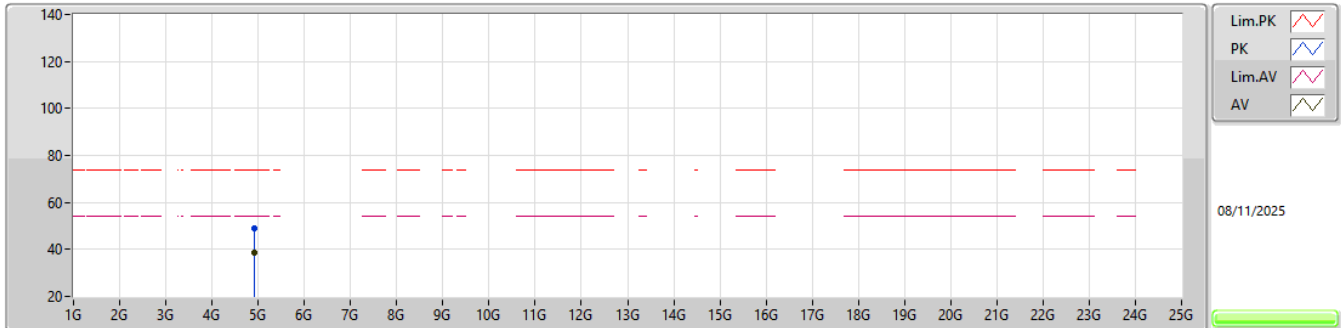


EUT_Y_2TX
Setting 20
01-X-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.92418G	49.21	74.00	-24.79	40.73	3	Horizontal	240	1.05	-	32.85	8.21	32.58			
AV	4.92375G	38.56	54.00	-15.44	30.09	3	Horizontal	240	1.05	-	32.84	8.21	32.58			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2412MHz_TX

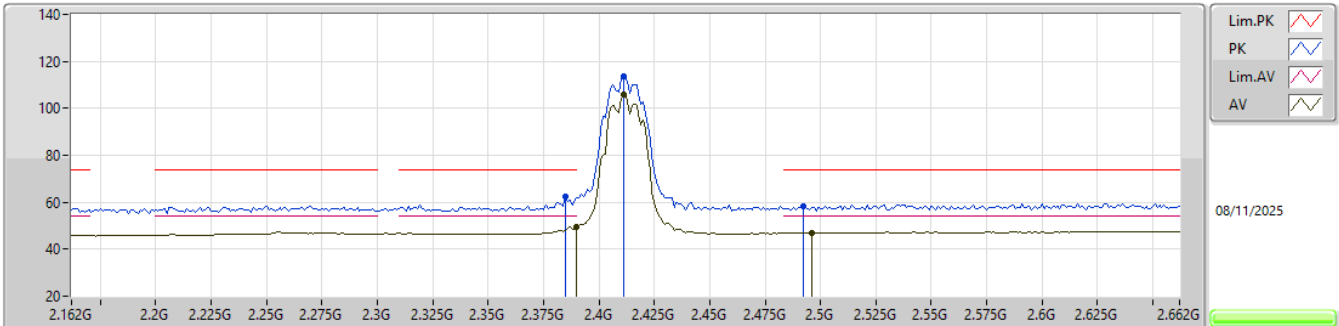


EUT_Y_2TX
Setting 19
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.385G	62.38	74.00	-11.62	29.69	3	Vertical	8	2.80	-	27.35	5.34	-				
AV	2.39G	49.71	54.00	-4.29	16.96	3	Vertical	8	2.80	-	27.40	5.35	-				
PK	2.411G	113.82	Inf	-Inf	80.94	3	Vertical	8	2.80	-	27.50	5.38	-				
AV	2.411G	105.84	Inf	-Inf	72.96	3	Vertical	8	2.80	-	27.50	5.38	-				
PK	2.492G	58.17	74.00	-15.83	24.70	3	Vertical	8	2.80	-	28.00	5.47	-				
AV	2.496G	46.92	54.00	-7.08	13.45	3	Vertical	8	2.80	-	28.00	5.47	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2412MHz_TX

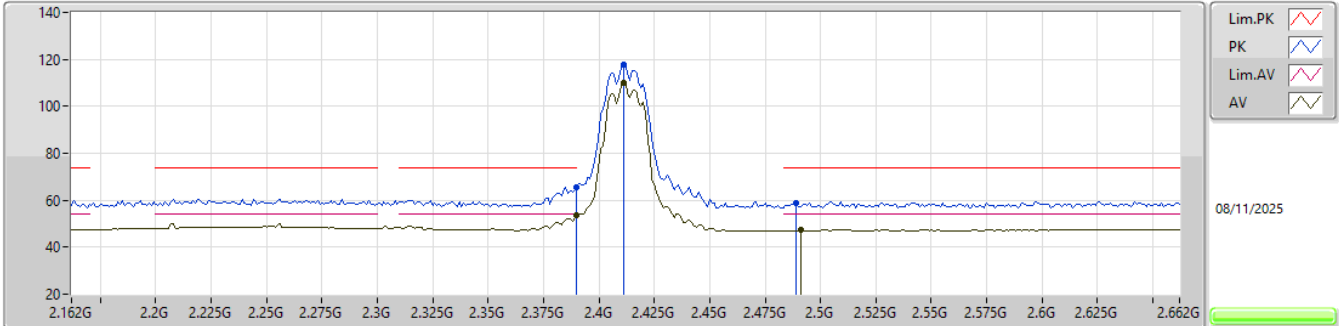


EUT_Y_2TX
Setting 19
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.39G	65.48	74.00	-8.52	32.73	3	Horizontal	40	1.80	-	27.40	5.35	-				
AV	2.39G	53.87	54.00	-0.13	21.12	3	Horizontal	40	1.80	-	27.40	5.35	-				
PK	2.411G	117.87	Inf	-Inf	84.99	3	Horizontal	40	1.80	-	27.50	5.38	-				
AV	2.411G	109.93	Inf	-Inf	77.05	3	Horizontal	40	1.80	-	27.50	5.38	-				
PK	2.489G	58.94	74.00	-15.06	25.49	3	Horizontal	40	1.80	-	27.99	5.46	-				
AV	2.491G	47.21	54.00	-6.79	13.74	3	Horizontal	40	1.80	-	28.00	5.47	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2412MHz_TX

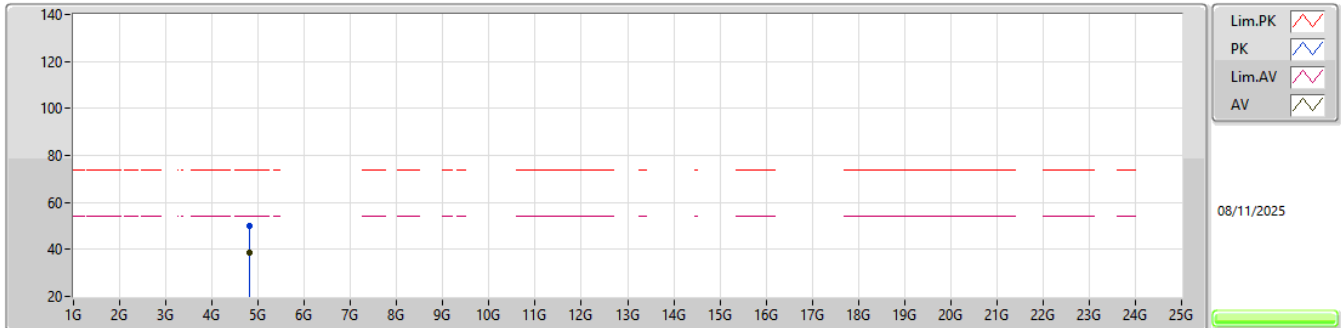


EUT_Y_2TX
Setting 19
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.82438G	49.84	74.00	-24.16	41.94	3	Vertical	274	2.47	-	32.45	8.02	32.57			
AV	4.82466G	38.37	54.00	-15.63	30.47	3	Vertical	274	2.47	-	32.45	8.02	32.57			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2412MHz_TX

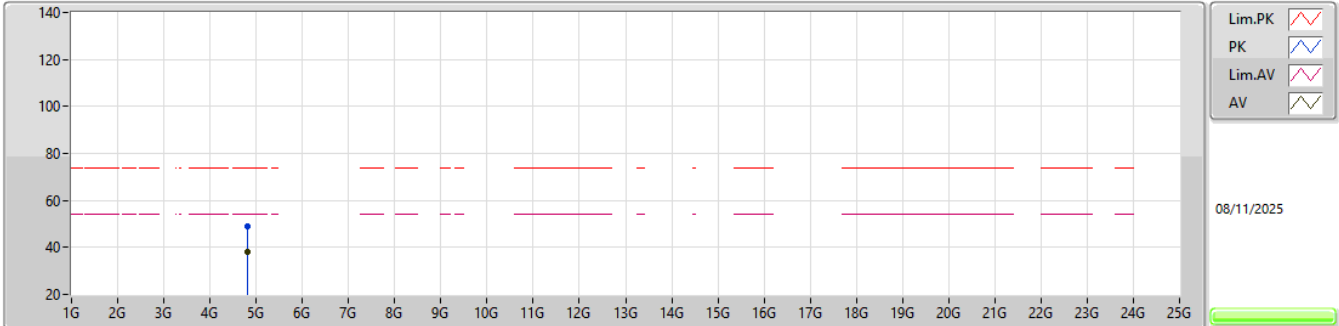


EUT_Y_2TX
Setting 19
01-X-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.82401G	49.08	74.00	-24.92	41.19	3	Horizontal	299	2.25	-	32.44	8.02	32.57			
AV	4.82375G	38.08	54.00	-15.92	30.19	3	Horizontal	299	2.25	-	32.44	8.02	32.57			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2417MHz_TX

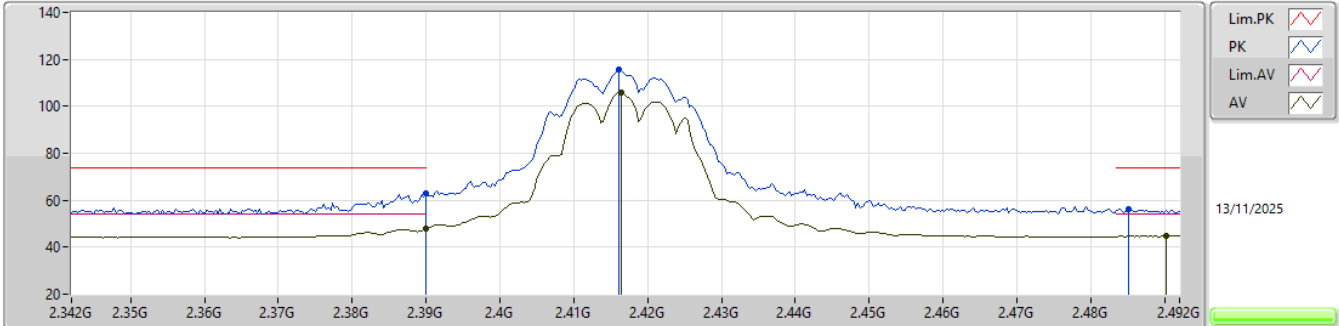


EUT V_2TX
Setting 22.5
05-C-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.39G	62.68	74.00	-11.32	30.38	3	Vertical	22	2.68	-	27.30	5.00	-			
AV	2.39G	47.89	54.00	-6.11	15.59	3	Vertical	22	2.68	-	27.30	5.00	-			
PK	2.4161G	115.49	Inf	-Inf	82.96	3	Vertical	22	2.68	-	27.50	5.03	-			
AV	2.4164G	105.73	Inf	-Inf	73.20	3	Vertical	22	2.68	-	27.50	5.03	-			
PK	2.4851G	56.10	74.00	-17.90	23.12	3	Vertical	22	2.68	-	27.85	5.13	-			
AV	2.4902G	44.70	54.00	-9.30	11.66	3	Vertical	22	2.68	-	27.90	5.14	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2417MHz_TX

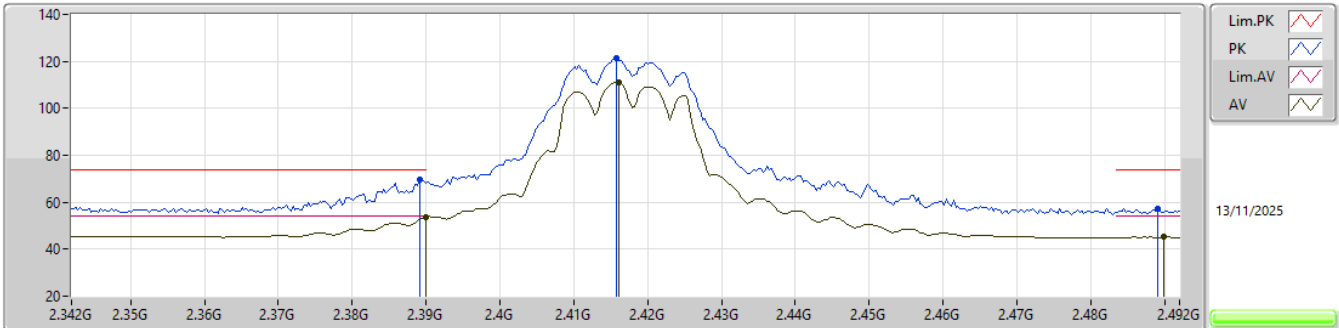


EUT_V_2TX
Setting 22.5
05-C-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3891G	69.54	74.00	-4.46	37.25	3	Horizontal	304	1.80	-	27.29	5.00	-			
AV	2.39G	53.79	54.00	-0.21	21.49	3	Horizontal	304	1.80	-	27.30	5.00	-			
PK	2.4158G	121.31	Inf	-Inf	88.78	3	Horizontal	304	1.80	-	27.50	5.03	-			
AV	2.4161G	110.99	Inf	-Inf	78.46	3	Horizontal	304	1.80	-	27.50	5.03	-			
PK	2.489G	57.33	74.00	-16.67	24.31	3	Horizontal	304	1.80	-	27.89	5.13	-			
AV	2.4899G	45.19	54.00	-8.81	12.15	3	Horizontal	304	1.80	-	27.90	5.14	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2437MHz_TX

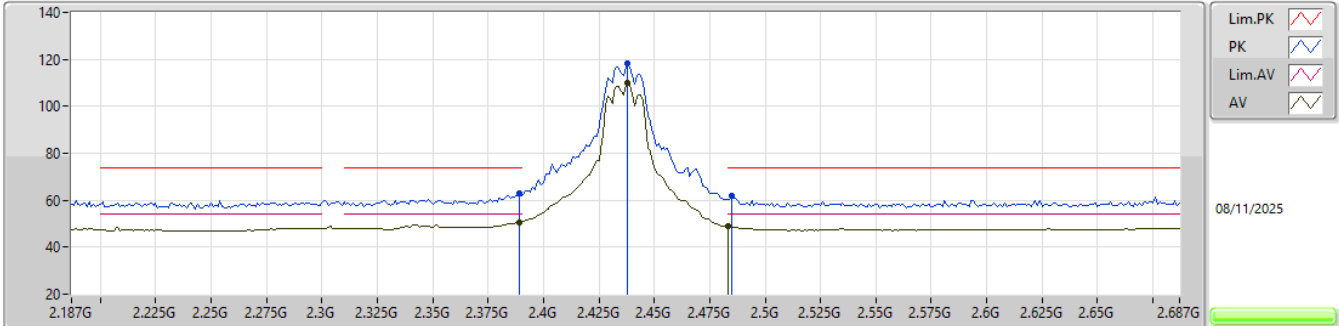


EUT_Y_2TX
Setting 25
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.389G	62.72	74.00	-11.28	29.98	3	Vertical	14	2.64	-	27.39	5.35	-			
AV	2.389G	50.69	54.00	-3.31	17.95	3	Vertical	14	2.64	-	27.39	5.35	-			
PK	2.438G	118.37	Inf	-Inf	85.36	3	Vertical	14	2.64	-	27.60	5.41	-			
AV	2.438G	110.13	Inf	-Inf	77.12	3	Vertical	14	2.64	-	27.60	5.41	-			
PK	2.485G	61.93	74.00	-12.07	28.52	3	Vertical	14	2.64	-	27.95	5.46	-			
AV	2.4835G	48.74	54.00	-5.26	15.34	3	Vertical	14	2.64	-	27.94	5.46	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2437MHz_TX

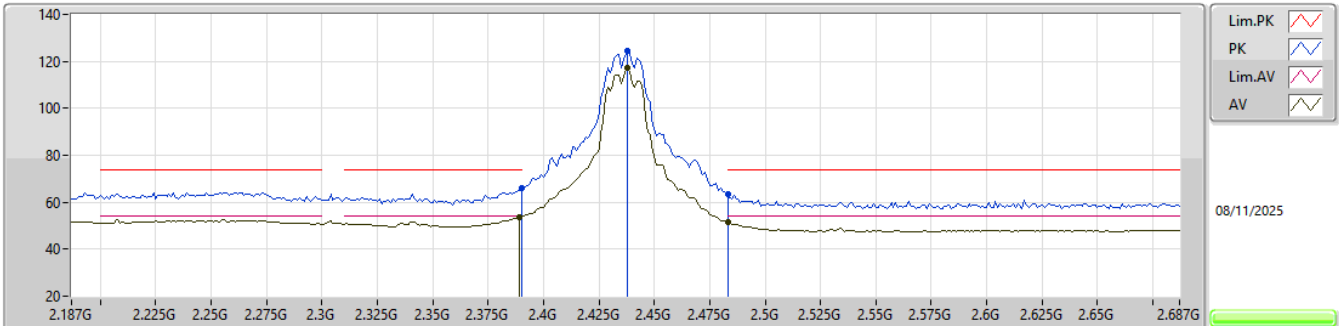


EUT_Y_2TX
Setting 25
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.39G	65.94	74.00	-8.06	33.19	3	Horizontal	43	2.74	-	27.40	5.35	-			
AV	2.389G	53.47	54.00	-0.53	20.73	3	Horizontal	43	2.74	-	27.39	5.35	-			
PK	2.438G	124.73	Inf	-Inf	91.72	3	Horizontal	43	2.74	-	27.60	5.41	-			
AV	2.438G	117.08	Inf	-Inf	84.07	3	Horizontal	43	2.74	-	27.60	5.41	-			
PK	2.4835G	63.23	74.00	-10.77	29.83	3	Horizontal	43	2.74	-	27.94	5.46	-			
AV	2.4835G	51.59	54.00	-2.41	18.19	3	Horizontal	43	2.74	-	27.94	5.46	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2437MHz_TX

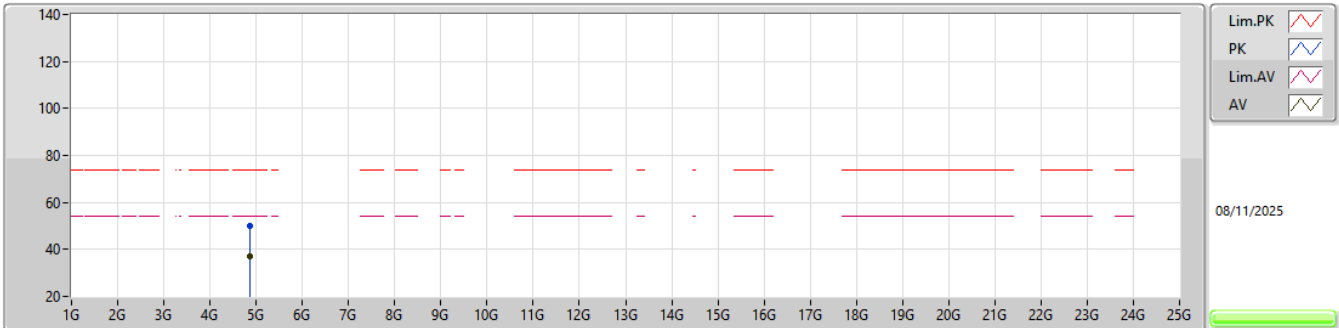


EUT_Y_2TX
Setting 25
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.87251G	50.07	74.00	-23.93	41.88	3	Vertical	125	1.91	-	32.65	8.11	32.57			
AV	4.87357G	37.22	54.00	-16.78	29.03	3	Vertical	125	1.91	-	32.65	8.11	32.57			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2437MHz_TX

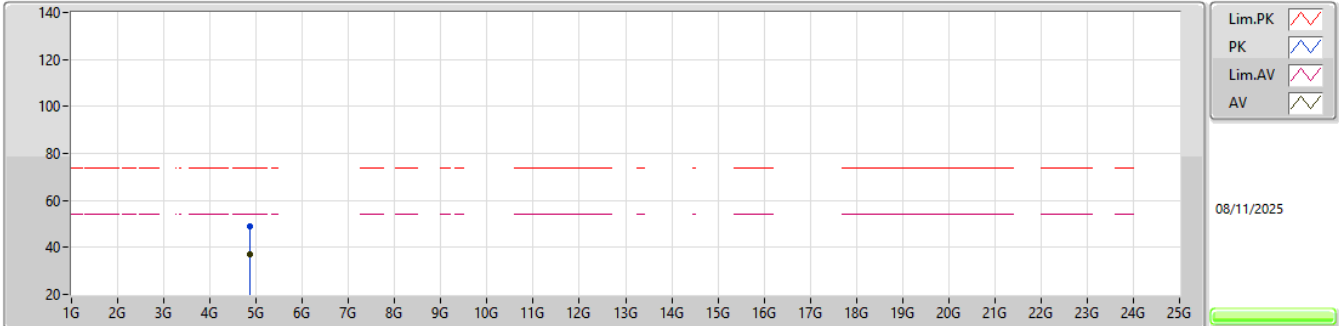


EUT_Y_2TX
Setting 25
01-X-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.87416G	49.19	74.00	-24.81	41.00	3	Horizontal	161	2.04	-	32.65	8.11	32.57			
AV	4.87359G	37.19	54.00	-16.81	29.00	3	Horizontal	161	2.04	-	32.65	8.11	32.57			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2457MHz_TX

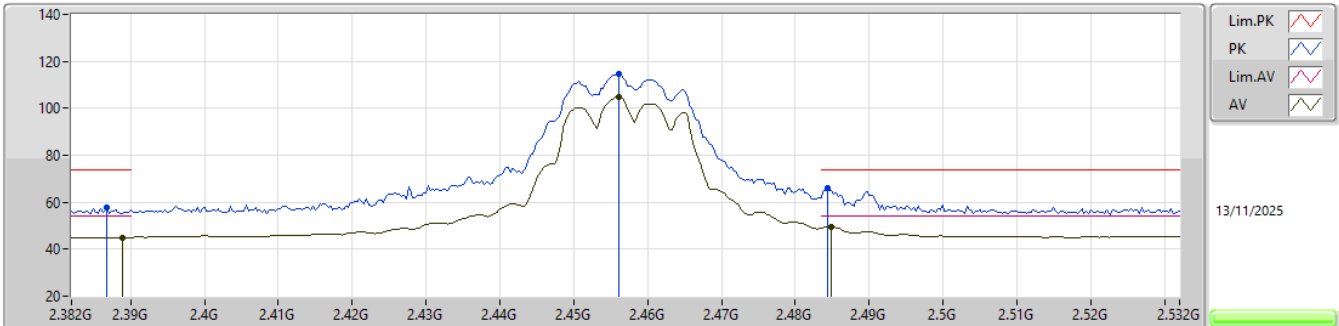


EUT V_2TX
Setting 23
05-C-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3868G	57.57	74.00	-16.43	25.30	3	Vertical	31	2.92	-	27.27	5.00	-				
AV	2.3889G	45.06	54.00	-8.94	12.77	3	Vertical	31	2.92	-	27.29	5.00	-				
PK	2.4561G	114.54	Inf	-Inf	81.85	3	Vertical	31	2.92	-	27.60	5.09	-				
AV	2.4561G	104.74	Inf	-Inf	72.05	3	Vertical	31	2.92	-	27.60	5.09	-				
PK	2.4843G	66.23	74.00	-7.77	33.26	3	Vertical	31	2.92	-	27.84	5.13	-				
AV	2.4849G	49.52	54.00	-4.48	16.54	3	Vertical	31	2.92	-	27.85	5.13	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2457MHz_TX

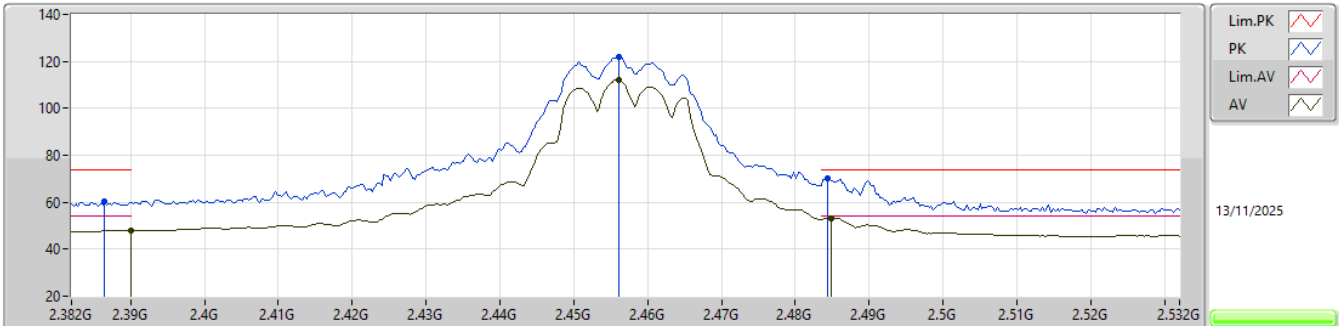


EUT_V_2TX
Setting 23
05-C-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3865G	60.33	74.00	-13.67	28.06	3	Horizontal	56	2.12	-	27.27	5.00	-			
AV	2.39G	48.01	54.00	-5.99	15.71	3	Horizontal	56	2.12	-	27.30	5.00	-			
PK	2.4561G	122.00	Inf	-Inf	89.31	3	Horizontal	56	2.12	-	27.60	5.09	-			
AV	2.4561G	112.11	Inf	-Inf	79.42	3	Horizontal	56	2.12	-	27.60	5.09	-			
PK	2.4843G	70.09	74.00	-3.91	37.12	3	Horizontal	56	2.12	-	27.84	5.13	-			
AV	2.4849G	53.28	54.00	-0.72	20.30	3	Horizontal	56	2.12	-	27.85	5.13	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2462MHz_TX

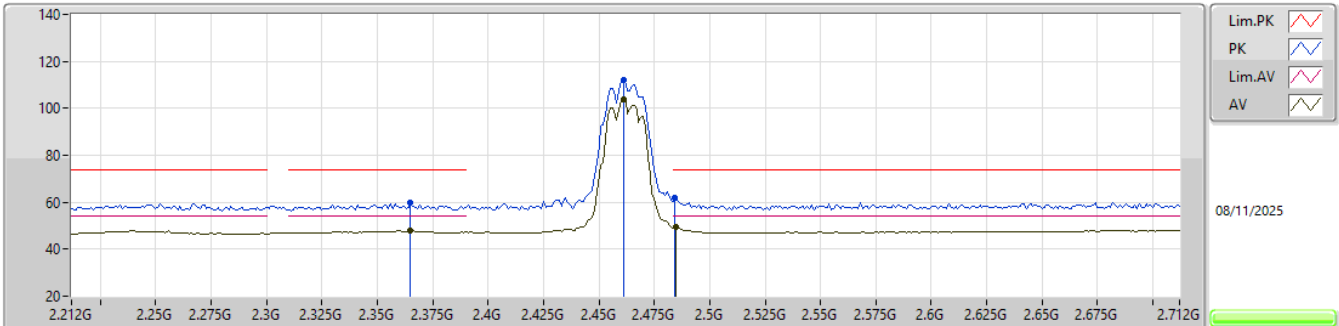


EUT_Y_2TX
Setting 19
01-X-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	2.365G	59.57	74.00	-14.43	26.92	3	Vertical	11	2.82	-	27.35	5.30	-					
AV	2.365G	48.18	54.00	-5.82	15.53	3	Vertical	11	2.82	-	27.35	5.30	-					
PK	2.461G	111.94	Inf	-Inf	78.89	3	Vertical	11	2.82	-	27.62	5.43	-					
AV	2.461G	104.00	Inf	-Inf	70.95	3	Vertical	11	2.82	-	27.62	5.43	-					
PK	2.484G	61.92	74.00	-12.08	28.52	3	Vertical	11	2.82	-	27.94	5.46	-					
AV	2.485G	49.51	54.00	-4.49	16.10	3	Vertical	11	2.82	-	27.95	5.46	-					

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2462MHz_TX

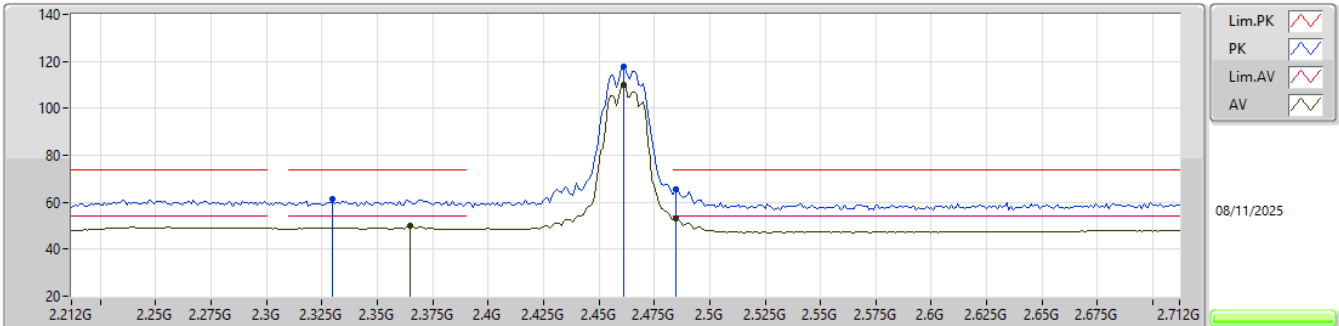


EUT_Y_2TX
Setting 19
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.33G	61.60	74.00	-12.40	29.08	3	Horizontal	43	1.80	-	27.30	5.22	-			
AV	2.365G	50.01	54.00	-3.99	17.36	3	Horizontal	43	1.80	-	27.35	5.30	-			
PK	2.461G	117.94	Inf	-Inf	84.89	3	Horizontal	43	1.80	-	27.62	5.43	-			
AV	2.461G	109.98	Inf	-Inf	76.93	3	Horizontal	43	1.80	-	27.62	5.43	-			
PK	2.485G	65.49	74.00	-8.51	32.08	3	Horizontal	43	1.80	-	27.95	5.46	-			
AV	2.485G	53.18	54.00	-0.82	19.77	3	Horizontal	43	1.80	-	27.95	5.46	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2462MHz_TX

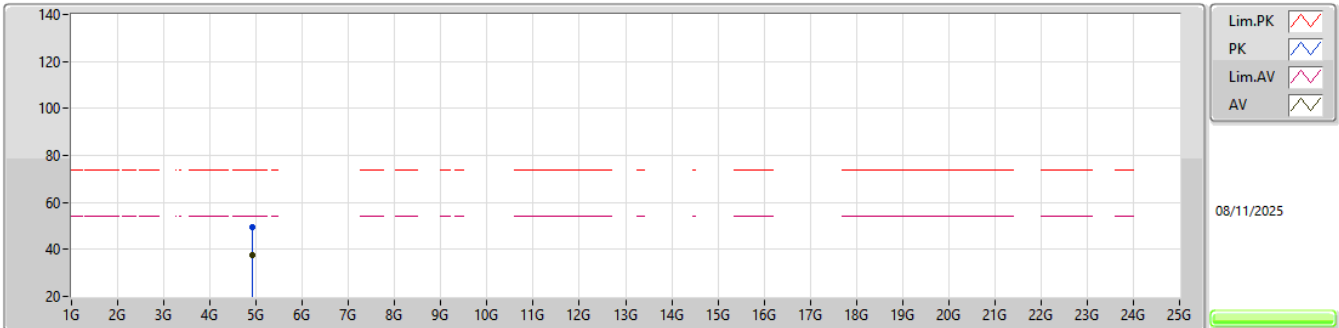


EUT_Y_2TX
Setting 19
01-X-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.92514G	49.39	74.00	-24.61	40.91	3	Vertical	207	2.06	-	32.85	8.21	32.58			
AV	4.92502G	37.53	54.00	-16.47	29.05	3	Vertical	207	2.06	-	32.85	8.21	32.58			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2462MHz_TX

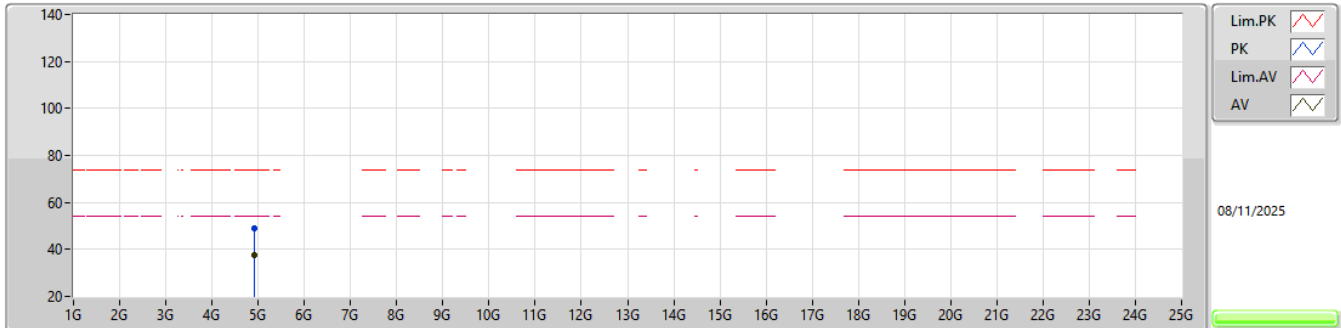


EUT_Y_2TX
Setting 19
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.92473G	49.20	74.00	-24.80	40.72	3	Horizontal	48	2.43	-	32.85	8.21	32.58			
AV	4.92563G	37.33	54.00	-16.67	28.85	3	Horizontal	48	2.43	-	32.85	8.21	32.58			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2412MHz_TX

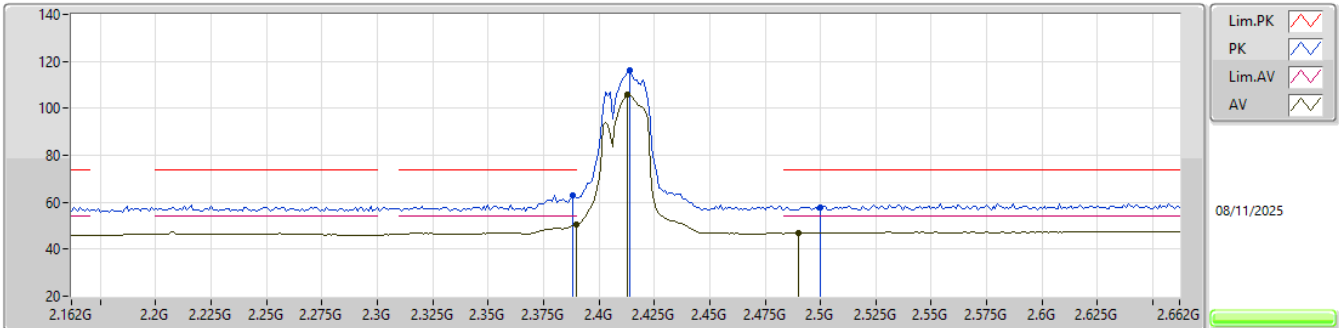


EUT_Y_2TX
Setting 21
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.388G	63.09	74.00	-10.91	30.37	3	Vertical	19	2.92	-	27.38	5.34	-			
AV	2.39G	50.55	54.00	-3.45	17.80	3	Vertical	19	2.92	-	27.40	5.35	-			
PK	2.414G	116.20	Inf	-Inf	83.32	3	Vertical	19	2.92	-	27.50	5.38	-			
AV	2.413G	105.61	Inf	-Inf	72.73	3	Vertical	19	2.92	-	27.50	5.38	-			
PK	2.5G	57.98	74.00	-16.02	24.51	3	Vertical	19	2.92	-	28.00	5.47	-			
AV	2.49G	46.90	54.00	-7.10	13.44	3	Vertical	19	2.92	-	28.00	5.46	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2412MHz_TX

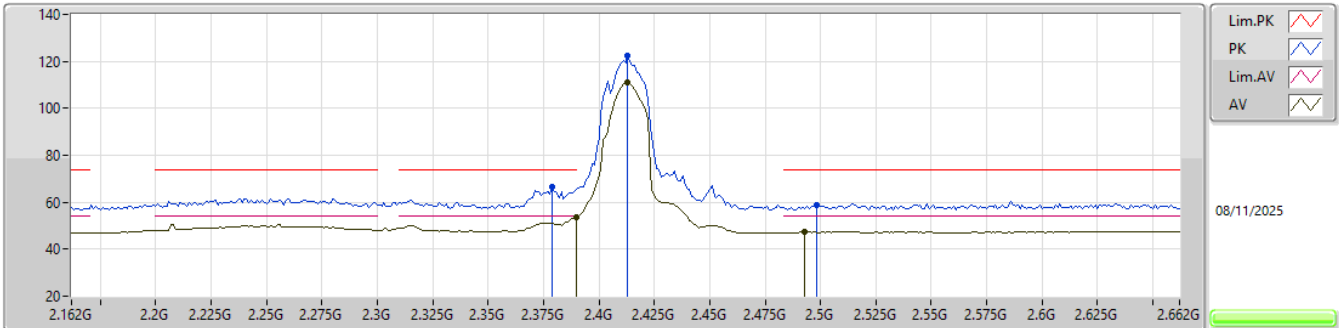


EUT_Y_2TX
Setting 21
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.379G	66.59	74.00	-7.41	33.96	3	Horizontal	298	2.00	-	27.30	5.33	-			
AV	2.39G	53.50	54.00	-0.50	20.75	3	Horizontal	298	2.00	-	27.40	5.35	-			
PK	2.413G	122.31	Inf	-Inf	89.43	3	Horizontal	298	2.00	-	27.50	5.38	-			
AV	2.413G	111.22	Inf	-Inf	78.34	3	Horizontal	298	2.00	-	27.50	5.38	-			
PK	2.498G	58.55	74.00	-15.45	25.08	3	Horizontal	298	2.00	-	28.00	5.47	-			
AV	2.493G	47.21	54.00	-6.79	13.74	3	Horizontal	298	2.00	-	28.00	5.47	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2412MHz_TX

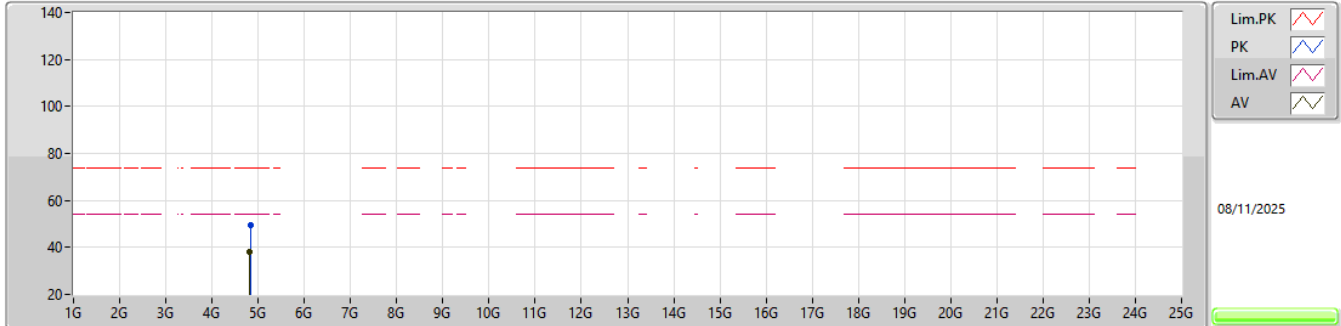


EUT_Y_2TX
Setting 21
01-X-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.82481G	49.35	74.00	-24.65	41.45	3	Vertical	359	1.80	-	32.45	8.02	32.57			
AV	4.82356G	37.97	54.00	-16.03	30.08	3	Vertical	359	1.80	-	32.44	8.02	32.57			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2412MHz_TX

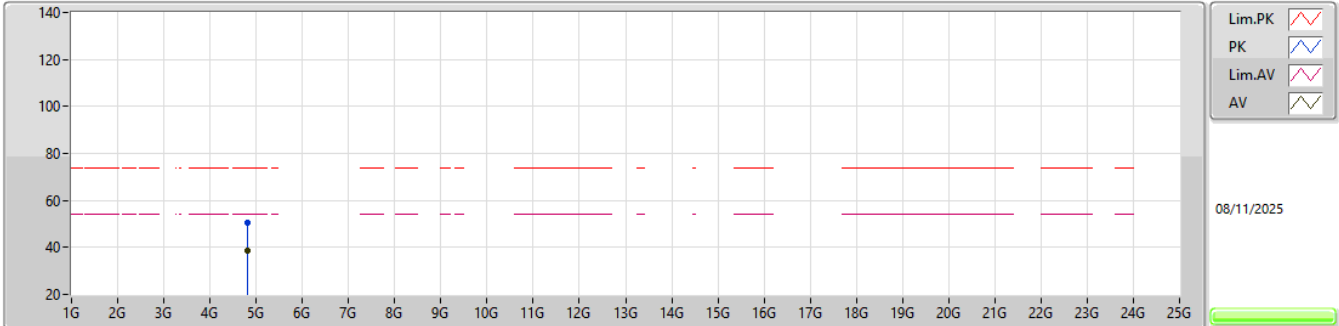


EUT_Y_2TX
Setting 21
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.82418G	50.28	74.00	-23.72	42.38	3	Horizontal	199	2.30	-	32.45	8.02	32.57			
AV	4.82458G	38.49	54.00	-15.51	30.59	3	Horizontal	199	2.30	-	32.45	8.02	32.57			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2417MHz_TX

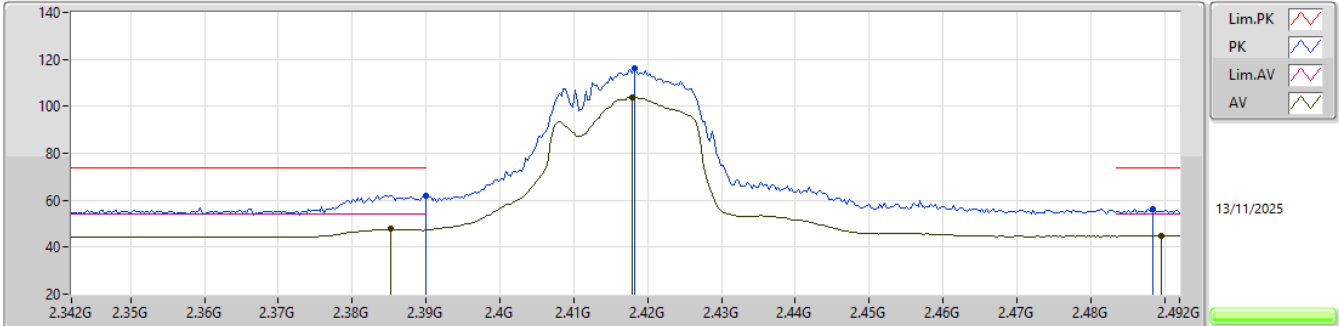


EUT V_2TX
Setting 22.5
05-C-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.39G	61.97	74.00	-12.03	29.67	3	Vertical	36	2.72	-	27.30	5.00	-			
AV	2.3852G	47.71	54.00	-6.29	15.46	3	Vertical	36	2.72	-	27.25	5.00	-			
PK	2.4182G	116.25	Inf	-Inf	83.71	3	Vertical	36	2.72	-	27.50	5.04	-			
AV	2.4179G	104.02	Inf	-Inf	71.48	3	Vertical	36	2.72	-	27.50	5.04	-			
PK	2.4884G	56.08	74.00	-17.92	23.07	3	Vertical	36	2.72	-	27.88	5.13	-			
AV	2.4896G	44.84	54.00	-9.16	11.80	3	Vertical	36	2.72	-	27.90	5.14	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2417MHz_TX

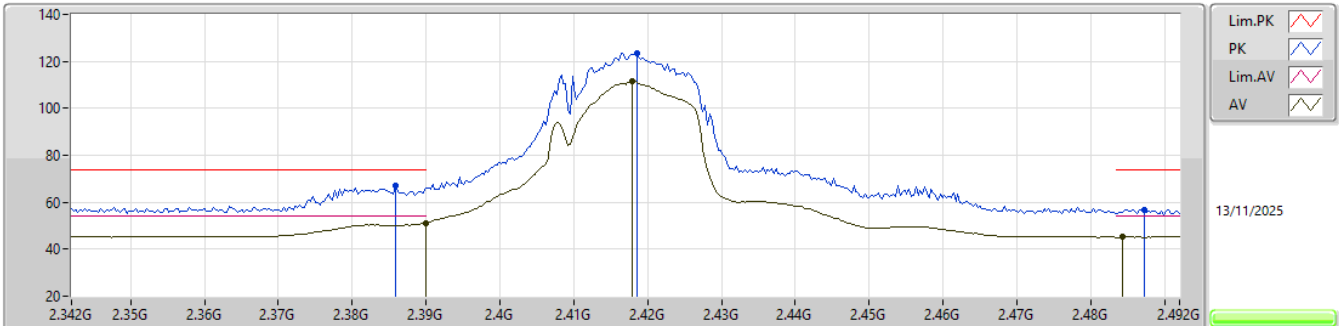


EUT_V_2TX
Setting 22.5
05-C-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3858G	67.22	74.00	-6.78	34.96	3	Horizontal	309	2.05	-	27.26	5.00	-			
AV	2.39G	51.27	54.00	-2.73	18.97	3	Horizontal	309	2.05	-	27.30	5.00	-			
PK	2.4185G	123.27	Inf	-Inf	90.73	3	Horizontal	309	2.05	-	27.50	5.04	-			
AV	2.4179G	111.32	Inf	-Inf	78.78	3	Horizontal	309	2.05	-	27.50	5.04	-			
PK	2.4872G	56.93	74.00	-17.07	23.93	3	Horizontal	309	2.05	-	27.87	5.13	-			
AV	2.4842G	45.31	54.00	-8.69	12.34	3	Horizontal	309	2.05	-	27.84	5.13	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2437MHz_TX

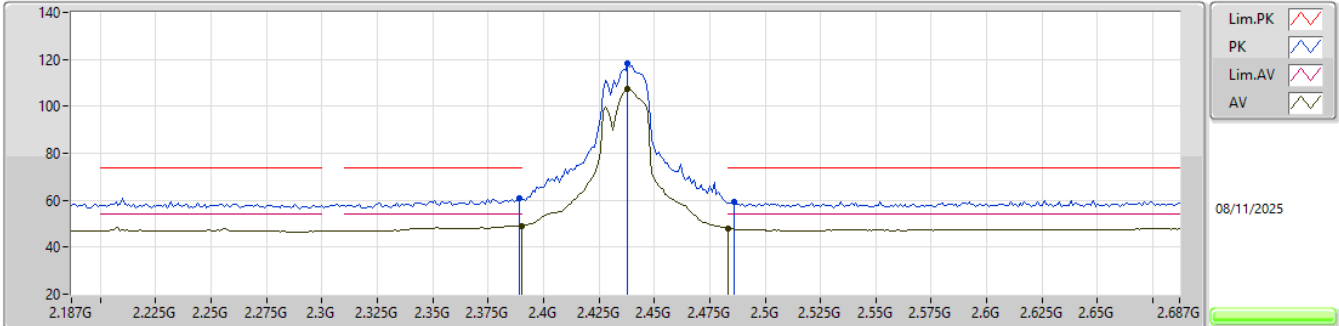


EUT_Y_2TX
Setting 24
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.389G	60.67	74.00	-13.33	27.93	3	Vertical	21	2.55	-	27.39	5.35	-				
AV	2.39G	49.04	54.00	-4.96	16.29	3	Vertical	21	2.55	-	27.40	5.35	-				
PK	2.438G	118.51	Inf	-Inf	85.50	3	Vertical	21	2.55	-	27.60	5.41	-				
AV	2.438G	107.18	Inf	-Inf	74.17	3	Vertical	21	2.55	-	27.60	5.41	-				
PK	2.486G	59.51	74.00	-14.49	26.09	3	Vertical	21	2.55	-	27.96	5.46	-				
AV	2.4835G	48.14	54.00	-5.86	14.74	3	Vertical	21	2.55	-	27.94	5.46	-				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2437MHz_TX

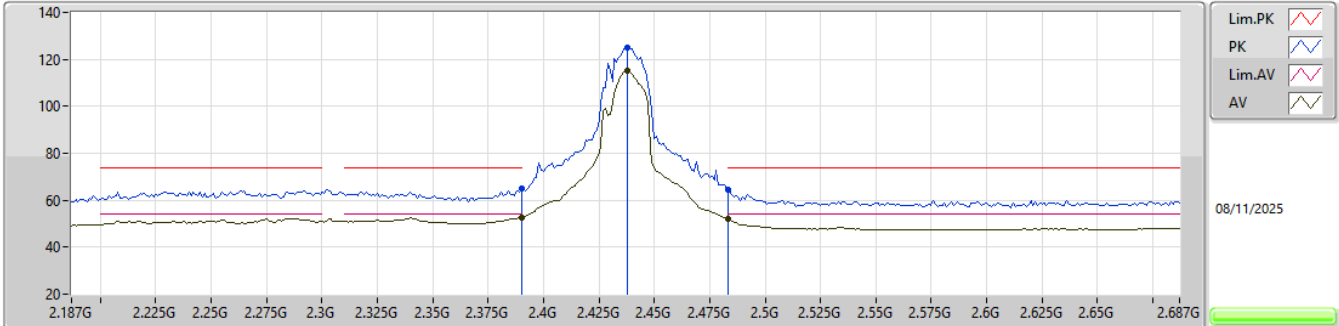


EUT_Y_2TX
Setting 24
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.39G	64.91	74.00	-9.09	32.16	3	Horizontal	292	2.36	-	27.40	5.35	-			
AV	2.39G	52.55	54.00	-1.45	19.80	3	Horizontal	292	2.36	-	27.40	5.35	-			
PK	2.438G	124.95	Inf	-Inf	91.94	3	Horizontal	292	2.36	-	27.60	5.41	-			
AV	2.438G	115.18	Inf	-Inf	82.17	3	Horizontal	292	2.36	-	27.60	5.41	-			
PK	2.4835G	64.32	74.00	-9.68	30.92	3	Horizontal	292	2.36	-	27.94	5.46	-			
AV	2.4835G	51.86	54.00	-2.14	18.46	3	Horizontal	292	2.36	-	27.94	5.46	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2437MHz_TX

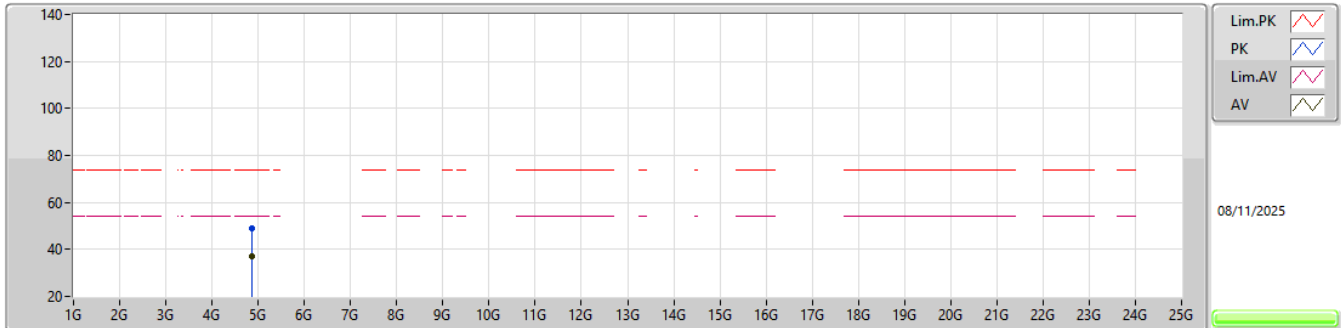


EUT_Y_2TX
Setting 24
01-X-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.87396G	49.20	74.00	-24.80	41.01	3	Vertical	334	1.80	-	32.65	8.11	32.57			
AV	4.87398G	37.09	54.00	-16.91	28.90	3	Vertical	334	1.80	-	32.65	8.11	32.57			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2437MHz_TX

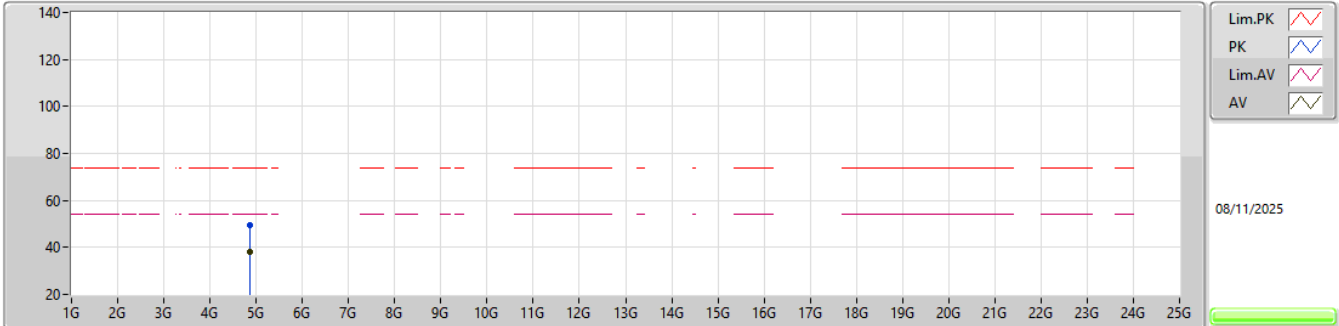


EUT_Y_2TX
Setting 24
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.87372G	49.64	74.00	-24.36	41.45	3	Horizontal	328	2.53	-	32.65	8.11	32.57			
AV	4.87461G	37.91	54.00	-16.09	29.71	3	Horizontal	328	2.53	-	32.65	8.12	32.57			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2457MHz_TX

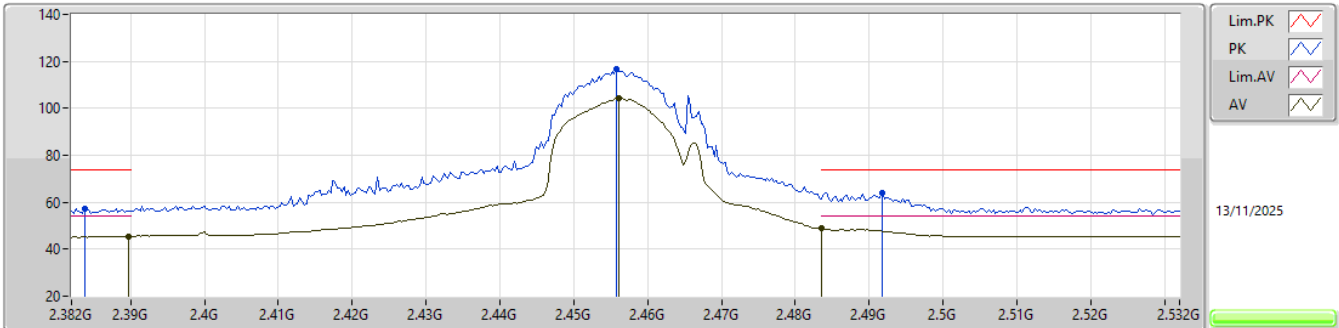


EUT_V_2TX
Setting 22.5
05-C-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3838G	57.25	74.00	-16.75	25.02	3	Vertical	18	2.91	-	27.24	4.99	-				
AV	2.3898G	45.57	54.00	-8.43	13.27	3	Vertical	18	2.91	-	27.30	5.00	-				
PK	2.4558G	116.58	Inf	-Inf	83.89	3	Vertical	18	2.91	-	27.60	5.09	-				
AV	2.4561G	104.39	Inf	-Inf	71.70	3	Vertical	18	2.91	-	27.60	5.09	-				
PK	2.4918G	64.19	74.00	-9.81	31.13	3	Vertical	18	2.91	-	27.92	5.14	-				
AV	2.4835G	48.75	54.00	-5.25	15.78	3	Vertical	18	2.91	-	27.84	5.13	-				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2457MHz_TX

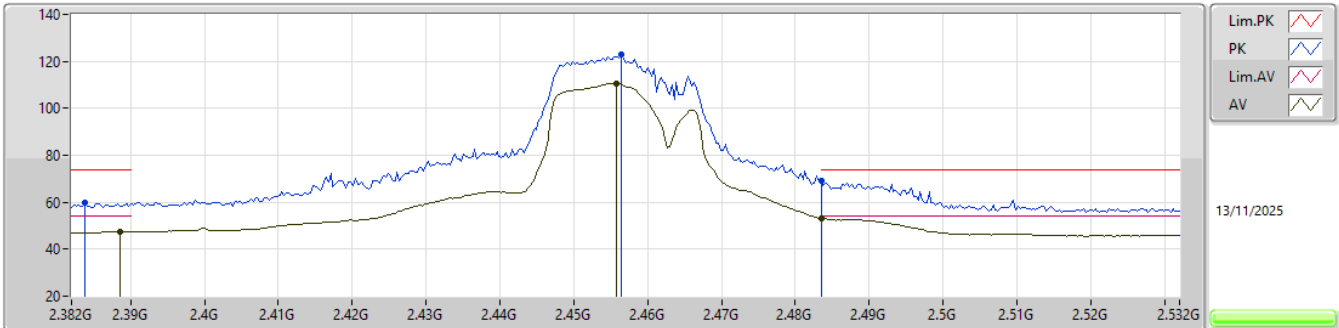


EUT_V_2TX
Setting 22.5
05-C-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3838G	60.07	74.00	-13.93	27.84	3	Horizontal	57	1.85	-	27.24	4.99	-			
AV	2.3886G	47.45	54.00	-6.55	15.16	3	Horizontal	57	1.85	-	27.29	5.00	-			
PK	2.4564G	123.13	Inf	-Inf	90.44	3	Horizontal	57	1.85	-	27.60	5.09	-			
AV	2.4558G	110.70	Inf	-Inf	78.01	3	Horizontal	57	1.85	-	27.60	5.09	-			
PK	2.4835G	69.35	74.00	-4.65	36.38	3	Horizontal	57	1.85	-	27.84	5.13	-			
AV	2.4835G	53.07	54.00	-0.93	20.10	3	Horizontal	57	1.85	-	27.84	5.13	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2462MHz_TX

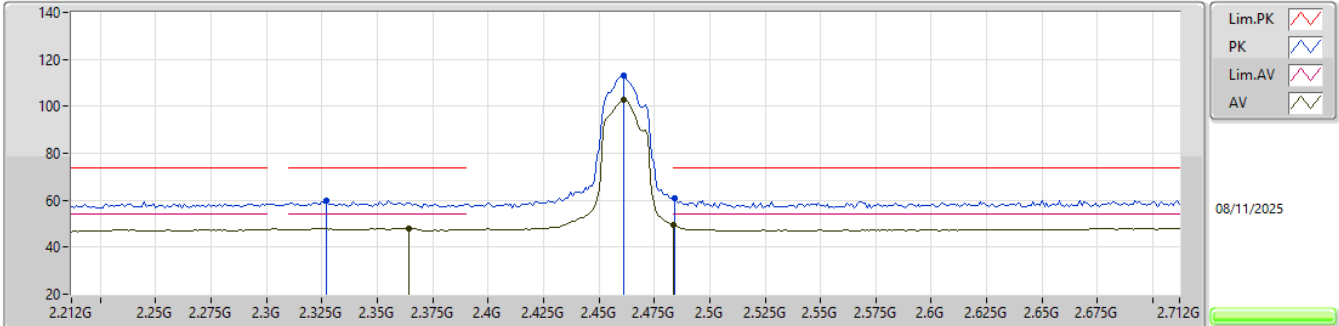


EUT_Y_2TX
Setting 18.5
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.327G	59.83	74.00	-14.17	27.31	3	Vertical	5	2.92	-	27.30	5.22	-			
AV	2.364G	48.10	54.00	-5.90	15.45	3	Vertical	5	2.92	-	27.36	5.29	-			
PK	2.461G	113.03	Inf	-Inf	79.98	3	Vertical	5	2.92	-	27.62	5.43	-			
AV	2.461G	102.72	Inf	-Inf	69.67	3	Vertical	5	2.92	-	27.62	5.43	-			
PK	2.484G	60.98	74.00	-13.02	27.58	3	Vertical	5	2.92	-	27.94	5.46	-			
AV	2.4835G	49.51	54.00	-4.49	16.11	3	Vertical	5	2.92	-	27.94	5.46	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2462MHz_TX

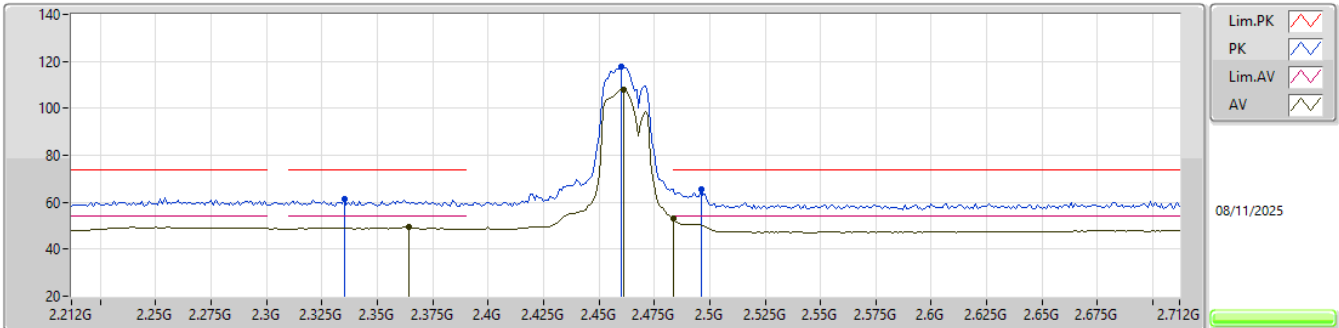


EUT_Y_2TX
Setting 18.5
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.335G	61.20	74.00	-12.80	28.67	3	Horizontal	41	1.80	-	27.30	5.23	-			
AV	2.364G	49.43	54.00	-4.57	16.78	3	Horizontal	41	1.80	-	27.36	5.29	-			
PK	2.46G	117.89	Inf	-Inf	84.86	3	Horizontal	41	1.80	-	27.60	5.43	-			
AV	2.461G	108.13	Inf	-Inf	75.08	3	Horizontal	41	1.80	-	27.62	5.43	-			
PK	2.496G	65.44	74.00	-8.56	31.97	3	Horizontal	41	1.80	-	28.00	5.47	-			
AV	2.4835G	53.22	54.00	-0.78	19.82	3	Horizontal	41	1.80	-	27.94	5.46	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2462MHz_TX

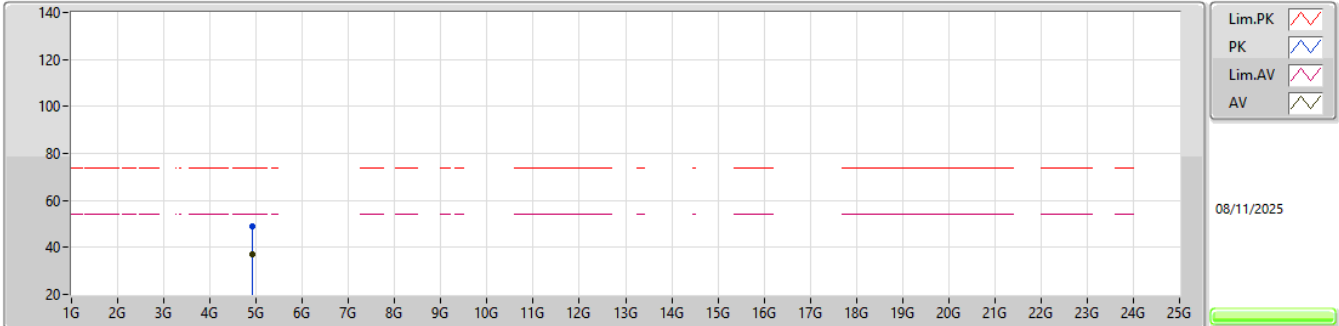


EUT_Y_2TX
Setting 18.5
01-X-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.92391G	48.99	74.00	-25.01	40.52	3	Vertical	95	1.72	-	32.84	8.21	32.58			
AV	4.92404G	37.13	54.00	-16.87	28.66	3	Vertical	95	1.72	-	32.84	8.21	32.58			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2462MHz_TX

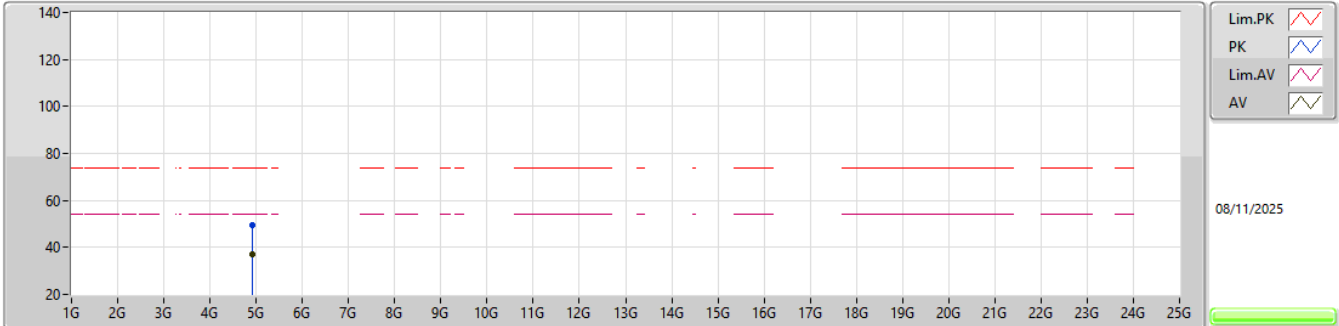


EUT_Y_2TX
Setting 18.5
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.92441G	49.23	74.00	-24.77	40.75	3	Horizontal	266	2.02	-	32.85	8.21	32.58			
AV	4.92394G	37.08	54.00	-16.92	28.61	3	Horizontal	266	2.02	-	32.84	8.21	32.58			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2422MHz_TX

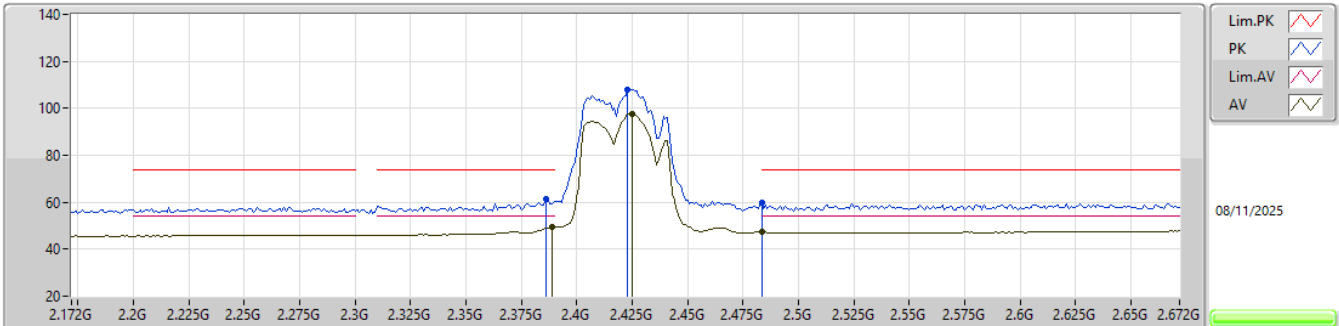


EUT_Y_2TX
Setting 16.5
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.386G	61.62	74.00	-12.38	28.92	3	Vertical	19	2.88	-	27.36	5.34	-			
AV	2.389G	49.34	54.00	-4.66	16.60	3	Vertical	19	2.88	-	27.39	5.35	-			
PK	2.423G	108.04	Inf	-Inf	75.12	3	Vertical	19	2.88	-	27.53	5.39	-			
AV	2.425G	97.49	Inf	-Inf	64.54	3	Vertical	19	2.88	-	27.55	5.40	-			
PK	2.4835G	59.72	74.00	-14.28	26.32	3	Vertical	19	2.88	-	27.94	5.46	-			
AV	2.4835G	47.28	54.00	-6.72	13.88	3	Vertical	19	2.88	-	27.94	5.46	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2422MHz_TX

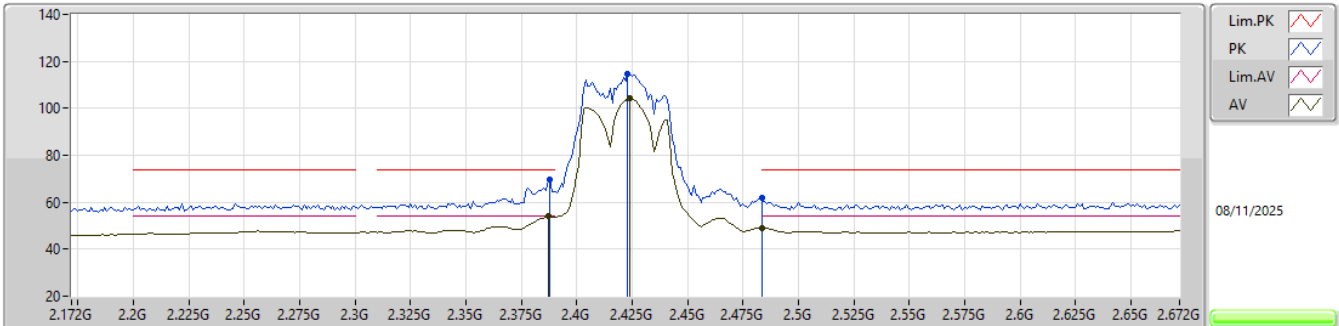


EUT_Y_2TX
Setting 16.5
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.388G	69.43	74.00	-4.57	36.71	3	Horizontal	296	1.80	-	27.38	5.34	-				
AV	2.387G	53.99	54.00	-0.01	21.28	3	Horizontal	296	1.80	-	27.37	5.34	-				
PK	2.423G	114.73	Inf	-Inf	81.81	3	Horizontal	296	1.80	-	27.53	5.39	-				
AV	2.424G	104.24	Inf	-Inf	71.30	3	Horizontal	296	1.80	-	27.54	5.40	-				
PK	2.4835G	61.86	74.00	-12.14	28.46	3	Horizontal	296	1.80	-	27.94	5.46	-				
AV	2.4835G	49.12	54.00	-4.88	15.72	3	Horizontal	296	1.80	-	27.94	5.46	-				

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2422MHz_TX

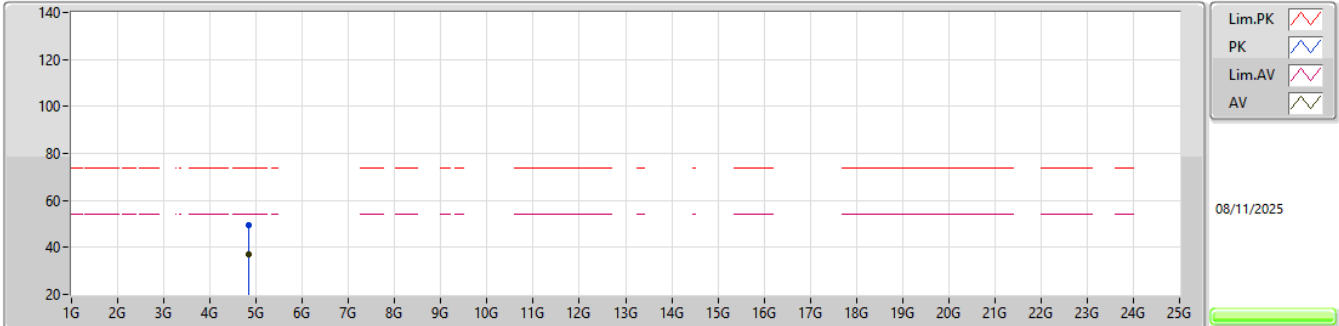


EUT_Y_2TX
Setting 16.5
01-X-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.84379G	49.24	74.00	-24.76	41.19	3	Vertical	3	1.80	-	32.56	8.06	32.57			
AV	4.84399G	37.24	54.00	-16.76	29.19	3	Vertical	3	1.80	-	32.56	8.06	32.57			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2422MHz_TX

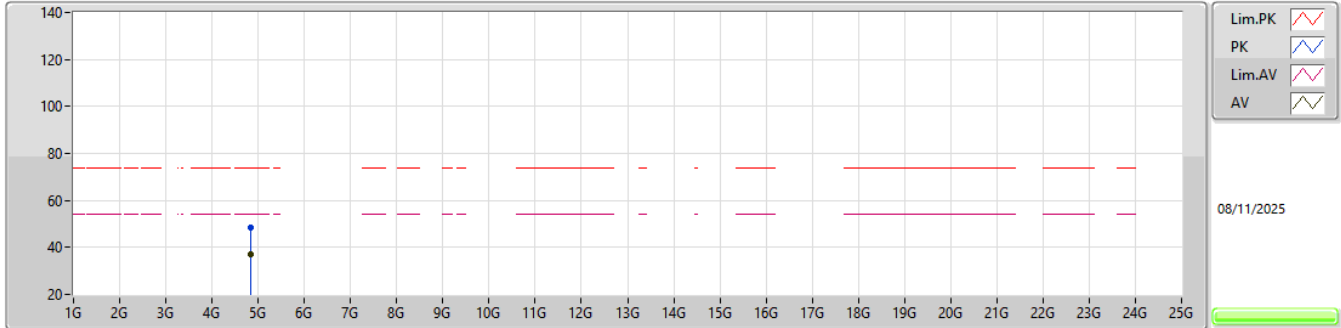


EUT_Y_2TX
Setting 16.5
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.84491G	48.64	74.00	-25.36	40.58	3	Horizontal	229	1.23	-	32.57	8.06	32.57			
AV	4.84359G	37.04	54.00	-16.96	28.99	3	Horizontal	229	1.23	-	32.56	8.06	32.57			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2427MHz_TX

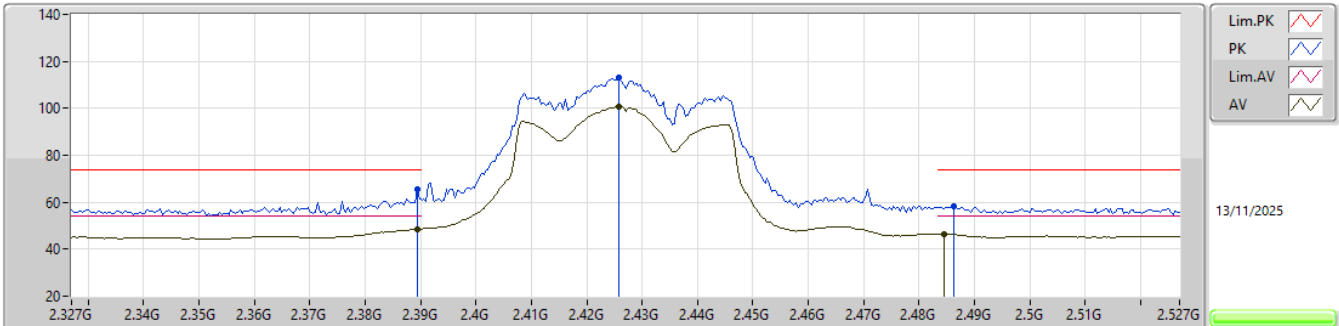


EUT V_2TX
Setting 20
05-C-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3894G	65.38	74.00	-8.62	33.09	3	Vertical	21	2.61	-	27.29	5.00	-			
AV	2.3894G	48.61	54.00	-5.39	16.32	3	Vertical	21	2.61	-	27.29	5.00	-			
PK	2.4258G	112.96	Inf	-Inf	80.35	3	Vertical	21	2.61	-	27.56	5.05	-			
AV	2.4258G	100.80	Inf	-Inf	68.19	3	Vertical	21	2.61	-	27.56	5.05	-			
PK	2.4862G	58.18	74.00	-15.82	25.19	3	Vertical	21	2.61	-	27.86	5.13	-			
AV	2.4846G	46.45	54.00	-7.55	13.47	3	Vertical	21	2.61	-	27.85	5.13	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2427MHz_TX

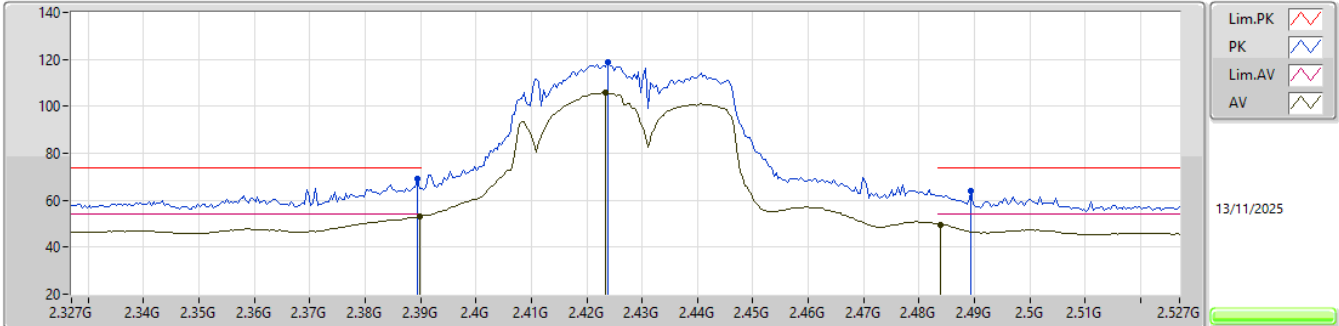


EUT V_2TX
Setting 20
05-C-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3894G	69.33	74.00	-4.67	37.04	3	Horizontal	304	1.80	-	27.29	5.00	-			
AV	2.3898G	52.87	54.00	-1.13	20.57	3	Horizontal	304	1.80	-	27.30	5.00	-			
PK	2.4238G	118.84	Inf	-Inf	86.26	3	Horizontal	304	1.80	-	27.54	5.04	-			
AV	2.4234G	105.73	Inf	-Inf	73.16	3	Horizontal	304	1.80	-	27.53	5.04	-			
PK	2.4894G	63.86	74.00	-10.14	30.83	3	Horizontal	304	1.80	-	27.89	5.14	-			
AV	2.4838G	49.73	54.00	-4.27	16.76	3	Horizontal	304	1.80	-	27.84	5.13	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2437MHz_TX

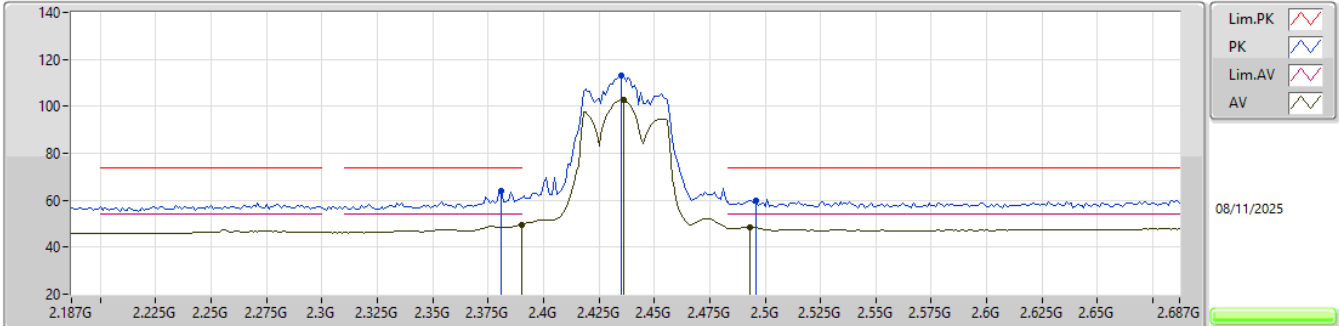


EUT_Y_2TX
Setting 20.5
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.381G	63.97	74.00	-10.03	31.33	3	Vertical	6	2.55	-	27.31	5.33	-			
AV	2.39G	49.52	54.00	-4.48	16.77	3	Vertical	6	2.55	-	27.40	5.35	-			
PK	2.435G	113.29	Inf	-Inf	80.28	3	Vertical	6	2.55	-	27.60	5.41	-			
AV	2.436G	102.75	Inf	-Inf	69.74	3	Vertical	6	2.55	-	27.60	5.41	-			
PK	2.496G	59.74	74.00	-14.26	26.27	3	Vertical	6	2.55	-	28.00	5.47	-			
AV	2.493G	48.45	54.00	-5.55	14.98	3	Vertical	6	2.55	-	28.00	5.47	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2437MHz_TX

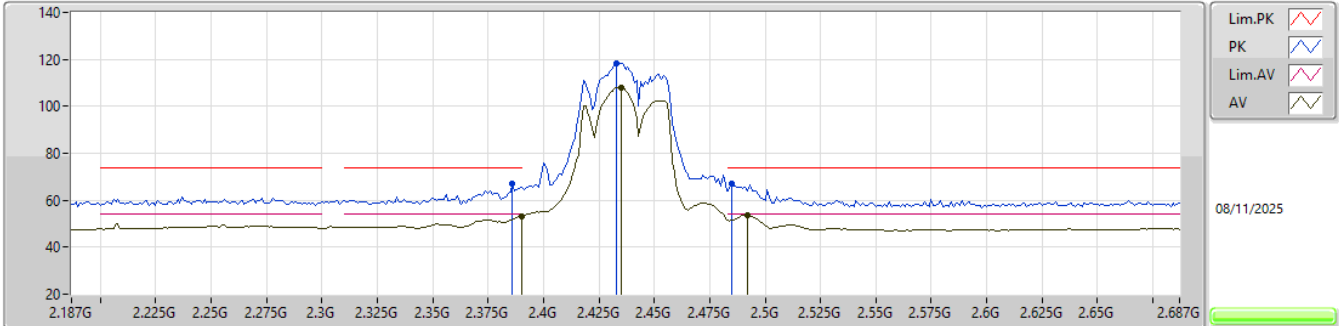


EUT_Y_2TX
Setting 20.5
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.386G	67.22	74.00	-6.78	34.52	3	Horizontal	41	1.80	-	27.36	5.34	-			
AV	2.39G	53.29	54.00	-0.71	20.54	3	Horizontal	41	1.80	-	27.40	5.35	-			
PK	2.433G	118.33	Inf	-Inf	85.33	3	Horizontal	41	1.80	-	27.60	5.40	-			
AV	2.435G	108.01	Inf	-Inf	75.00	3	Horizontal	41	1.80	-	27.60	5.41	-			
PK	2.485G	67.15	74.00	-6.85	33.74	3	Horizontal	41	1.80	-	27.95	5.46	-			
AV	2.492G	53.47	54.00	-0.53	20.00	3	Horizontal	41	1.80	-	28.00	5.47	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2437MHz_TX

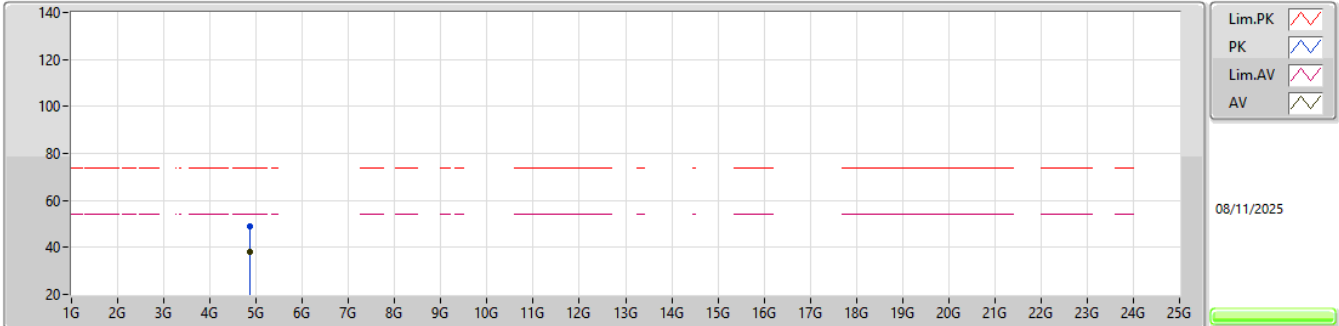


EUT_Y_2TX
Setting 20.5
01-X-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.87371G	49.11	74.00	-24.89	40.92	3	Vertical	106	1.80	-	32.65	8.11	32.57			
AV	4.87382G	37.98	54.00	-16.02	29.79	3	Vertical	106	1.80	-	32.65	8.11	32.57			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2437MHz_TX

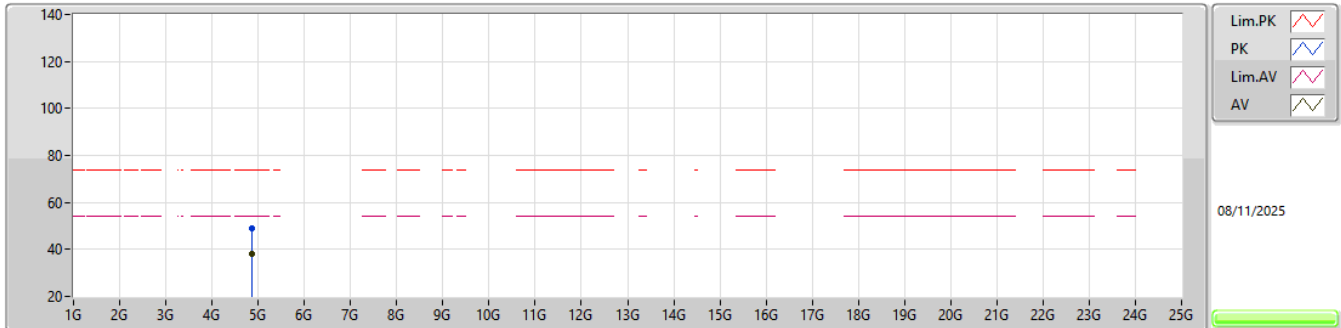


EUT_Y_2TX
Setting 20.5
01-X-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.87393G	49.01	74.00	-24.99	40.82	3	Horizontal	309	1.80	-	32.65	8.11	32.57			
AV	4.87387G	37.95	54.00	-16.05	29.76	3	Horizontal	309	1.80	-	32.65	8.11	32.57			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2452MHz_TX

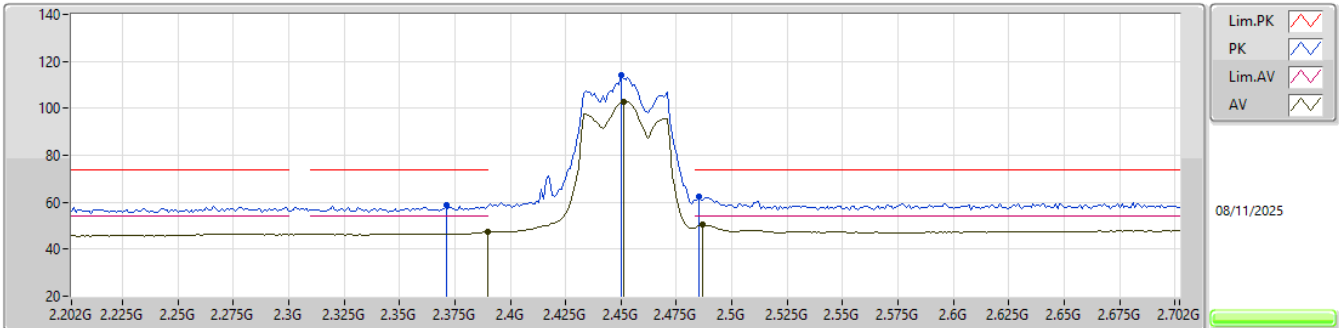


EUT_Y_2TX
Setting 18
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.371G	58.57	74.00	-15.43	25.96	3	Vertical	338	2.75	-	27.30	5.31	-				
AV	2.39G	47.43	54.00	-6.57	14.68	3	Vertical	338	2.75	-	27.40	5.35	-				
PK	2.45G	114.27	Inf	-Inf	81.25	3	Vertical	338	2.75	-	27.60	5.42	-				
AV	2.451G	102.86	Inf	-Inf	69.84	3	Vertical	338	2.75	-	27.60	5.42	-				
PK	2.485G	62.19	74.00	-11.81	28.78	3	Vertical	338	2.75	-	27.95	5.46	-				
AV	2.487G	50.36	54.00	-3.64	16.93	3	Vertical	338	2.75	-	27.97	5.46	-				

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2452MHz_TX

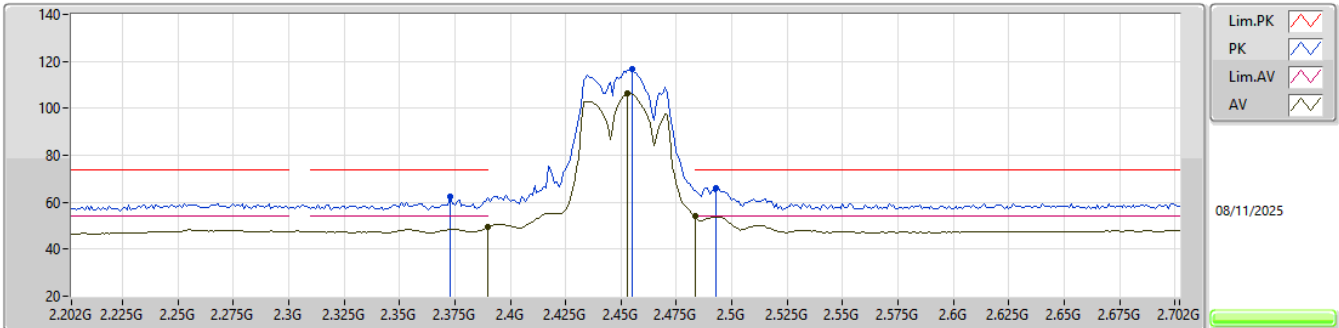


EUT_Y_2TX
Setting 18
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.373G	62.32	74.00	-11.68	29.71	3	Horizontal	291	2.17	-	27.30	5.31	-			
AV	2.39G	49.57	54.00	-4.43	16.82	3	Horizontal	291	2.17	-	27.40	5.35	-			
PK	2.455G	116.86	Inf	-Inf	83.83	3	Horizontal	291	2.17	-	27.60	5.43	-			
AV	2.453G	106.43	Inf	-Inf	73.40	3	Horizontal	291	2.17	-	27.60	5.43	-			
PK	2.493G	66.20	74.00	-7.80	32.73	3	Horizontal	291	2.17	-	28.00	5.47	-			
AV	2.4835G	53.92	54.00	-0.08	20.52	3	Horizontal	291	2.17	-	27.94	5.46	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2452MHz_TX

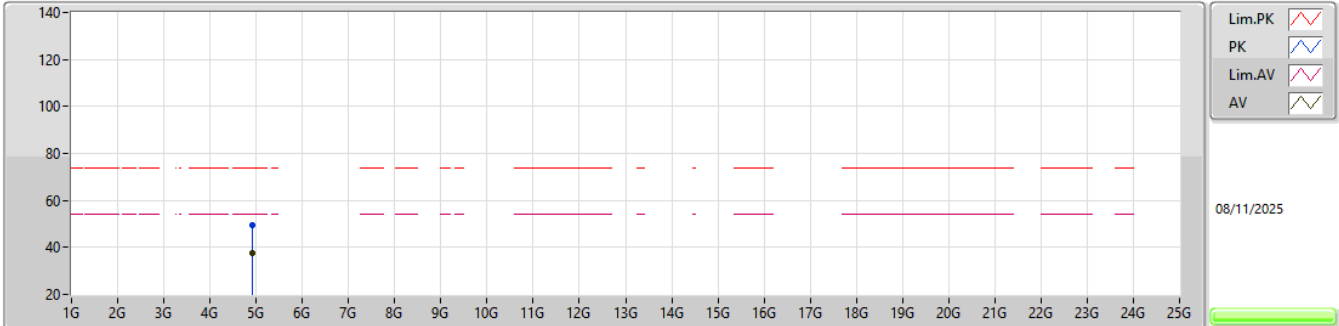


EUT_Y_2TX
Setting 18
01-X-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.90411G	49.32	74.00	-24.68	41.01	3	Vertical	128	1.84	-	32.72	8.17	32.58			
AV	4.90463G	37.70	54.00	-16.30	29.38	3	Vertical	128	1.84	-	32.73	8.17	32.58			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2452MHz_TX

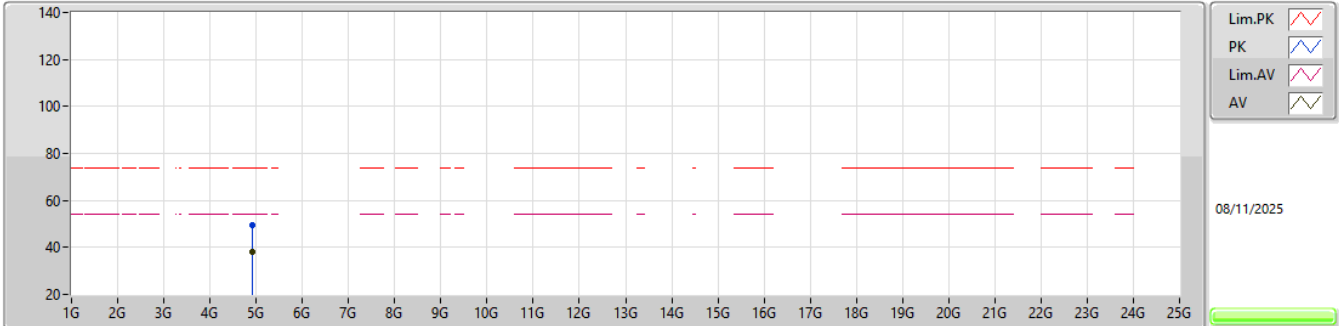

EUT_Y_2TX
Setting 18
01-X-J-11


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.90377G	49.46	74.00	-24.54	41.15	3	Horizontal	21	1.80	-	32.72	8.17	32.58			
AV	4.90362G	37.88	54.00	-16.12	29.57	3	Horizontal	21	1.80	-	32.72	8.17	32.58			



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	3.52645G	32.31	54.00	-21.69	Vertical

Mode 1

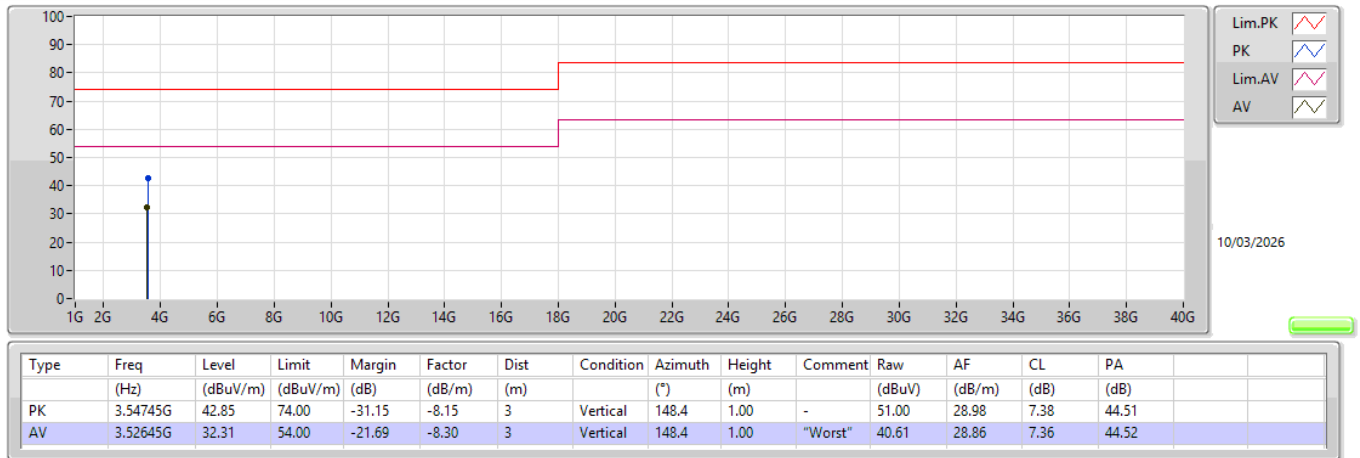

Mode 1

