




RADIO TEST REPORT

FCC ID : RSL-TQ7413R
Equipment : IEEE 802.11be tri-radio 2.4G/5G/6G Wireless AP
Brand Name : Allied Telesis
Model Name : AT-TQ7413[yyyyy]
(Refer to section 1.1.6 of test report for detail information.)
Applicant : Allied Telesis K.K.
2nd. TOC Bldg.7-21-11 Nishi-Gotanda, Shinagawa-ku
Tokyo 141-0031 Japan
Manufacturer : Allied Telesis K.K.
2nd. TOC Bldg.7-21-11 Nishi-Gotanda, Shinagawa-ku
Tokyo 141-0031 Japan
Standard : 47 CFR FCC Part 15.407

The product was received on Nov. 05, 2025, and testing was started from Nov. 07, 2025 and completed on Mar. 09, 2026. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

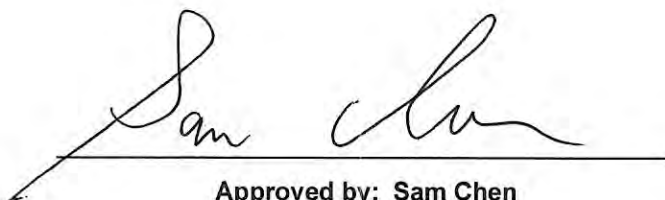

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	13
1.3 Testing Location Information	13
1.4 Measurement Uncertainty	14
2 Test Configuration of EUT.....	15
2.1 Test Channel Mode	15
2.2 The Worst Case Measurement Configuration.....	20
2.3 EUT Operation during Test	22
2.4 Accessories	22
2.5 Support Equipment.....	22
2.6 Test Setup Diagram	24
3 Transmitter Test Result	27
3.1 AC Power-line Conducted Emissions	27
3.2 Emission Bandwidth	29
3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	30
3.4 Peak Power Spectral Density (E.I.R.P.)	33
3.5 Unwanted Emissions.....	36
3.6 Contention Based Protocol.....	41
4 Test Equipment and Calibration Data	42
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	
Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Results of Contention-Based Protocol	
Appendix G. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_5 Ver2.0

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	PASS	-
-	15.407(a)	Proper Power Adjustment	N/A	Non-Dual Client Device / non-Standard Client Device w/o test
-	15.407(a)	Transmit Power Control	N/A	Non-Very Low Power Device w/o test
3.4	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
3.6	15.407(d)	Contention-Based Protocol	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen

Report Producer: Muse Chan



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925-7125	ax (HEW20), be (EHT20)	5955-7115	1-233 [59]
5925-7125	ax (HEW40), be (EHT40)	5965-7085	3-227 [29]
5925-7125	ax (HEW80), be (EHT80)	5985-7025	7-215 [14]
5925-7125	ax (HEW160), be (EHT160)	6025-6985	15-207 [7]
5925-7125	be (EHT320)	6105-6905	31-191 [6]

For Radio 3:

Band	Mode	BWch (MHz)	Nant
5.925-7.125GHz	802.11 ax HEW20, 802.11 be EHT20	20	2TX/2RX
	802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	2TX/2RX
	802.11 ax HEW40, 802.11 be EHT40	40	2TX/2RX
	802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	2TX/2RX
	802.11 ax HEW80, 802.11 be EHT80	80	2TX/2RX
	802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	2TX/2RX
	802.11 ax HEW160, 802.11 be EHT160	160	2TX/2RX
	802.11 ax HEW160-BF, 802.11 be EHT160-BF	160	2TX/2RX
	802.11 be EHT320	320	2TX/2RX
	802.11 be EHT320-BF	320	2TX/2RX

For Scanning Radio 4:

Band	Mode	BWch (MHz)	Nant
5.925-7.125GHz	802.11 ax HEW20	20	1RX
	802.11 ax HEW40	40	1RX
	802.11 ax HEW80	80	1RX
	802.11 ax HEW160	160	1RX

**MRU (dynamic preamble puncturing)**
For Multi_RU:

RU-tone	Bandwidth (MHz)				6GHz Test CH	
					UNII-5	UNII-8
					CH7	CH215
242+242[MCS0]	80				V	V
	242			242	V	V
242+242[MCS4]	242			242	V	V
484+242[MCS0]	484			242	V	V
484+242[MCS4]	484			242	V	V

RU-tone	Bandwidth (MHz)				6GHz Test CH	
					UNII-5	UNII-8
					CH15	CH207
996+484[MCS0]	484		996		V	V
996+484[MCS4]	484		996		V	V
484+3x242[MCS0]	484	242	242	242	V	V
484+3x242[MCS4]	484	242	242	242	V	V
484+484[MCS0]	484			484	V	V
484+484[MCS4]	484			484	V	V

RU-tone	Bandwidth (MHz)				6GHz Test CH	
					UNII-5	UNII-8
					CH31	CH191
3x996[MCS0]	996	996	996		V	--
3x996[MCS4]	996	996	996		V	--
2x996+484[MCS0]		484	996	996	--	V
2x996+484[MCS4]		484	996	996	--	V
2x996+484[MCS0]	996	996		484	V	V
2x996+484[MCS4]	996	996		484	V	V
2x996[MCS0]	996			996	V	V
2x996[MCS4]	996			996	V	V

For Puncturing:

RU-tone	Configuration	Bandwidth (MHz)				6GHz Test CH	
						UNII-5	UNII-8
						CH7	CH215
484+242	1		242	484	--	V	
	2	242		484	V	V	
	3	484		242	V	V	
	4	484		242	V	--	

RU-tone	Configuration	Bandwidth (MHz)				6GHz Test CH	
						UNII-5	UNII-8
						CH15	CH207
996+484	1		484	996	--	V	
	2	484		996	V	V	
	3	996		484	V	V	
	4	996		484	V	--	
996+484+242	1	242	242	484	--	V	
	2	242		484	V	V	
	3	484		242	V	V	
	4	484	242	996	V	V	
	5	996		242	484	V	V
	6	996		484	V	V	
	7	996		484	242	V	V
	8	996		484	242	V	--

RU-tone	Configuration	Bandwidth (MHz)				6GHz Test CH	
						UNII-5	UNII-8
						CH31	CH191
2x996+484	1	484	996	996	--	--	
	2	484	996	996	V	--	
	3	996	484	996	V	--	
	4	996	484	996	V	--	
	5	996	996	484	V	--	
	6	996	996	484	V	--	
	7		484	996	--	V	
	8		484	996	--	V	
	9		996	484	--	V	
	10		996	484	--	V	
	11		996	996	--	V	
	12		996	996	--	--	
3x996	1		996	996	--	V	
	2		996	996	V	V	
	3		996	996	V	V	
	4		996	996	V	--	
3x996+484	1	484	996	996	--	V	
	2	484	996	996	V	V	
	3	996	484	996	V	V	
	4	996	484	996	V	V	
	5	996	996	484	V	V	
	6	996	996	484	V	V	
	7	996	996	996	V	V	
	8	996	996	996	V	--	

**Note:**

- ♦ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80 and EHT160, EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

1.1.2 Worst case of MRU(dynamic preamble puncturing) evaluation procedure

1. Complete test Full RU BE & PSD.
2. Measure the PSD of each MRU(dynamic preamble puncturing) by conducted method and it is less than the Full RU conducted PSD.
3. Measure the Band edge emission of each MRU(dynamic preamble puncturing) by conducted method and find out the MRU(dynamic preamble puncturing) worst case configuration.
4. Follow step 3 to find the worst MRU(dynamic preamble puncturing) configuration and perform radiated BE/RSE testing.
5. Confirm whether the worst MRU(dynamic preamble puncturing) configuration setting in steps 2 & 4 is the same. If there is a channel where the setting drops due to the test in step 4, the MRU(dynamic preamble puncturing) conducted PSD needs to be retested.
6. Use worst configuration of MRU(dynamic preamble puncturing) and perform MASK measurements by conducted method.


1.1.3 Antenna Information

Ant.	RF Port	Brand Name	Model Name	Ant. Type	Connector	Gain (dBi)	Modes of Operation
1	1	WNC	95XPAD15.GDY	PIFA	I-PEX	Note 1	WLAN 2.4GHz (Radio 1)
2	2	WNC	95XPAD15.GEA	PIFA	I-PEX		WLAN 5GHz (Radio 2)
3	1	WNC	95XPAD15.GEB	PIFA	I-PEX		WLAN 6GHz (Radio 3)
4	2	WNC	95XPAD15.GEC	PIFA	I-PEX		Bluetooth, Zigbee (Radio 5)
5	1	WNC	95XPAD15.GDZ	PIFA	I-PEX		WLAN 2.4GHz WLAN 5GHz WLAN 6GHz (Radio 4)
6	1	WNC	95XPAD15.GED	PIFA	I-PEX		

Note 1:

Notes 1:

Ant.	Antenna Gain (dBi)								
	WLAN 2.4GHz (Radio 1)		WLAN 5GHz (Radio 2)						
			UNII 1	UNII 2A	UNII 2C	UNII 3			
1	4.18		5.06	4.95	4.78	4.39			
2	4.96		5.28	5.01	4.78	4.86			
Ant.	WLAN 6GHz (Radio 3)								
	UNII 5		UNII 6		UNII 7		UNII 8		
	4.94		4.82		4.82		4.08		
4	5.91		5.91		5.91		5.99		
Ant.	Bluetooth, Zigbee (Radio 5)								
5	4.51								
Ant.	Scanning radio (Radio 4)								
	WLAN 2.4GHz	WLAN 5GHz				WLAN 6GHz			
		UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 5	UNII 6	UNII 7	UNII 8
6	3.93	5.33	4.78	5.64	4.70	5.61	5.61	5.61	5.61

Note 2: The above information was declared by Manufacturer.

Note 3: States antenna 5GHz and 6GHz transmission will be restricted per country's regulation.

Note 4: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,3) = 10^{G3/20} ; NSS1(g1,4) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

Radio 1

2.4G G1= 4.18 dBi ; G2= 4.96 dBi ;DG= 7.59dBi

Radio 2

5G UNII-1 G1= 5.06 dBi ; G2= 5.28 dBi ;DG= 8.18dBi

5G UNII-2A G1= 4.95 dBi ; G2= 5.01 dBi ;DG= 7.99dBi

5G UNII-2C G1= 4.78 dBi ; G2= 4.78 dBi ;DG= 7.79dBi

5G UNII-3 G1= 4.39 dBi ; G2= 4.86 dBi ;DG= 7.64dBi

Radio 3

6G UNII-5 G1= 4.94 dBi ; G2= 5.91 dBi ;DG= 8.45dBi

6G UNII-6 G1= 4.82 dBi ; G2= 5.91 dBi ;DG= 8.39dBi

6G UNII-7 G1= 4.82 dBi ; G2= 5.91 dBi ;DG= 8.39dBi

6G UNII-8 G1= 4.08 dBi ; G2= 5.99 dBi ;DG= 8.1dBi

Note 5: **For Radio 1:**

2.4GHz IEEE 802.11b/g/n/VHT/ax/be mode (2TX/2RX)

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Radio 2:

5GHz IEEE 802.11a/n/ac/ax/be mode (2TX/2RX)

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Radio 3:

**6GHz IEEE 802.11ax/be mode (2TX/2RX)**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Radio 4 (Scanning radio):**2.4GHz IEEE 802.11b/g/n/VHT/ax mode (1RX)****5GHz IEEE 802.11a/n/ac/ax mode (1RX)****6GHz IEEE 802.11ax mode (1RX)**

Only Port 1 can be used as receiving antenna.

For Radio 5:**Bluetooth and Zigbee mode (1TX/1RX)**

Only Port 1 can be used as transmitting/receiving antenna.

1.1.4 Mode Test Duty Cycle**For Full_RU:**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20_Nss 1,(M0)	0.98	0.09	5.453m	10Hz (DC>=0.98)
802.11be EHT40_Nss 1,(M0)	0.972	0.12	5.453m	200
802.11be EHT80_Nss 1,(M0)	0.974	0.11	5.453m	200
802.11be EHT160_Nss 1,(M0)	0.975	0.11	5.453m	200
802.11be EHT320_Nss 1,(M0)	0.977	0.1	5.458m	200

For Multi_RU:

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3	0.798	0.98	1.429m	1k
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1	0.898	0.47	2.001m	500
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2	0.86	0.66	1.893m	1k
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1	0.862	0.64	2.017m	500
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1	0.866	0.62	2.201m	500
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4	0.907	0.42	2.021m	500
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8	0.859	0.66	2.133m	500
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5	0.834	0.79	2.017m	500
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1	0.887	0.52	2.145m	500

**For Puncturing:**

Mode	DC	DCF (dB)	T (s)	VBW (Hz) 1/T
802.11be EHT80_Nss 1,(M0),RU484+RU242 CP 3	0.998	0.01	10.981m	10Hz (DC>=0.98)
802.11be EHT160_Nss 1,(M0),RU996+RU484+RU242 CP 5	0.982	0.08	5.488m	10Hz (DC>=0.98)
802.11be EHT160_Nss 1,(M0),RU996+RU484 CP 3	0.998	0.01	10.981m	10Hz (DC>=0.98)
802.11be EHT320_Nss 1,(M0),3xRU996+RU484 CP 6	0.998	0.01	5.488m	10Hz (DC>=0.98)
802.11be EHT320_Nss 1,(M0),3xRU996 CP 4	0.999	0.01	38.481m	10Hz (DC>=0.98)
802.11be EHT320_Nss 1,(M0),2xRU996+RU484 CP 3	0.982	0.08	5.494m	10Hz (DC>=0.98)
802.11be EHT320_Nss 1,(M0),3xRU996 CP 3	0.998	0.01	5.488m	10Hz (DC>=0.98)
802.11be EHT320_Nss 1,(M0),2xRU996+RU484 CP 10	0.998	0.01	5.488m	10Hz (DC>=0.98)
802.11be EHT160_Nss 1,(M0),RU996+RU484+RU242 CP 7	0.983	0.07	5.488m	10Hz (DC>=0.98)

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.5 EUT Operational Condition

EUT Power Type	From Power Adapter / PoE			
Beamforming Function	☒	With beamforming	☐	Without beamforming
	The product has beamforming function for Radio 1 (n/VHT/ax/be in 2.4GHz), Radio 2 (n/ac/ax/be in 5GHz) and Radio 3 (ax/be in 6GHz).			
Device Type	☒	Indoor Access Point	☐	Subordinate
	☐	Indoor Client	☐	Standard Power Access Point
	☐	Dual Client	☐	Standard Client
	☐	Fixed Client	☐	Very Low Power
Condition of EUT	☒	Indoor	☐	Outdoor
Channel Puncturing Function	☐	Supported Static Puncturing		
	☒	Supported Dynamic Puncturing (Reduce BW) (For Radio 3)		
	☒	Unsupported (For Radio 4)		
	Note: The EUT doesn't support puncturing for CBP			
Support RU	☒	Full RU for Radio 3 and Scanning Radio 4	☒	Partial RU for Radio 3
Test Software Version	For Radiated Emission Co-location: DOS [ver 6.1.7601] For others: QSPR Ver 6.00.00225.1			
Software / Firmware Version for CBP	5.5.6A-0.0			

Note: The above information was declared by manufacturer.

1.1.6 Table for Multiple Listing

Model Name	Description
AT-TQ7413[yyyyy] (where [y] can be A–Z, a–z, “-”, “/”, or blank. The characters in brackets are optional and used for marketing differentiation only, with no impact on safety-related construction or critical components.)	All the models are identical, the difference model served as marketing strategy.

Note 1: From the above models, model: AT-TQ7413-R was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.

1.1.7 Table for Radio Function

Function Radio	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	Bluetooth	Zigbee
1	V	-	-	-	-
2	-	V	-	-	-
3	-	-	V	-	-
4 (Scanning radio)	V	V	V	-	-
5	-	-	-	V	V

Note1: For WLAN 2.4GHz: The Radio 1 and Radio 4 (Scanning radio) can't operate at the same frequency simultaneously.

For WLAN 5GHz: The Radio2 and Radio 4 (Scanning radio) can't operate at the same frequency simultaneously.

For WLAN 6GHz: The Radio 3 and Radio 4 (Scanning radio) can't operate at the same frequency simultaneously.

Note 2: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407
- ♦ ANSI C63.10-2020
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 987594 D02 v03
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted (For other tests)	TH03-CB	Owen Hsu	19.6~21.1 / 63~67	Nov. 12, 2025~ Dec. 17, 2025
Radiated (below 1GHz Mode 1~4)	10CH01-CB	Allen Chung	21~22 / 56~57	Jan. 15, 2026
Radiated (below 1GHz Mode 5~6)			23~24 / 58~59	Mar. 04, 2026
Radiated (above 1GHz)	03CH06-CB	Lex Lee	22.5-22.9 / 58-60	Nov. 07, 2025~ Dec. 13, 2025
	03CH03-CB		22.2-22.6 / 59-61	
	03CH02-CB		22-23 / 61-63	
AC Conduction (Mode 1~4)	CO02-CB	Allen Chung	23~24 / 57~58	Jan. 20, 2026
AC Conduction (Mode 5~6)			23~24 / 55~56	Mar. 03, 2026
RF Conducted (Contention-Based Protocol test)	DF02-CB	RJ Huang	20.1~20.7 / 65~69	Mar. 09, 2026



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.9 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%
Bandwidth Measurement	1.0 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

For Full_RU:

Mode
802.11be EHT20_Nss1,(MCS0)_2TX
5955MHz
6195MHz
6415MHz
6435MHz
6475MHz
6515MHz
6535MHz
6695MHz
6875MHz
6895MHz
6995MHz
7095MHz
7115MHz
802.11be EHT40_Nss1,(MCS0)_2TX
5965MHz
6205MHz
6405MHz
6445MHz
6485MHz
6525MHz
6565MHz
6685MHz
6885MHz
6925MHz
7005MHz
7085MHz
802.11be EHT80_Nss1,(MCS0)_2TX
5985MHz
6225MHz
6385MHz
6465MHz
6545MHz
6625MHz



Mode
6705MHz
6785MHz
6865MHz
6945MHz
7025MHz
802.11be EHT160_Nss1,(MCS0)_2TX
6025MHz
6185MHz
6345MHz
6505MHz
6665MHz
6825MHz
6985MHz
802.11be EHT320_Nss1,(MCS0)_2TX
6105MHz
6265MHz
6425MHz
6585MHz
6745MHz
6905MHz
802.11be EHT20-BF_Nss1,(MCS0)_2TX
5955MHz
6195MHz
6415MHz
6435MHz
6475MHz
6515MHz
6535MHz
6695MHz
6875MHz
6895MHz
6995MHz
7095MHz
7115MHz
802.11be EHT40-BF_Nss1,(MCS0)_2TX
5965MHz
6205MHz
6405MHz
6445MHz



Mode
6485MHz
6525MHz
6565MHz
6685MHz
6885MHz
6925MHz
7005MHz
7085MHz
802.11be EHT80-BF_Nss1,(MCS0)_2TX
5985MHz
6225MHz
6385MHz
6465MHz
6545MHz
6625MHz
6705MHz
6785MHz
6865MHz
6945MHz
7025MHz
802.11be EHT160-BF_Nss1,(MCS0)_2TX
6025MHz
6185MHz
6345MHz
6505MHz
6665MHz
6825MHz
6985MHz
802.11be EHT320-BF_Nss1,(MCS0)_2TX
6105MHz
6265MHz
6425MHz
6585MHz
6745MHz
6905MHz

**For Multi_RU:**

Mode
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX
5985MHz
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX
5985MHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX
7025MHz
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX
7025MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX
6025MHz
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX
6025MHz
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX
6025MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX
6985MHz
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX
6985MHz
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX
6985MHz
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX
6105MHz
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_2TX
6105MHz
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX
6105MHz
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX
6105MHz
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX
6905MHz
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_2TX
6905MHz
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX
6905MHz
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX
6905MHz

**For Puncturing:**

Mode
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX
5985MHz
7025MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_2TX
6025MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX
6025MHz
6985MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_2TX
6985MHz
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_2TX
6105MHz
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_2TX
6105MHz
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_2TX
6105MHz
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_2TX
6905MHz
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_2TX
6905MHz
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_2TX
6905MHz

Note:

- ♦ EHT20 / EHT40 / EHT80 / EHT160 covers HEW20 / HEW40 / HEW80 / HEW160 due to similar modulation. The power setting for HEW20 / HEW40 / HEW80 / HEW160 is the same or lower than EHT20 / EHT40 / EHT80 / EHT160.
- ♦ The EUT supports beamforming and CDD modes, and the CDD mode is the worst case. Therefore, all test items are evaluated in the report. The beamforming mode only evaluates the output power.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	EUT_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 2.4GHz+R5: Bluetooth+Adapter
2	EUT_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 2.4GHz+R5: Bluetooth+PoE
Mode 2 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3~4 will follow this same test mode.	
3	EUT_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 2.4GHz+R5: Zigbee(TX)+PoE
4	EUT_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 2.4GHz+R5: Zigbee(RX)+PoE
Mode 2 has been evaluated to be the worst case among Mode 1~4, thus measurement for Mode 5~6 will follow this same test mode.	
5	EUT_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 5GHz+R5: Bluetooth+PoE
6	EUT_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 6GHz+R5: Bluetooth+PoE
For operating mode 2 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Contention Based Protocol
Test Condition	Conducted measurement at transmit chains
1	EUT_R3

The Worst Case Mode for Following Conformance Tests	
Tests Item	Peak Power Spectral Density (E.I.R.P.)
Test Condition	Conducted measurement at transmit chains
1	EUT_R3_Full RU
2	EUT_R3_Multi_RU
3	EUT_R3_Puncturing



The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link After evaluating, and the worst case was found at Z axis, so it was selected to perform test and its test result was written in the report.
1	EUT in Z axis_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 2.4GHz+R5: Bluetooth +Adapter
2	EUT in Z axis_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 2.4GHz+R5: Bluetooth +PoE
Mode 2 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3~4 will follow this same test mode.	
3	EUT in Z axis_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 2.4GHz+R5: Zigbee(TX) +PoE
4	EUT in Z axis_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 2.4GHz+R5: Zigbee(RX) +PoE
Mode 2 has been evaluated to be the worst case among Mode 1~4, thus measurement for Mode 5~6 will follow this same test mode.	
5	EUT in Z axis_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 5GHz+R5: Bluetooth +PoE
6	EUT in Z axis_R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R4: 6GHz+R5: Bluetooth +PoE
For operating mode 2 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX After evaluating, and the worst case was found at Z axis for bandedge, Y axis for harmonic, so it was selected to perform test and its test result was written in the report.
1	EUT in Z axis (Bandedge) / EUT in Y axis (Harmonic)_R3_Full_RU
2	EUT in Z axis (Bandedge) / EUT in Y axis (Harmonic)_R3_Multi_RU
3	EUT in Z axis (Bandedge) / EUT in Y axis (Harmonic)_R3_Puncturing

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission MASK
Test Condition	Conducted measurement at transmit chains
1	EUT_R3_Full RU
2	EUT_R3_Multi_RU
3	EUT_R3_Puncturing



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R5: Bluetooth
2	R1: 2.4GHz+R2: 5GHz+R3: 6GHz+R5: Zigbee
Refer to Sporton Test Report No.: FA5N0729 for Co-location RF Exposure Evaluation.	

Note 1: R means Radio.

Note 2: The PoE is used for testing purpose; it will not be sold with the EUT

Power	Brand Name	Model Name
PoE	PHIHONG	POE60U-BTA

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.

2.4 Accessories

Bracket*1

2.5 Support Equipment

For AC Conduction and Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Flash disk2.0	Tcell	Push	N/A
B	PoE	PHIHONG	POE60U-BTA	N/A
C	PoE 2 PC	ASUS	S300TA	TX2-RTL8821CE
D	PoE 1 PC	ASUS	S300TA	TX2-RTL8821CE
E	2.4G NB	Lenovo	X260	N/A
F	5G NB	Lenovo	X260	N/A
G	Smart phone	Redmi	M1810F6LH	2AFZZ-RMSF6LG
H	6G Device	Allied Telesis	AT-TQ7413-R	RSL-TQ7413R
I	6G Device NB	Lenovo	X260	N/A


**For Radiated (above 1GHz) and RF Conducted (Other tests):**


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	LENOVO	L440	N/A
B	PoE	PHIHONG	POE60U-BTA	N/A

For RF Conducted (Contention Based Protocol test):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	NB	DELL	E4300	N/A
C	Device	Allied Telesis	AT-TQ7413-R	RSL-TQ7413R
D	PoE	PHIHONG	POE60U-BTA	N/A

2.6 Test Setup Diagram

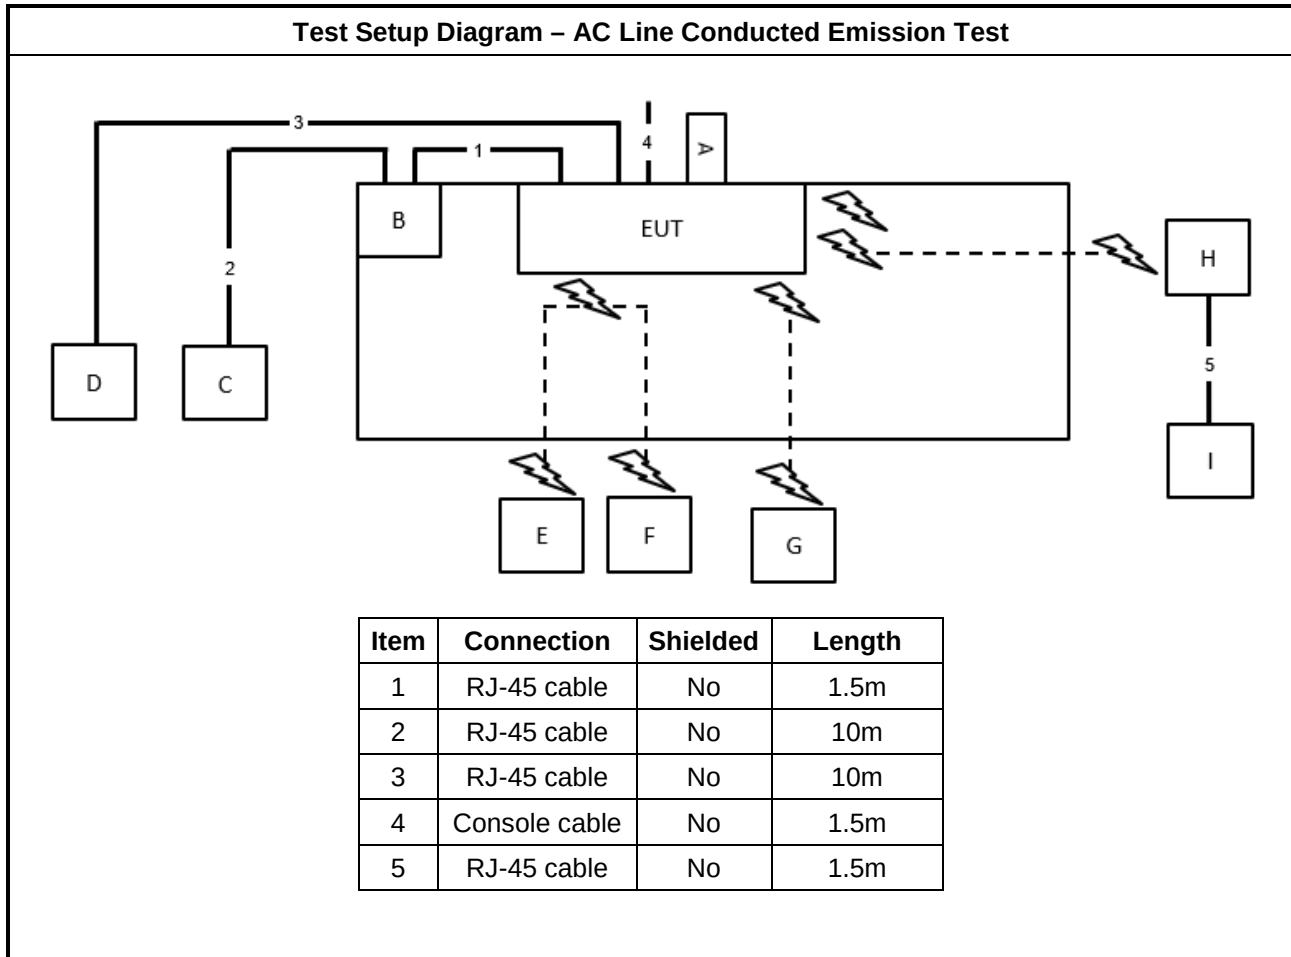

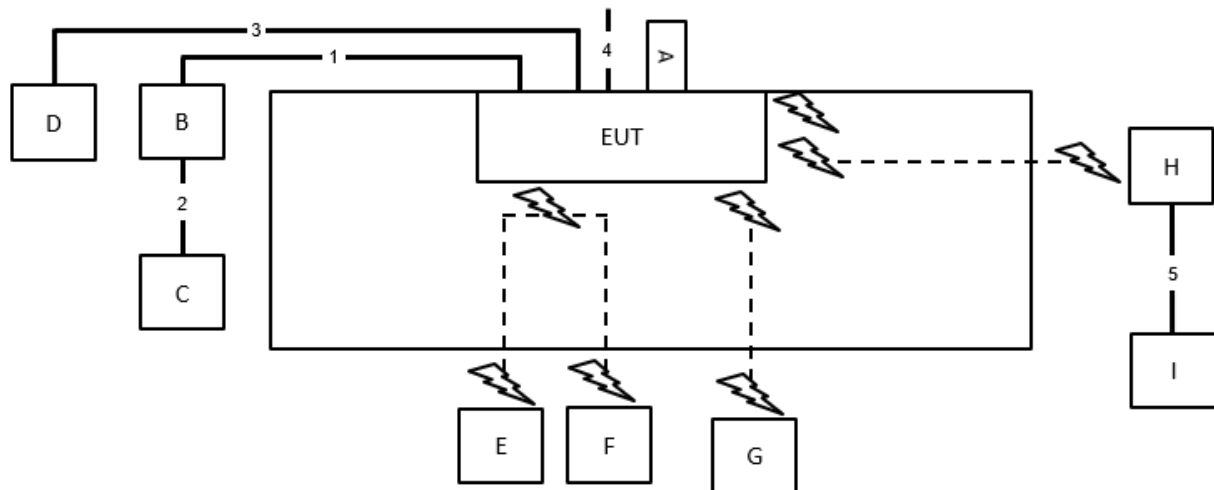Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	RJ-45 cable	No	10m
4	Console cable	No	1.5m
5	RJ-45 cable	No	1.5m

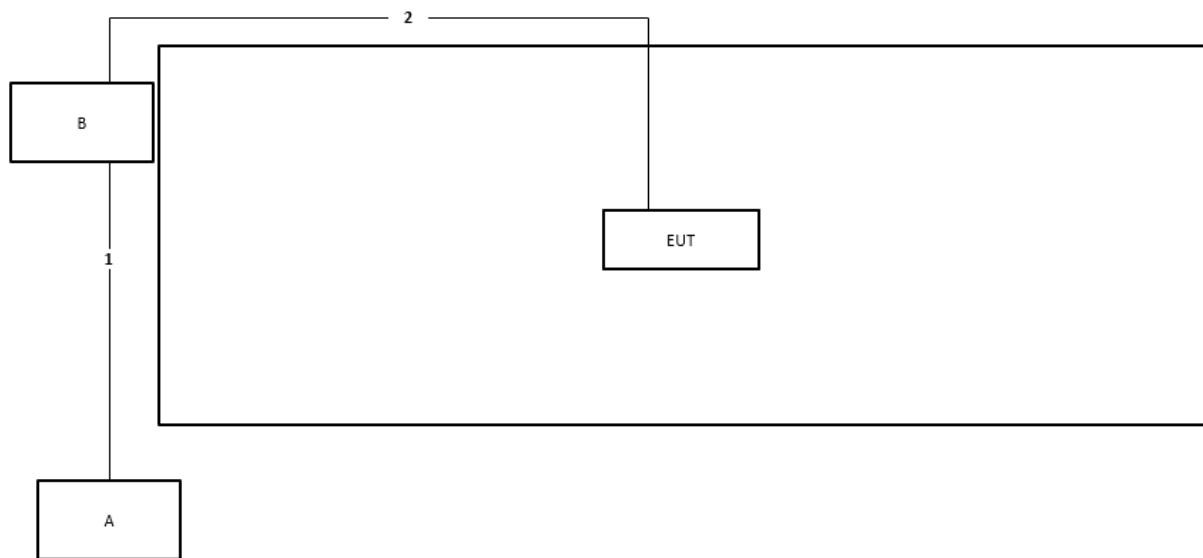Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	1.5m
2	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2020, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

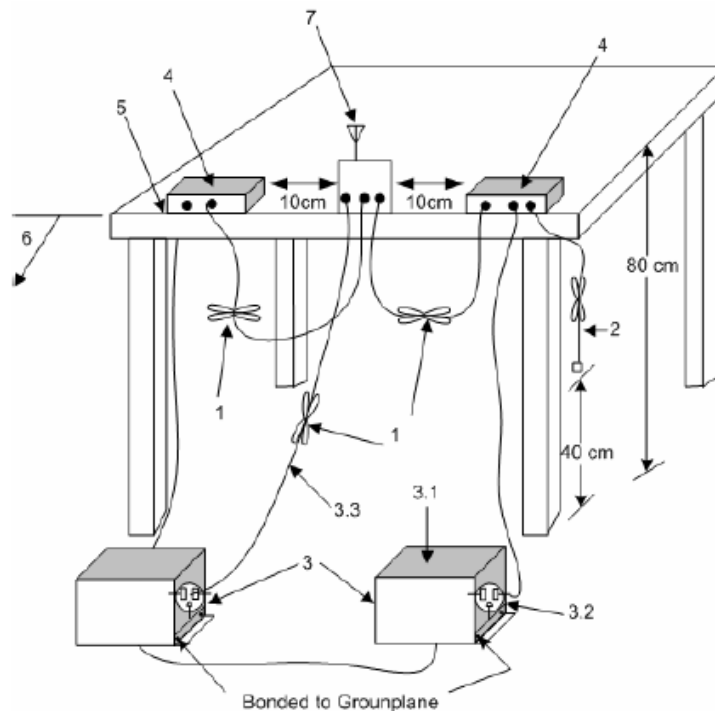

- 1—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long.
- 2—The I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- 3—EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN may be placed on top of, or immediately beneath, reference ground plane.
- 3.1—All other equipment powered from additional LISN(s).
- 3.2—A multiple-outlet strip may be used for multiple power cords of non-EUT equipment.
- 3.3—LISN at least 80 cm from nearest part of EUT chassis.
- 4—Non-EUT components of EUT system being tested.
- 5—Rear of EUT, including peripherals, shall all be aligned and flush with edge of tabletop.
- 6—Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.
- 7—Antenna can be integral or detachable. If detachable, then the antenna shall be attached for this test.

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading (dBUV) = LISN Factor + Cable Loss + Read Level = Level
- Margin = - Limit + (Read Level + LISN Factor + Cable Loss)

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
☒	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
☒	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
☒	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.
RLAN Devices	
☐	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
☐	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
☐	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
☐	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	According to FCC KDB 987594 D02 clause II.C, measurement procedure shall refer to FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

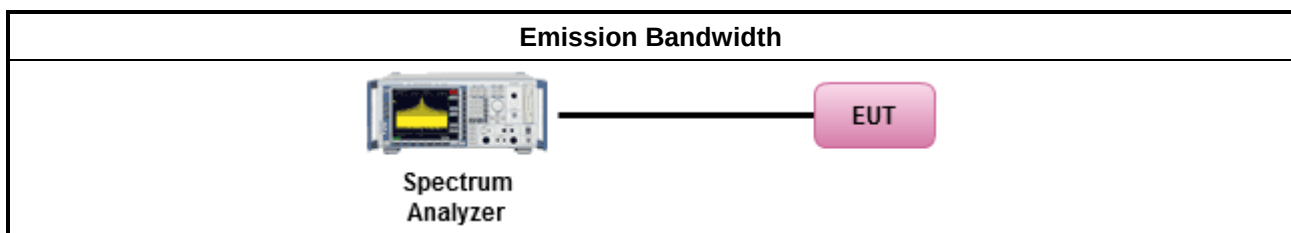

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

Note:

The 99% OBW of BW320 should be less than 320 MHz of limit, and the other BWs less than 320 MHz of limit are 26 dB EBW.



3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.3.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 30 dBm .
	■ For low-power client devices < 24 dBm.
	■ For very low-power devices < 14 dBm.



☐	For the 5.925 ~ 6.875 GHz band:
☐	For standard-power access points & fixed client devices < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
☐	For standard client devices < 30 dBm.


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
☐	According to FCC KDB 987594 D02 clause II.E, the test measurement procedure shall refer to KDB 789033.
☐	Average over on/off periods with duty factor
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging). Spectrum analyzer setting: RBW/VBW : 1/3MHz ; Detector : RMS ; Trace mode : Average ; Sweep Count 100.
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☐	Wideband RF power meter and average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
☒	For conducted measurement.
☐	- If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. - If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☐	For radiated measurement.
☐	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.3.4 Test Setup

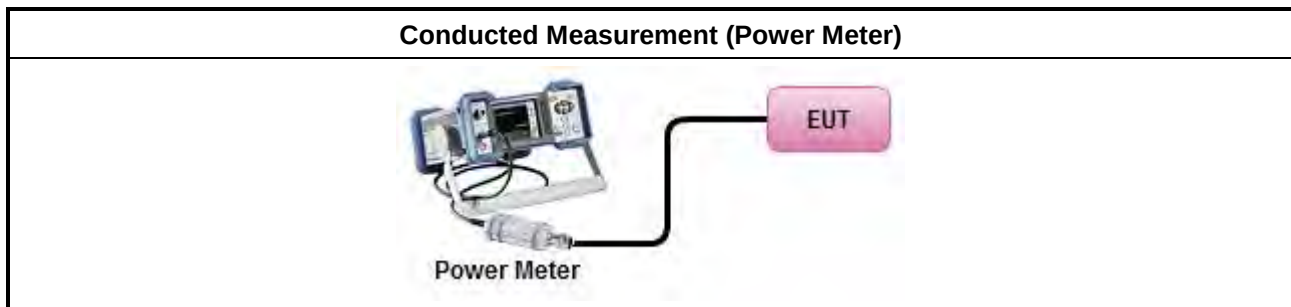

3.3.5 Test Result of Maximum Equivalent Isotropically Radiated Power (E.I.R.P)

Refer as Appendix C



3.4 Peak Power Spectral Density (E.I.R.P.)

3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 5 dBm / MHz.
	■ For low-power client devices < -1 dBm / MHz.
	■ For very low-power devices < -5 dBm / MHz.
☐ For the 5.925 ~ 6.875 GHz band:	
	■ For standard-power access points & fixed client devices < 23 dBm / MHz.
	■ For standard client devices < 17 dBm / MHz.



3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	

☐	For radiated measurement.
☐	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.4.4 Test Setup

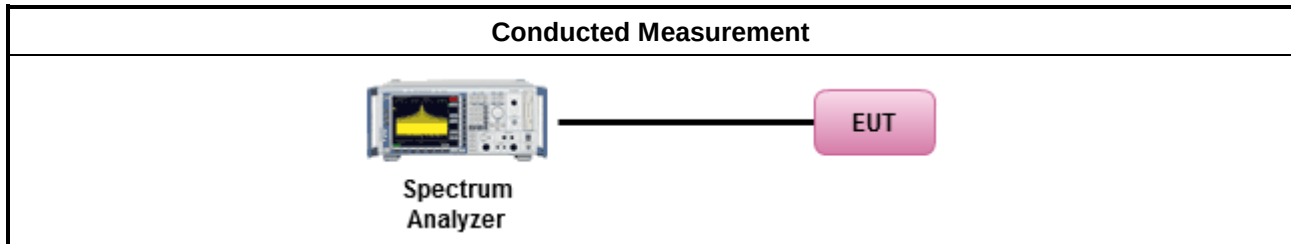

3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit


Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = $54\text{dBuV/m at 3m} + 9.54\text{dB} = 63.54\text{dBuV/m at 1m}$.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.925 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = $68.2\text{dBuV/m at 3m} + 9.54\text{dB} = 77.74\text{dBuV/m at 1m}$. Note 2:-27 dBm EIRP OOBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

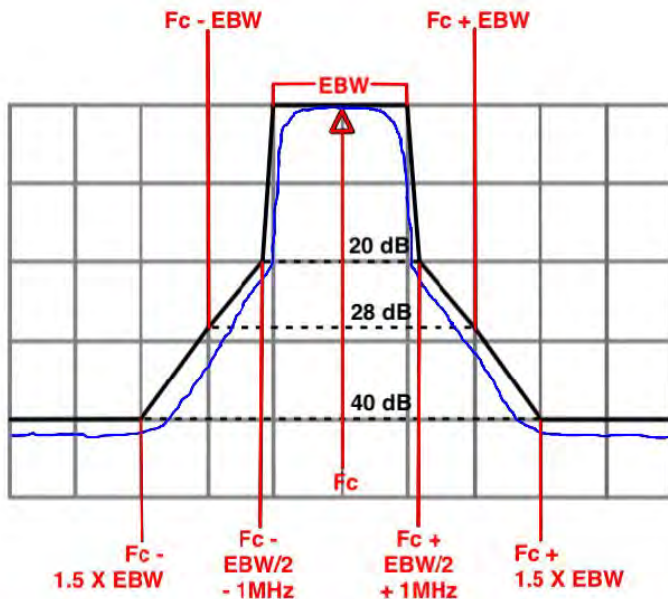Frequency	Emission MASK Limit
5.925 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. 




3.5.2 Measuring Instruments



Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK). Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
Refer as FCC KDB 789033 D02, clause G)3)d)ii) for Band edge Integration measurements.	
For emission MASK shall be measured using following options below:	
	☒ Refer as FCC KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.5.4 Test Setup

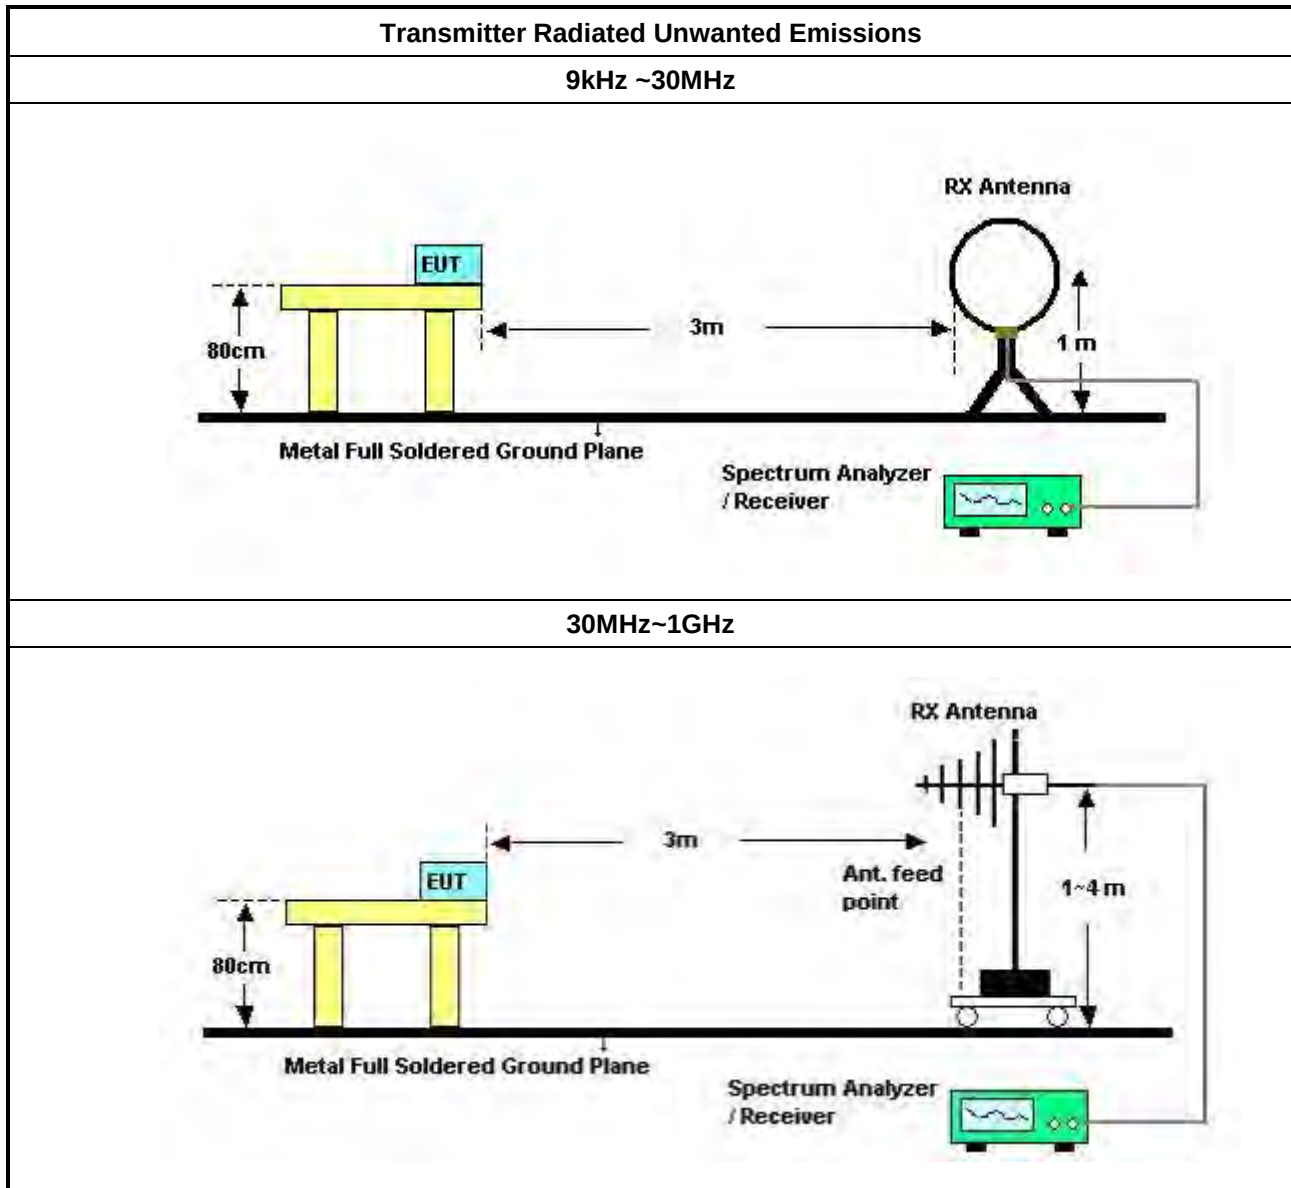

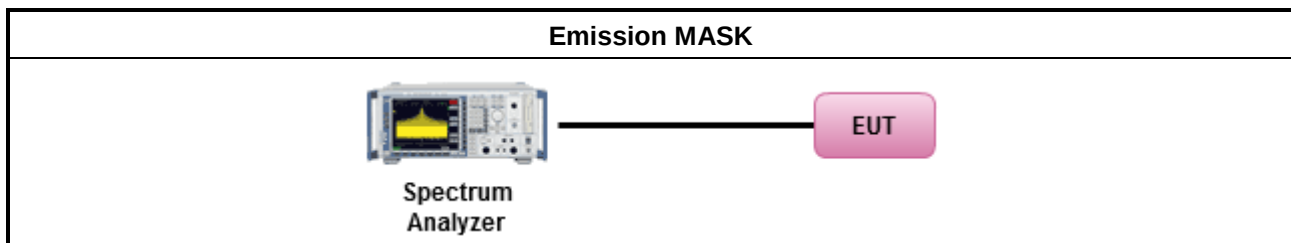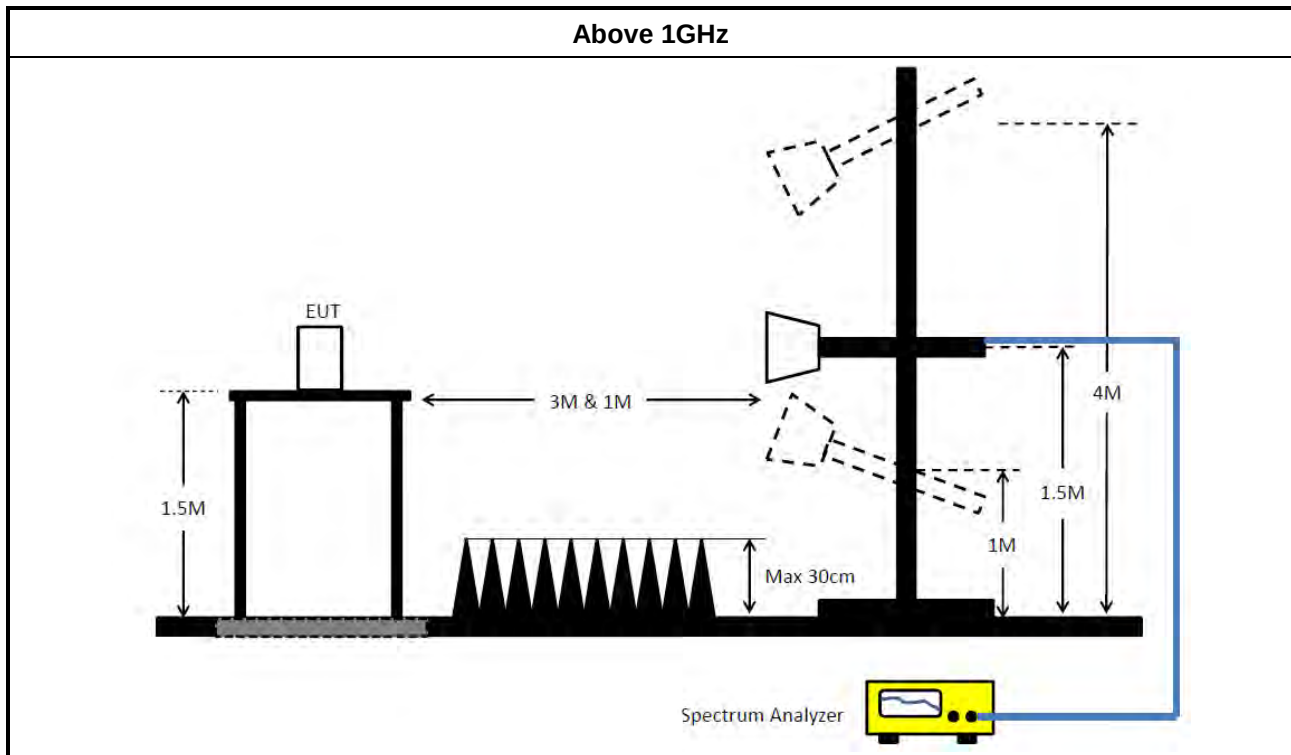

3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable)
= Level

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

3.6 Contention Based Protocol

3.6.1 Contention Based Protocol Limit

EUT can detect an AWGN signal with 90% (or better) level of certainty.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
■	For Contention Based Protocol shall be measured using following options below:
☒	Refer as FCC KDB 987594 D02, I) Contention Based Protocol.

3.6.4 Test Setup

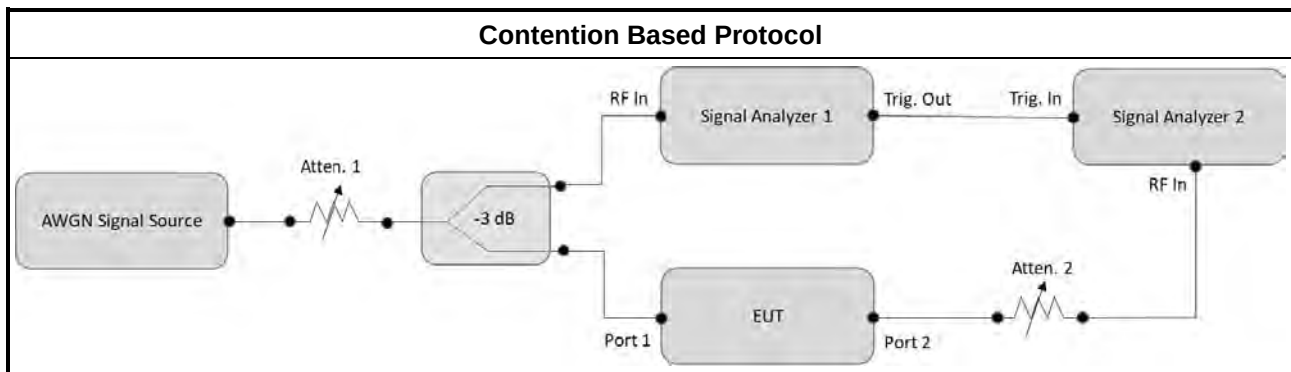

3.6.5 Test Result of Contention Based Protocol

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Apr. 29, 2025	Apr. 28, 2026	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Feb. 06, 2025	Feb. 05, 2026	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Jan. 29, 2026	Jan. 28, 2027	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	May 14, 2025	May 13, 2026	Conduction (CO02-CB)
COND Cable	Woken	Cable	CO02	0.15MHz ~ 30MHz	Sep.14, 2025	Sep.13, 2026	Conduction (CO02-CB)
Pulse Limiter	Schwarzbeck	VTSD 9561F-N	00378	9kHz ~ 30MHz	Sep.14, 2025	Sep.13, 2026	Conduction (CO02-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO02-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 20, 2025	Oct. 19, 2026	Radiation (10CH01-CB)
10m Semi Anechoic Chamber NSA	TDK	SAC-10M	10CH01-CB	30MHz~1GHz 10m,3m	Jan. 14, 2026	Jan. 13, 2027	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10783	9kHz ~ 1.3GHz	Mar. 08, 2025	Mar. 07, 2026	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10784	9kHz ~ 1.3GHz	Mar. 08, 2025	Mar. 07, 2026	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-01	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-02	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
EMI Test Receiver	Rohde& Schwarz	ESR7	103076	9 kHz ~ 7GHz	Aug. 27, 2025	Aug. 26, 2026	Radiation (10CH01-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Sep. 03, 2025	Sep. 02, 2026	Radiation (10CH01-CB)
High Cable	TITAN	T318E	High cable01	30MHz ~ 18GHz	Feb. 04, 2025	Feb. 03, 2026	Radiation (10CH01-CB)
Bilog Ant & 6dB Attenuator	SCHWARZBECK & EMCI	VULB 9168 & N-6-06	1469 & AT-N06021	30MHz ~ 1GHz	Jan. 08, 2026	Jan. 07, 2027	Radiation (10CH01-CB)
Amplifier	EM	EM101	060703	10MHz ~ 1GHz	Oct. 15, 2025	Oct. 14, 2026	Radiation (10CH01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (10CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH06-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120D-1292	1GHz~18GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH06-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH06-CB)
Pre-Amplifier	EMCI	EMC12630SE	980383	1GHz ~ 18GHz	Jul. 30, 2025	Jul. 29, 2026	Radiation (03CH06-CB)
Pre-Amplifier	SGH	SGH1840	20230109-3	18~40GHz	Feb. 21, 2025	Feb. 20, 2026	Radiation (03CH06-CB)
Signal analyzer	R&S	FSV3044	101667	9kHz~44GHz	Aug. 27, 2025	Aug. 26, 2026	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+68	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Apr. 30, 2025	Apr. 29, 2026	Radiation (03CH06-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1GHz ~ 7.4GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH06-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1GHz ~ 8GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH06-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 02, 2025	May 01, 2026	Radiation (03CH03-CB)
Horn Antenna	ETS-Lindgren	3115	6821	750MHz~18GHz	Feb. 20, 2025	Feb. 19, 2026	Radiation (03CH03-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH03-CB)
Pre-Amplifier	SGH	SGH1840	20230109-3	18~40GHz	Feb. 21, 2025	Feb. 20, 2026	Radiation (03CH03-CB)
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jul. 17, 2025	Jul. 16, 2026	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-20+29	1GHz ~ 18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-29	1GHz ~ 18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH03-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Apr. 30, 2025	Apr. 29, 2026	Radiation (03CH03-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1GHz ~ 7.4GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH03-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1GHz ~ 8GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH03-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 23, 2025	Mar. 22, 2026	Radiation (03CH02-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 15, 2025	Apr. 14, 2026	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH02-CB)
Pre-Amplifier	SGH	SGH1840	20230109-3	18~40GHz	Feb. 21, 2025	Feb. 20, 2026	Radiation (03CH02-CB)
Signal Analyzer	R&S	FSV3044	101536	10kHz ~ 44GHz	Aug. 20, 2025	Aug. 19, 2026	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Jun. 19, 2025	Jun. 18, 2026	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Jun. 19, 2025	Jun. 18, 2026	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Apr. 30, 2025	Apr. 29, 2026	Radiation (03CH02-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1GHz ~ 7.4GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH02-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1GHz ~ 8GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH02-CB)
Spectrum analyzer	R&S	FSV40	101028	9kHz~40GHz	Jan. 02, 2025	Jan. 01, 2026	Conducted (TH03-CB)
Power Sensor	Anritsu	MA2411B	1726195	300MHz~40GHz	Sep. 12, 2025	Sep. 11, 2026	Conducted (TH03-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 12, 2025	Sep. 11, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-11	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-12	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-13	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-14	1 GHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-15	1 GHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
Switch	SPTCB	SP-SWI	SWI-03	1~18GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH03-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Conducted (TH03-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101025	9kHz ~ 40GHz	Nov. 12, 2025	Nov. 11, 2026	Conducted (DF02-CB)
Signal generator	R&S	SMB100A	181239	1MHz-40GHz	Jan. 21, 2026	Jan. 20, 2027	Conducted (DF02-CB)
Vector Signal Generator	R&S	SMM100A	101894	100kHz ~ 7.5GHz	Nov. 04, 2025	Nov. 03, 2026	Conducted (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -05	1 ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -06	1 ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -07	1 ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -08	1 ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (DF02-CB)
RF Cable-high	Woken	RG402	Cable-60	1~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (DF02-CB)
RF Cable-high	Woken	RG402	Cable-61	1~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (DF02-CB)
RF Cable-high	Woken	RG402	Cable-63	1~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (DF02-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 2	Pass	AV	568.5k	41.65	46.00	-4.35	Line

Mode 2

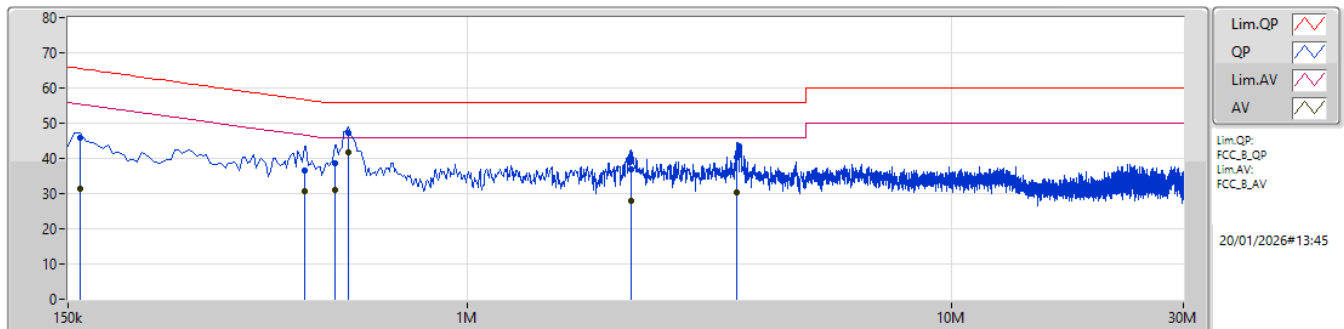

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	159k	45.82	65.52	-19.70	10.39	Line	-	35.43	0.06	0.26	10.07						
AV	159k	31.53	55.52	-23.99	10.39	Line	-	21.14	0.06	0.26	10.07						
QP	460.5k	36.43	56.69	-20.26	10.43	Line	-	26.00	0.06	0.27	10.10						
AV	460.5k	30.81	46.69	-15.88	10.43	Line	-	20.38	0.06	0.27	10.10						
QP	532.5k	38.56	56.00	-17.44	10.43	Line	-	28.13	0.06	0.27	10.10						
AV	532.5k	30.95	46.00	-15.05	10.43	Line	-	20.52	0.06	0.27	10.10						
QP	568.5k	47.18	56.00	-8.82	10.43	Line	-	36.75	0.06	0.26	10.11						
AV	568.5k	41.65	46.00	-4.35	10.43	Line	"Worst"	31.22	0.06	0.26	10.11						
QP	2.175M	37.06	56.00	-18.94	10.34	Line	-	26.72	0.09	0.26	9.99						
AV	2.175M	27.92	46.00	-18.08	10.34	Line	-	17.58	0.09	0.26	9.99						
QP	3.597M	40.24	56.00	-15.76	10.38	Line	-	29.86	0.12	0.28	9.98						
AV	3.597M	30.50	46.00	-15.50	10.38	Line	-	20.12	0.12	0.28	9.98						

Mode 2

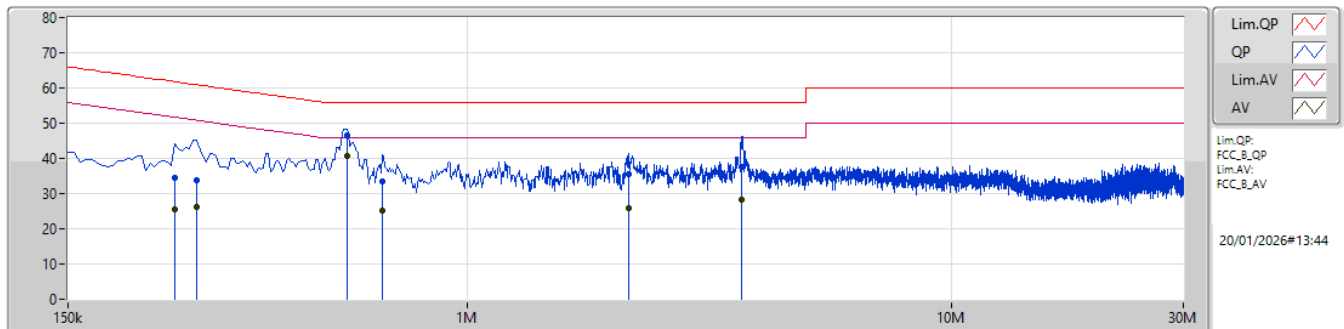

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	249k	34.37	61.79	-27.42	10.31	Neutral	-	24.06	0.07	0.23	10.01						
AV	249k	25.63	51.79	-26.16	10.31	Neutral	-	15.32	0.07	0.23	10.01						
QP	276k	33.96	60.93	-26.97	10.34	Neutral	-	23.62	0.07	0.24	10.03						
AV	276k	26.19	50.93	-24.74	10.34	Neutral	-	15.85	0.07	0.24	10.03						
QP	564k	46.40	56.00	-9.60	10.44	Neutral	-	35.96	0.07	0.27	10.10						
AV	564k	40.85	46.00	-5.15	10.44	Neutral	"Worst"	30.41	0.07	0.27	10.10						
QP	667.5k	33.32	56.00	-22.68	10.45	Neutral	-	22.87	0.08	0.26	10.11						
AV	667.5k	25.30	46.00	-20.70	10.45	Neutral	-	14.85	0.08	0.26	10.11						
QP	2.148M	35.38	56.00	-20.62	10.35	Neutral	-	25.03	0.10	0.26	9.99						
AV	2.148M	25.96	46.00	-20.04	10.35	Neutral	-	15.61	0.10	0.26	9.99						
QP	3.683M	37.59	56.00	-18.41	10.39	Neutral	-	27.20	0.13	0.28	9.98						
AV	3.683M	28.31	46.00	-17.69	10.39	Neutral	-	17.92	0.13	0.28	9.98						

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	22.44M	19.053M	19M1D1D	21.615M	18.98M
802.11be EHT40_Nss1,(MCS0)_2TX	44.44M	38.139M	38M1D1D	43.78M	38.024M
802.11be EHT80_Nss1,(MCS0)_2TX	90.86M	77.989M	78M0D1D	87.78M	77.74M
802.11be EHT160_Nss1,(MCS0)_2TX	174.68M	157.342M	157MD1D	169.84M	157.094M
802.11be EHT320_Nss1,(MCS0)_2TX	341.44M	316.45M	316MD1D	334.4M	315.037M
6.425-6.525GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	23.54M	19.09M	19M1D1D	22.66M	19.065M
802.11be EHT40_Nss1,(MCS0)_2TX	44.99M	38.131M	38M1D1D	44.22M	38.031M
802.11be EHT80_Nss1,(MCS0)_2TX	90.86M	77.961M	78M0D1D	88.66M	77.661M
802.11be EHT160_Nss1,(MCS0)_2TX	172.92M	157.321M	157MD1D	172.48M	157.121M
802.11be EHT320_Nss1,(MCS0)_2TX	335.28M	316.137M	316MD1D	334.4M	315.938M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	23.485M	19.074M	19M1D1D	21.615M	19.022M
802.11be EHT40_Nss1,(MCS0)_2TX	44.99M	38.131M	38M1D1D	44M	37.982M
802.11be EHT80_Nss1,(MCS0)_2TX	90.2M	77.961M	78M0D1D	87.34M	77.699M
802.11be EHT160_Nss1,(MCS0)_2TX	174.68M	157.29M	157MD1D	169.84M	156.979M
802.11be EHT320_Nss1,(MCS0)_2TX	338.8M	316.215M	316MD1D	335.28M	315.676M
6.875-7.125GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	23.485M	19.1M	19M1D1D	22.55M	19.031M
802.11be EHT40_Nss1,(MCS0)_2TX	44.44M	38.111M	38M1D1D	43.67M	38.006M
802.11be EHT80_Nss1,(MCS0)_2TX	90.2M	77.925M	77M9D1D	87.12M	77.811M
802.11be EHT160_Nss1,(MCS0)_2TX	173.36M	157.347M	157MD1D	171.16M	157.202M

Max-N dB = Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5955MHz	Pass	320M	21.615M	19.014M	21.945M	19.053M
6195MHz	Pass	320M	22.275M	18.98M	22.44M	19.049M
6415MHz	Pass	320M	21.945M	18.994M	21.89M	19.026M
6435MHz	Pass	320M	22.66M	19.09M	23.54M	19.09M
6475MHz	Pass	320M	22.935M	19.065M	23.375M	19.09M
6515MHz	Pass	320M	22.825M	19.065M	23.54M	19.09M
6535MHz	Pass	320M	22.715M	19.032M	21.615M	19.059M
6695MHz	Pass	320M	23.32M	19.045M	22.605M	19.022M
6875MHz	Pass	320M	22.825M	19.05M	23.485M	19.074M
6895MHz	Pass	320M	22.88M	19.078M	23.32M	19.082M
6995MHz	Pass	320M	22.55M	19.055M	23.485M	19.1M
7095MHz	Pass	320M	23.265M	19.031M	23.265M	19.064M
7115MHz	Pass	320M	22.99M	19.061M	23.43M	19.098M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	320M	43.89M	38.105M	44.11M	38.054M
6205MHz	Pass	320M	44.11M	38.085M	43.78M	38.075M
6405MHz	Pass	320M	44.22M	38.139M	44.44M	38.024M
6445MHz	Pass	320M	44.33M	38.131M	44.55M	38.031M
6485MHz	Pass	320M	44.33M	38.131M	44.44M	38.031M
6525MHz	Pass	320M	44.99M	38.081M	44.22M	38.031M
6565MHz	Pass	320M	44.99M	38.088M	44.44M	37.982M
6685MHz	Pass	320M	44.55M	38.131M	44M	38.031M
6885MHz	Pass	320M	44.11M	38.103M	44.22M	38.11M
6925MHz	Pass	320M	44.44M	38.111M	43.67M	38.006M
7005MHz	Pass	320M	44.11M	38.085M	44.22M	38.061M
7085MHz	Pass	320M	43.89M	38.098M	44.11M	38.065M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	320M	89.1M	77.772M	89.1M	77.74M
6225MHz	Pass	320M	88M	77.916M	87.78M	77.746M
6385MHz	Pass	320M	90.86M	77.989M	88.88M	77.835M
6465MHz	Pass	320M	90.86M	77.861M	89.54M	77.861M
6545MHz	Pass	320M	89.54M	77.961M	88.66M	77.661M
6625MHz	Pass	320M	89.98M	77.839M	89.1M	77.735M
6705MHz	Pass	320M	90.2M	77.961M	89.1M	77.761M
6785MHz	Pass	320M	89.1M	77.857M	89.32M	77.699M
6865MHz	Pass	320M	89.76M	77.881M	87.34M	77.794M
6945MHz	Pass	320M	89.54M	77.906M	87.12M	77.811M
7025MHz	Pass	320M	90.2M	77.889M	89.54M	77.925M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	320M	173.8M	157.176M	171.16M	157.272M
6185MHz	Pass	320M	174.68M	157.094M	171.16M	157.213M
6345MHz	Pass	320M	173.8M	157.342M	169.84M	157.291M
6505MHz	Pass	320M	172.92M	157.321M	172.48M	157.121M
6665MHz	Pass	320M	174.68M	157.29M	172.04M	156.979M
6825MHz	Pass	320M	174.68M	157.168M	169.84M	157.205M
6985MHz	Pass	320M	173.36M	157.347M	171.16M	157.202M
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6105MHz	Pass	320M	337.04M	315.732M	334.4M	315.037M
6265MHz	Pass	320M	341.44M	315.83M	335.28M	315.328M
6425MHz	Pass	320M	336.16M	316.45M	334.4M	316.153M
6585MHz	Pass	320M	335.28M	315.938M	334.4M	316.137M
6745MHz	Pass	320M	336.16M	316.215M	335.28M	315.676M
6905MHz	Pass	320M	338.8M	316.038M	337.92M	315.892M




Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5955MHz

12/11/2025

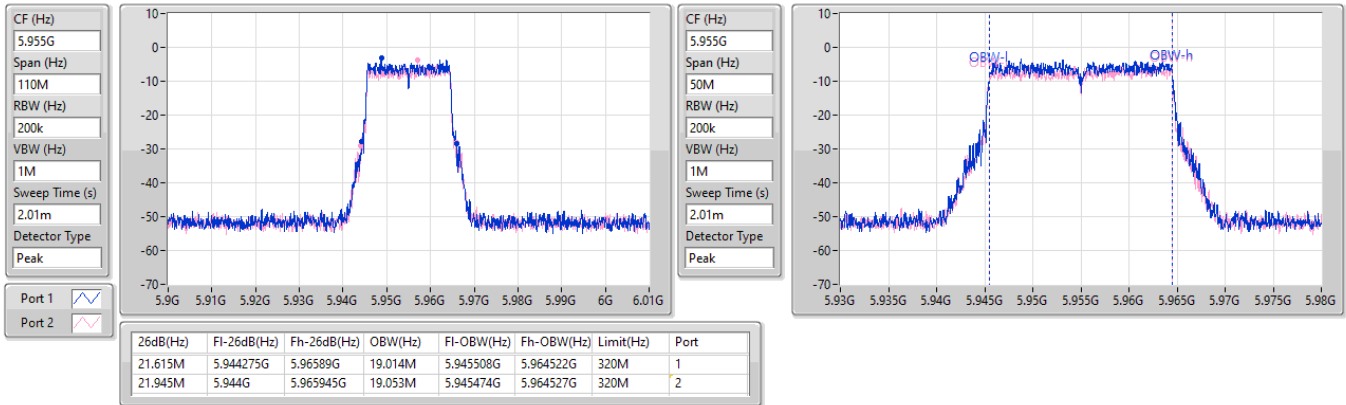

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6195MHz

12/11/2025

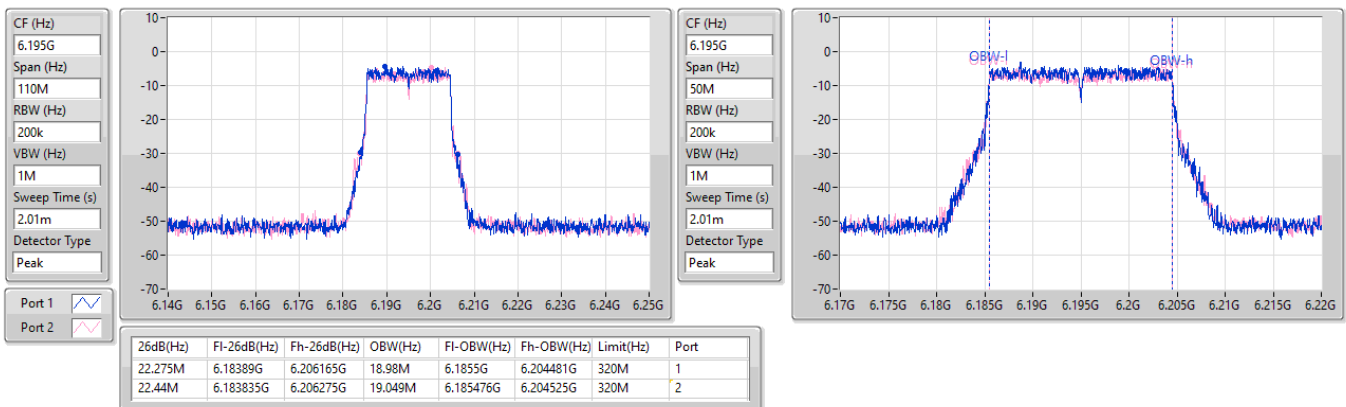


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6415MHz

12/11/2025

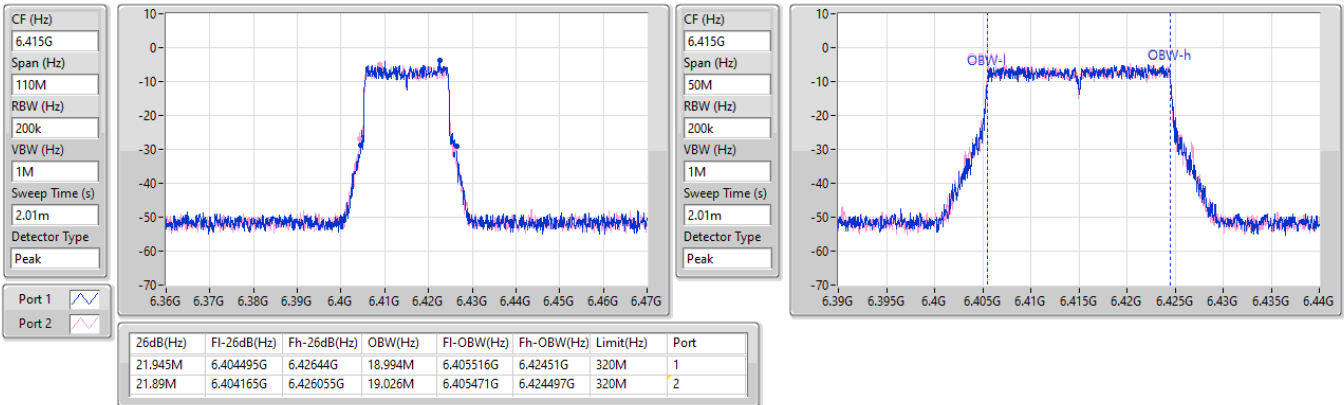

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6435MHz

28/11/2025

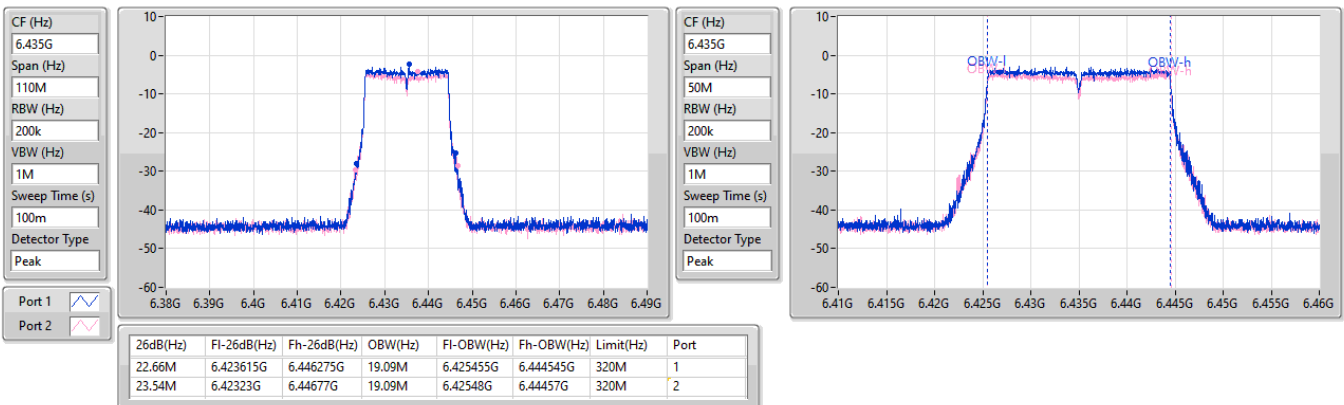


6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6475MHz

28/11/2025

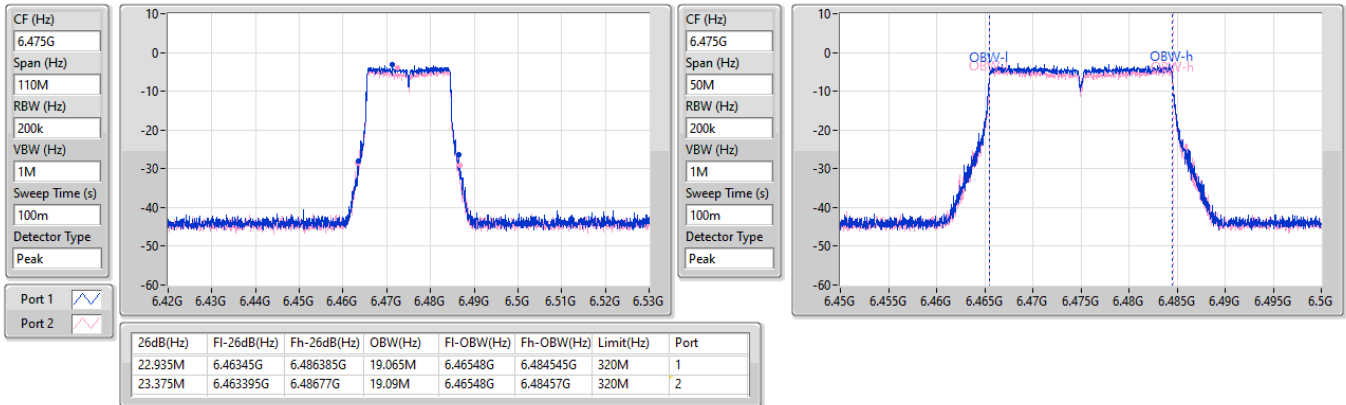

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6515MHz

28/11/2025

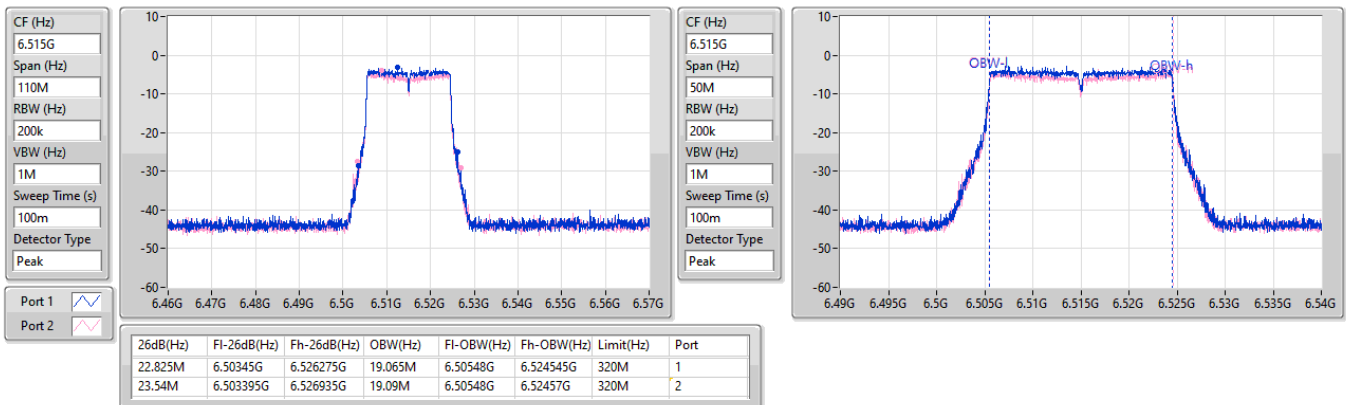


6.525-6.875GHz_802.11be EHT20_Nss1_(MCS0)_2TX
EBW
6535MHz

12/11/2025

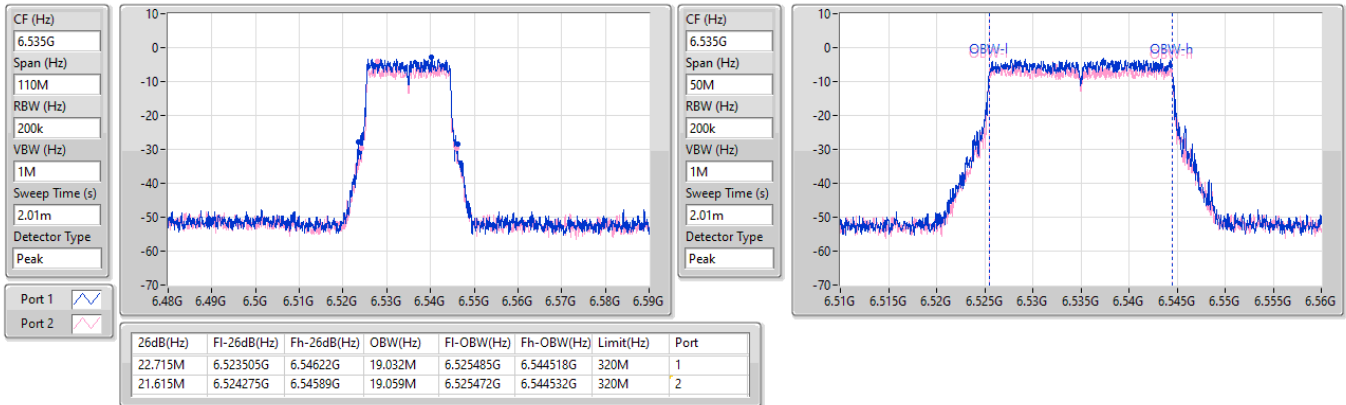
6.525-6.875GHz_802.11be EHT20_Nss1_(MCS0)_2TX
EBW
6695MHz

12/11/2025

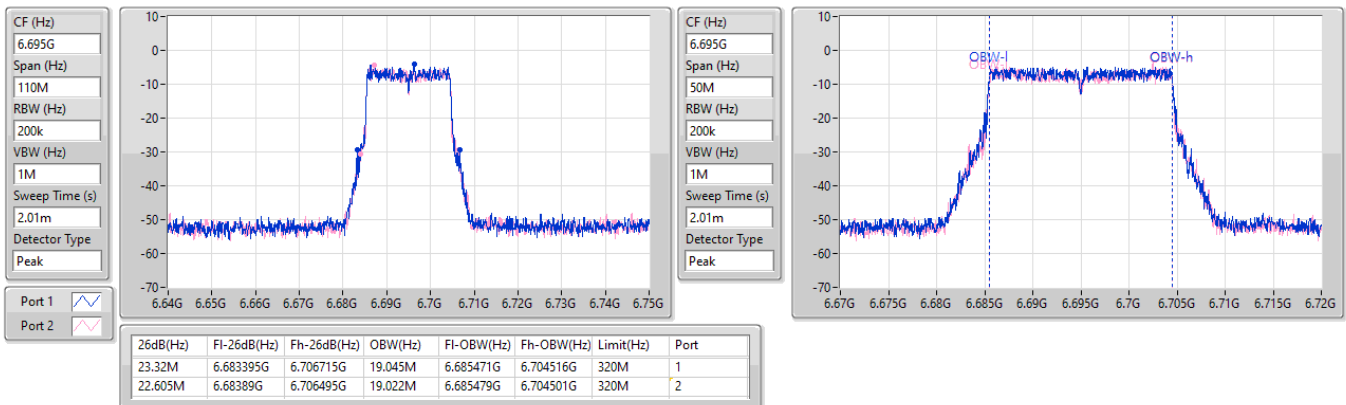


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

6875MHz

12/11/2025

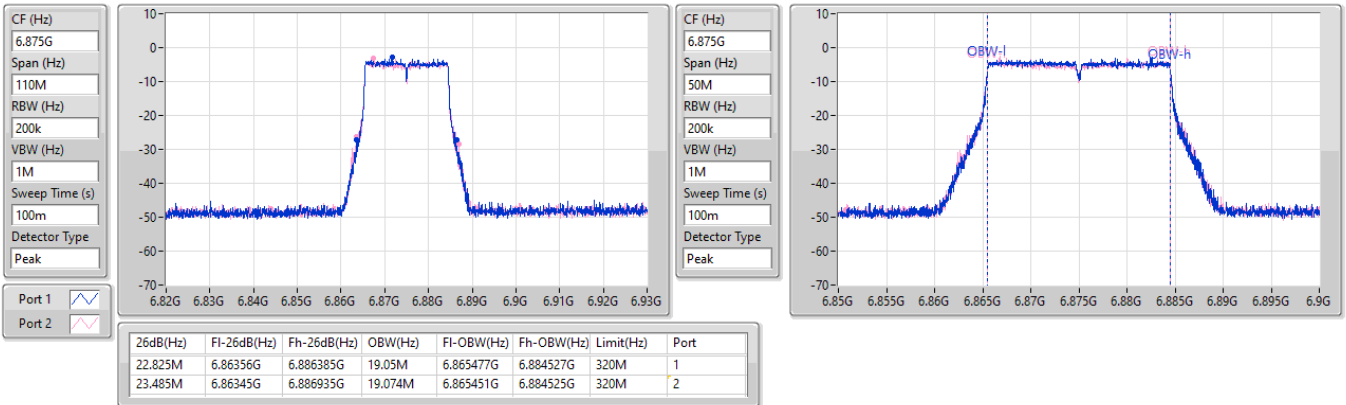


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW


6895MHz

12/11/2025

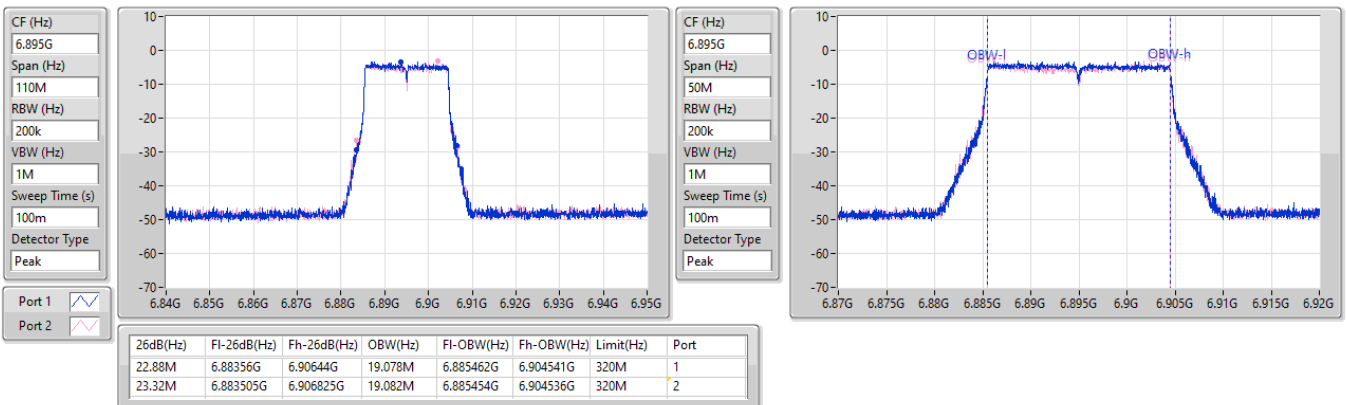


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6995MHz

12/11/2025

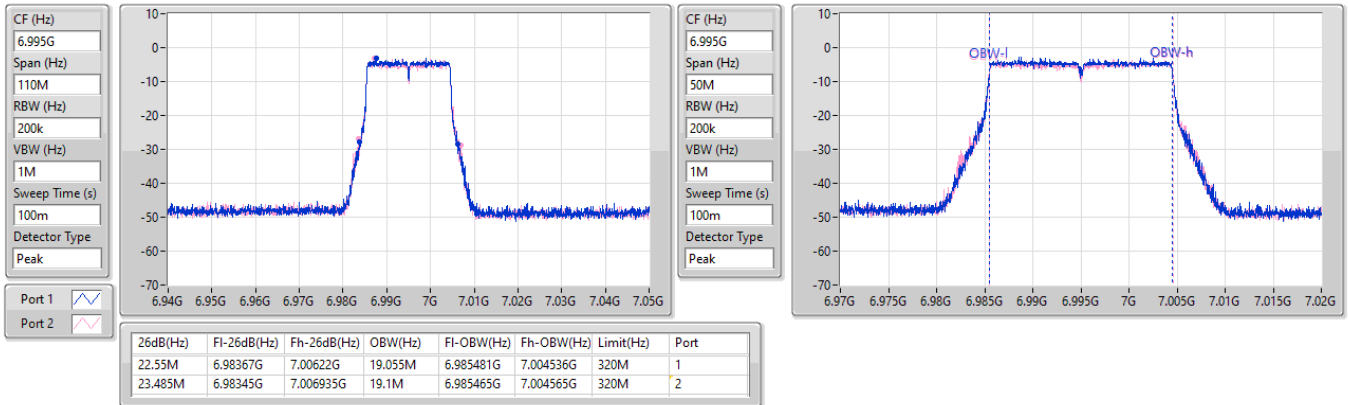

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
7095MHz

12/11/2025

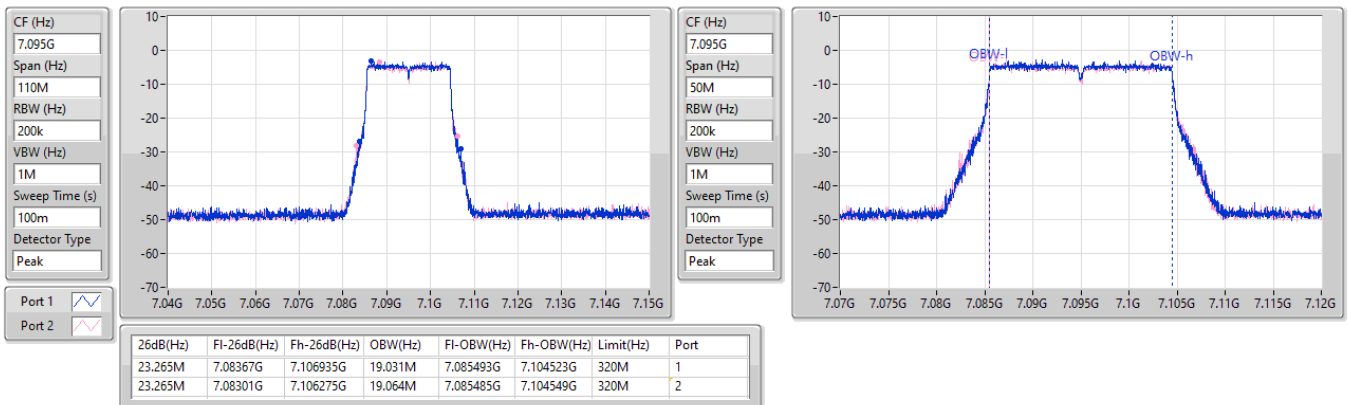


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
7115MHz

12/11/2025

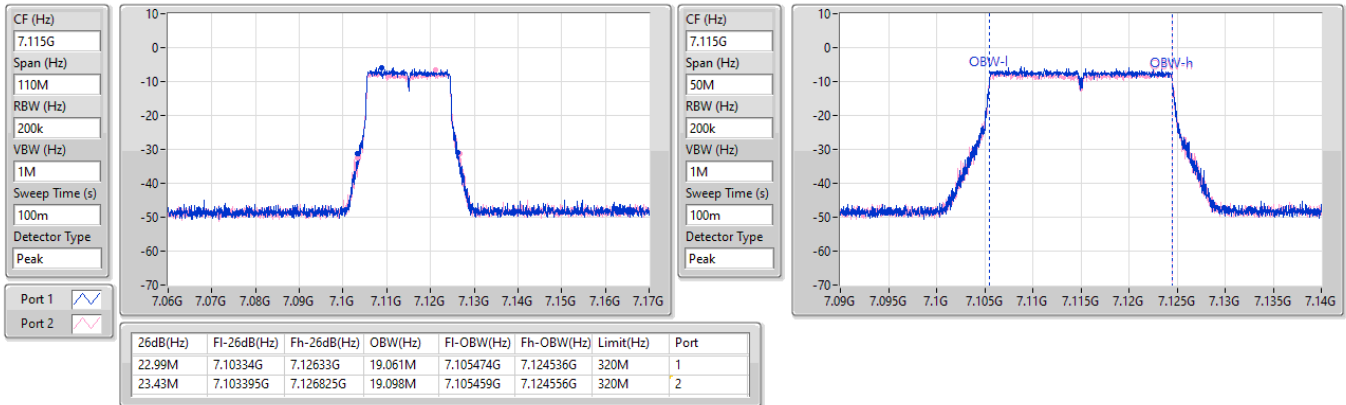

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5965MHz

12/11/2025

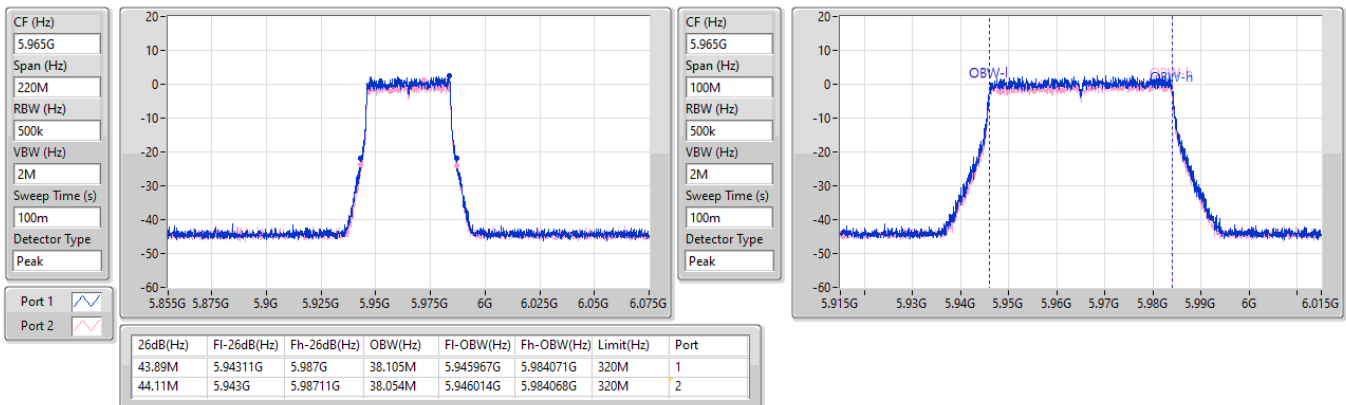


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6205MHz

12/11/2025

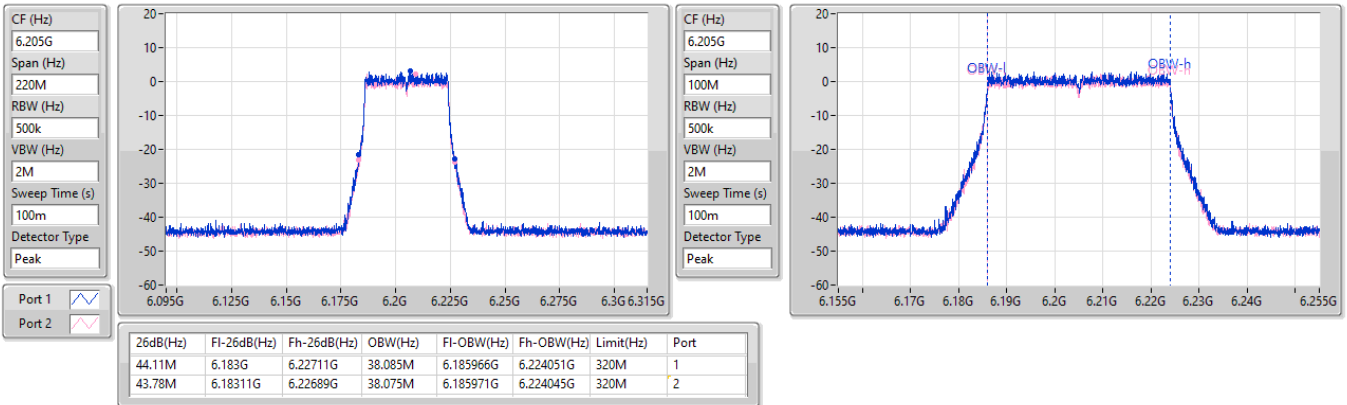

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6405MHz

12/11/2025

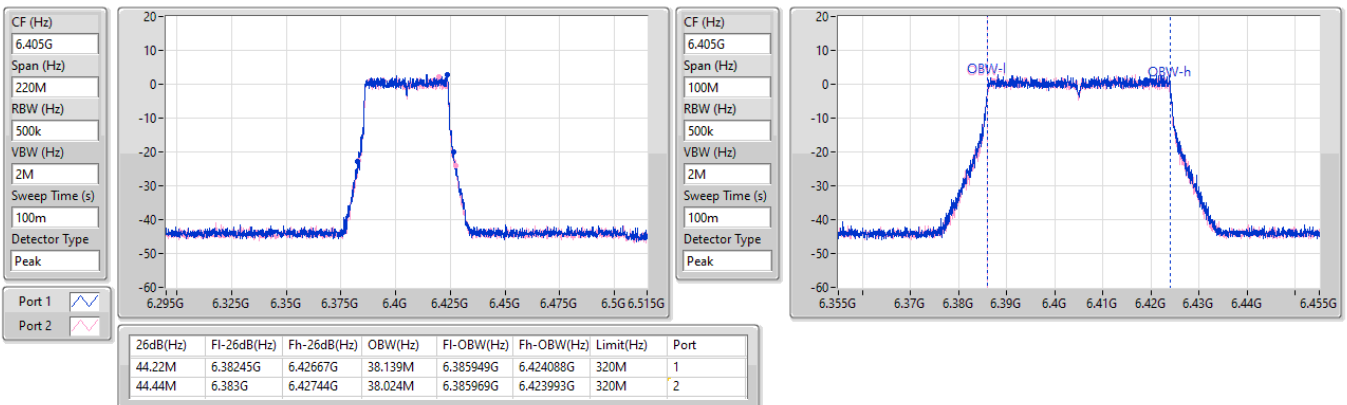


6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6445MHz

29/11/2025

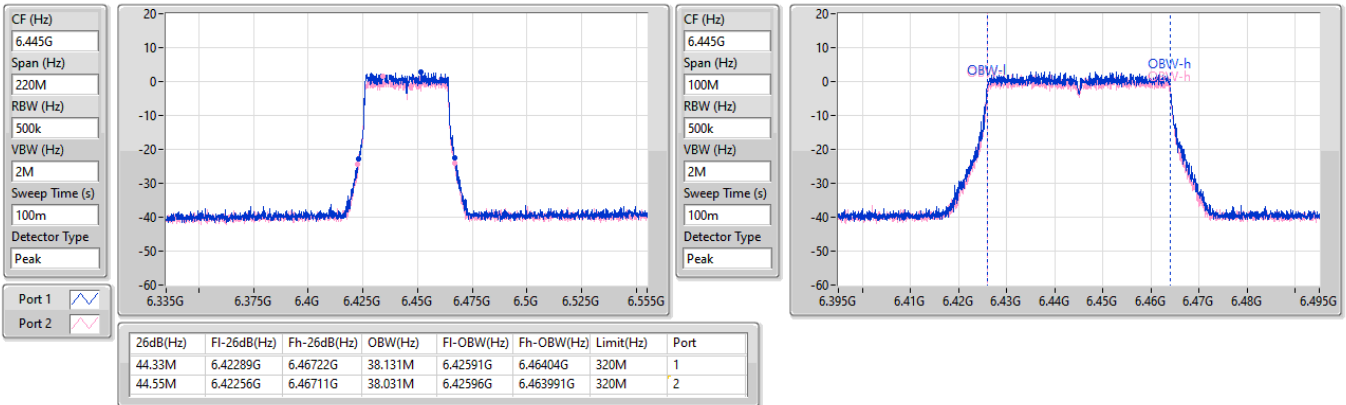

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6485MHz

29/11/2025

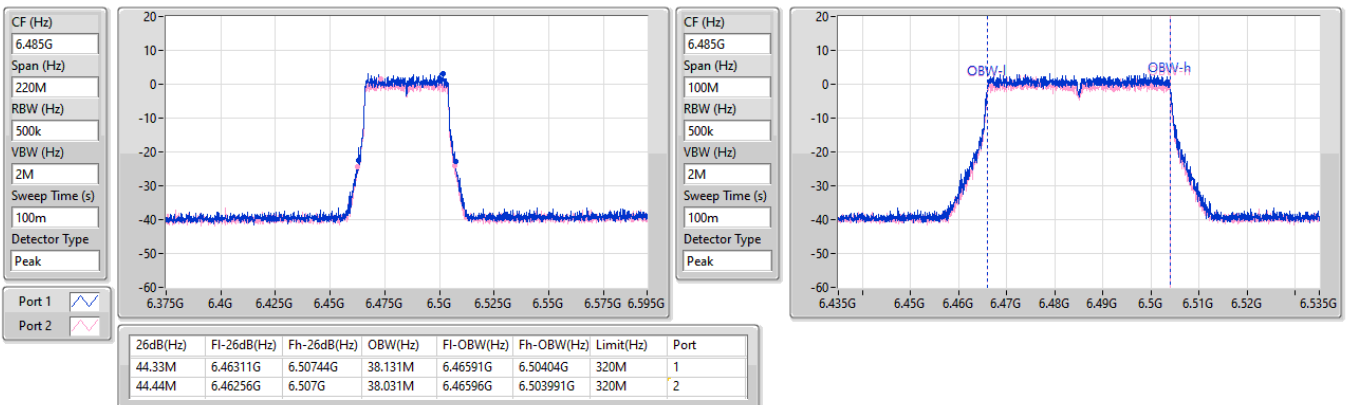


6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6525MHz

29/11/2025

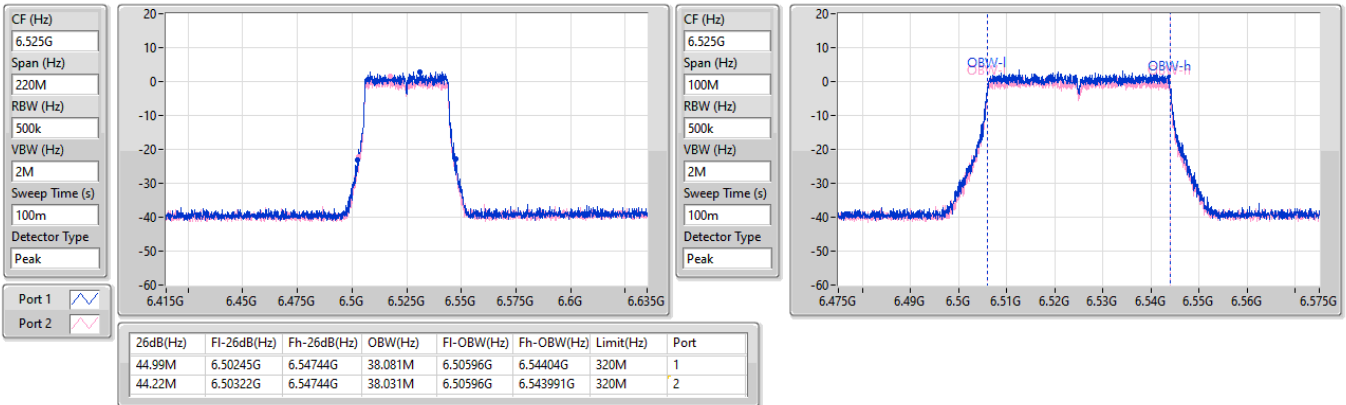

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6565MHz

12/11/2025

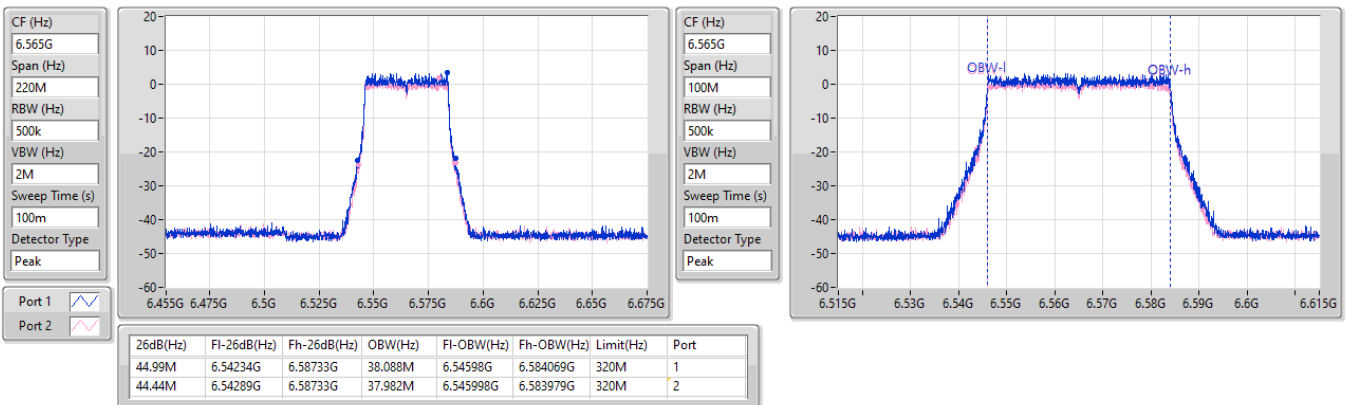


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6685MHz

29/11/2025

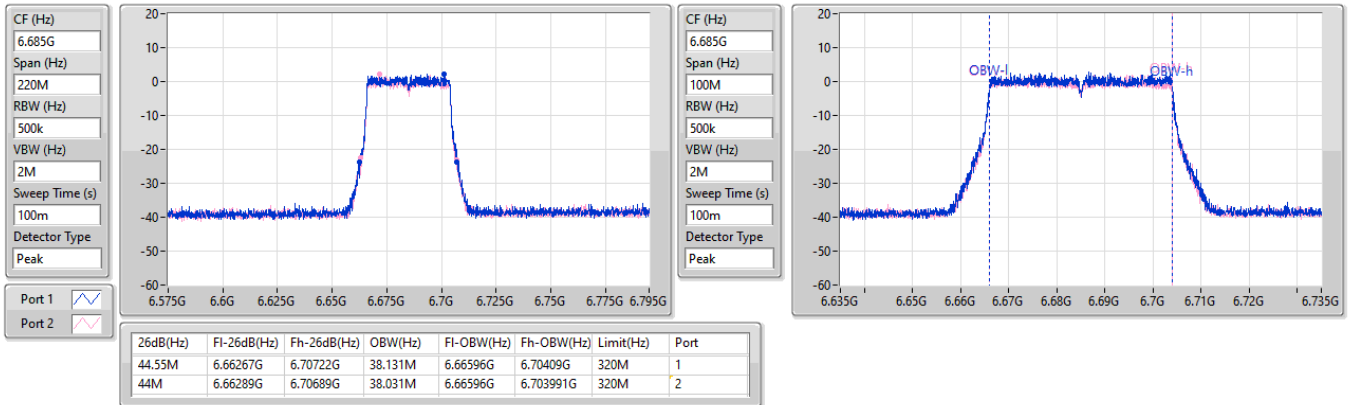

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6885MHz

12/11/2025

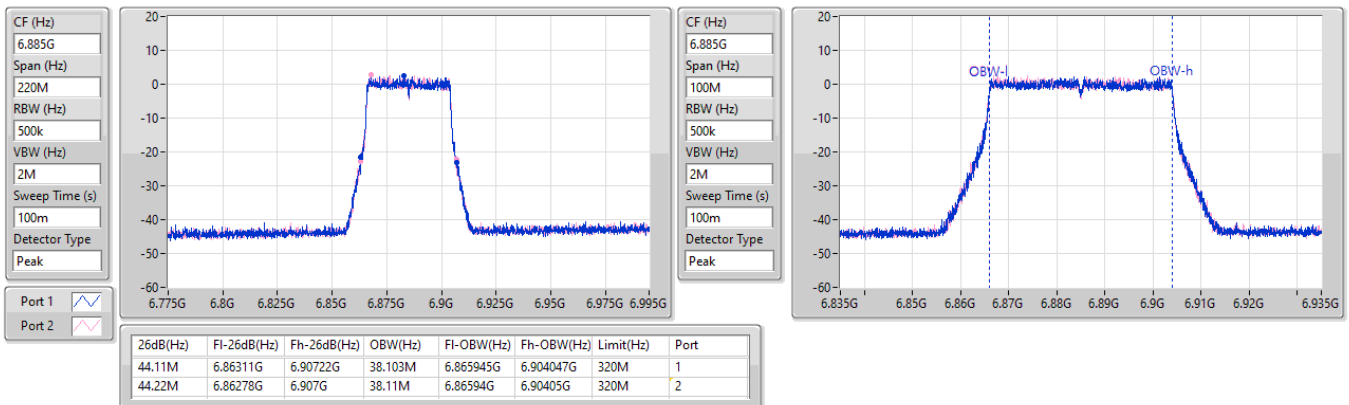


6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6925MHz

12/11/2025

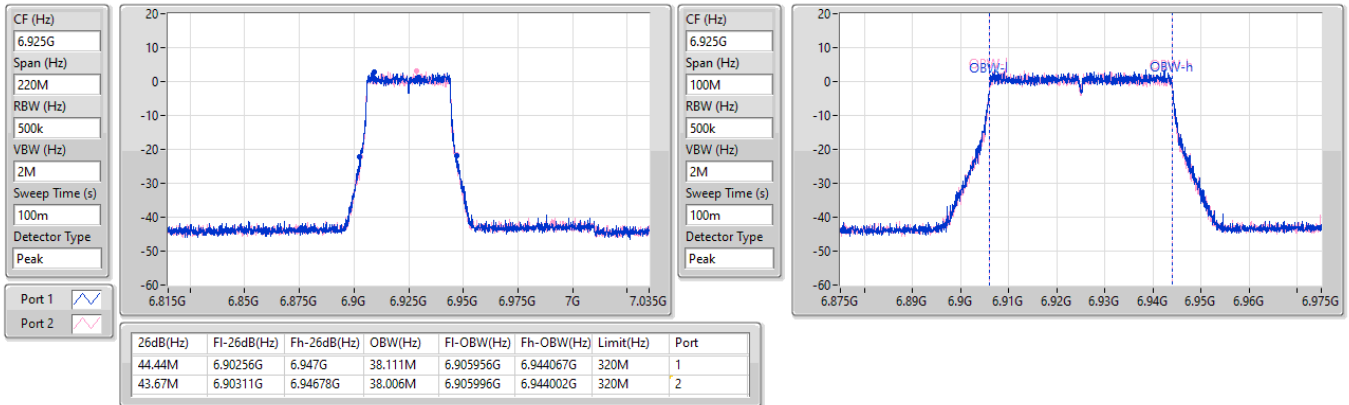
6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
7005MHz

12/11/2025

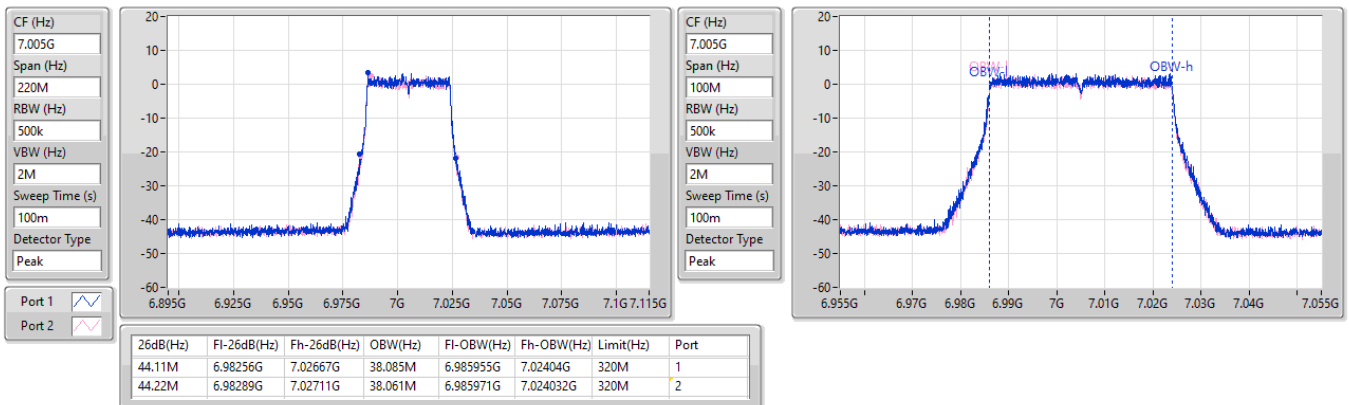


6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

7085MHz

12/11/2025

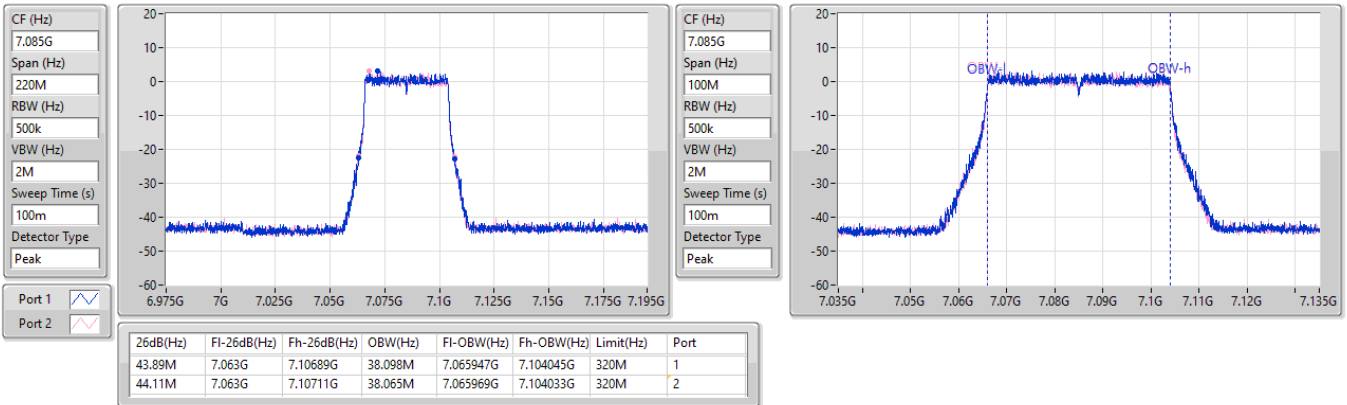


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5985MHz

12/11/2025

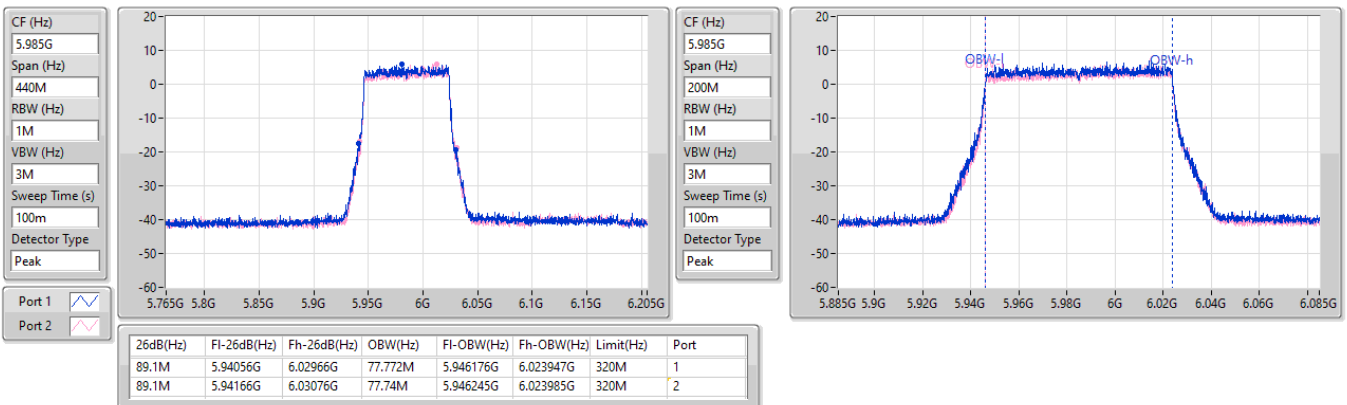


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

6225MHz

12/11/2025

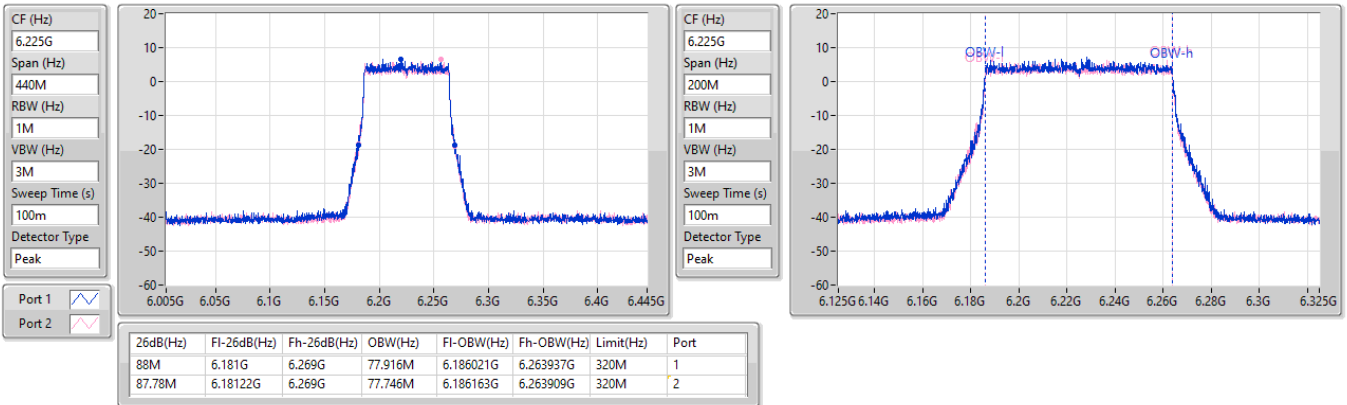


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW


6385MHz

12/11/2025

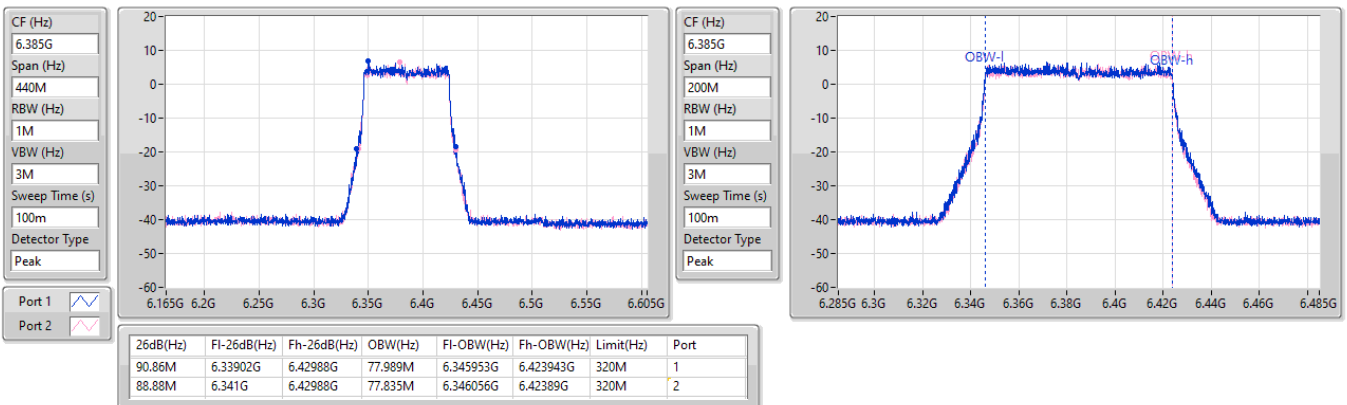


6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6465MHz

29/11/2025

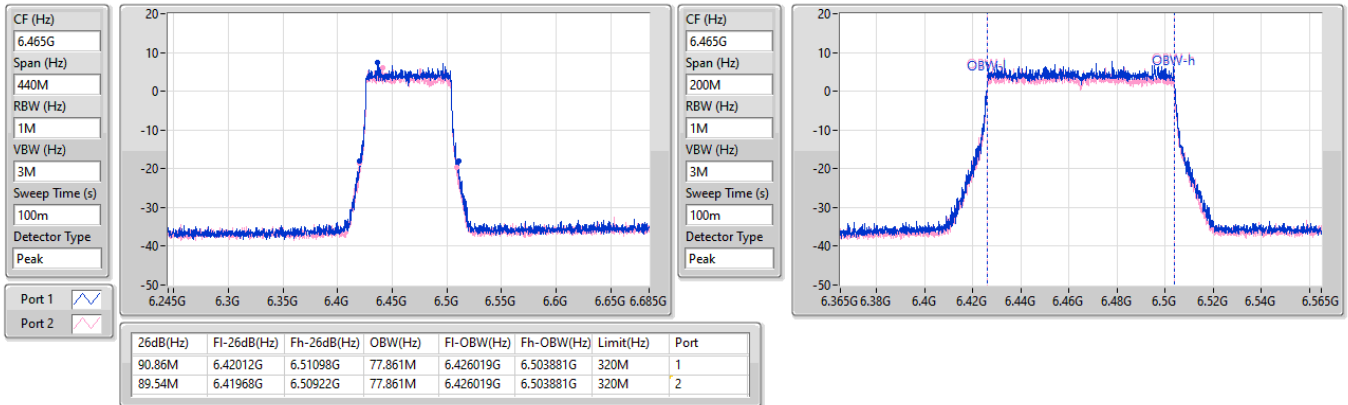

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6545MHz

29/11/2025

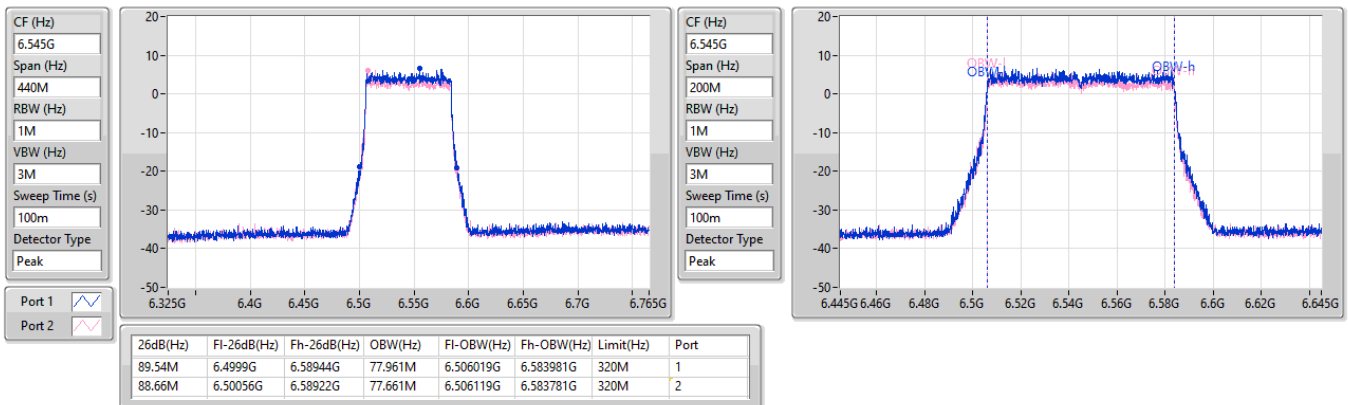


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6625MHz

12/11/2025

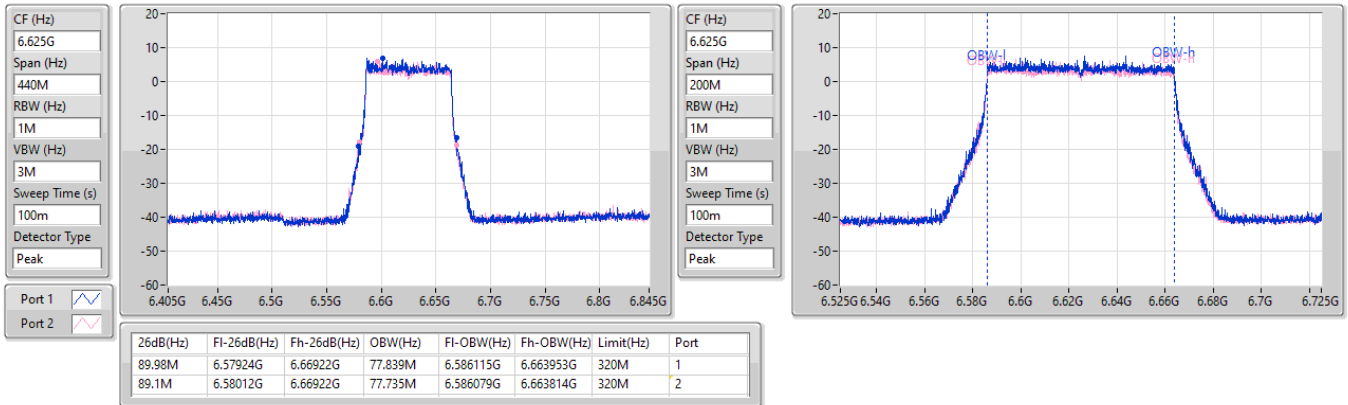

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6705MHz

29/11/2025

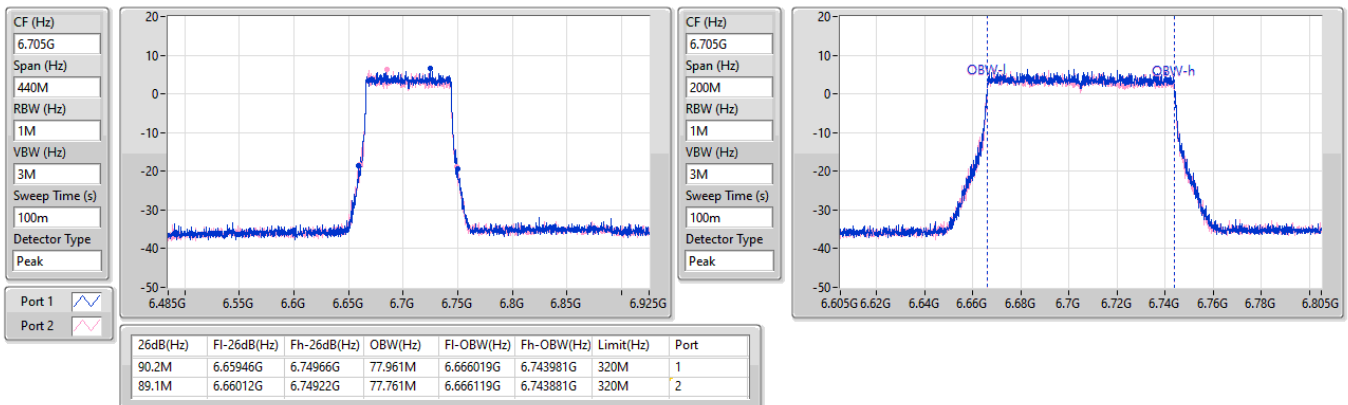


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6785MHz

12/11/2025

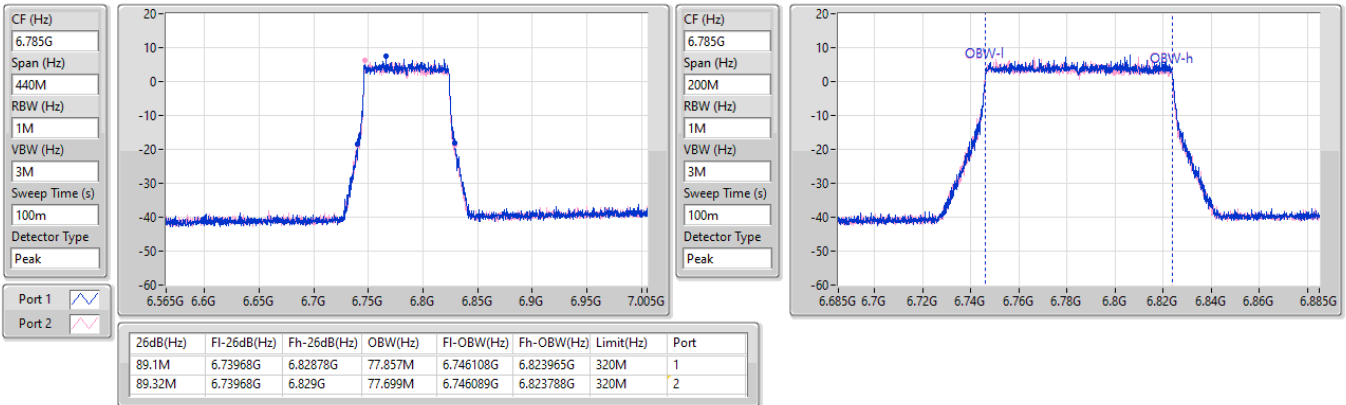
6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6865MHz

12/11/2025

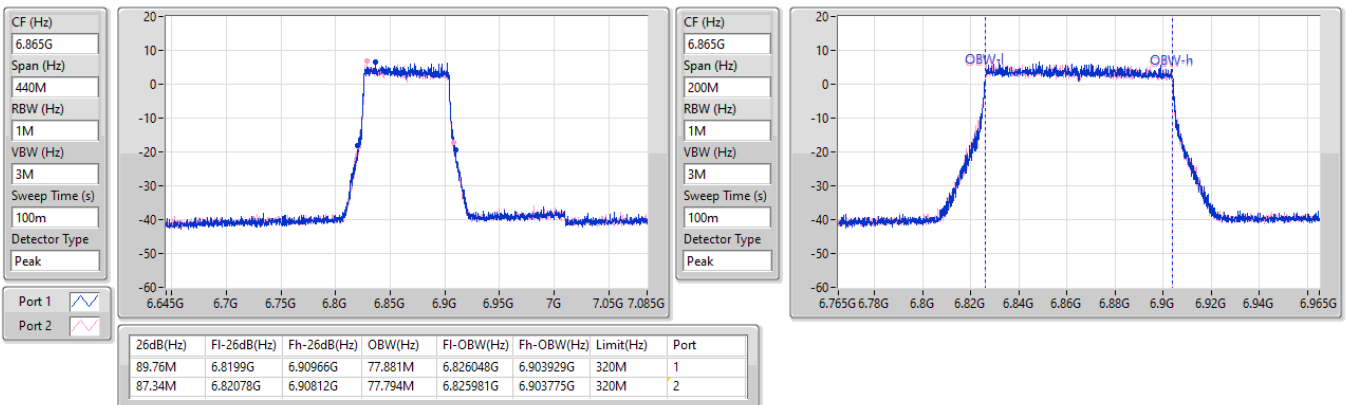


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

6945MHz

12/11/2025

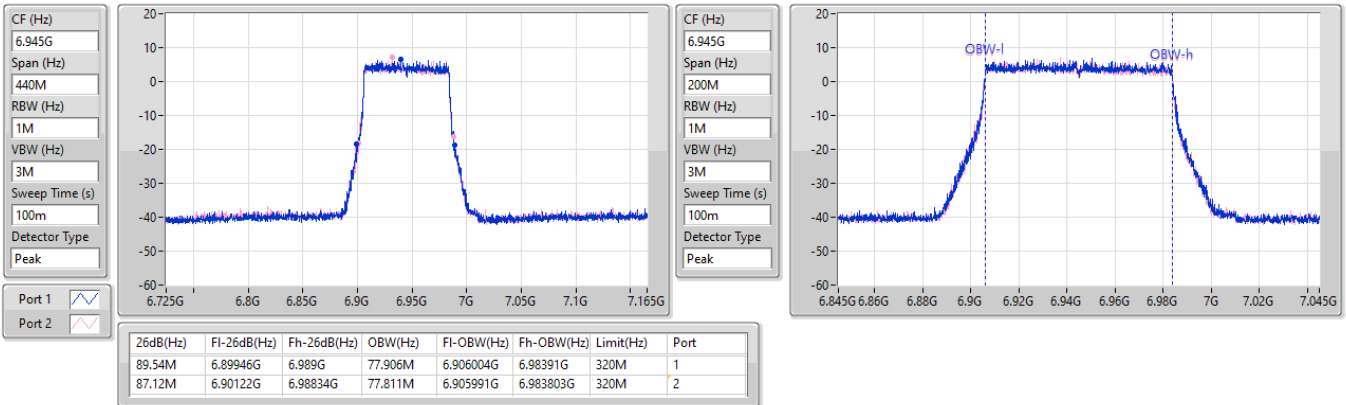


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

7025MHz

13/11/2025


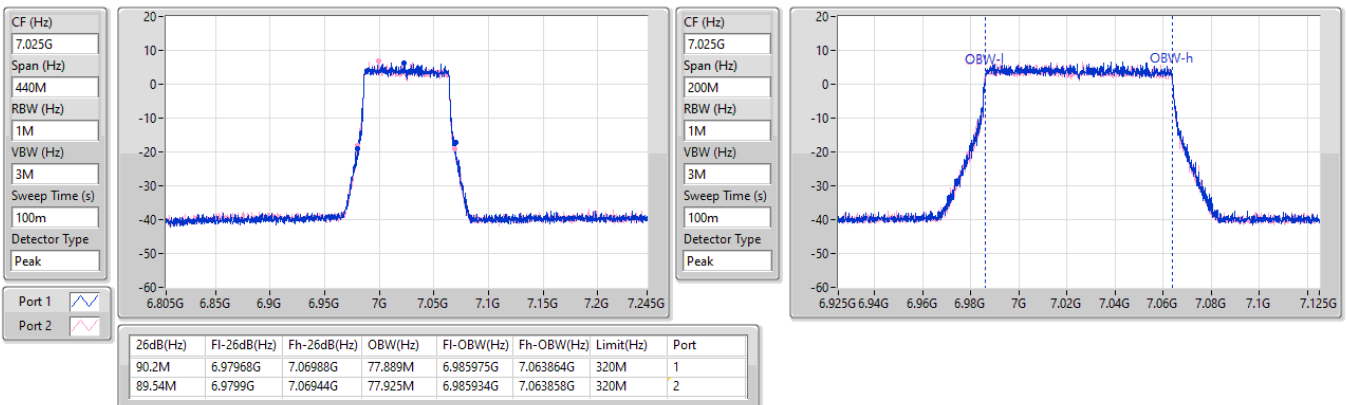


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6025MHz

13/11/2025

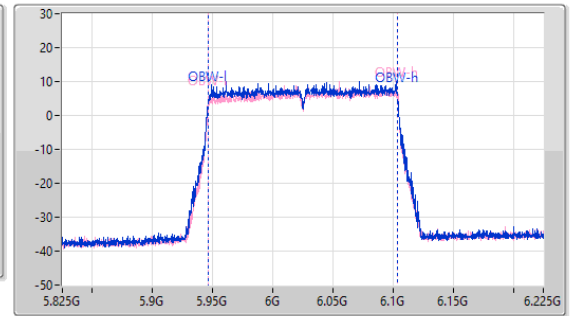
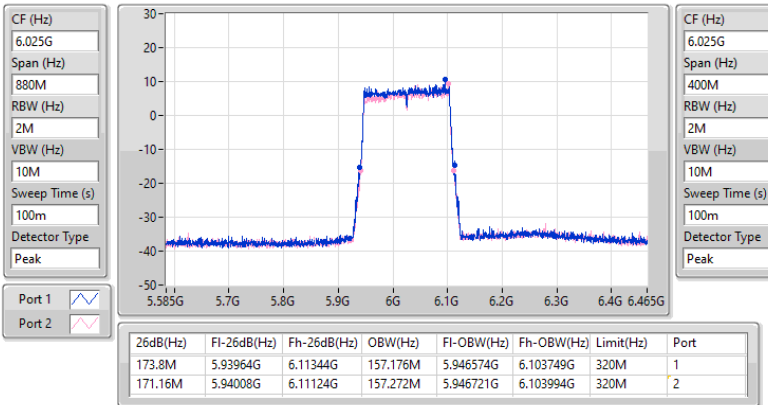


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6185MHz

13/11/2025

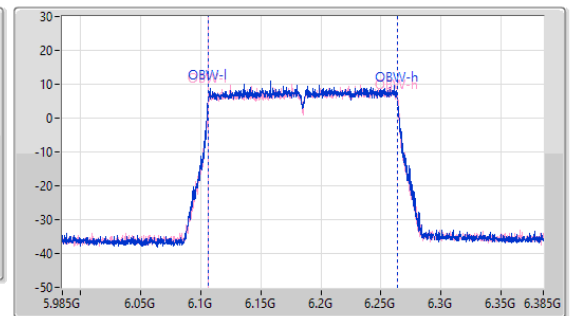
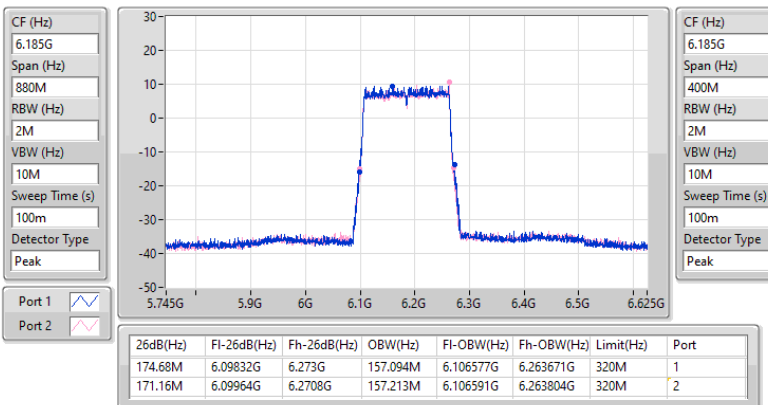


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6345MHz

13/11/2025

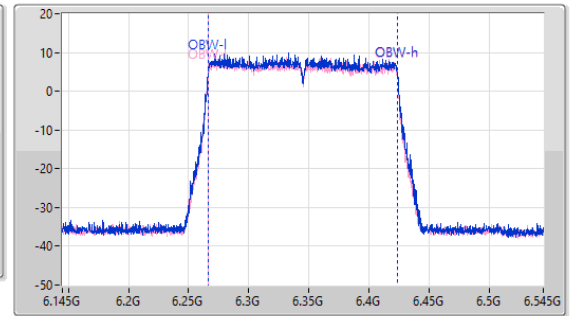
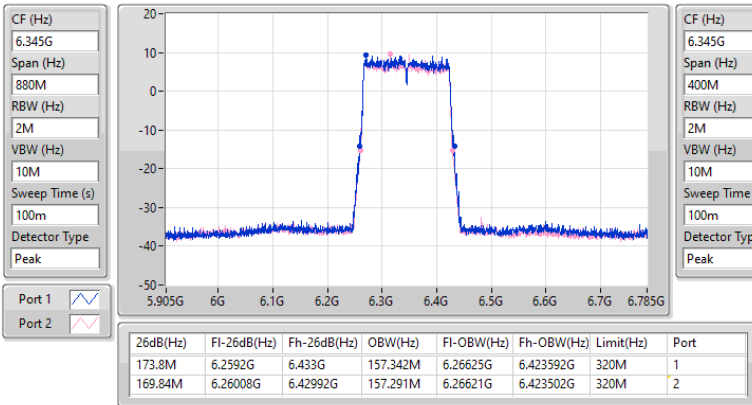


6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6505MHz

29/11/2025

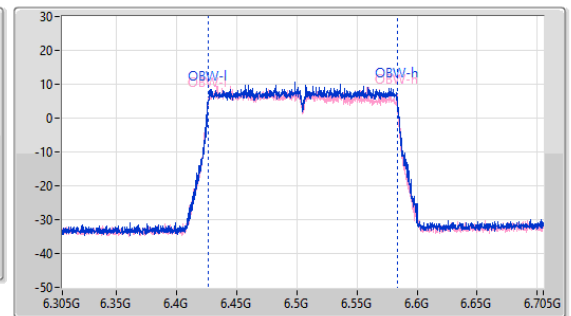
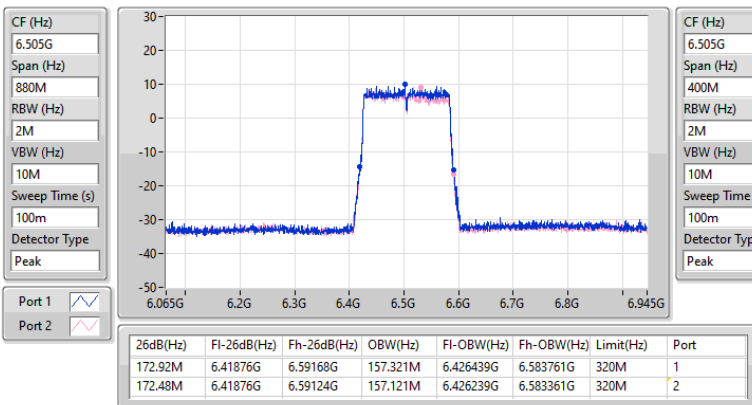


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6665MHz

13/11/2025

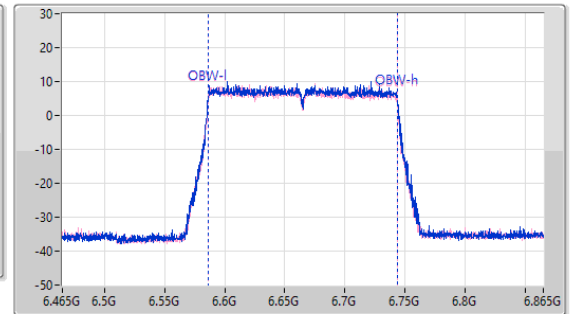
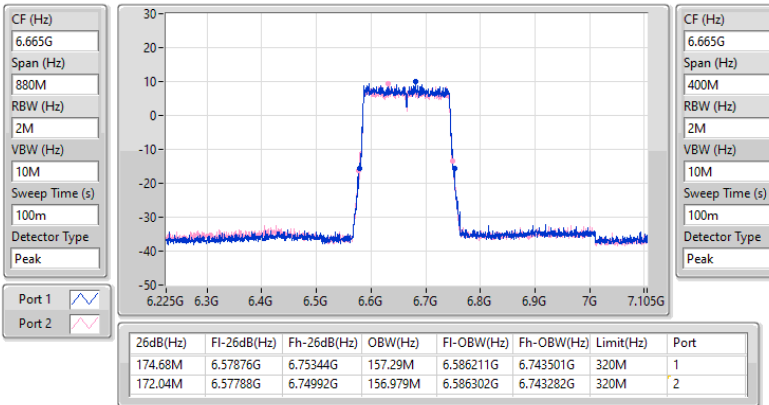


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW



6825MHz

13/11/2025

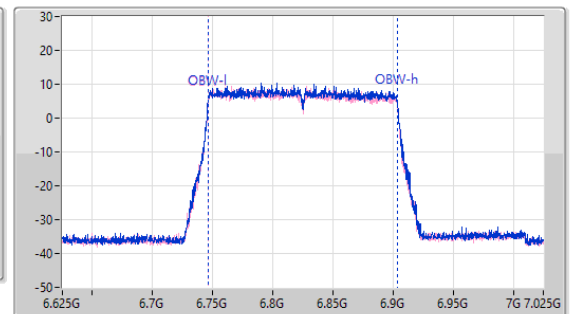
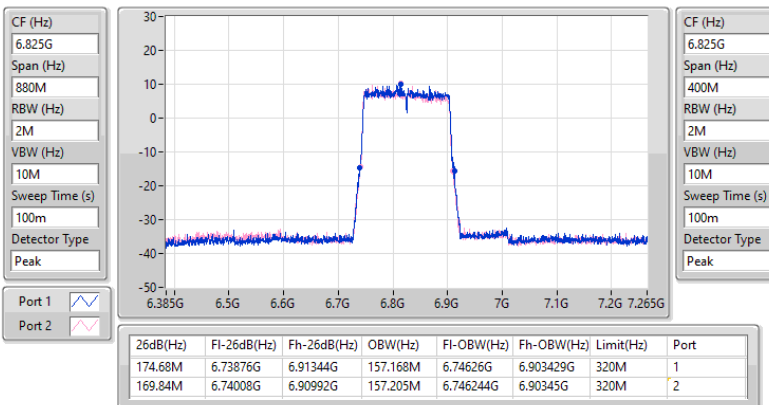


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
6985MHz

13/11/2025

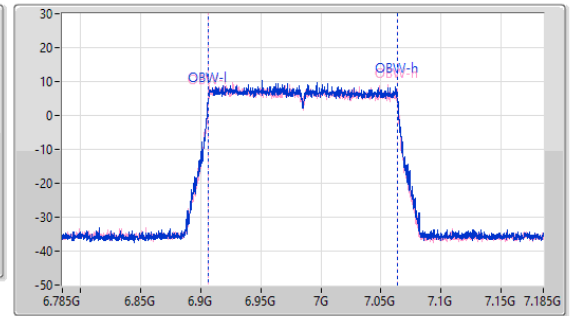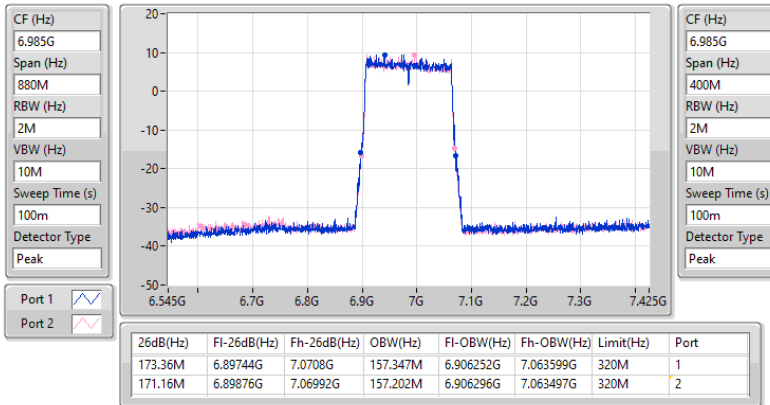
5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX
EBW
6105MHz

01/12/2025

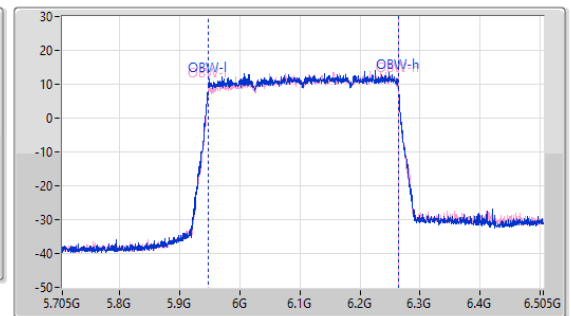
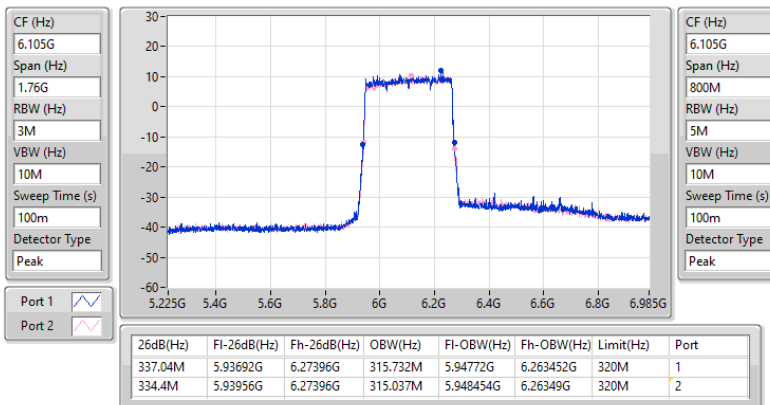


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

EBW

6265MHz

01/12/2025

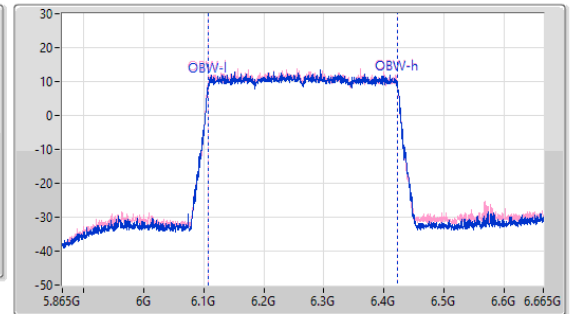
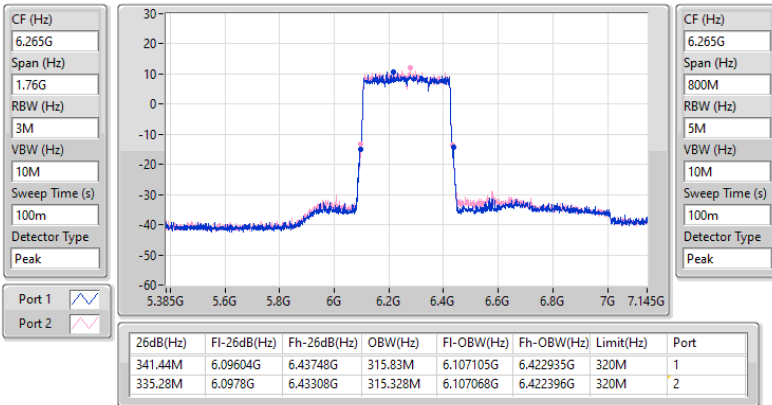


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

EBW

6425MHz

01/12/2025

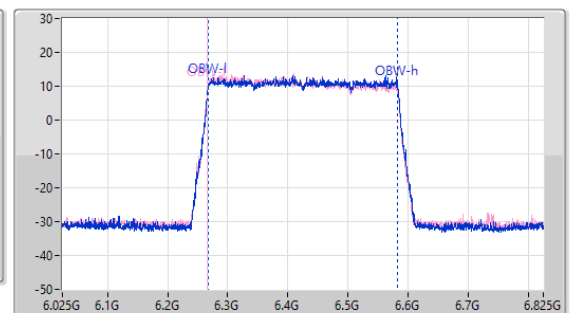
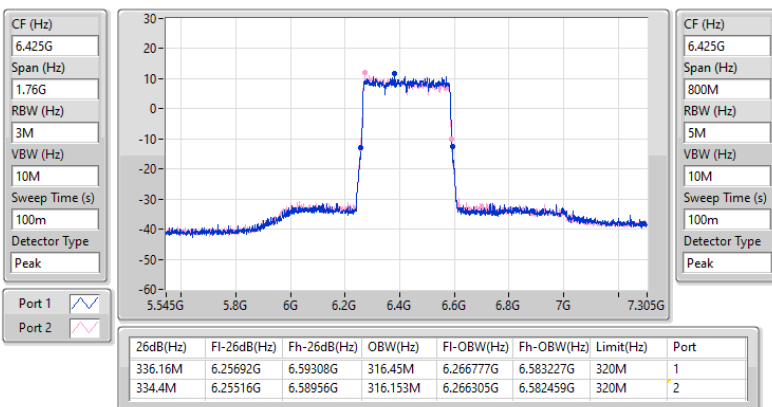


6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_2TX

EBW

6585MHz

01/12/2025

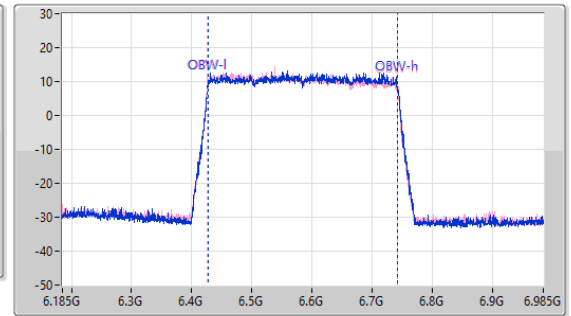
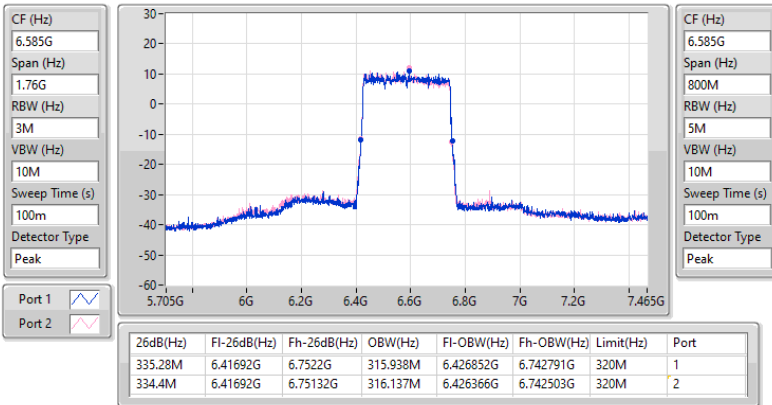


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_2TX

EBW

6745MHz

01/12/2025

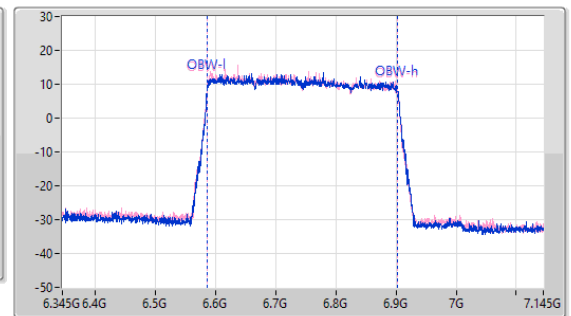
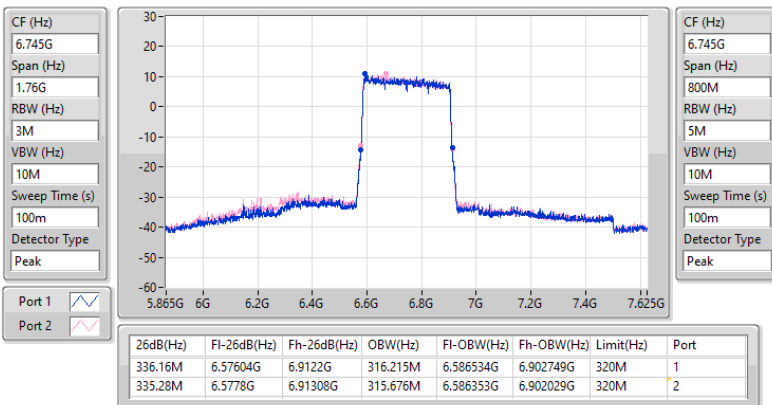


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_2TX

EBW

6905MHz

01/12/2025

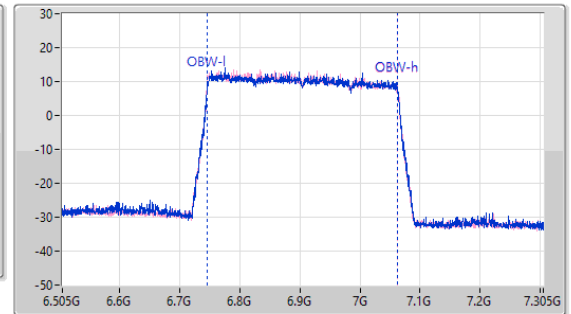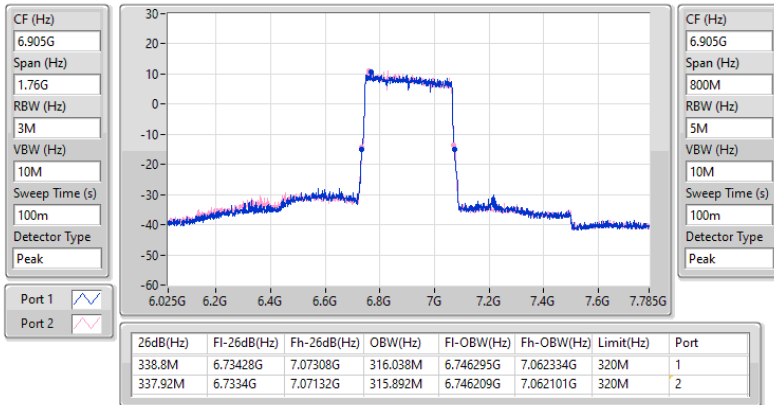

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	10.53	0.01130	16.44	0.04406
802.11be EHT20-BF_Nss1,(MCS0)_2TX	10.53	0.01130	18.98	0.07907
802.11be EHT40_Nss1,(MCS0)_2TX	13.18	0.02080	19.09	0.08110
802.11be EHT40-BF_Nss1,(MCS0)_2TX	13.18	0.02080	21.63	0.14555
802.11be EHT80_Nss1,(MCS0)_2TX	16.64	0.04613	22.55	0.17989
802.11be EHT80-BF_Nss1,(MCS0)_2TX	16.64	0.04613	25.09	0.32285
802.11be EHT160_Nss1,(MCS0)_2TX	18.87	0.07709	24.78	0.30061
802.11be EHT160-BF_Nss1,(MCS0)_2TX	18.87	0.07709	27.32	0.53951
802.11be EHT320_Nss1,(MCS0)_2TX	21.94	0.15631	27.85	0.60954
802.11be EHT320-BF_Nss1,(MCS0)_2TX	21.48	0.14060	29.93	0.98401
6.425-6.525GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	10.61	0.01151	16.52	0.04487
802.11be EHT20-BF_Nss1,(MCS0)_2TX	10.61	0.01151	19.00	0.07943
802.11be EHT40_Nss1,(MCS0)_2TX	13.37	0.02173	19.28	0.08472
802.11be EHT40-BF_Nss1,(MCS0)_2TX	13.37	0.02173	21.76	0.14997
802.11be EHT80_Nss1,(MCS0)_2TX	16.53	0.04498	22.44	0.17539
802.11be EHT80-BF_Nss1,(MCS0)_2TX	16.53	0.04498	24.92	0.31046
802.11be EHT160_Nss1,(MCS0)_2TX	19.18	0.08279	25.09	0.32285
802.11be EHT160-BF_Nss1,(MCS0)_2TX	19.18	0.08279	27.57	0.57148
802.11be EHT320_Nss1,(MCS0)_2TX	21.64	0.14588	27.55	0.56885
802.11be EHT320-BF_Nss1,(MCS0)_2TX	21.19	0.13152	29.58	0.90782
6.525-6.875GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	10.62	0.01153	16.53	0.04498
802.11be EHT20-BF_Nss1,(MCS0)_2TX	10.62	0.01153	19.01	0.07962
802.11be EHT40_Nss1,(MCS0)_2TX	13.63	0.02307	19.54	0.08995
802.11be EHT40-BF_Nss1,(MCS0)_2TX	13.63	0.02307	22.02	0.15922
802.11be EHT80_Nss1,(MCS0)_2TX	16.48	0.04446	22.39	0.17338
802.11be EHT80-BF_Nss1,(MCS0)_2TX	16.48	0.04446	24.87	0.30690
802.11be EHT160_Nss1,(MCS0)_2TX	19.01	0.07962	24.92	0.31046
802.11be EHT160-BF_Nss1,(MCS0)_2TX	19.01	0.07962	27.40	0.54954
802.11be EHT320_Nss1,(MCS0)_2TX	21.78	0.15066	27.69	0.58749
802.11be EHT320-BF_Nss1,(MCS0)_2TX	21.29	0.13459	29.68	0.92897
6.875-7.125GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	10.18	0.01042	16.17	0.04140
802.11be EHT20-BF_Nss1,(MCS0)_2TX	10.18	0.01042	18.28	0.06730
802.11be EHT40_Nss1,(MCS0)_2TX	13.88	0.02443	19.87	0.09705
802.11be EHT40-BF_Nss1,(MCS0)_2TX	13.88	0.02443	21.98	0.15776
802.11be EHT80_Nss1,(MCS0)_2TX	16.60	0.04571	22.59	0.18155
802.11be EHT80-BF_Nss1,(MCS0)_2TX	16.60	0.04571	24.70	0.29512
802.11be EHT160_Nss1,(MCS0)_2TX	18.84	0.07656	24.83	0.30409
802.11be EHT160-BF_Nss1,(MCS0)_2TX	18.84	0.07656	26.94	0.49431

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	5.91	7.96	7.03	10.53	16.44	30.00
6195MHz	Pass	5.91	7.71	7.18	10.46	16.37	30.00
6415MHz	Pass	5.91	7.46	7.27	10.38	16.29	30.00
6435MHz	Pass	5.91	7.85	6.73	10.34	16.25	30.00
6475MHz	Pass	5.91	7.57	6.71	10.17	16.08	30.00
6515MHz	Pass	5.91	8.11	7.01	10.61	16.52	30.00
6535MHz	Pass	5.91	8.35	6.71	10.62	16.53	30.00
6695MHz	Pass	5.91	7.28	6.9	10.10	16.01	30.00
6875MHz	Pass	5.91	7.42	7.18	10.31	16.22	30.00
6895MHz	Pass	5.99	7.28	6.88	10.09	16.08	30.00
6995MHz	Pass	5.99	7.37	6.97	10.18	16.17	30.00
7095MHz	Pass	5.99	7.22	6.91	10.08	16.07	30.00
7115MHz	Pass	5.99	4.29	3.67	7.00	12.99	30.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	5.91	10.48	9.27	12.93	18.84	30.00
6205MHz	Pass	5.91	10.51	9.8	13.18	19.09	30.00
6405MHz	Pass	5.91	9.91	10.35	13.15	19.06	30.00
6445MHz	Pass	5.91	10.9	9.68	13.34	19.25	30.00
6485MHz	Pass	5.91	10.9	9.75	13.37	19.28	30.00
6525MHz	Pass	5.91	10.42	9.28	12.90	18.81	30.00
6565MHz	Pass	5.91	11.17	10	13.63	19.54	30.00
6685MHz	Pass	5.91	10.08	9.45	12.79	18.70	30.00
6885MHz	Pass	5.91	10.24	10.25	13.26	19.17	30.00
6925MHz	Pass	5.99	11.04	10.7	13.88	19.87	30.00
7005MHz	Pass	5.99	10.98	10.45	13.73	19.72	30.00
7085MHz	Pass	5.99	10.68	10.39	13.55	19.54	30.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	5.91	13.72	12.8	16.29	22.20	30.00
6225MHz	Pass	5.91	13.89	13.36	16.64	22.55	30.00
6385MHz	Pass	5.91	13.67	13.31	16.50	22.41	30.00
6465MHz	Pass	5.91	13.89	12.93	16.45	22.36	30.00
6545MHz	Pass	5.91	14.09	12.87	16.53	22.44	30.00
6625MHz	Pass	5.91	13.71	12.87	16.32	22.23	30.00
6705MHz	Pass	5.91	13.21	12.67	15.96	21.87	30.00
6785MHz	Pass	5.91	13.67	13.26	16.48	22.39	30.00
6865MHz	Pass	5.91	13.3	13.13	16.23	22.14	30.00
6945MHz	Pass	5.99	13.71	13.46	16.60	22.59	30.00
7025MHz	Pass	5.99	13.24	13.32	16.29	22.28	30.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	5.91	16.24	15.36	18.83	24.74	30.00
6185MHz	Pass	5.91	16.05	15.66	18.87	24.78	30.00
6345MHz	Pass	5.91	15.99	15.5	18.76	24.67	30.00
6505MHz	Pass	5.91	16.62	15.67	19.18	25.09	30.00
6665MHz	Pass	5.91	16.19	15.64	18.93	24.84	30.00
6825MHz	Pass	5.91	16.21	15.78	19.01	24.92	30.00
6985MHz	Pass	5.99	15.98	15.68	18.84	24.83	30.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6105MHz	Pass	5.91	18.97	18.51	21.76	27.67	30.00
6265MHz	Pass	5.91	18.53	18.92	21.74	27.65	30.00
6425MHz	Pass	5.91	18.99	18.87	21.94	27.85	30.00
6585MHz	Pass	5.91	18.75	18.51	21.64	27.55	30.00
6745MHz	Pass	5.91	18.67	18.87	21.78	27.69	30.00
6905MHz	Pass	5.91	18.59	18.73	21.67	27.58	30.00
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
5955MHz	Pass	8.45	7.96	7.03	10.53	18.98	30.00
6195MHz	Pass	8.45	7.71	7.18	10.46	18.91	30.00
6415MHz	Pass	8.45	7.46	7.27	10.38	18.83	30.00
6435MHz	Pass	8.39	7.85	6.73	10.34	18.73	30.00
6475MHz	Pass	8.39	7.57	6.71	10.17	18.56	30.00
6515MHz	Pass	8.39	8.11	7.01	10.61	19.00	30.00
6535MHz	Pass	8.39	8.35	6.71	10.62	19.01	30.00
6695MHz	Pass	8.39	7.28	6.9	10.10	18.49	30.00
6875MHz	Pass	8.39	7.42	7.18	10.31	18.70	30.00
6895MHz	Pass	8.10	7.28	6.88	10.09	18.19	30.00
6995MHz	Pass	8.10	7.37	6.97	10.18	18.28	30.00
7095MHz	Pass	8.10	7.22	6.91	10.08	18.18	30.00
7115MHz	Pass	8.10	4.29	3.67	7.00	15.10	30.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	8.45	10.48	9.27	12.93	21.38	30.00
6205MHz	Pass	8.45	10.51	9.8	13.18	21.63	30.00
6405MHz	Pass	8.45	9.91	10.35	13.15	21.60	30.00
6445MHz	Pass	8.39	10.9	9.68	13.34	21.73	30.00
6485MHz	Pass	8.39	10.9	9.75	13.37	21.76	30.00
6525MHz	Pass	8.39	10.42	9.28	12.90	21.29	30.00
6565MHz	Pass	8.39	11.17	10	13.63	22.02	30.00
6685MHz	Pass	8.39	10.08	9.45	12.79	21.18	30.00
6885MHz	Pass	8.39	10.24	10.25	13.26	21.65	30.00
6925MHz	Pass	8.10	11.04	10.7	13.88	21.98	30.00
7005MHz	Pass	8.10	10.98	10.45	13.73	21.83	30.00
7085MHz	Pass	8.10	10.68	10.39	13.55	21.65	30.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	8.45	13.72	12.8	16.29	24.74	30.00
6225MHz	Pass	8.45	13.89	13.36	16.64	25.09	30.00
6385MHz	Pass	8.45	13.67	13.31	16.50	24.95	30.00
6465MHz	Pass	8.39	13.89	12.93	16.45	24.84	30.00
6545MHz	Pass	8.39	14.09	12.87	16.53	24.92	30.00
6625MHz	Pass	8.39	13.71	12.87	16.32	24.71	30.00
6705MHz	Pass	8.39	13.21	12.67	15.96	24.35	30.00
6785MHz	Pass	8.39	13.67	13.26	16.48	24.87	30.00
6865MHz	Pass	8.39	13.3	13.13	16.23	24.62	30.00
6945MHz	Pass	8.10	13.71	13.46	16.60	24.70	30.00
7025MHz	Pass	8.10	13.24	13.32	16.29	24.39	30.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	8.45	16.24	15.36	18.83	27.28	30.00
6185MHz	Pass	8.45	16.05	15.66	18.87	27.32	30.00
6345MHz	Pass	8.45	15.99	15.5	18.76	27.21	30.00
6505MHz	Pass	8.39	16.62	15.67	19.18	27.57	30.00
6665MHz	Pass	8.39	16.19	15.64	18.93	27.32	30.00
6825MHz	Pass	8.39	16.21	15.78	19.01	27.40	30.00
6985MHz	Pass	8.10	15.98	15.68	18.84	26.94	30.00
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6105MHz	Pass	8.45	18.54	18.06	21.32	29.77	30.00
6265MHz	Pass	8.45	18.05	18.35	21.21	29.66	30.00
6425MHz	Pass	8.45	18.52	18.41	21.48	29.93	30.00
6585MHz	Pass	8.39	18.26	18.09	21.19	29.58	30.00
6745MHz	Pass	8.39	18.18	18.38	21.29	29.68	30.00
6905MHz	Pass	8.39	18.12	18.26	21.20	29.59	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	-3.49	4.96
802.11be EHT40_Nss1,(MCS0)_2TX	-3.47	4.98
802.11be EHT80_Nss1,(MCS0)_2TX	-3.53	4.92
802.11be EHT160_Nss1,(MCS0)_2TX	-3.75	4.70
802.11be EHT320_Nss1,(MCS0)_2TX	-3.62	4.83
6.425-6.525GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	-3.41	4.98
802.11be EHT40_Nss1,(MCS0)_2TX	-3.58	4.81
802.11be EHT80_Nss1,(MCS0)_2TX	-3.52	4.87
802.11be EHT160_Nss1,(MCS0)_2TX	-3.67	4.72
802.11be EHT320_Nss1,(MCS0)_2TX	-3.86	4.53
6.525-6.875GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	-3.43	4.96
802.11be EHT40_Nss1,(MCS0)_2TX	-3.43	4.96
802.11be EHT80_Nss1,(MCS0)_2TX	-3.50	4.89
802.11be EHT160_Nss1,(MCS0)_2TX	-3.49	4.90
802.11be EHT320_Nss1,(MCS0)_2TX	-3.82	4.57
6.875-7.125GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	-3.51	4.59
802.11be EHT40_Nss1,(MCS0)_2TX	-3.14	4.96
802.11be EHT80_Nss1,(MCS0)_2TX	-3.27	4.83
802.11be EHT160_Nss1,(MCS0)_2TX	-3.55	4.55

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	8.45	-6.04	-6.94	-3.49	4.96	5.00
6195MHz	Pass	8.45	-6.48	-6.87	-3.71	4.74	5.00
6415MHz	Pass	8.45	-6.57	-6.64	-3.66	4.79	5.00
6435MHz	Pass	8.39	-6.07	-6.89	-3.50	4.89	5.00
6475MHz	Pass	8.39	-5.97	-6.68	-3.41	4.98	5.00
6515MHz	Pass	8.39	-6.06	-6.90	-3.47	4.92	5.00
6535MHz	Pass	8.39	-5.84	-7.19	-3.53	4.86	5.00
6695MHz	Pass	8.39	-6.73	-6.91	-3.88	4.51	5.00
6875MHz	Pass	8.39	-6.32	-6.49	-3.43	4.96	5.00
6895MHz	Pass	8.10	-6.32	-6.68	-3.54	4.56	5.00
6995MHz	Pass	8.10	-6.32	-6.61	-3.54	4.56	5.00
7095MHz	Pass	8.10	-6.44	-6.48	-3.51	4.59	5.00
7115MHz	Pass	8.10	-9.41	-9.94	-6.66	1.44	5.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	8.45	-6.14	-7.40	-3.76	4.69	5.00
6205MHz	Pass	8.45	-6.30	-6.91	-3.61	4.84	5.00
6405MHz	Pass	8.45	-6.08	-6.50	-3.47	4.98	5.00
6445MHz	Pass	8.39	-6.18	-7.30	-3.78	4.61	5.00
6485MHz	Pass	8.39	-6.00	-7.03	-3.58	4.81	5.00
6525MHz	Pass	8.39	-6.15	-7.18	-3.72	4.67	5.00
6565MHz	Pass	8.39	-5.72	-6.84	-3.43	4.96	5.00
6685MHz	Pass	8.39	-6.53	-6.94	-3.83	4.56	5.00
6885MHz	Pass	8.39	-6.49	-6.45	-3.52	4.87	5.00
6925MHz	Pass	8.10	-5.80	-6.18	-3.14	4.96	5.00
7005MHz	Pass	8.10	-5.91	-6.30	-3.14	4.96	5.00
7085MHz	Pass	8.10	-6.09	-6.15	-3.16	4.94	5.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	8.45	-6.32	-7.05	-3.69	4.76	5.00
6225MHz	Pass	8.45	-6.27	-6.65	-3.54	4.91	5.00
6385MHz	Pass	8.45	-6.23	-6.68	-3.53	4.92	5.00
6465MHz	Pass	8.39	-6.13	-6.73	-3.52	4.87	5.00
6545MHz	Pass	8.39	-6.22	-6.94	-3.64	4.75	5.00
6625MHz	Pass	8.39	-6.29	-6.80	-3.63	4.76	5.00
6705MHz	Pass	8.39	-6.26	-6.65	-3.59	4.80	5.00
6785MHz	Pass	8.39	-6.06	-6.42	-3.50	4.89	5.00
6865MHz	Pass	8.39	-6.47	-6.33	-3.54	4.85	5.00
6945MHz	Pass	8.10	-6.10	-6.22	-3.27	4.83	5.00
7025MHz	Pass	8.10	-6.25	-6.19	-3.27	4.83	5.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	8.45	-6.58	-7.16	-3.90	4.55	5.00
6185MHz	Pass	8.45	-6.72	-6.92	-3.88	4.57	5.00
6345MHz	Pass	8.45	-6.51	-6.98	-3.75	4.70	5.00
6505MHz	Pass	8.39	-6.42	-6.82	-3.67	4.72	5.00
6665MHz	Pass	8.39	-6.39	-6.64	-3.55	4.84	5.00
6825MHz	Pass	8.39	-6.31	-6.37	-3.49	4.90	5.00
6985MHz	Pass	8.10	-6.43	-6.42	-3.55	4.55	5.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6105MHz	Pass	8.45	-6.63	-6.80	-3.77	4.68	5.00
6265MHz	Pass	8.45	-7.04	-6.35	-3.69	4.76	5.00
6425MHz	Pass	8.45	-6.91	-6.32	-3.62	4.83	5.00
6585MHz	Pass	8.39	-6.82	-6.43	-3.86	4.53	5.00
6745MHz	Pass	8.39	-7.03	-6.41	-3.82	4.57	5.00
6905MHz	Pass	8.39	-6.86	-6.44	-3.83	4.56	5.00



PSD_Test Mode: Mode 1

Appendix D.1

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5955MHz

12/11/2025

CF (Hz)
5.955G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

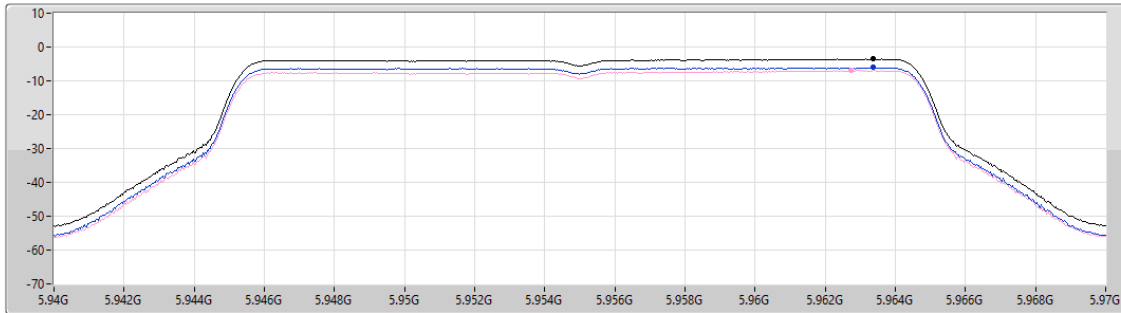

Sum ☒

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.49	-3.49	-6.04	-6.94

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6195MHz

12/11/2025

CF (Hz)
6.195G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

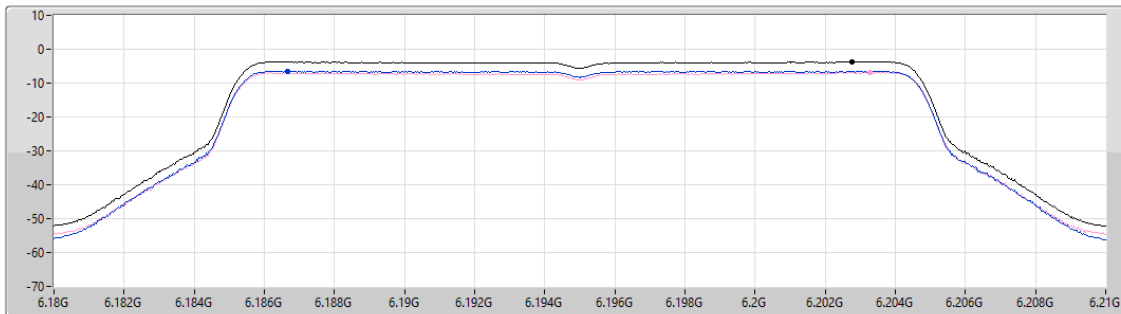

Sum ☒

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.71	-3.71	-6.48	-6.87

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6415MHz

12/11/2025

CF (Hz)
6.415G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

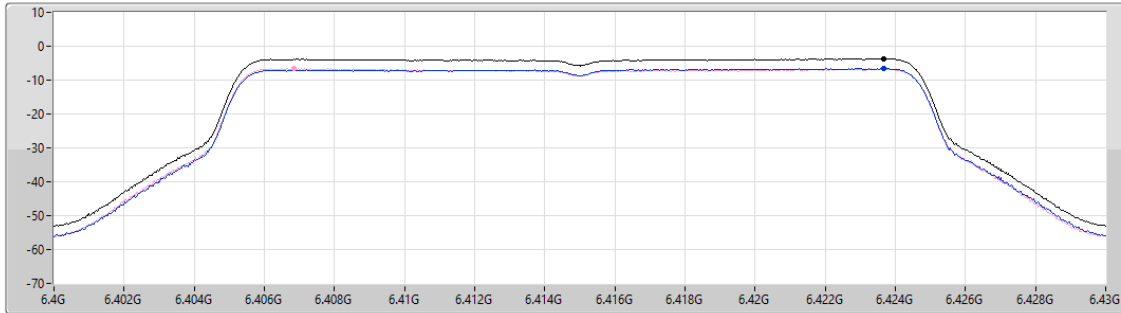

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.66	-3.66	-6.57	-6.64

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6435MHz

28/11/2025

CF (Hz)
6.435G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

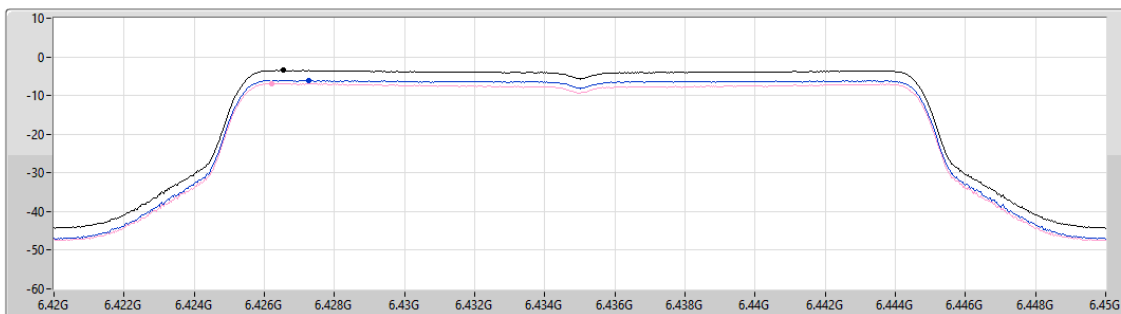

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.50	-3.50	-6.07	-6.89

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6475MHz

28/11/2025

CF (Hz)
6.475G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

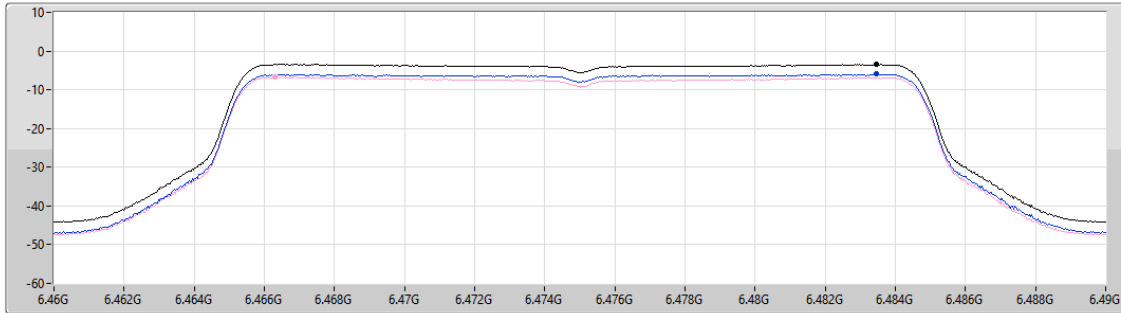

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.41	-3.41	-5.97	-6.68

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6515MHz

28/11/2025

CF (Hz)
6.515G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

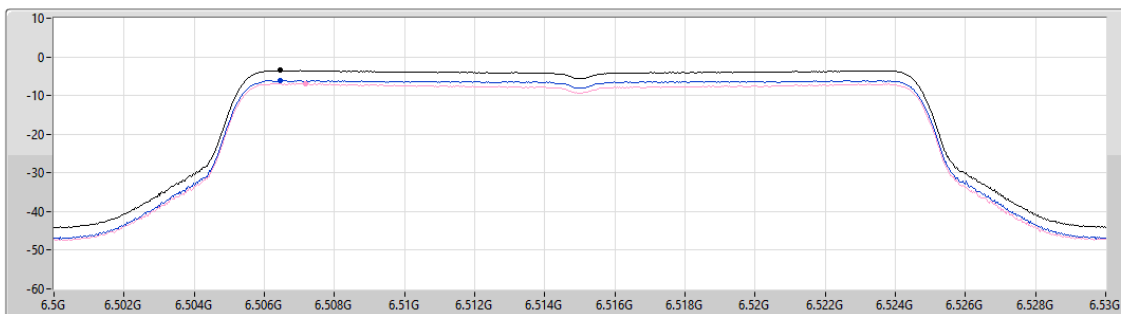

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.47	-3.47	-6.06	-6.90

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6535MHz

12/11/2025

CF (Hz)
6.535G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

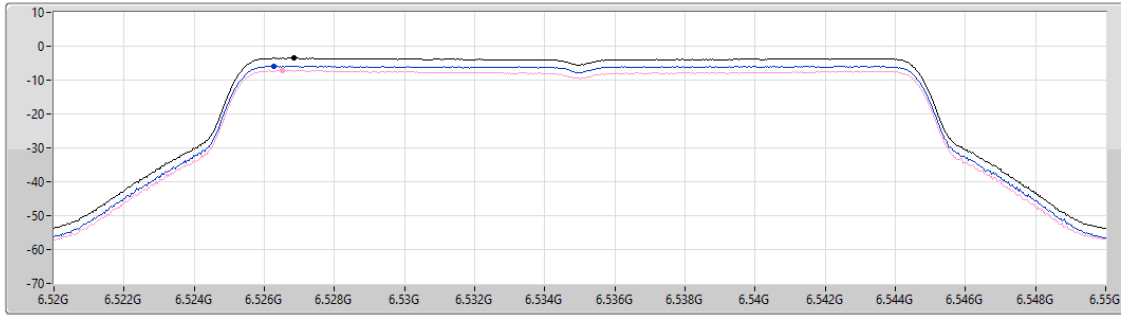

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.53	-3.53	-5.84	-7.19

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6695MHz

12/11/2025

CF (Hz)
6.695G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

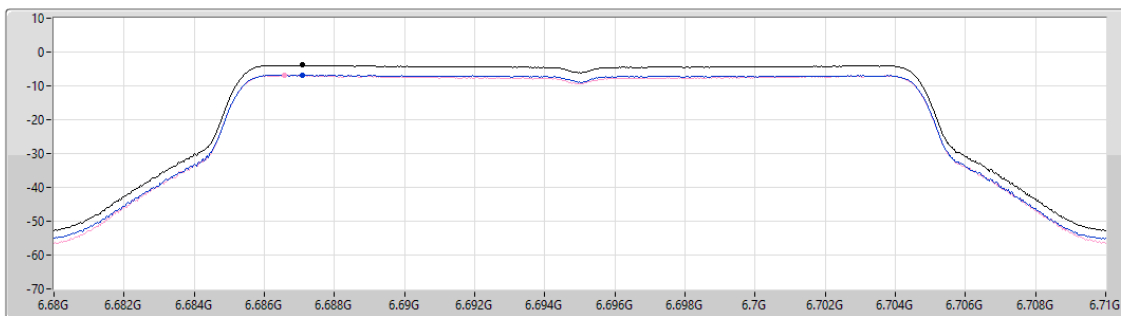

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.88	-3.88	-6.73	-6.91

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6875MHz

12/11/2025

CF (Hz)
6.875G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

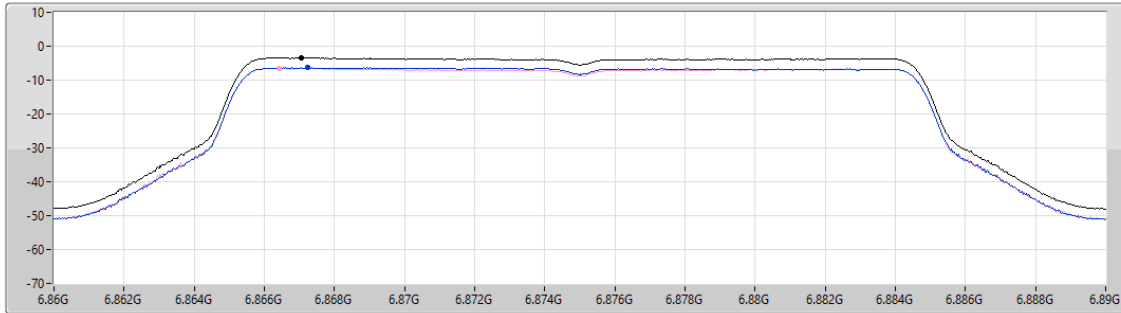

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.43	-3.43	-6.32	-6.49

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6895MHz

12/11/2025

CF (Hz)
6.895G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

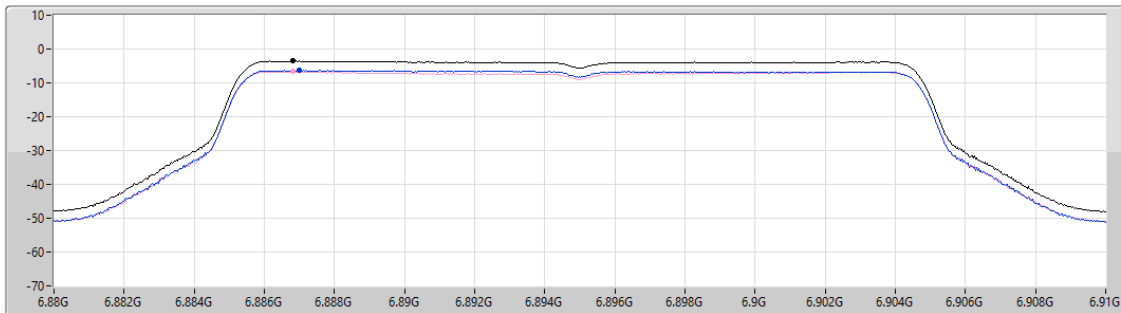

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.54	-3.54	-6.32	-6.68

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6995MHz

12/11/2025

CF (Hz)
6.995G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

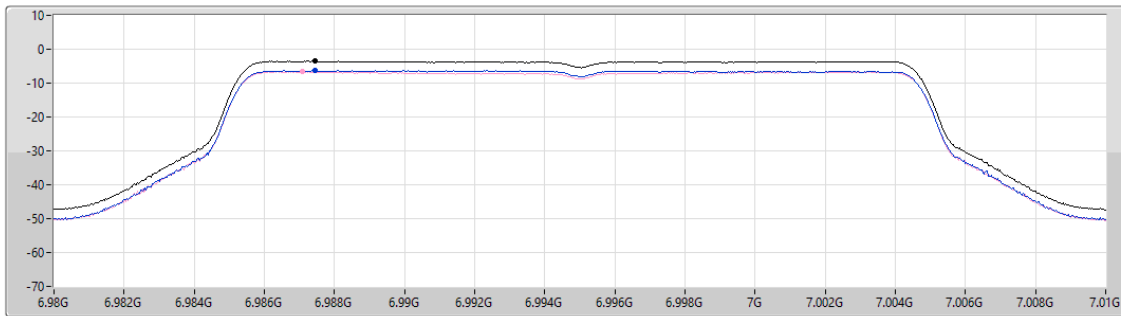

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.54	-3.54	-6.32	-6.61

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

7095MHz

12/11/2025

CF (Hz)
7.095G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

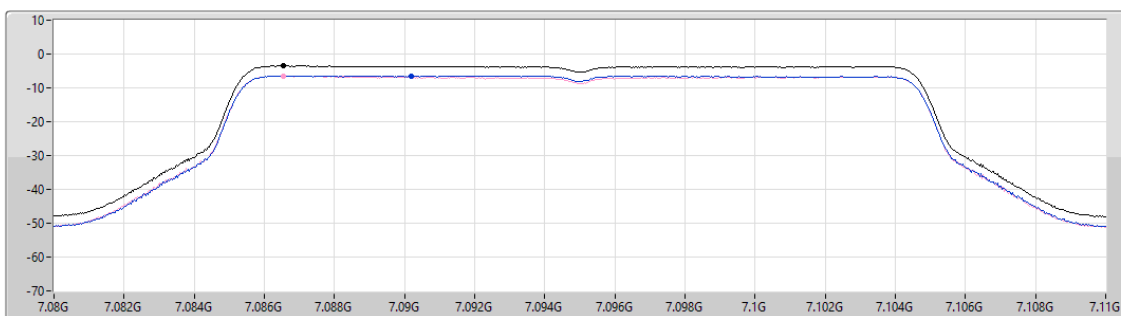

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.51	-3.51	-6.44	-6.48

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

7115MHz

12/11/2025

CF (Hz)
7.115G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

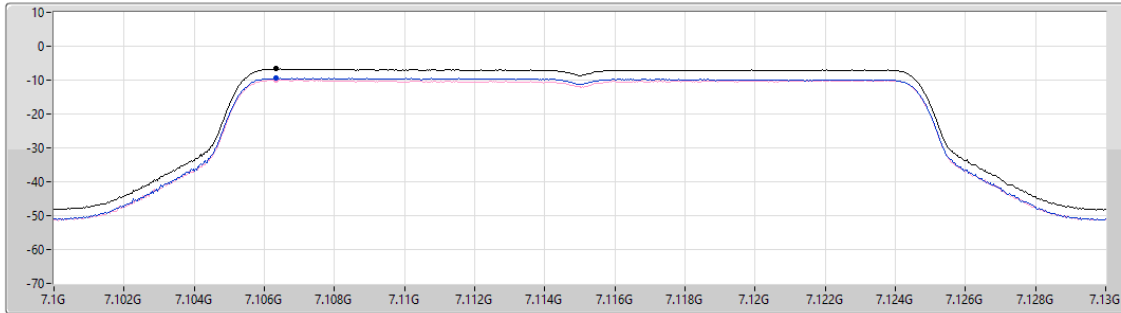

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-6.66	-6.66	-9.41	-9.94

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5965MHz

12/11/2025

CF (Hz)
5.965G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

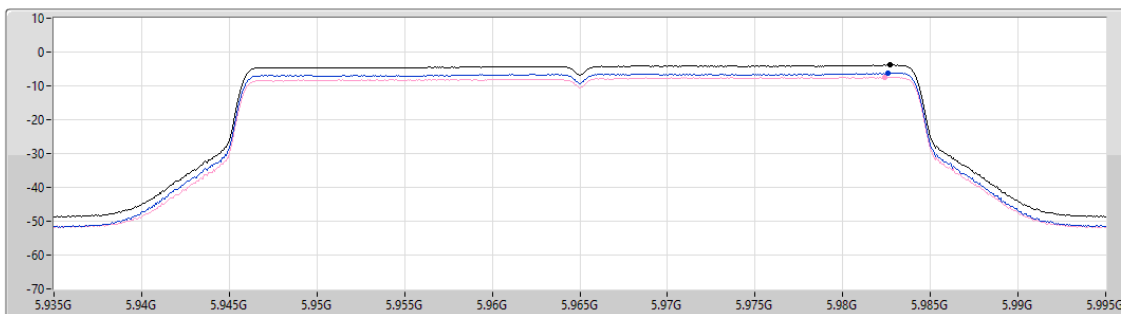

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.76	-3.76	-6.14	-7.40

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6205MHz

12/11/2025

CF (Hz)
6.205G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

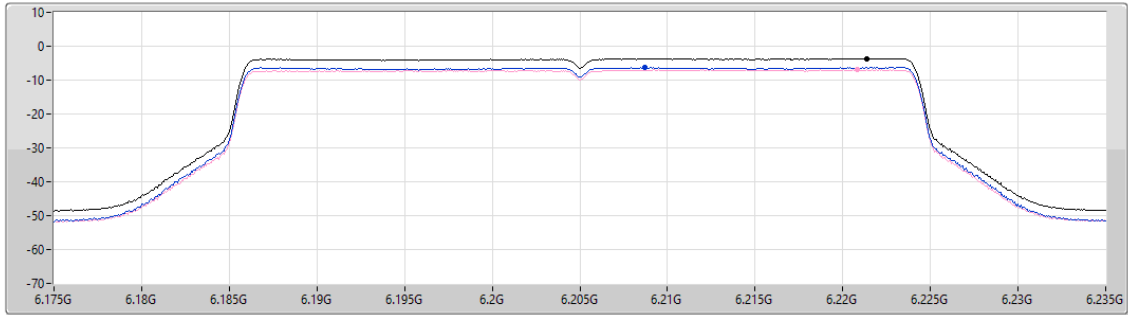

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.61	-3.61	-6.30	-6.91

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6405MHz

12/11/2025

CF (Hz)
6.405G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

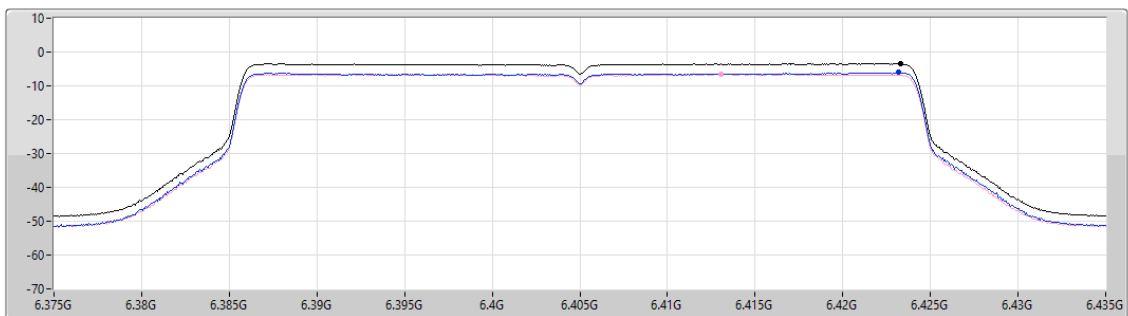

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.47	-3.47	-6.08	-6.50

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6445MHz

29/11/2025

CF (Hz)
6.445G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

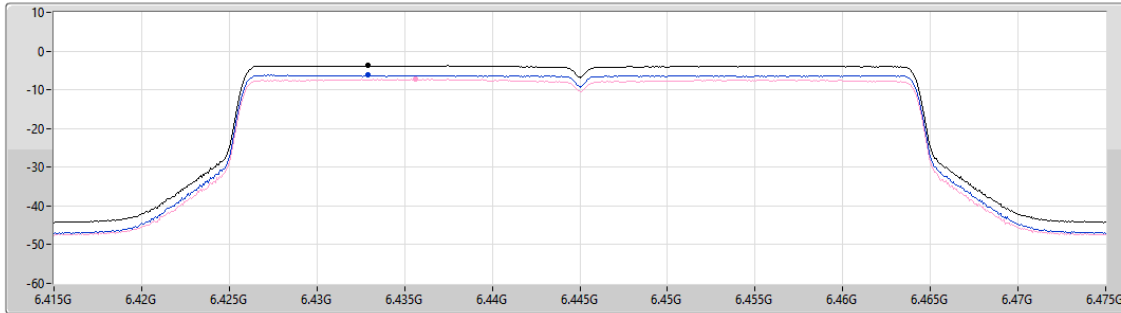

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.78	-3.78	-6.18	-7.30

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6485MHz

29/11/2025

CF (Hz)
6.485G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

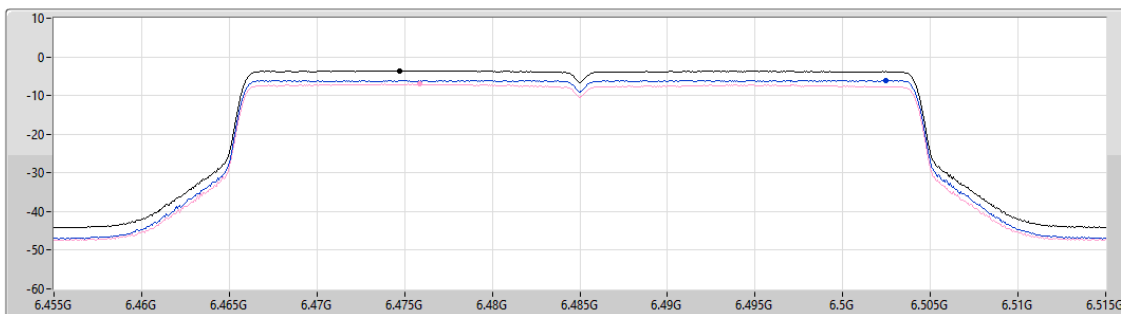

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.58	-3.58	-6.00	-7.03

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6525MHz

29/11/2025

CF (Hz)
6.525G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

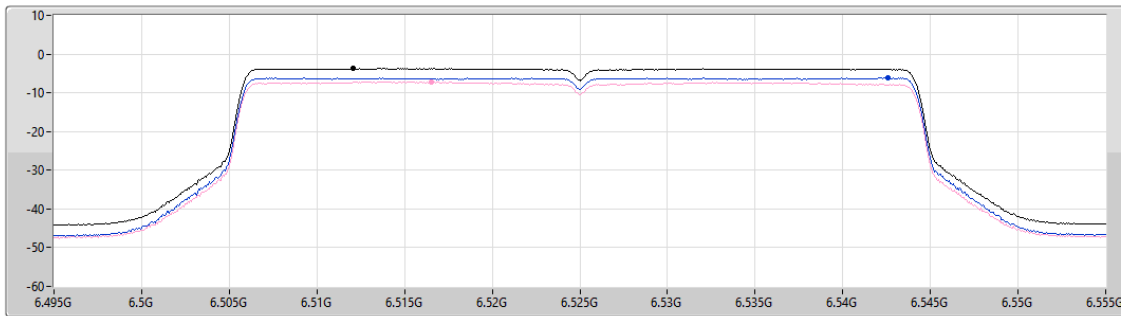

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.72	-3.72	-6.15	-7.18

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6565MHz

12/11/2025

CF (Hz)
6.565G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

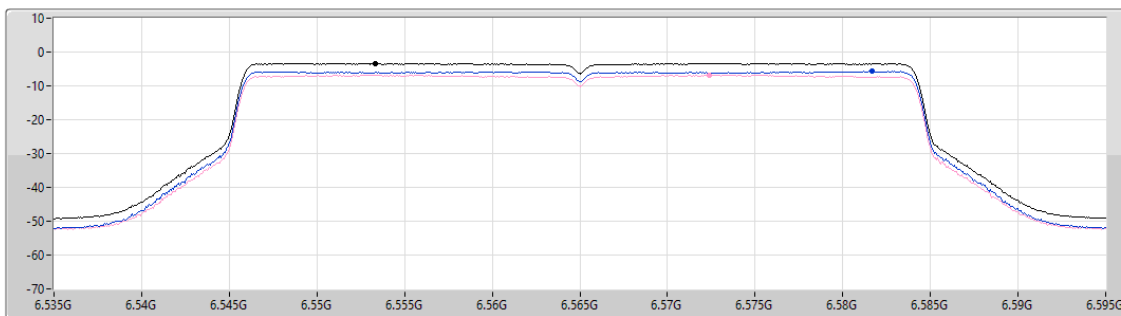

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.43	-3.43	-5.72	-6.84

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6685MHz

29/11/2025

CF (Hz)
6.685G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

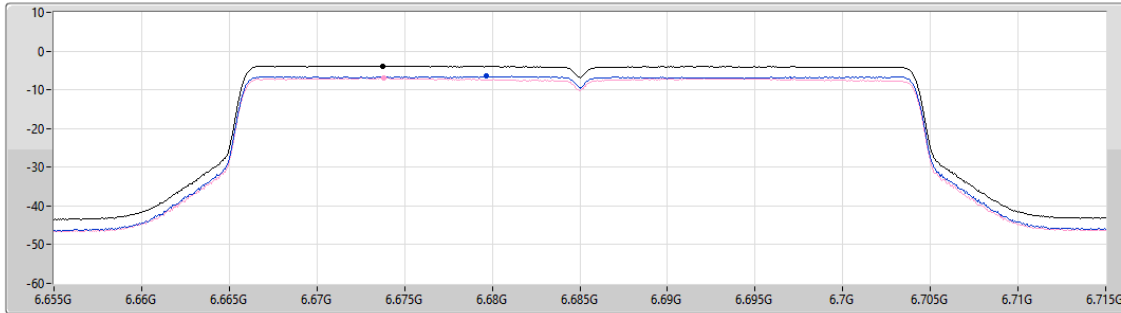

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.83	-3.83	-6.53	-6.94

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6885MHz

12/11/2025

CF (Hz)
6.885G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

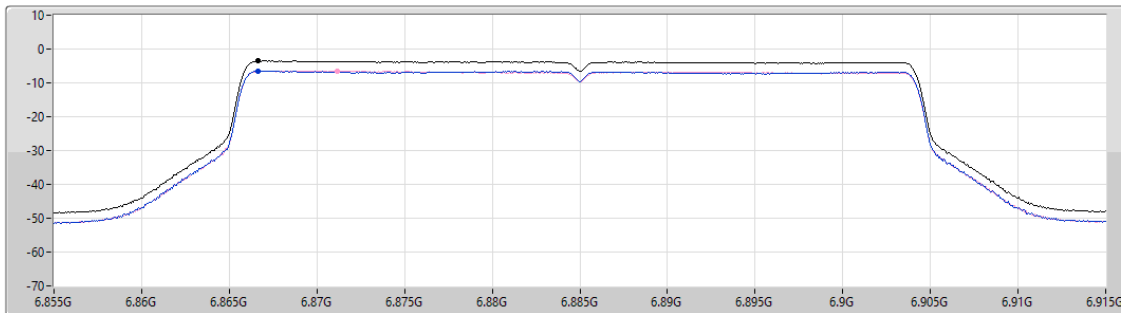

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.52	-3.52	-6.49	-6.45

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6925MHz

12/11/2025

CF (Hz)
6.925G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

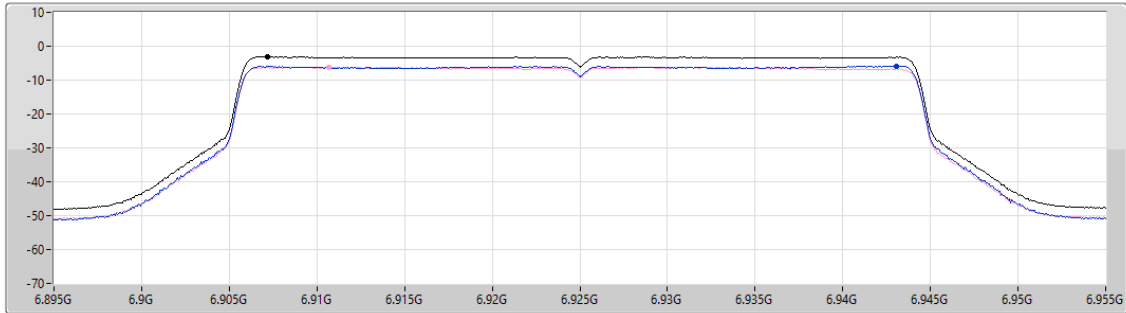

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.14	-3.14	-5.80	-6.18

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

7005MHz

12/11/2025

CF (Hz)
7.005G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

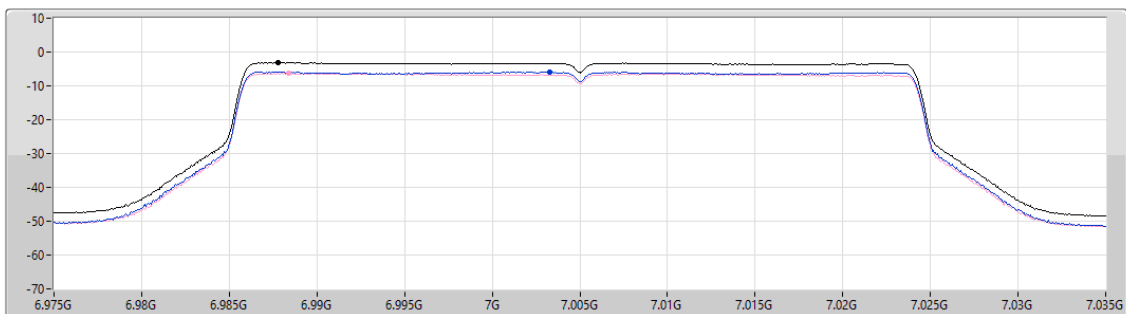

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.14	-3.14	-5.91	-6.30

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

7085MHz

12/11/2025

CF (Hz)
7.085G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

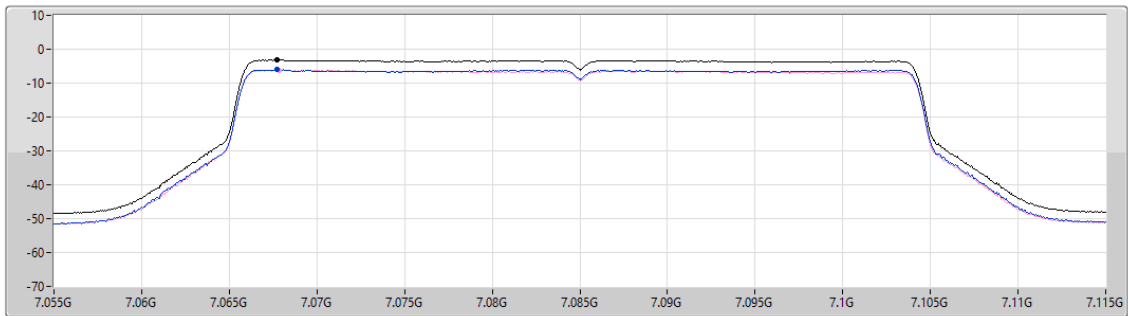

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.16	-3.16	-6.09	-6.15

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5985MHz

12/11/2025

CF (Hz)
5.985G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

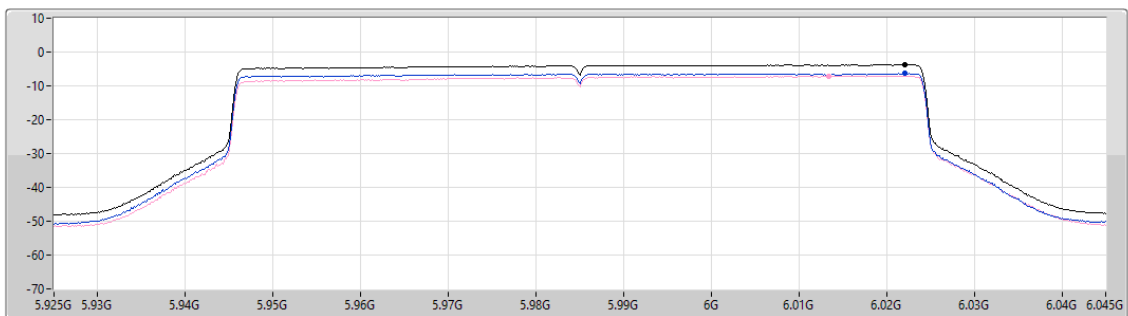

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.69	-3.69	-6.32	-7.05

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6225MHz

12/11/2025

CF (Hz)
6.225G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

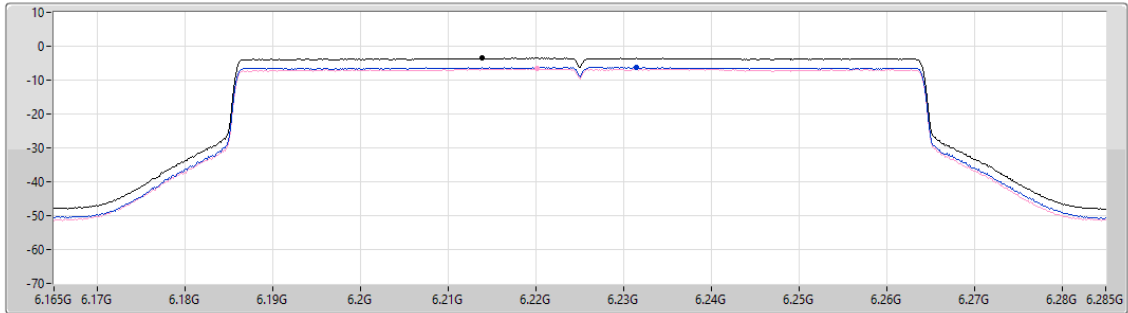

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.54	-3.54	-6.27	-6.65

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6385MHz

12/11/2025

CF (Hz)
6.385G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

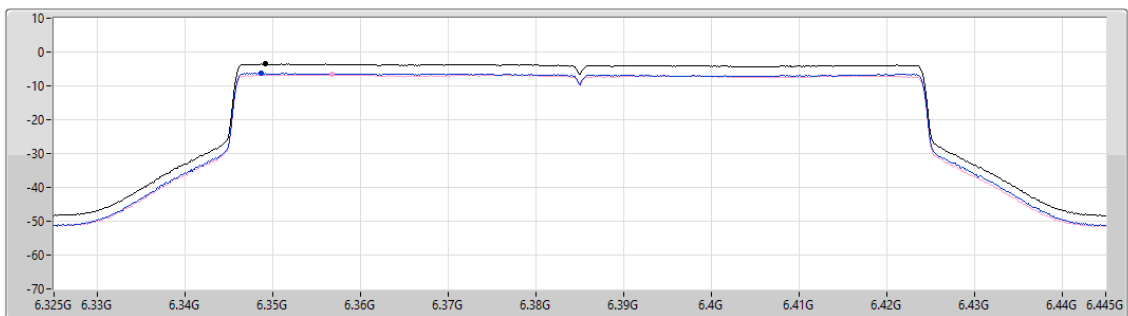

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.53	-3.53	-6.23	-6.68

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6465MHz

29/11/2025

CF (Hz)
6.465G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

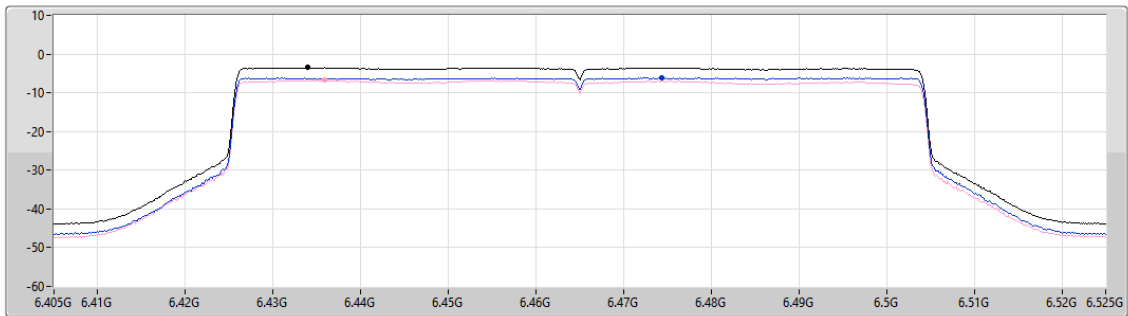

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.52	-3.52	-6.13	-6.73

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6545MHz

29/11/2025

CF (Hz)
6.545G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

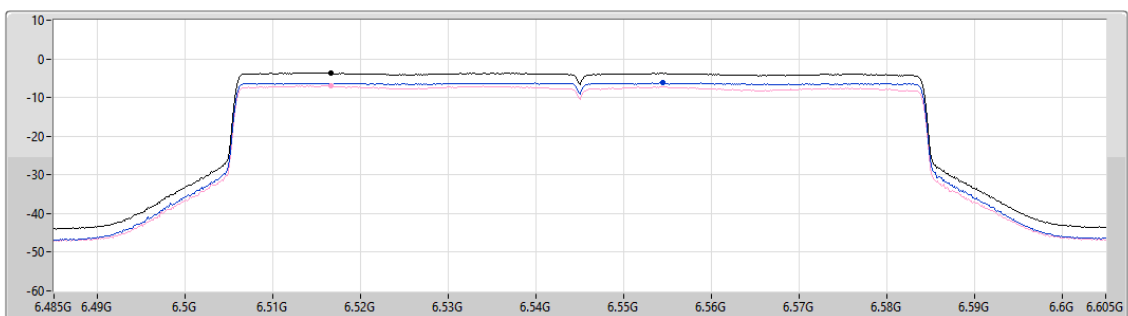

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.64	-3.64	-6.22	-6.94

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6625MHz

12/11/2025

CF (Hz)
6.625G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

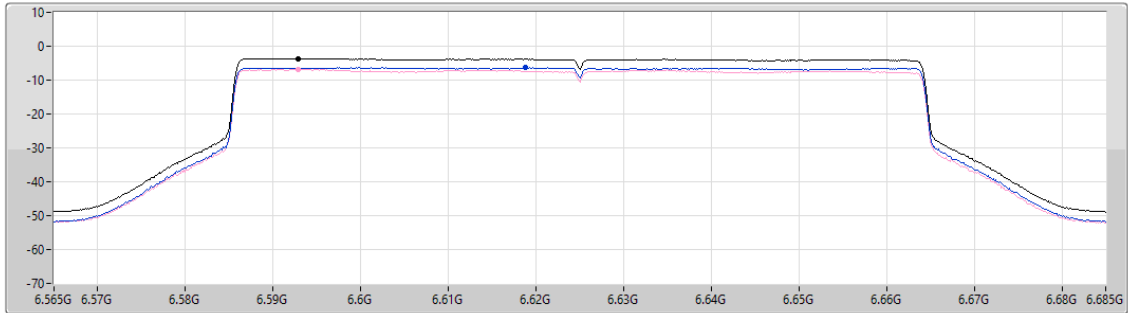

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.63	-3.63	-6.29	-6.80

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6705MHz

29/11/2025

CF (Hz)
6.705G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

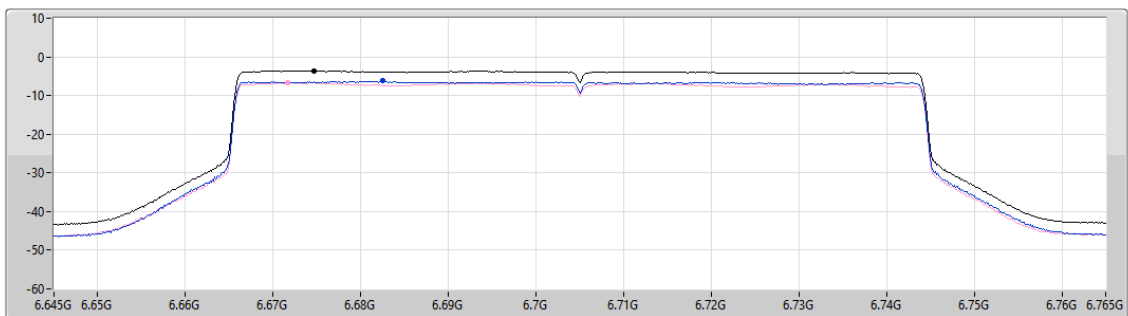

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.59	-3.59	-6.26	-6.65


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6785MHz

12/11/2025

CF (Hz)
6.785G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

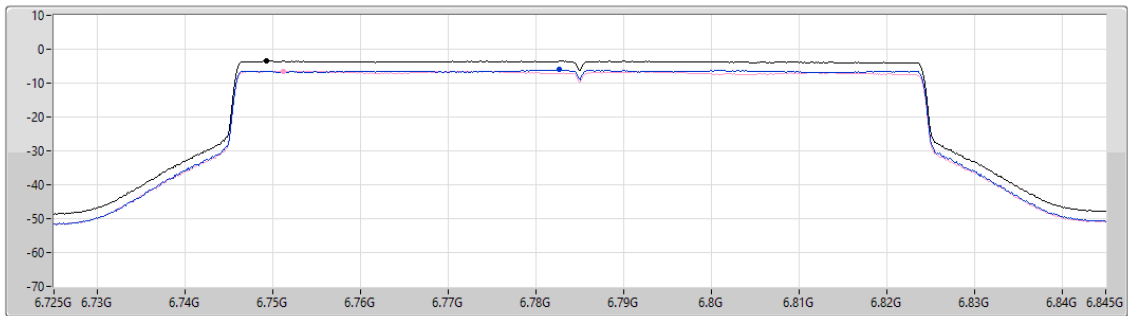

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.50	-3.50	-6.06	-6.42


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6865MHz

12/11/2025

CF (Hz)
6.865G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

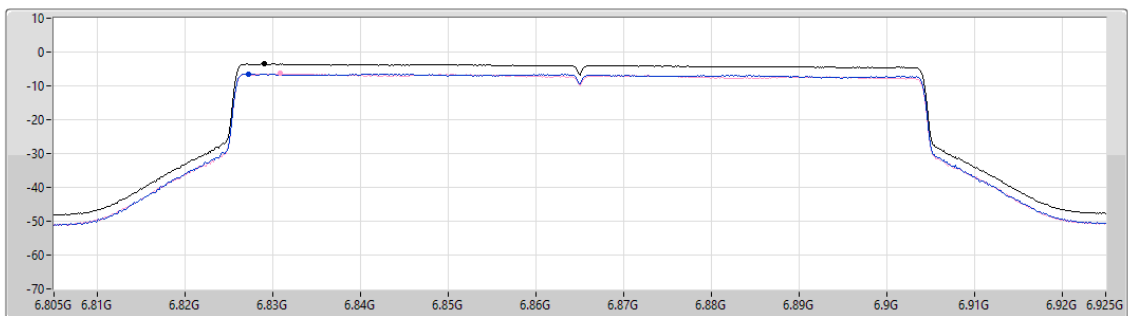

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.54	-3.54	-6.47	-6.33

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6945MHz

12/11/2025

CF (Hz)
6.945G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

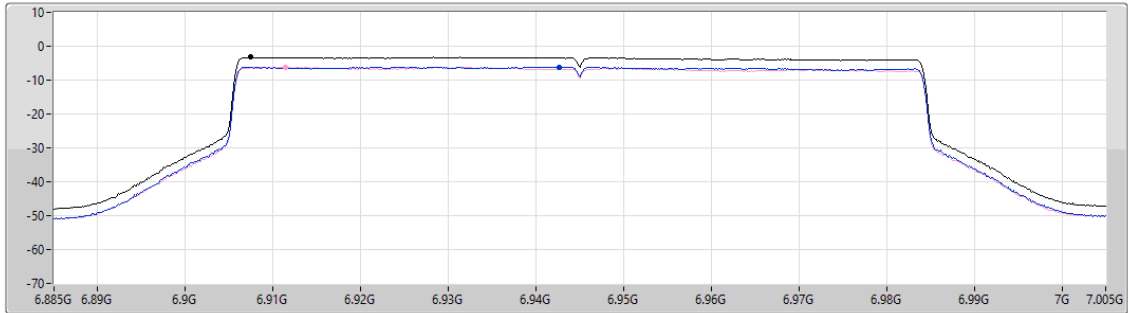

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.27	-3.27	-6.10	-6.22

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

7025MHz

13/11/2025

CF (Hz)
7.025G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

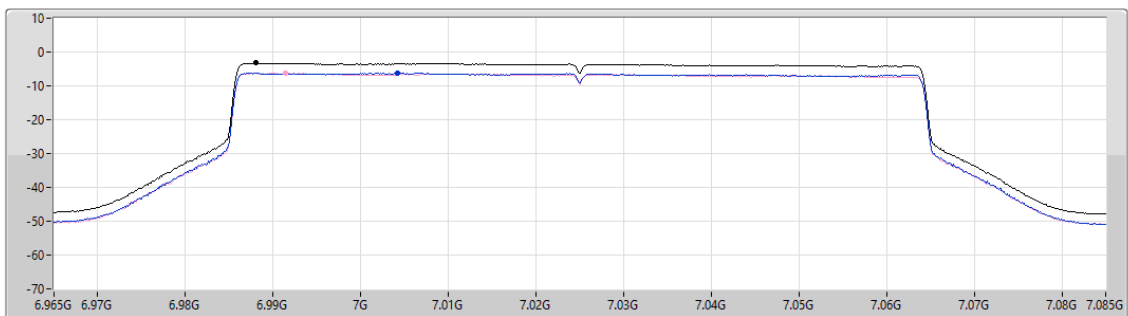

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.27	-3.27	-6.25	-6.19

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6025MHz

13/11/2025

CF (Hz)
6.025G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

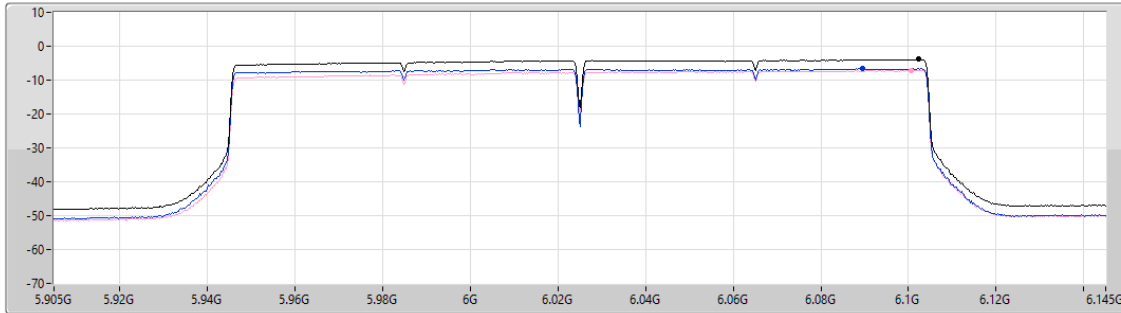

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.90	-3.90	-6.58	-7.16

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6185MHz

13/11/2025

CF (Hz)
6.185G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

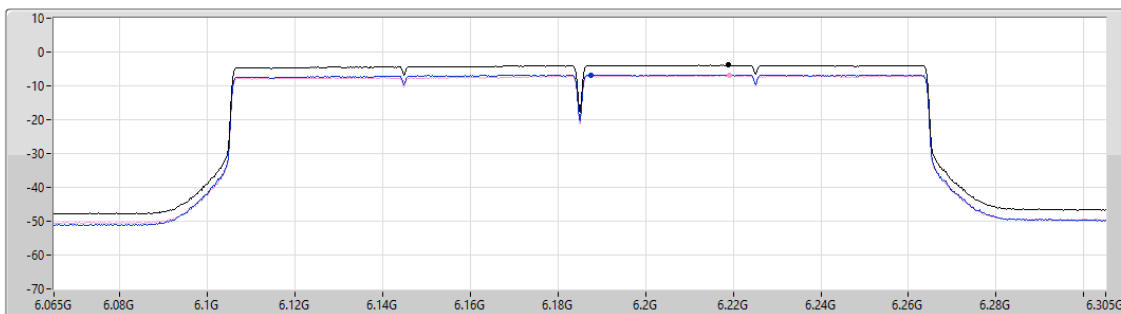

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.88	-3.88	-6.72	-6.92

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6345MHz

13/11/2025

CF (Hz)
6.345G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

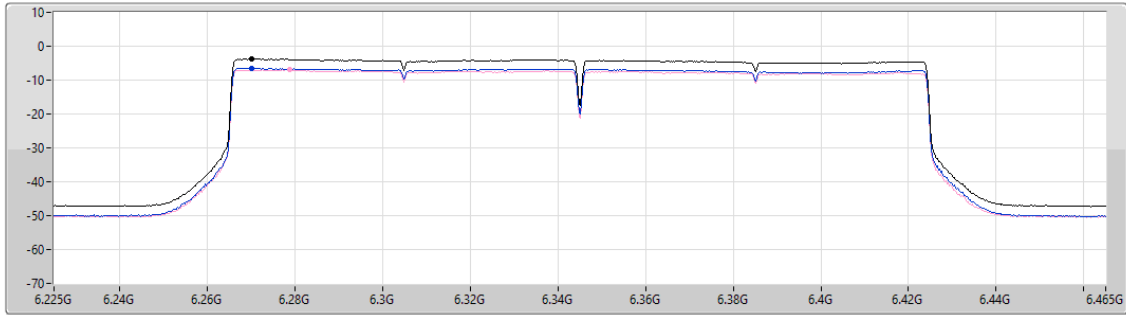

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.75	-3.75	-6.51	-6.98

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6505MHz

29/11/2025

CF (Hz)
6.505G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

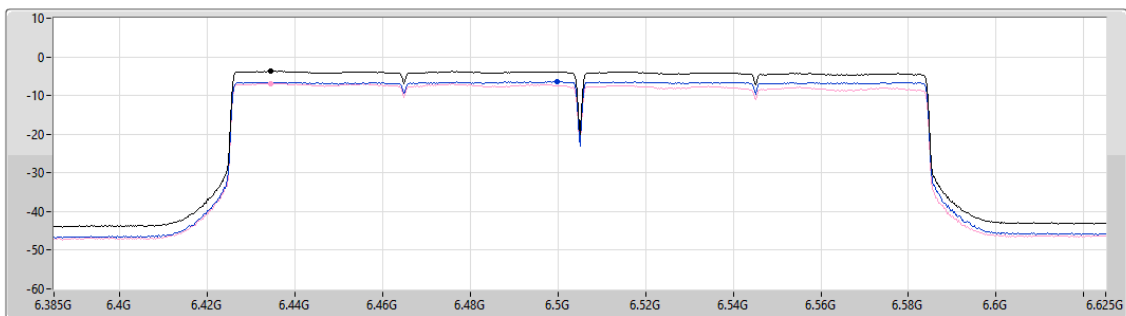

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.67	-3.67	-6.42	-6.82

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6665MHz

13/11/2025

CF (Hz)
6.665G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

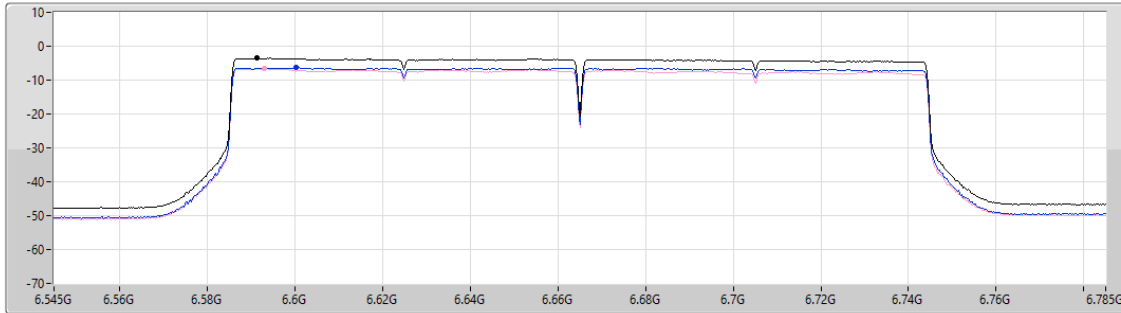

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.55	-3.55	-6.39	-6.64

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6825MHz

13/11/2025

CF (Hz)
6.825G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

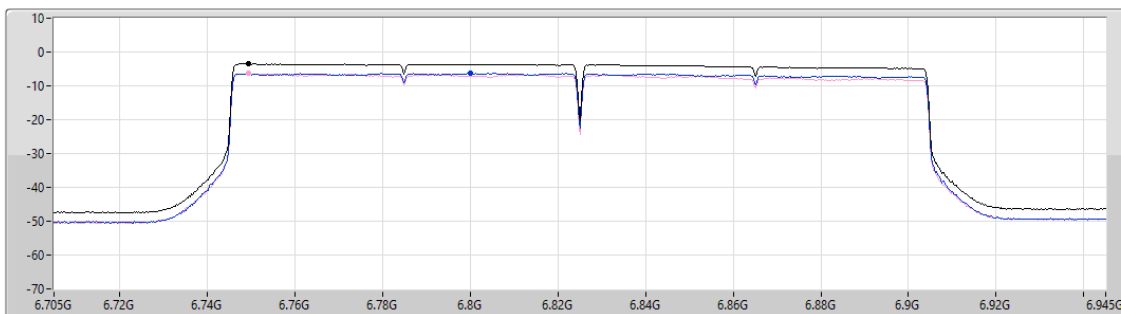

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.49	-3.49	-6.31	-6.37

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6985MHz

13/11/2025

CF (Hz)
6.985G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

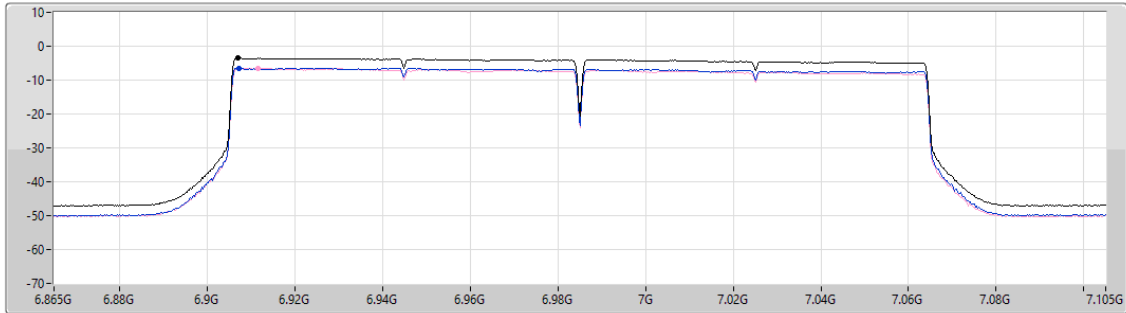

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.55	-3.55	-6.43	-6.42

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6105MHz

01/12/2025

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

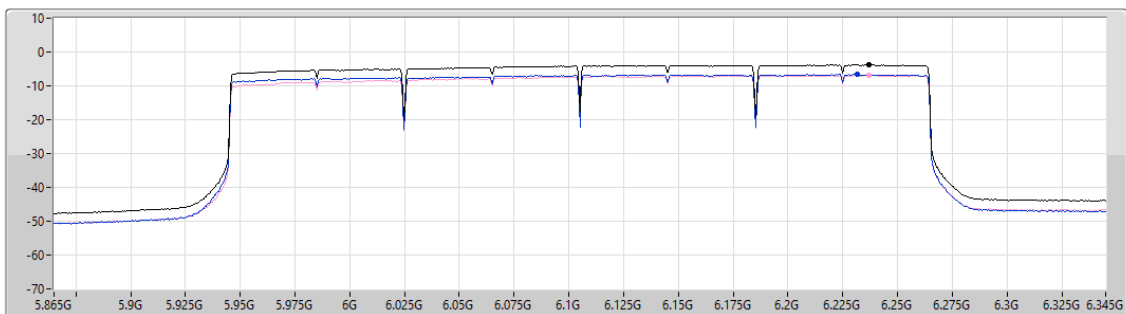

Sum 

Port 1 

Port 2 


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.77	-3.77	-6.63	-6.80

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6265MHz

01/12/2025

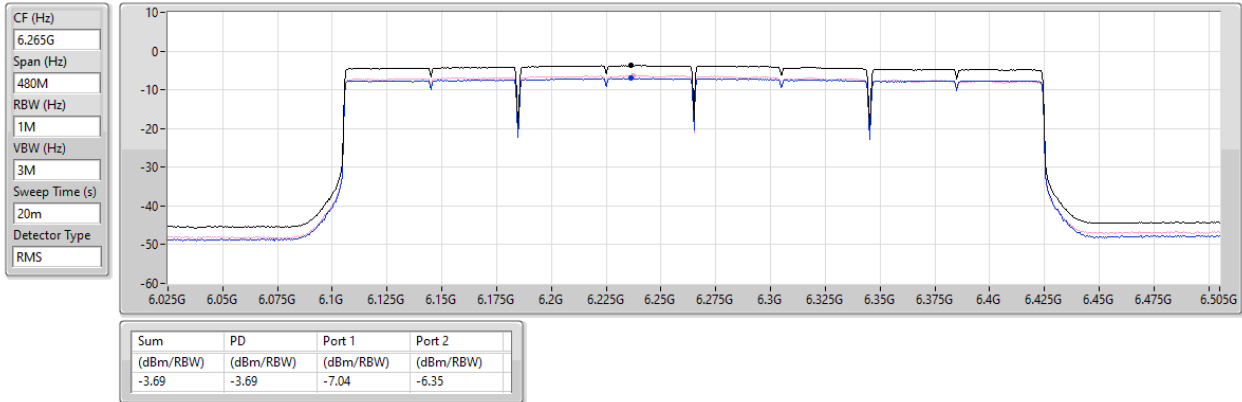


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6425MHz

01/12/2025

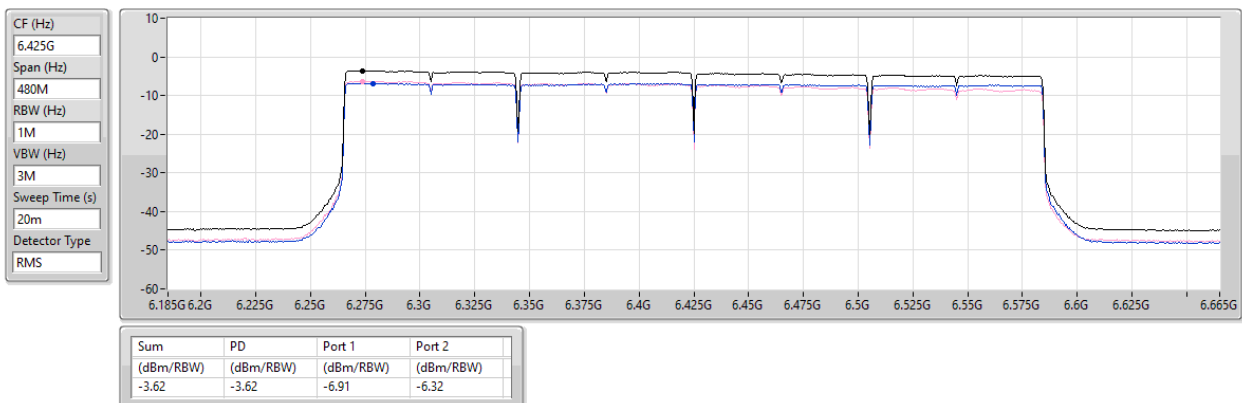

6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6585MHz

01/12/2025

CF (Hz)
6.585G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

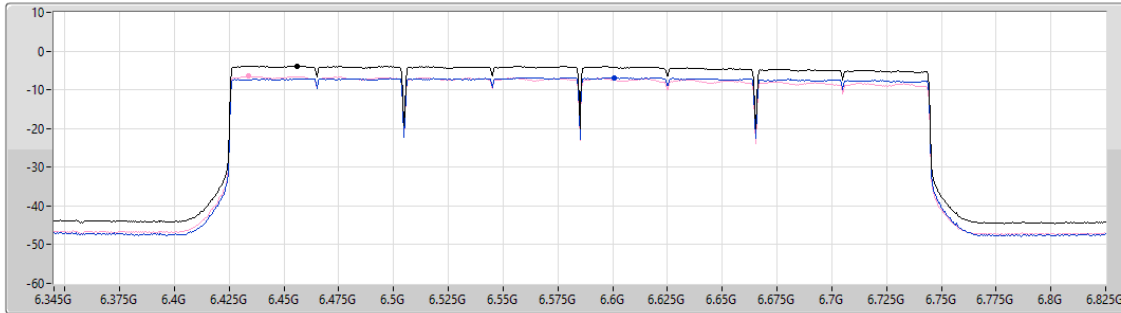

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.86	-3.86	-6.82	-6.43

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6745MHz

01/12/2025

CF (Hz)
6.745G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

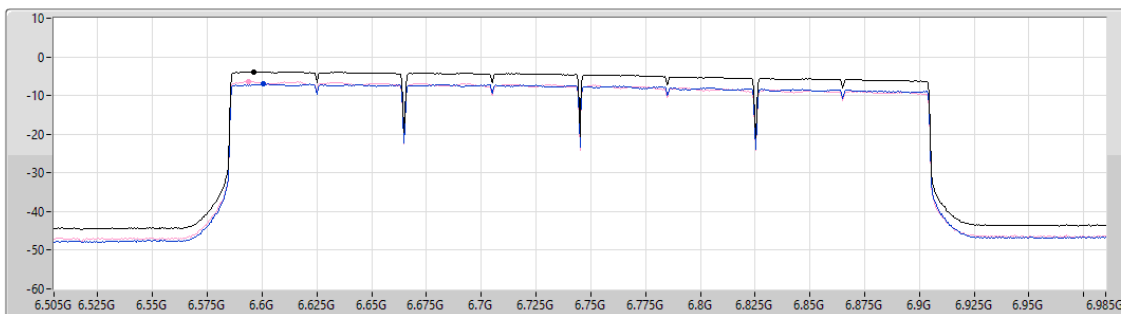

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.82	-3.82	-7.03	-6.41


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6905MHz

01/12/2025

CF (Hz)
6.905G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

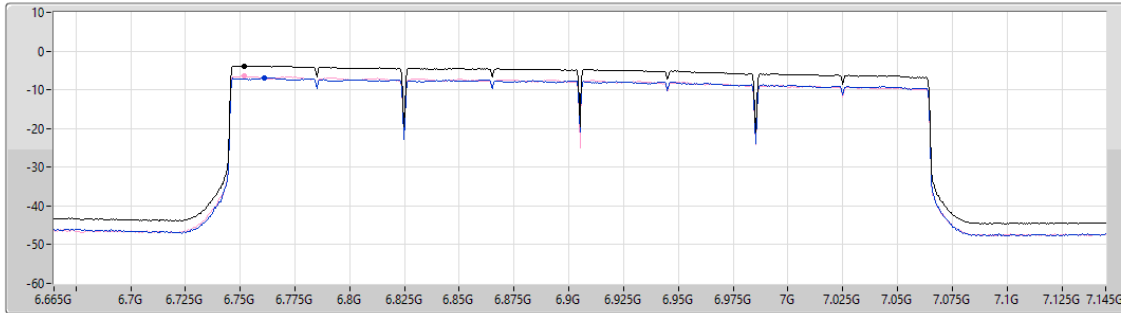

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.83	-3.83	-6.86	-6.44



Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-3.87	4.58
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	-4.06	4.39
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX	-3.91	4.54
6.525-6.875GHz	-	-
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX	-3.97	4.42
6.875-7.125GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-3.50	4.60
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-3.69	4.41

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-	-	-	-	-	-	-
5985MHz	Pass	8.45	-6.95	-7.24	-4.13	4.32	5.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-	-	-	-	-	-	-
5985MHz	Pass	8.45	-6.67	-6.93	-3.87	4.58	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-	-	-	-	-	-	-
7025MHz	Pass	8.10	-6.46	-6.44	-3.51	4.59	5.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-	-	-	-	-	-	-
7025MHz	Pass	8.10	-6.42	-6.22	-3.50	4.60	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-	-	-	-	-	-	-
6025MHz	Pass	8.45	-7.06	-7.15	-4.14	4.31	5.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-	-	-	-	-	-	-
6025MHz	Pass	8.45	-6.94	-7.08	-4.15	4.30	5.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	-	-	-	-	-	-	-
6025MHz	Pass	8.45	-6.94	-7.18	-4.06	4.39	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-	-	-	-	-	-	-
6985MHz	Pass	8.10	-6.70	-6.51	-3.69	4.41	5.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-	-	-	-	-	-	-
6985MHz	Pass	8.10	-6.72	-6.75	-3.87	4.23	5.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	-	-	-	-	-	-	-
6985MHz	Pass	8.10	-6.99	-6.80	-3.89	4.21	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX	-	-	-	-	-	-	-
6105MHz	Pass	8.45	-6.98	-7.28	-4.25	4.20	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_2TX	-	-	-	-	-	-	-
6105MHz	Pass	8.45	-6.58	-7.42	-3.98	4.47	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX	-	-	-	-	-	-	-
6105MHz	Pass	8.45	-6.70	-6.92	-3.91	4.54	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	-	-	-	-	-	-	-
6105MHz	Pass	8.45	-6.94	-7.16	-4.15	4.30	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX	-	-	-	-	-	-	-
6905MHz	Pass	8.39	-6.95	-6.75	-3.97	4.42	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_2TX	-	-	-	-	-	-	-
6905MHz	Pass	8.39	-7.26	-6.68	-4.04	4.35	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX	-	-	-	-	-	-	-
6905MHz	Pass	8.39	-7.11	-6.99	-4.19	4.20	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	-	-	-	-	-	-	-
6905MHz	Pass	8.39	-7.11	-6.79	-4.03	4.36	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

PSD

5985MHz

15/12/2025

CF (Hz)
5.985G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

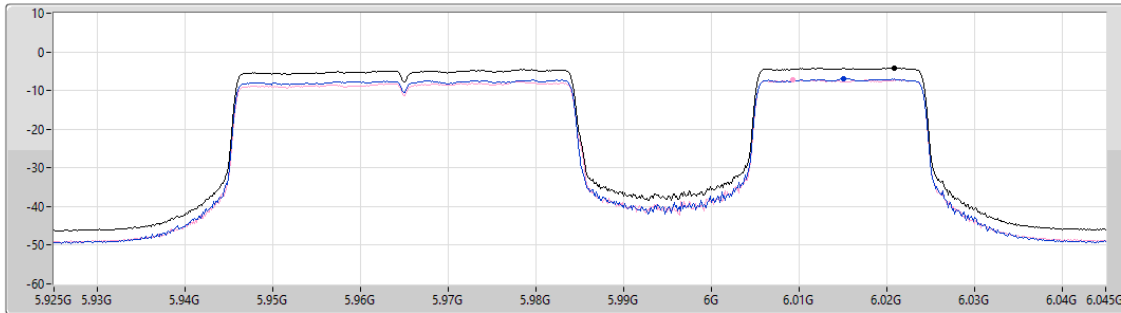

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.13	-4.13	-6.95	-7.24

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX

PSD

5985MHz

15/12/2025

CF (Hz)
5.985G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

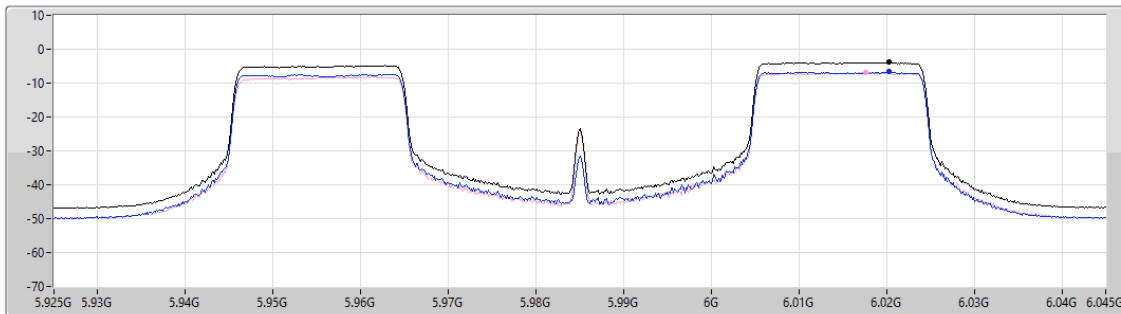

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.87	-3.87	-6.67	-6.93

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

PSD

7025MHz

15/12/2025

CF (Hz)
7.025G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

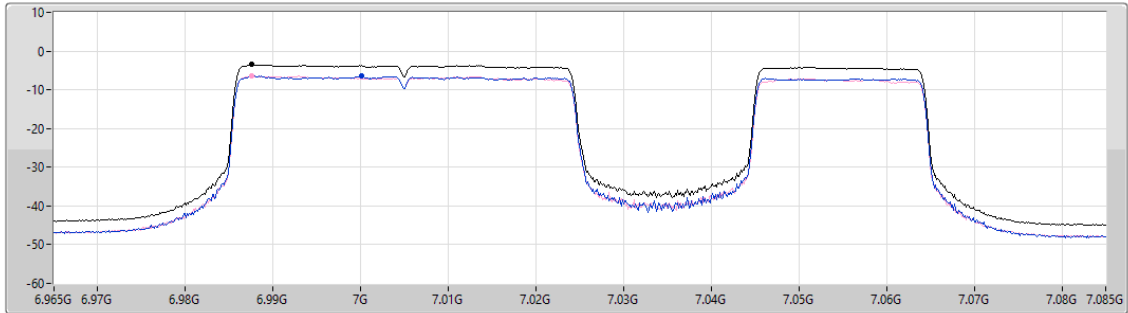

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.51	-3.51	-6.46	-6.44

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX

PSD

7025MHz

15/12/2025

CF (Hz)
7.025G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

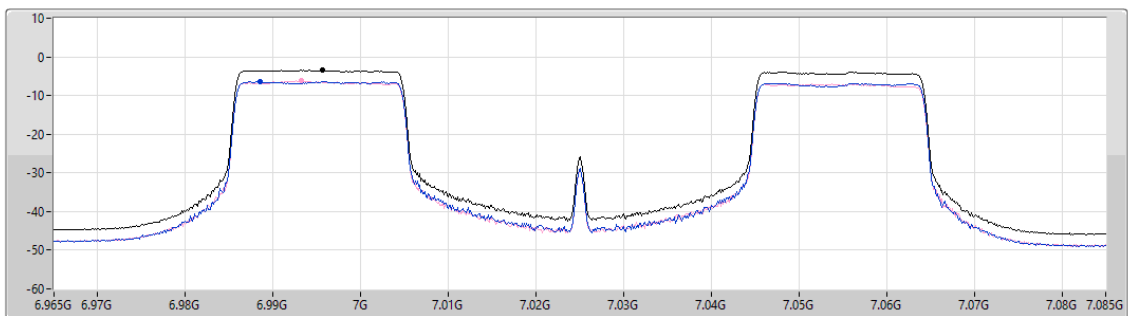


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.50	-3.50	-6.42	-6.22

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

PSD

6025MHz

15/12/2025

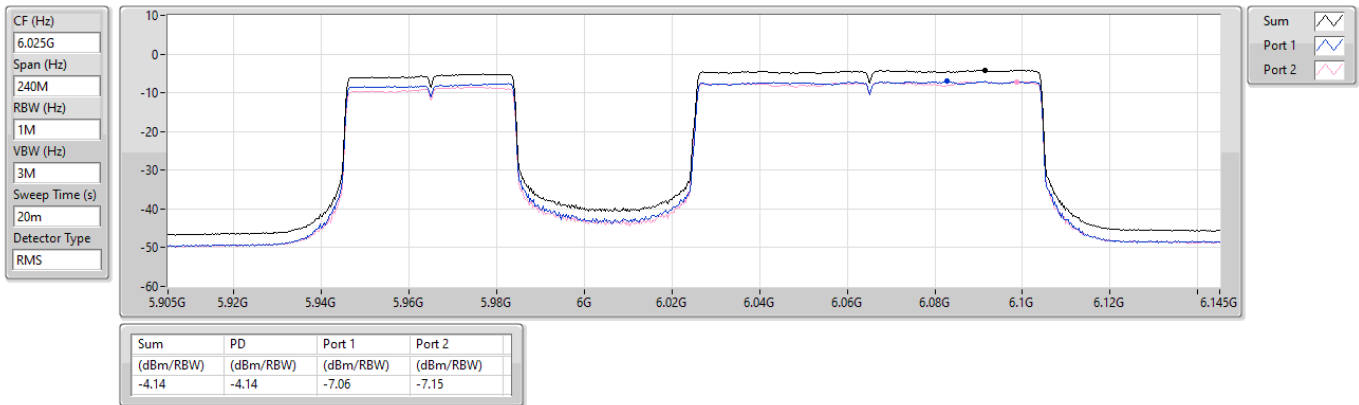


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX

PSD

6025MHz

15/12/2025

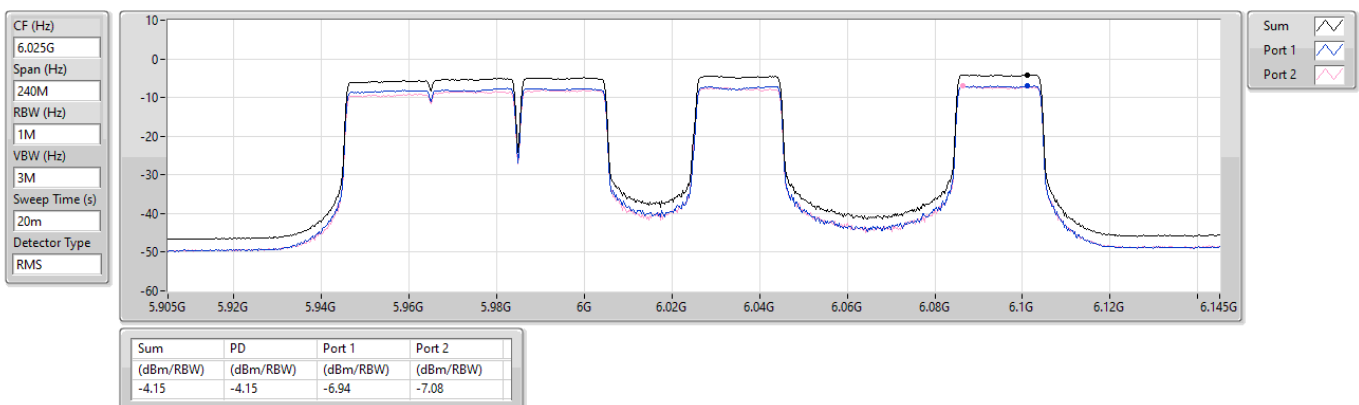

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX

PSD

6025MHz

15/12/2025

CF (Hz)
6.025G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

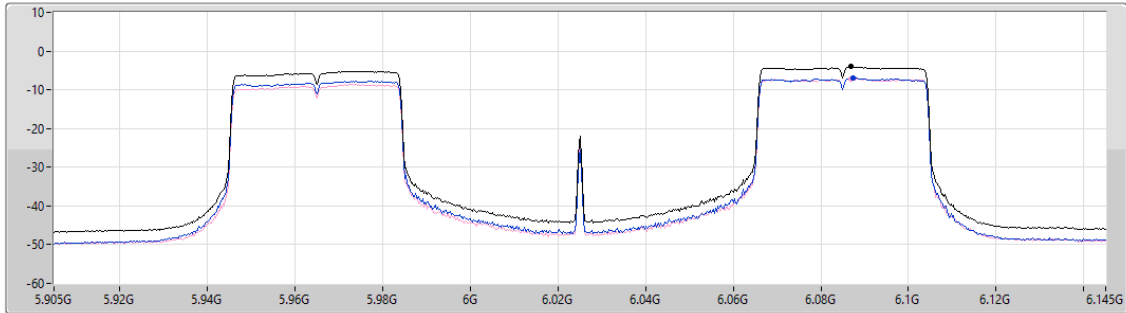

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.06	-4.06	-6.94	-7.18

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

PSD

6985MHz

15/12/2025

CF (Hz)
6.985G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

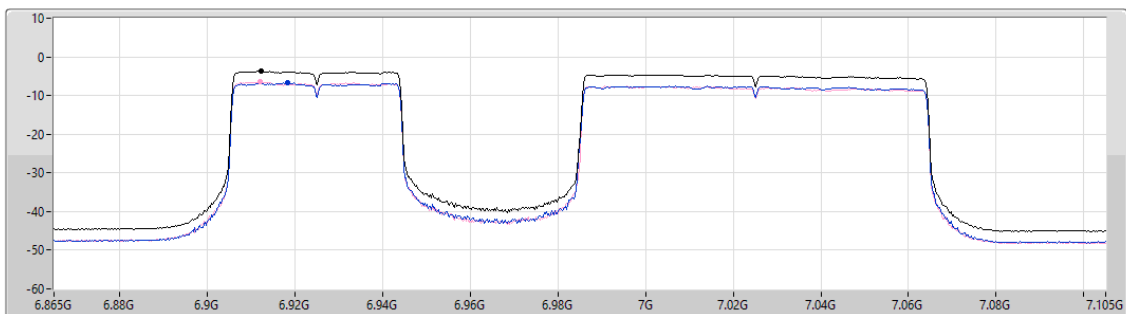

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.69	-3.69	-6.70	-6.51

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX

PSD

6985MHz

15/12/2025

CF (Hz)
6.985G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

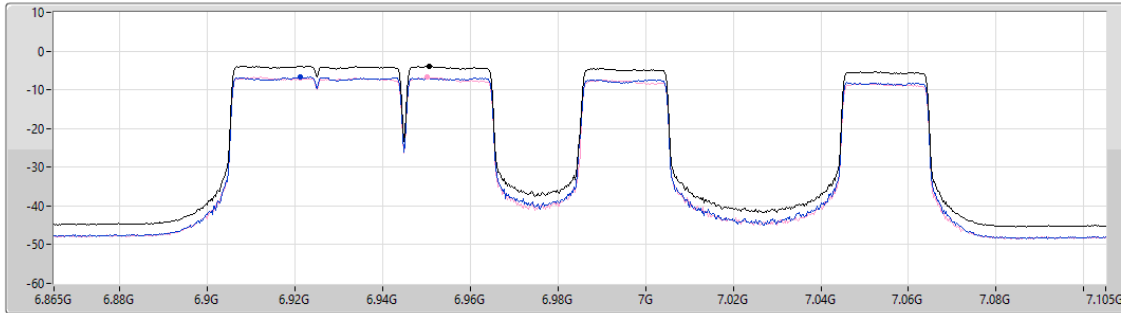

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.87	-3.87	-6.72	-6.75

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX

PSD

6985MHz

15/12/2025

CF (Hz)
6.985G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

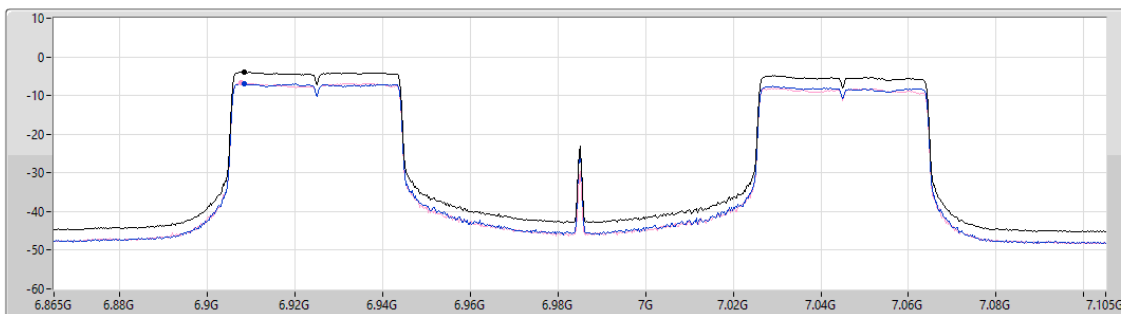

Sum 

Port 1 

Port 2 


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.89	-3.89	-6.99	-6.80

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX

PSD

6105MHz

15/12/2025

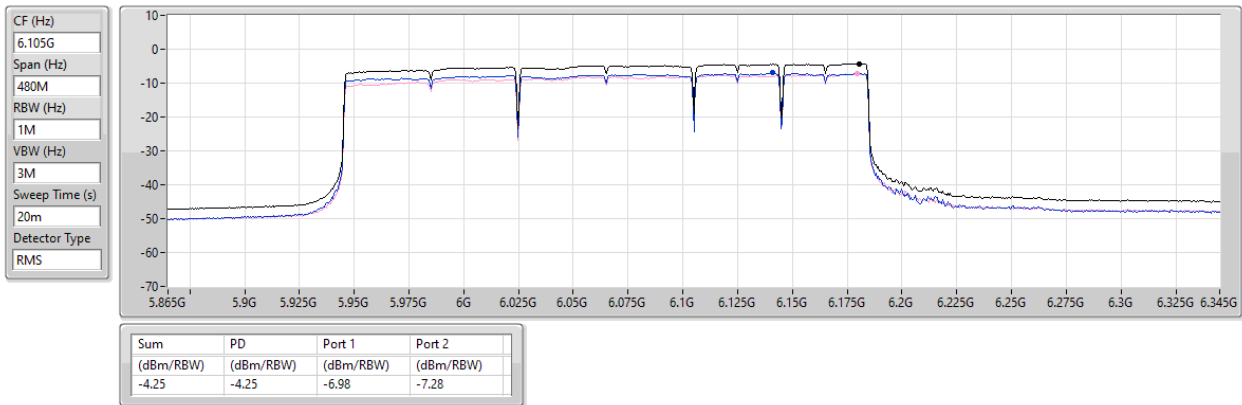


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_2TX

PSD

6105MHz

15/12/2025

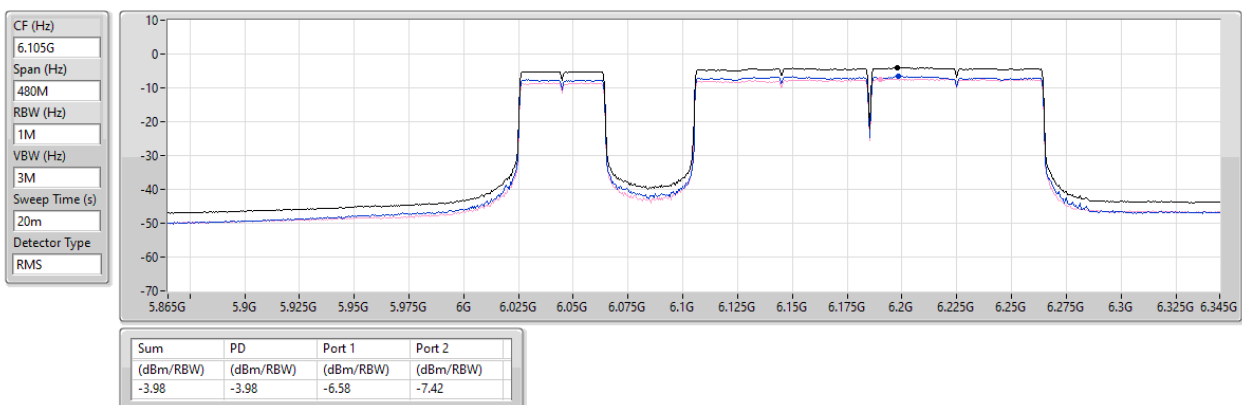

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX

PSD

6105MHz

15/12/2025

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

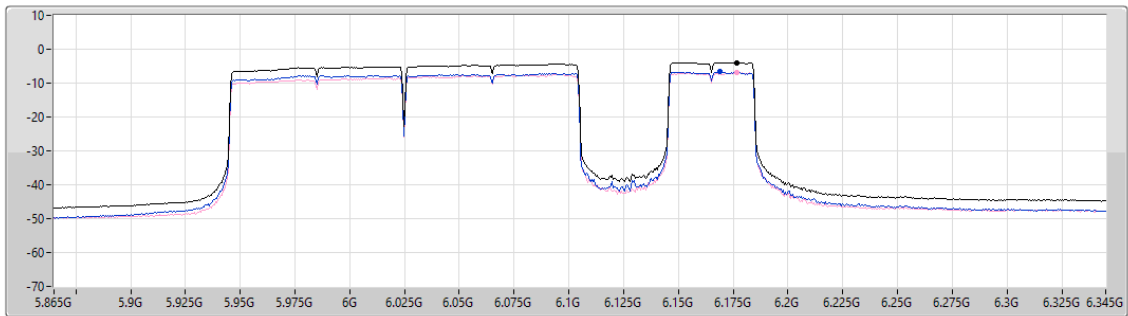

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.91	-3.91	-6.70	-6.92

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX

PSD

6105MHz

15/12/2025

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

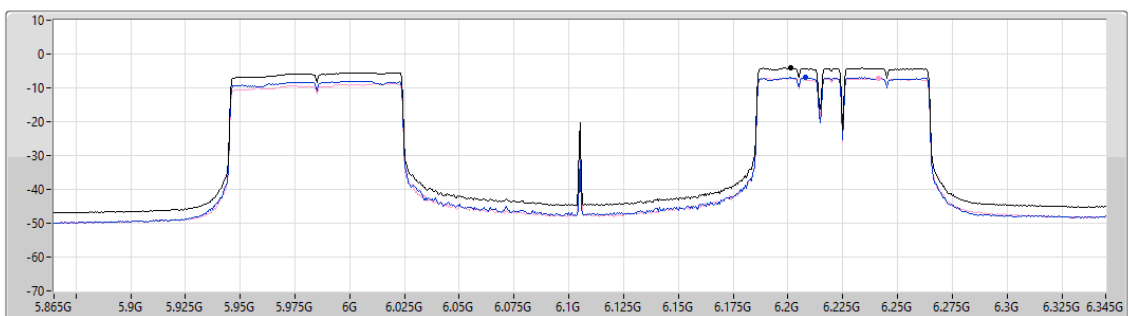

Sum 

Port 1 

Port 2 


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.15	-4.15	-6.94	-7.16

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX

PSD

6905MHz

15/12/2025

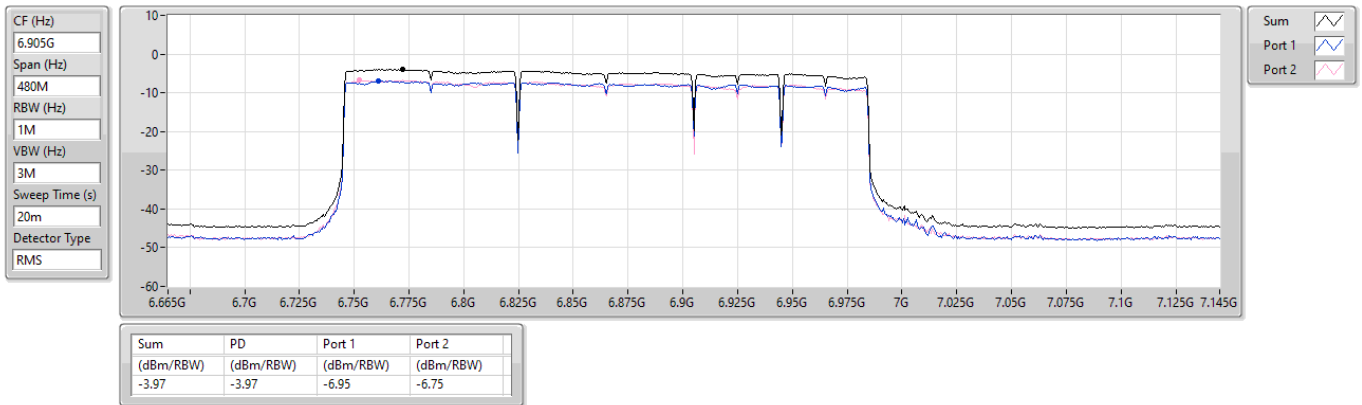


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_2TX

PSD

6905MHz

15/12/2025

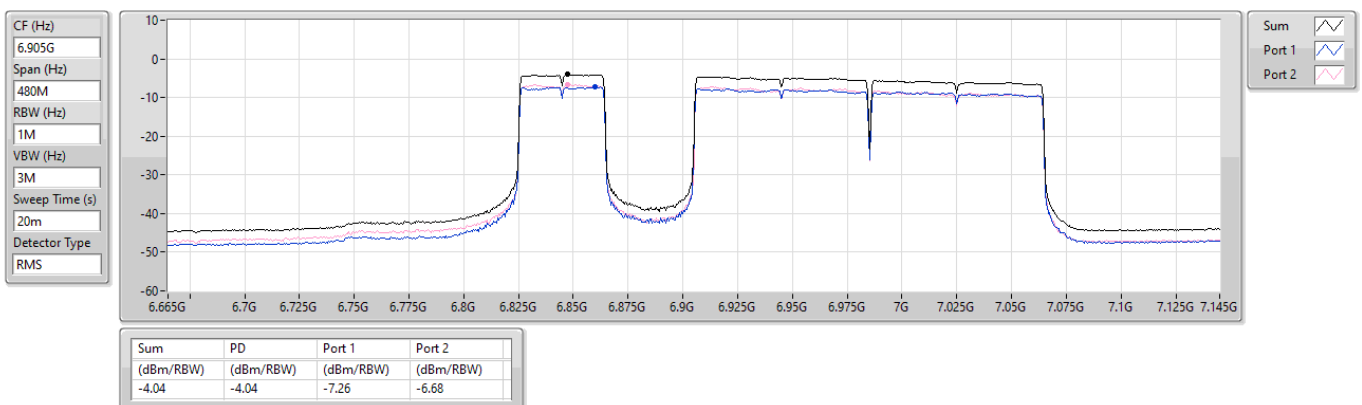


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX

PSD

6905MHz

15/12/2025

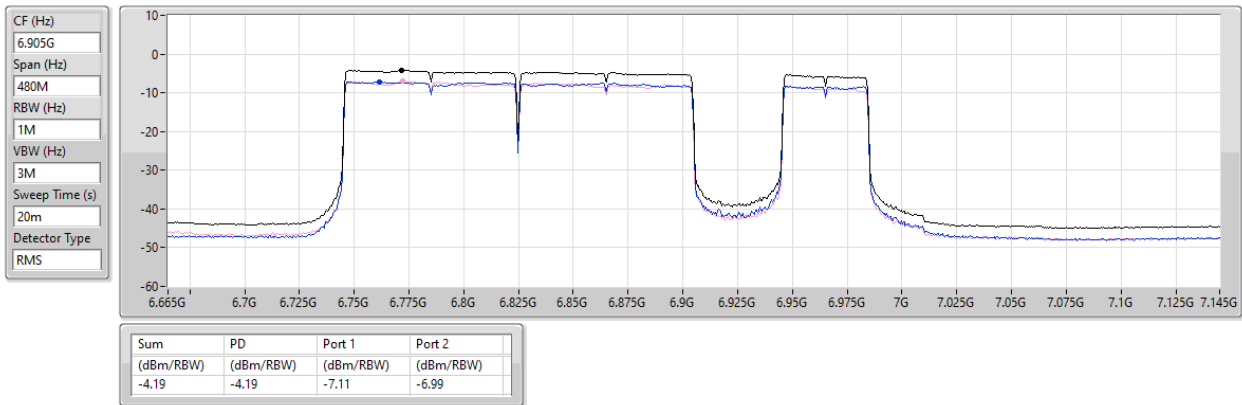


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX

PSD

6905MHz

15/12/2025

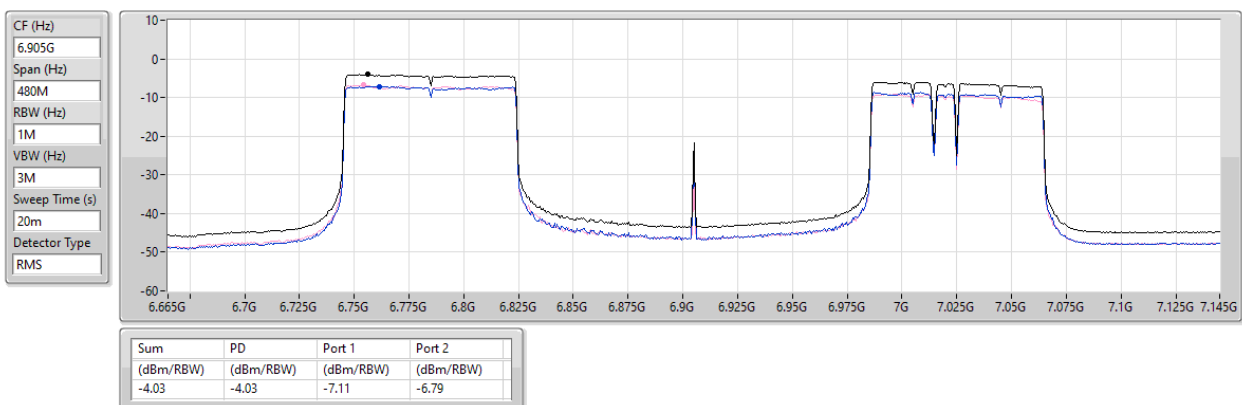



Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	-3.73	4.72
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_2TX	-3.93	4.52
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_2TX	-3.79	4.66
6.525-6.875GHz	-	-
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_2TX	-3.94	4.45
6.875-7.125GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	-3.47	4.63
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_2TX	-3.58	4.52

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	-	-	-	-	-	-	-
5985MHz	Pass	8.45	-6.59	-6.83	-3.73	4.72	5.00
6225MHz							
7025MHz	Pass	8.10	-6.45	-6.33	-3.47	4.63	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_2TX	-	-	-	-	-	-	-
6025MHz	Pass	8.45	-6.74	-7.10	-3.93	4.52	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	-	-	-	-	-	-	-
6025MHz	Pass	8.45	-7.11	-7.34	-4.28	4.17	5.00
6985MHz	Pass	8.10	-7.05	-6.81	-4.01	4.09	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_2TX	-	-	-	-	-	-	-
6985MHz	Pass	8.10	-6.64	-6.41	-3.58	4.52	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_2TX	-	-	-	-	-	-	-
6105MHz	Pass	8.45	-7.01	-7.31	-4.24	4.21	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_2TX	-	-	-	-	-	-	-
6105MHz	Pass	8.45	-6.65	-6.85	-3.79	4.66	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_2TX	-	-	-	-	-	-	-
6105MHz	Pass	8.45	-6.90	-7.31	-4.15	4.30	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_2TX	-	-	-	-	-	-	-
6905MHz	Pass	8.39	-7.27	-6.67	-4.10	4.29	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_2TX	-	-	-	-	-	-	-
6905MHz	Pass	8.39	-7.17	-6.51	-3.94	4.45	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_2TX	-	-	-	-	-	-	-
6905MHz	Pass	8.39	-7.18	-6.71	-4.06	4.33	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

PSD

5985MHz

17/12/2025

CF (Hz)
5.985G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
60

Detector Type
RMS

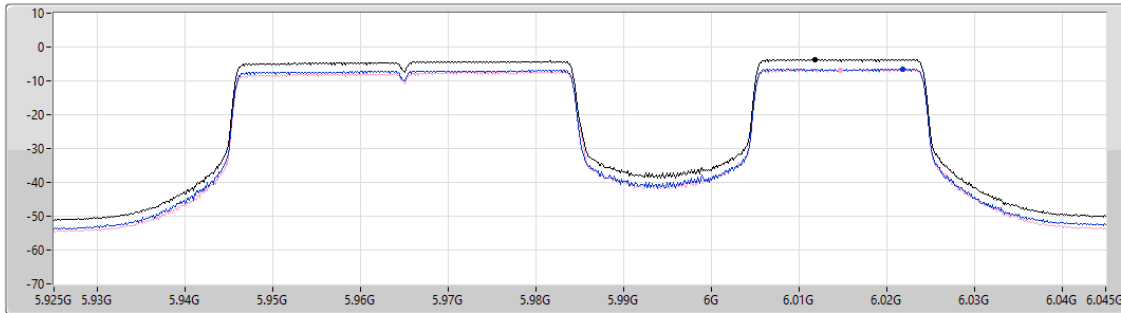

Sum ☒

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.73	-3.73	-6.59	-6.83

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

PSD

7025MHz

17/12/2025

CF (Hz)
7.025G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

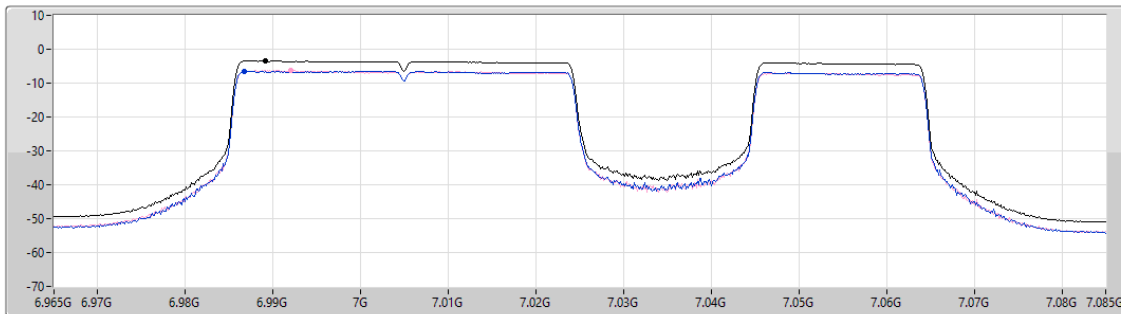

Sum ☒

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.47	-3.47	-6.45	-6.33

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_2TX

PSD

6025MHz

17/12/2025

CF (Hz)
6.025G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

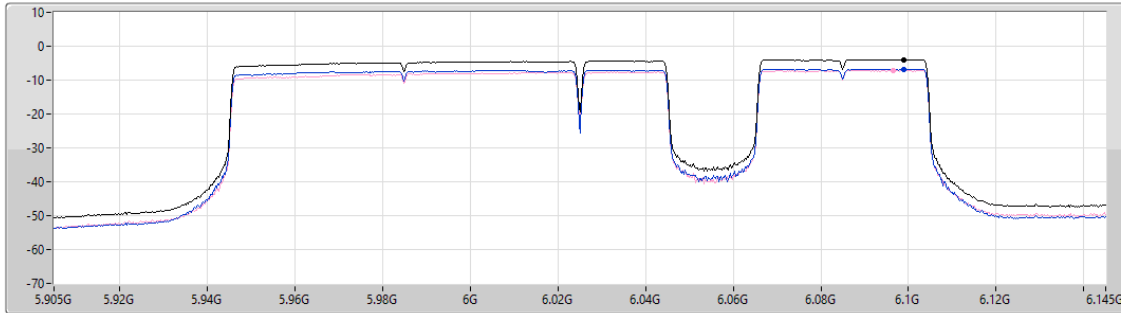

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.93	-3.93	-6.74	-7.10

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX

PSD

6025MHz

17/12/2025

CF (Hz)
6.025G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

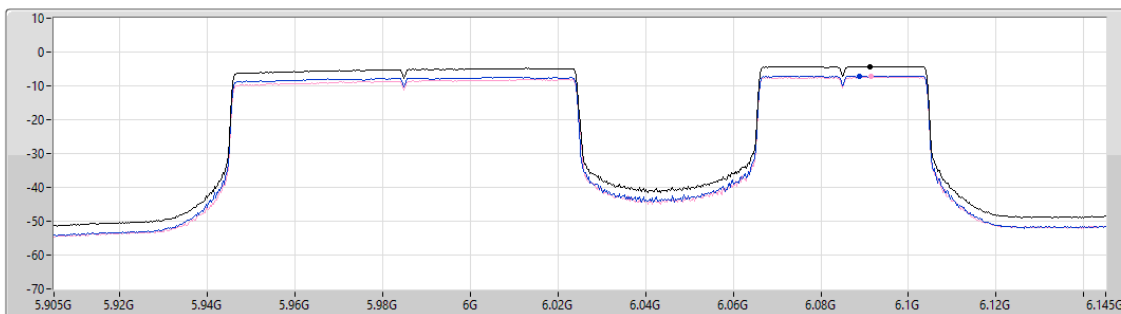

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.28	-4.28	-7.11	-7.34

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX

PSD

6985MHz

17/12/2025

CF (Hz)
6.985G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

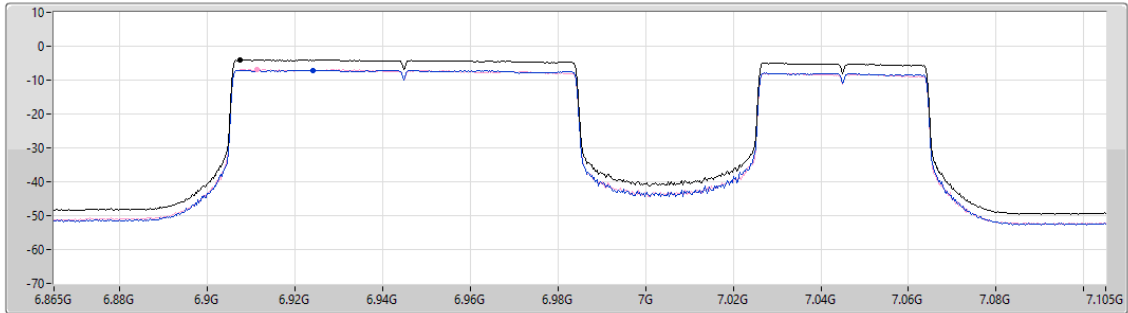

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.01	-4.01	-7.05	-6.81

Sum 

Port 1 

Port 2 

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_2TX

PSD

6985MHz

17/12/2025

CF (Hz)
6.985G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

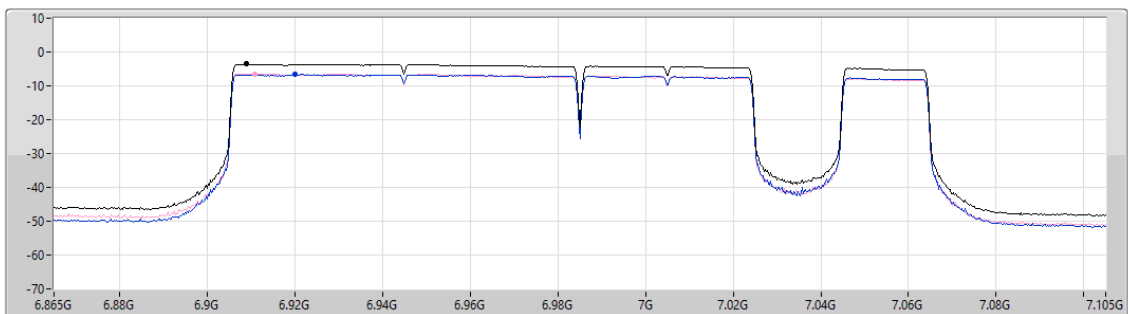

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.58	-3.58	-6.64	-6.41

Sum 

Port 1 

Port 2 

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_2TX

PSD

6105MHz

17/12/2025

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

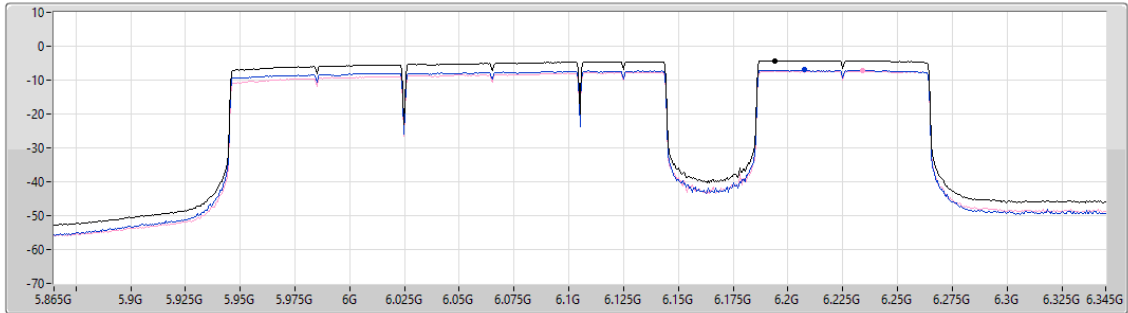

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.24	-4.24	-7.01	-7.31

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_2TX

PSD

6105MHz

17/12/2025

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

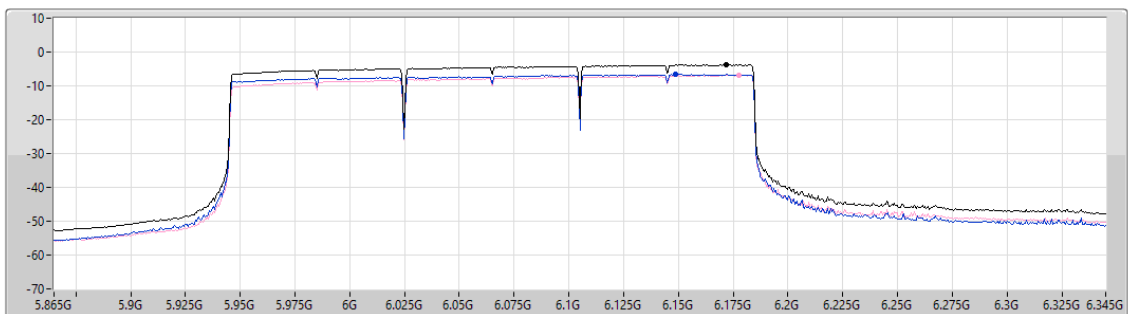

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.79	-3.79	-6.65	-6.85

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_2TX

PSD

6105MHz

17/12/2025

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

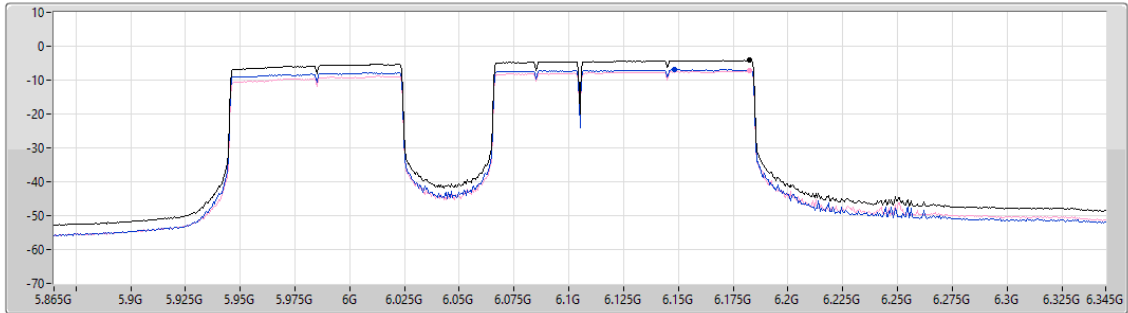

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.15	-4.15	-6.90	-7.31

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_2TX

PSD

6905MHz

17/12/2025

CF (Hz)
6.905G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

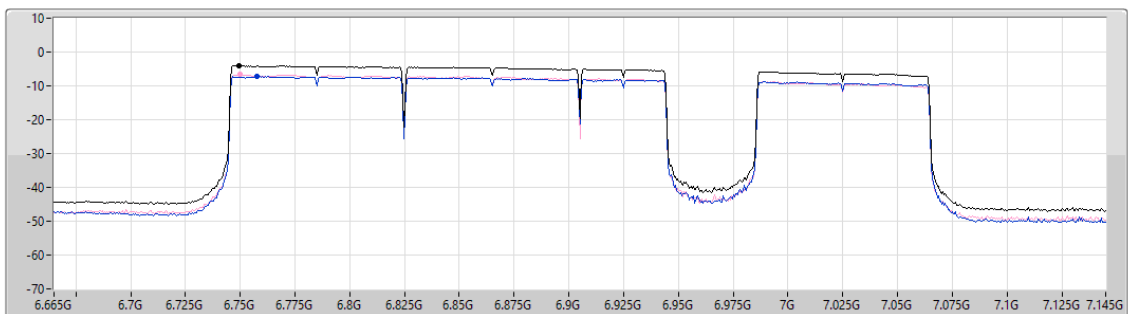

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.10	-4.10	-7.27	-6.67

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_2TX

PSD

6905MHz

17/12/2025

CF (Hz)
6.905G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

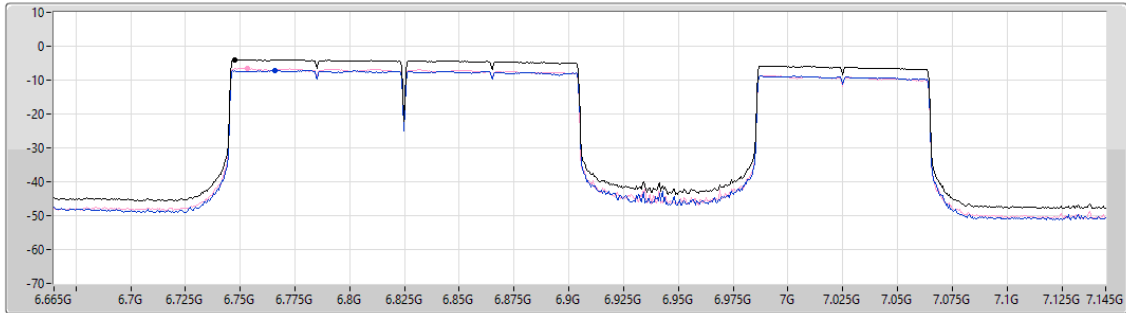

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.94	-3.94	-7.17	-6.51

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_2TX

PSD

6905MHz

17/12/2025

CF (Hz)
6.905G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

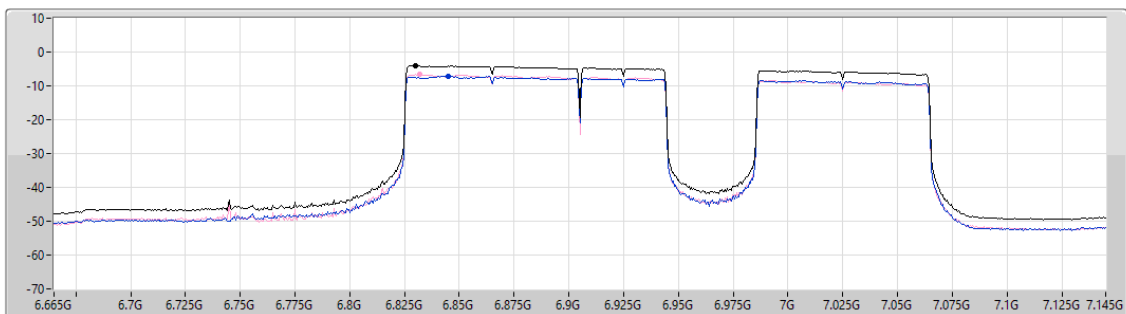

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.06	-4.06	-7.18	-6.71




Radiated Emissions below 1GHz

Appendix E.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 2	Pass	PK	46.49M	36.58	40.00	-3.42	Vertical

Mode 2

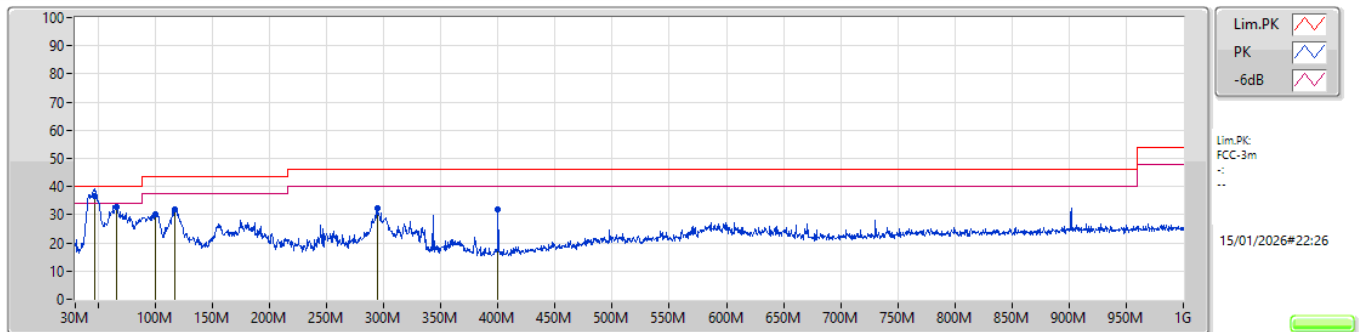

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	46.49M	36.58	40.00	-3.42	-34.12	3	Vertical	260	1.00	"Worst"	70.70	19.50	0.26	53.88		
PK	65.89M	32.88	40.00	-7.12	-35.12	3	Vertical	182	2.00	-	68.00	18.11	0.77	54.00		
PK	100.33M	30.18	43.50	-13.32	-37.95	3	Vertical	199	2.00	-	68.13	14.77	0.88	53.60		
PK	116.82M	31.77	43.50	-11.73	-35.96	3	Vertical	79	1.00	-	67.73	16.53	1.24	53.73		
PK	294.33M	32.50	46.00	-13.50	-32.42	3	Vertical	66	1.00	-	64.92	19.11	2.13	53.66		
PK	400.06M	31.84	46.00	-14.16	-29.70	3	Vertical	121	1.00	-	61.54	21.64	2.50	53.84		

Mode 2

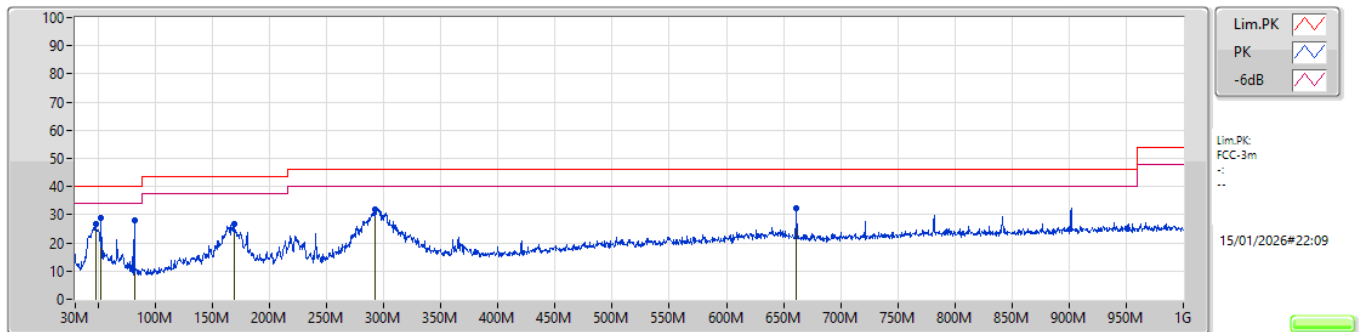

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	47.95M	26.55	40.00	-13.45	-34.12	3	Horizontal	169	3.00	-	60.67	19.58	0.30	54.00		
PK	52.8M	29.03	40.00	-10.97	-34.17	3	Horizontal	58	1.00	"Worst"	63.20	19.53	0.39	54.09		
PK	81.9M	28.15	40.00	-11.85	-39.12	3	Horizontal	77	1.00	-	67.27	14.24	0.52	53.88		
PK	169.2M	26.59	43.50	-16.91	-33.34	3	Horizontal	63	2.00	-	59.93	18.75	1.50	53.59		
PK	292.39M	32.01	46.00	-13.99	-32.48	3	Horizontal	244	2.00	-	64.49	19.05	2.12	53.65		
PK	661.47M	32.43	46.00	-13.57	-22.83	3	Horizontal	39	1.00	-	55.26	26.31	3.64	52.78		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT160_Nss1.(MCS0)_2TX	Pass	RMS	5.913G	68.12	68.20	-0.08	3	Vertical	318	2.67	-

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

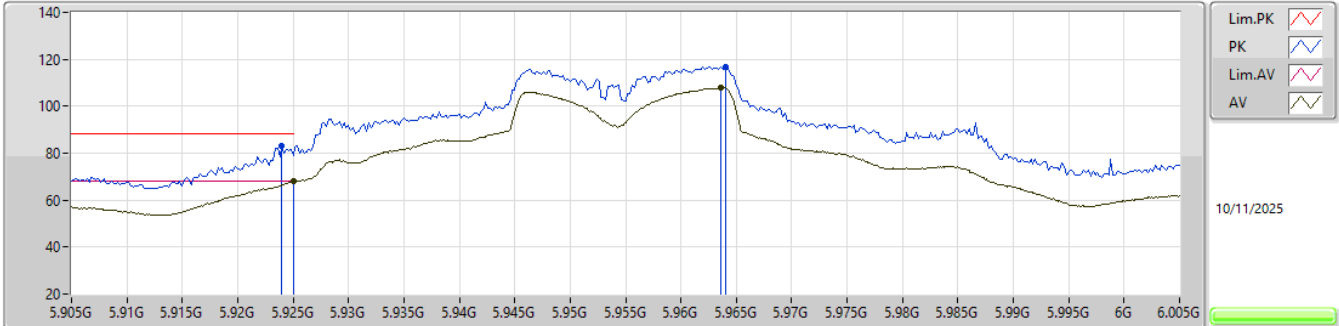


EUT_Z_2TX
Setting 21
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.924G	83.29	88.20	-4.91	89.35	3	Vertical	318	2.54	-	32.25	7.57	45.88			
RMS	5.925G	67.97	68.20	-0.23	74.02	3	Vertical	318	2.54	-	32.25	7.58	45.88			
PK	5.964G	116.88	Inf	-Inf	122.76	3	Vertical	318	2.54	-	32.33	7.65	45.86			
RMS	5.9636G	107.77	Inf	-Inf	113.66	3	Vertical	318	2.54	-	32.33	7.64	45.86			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

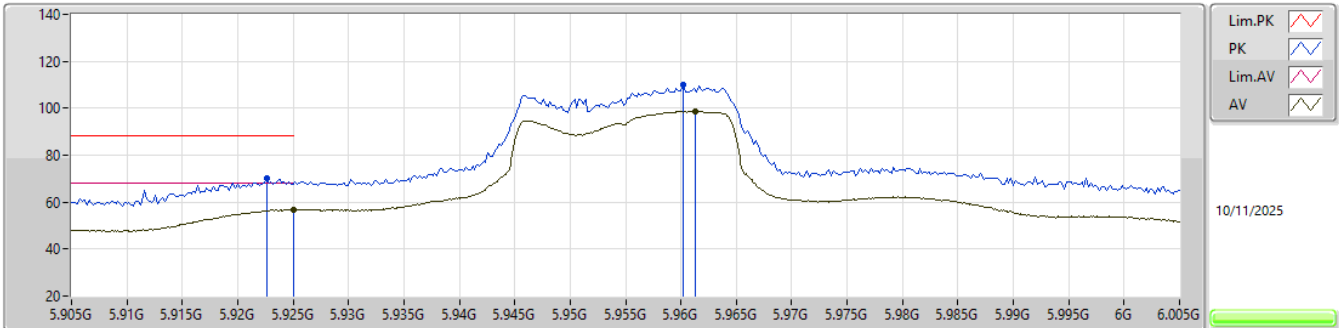


EUT_Z_2TX
Setting 21
06-U-P-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9226G	69.96	88.20	-18.24	76.02	3	Horizontal	169	2.86	-	32.25	7.57	45.88			
RMS	5.925G	56.86	68.20	-11.34	62.91	3	Horizontal	169	2.86	-	32.25	7.58	45.88			
PK	5.9602G	110.02	Inf	-Inf	115.92	3	Horizontal	169	2.86	-	32.32	7.64	45.86			
RMS	5.9613G	98.64	Inf	-Inf	104.54	3	Horizontal	169	2.86	-	32.32	7.64	45.86			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

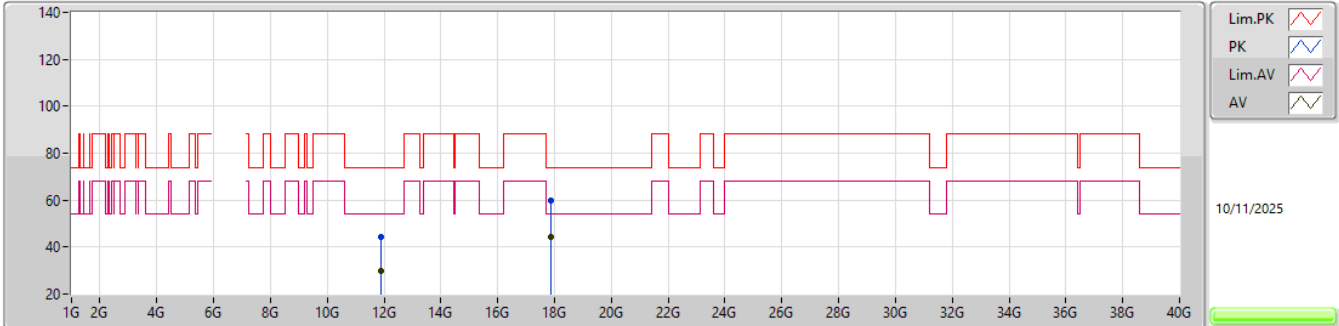


EUT_Y_2TX
Setting 21
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.90994G	44.43	74.00	-29.57	40.50	3	Vertical	325	1.80	-	38.80	11.07	45.94				
AV	11.89512G	29.92	54.00	-24.08	26.00	3	Vertical	325	1.80	-	38.79	11.06	45.93				
PK	17.85828G	59.62	74.00	-14.38	43.06	3	Vertical	339.1	1.84	-	47.11	14.73	45.28				
AV	17.86272G	44.22	54.00	-9.78	27.49	3	Vertical	339.1	1.84	-	47.28	14.73	45.28				

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

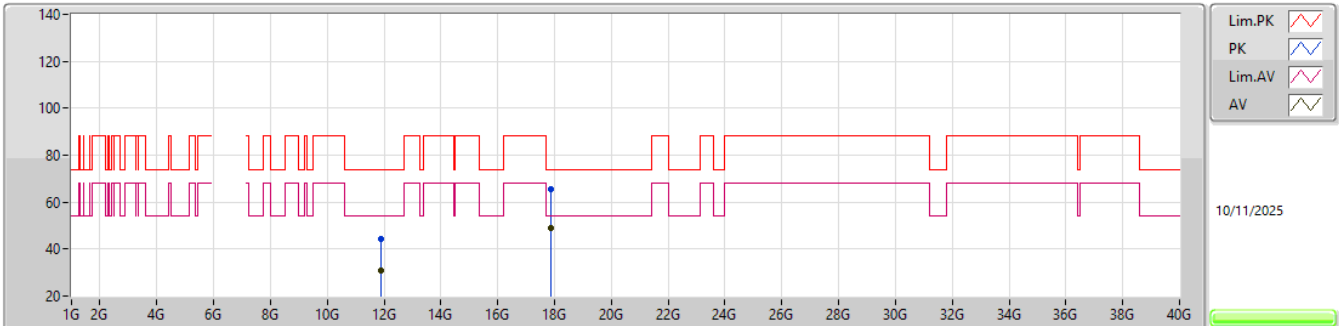


EUT_Y_2TX
Setting 21
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.90544G	44.25	74.00	-29.75	40.32	3	Horizontal	36.9	1.80	-	38.80	11.07	45.94				
AV	11.91G	30.64	54.00	-23.36	26.71	3	Horizontal	36.9	1.80	-	38.80	11.07	45.94				
PK	17.87406G	65.39	74.00	-8.61	48.22	3	Horizontal	317	1.80	-	47.71	14.74	45.28				
AV	17.87286G	48.83	54.00	-5.17	31.70	3	Horizontal	317	1.80	-	47.67	14.74	45.28				

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

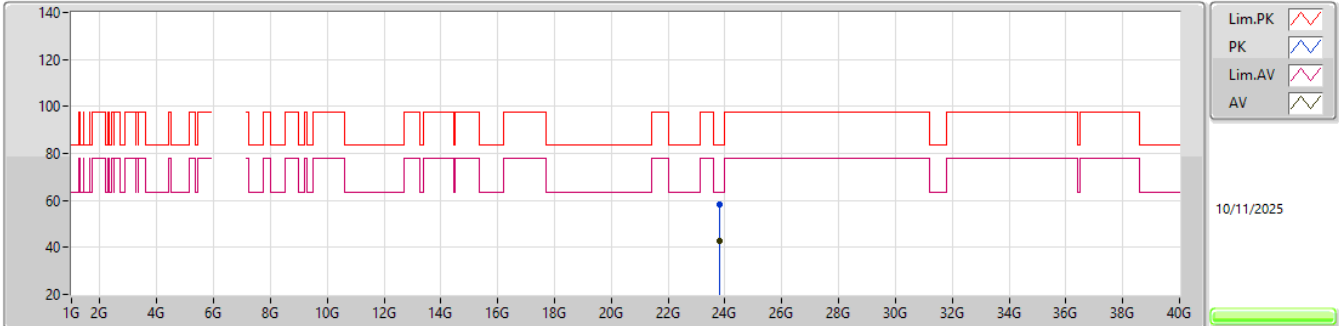


EUT_Y_2TX
Setting 21
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.8232G	58.17	83.54	-25.37	43.95	1	Vertical	343	1.62	-	38.90	22.99	47.67			
AV	23.82G	42.94	63.54	-20.60	28.72	1	Vertical	343	1.62	-	38.90	22.99	47.67			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

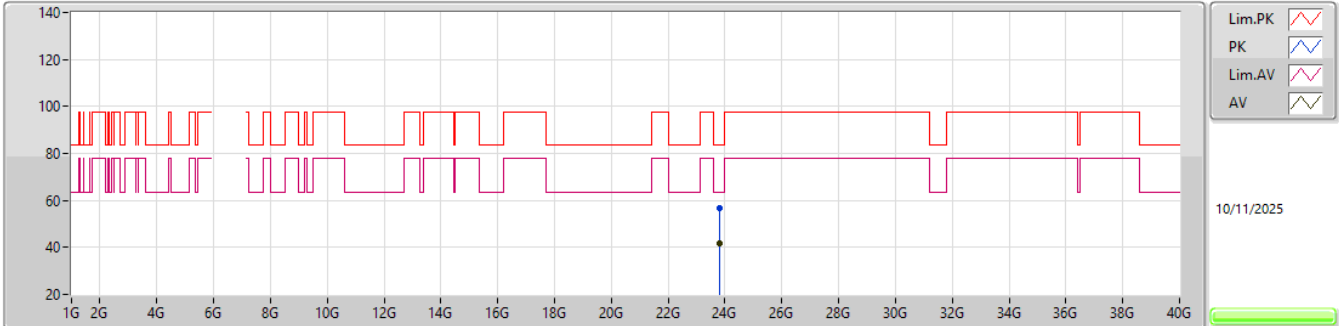


EUT_Y_2TX
Setting 21
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.798G	56.79	83.54	-26.75	42.60	1	Horizontal	42	2.15	-	38.90	22.97	47.68			
AV	23.818G	41.84	63.54	-21.70	27.62	1	Horizontal	42	2.15	-	38.90	22.99	47.67			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

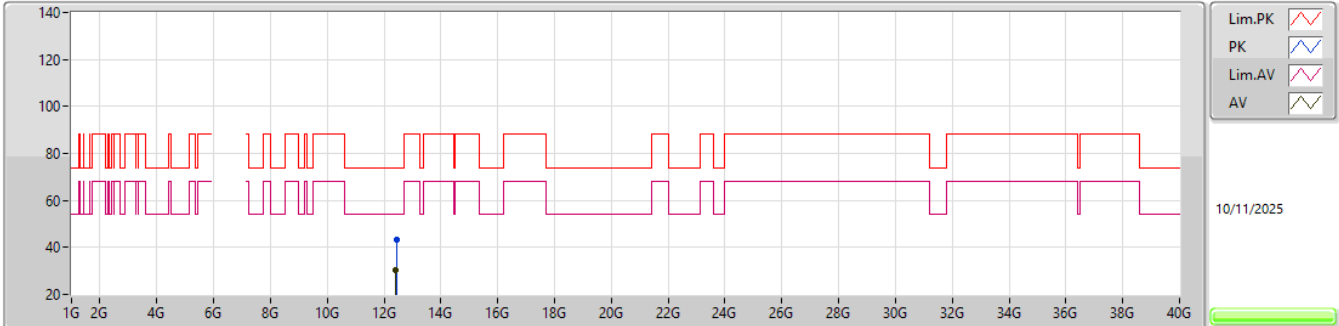


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.428G	43.37	74.00	-30.63	38.90	3	Vertical	342	1.74	-	38.64	11.36	45.53			
AV	12.387G	30.43	54.00	-23.57	25.95	3	Vertical	342	1.74	-	38.73	11.33	45.58			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

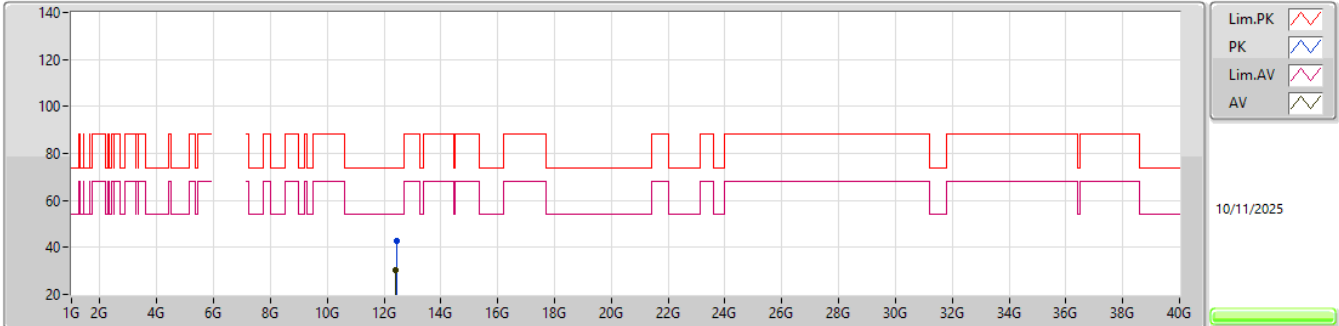


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.4306G	43.01	74.00	-30.99	38.54	3	Horizontal	48	1.79	-	38.64	11.36	45.53			
AV	12.3894G	30.59	54.00	-23.41	26.11	3	Horizontal	48	1.79	-	38.72	11.33	45.57			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

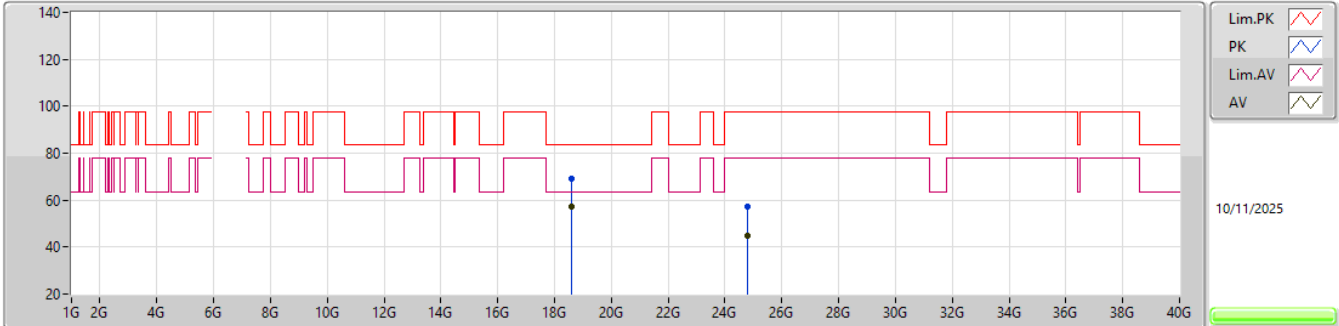


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.58884G	69.36	83.54	-14.18	59.48	1	Vertical	10	1.82	-	37.66	20.61	48.39			
AV	18.58564G	57.38	63.54	-6.16	47.52	1	Vertical	10	1.82	-	37.64	20.61	48.39			
PK	24.79568G	57.26	97.74	-40.48	42.41	1	Vertical	351	1.65	-	39.18	23.11	47.44			
AV	24.77648G	44.89	77.74	-32.85	30.10	1	Vertical	351	1.65	-	39.11	23.12	47.44			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

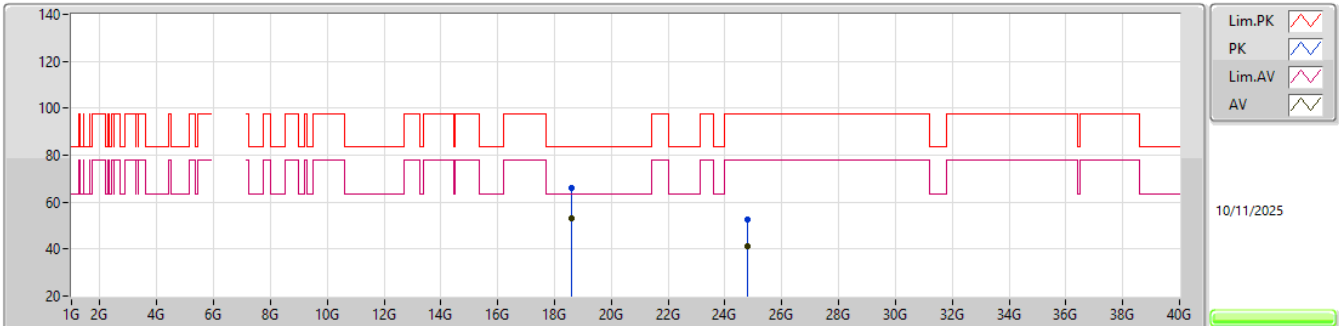


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.58372G	66.16	83.54	-17.38	56.30	1	Horizontal	15.9	1.80	-	37.63	20.61	48.38			
AV	18.58612G	52.86	63.54	-10.68	43.00	1	Horizontal	15.9	1.80	-	37.64	20.61	48.39			
PK	24.77712G	52.73	97.74	-45.01	37.94	1	Horizontal	287	1.80	-	39.11	23.12	47.44			
AV	24.77856G	41.09	77.74	-36.65	26.30	1	Horizontal	287	1.80	-	39.11	23.12	47.44			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

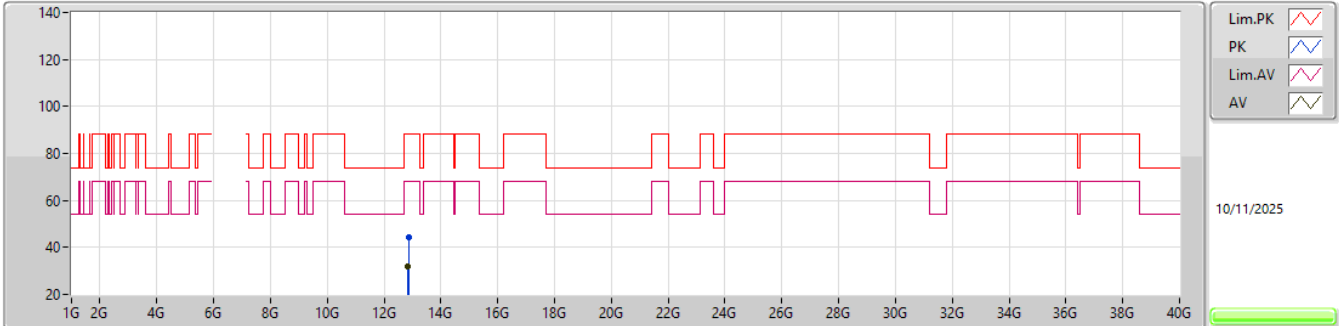


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8642G	44.06	88.20	-44.14	38.76	3	Vertical	1	2.93	-	39.47	11.63	45.80			
RMS	12.8302G	31.76	68.20	-36.44	26.46	3	Vertical	1	2.93	-	39.46	11.60	45.76			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

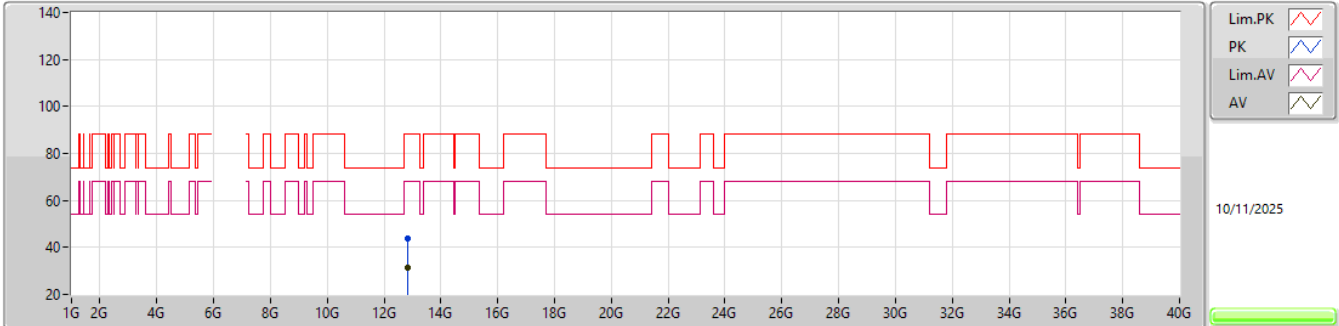


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.8522G	43.89	88.20	-44.31	38.55	3	Horizontal	271	3.00	-	39.50	11.62	45.78			
RMS	12.825G	31.40	68.20	-36.80	26.11	3	Horizontal	271	3.00	-	39.45	11.60	45.76			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

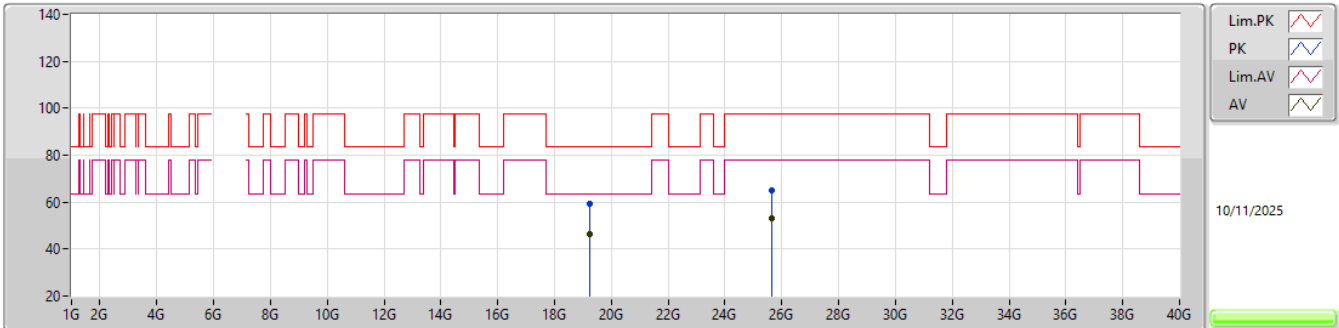


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.23748G	59.52	83.54	-24.02	49.73	1	Vertical	25	1.80	-	37.82	20.77	48.80			
AV	19.23732G	46.58	63.54	-16.96	36.79	1	Vertical	25	1.80	-	37.82	20.77	48.80			
PK	25.65928G	64.89	97.74	-32.85	50.03	1	Vertical	17	1.79	-	38.74	23.35	47.23			
AV	25.66324G	53.34	77.74	-24.40	38.47	1	Vertical	17	1.79	-	38.75	23.35	47.23			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

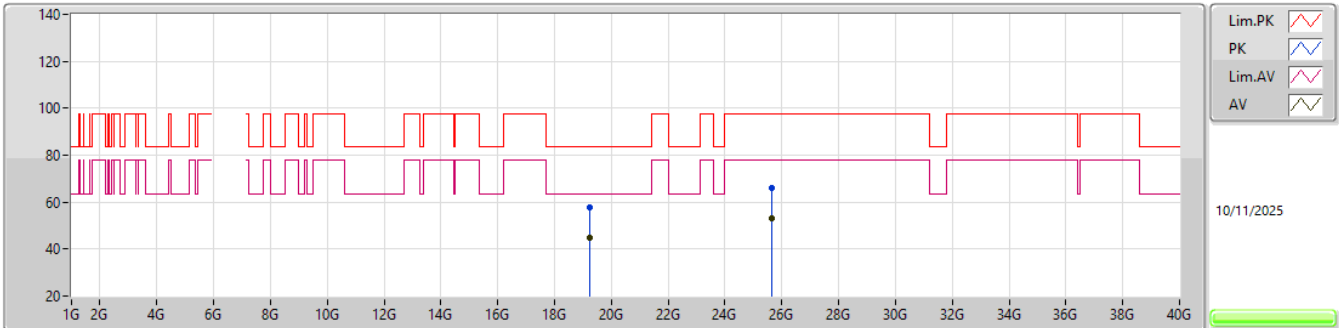


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	19.2423G	57.78	83.54	-25.76	47.95	1	Horizontal	318	2.01	-	37.85	20.78	48.80				
AV	19.2414G	44.86	63.54	-18.68	35.03	1	Horizontal	318	2.01	-	37.85	20.78	48.80				
PK	25.6519G	65.91	97.74	-31.83	51.07	1	Horizontal	313	1.64	-	38.71	23.36	47.23				
AV	25.66504G	53.06	77.74	-24.68	38.18	1	Horizontal	313	1.64	-	38.76	23.35	47.23				

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

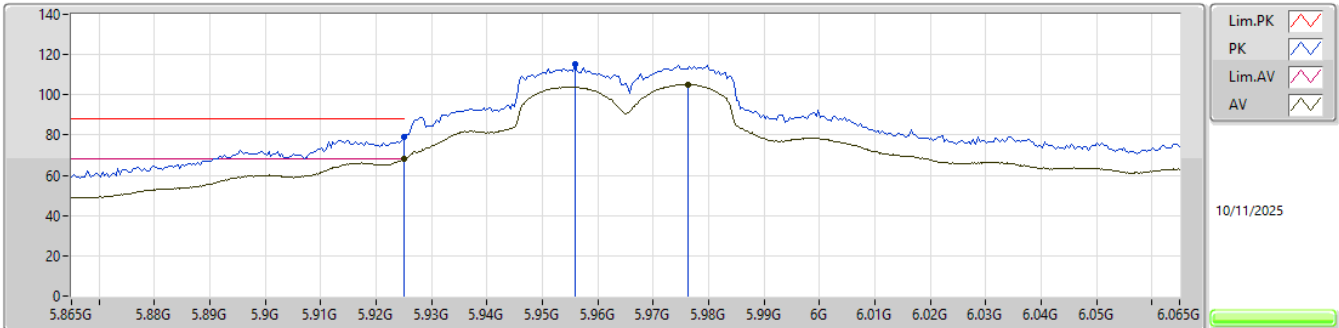


EUT_Z_2TX
Setting 22
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	78.85	88.20	-9.35	84.90	3	Vertical	321	2.23	-	32.25	7.58	45.88			
RMS	5.925G	68.02	68.20	-0.18	74.07	3	Vertical	321	2.23	-	32.25	7.58	45.88			
PK	5.9558G	114.99	Inf	-Inf	120.91	3	Vertical	321	2.23	-	32.31	7.63	45.86			
RMS	5.9762G	105.09	Inf	-Inf	110.92	3	Vertical	321	2.23	-	32.35	7.67	45.85			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

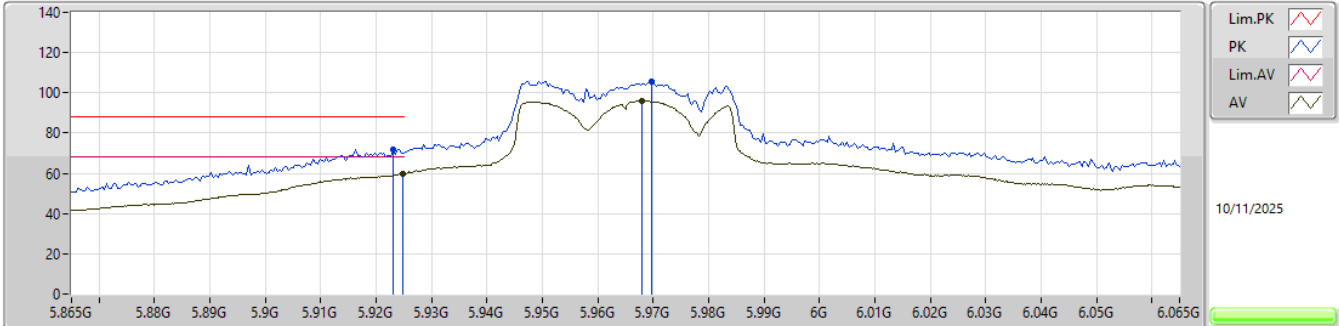


EUT_Z_2TX
Setting 22
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.923G	72.10	88.20	-16.10	78.16	3	Horizontal	164	2.40	-	32.25	7.57	45.88			
RMS	5.9248G	59.91	68.20	-8.29	65.97	3	Horizontal	164	2.40	-	32.25	7.57	45.88			
PK	5.9698G	105.87	Inf	-Inf	111.73	3	Horizontal	164	2.40	-	32.34	7.66	45.86			
RMS	5.968G	96.01	Inf	-Inf	101.88	3	Horizontal	164	2.40	-	32.34	7.65	45.86			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

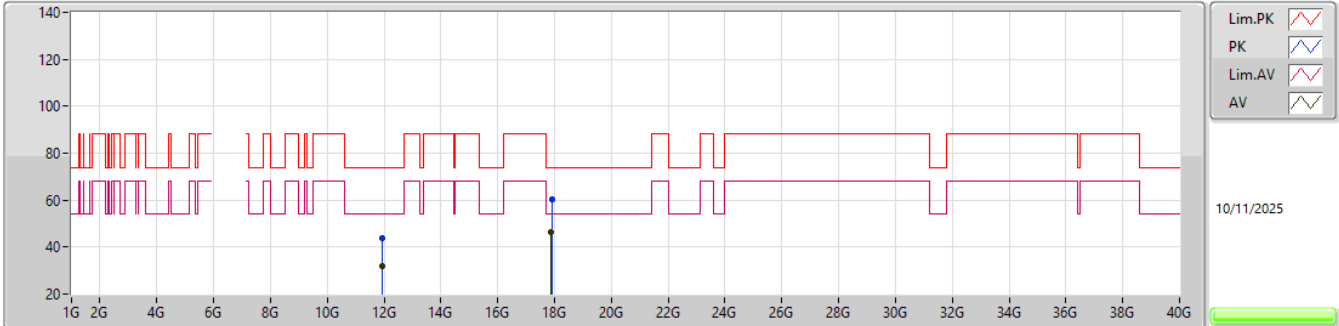


EUT_Y_2TX
Setting 22
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.92528G	43.92	74.00	-30.08	39.99	3	Vertical	352.3	1.36	-	38.80	11.07	45.94			
AV	11.92992G	31.66	54.00	-22.34	27.74	3	Vertical	352.3	1.36	-	38.80	11.07	45.95			
PK	17.8956G	60.60	74.00	-13.40	42.60	3	Vertical	331	1.79	-	48.53	14.75	45.28			
AV	17.8918G	46.33	54.00	-7.67	28.48	3	Vertical	331	1.79	-	48.39	14.74	45.28			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

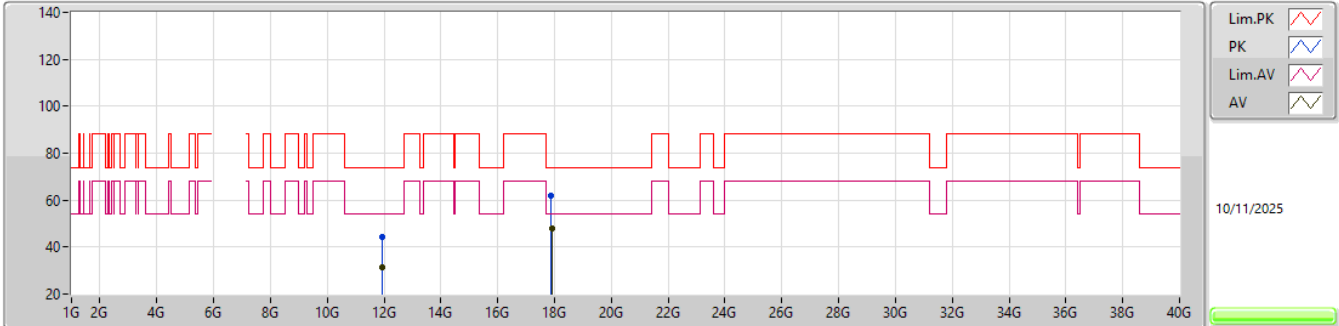


EUT_Y_2TX
Setting 22
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.92774G	44.17	74.00	-29.83	40.25	3	Horizontal	51	1.99	-	38.80	11.07	45.95				
AV	11.93002G	31.13	54.00	-22.87	27.21	3	Horizontal	51	1.99	-	38.80	11.07	45.95				
PK	17.8798G	62.05	74.00	-11.95	44.66	3	Horizontal	313.3	1.77	-	47.93	14.74	45.28				
AV	17.9014G	48.18	54.00	-5.82	29.95	3	Horizontal	313.3	1.77	-	48.76	14.75	45.28				

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

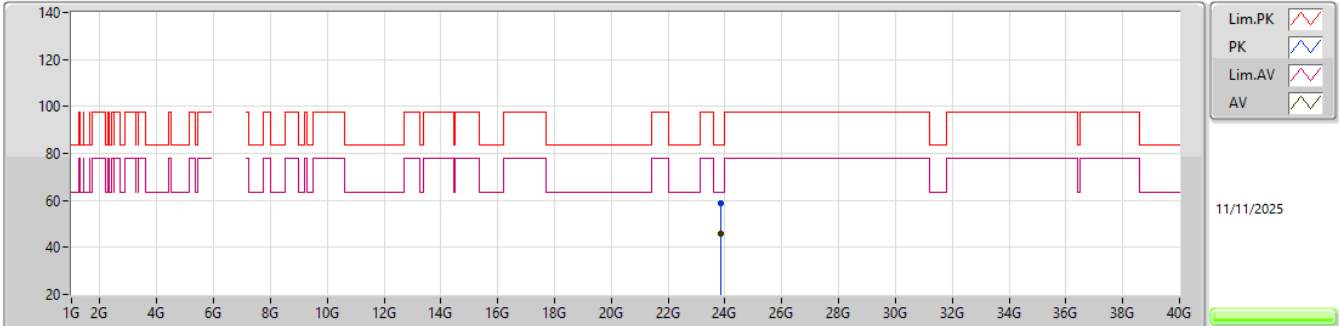


EUT_Y_2TX
Setting 22
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.85G	58.56	83.54	-24.98	44.31	1	Vertical	344	1.78	-	38.90	23.01	47.66			
AV	23.866G	45.84	63.54	-17.70	31.57	1	Vertical	344	1.78	-	38.90	23.02	47.65			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

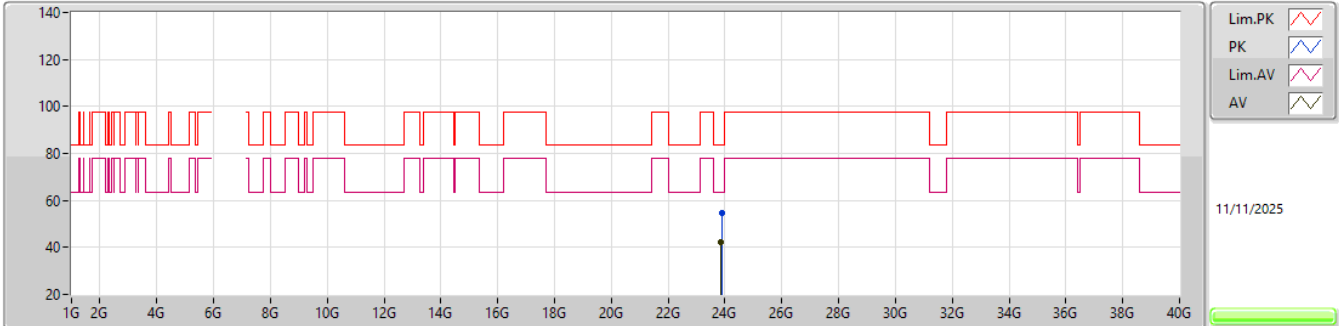


EUT_Y_2TX
Setting 22
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.8816G	54.86	83.54	-28.68	40.58	1	Horizontal	288	1.64	-	38.90	23.03	47.65			
AV	23.858G	42.41	63.54	-21.13	28.15	1	Horizontal	288	1.64	-	38.90	23.02	47.66			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6205MHz_TX

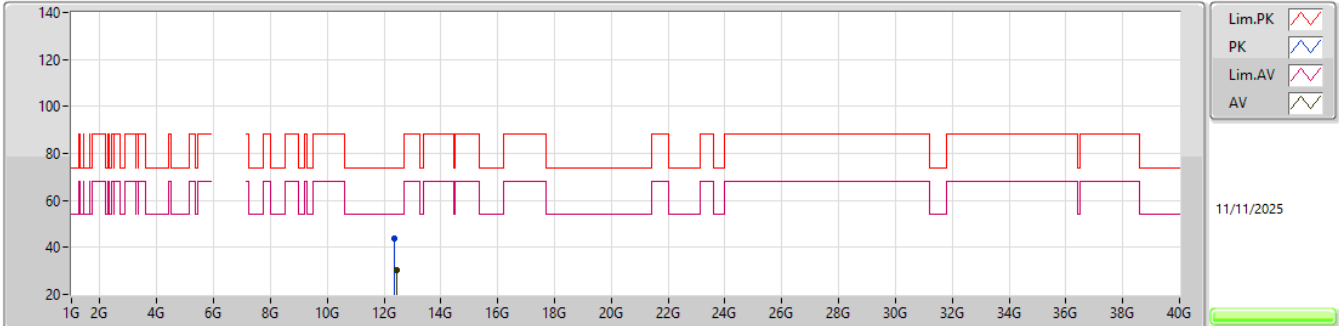


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.381G	43.84	74.00	-30.16	39.35	3	Vertical	133	1.80	-	38.74	11.33	45.58			
AV	12.4598G	30.17	54.00	-23.83	25.69	3	Vertical	133	1.80	-	38.60	11.38	45.50			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6205MHz_TX

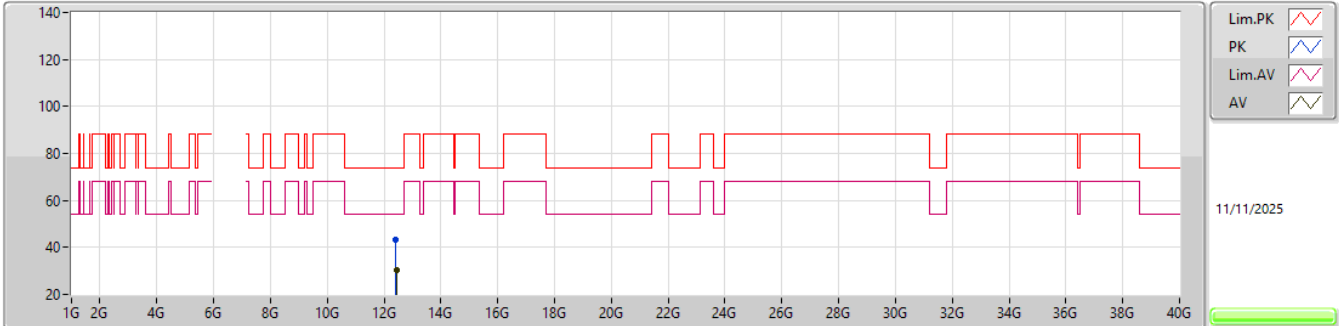


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.409G	43.45	74.00	-30.55	38.98	3	Horizontal	306	2.92	-	38.68	11.34	45.55			
AV	12.457G	30.44	54.00	-23.56	25.97	3	Horizontal	306	2.92	-	38.60	11.37	45.50			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6205MHz_TX

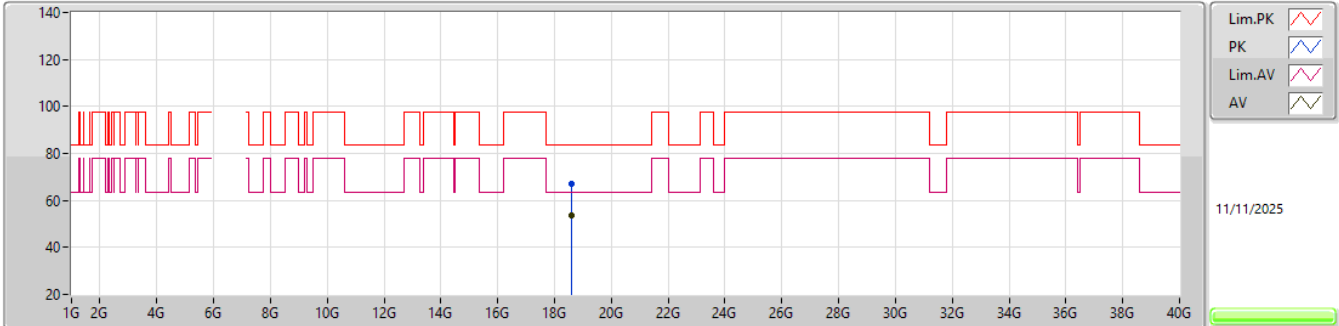


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.5998G	67.22	83.54	-16.32	57.31	1	Vertical	7	1.83	-	37.70	20.61	48.40			
AV	18.6178G	53.47	63.54	-10.07	43.62	1	Vertical	7	1.83	-	37.66	20.61	48.42			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6205MHz_TX

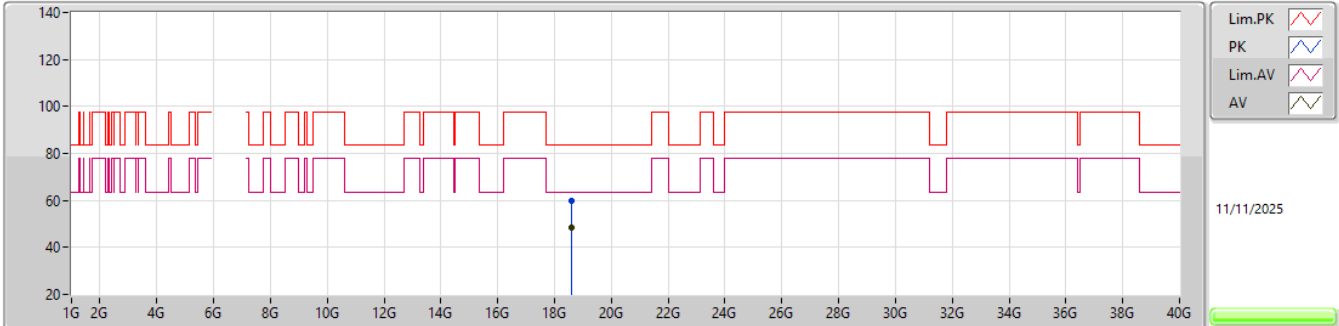


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.5786G	59.93	83.54	-23.61	50.09	1	Horizontal	15	1.80	-	37.61	20.61	48.38			
AV	18.5986G	48.36	63.54	-15.18	38.46	1	Horizontal	15	1.80	-	37.69	20.61	48.40			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6405MHz_TX

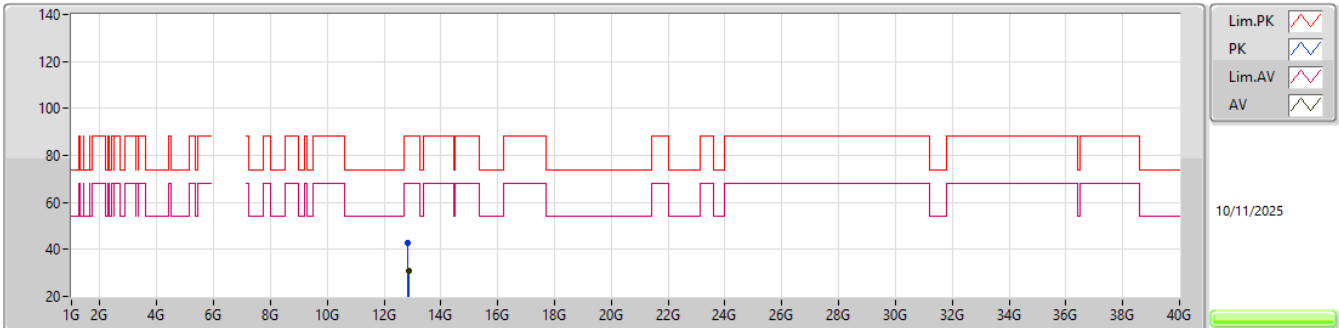


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8252G	42.82	88.20	-45.38	37.53	3	Vertical	213	2.55	-	39.45	11.60	45.76			
RMS	12.858G	30.65	68.20	-37.55	25.34	3	Vertical	213	2.55	-	39.48	11.62	45.79			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6405MHz_TX

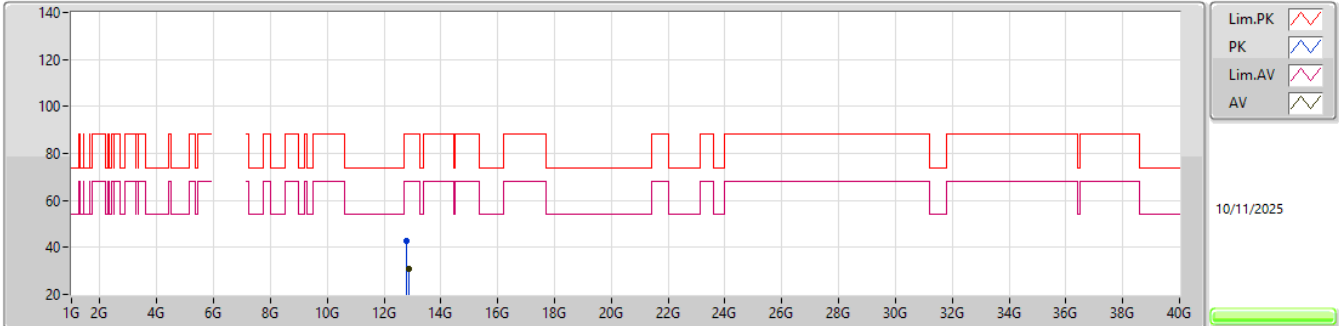


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8042G	42.85	88.20	-45.35	37.59	3	Horizontal	66	2.87	-	39.41	11.59	45.74			
RMS	12.8568G	30.67	68.20	-37.53	25.35	3	Horizontal	66	2.87	-	39.49	11.62	45.79			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6405MHz_TX

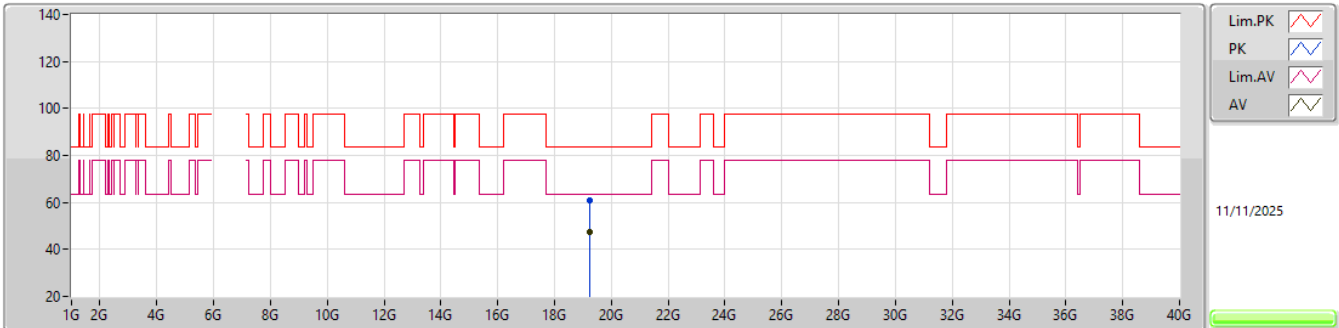EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.22268G	60.81	83.54	-22.73	51.10	1	Vertical	24	1.60	-	37.74	20.77	48.80			
AV	19.21986G	47.40	63.54	-16.14	37.72	1	Vertical	24	1.60	-	37.72	20.76	48.80			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6405MHz_TX

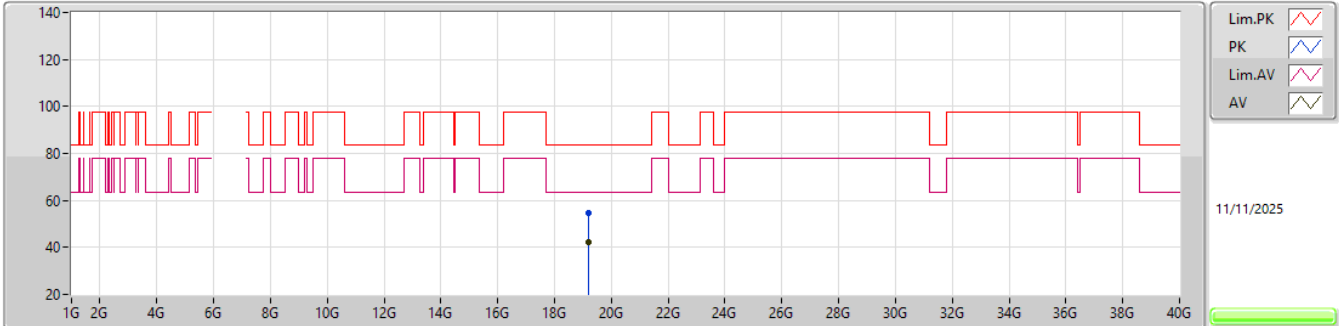


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.21632G	54.54	83.54	-29.00	44.88	1	Horizontal	302.9	1.82	-	37.70	20.76	48.80			
AV	19.21368G	42.18	63.54	-21.36	32.54	1	Horizontal	302.9	1.82	-	37.68	20.76	48.80			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

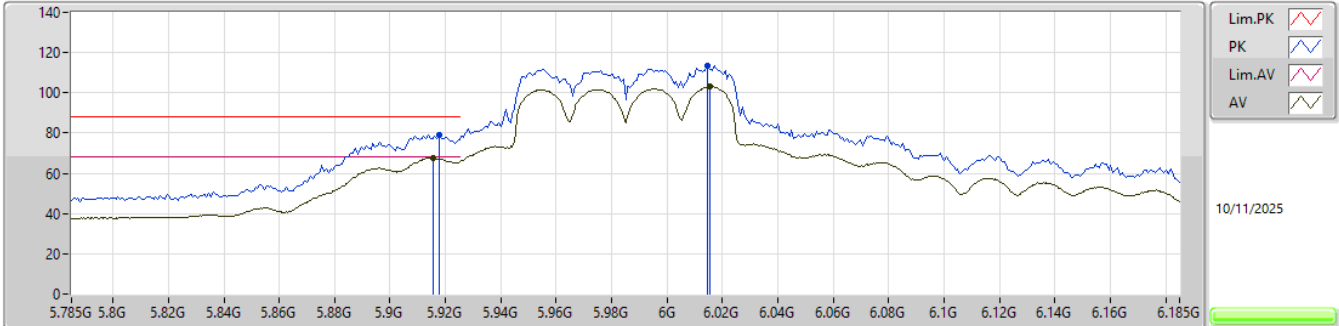


EUT_Z_2TX
Setting 21
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9178G	79.29	88.20	-8.91	85.38	3	Vertical	317	2.36	-	32.24	7.56	45.89			
RMS	5.9154G	67.76	68.20	-0.44	73.86	3	Vertical	317	2.36	-	32.23	7.56	45.89			
PK	6.0146G	113.30	Inf	-Inf	119.01	3	Vertical	317	2.36	-	32.43	7.70	45.84			
RMS	6.0154G	103.01	Inf	-Inf	108.72	3	Vertical	317	2.36	-	32.43	7.70	45.84			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

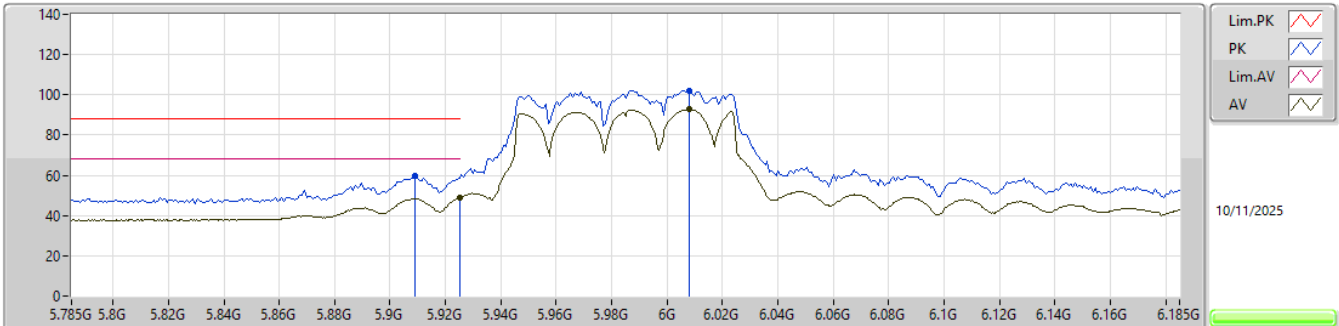


EUT_Z_2TX
Setting 21
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.909G	59.68	88.20	-28.52	65.80	3	Horizontal	158	2.37	-	32.22	7.55	45.89			
RMS	5.925G	48.97	68.20	-19.23	55.02	3	Horizontal	158	2.37	-	32.25	7.58	45.88			
PK	6.0082G	101.98	Inf	-Inf	107.70	3	Horizontal	158	2.37	-	32.42	7.70	45.84			
RMS	6.0078G	92.77	Inf	-Inf	98.49	3	Horizontal	158	2.37	-	32.42	7.70	45.84			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

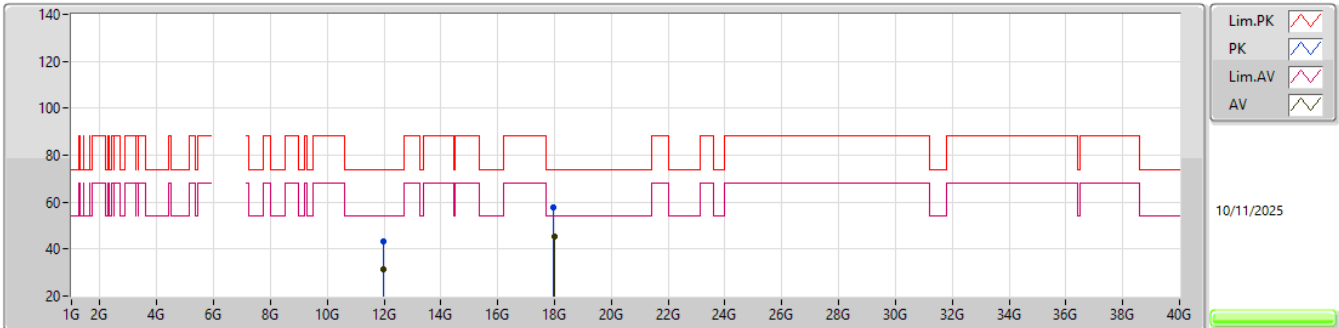


EUT_Y_2TX
Setting 21
06-U-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.97448G	43.39	74.00	-30.61	39.37	3	Vertical	353	1.28	-	38.90	11.08	45.96			
AV	11.96996G	31.16	54.00	-22.84	27.16	3	Vertical	353	1.28	-	38.88	11.08	45.96			
PK	17.9767G	57.95	74.00	-16.05	36.04	3	Vertical	67	1.80	-	52.40	14.78	45.27			
AV	17.98818G	45.24	54.00	-8.76	22.69	3	Vertical	67	1.80	-	53.04	14.78	45.27			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

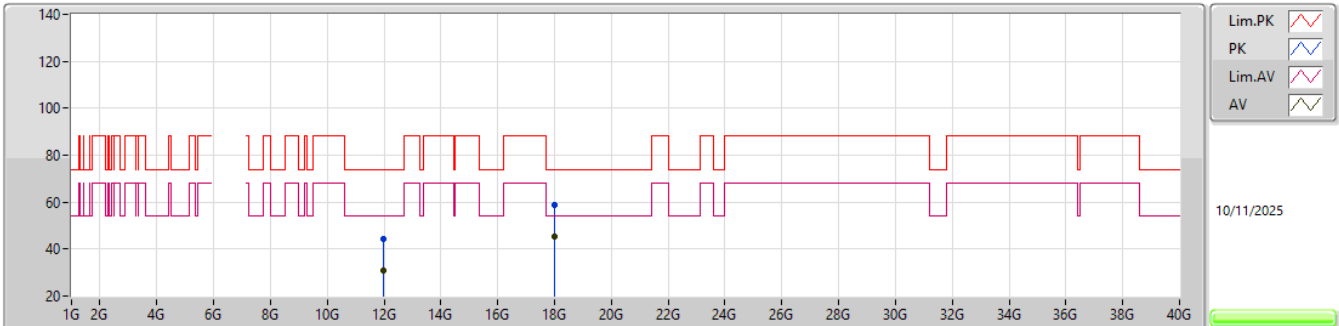


EUT_Y_2TX
Setting 21
06-U-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.97448G	44.53	74.00	-29.47	40.51	3	Horizontal	34	1.72	-	38.90	11.08	45.96			
AV	11.97G	30.72	54.00	-23.28	26.72	3	Horizontal	34	1.72	-	38.88	11.08	45.96			
PK	17.99G	58.64	74.00	-15.36	35.98	3	Horizontal	302	1.80	-	53.14	14.79	45.27			
AV	17.98972G	45.31	54.00	-8.69	22.67	3	Horizontal	302	1.80	-	53.12	14.79	45.27			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

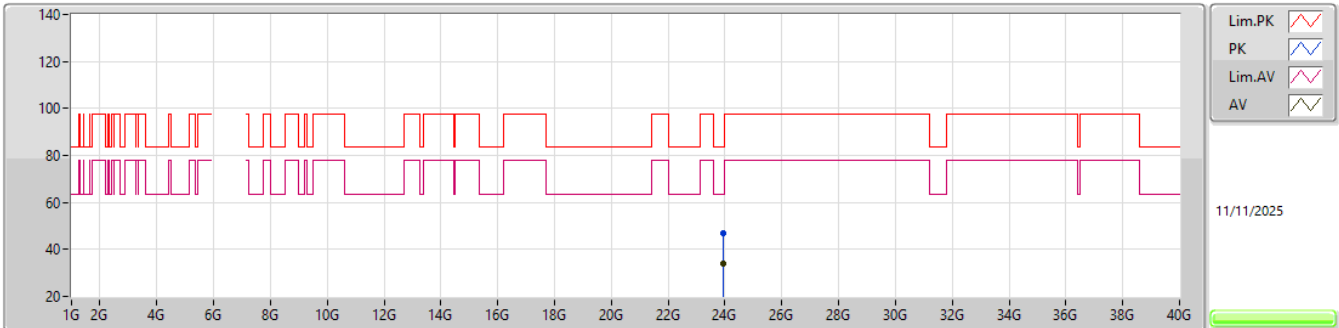


EUT_Y_2TX
Setting 21
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.92584G	46.85	83.54	-36.69	32.46	1	Vertical	131	1.96	-	38.95	23.07	47.63			
AV	23.9332G	34.14	63.54	-29.40	19.73	1	Vertical	131	1.96	-	38.97	23.07	47.63			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

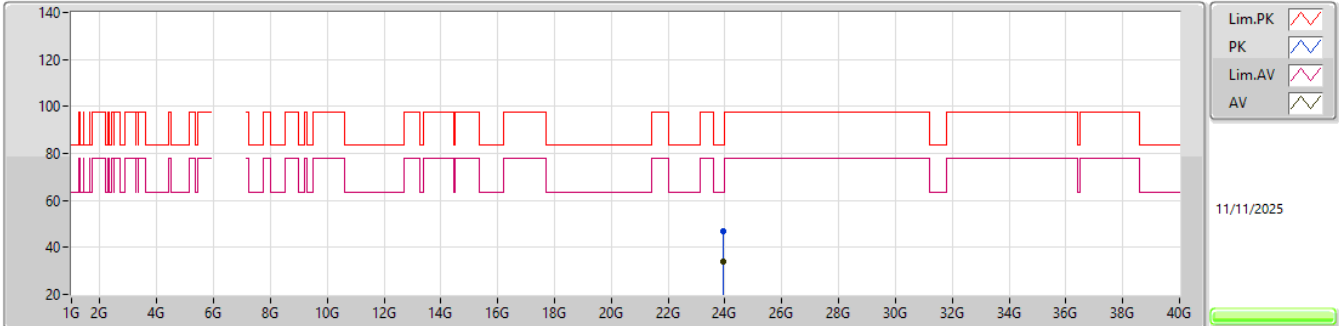


EUT_Y_2TX
Setting 21
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.92936G	47.01	83.54	-36.53	32.61	1	Horizontal	350	1.42	-	38.96	23.07	47.63			
AV	23.92752G	34.15	63.54	-29.39	19.75	1	Horizontal	350	1.42	-	38.96	23.07	47.63			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6225MHz_TX

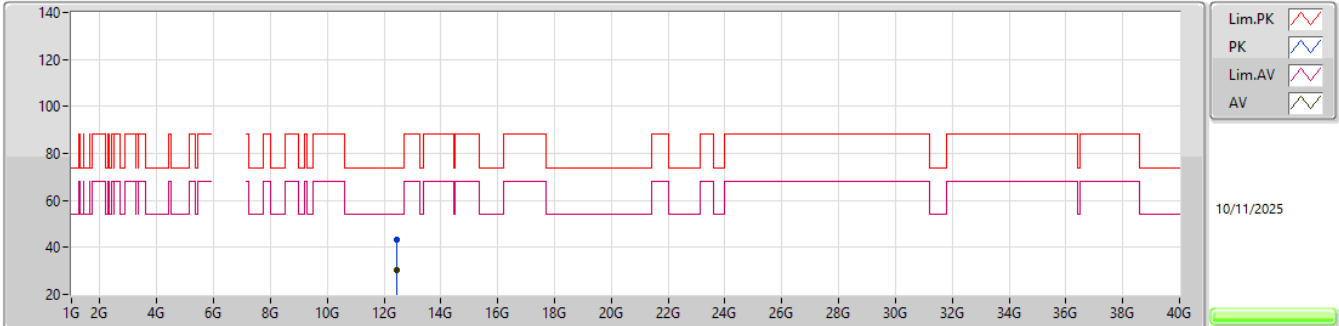


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.4546G	43.45	74.00	-30.55	38.99	3	Vertical	21	2.35	-	38.60	11.37	45.51			
AV	12.4624G	30.25	54.00	-23.75	25.77	3	Vertical	21	2.35	-	38.60	11.38	45.50			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6225MHz_TX

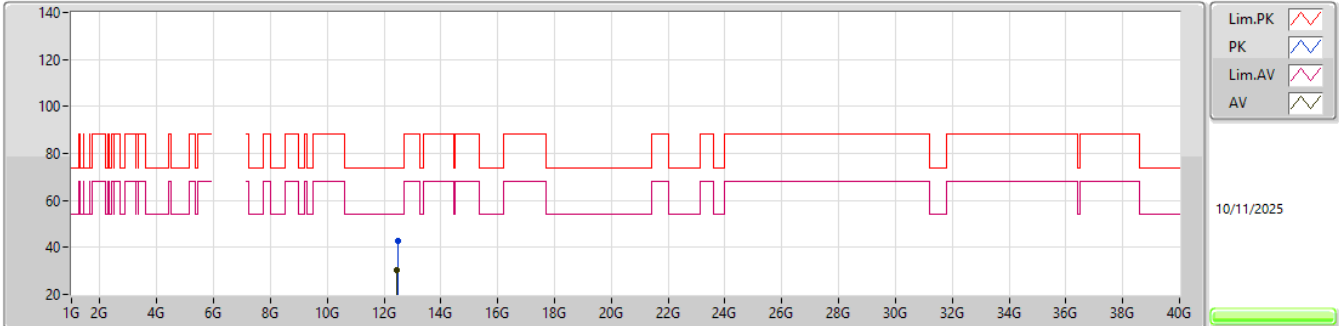


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.472G	42.93	74.00	-31.07	38.44	3	Horizontal	261	2.32	-	38.60	11.38	45.49			
AV	12.4618G	30.48	54.00	-23.52	26.00	3	Horizontal	261	2.32	-	38.60	11.38	45.50			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6225MHz_TX

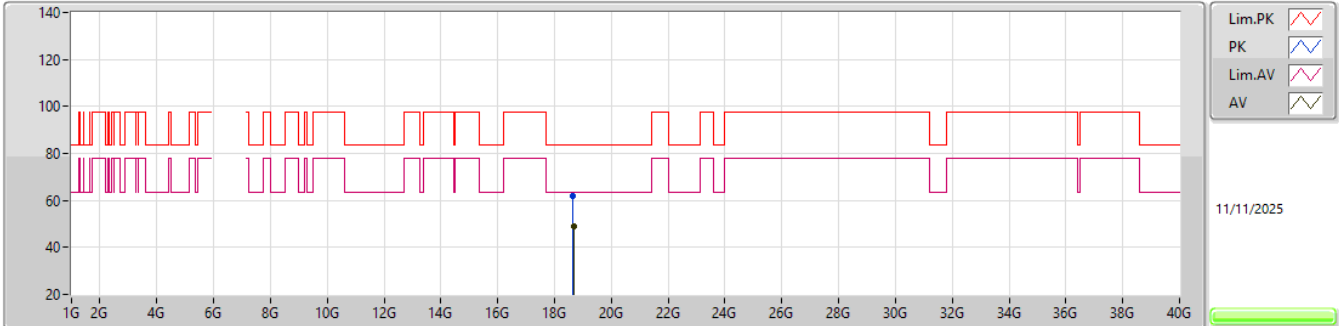


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.65532G	62.08	83.54	-21.46	52.33	1	Vertical	16	1.82	-	37.59	20.62	48.46			
AV	18.67692G	49.10	63.54	-14.44	39.41	1	Vertical	16	1.82	-	37.55	20.62	48.48			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6225MHz_TX

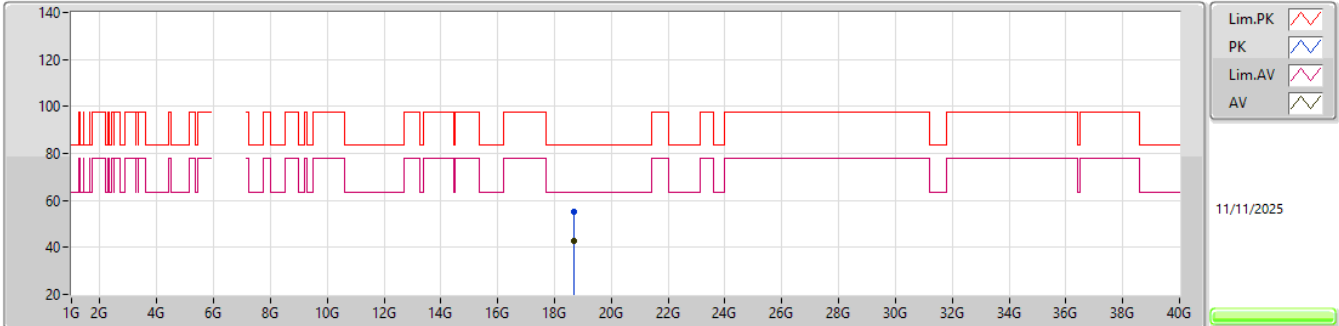


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.677G	55.34	83.54	-28.20	45.65	1	Horizontal	116	1.81	-	37.55	20.62	48.48			
AV	18.67724G	42.65	63.54	-20.89	32.96	1	Horizontal	116	1.81	-	37.55	20.62	48.48			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6385MHz_TX

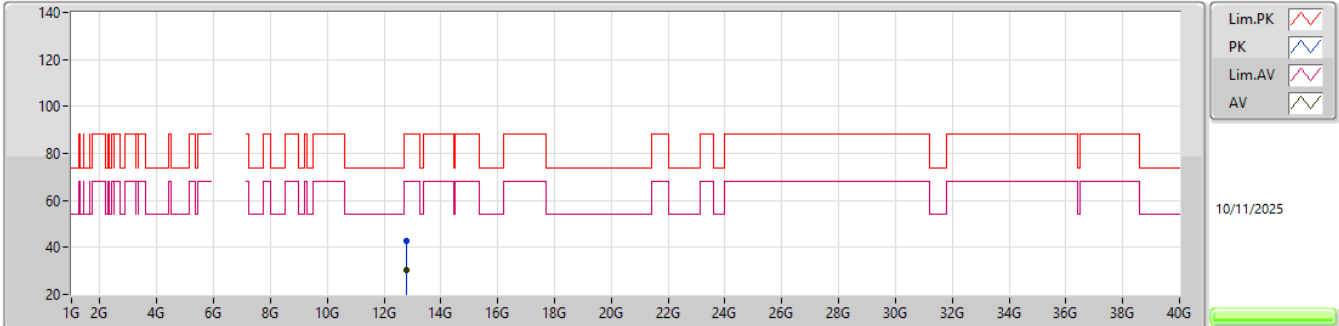


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8068G	42.99	88.20	-45.21	37.73	3	Vertical	14	2.66	-	39.41	11.59	45.74			
RMS	12.7874G	30.28	68.20	-37.92	25.10	3	Vertical	14	2.66	-	39.32	11.58	45.72			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6385MHz_TX

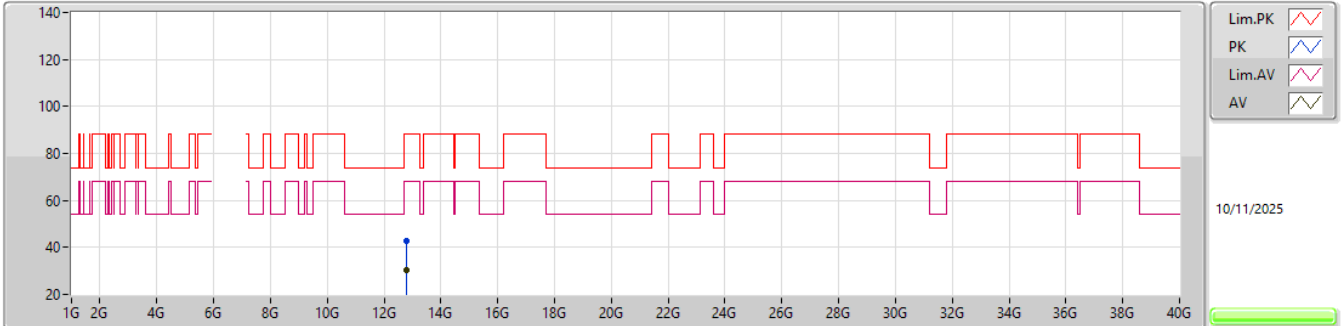


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.7812G	42.61	88.20	-45.59	37.47	3	Horizontal	212	1.09	-	39.29	11.57	45.72			
RMS	12.7832G	30.22	68.20	-37.98	25.06	3	Horizontal	212	1.09	-	39.30	11.58	45.72			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6385MHz_TX

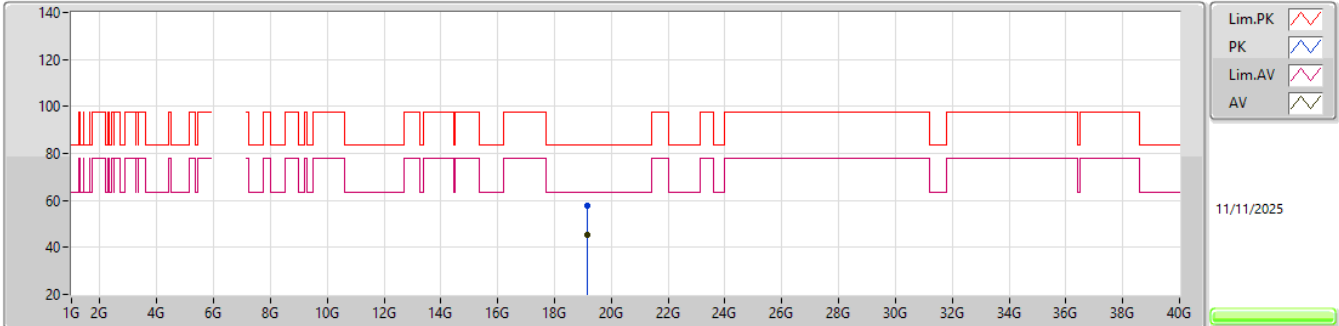


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.15572G	57.86	83.54	-25.68	48.15	1	Vertical	25	1.56	-	37.78	20.73	48.80			
AV	19.137G	45.48	63.54	-18.06	35.79	1	Vertical	25	1.56	-	37.77	20.72	48.80			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6385MHz_TX

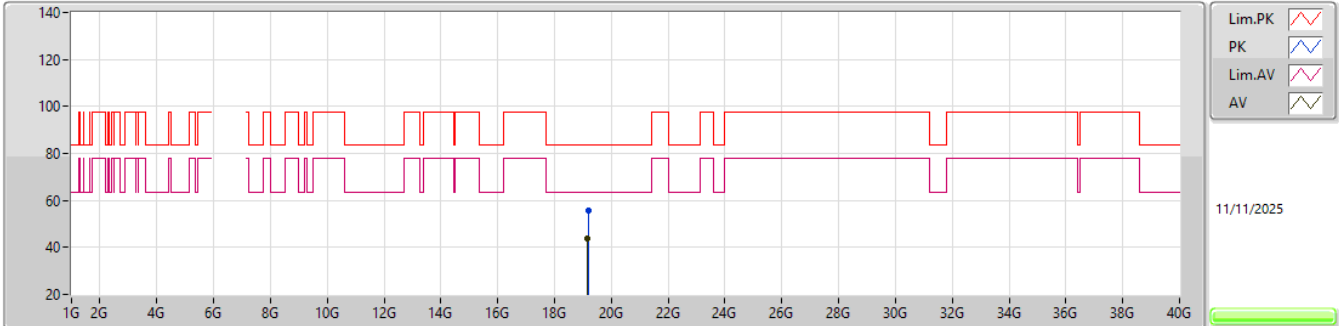


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.1796G	55.88	83.54	-27.66	46.26	1	Horizontal	304	1.70	-	37.68	20.74	48.80			
AV	19.13904G	43.71	63.54	-19.83	34.01	1	Horizontal	304	1.70	-	37.78	20.72	48.80			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_TX

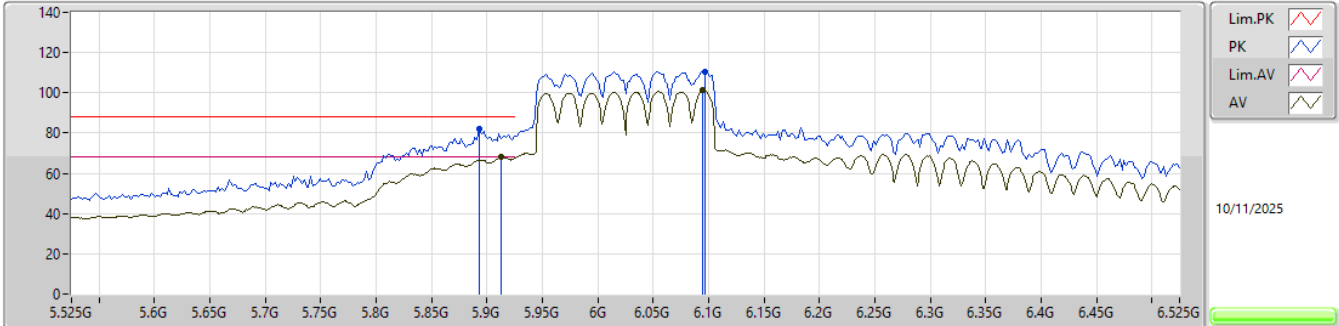


EUT_Z_2TX
Setting 22
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.893G	81.78	88.20	-6.42	87.97	3	Vertical	318	2.67	-	32.19	7.52	45.90			
RMS	5.913G	68.12	68.20	-0.08	74.23	3	Vertical	318	2.67	-	32.23	7.55	45.89			
PK	6.097G	110.45	Inf	-Inf	116.14	3	Vertical	318	2.67	-	32.50	7.65	45.84			
RMS	6.095G	101.54	Inf	-Inf	107.23	3	Vertical	318	2.67	-	32.50	7.65	45.84			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_TX

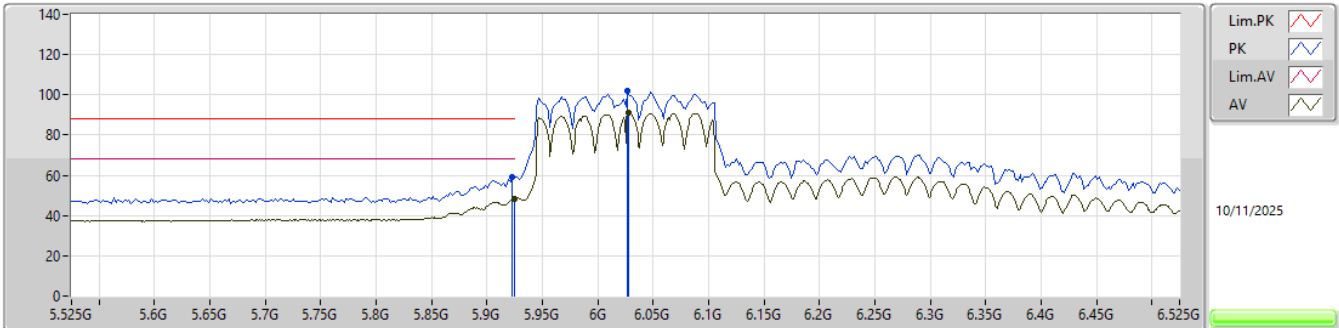


EUT_Z_2TX
Setting 22
06-U-P-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.923G	59.18	88.20	-29.02	65.24	3	Horizontal	159	2.43	-	32.25	7.57	45.88			
RMS	5.925G	48.57	68.20	-19.63	54.62	3	Horizontal	159	2.43	-	32.25	7.58	45.88			
PK	6.027G	101.92	Inf	-Inf	107.62	3	Horizontal	159	2.43	-	32.45	7.69	45.84			
RMS	6.028G	91.00	Inf	-Inf	96.69	3	Horizontal	159	2.43	-	32.46	7.69	45.84			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_TX

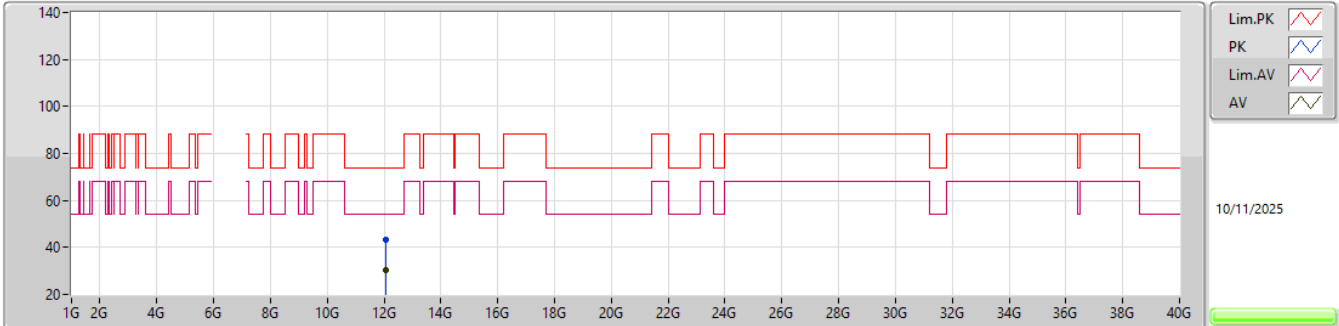


EUT_Y_2TX
Setting 22
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.0646G	43.45	74.00	-30.55	39.06	3	Vertical	317	1.80	-	39.16	11.13	45.90			
AV	12.0756G	30.18	54.00	-23.82	25.73	3	Vertical	317	1.80	-	39.20	11.14	45.89			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_TX

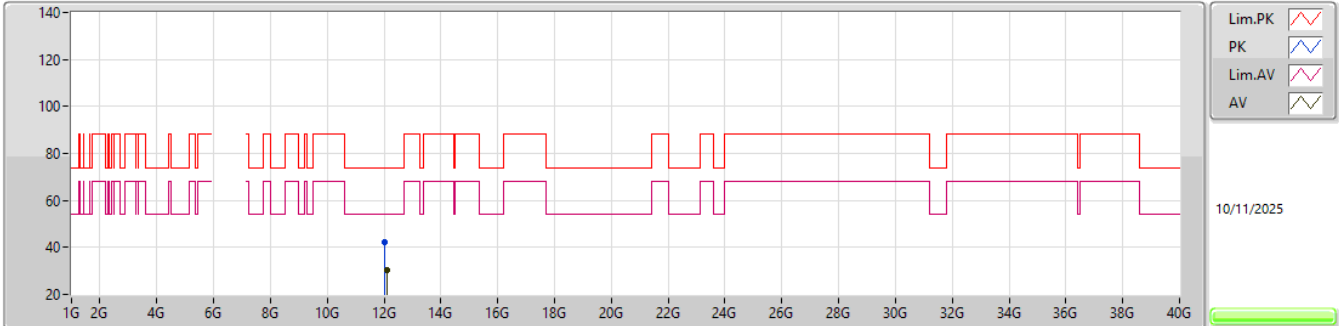


EUT_Y_2TX
Setting 22
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.0044G	42.45	74.00	-31.55	38.32	3	Horizontal	124	2.40	-	39.01	11.09	45.97			
AV	12.0884G	30.19	54.00	-23.81	25.68	3	Horizontal	124	2.40	-	39.25	11.14	45.88			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_TX

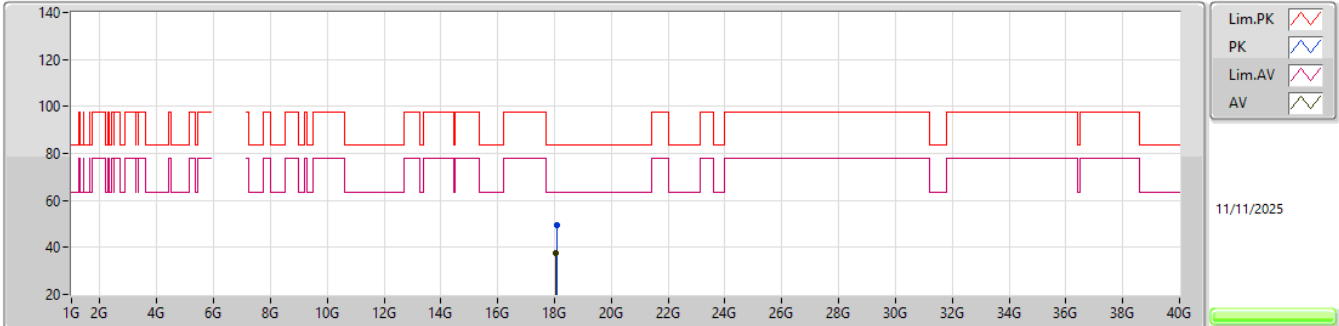


EUT_Y_2TX
Setting 22
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.07644G	49.59	83.54	-33.95	40.24	1	Vertical	196	2.99	-	37.25	20.32	48.22			
AV	18.06072G	37.42	63.54	-26.12	28.10	1	Vertical	196	2.99	-	37.22	20.31	48.21			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_TX

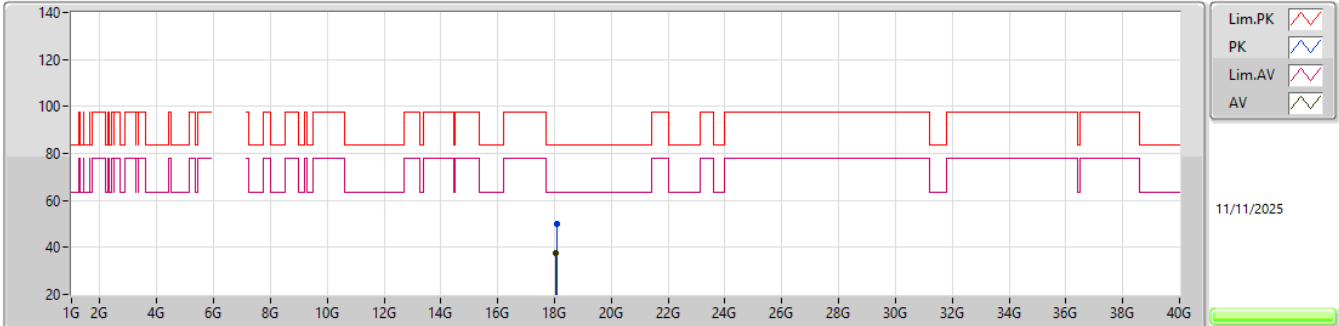


EUT_Y_2TX
Setting 22
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.0666G	50.07	83.54	-33.47	40.74	1	Horizontal	218	3.00	-	37.23	20.31	48.21			
AV	18.06024G	37.33	63.54	-26.21	28.01	1	Horizontal	218	3.00	-	37.22	20.31	48.21			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6185MHz_TX

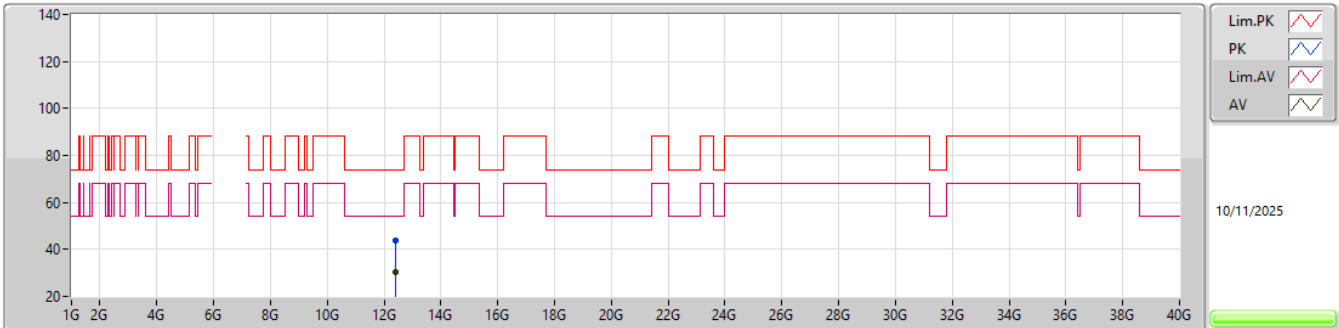


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.419G	43.85	74.00	-30.15	39.38	3	Vertical	190	1.09	-	38.66	11.35	45.54			
AV	12.406G	30.13	54.00	-23.87	25.66	3	Vertical	190	1.09	-	38.69	11.34	45.56			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6185MHz_TX

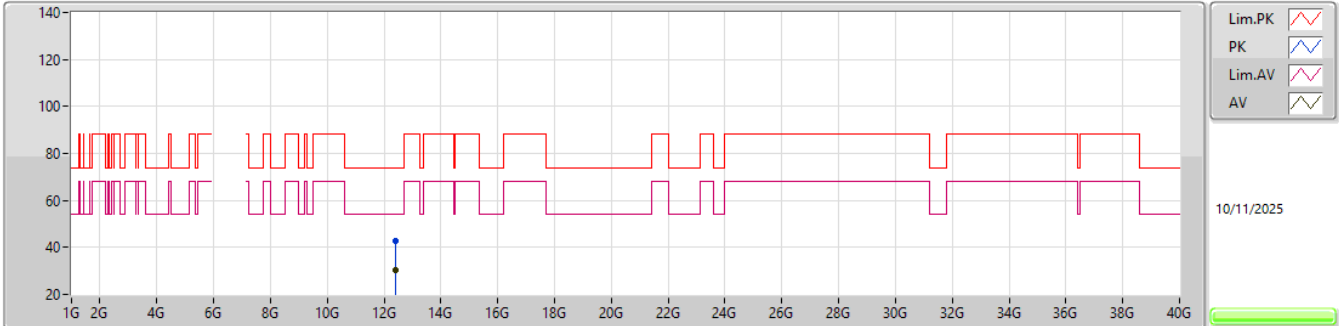


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.4082G	42.92	74.00	-31.08	38.45	3	Horizontal	148	1.23	-	38.68	11.34	45.55			
AV	12.4058G	30.20	54.00	-23.80	25.73	3	Horizontal	148	1.23	-	38.69	11.34	45.56			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6185MHz_TX

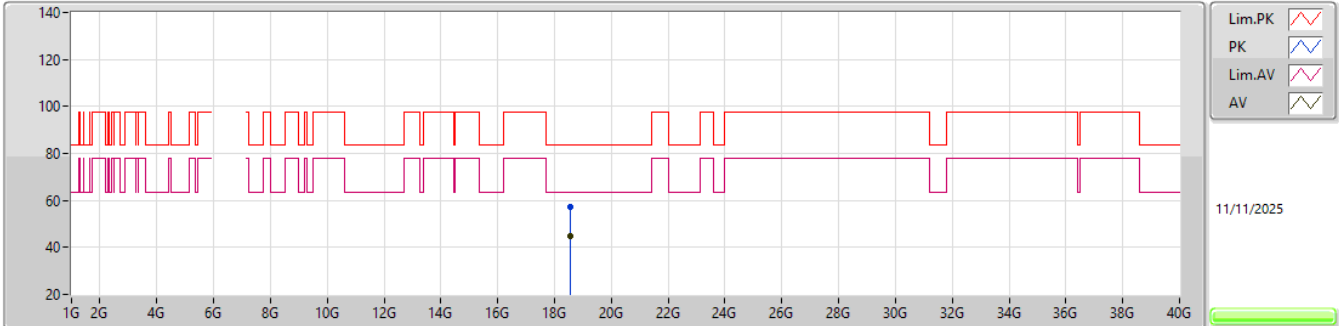


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.5748G	57.31	83.54	-26.23	47.47	1	Vertical	14	2.13	-	37.60	20.61	48.37			
AV	18.57216G	45.01	63.54	-18.53	35.18	1	Vertical	14	2.13	-	37.59	20.61	48.37			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6185MHz_TX

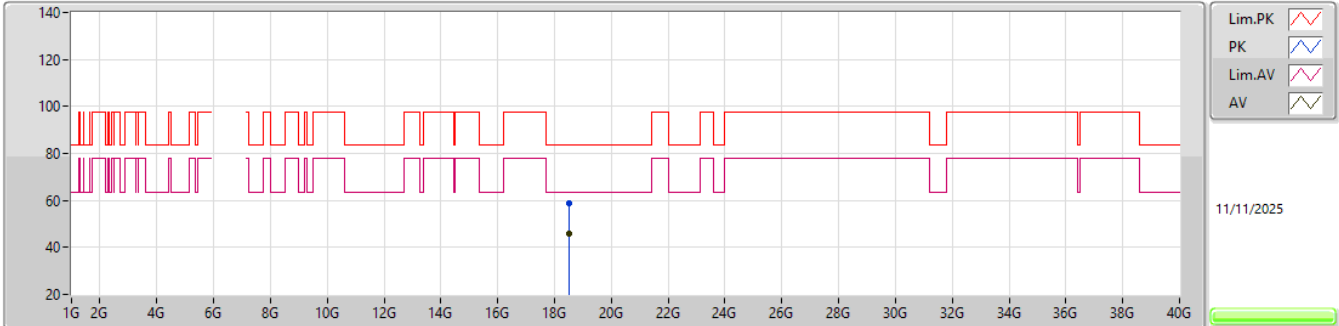


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.53412G	58.56	83.54	-24.98	48.76	1	Horizontal	305	1.85	-	37.53	20.60	48.33			
AV	18.534G	46.08	63.54	-17.46	36.28	1	Horizontal	305	1.85	-	37.53	20.60	48.33			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6345MHz_TX

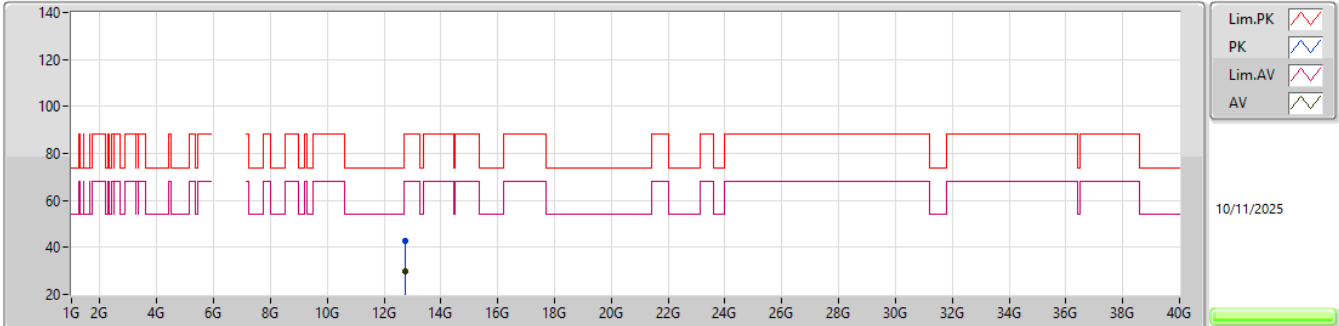


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.7396G	42.99	88.20	-45.21	38.02	3	Vertical	197	2.14	-	39.10	11.55	45.68			
RMS	12.7362G	30.00	68.20	-38.20	25.03	3	Vertical	197	2.14	-	39.10	11.55	45.68			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6345MHz_TX

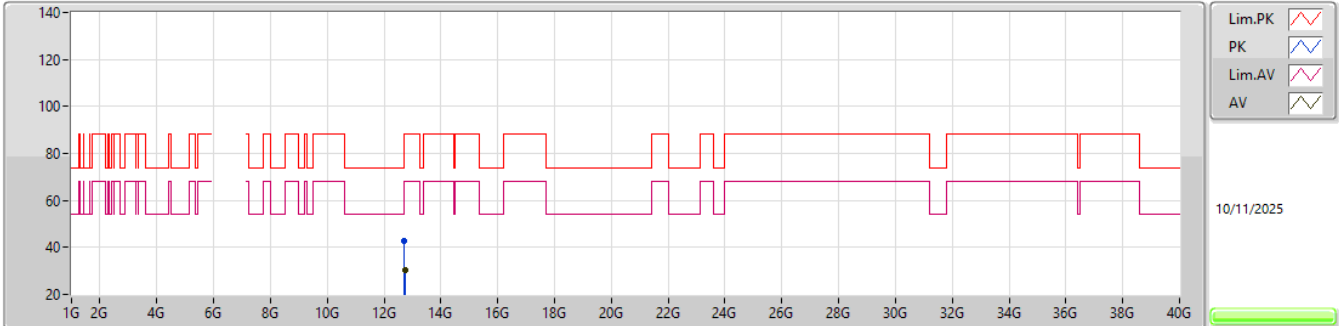


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.7164G	42.58	88.20	-45.62	37.61	3	Horizontal	257	2.71	-	39.10	11.53	45.66			
RMS	12.739G	30.11	68.20	-38.09	25.14	3	Horizontal	257	2.71	-	39.10	11.55	45.68			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6345MHz_TX

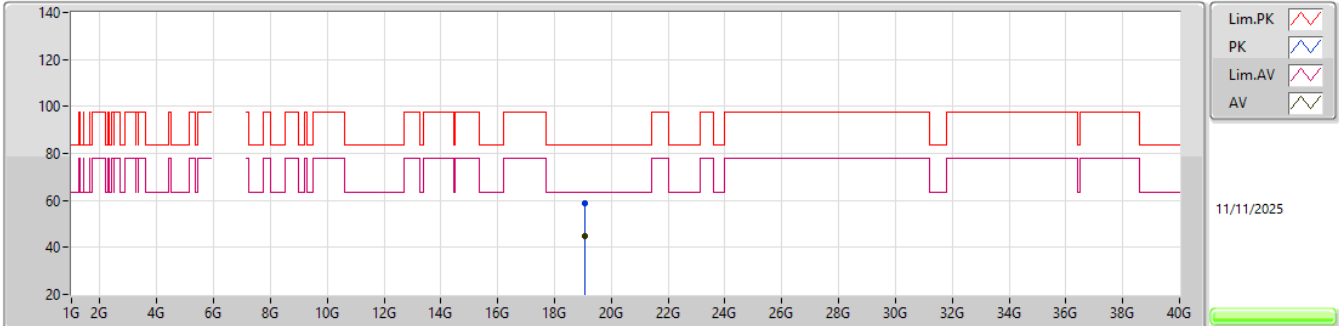


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.05504G	58.54	83.54	-25.00	48.87	1	Vertical	312	1.55	-	37.79	20.68	48.80			
AV	19.05384G	44.94	63.54	-18.60	35.27	1	Vertical	312	1.55	-	37.79	20.68	48.80			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6345MHz_TX

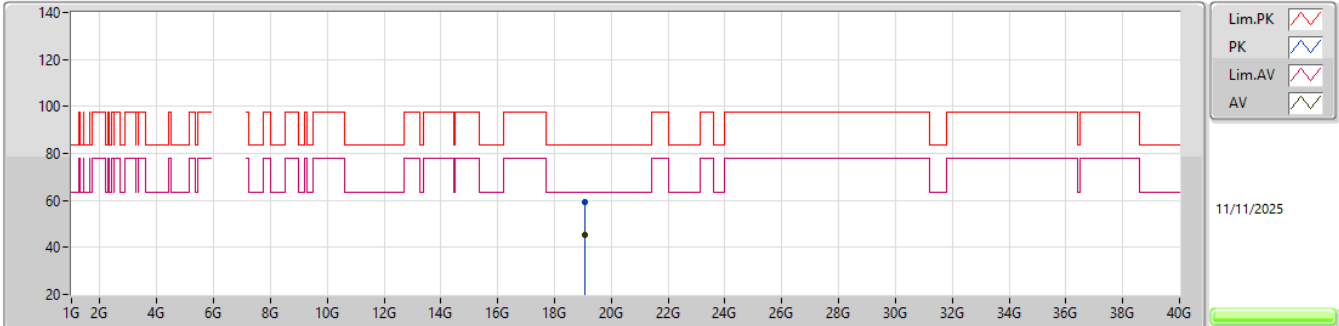


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.0542G	59.37	83.54	-24.17	49.70	1	Horizontal	277	1.70	-	37.79	20.68	48.80			
AV	19.053G	45.59	63.54	-17.95	35.92	1	Horizontal	277	1.70	-	37.79	20.68	48.80			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6105MHz_TX

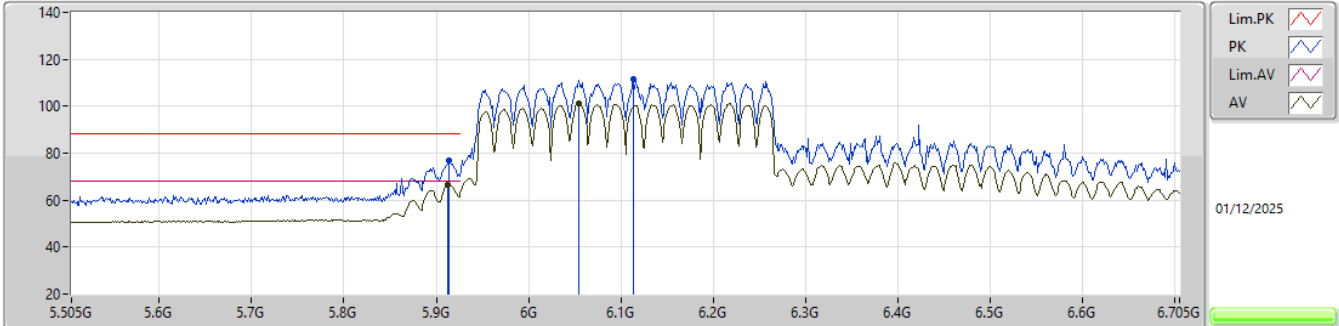


EUT_Z_2TX
Setting 22.5
02-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9142G	76.67	88.20	-11.53	64.54	3	Vertical	318	2.76	-	34.13	8.16	30.16			
RMS	5.913G	66.70	68.20	-1.50	54.57	3	Vertical	318	2.76	-	34.13	8.16	30.16			
PK	6.1134G	111.53	Inf	-Inf	99.12	3	Vertical	318	2.76	-	34.53	8.06	30.18			
RMS	6.0546G	101.19	Inf	-Inf	88.84	3	Vertical	318	2.76	-	34.41	8.09	30.15			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6105MHz_TX

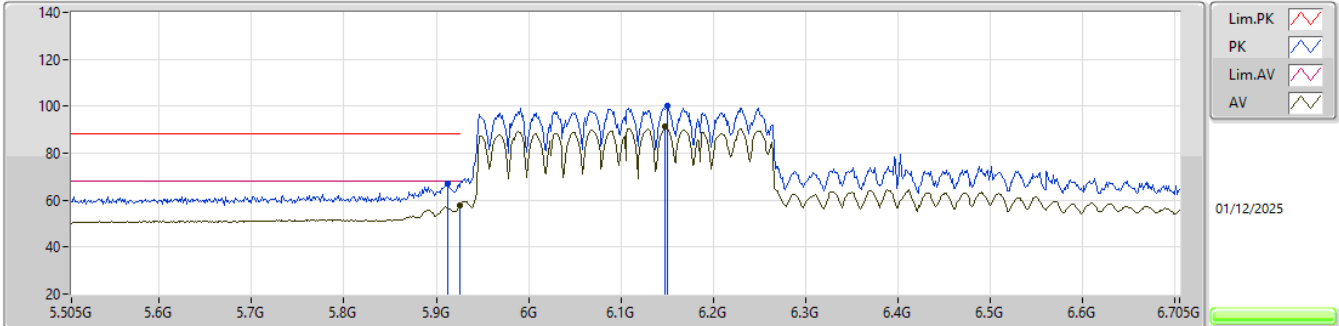


EUT_Z_2TX
Setting 22.5
02-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9118G	67.29	88.20	-20.91	55.17	3	Horizontal	163	2.30	-	34.12	8.16	30.16			
RMS	5.925G	57.52	68.20	-10.68	45.38	3	Horizontal	163	2.30	-	34.15	8.15	30.16			
PK	6.1506G	100.29	Inf	-Inf	87.84	3	Horizontal	163	2.30	-	34.60	8.04	30.19			
RMS	6.1482G	91.16	Inf	-Inf	78.71	3	Horizontal	163	2.30	-	34.60	8.04	30.19			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6105MHz_TX

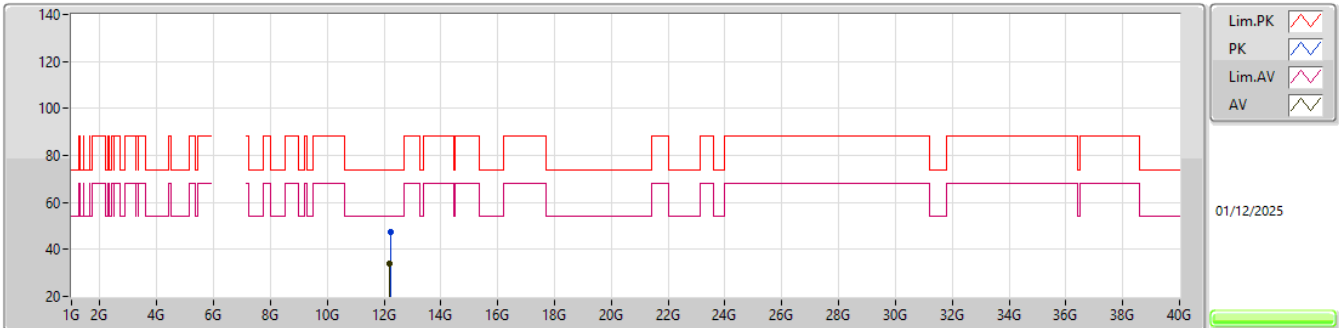


EUT_Y_2TX
Setting 22.5
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.23094G	47.28	74.00	-26.72	41.44	3	Vertical	0	1.80	-	38.74	12.83	45.73			
AV	12.20994G	34.00	54.00	-20.00	28.16	3	Vertical	0	1.80	-	38.78	12.82	45.76			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6105MHz_TX

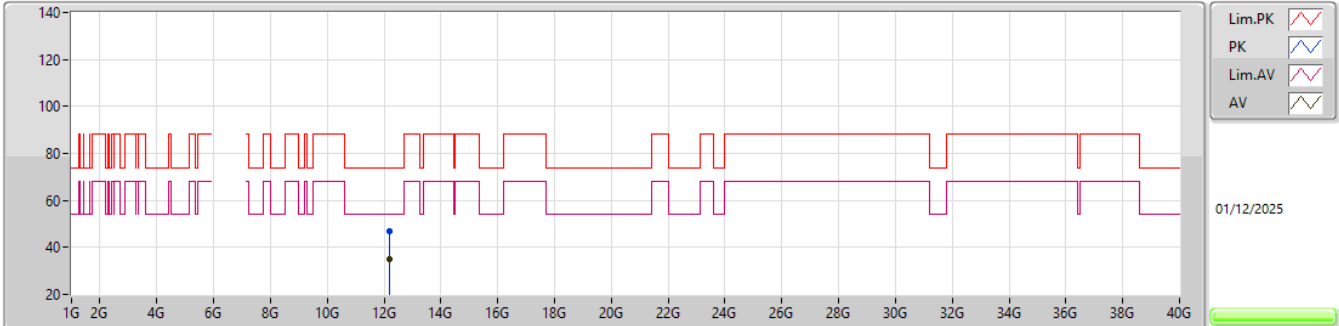


EUT_Y_2TX
Setting 22.5
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.20772G	46.85	74.00	-27.15	41.01	3	Horizontal	343	1.69	-	38.78	12.82	45.76			
AV	12.21012G	34.82	54.00	-19.18	28.98	3	Horizontal	343	1.69	-	38.78	12.82	45.76			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6105MHz_TX

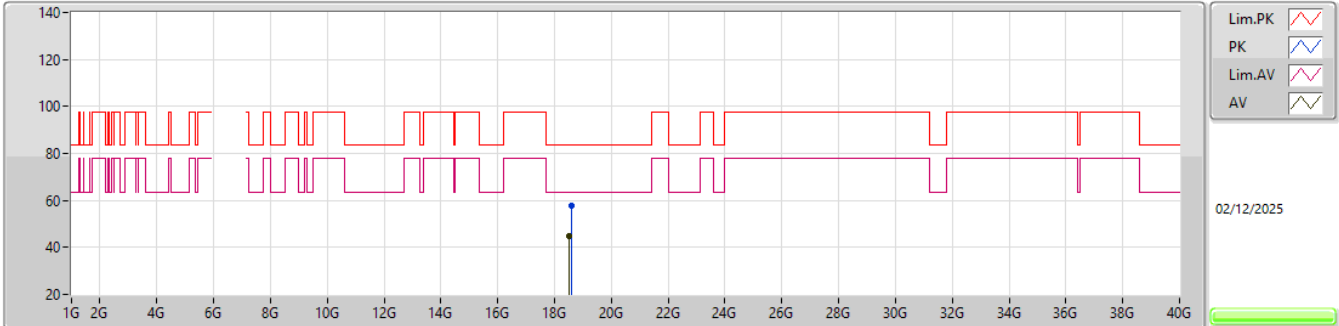


EUT_Y_2TX
Setting 22.5
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.6132G	57.54	83.54	-26.00	52.88	1	Vertical	39	1.51	-	37.70	16.59	49.63			
AV	18.5004G	44.65	63.54	-18.89	40.13	1	Vertical	39	1.51	-	37.70	16.54	49.72			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6105MHz_TX

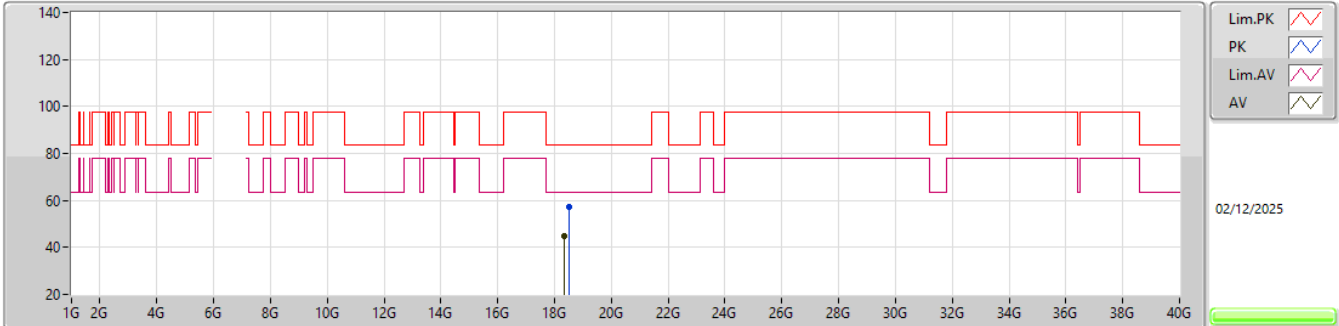


EUT_Y_2TX
Setting 22.5
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.531G	57.34	83.54	-26.20	52.84	1	Horizontal	140	2.11	-	37.64	16.55	49.69			
AV	18.3624G	44.62	63.54	-18.92	40.30	1	Horizontal	140	2.11	-	37.52	16.46	49.66			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

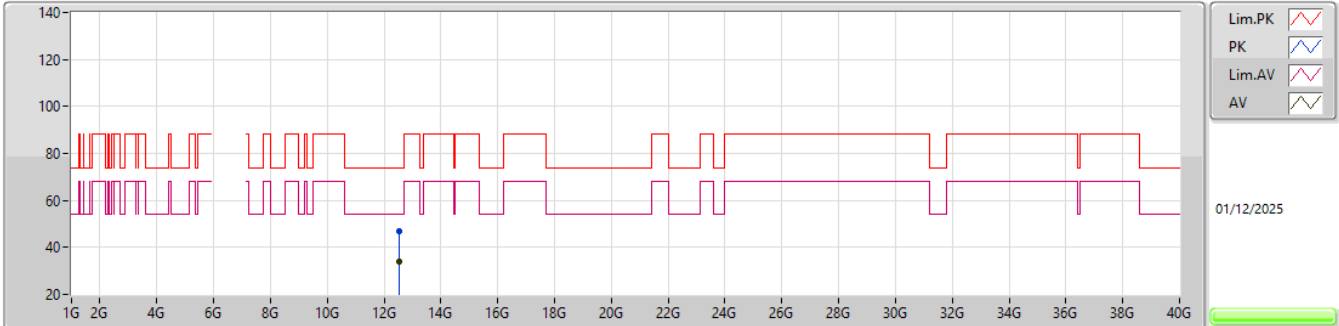


EUT_Y_2TX
Setting 27
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.54512G	47.02	74.00	-26.98	41.04	3	Vertical	34	1.80	-	38.61	12.87	45.50			
AV	12.52502G	33.78	54.00	-20.22	27.74	3	Vertical	34	1.80	-	38.65	12.87	45.48			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

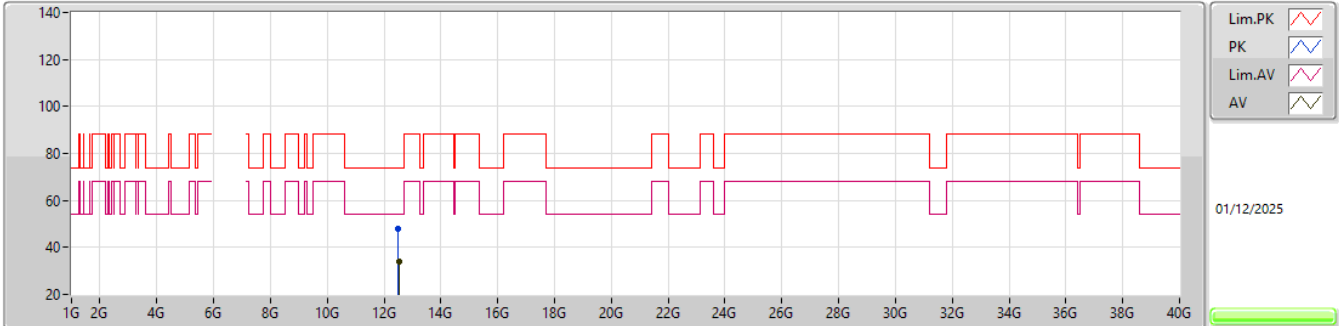


EUT_Y_2TX
Setting 27
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.5021G	47.71	74.00	-26.29	41.60	3	Horizontal	288	1.80	-	38.70	12.87	45.46			
AV	12.52358G	33.90	54.00	-20.10	27.86	3	Horizontal	288	1.80	-	38.65	12.87	45.48			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

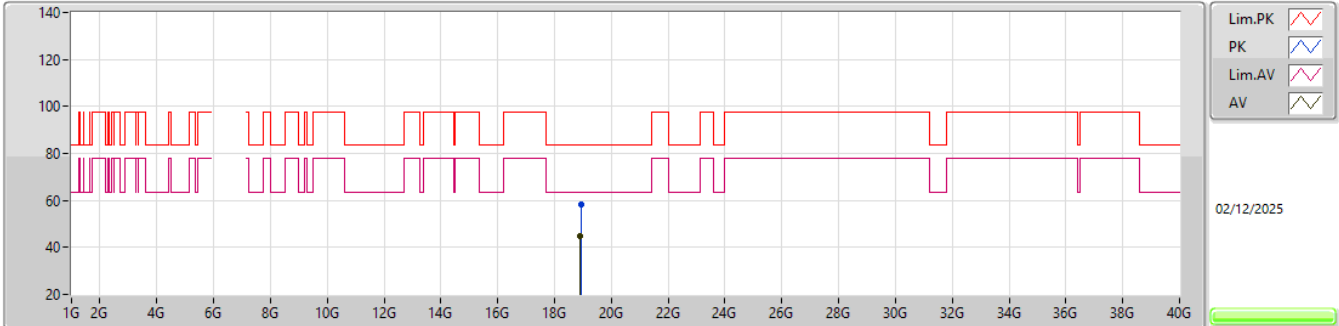


EUT_Y_2TX
Setting 27
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.9612G	58.17	83.54	-25.37	52.94	1	Vertical	36	2.78	-	37.80	16.77	49.34			
AV	18.9012G	45.01	63.54	-18.53	39.76	1	Vertical	36	2.78	-	37.90	16.74	49.39			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

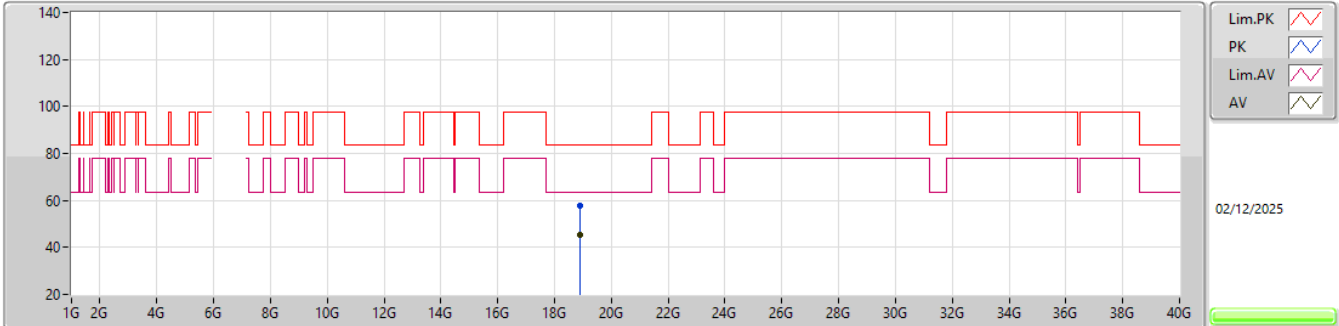


EUT_Y_2TX
Setting 27
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.909G	58.01	83.54	-25.53	52.77	1	Horizontal	200	2.09	-	37.88	16.74	49.38			
AV	18.9012G	45.11	63.54	-18.43	39.86	1	Horizontal	200	2.09	-	37.90	16.74	49.39			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6425MHz Straddle 5.925-6.425GHz_TX

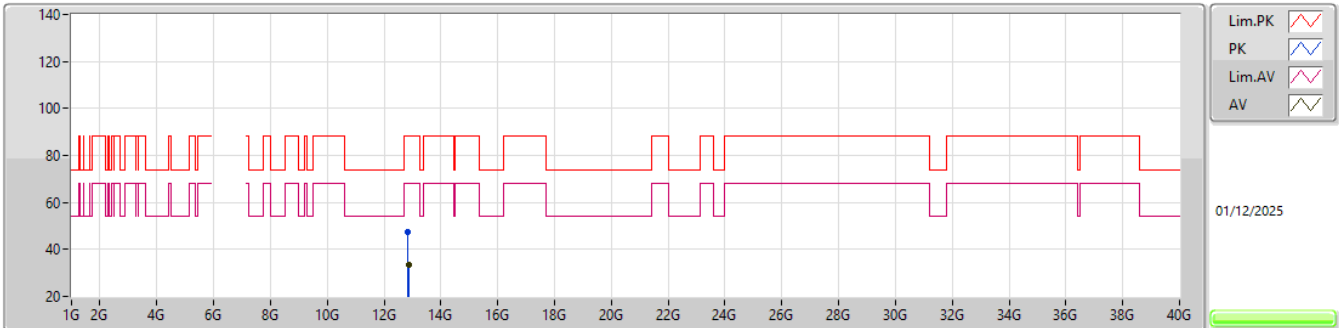


EUT_Y_2TX
Setting 27
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.84892G	47.33	88.20	-40.87	41.09	3	Vertical	131	1.01	-	39.10	12.92	45.78			
RMS	12.87526G	33.70	68.20	-34.50	27.43	3	Vertical	131	1.01	-	39.15	12.93	45.81			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6425MHz Straddle 5.925-6.425GHz_TX

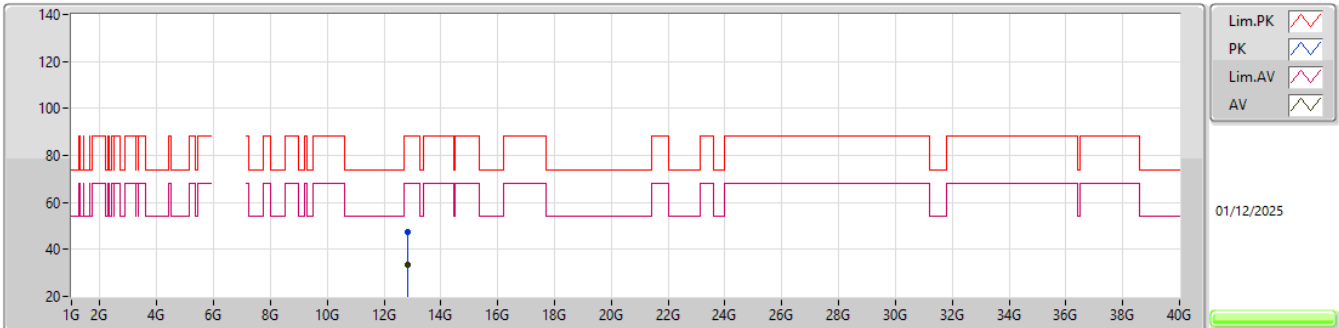


EUT_Y_2TX
Setting 27
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.83908G	47.18	88.20	-41.02	40.97	3	Horizontal	113	2.59	-	39.06	12.92	45.77			
RMS	12.85042G	33.66	68.20	-34.54	27.42	3	Horizontal	113	2.59	-	39.10	12.92	45.78			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6425MHz Straddle 5.925-6.425GHz_TX

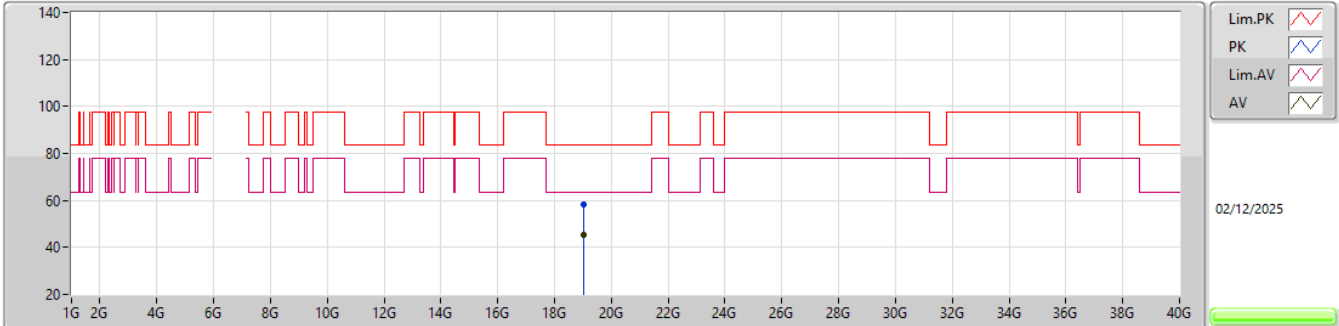


EUT_Y_2TX
Setting 27
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.0344G	58.13	83.54	-25.41	52.78	1	Vertical	302	1.96	-	37.87	16.81	49.33			
AV	19.0164G	45.17	63.54	-18.37	39.86	1	Vertical	302	1.96	-	37.83	16.80	49.32			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6425MHz Straddle 5.925-6.425GHz_TX

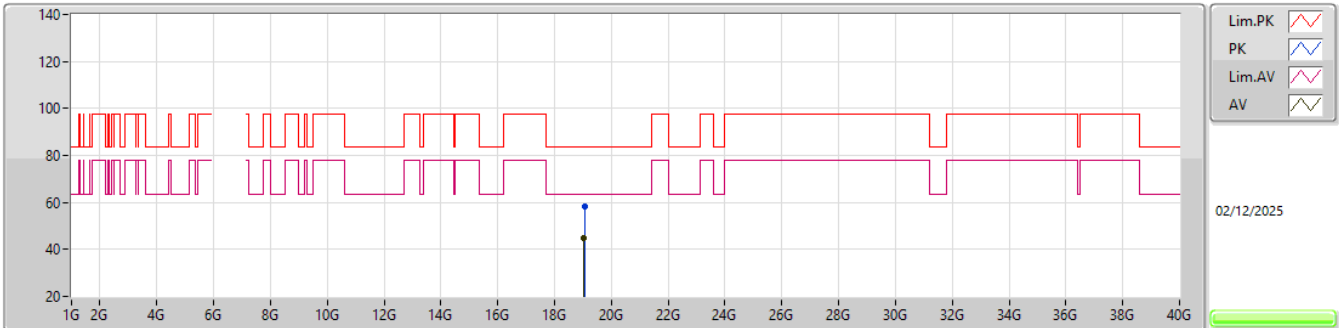


EUT_Y_2TX
Setting 27
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.0698G	58.38	83.54	-25.16	53.08	1	Horizontal	215	2.32	-	37.82	16.83	49.35			
AV	19.011G	45.03	63.54	-18.51	39.73	1	Horizontal	215	2.32	-	37.82	16.80	49.32			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6435MHz_TX

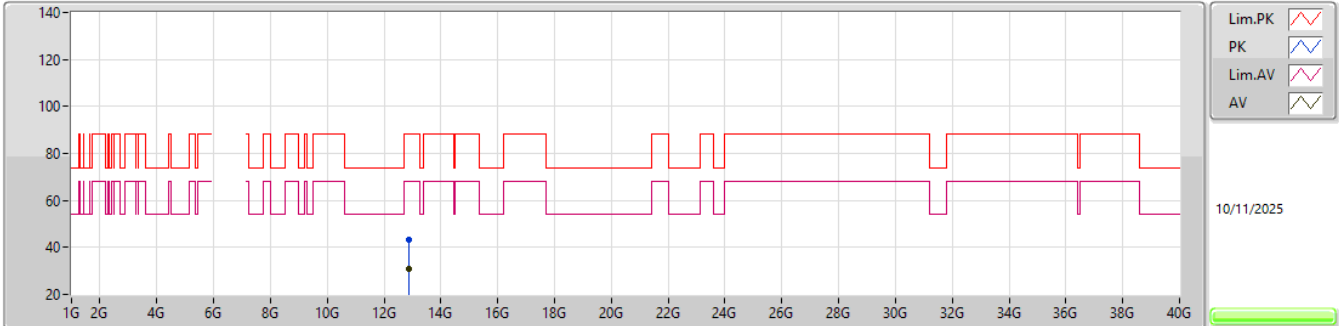


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8618G	43.52	88.20	-44.68	38.21	3	Vertical	116	2.23	-	39.48	11.62	45.79			
RMS	12.8663G	30.69	68.20	-37.51	25.39	3	Vertical	116	2.23	-	39.47	11.63	45.80			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6435MHz_TX

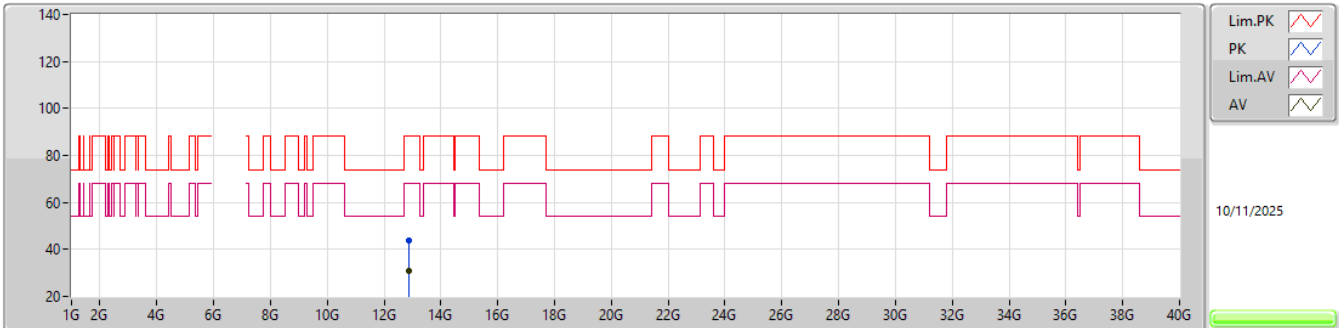


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8598G	44.03	88.20	-44.17	38.72	3	Horizontal	305	2.99	-	39.48	11.62	45.79			
RMS	12.8762G	30.79	68.20	-37.41	25.52	3	Horizontal	305	2.99	-	39.45	11.63	45.81			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6435MHz_TX

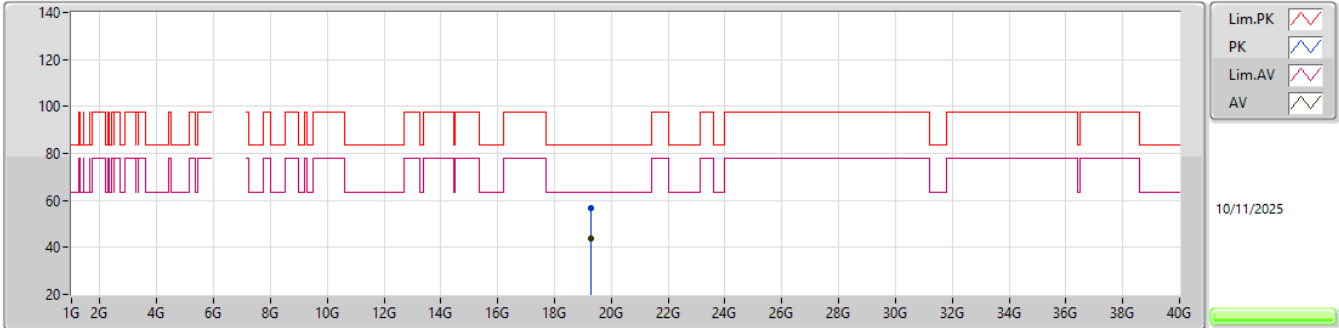


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.296G	56.77	83.54	-26.77	47.15	1	Vertical	24	1.80	-	37.62	20.80	48.80			
AV	19.29654G	43.94	63.54	-19.60	34.32	1	Vertical	24	1.80	-	37.62	20.80	48.80			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6435MHz_TX

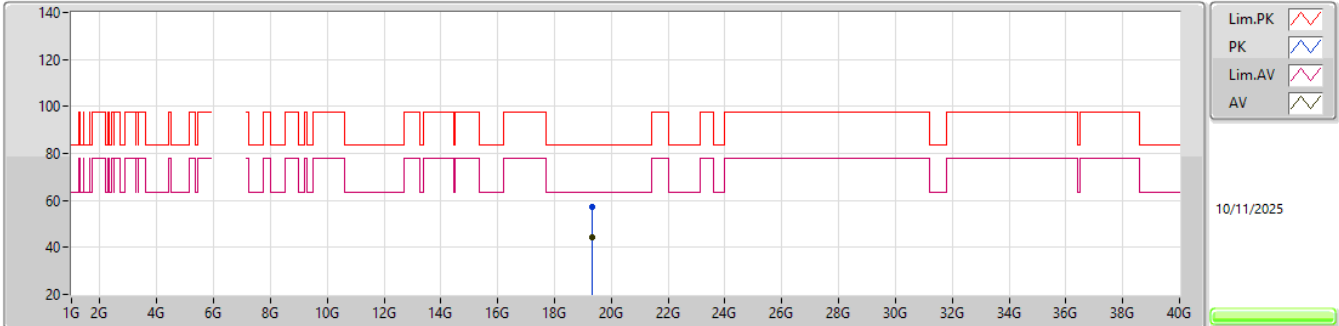


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.31112G	57.38	83.54	-26.16	47.75	1	Horizontal	308	1.98	-	37.62	20.81	48.80			
AV	19.31166G	44.36	63.54	-19.18	34.73	1	Horizontal	308	1.98	-	37.62	20.81	48.80			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6475MHz_TX

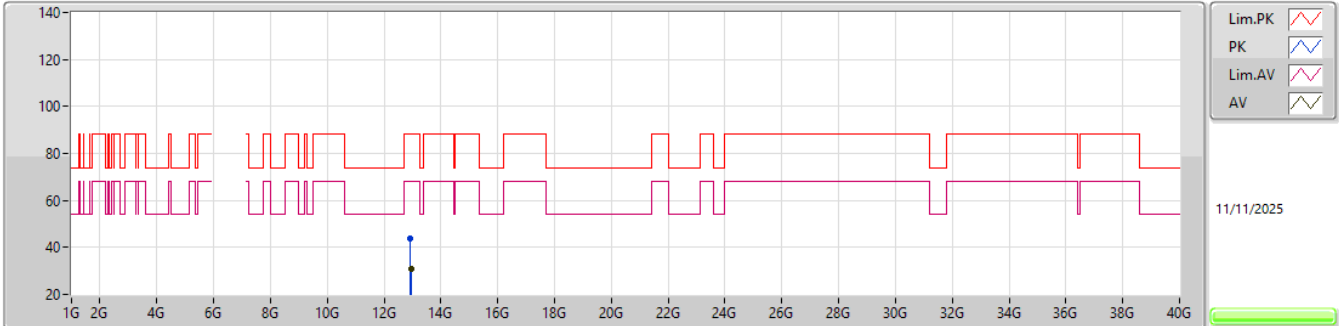


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9295G	43.57	88.20	-44.63	38.30	3	Vertical	42	2.35	-	39.46	11.67	45.86			
RMS	12.962G	30.83	68.20	-37.37	25.53	3	Vertical	42	2.35	-	39.50	11.69	45.89			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6475MHz_TX

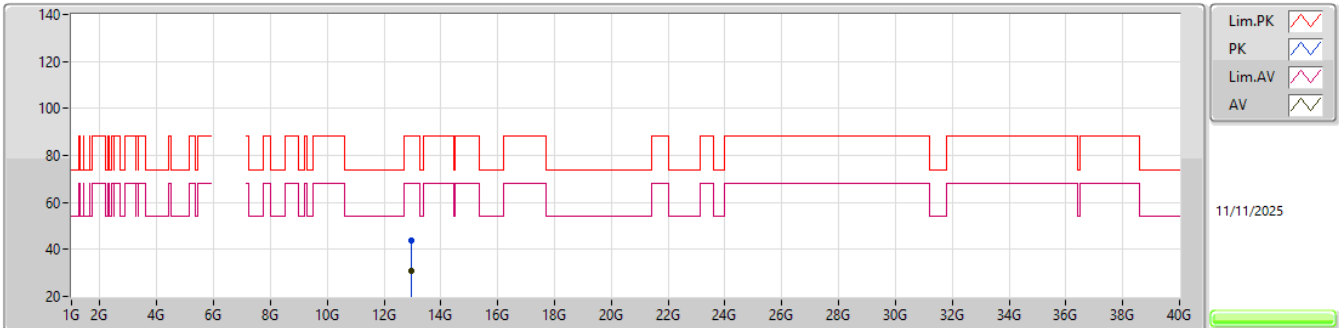


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9635G	43.65	88.20	-44.55	38.35	3	Horizontal	337	2.64	-	39.50	11.69	45.89			
RMS	12.9593G	30.92	68.20	-37.28	25.62	3	Horizontal	337	2.64	-	39.50	11.68	45.88			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6475MHz_TX

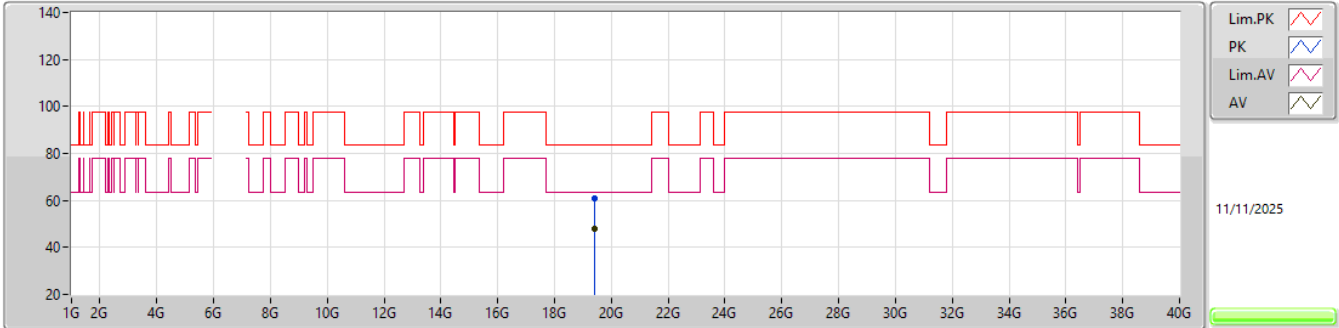


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.42644G	60.87	83.54	-22.67	51.15	1	Vertical	328	1.80	-	37.65	20.87	48.80			
AV	19.42644G	47.93	63.54	-15.61	38.21	1	Vertical	328	1.80	-	37.65	20.87	48.80			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6475MHz_TX

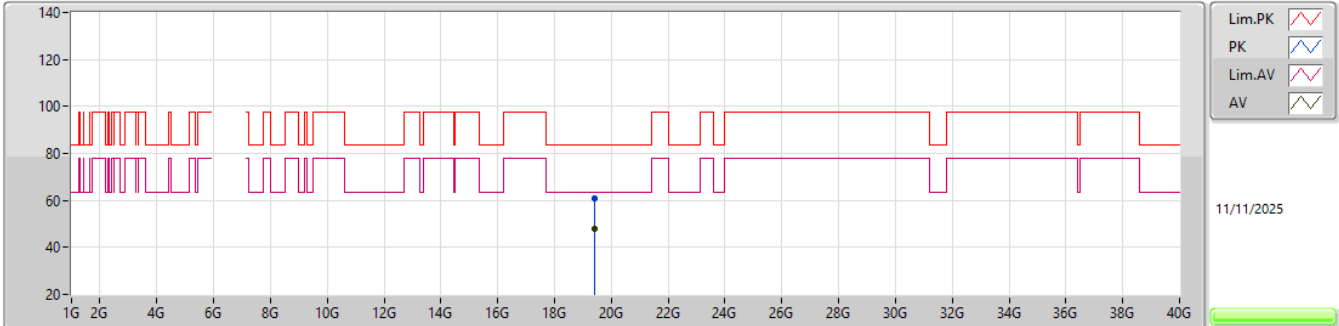


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.42392G	60.98	83.54	-22.56	51.26	1	Horizontal	300	1.69	-	37.65	20.87	48.80			
AV	19.42464G	48.14	63.54	-15.40	38.42	1	Horizontal	300	1.69	-	37.65	20.87	48.80			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6515MHz_TX

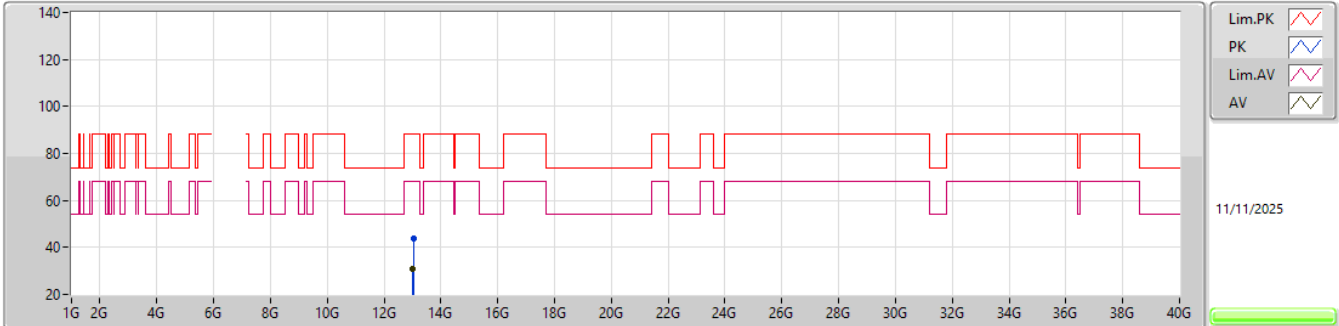


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.034G	43.84	88.20	-44.36	38.61	3	Vertical	67	2.29	-	39.36	11.73	45.86			
RMS	13.0077G	30.66	68.20	-37.54	25.39	3	Vertical	67	2.29	-	39.47	11.71	45.91			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6515MHz_TX

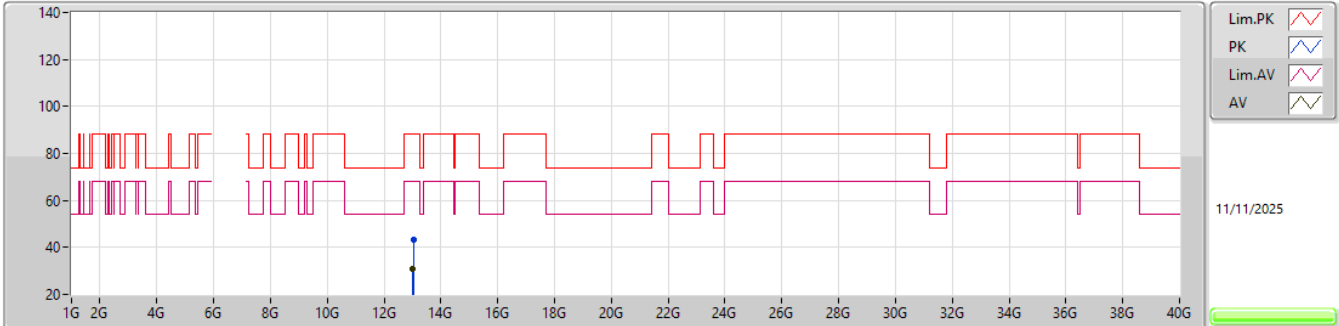


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0526G	43.35	88.20	-44.85	38.13	3	Horizontal	321	2.66	-	39.30	11.74	45.82			
RMS	13.0062G	30.65	68.20	-37.55	25.37	3	Horizontal	321	2.66	-	39.48	11.71	45.91			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6515MHz_TX

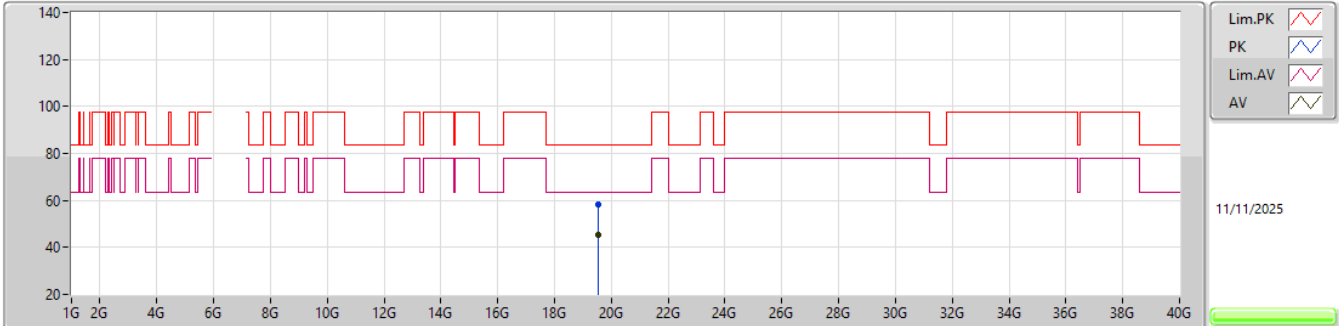


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.54986G	58.37	83.54	-25.17	48.70	1	Vertical	47	1.80	-	37.60	20.87	48.80			
AV	19.54824G	45.54	63.54	-18.00	35.86	1	Vertical	47	1.80	-	37.60	20.88	48.80			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6515MHz_TX

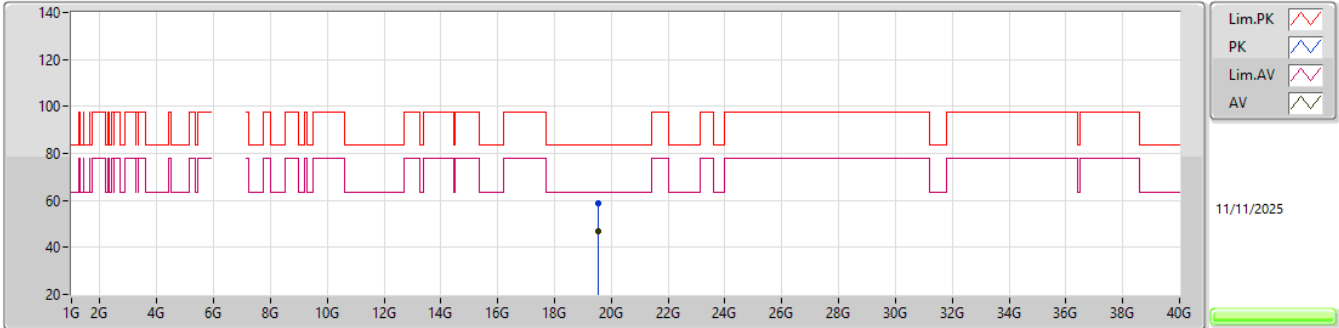


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.54698G	58.90	83.54	-24.64	49.23	1	Horizontal	301	1.84	-	37.59	20.88	48.80			
AV	19.54464G	46.97	63.54	-16.57	37.30	1	Horizontal	301	1.84	-	37.59	20.88	48.80			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6445MHz_TX

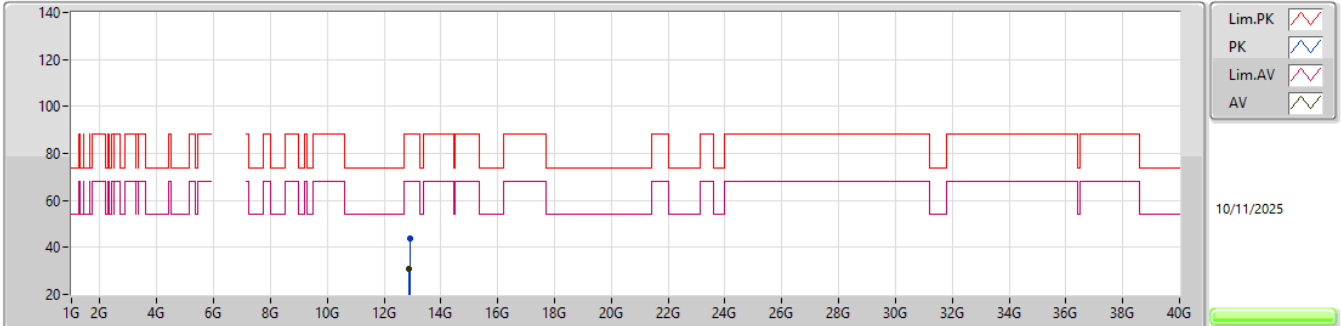


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.923G	43.94	88.20	-44.26	38.68	3	Vertical	66	2.00	-	39.45	11.66	45.85			
RMS	12.8768G	30.71	68.20	-37.49	25.44	3	Vertical	66	2.00	-	39.45	11.63	45.81			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6445MHz_TX

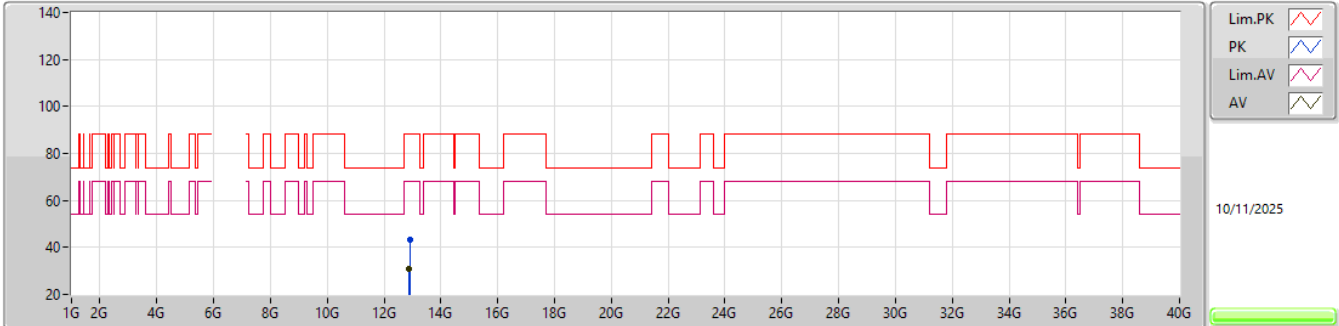


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9096G	43.11	88.20	-45.09	37.88	3	Horizontal	46	1.07	-	39.42	11.65	45.84			
RMS	12.8556G	30.70	68.20	-37.50	25.38	3	Horizontal	46	1.07	-	39.49	11.62	45.79			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6445MHz_TX

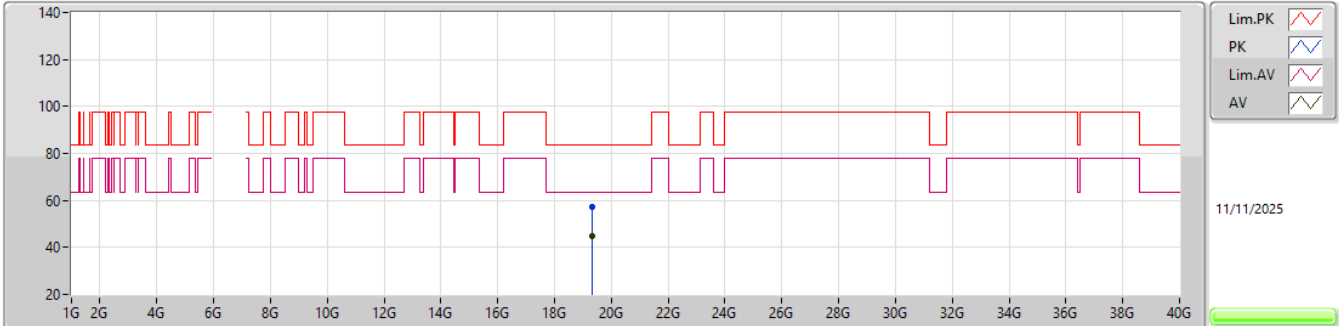


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.33956G	57.12	83.54	-26.42	47.41	1	Vertical	337	2.20	-	37.68	20.83	48.80			
AV	19.33818G	44.86	63.54	-18.68	35.15	1	Vertical	337	2.20	-	37.68	20.83	48.80			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6445MHz_TX

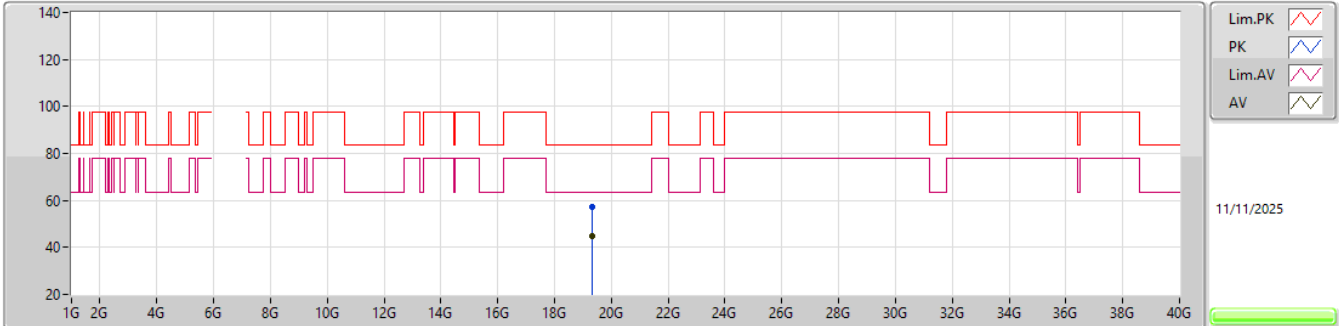


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.34328G	57.14	83.54	-26.40	47.42	1	Horizontal	310	1.71	-	37.69	20.83	48.80			
AV	19.34088G	44.75	63.54	-18.79	35.04	1	Horizontal	310	1.71	-	37.68	20.83	48.80			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6485MHz_TX

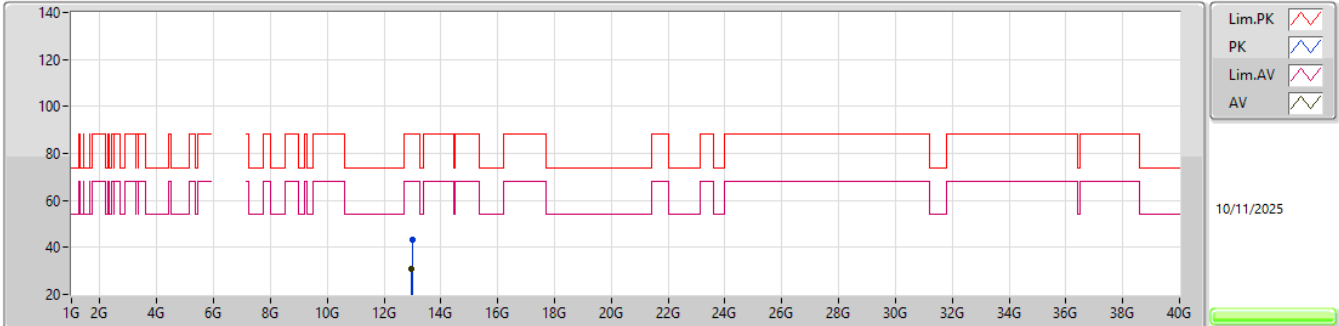


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9858G	43.32	88.20	-44.88	38.03	3	Vertical	203	1.55	-	39.50	11.70	45.91			
RMS	12.9648G	30.86	68.20	-37.34	25.56	3	Vertical	203	1.55	-	39.50	11.69	45.89			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6485MHz_TX

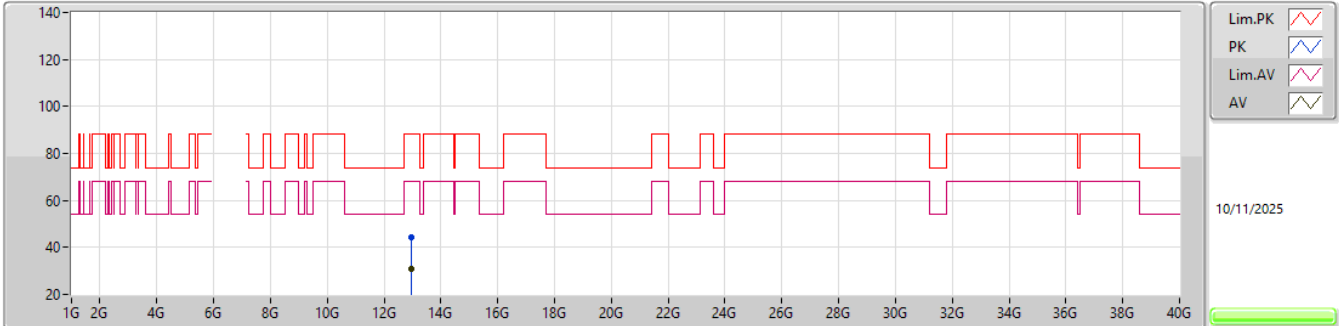
EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.956G	44.36	88.20	-43.84	39.06	3	Horizontal	84	1.56	-	39.50	11.68	45.88			
RMS	12.9602G	30.84	68.20	-37.36	25.53	3	Horizontal	84	1.56	-	39.50	11.69	45.88			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6485MHz_TX

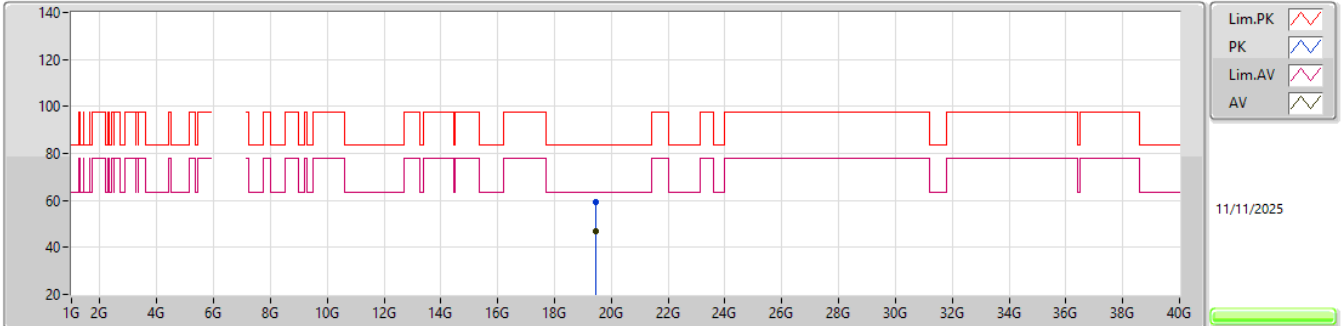


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.45776G	59.09	83.54	-24.45	49.42	1	Vertical	332	2.17	-	37.58	20.89	48.80			
AV	19.45686G	46.87	63.54	-16.67	37.19	1	Vertical	332	2.17	-	37.59	20.89	48.80			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6485MHz_TX

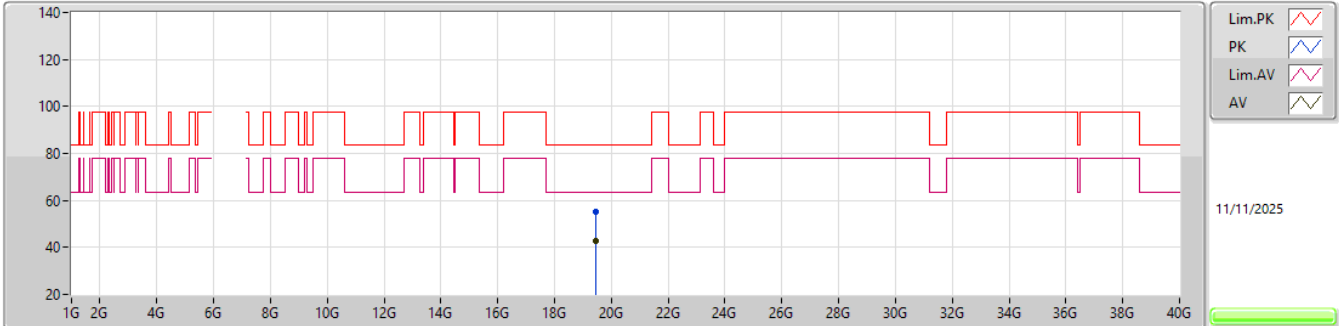


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.45218G	55.10	83.54	-28.44	45.41	1	Horizontal	338	1.80	-	37.60	20.89	48.80			
AV	19.45632G	42.91	63.54	-20.63	33.23	1	Horizontal	338	1.80	-	37.59	20.89	48.80			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6525MHz Straddle 6.425-6.525GHz_TX

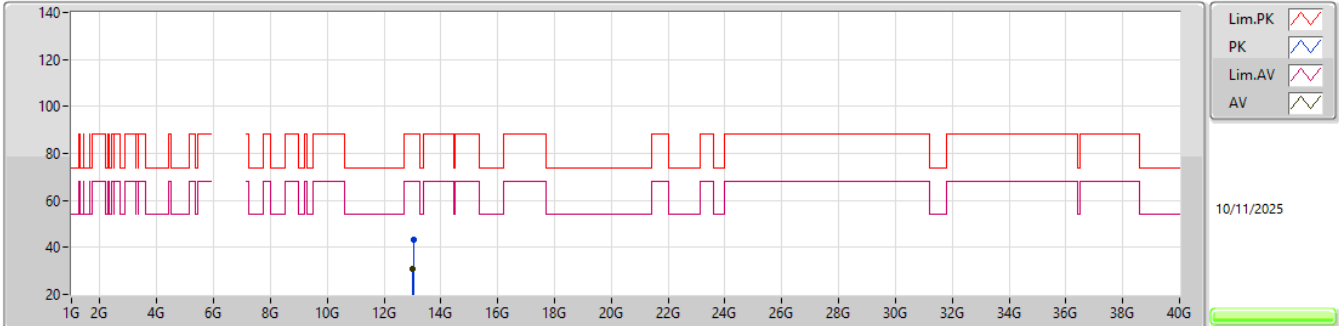


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0332G	43.36	88.20	-44.84	38.12	3	Vertical	90	1.83	-	39.37	11.73	45.86			
RMS	13.0026G	30.61	68.20	-37.59	25.33	3	Vertical	90	1.83	-	39.49	11.71	45.92			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6525MHz Straddle 6.425-6.525GHz_TX

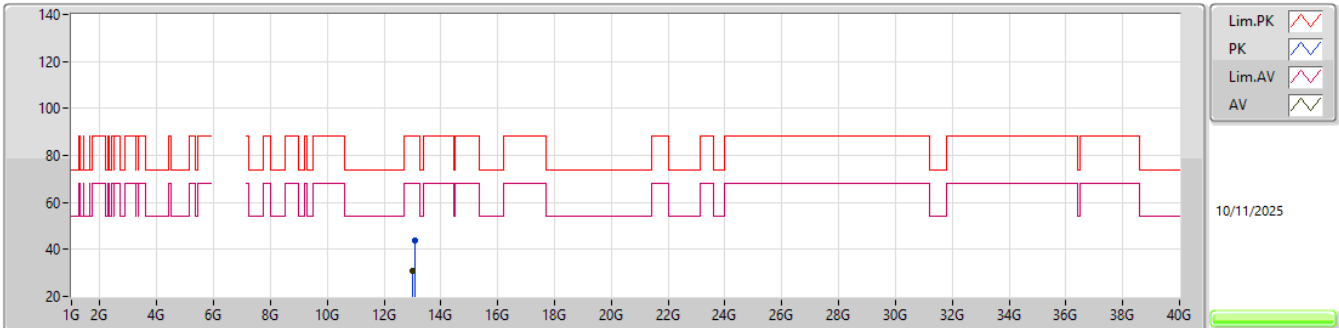


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0936G	43.71	88.20	-44.49	38.39	3	Horizontal	179	1.15	-	39.30	11.77	45.75			
RMS	13.0016G	30.76	68.20	-37.44	25.48	3	Horizontal	179	1.15	-	39.49	11.71	45.92			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6525MHz Straddle 6.425-6.525GHz_TX

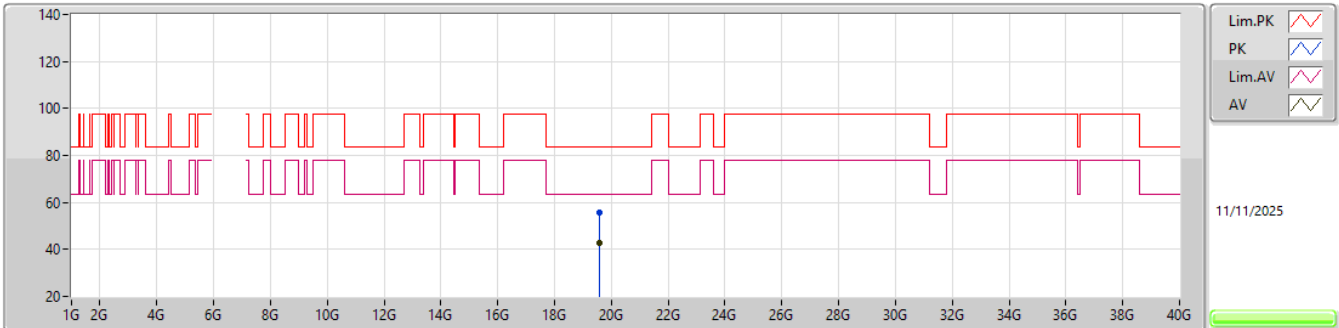


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.5786G	55.88	83.54	-27.66	46.23	1	Vertical	56	1.80	-	37.60	20.85	48.80			
AV	19.57818G	42.58	63.54	-20.96	32.93	1	Vertical	56	1.80	-	37.60	20.85	48.80			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6525MHz Straddle 6.425-6.525GHz_TX

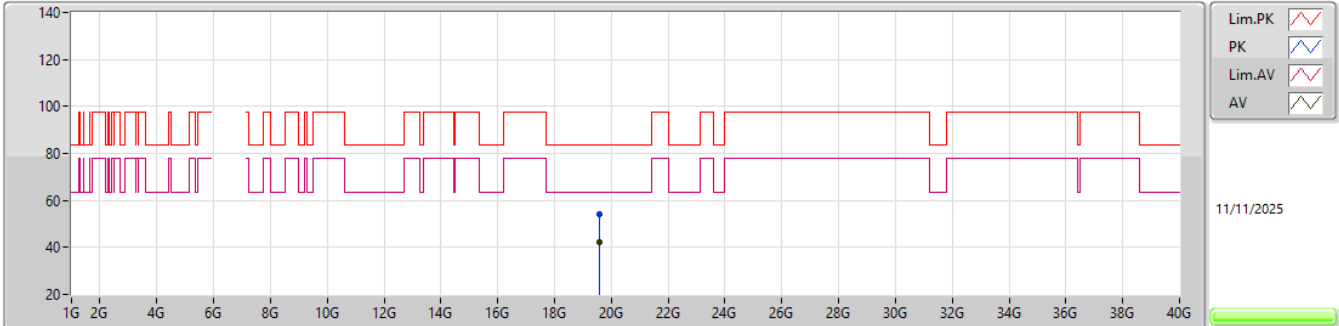


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.5624G	54.15	83.54	-29.39	44.48	1	Horizontal	36	1.80	-	37.60	20.87	48.80			
AV	19.56072G	42.13	63.54	-21.41	32.46	1	Horizontal	36	1.80	-	37.60	20.87	48.80			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6465MHz_TX

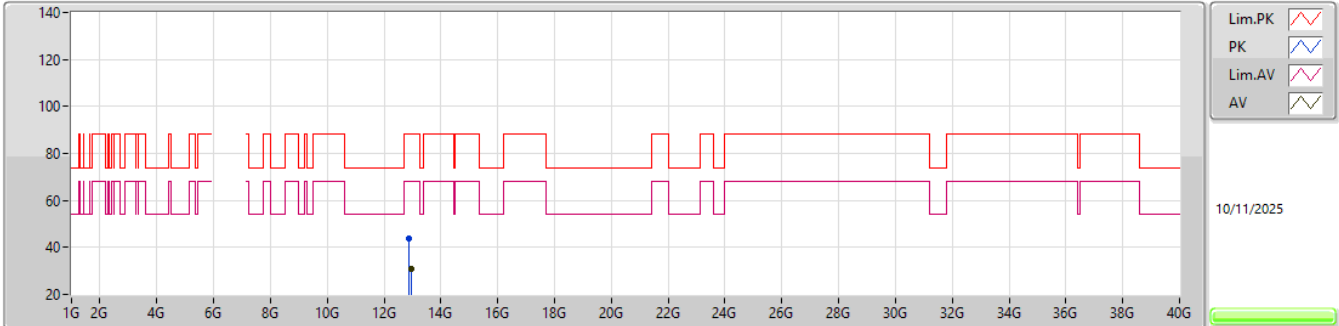


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.886G	43.74	88.20	-44.46	38.49	3	Vertical	183	1.79	-	39.43	11.64	45.82			
RMS	12.9776G	30.87	68.20	-37.33	25.57	3	Vertical	183	1.79	-	39.50	11.70	45.90			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6465MHz_TX

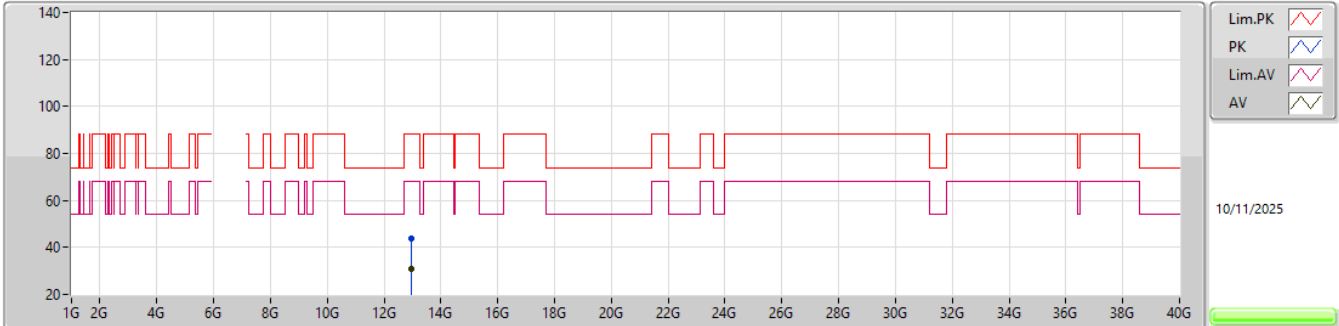


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9748G	43.92	88.20	-44.28	38.63	3	Horizontal	201	2.27	-	39.50	11.69	45.90			
RMS	12.9788G	30.84	68.20	-37.36	25.54	3	Horizontal	201	2.27	-	39.50	11.70	45.90			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6465MHz_TX

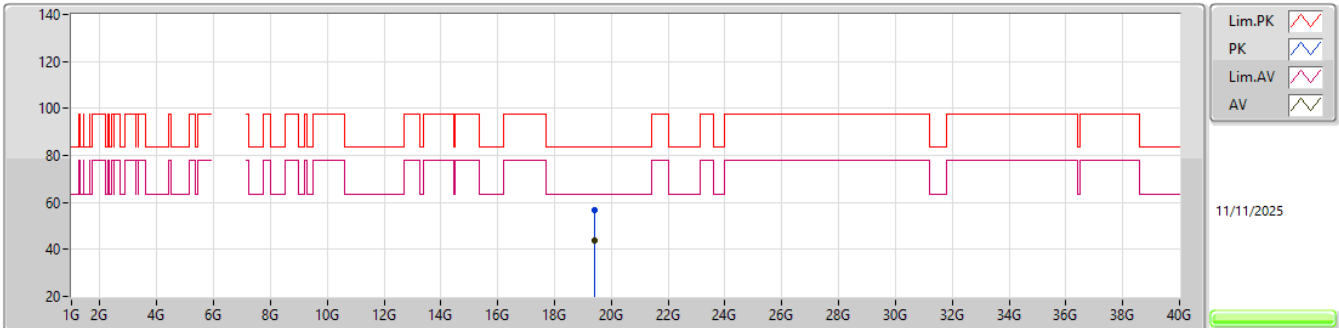


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.40052G	56.52	83.54	-27.02	46.76	1	Vertical	329	1.80	-	37.70	20.86	48.80			
AV	19.3956G	43.80	63.54	-19.74	34.04	1	Vertical	329	1.80	-	37.70	20.86	48.80			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6465MHz_TX

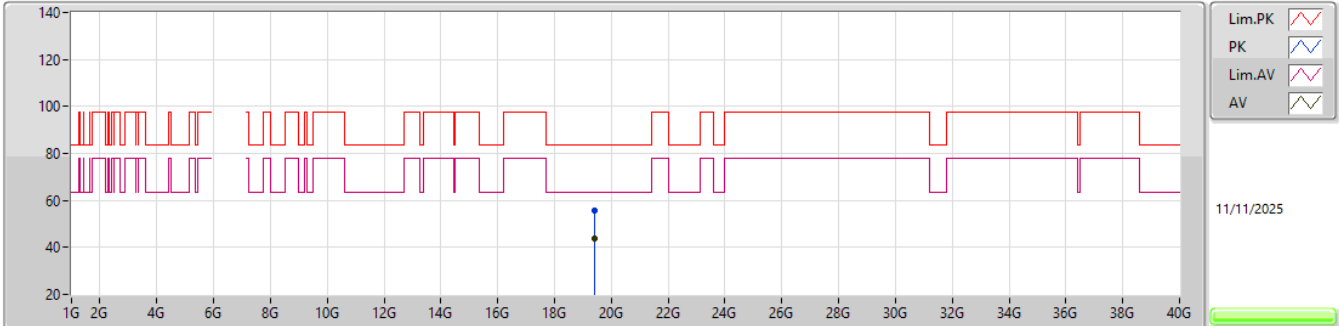


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.40928G	55.84	83.54	-27.70	46.10	1	Horizontal	304	1.68	-	37.68	20.86	48.80			
AV	19.39164G	43.58	63.54	-19.96	33.83	1	Horizontal	304	1.68	-	37.70	20.85	48.80			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6545MHz Straddle 6.425-6.525GHz_TX

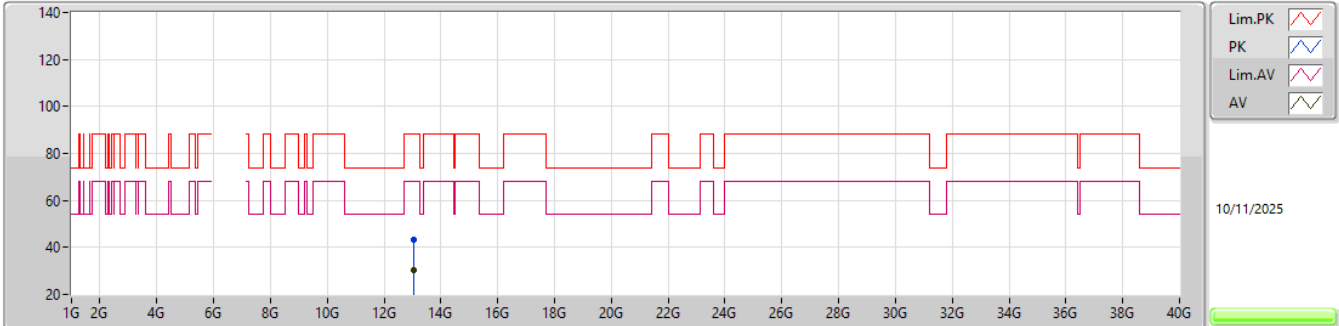


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0638G	43.04	88.20	-45.16	37.79	3	Vertical	58	2.95	-	39.30	11.75	45.80			
RMS	13.0594G	30.58	68.20	-37.62	25.34	3	Vertical	58	2.95	-	39.30	11.75	45.81			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6545MHz Straddle 6.425-6.525GHz_TX

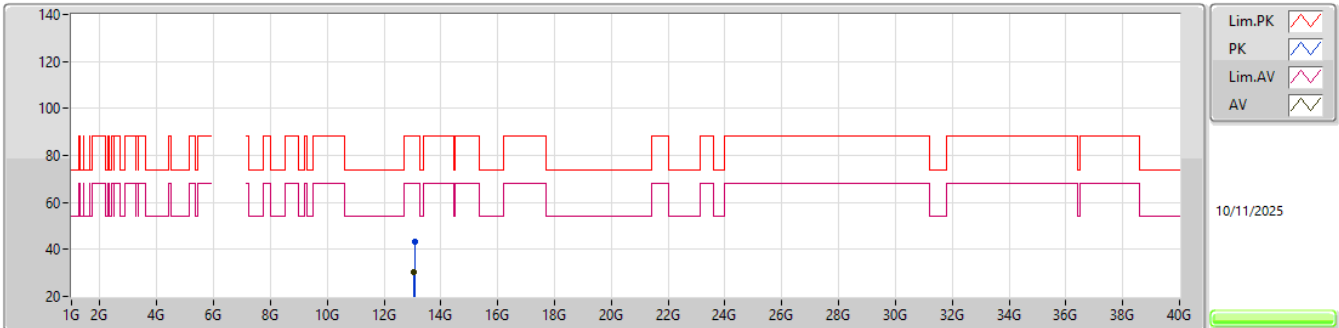


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0734G	43.09	88.20	-45.11	37.82	3	Horizontal	253	2.02	-	39.30	11.76	45.79			
RMS	13.0576G	30.60	68.20	-37.60	25.37	3	Horizontal	253	2.02	-	39.30	11.75	45.82			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6545MHz Straddle 6.425-6.525GHz_TX

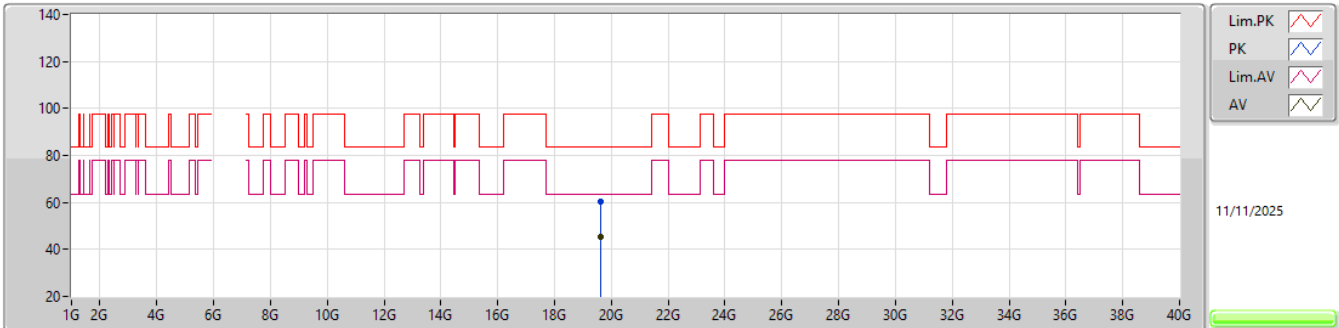


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.61904G	60.55	83.54	-22.99	50.97	1	Vertical	311	1.56	-	37.56	20.82	48.80			
AV	19.6206G	45.37	63.54	-18.17	35.79	1	Vertical	311	1.56	-	37.56	20.82	48.80			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6545MHz Straddle 6.425-6.525GHz_TX

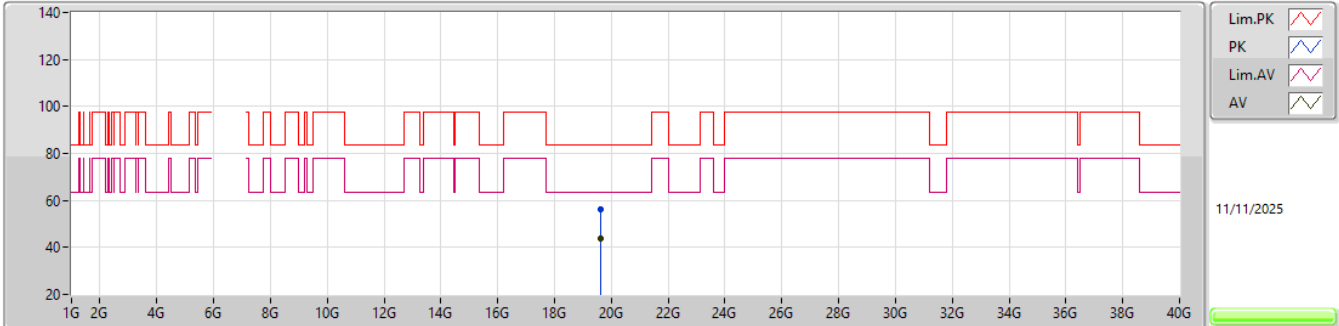


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.61052G	56.42	83.54	-27.12	46.81	1	Horizontal	308	1.81	-	37.58	20.83	48.80			
AV	19.61112G	43.65	63.54	-19.89	34.04	1	Horizontal	308	1.81	-	37.58	20.83	48.80			

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6505MHz Straddle 6.425-6.525GHz_TX

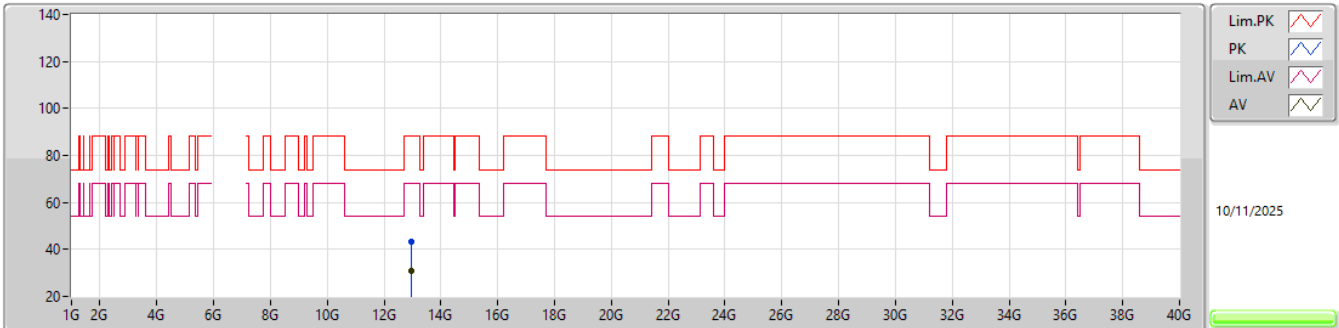


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.968G	43.10	88.20	-45.10	37.80	3	Vertical	309	2.28	-	39.50	11.69	45.89			
RMS	12.9688G	30.87	68.20	-37.33	25.57	3	Vertical	309	2.28	-	39.50	11.69	45.89			

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6505MHz Straddle 6.425-6.525GHz_TX

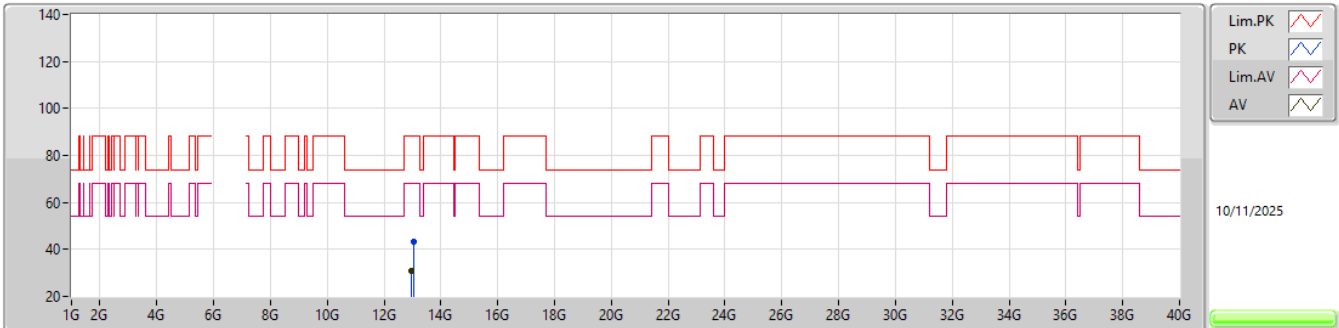


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0554G	43.20	88.20	-45.00	37.98	3	Horizontal	205	1.02	-	39.30	11.74	45.82			
RMS	12.9804G	30.91	68.20	-37.29	25.61	3	Horizontal	205	1.02	-	39.50	11.70	45.90			

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6505MHz Straddle 6.425-6.525GHz_TX

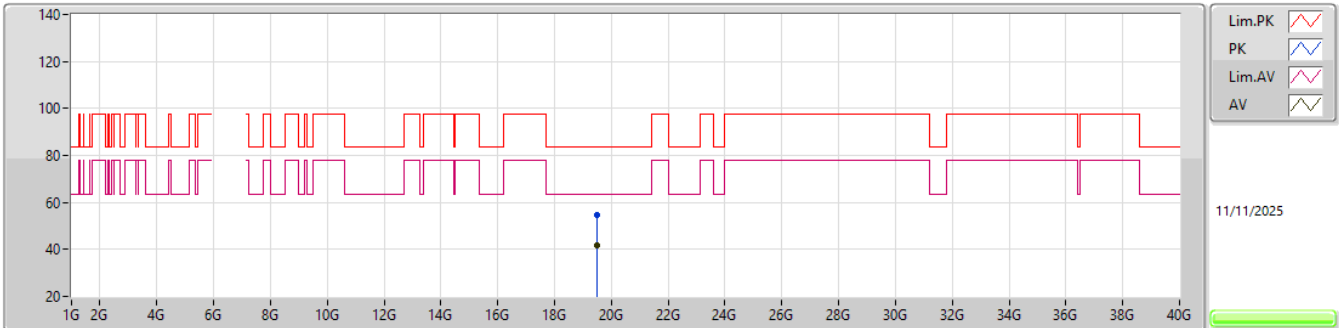


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.51548G	54.83	83.54	-28.71	45.20	1	Vertical	307	1.69	-	37.53	20.90	48.80			
AV	19.49736G	41.84	63.54	-21.70	32.22	1	Vertical	307	1.69	-	37.51	20.91	48.80			

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6505MHz Straddle 6.425-6.525GHz_TX

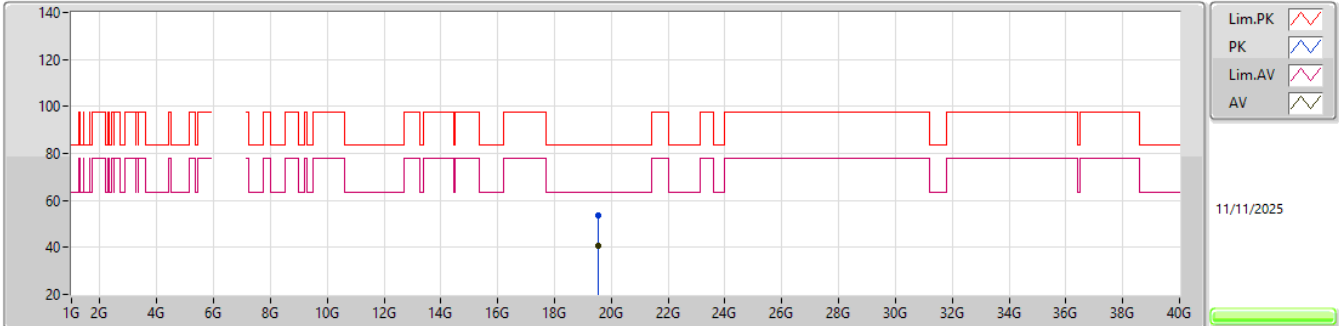


EUT_Y_2TX
Setting 27
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.52076G	53.54	83.54	-30.00	43.90	1	Horizontal	28	1.80	-	37.54	20.90	48.80			
AV	19.5198G	40.64	63.54	-22.90	31.00	1	Horizontal	28	1.80	-	37.54	20.90	48.80			

6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6585MHz Straddle 6.425-6.525GHz_TX

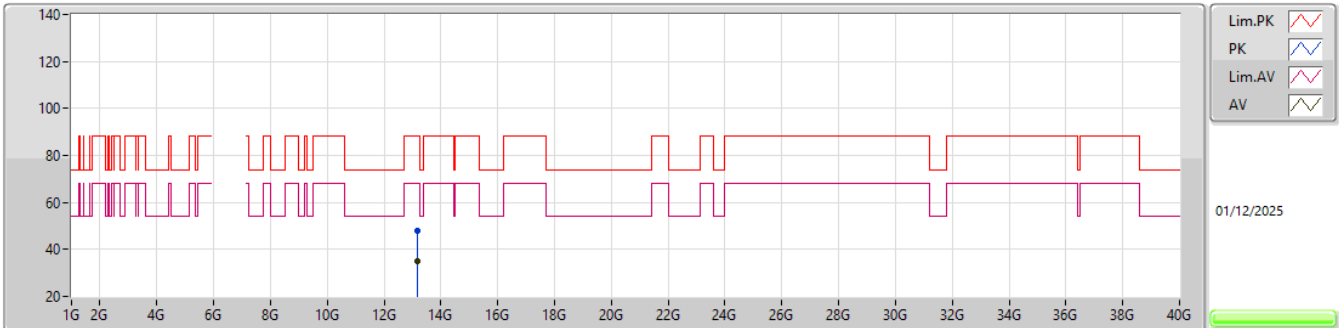


EUT_Y_2TX
Setting 27
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.15806G	47.90	88.20	-40.30	40.86	3	Vertical	158	2.44	-	39.70	12.97	45.63			
RMS	13.1697G	34.98	68.20	-33.22	27.92	3	Vertical	158	2.44	-	39.70	12.97	45.61			

6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6585MHz Straddle 6.425-6.525GHz_TX

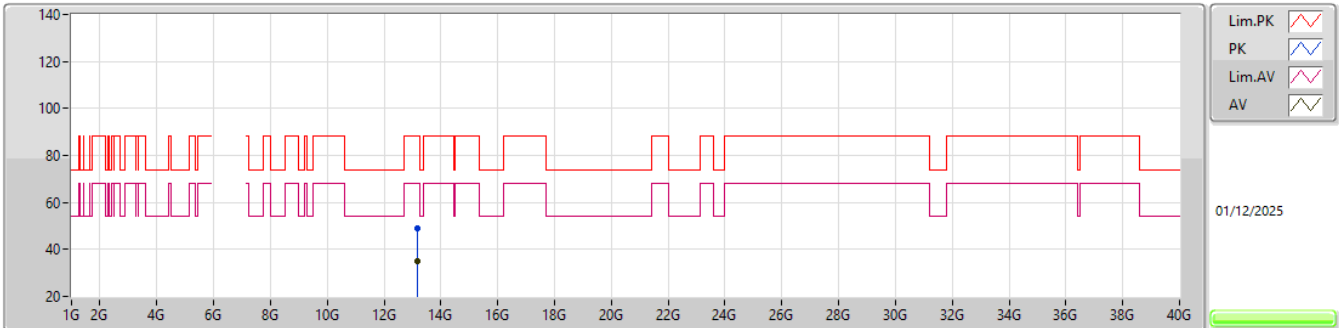


EUT_Y_2TX
Setting 27
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.19004G	49.17	88.20	-39.03	42.07	3	Horizontal	235	1.00	-	39.70	12.97	45.57			
RMS	13.16982G	35.25	68.20	-32.95	28.19	3	Horizontal	235	1.00	-	39.70	12.97	45.61			

6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6585MHz Straddle 6.425-6.525GHz_TX

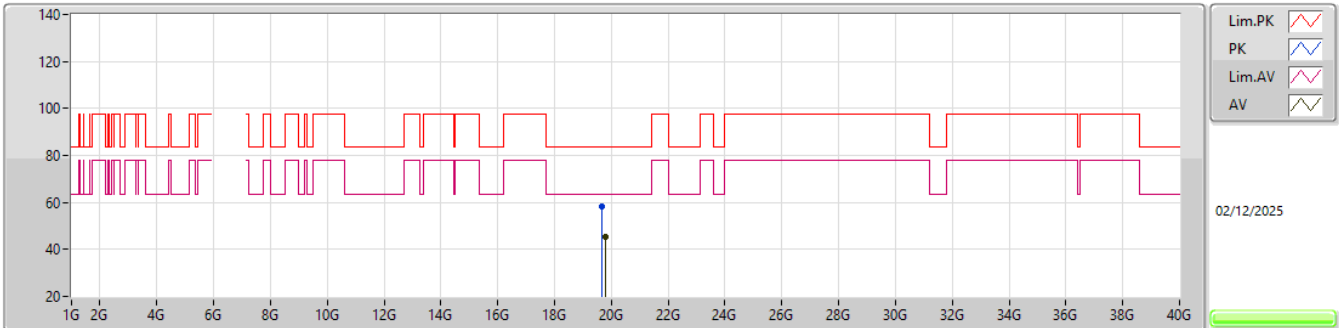


EUT_Y_2TX
Setting 27
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.6698G	58.40	83.54	-25.14	53.02	1	Vertical	301	2.78	-	37.68	17.18	49.48			
AV	19.794G	45.31	63.54	-18.23	39.68	1	Vertical	301	2.78	-	37.78	17.25	49.40			

6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6585MHz Straddle 6.425-6.525GHz_TX

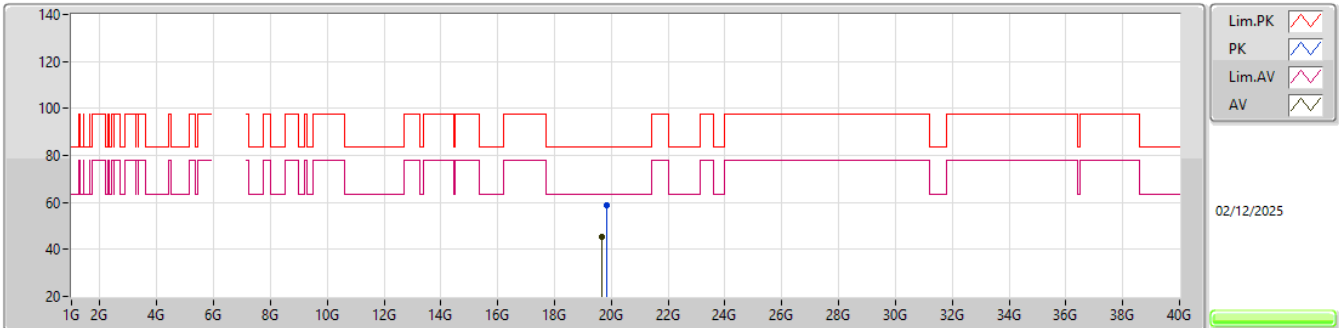


EUT_Y_2TX
Setting 27
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.8372G	58.76	83.54	-24.78	53.12	1	Horizontal	165	2.87	-	37.73	17.28	49.37			
AV	19.6776G	45.38	63.54	-18.16	39.97	1	Horizontal	165	2.87	-	37.71	17.18	49.48			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6535MHz_TX

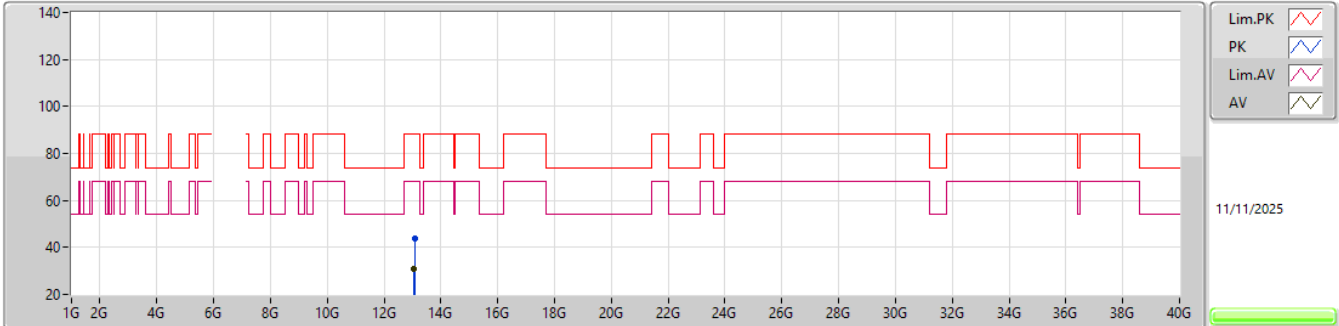


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0777G	43.84	88.20	-44.36	38.56	3	Vertical	88	1.25	-	39.30	11.76	45.78			
RMS	13.0657G	30.72	68.20	-37.48	25.47	3	Vertical	88	1.25	-	39.30	11.75	45.80			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6535MHz_TX

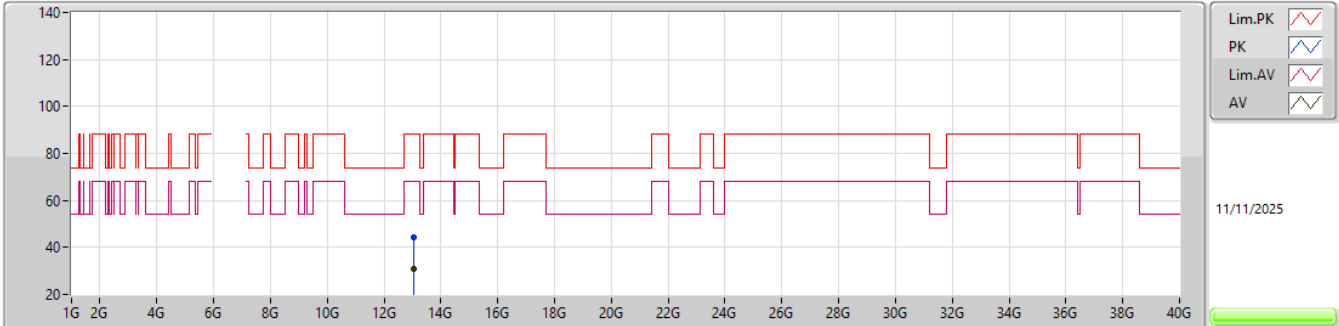


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0523G	44.15	88.20	-44.05	38.93	3	Horizontal	133	1.01	-	39.30	11.74	45.82			
RMS	13.0551G	30.67	68.20	-37.53	25.45	3	Horizontal	133	1.01	-	39.30	11.74	45.82			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6535MHz_TX

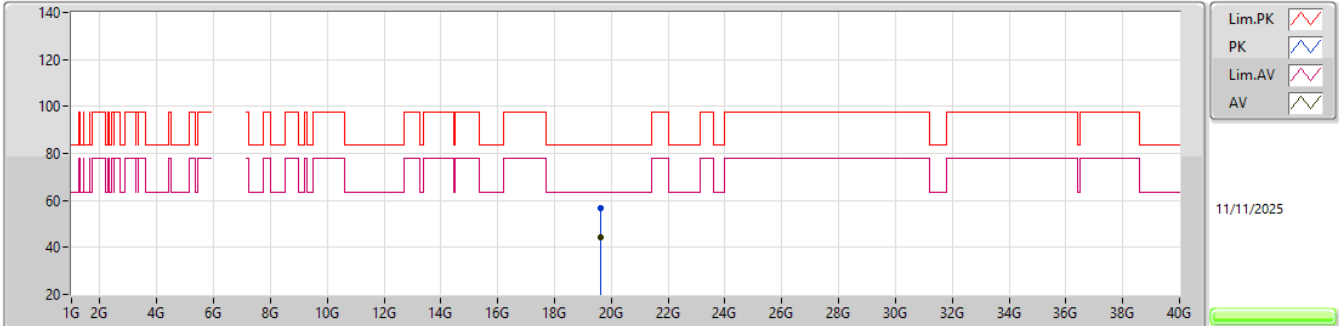


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.61076G	56.62	83.54	-26.92	47.01	1	Vertical	46	1.80	-	37.58	20.83	48.80			
AV	19.60932G	44.46	63.54	-19.08	34.85	1	Vertical	46	1.80	-	37.58	20.83	48.80			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6535MHz_TX

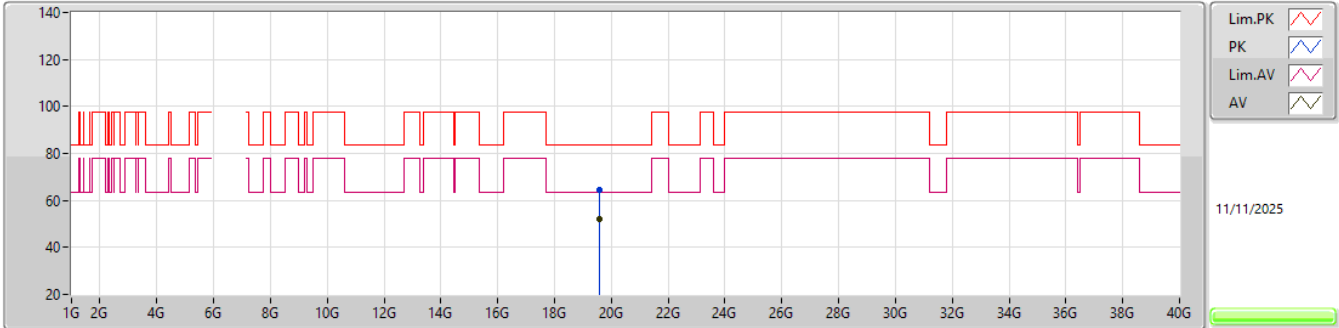


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60014G	64.73	83.54	-18.81	55.09	1	Horizontal	306	1.82	-	37.60	20.84	48.80			
AV	19.59924G	52.10	63.54	-11.44	42.46	1	Horizontal	306	1.82	-	37.60	20.84	48.80			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

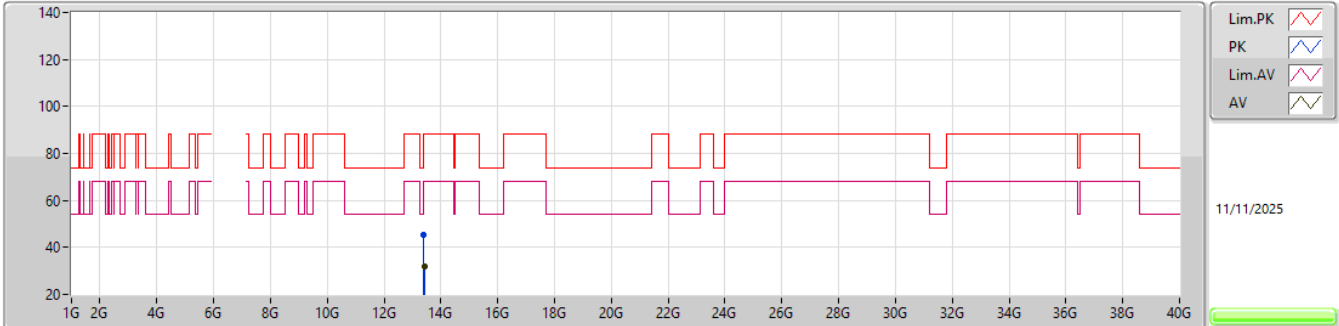


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.4006G	45.41	88.20	-42.79	38.54	3	Vertical	314	2.75	-	40.10	11.96	45.19			
RMS	13.4145G	32.12	68.20	-36.08	25.22	3	Vertical	314	2.75	-	40.10	11.97	45.17			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

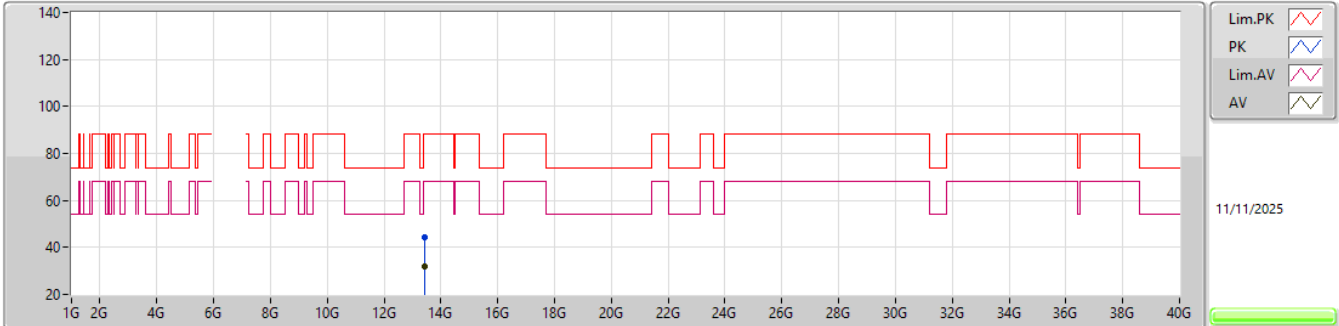

EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.411G	44.12	88.20	-44.08	37.23	3	Horizontal	284	2.00	-	40.10	11.96	45.17			
RMS	13.415G	32.07	68.20	-36.13	25.16	3	Horizontal	284	2.00	-	40.10	11.97	45.16			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX




EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.08428G	56.90	83.54	-26.64	47.72	1	Vertical	50	1.80	-	37.26	20.70	48.78			
AV	20.08428G	45.01	63.54	-18.53	35.82	1	Vertical	50	1.80	-	37.27	20.70	48.78			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

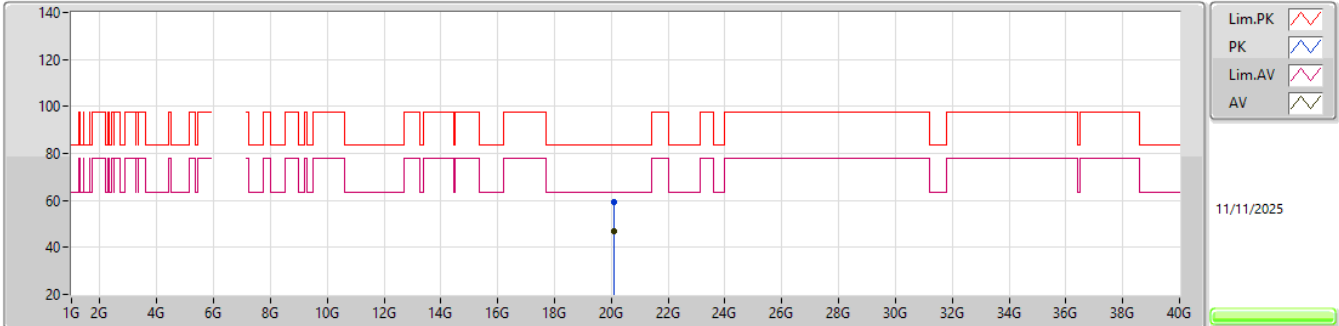


EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.10336G	59.53	83.54	-24.01	50.27	1	Horizontal	277.1	1.80	-	37.30	20.74	48.78			
AV	20.08392G	47.15	63.54	-16.39	37.96	1	Horizontal	277.1	1.80	-	37.27	20.70	48.78			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6875MHz Straddle 6.525-6.875GHz_TX

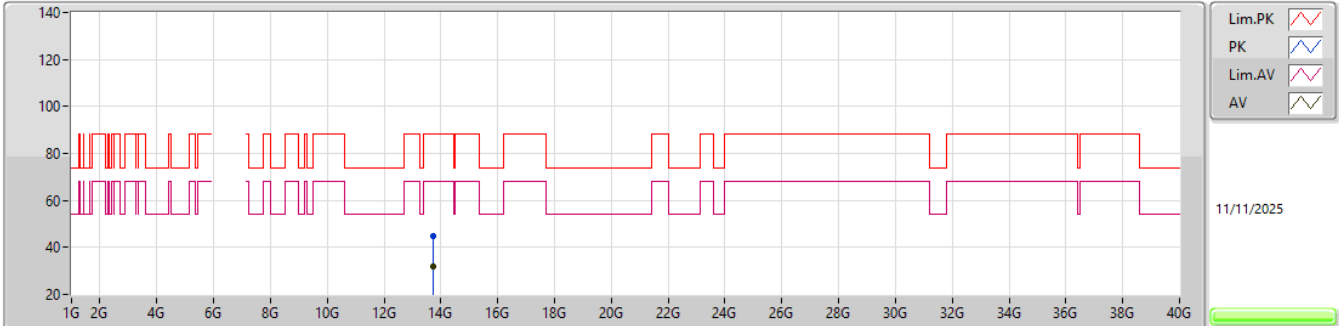

EUT_Y_2TX
Setting 27
06-U-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.7362G	44.78	88.20	-43.42	37.47	3	Vertical	140	1.81	-	40.20	12.17	45.06			
RMS	13.7473G	31.92	68.20	-36.28	24.61	3	Vertical	140	1.81	-	40.20	12.17	45.06			