

1 Explanation of MSCL

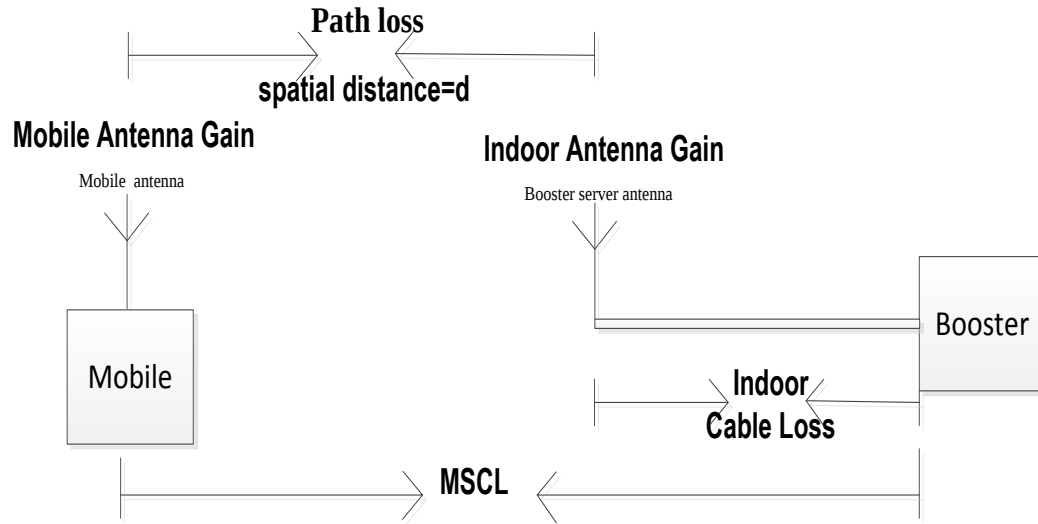


Figure 1

$$\text{MSCL} = \text{Path loss} + \text{Indoor Cable Loss} - \text{Mobile Antenna Gain} - \text{Indoor Antenna Gain} \dots\dots ①$$

1.1 Decibel version of free-space propagation loss equation

$$\text{Path loss (dB)} = 20Lgf + 20Lgd + 32.45 \dots\dots ② \quad \text{or} \quad \text{Path loss (dB)} = 20Lgf + 20LgD - 27.55 \dots\dots ③$$

f (MHz), d (km), D (m), $d = 1000D$

1.1.1 Operation Frequency

At PCS (1850-1910MHz) $f = 1850\text{MHz}$

At Cellular (824-849MHz) $f = 824\text{ MHz}$

1.1.2 Minimum Separation Distances for MSCL base on FCC new rule D (m)

Minimum Separation Distances for MSCL Calculation or Measurements D(m)	
Indoor server antenna types	Minimum separation distances D (m)
Ceiling Mounted (i.e., Dome-type) Antennas	2.0
Wall Mounted (i.e., Panel or other type) Antennas	1.0 or 2.0*
Table Top Antennas	1.0

* Note:

Wall Mounted (i.e., Panel or other type) Antennas: Alternatively, if a manufacturer clearly specifies a minimum separation distance to consumer devices in the installation manual or other user documentation provided with the booster, a reasonable minimum separation distance could be up to 6 feet (or 2 meters) horizontally removed from the antenna. In this case, the user would be required to ensure this minimum separation distance for all CMRS devices authorized for use with this booster.

1.2 Mobile Antenna Gain

Mobile Antenna Gain=0dBi

1.3 Indoor Cable Loss And Indoor Antenna Gain

Indoor Cable Loss and Indoor Antenna Gain are listed in the separate submitted file of Flex2go Antenna Kitting .



48346 Milmont Drive Fremont, CA 94538 Phone: 510-770-0469 Fax: 510-996-7250

www.surecall.com

2 MSCL Calculations

Flex2go

2.1 Vehicle Kit :

Path loss =20Lgf+20LgD-27.55				
Operation Frequency (MHz)	f(MHz)	D(m)	Constant (dB)	Path loss (dB)
PCS(1850-1910)	1850	0.4	27.55	29.8
Cellular(824-849)	824	0.4	27.55	22.8

MSCL				
Operation Frequency (MHz)	Path loss (dB)	Indoor Antenna Gain(dBi)	Indoor Cable Loss(dB)	MSCL(dB)
PCS (1850-1910)	29.8	3	8.8	35.6
Cellular (824-849)	22.8	1.1	4.3	26.0

2.2 Marine Kit:

Path loss=20Lgf+20LgD-27.55				
Operation Frequency (MHz)	f(MHz)	D(m)	Constant (dB)	Path loss (dB)
PCS(1850-1910)	1850	0.9	27.55	36.9
Cellular(824-849)	824	0.9	27.55	29.8

MSCL				
Operation Frequency (MHz)	Path loss (dB)	Indoor Antenna Gain(dBi)	Indoor Cable Loss(dB)	MSCL(dB)
PCS (1850-1910)	36.9	10	3.56	30.4
Cellular (824-849)	29.8	7	2.29	25.1

2.3 Desk top/RV kit:

Path loss=20Lgf+20LgD-27.55				
Operation Frequency (MHz)	f(MHz)	D(m)	Constant (dB)	Path loss (dB)
PCS(1850-1910)	1850	0.6	27.55	33.3
Cellular(824-849)	824	0.6	27.55	26.3

MSCL				
Operation Frequency (MHz)	Path loss (dB)	Indoor Antenna Gain(dBi)	Indoor Cable Loss(dB)	MSCL(dB)
PCS (1850-1910)	33.3	3	0.3	30.6
Cellular (824-849)	26.3	1.2	0.3	25.4





48346 Milmont Drive Fremont, CA 94538 Phone: 510-770-0469 Fax: 510-996-7250

www.surecall.com