



GSM 850-Right Head Cheek Low CH128	2
GSM 850-Right Head Tilted Low CH128	3
GSM 850-Left Head Cheek Low CH128	4
GSM 850-Left Head Tilted Low CH128	5
PCS 1900 Right Head Cheek Low CH512	6
PCS 1900 Right Head Tilted Low CH512	8
PCS 1900 Left Head Cheek Low CH512	9
PCS 1900 Left Head Tilted Low CH512	10
GSM 850-Body Up Low CH128	11
GSM 850-Body Down Low CH128	12
GSM 850-Body Top Top Low CH128	13
GSM 850-Body Left Left Low CH128	14
GSM 850-Body Right Low CH128	15
GPRS 850-Body Up Low CH128	16
GPRS 850-Body Down Low CH128	17
GPRS 850-Body Top Low CH128	18
GPRS 850-Body Left Low CH128	19
GPRS 850-Body Right Low CH128	20
PCS1900-Body Up Low CH512	21
PCS1900-Body Down Low CH512	22
PCS 1900-Body Top Low CH512	24
PCS 1900-Body Left Low CH512	25
PCS 1900-Body Right Low CH512	26
GPRS 1900-Body Up Middle CH661	27
GPRS 1900-Body Down Middle CH661	28
GPRS 1900-Body Top Middle CH661	29
GPRS 1900-Body Left Middle CH661	30
GPRS 1900-Body Right Middle CH661	31
IEEE 802.11b Body Up Left Middle CH6	32
IEEE 802.11b Body Down Left Middle CH6	33
IEEE 802.11b Body Right Left Middle CH6	34
IEEE 802.11b Body Top Left Middle CH6	35



Test Laboratory: Compliance Certification Services Inc.

Date: 3/6/2013

GSM 850-Right Head Cheek Low CH128

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 824.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.628$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.03, 9.03, 9.03); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GSM850/Right Head Cheek Low CH128/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0471 W/kg

GSM850/Right Head Cheek Low CH128/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 6.255 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0640 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0510 W/kg

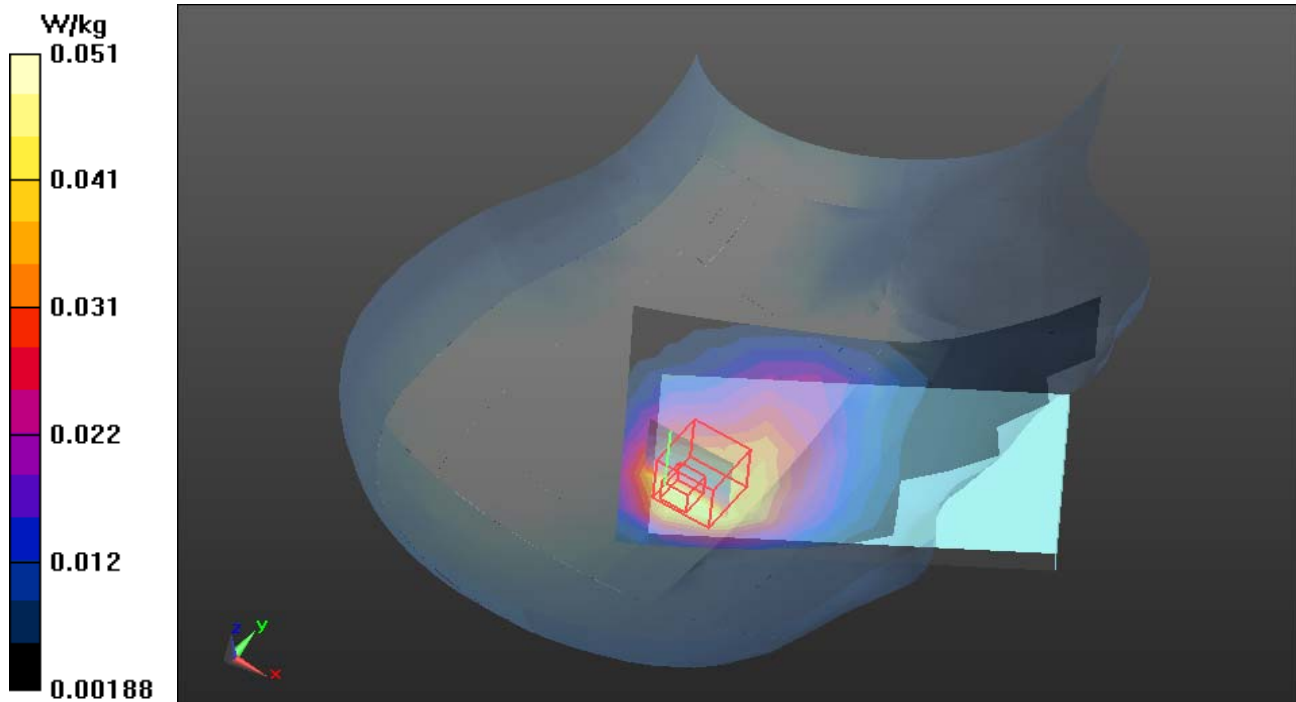



Test Laboratory: Compliance Certification Services Inc.

Date: 3/6/2013

GSM 850-Right Head Tilted Low CH128

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 824.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.628$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.03, 9.03, 9.03); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GSM850/Right Head Tilted Low CH128/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0441 W/kg

GSM850/Right Head Tilted Low CH128/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 6.235 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0530 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0415 W/kg

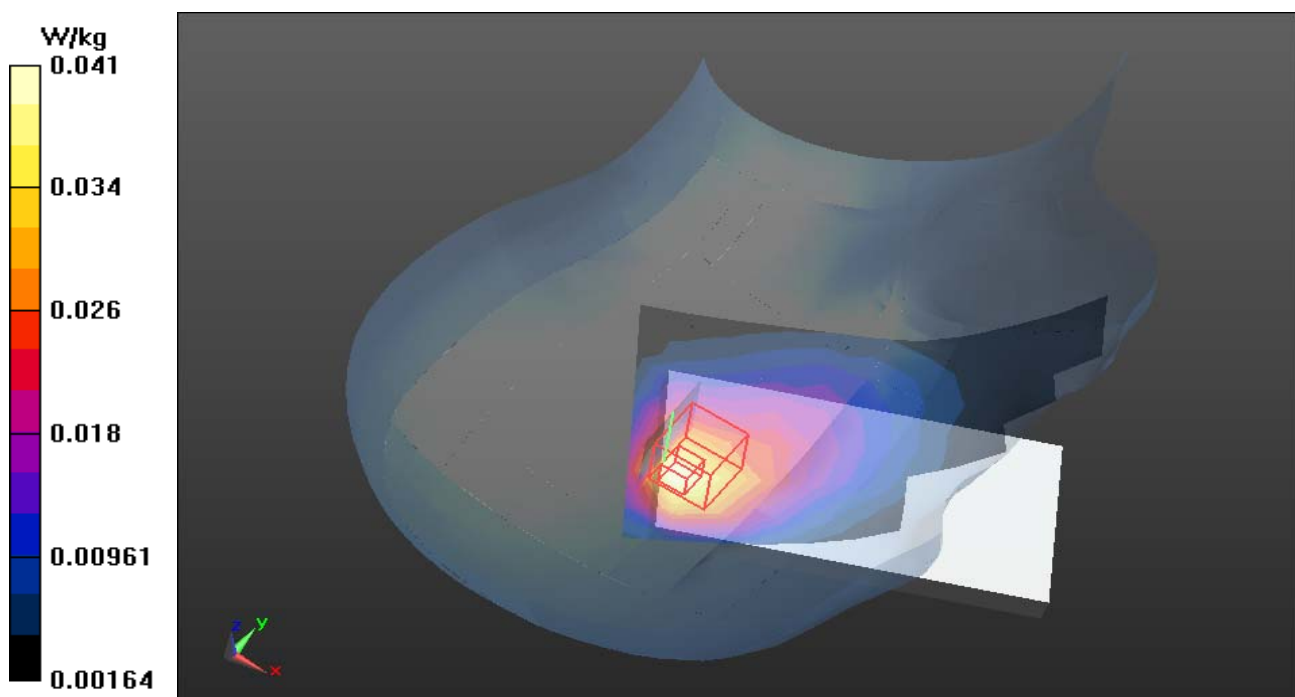



Test Laboratory: Compliance Certification Services Inc.

Date: 3/6/2013

GSM 850-Left Head Cheek Low CH128

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 824.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.628$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Left Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.03, 9.03, 9.03); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GSM850/Left Head Cheek Low CH128/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0356 W/kg

GSM850/Left Head Cheek Low CH128/Zoom Scan (7x7x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 6.481 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0400 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0353 W/kg

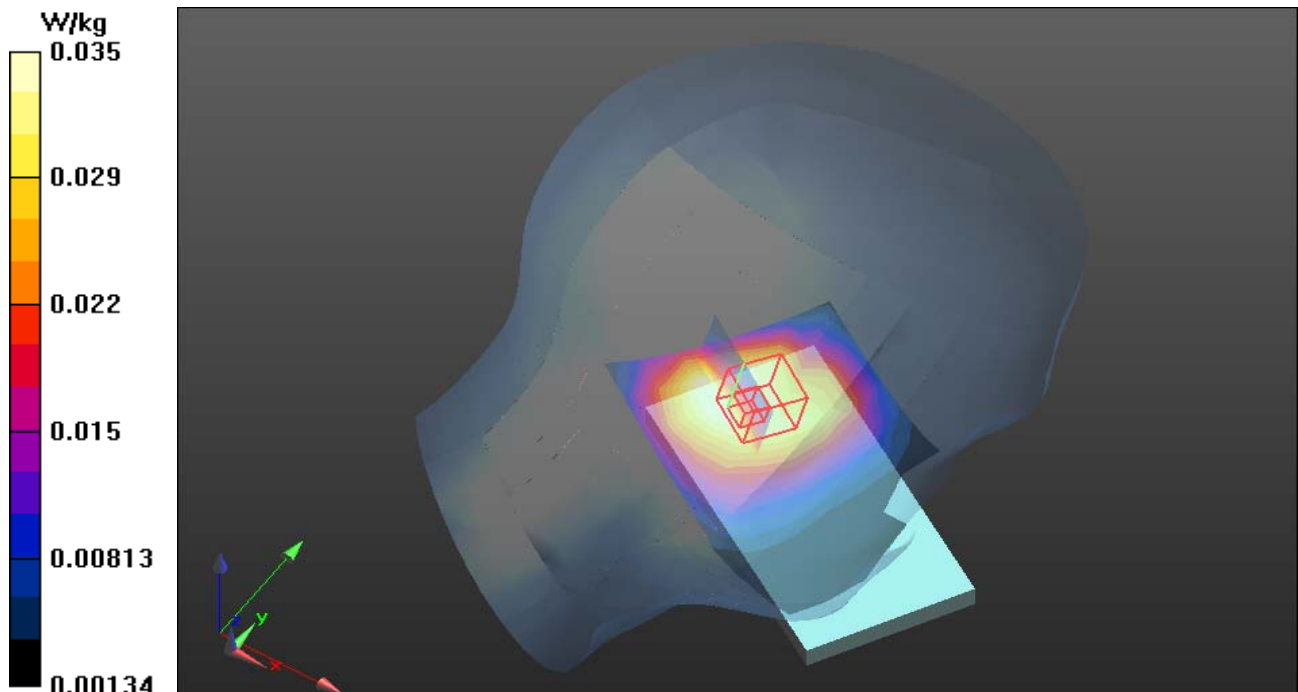



Test Laboratory: Compliance Certification Services Inc.

Date: 3/6/2013

GSM 850-Left Head Tilted Low CH128

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 824.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.628$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Left Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.03, 9.03, 9.03); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GSM850/Left Head Tilted Low CH128/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0317 W/kg

GSM850/Left Head Tilted Low CH128/Zoom Scan (6x6x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 5.876 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0380 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0322 W/kg

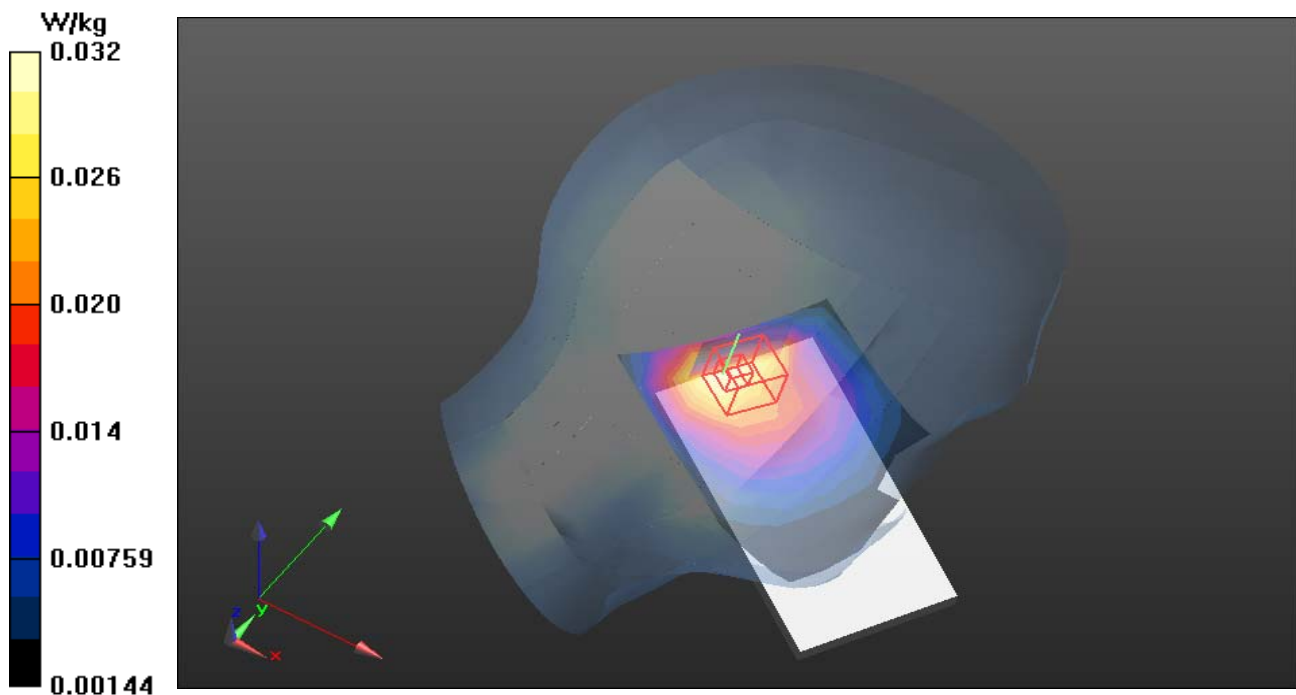



Test Laboratory: Compliance Certification Services Inc.

Date: 3/7/2013

PCS 1900 Right Head Cheek Low CH512

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1850.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.87$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.64, 7.64, 7.64); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

PCS1900/Right Head Cheek Low CH512/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.158 W/kg

PCS1900/Right Head Cheek Low CH512/Zoom Scan (6x6x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm


Reference Value = 9.208 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.173 W/kg

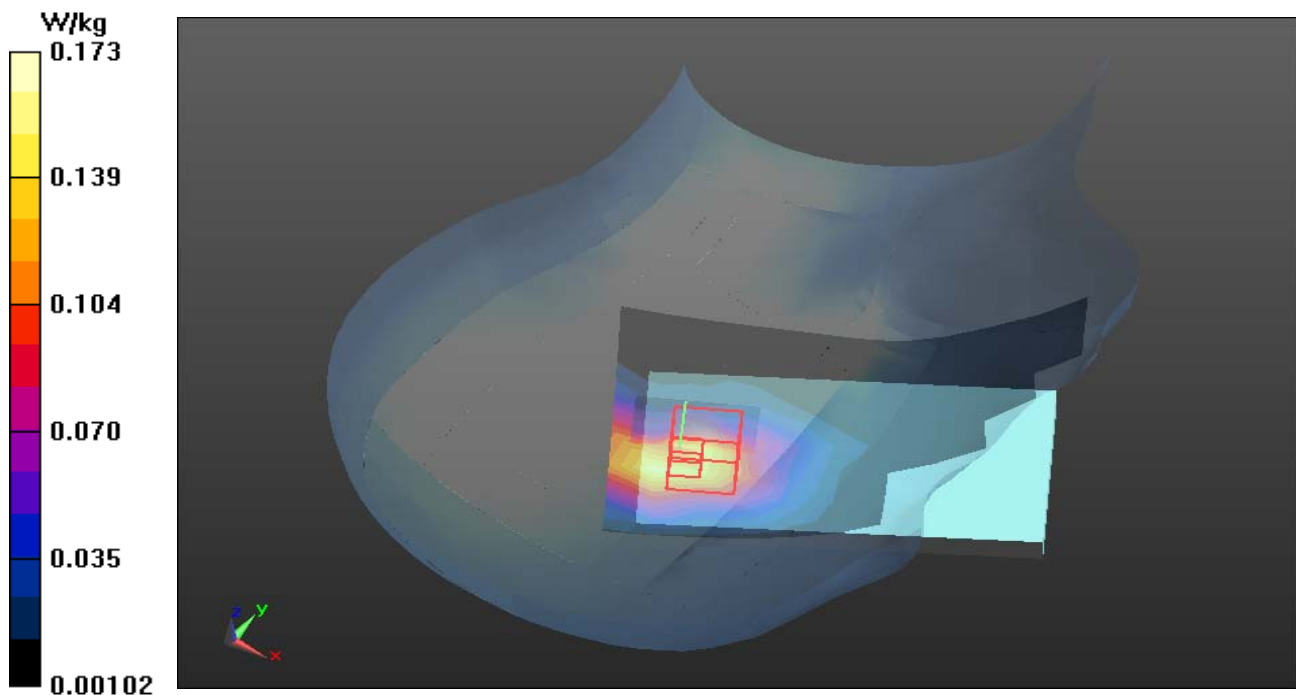

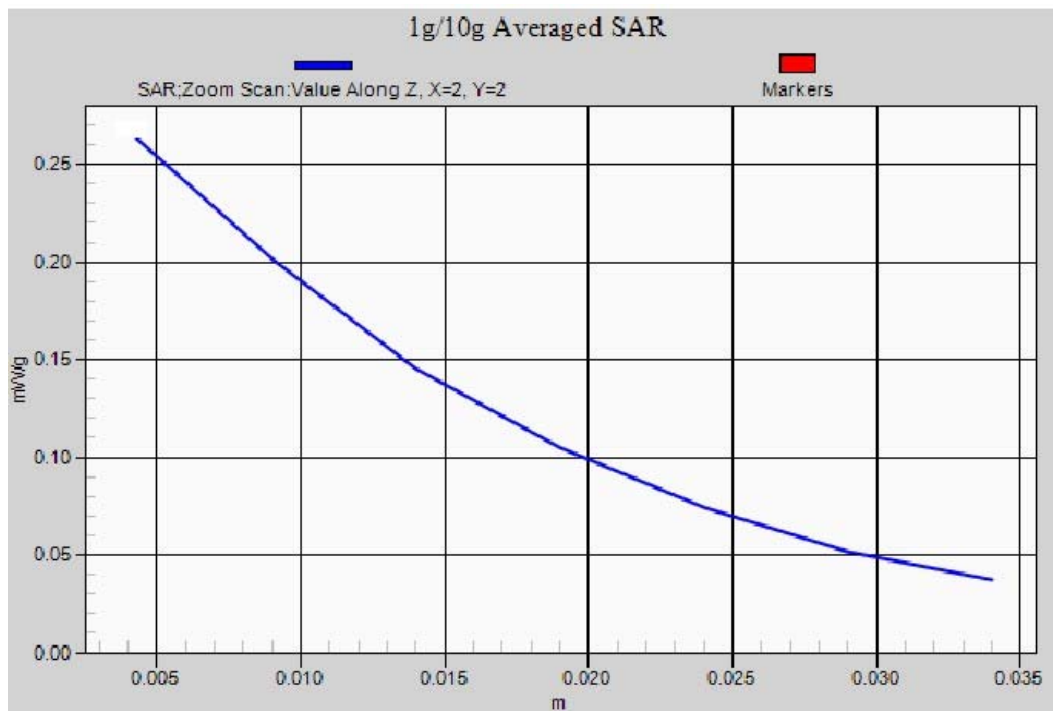



Test Laboratory: Compliance Certification Services Inc.

Date: 3/7/2013

PCS 1900 Right Head Tilted Low CH512

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1850.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.87$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.64, 7.64, 7.64); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

PCS1900/Right Head Tilted Low CH512/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.126 W/kg

PCS1900/Right Head Tilted Low CH512/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 10.017 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.202 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.173 W/kg

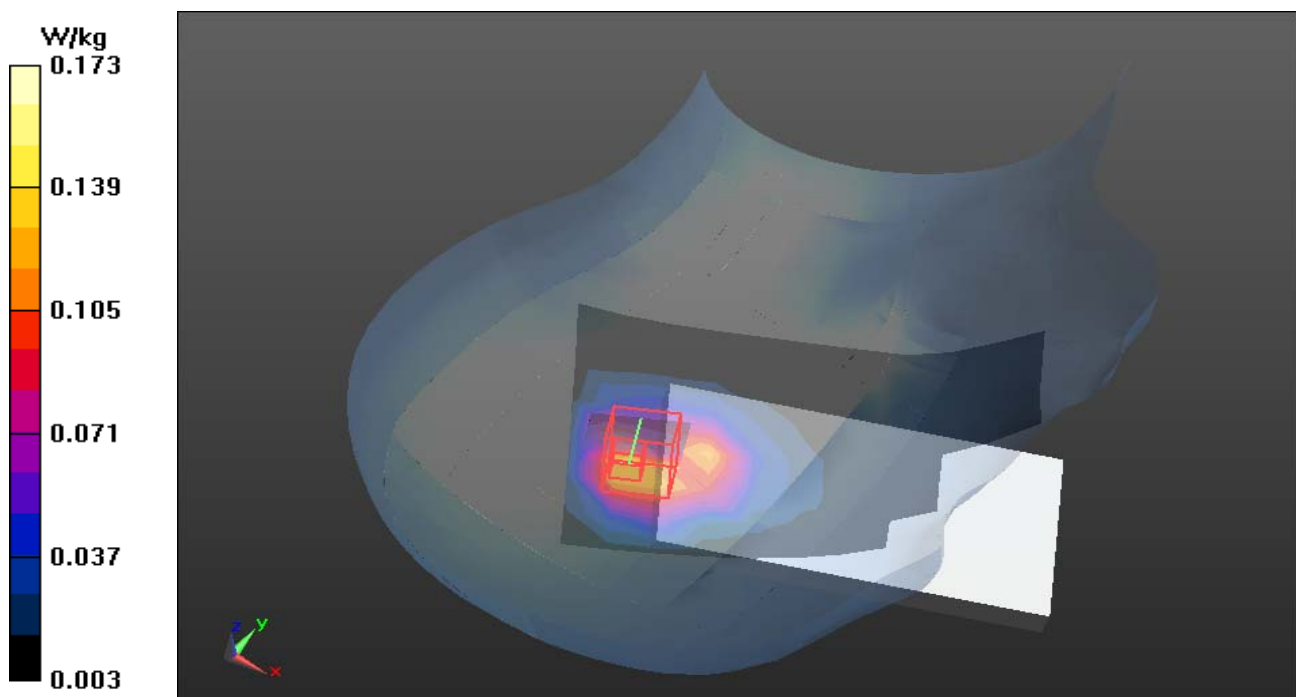



Test Laboratory: Compliance Certification Services Inc.

Date: 3/7/2013

PCS 1900 Left Head Cheek Low CH512

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1850.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.87$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.64, 7.64, 7.64); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

PCS1900/Left Head Cheek Low CH512/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.141 W/kg

PCS1900/Left Head Cheek Low CH512/Zoom Scan (6x6x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 10.876 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.178 W/kg

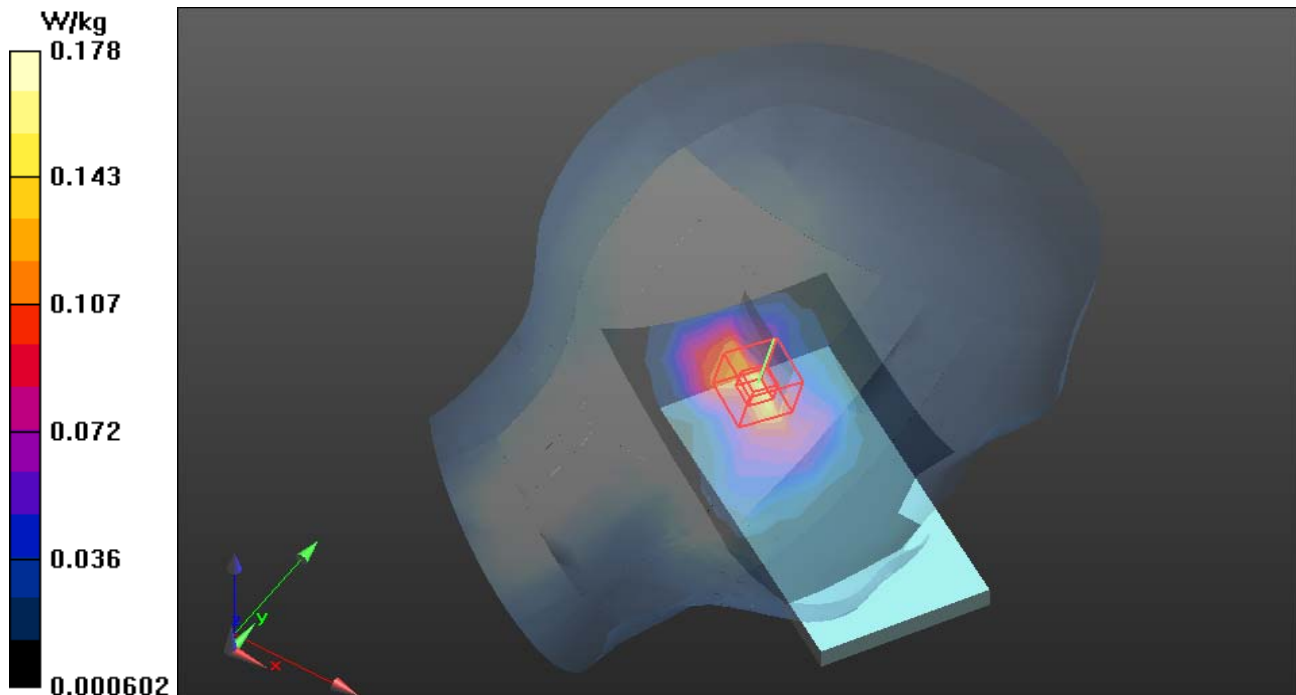



Test Laboratory: Compliance Certification Services Inc.

Date: 3/7/2013

PCS 1900 Left Head Tilted Low CH512

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1850.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.87$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.64, 7.64, 7.64); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

PCS1900/Left Head Tilted Low CH512/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.132 W/kg

PCS1900/Left Head Tilted Low CH512/Zoom Scan (6x7x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 10.626 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.162 W/kg

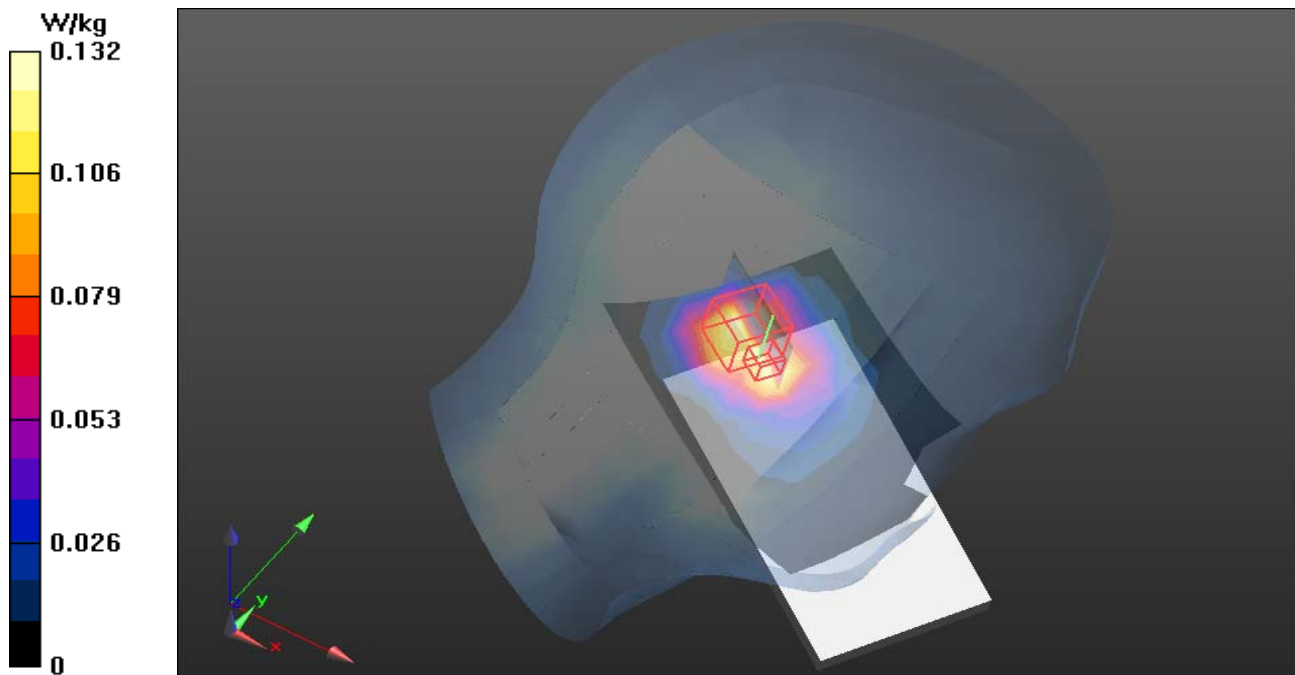



Test Laboratory: Compliance Certification Services Inc.

Date: 3/6/2013

GSM 850-Body Up Low CH128

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 824.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 55.959$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GSM 850/GSM850 Body Up Low CH128/Area Scan (11x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0464 W/kg

GSM 850/GSM850 Body Up Low CH128/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 7.140 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0530 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0479 W/kg

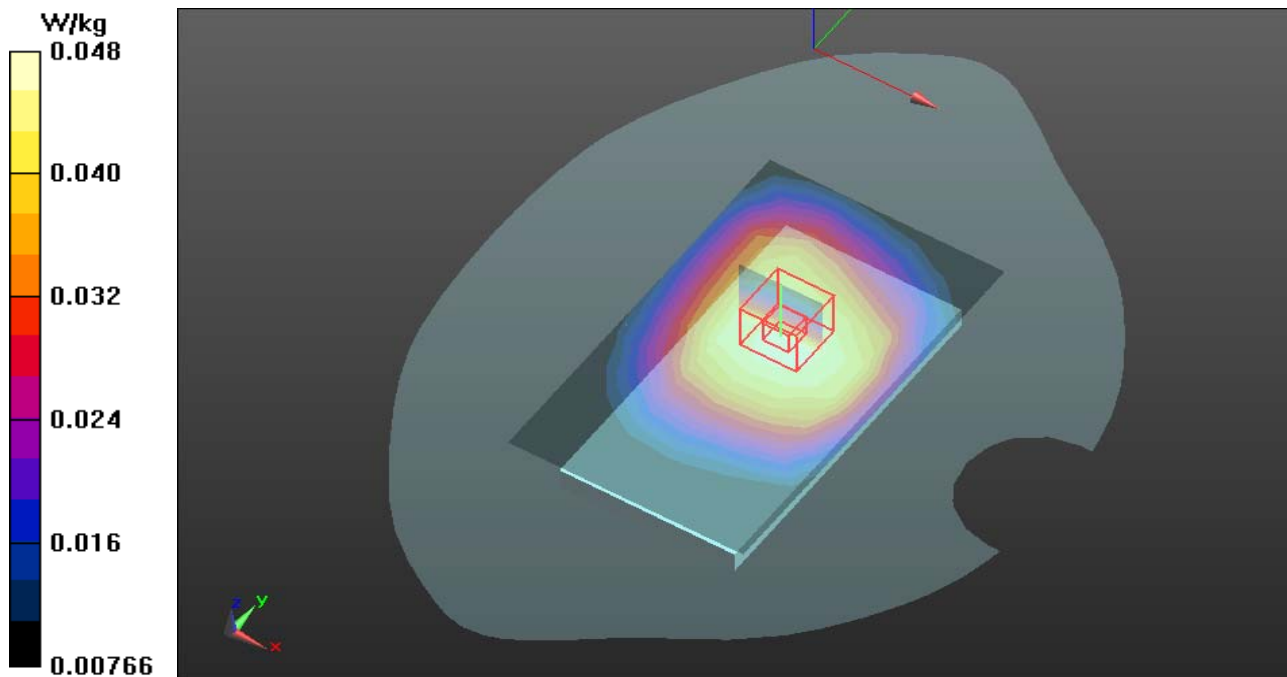



Test Laboratory: Compliance Certification Services Inc.

Date: 3/6/2013

GSM 850-Body Down Low CH128

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 824.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 55.959$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GSM 850/GSM850 Body Down Low CH128/Area Scan (11x7x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.257 W/kg

GSM 850/GSM850 Body Down Low CH128/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=8$ mm

Reference Value = 15.755 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.132 W/kg

Maximum value of SAR (measured) = 0.251 W/kg

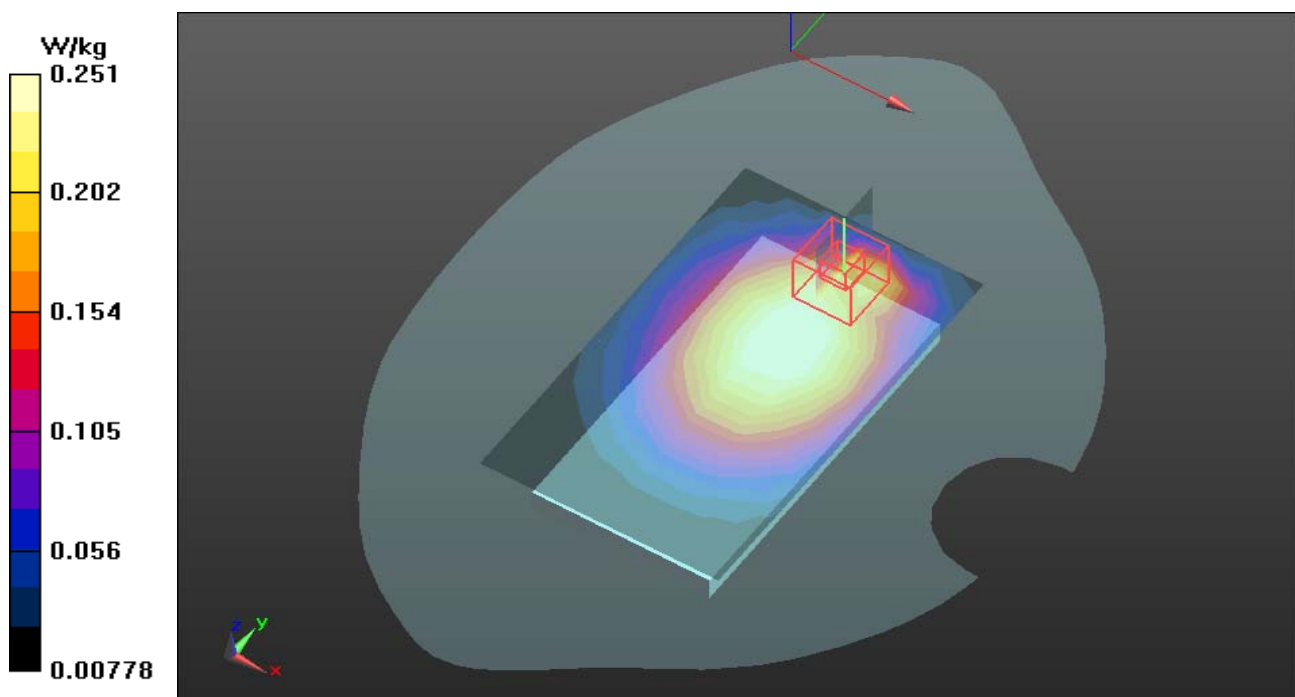



Test Laboratory: Compliance Certification Services Inc.

Date: 3/6/2013

GSM 850-Body Top Top Low CH128

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 824.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 55.959$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GSM 850/GSM850 Body Top Low CH128/Area Scan (4x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0281 W/kg

GSM 850/GSM850 Body Top Low CH128/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 5.144 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0370 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0304 W/kg

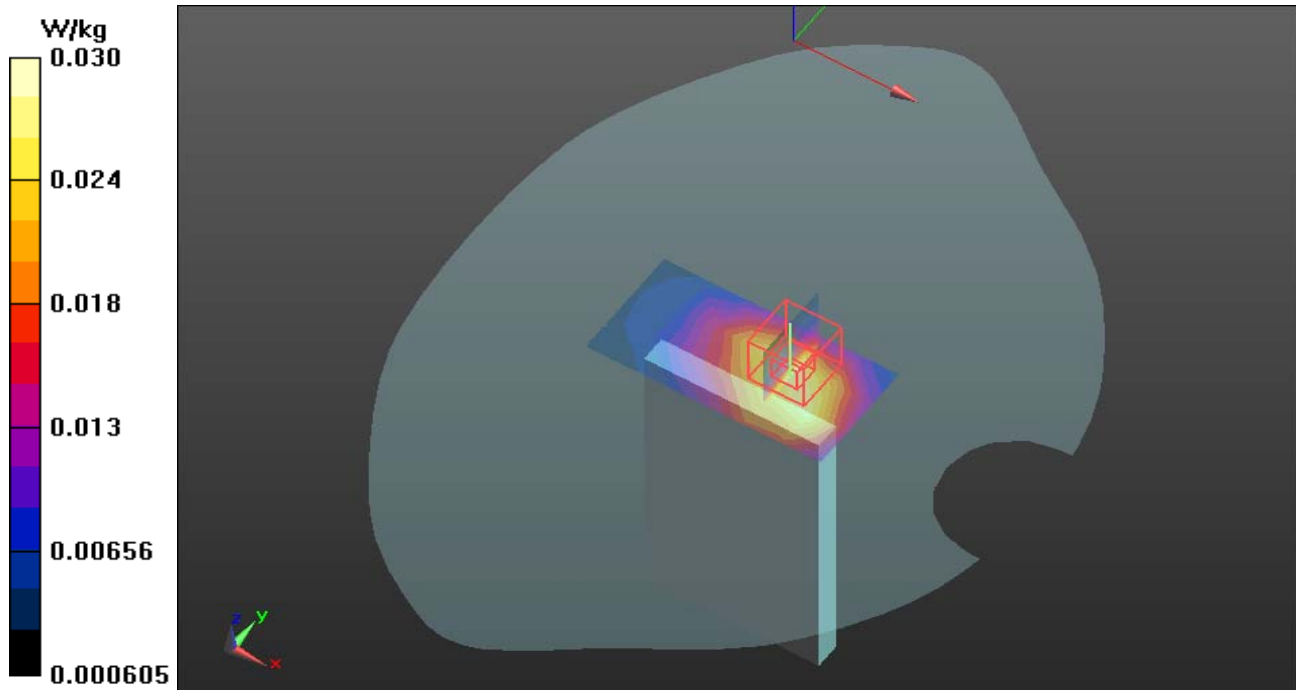



Test Laboratory: Compliance Certification Services Inc.

Date: 3/6/2013

GSM 850-Body Left Left Low CH128

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 824.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 55.959$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GSM 850/GSM850 Body Left Low CH128/Area Scan (7x4x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0978 W/kg

GSM 850/GSM850 Body Left Low CH128/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 10.770 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.0998 W/kg

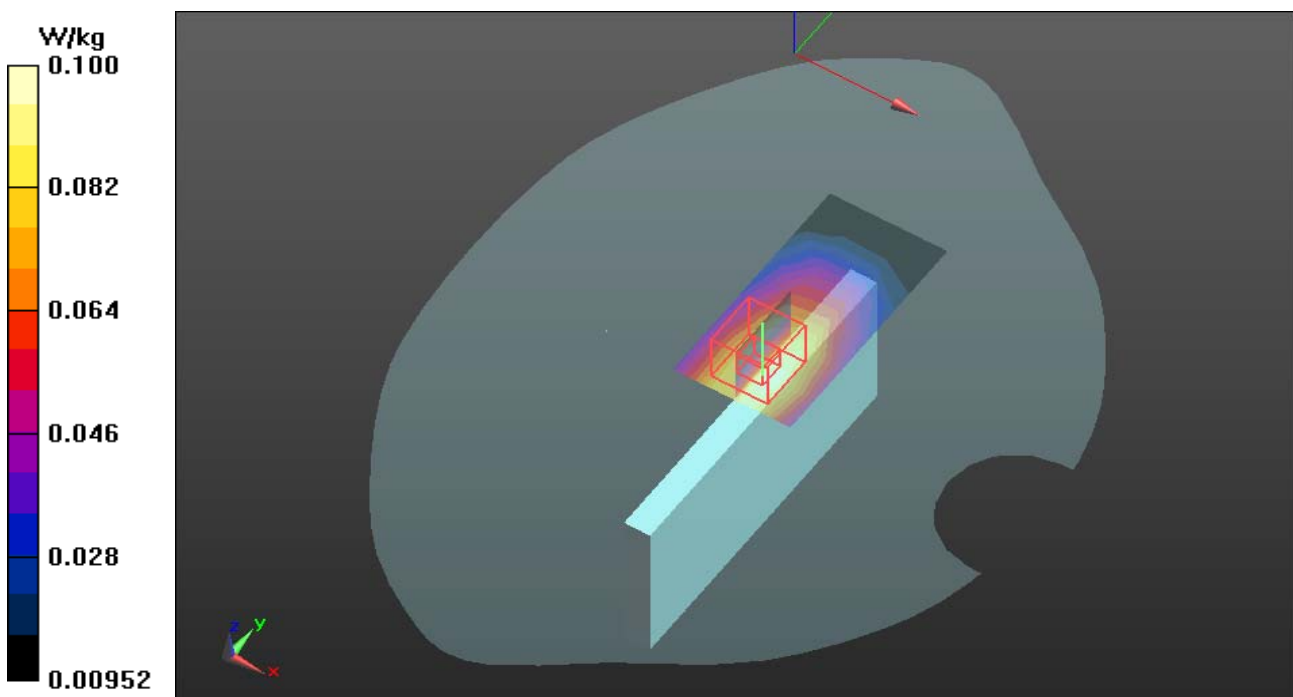



Test Laboratory: Compliance Certification Services Inc.

Date: 3/6/2013

GSM 850-Body Right Low CH128

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 824.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 55.959$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.4(1052);

GSM 850/GSM850 Body Right Low CH128/Area Scan (7x4x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0807 W/kg

GSM 850/GSM850 Body Right Low CH128/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 9.931 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.0809 W/kg

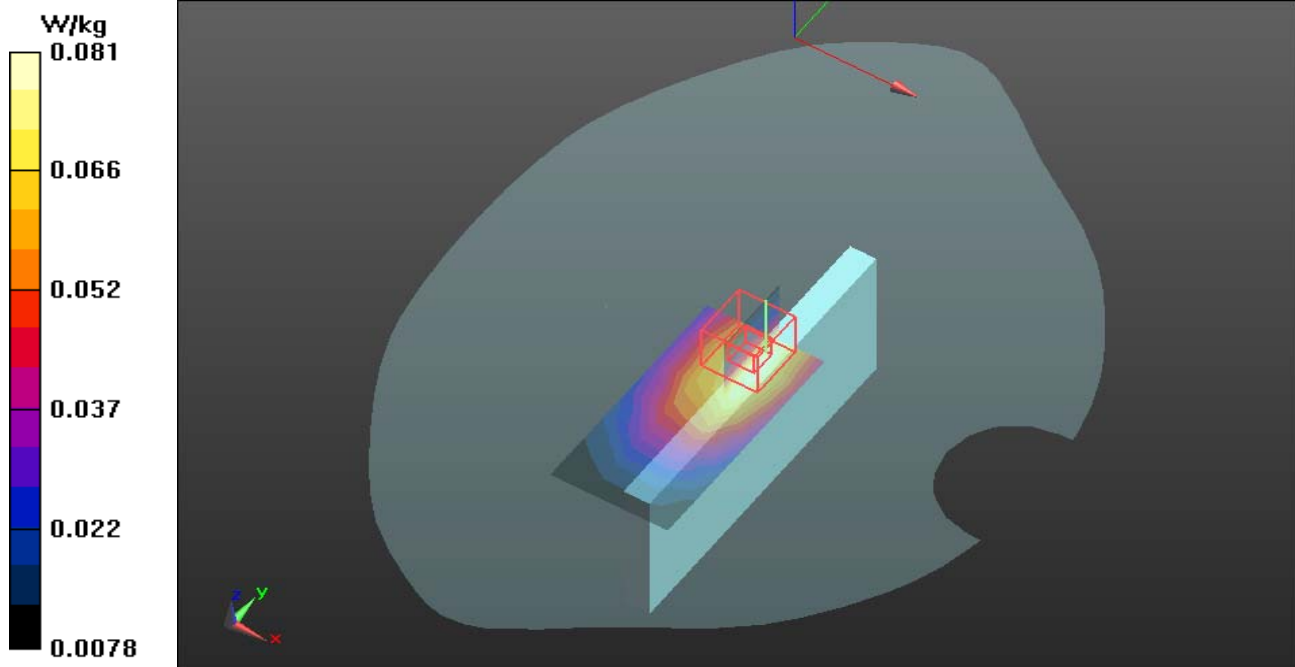



Test Laboratory: Compliance Certification Services Inc.

Date: 3/6/2013

GPRS 850-Body Up Low CH128

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GPRS; Communication System Band: GPRS 850 (824.0 - 849.0 MHz);

Frequency: 824.2 MHz; Duty Cycle: 1:2.0893

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.628$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.03, 9.03, 9.03); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GPRS 850/Body Up Low CH128/Area Scan (11x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0389 W/kg

GPRS 850/Body Up Low CH128/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 6.908 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0480 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0393 W/kg

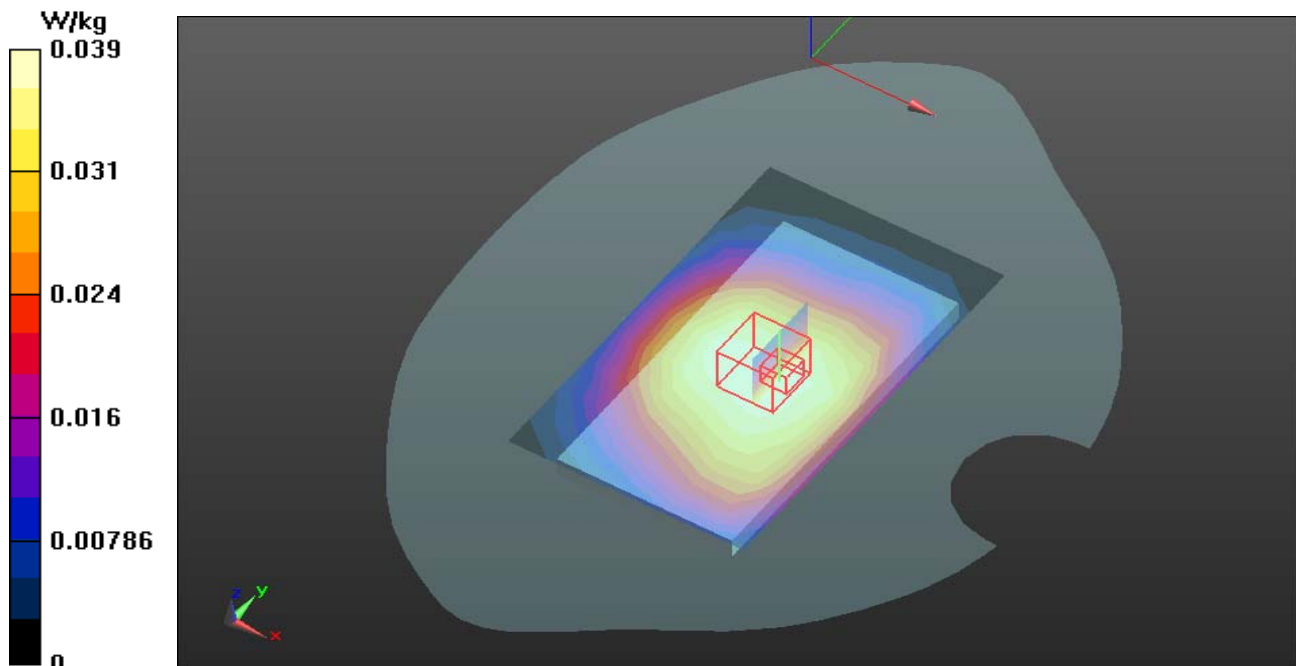



Test Laboratory: Compliance Certification Services Inc.

Date: 3/6/2013

GPRS 850-Body Down Low CH128

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 824.2 MHz; Duty Cycle: 1:2.0893

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.628$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.03, 9.03, 9.03); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GPRS 850/GSM850 Body Down Low CH128/Area Scan (11x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.261 W/kg

GPRS 850/GSM850 Body Down Low CH128/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 16.916 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.385 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.301 W/kg

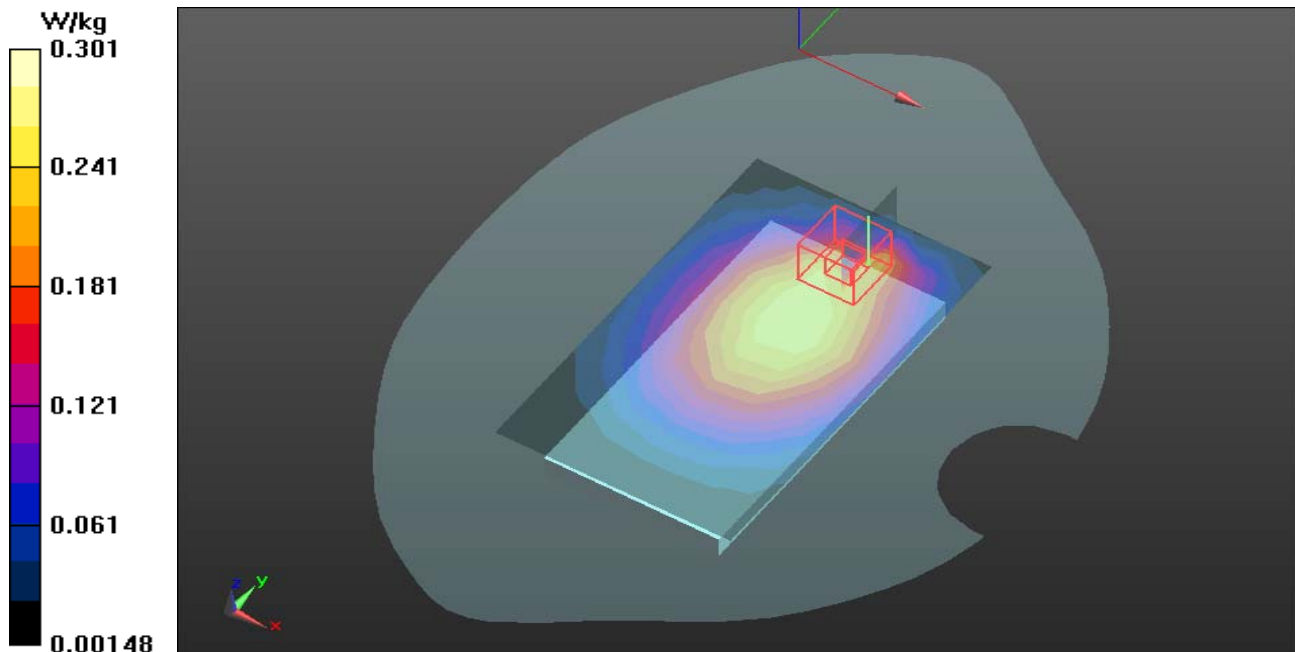



Test Laboratory: Compliance Certification Services Inc.

Date: 3/6/2013

GPRS 850-Body Top Low CH128

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.944$ S/m; $\epsilon_r = 55.137$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GPRS 850/Body Top Low CH128/Area Scan (4x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0333 W/kg

GPRS 850/Body Top Low CH128/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 6.200 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0470 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0384 W/kg

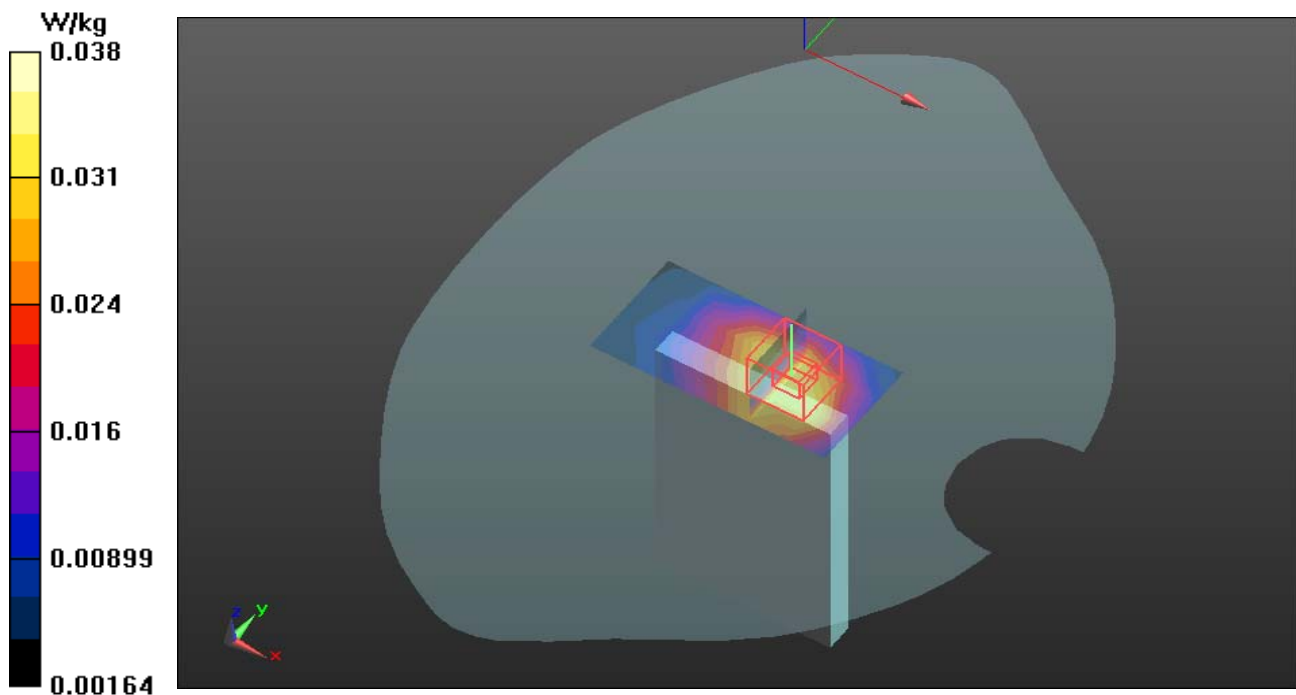



Test Laboratory: Compliance Certification Services Inc.

Date: 3/6/2013

GPRS 850-Body Left Low CH128

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.944$ S/m; $\epsilon_r = 55.137$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GPRS 850/Body Left Low CH128/Area Scan (7x4x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0631 W/kg

GPRS 850/Body Left Low CH128/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 8.247 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0740 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.0650 W/kg

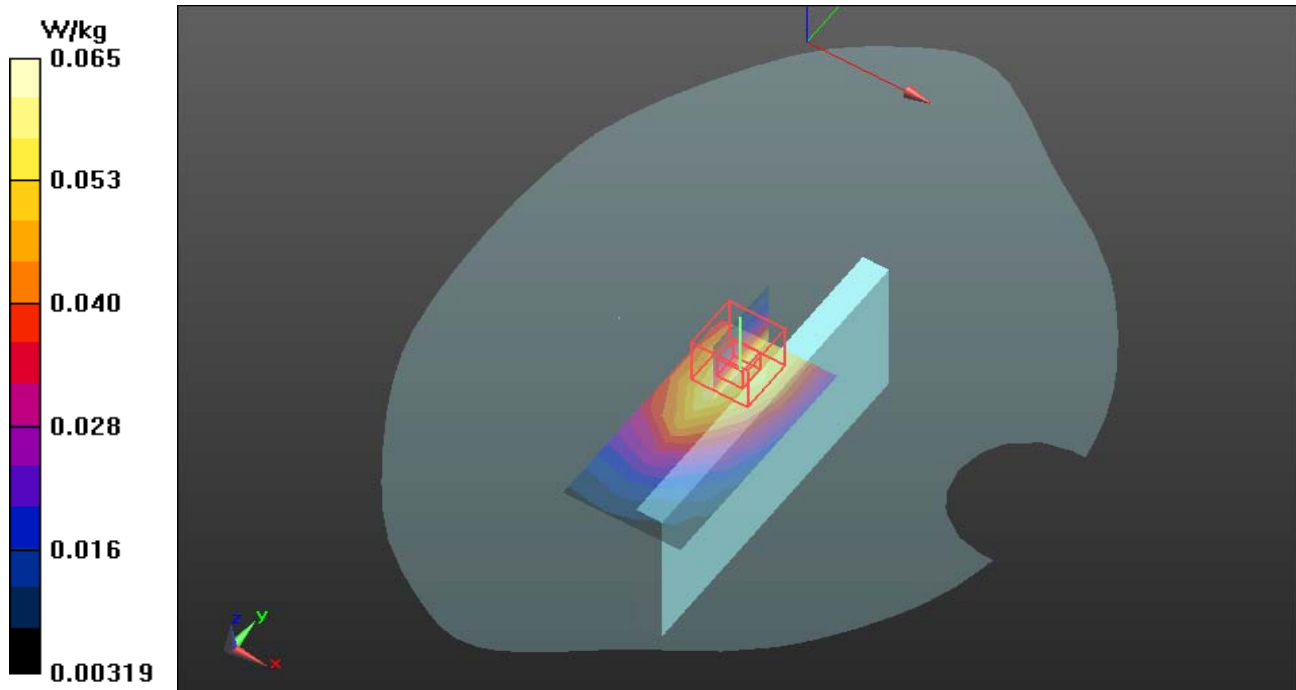



Test Laboratory: Compliance Certification Services Inc.

Date: 3/6/2013

GPRS 850-Body Right Low CH128

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.944$ S/m; $\epsilon_r = 55.137$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.4(1052);

GPRS 850/Body Right Low CH128/Area Scan (7x4x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0546 W/kg

GPRS 850/Body Right Low CH128/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 7.974 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0670 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0585 W/kg

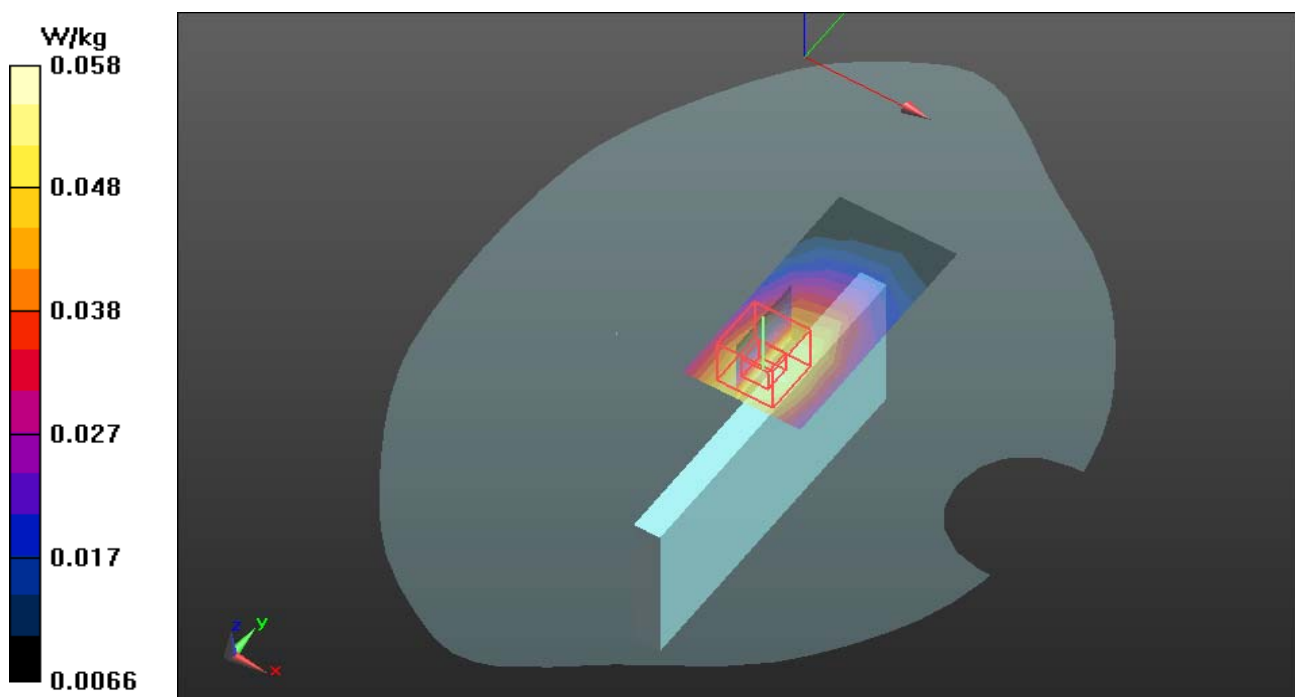



Test Laboratory: Compliance Certification Services Inc.

Date: 3/7/2013

PCS1900-Body Up Low CH512

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1850.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 51.24$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GSM1900/GSM1900 Body Up Low CH512/Area Scan (11x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0724 W/kg

GSM1900/GSM1900 Body Up Low CH512/Zoom Scan (6x6x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 2.841 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.0990 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0774 W/kg

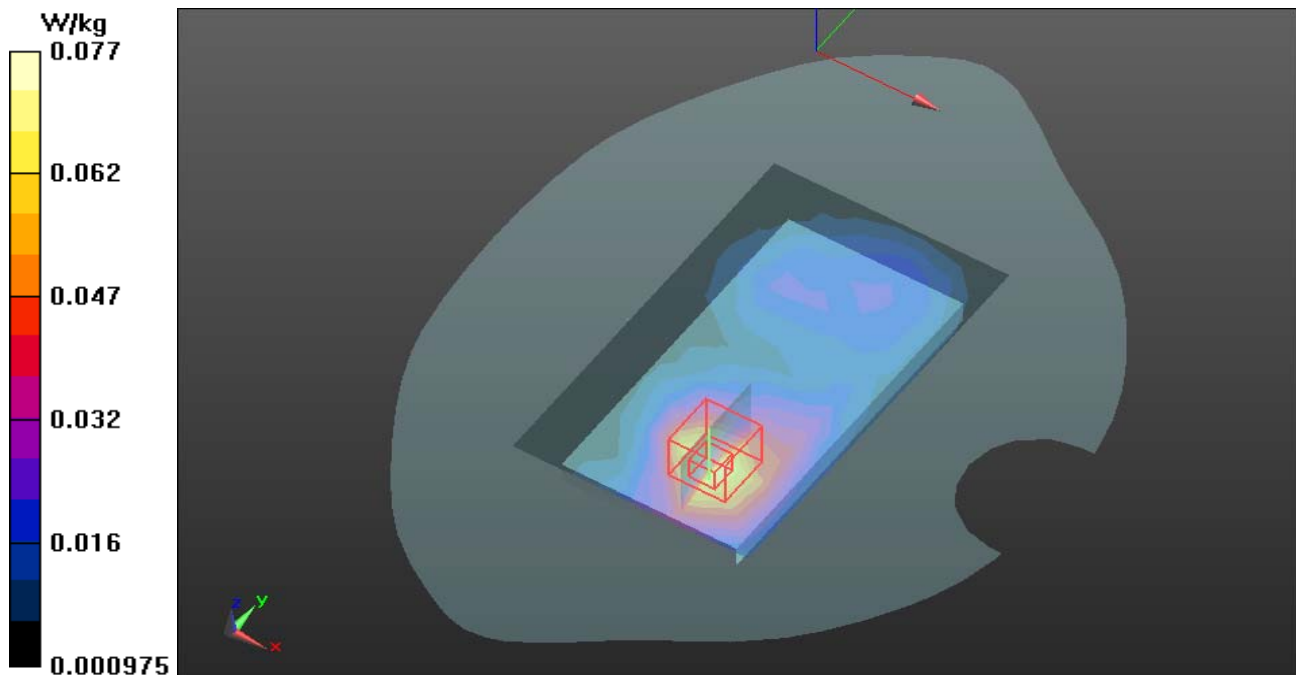



Test Laboratory: Compliance Certification Services Inc.

Date: 3/7/2013

PCS1900-Body Down Low CH512

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1850.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 51.24$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GSM1900/GSM1900 Body Down Low CH512/Area Scan (11x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.422 W/kg

GSM1900/GSM1900 Body Down Low CH512/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm


Reference Value = 6.904 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.700 W/kg

SAR(1 g) = 0.413 W/kg; SAR(10 g) = 0.225 W/kg

Maximum value of SAR (measured) = 0.562 W/kg

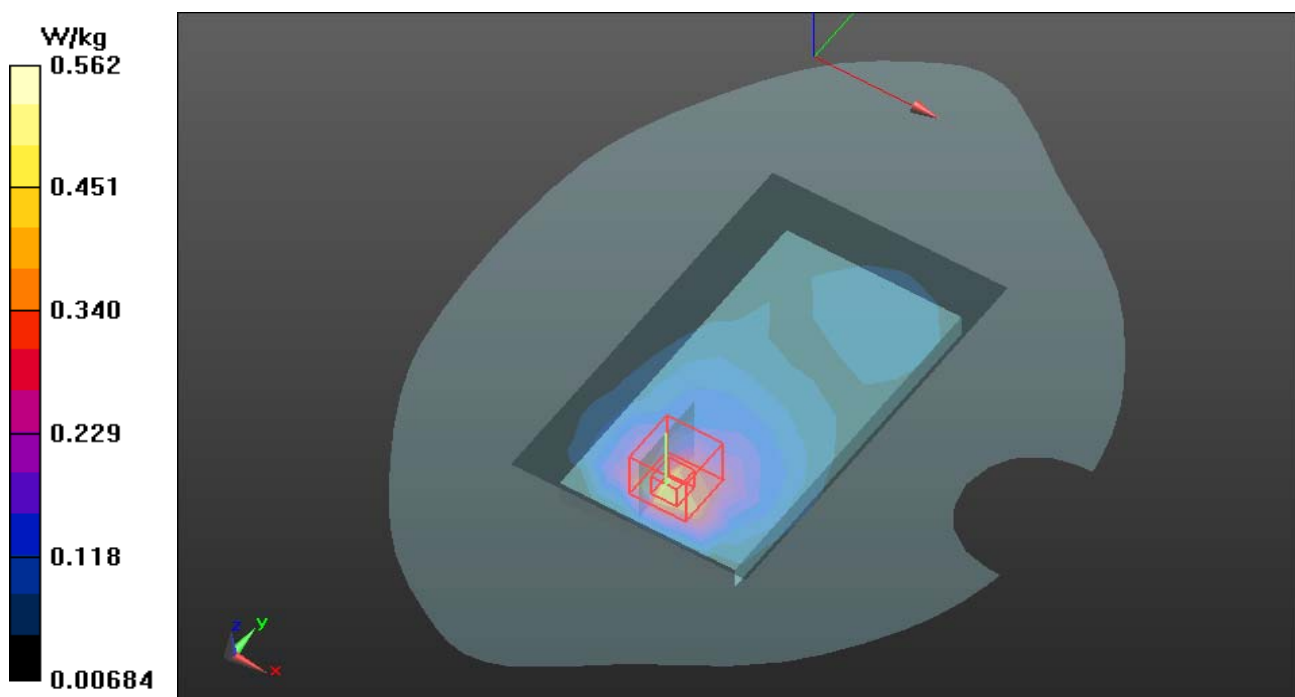

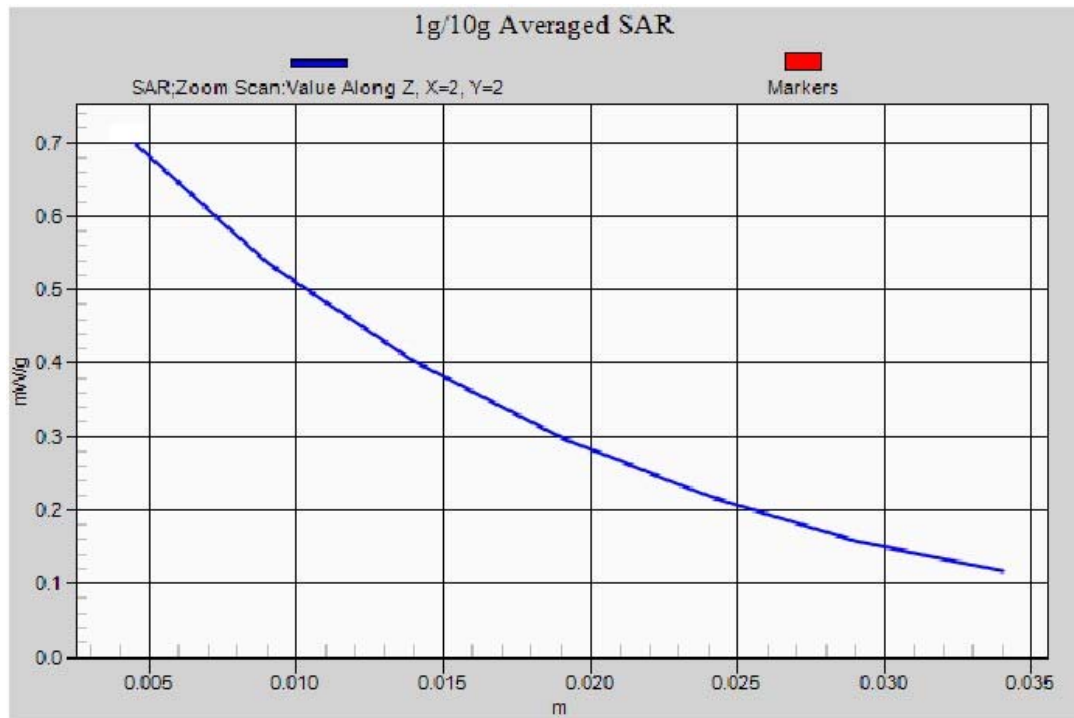



Test Laboratory: Compliance Certification Services Inc.

Date: 3/7/2013

PCS 1900-Body Top Low CH512

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1850.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 51.24$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.4(1052);

GSM1900/GSM1900 Body Top Low CH512/Area Scan (4x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.382 W/kg

GSM1900/GSM1900 Body Top Low CH512/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 10.052 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.575 W/kg

SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.174 W/kg

Maximum value of SAR (measured) = 0.461 W/kg

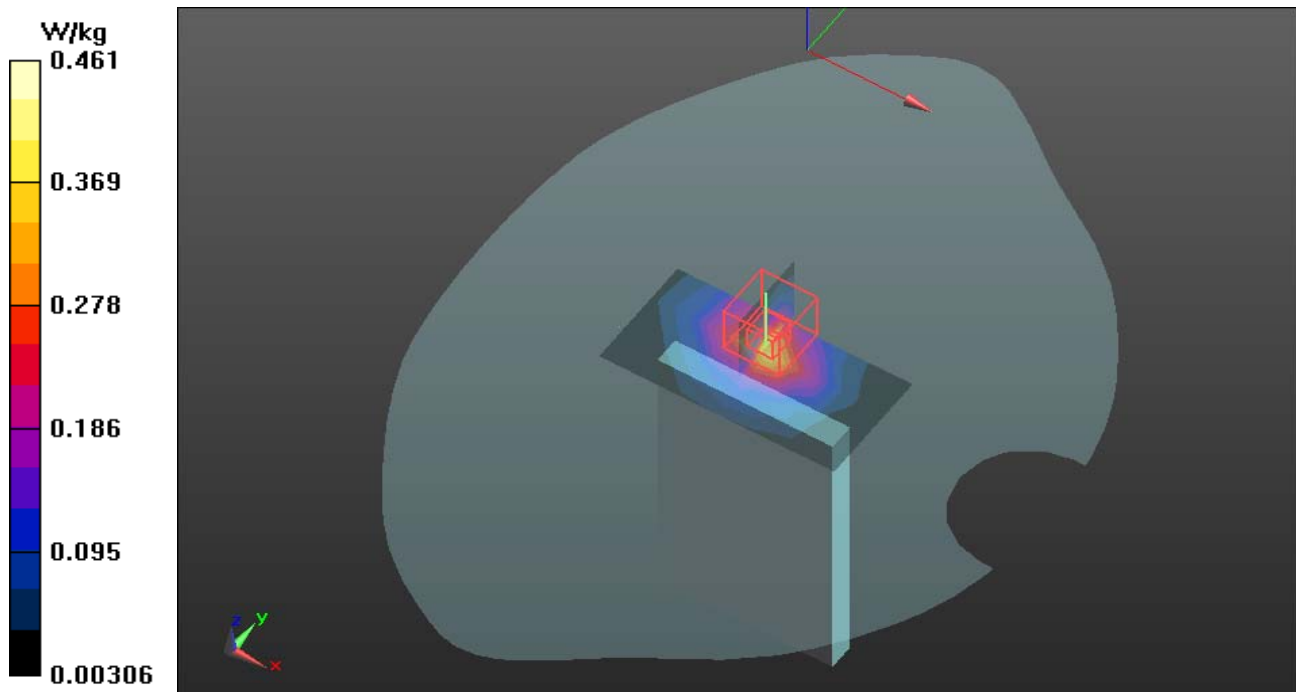



Test Laboratory: Compliance Certification Services Inc.

Date: 3/7/2013

PCS 1900-Body Left Low CH512

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1850.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 51.24$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GSM1900/GSM1900 Body Left Low CH512/Area Scan (7x4x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0171 W/kg

GSM1900/GSM1900 Body Left Low CH512/Zoom Scan (6x6x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 2.470 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00729 W/kg

Maximum value of SAR (measured) = 0.017 W/kg

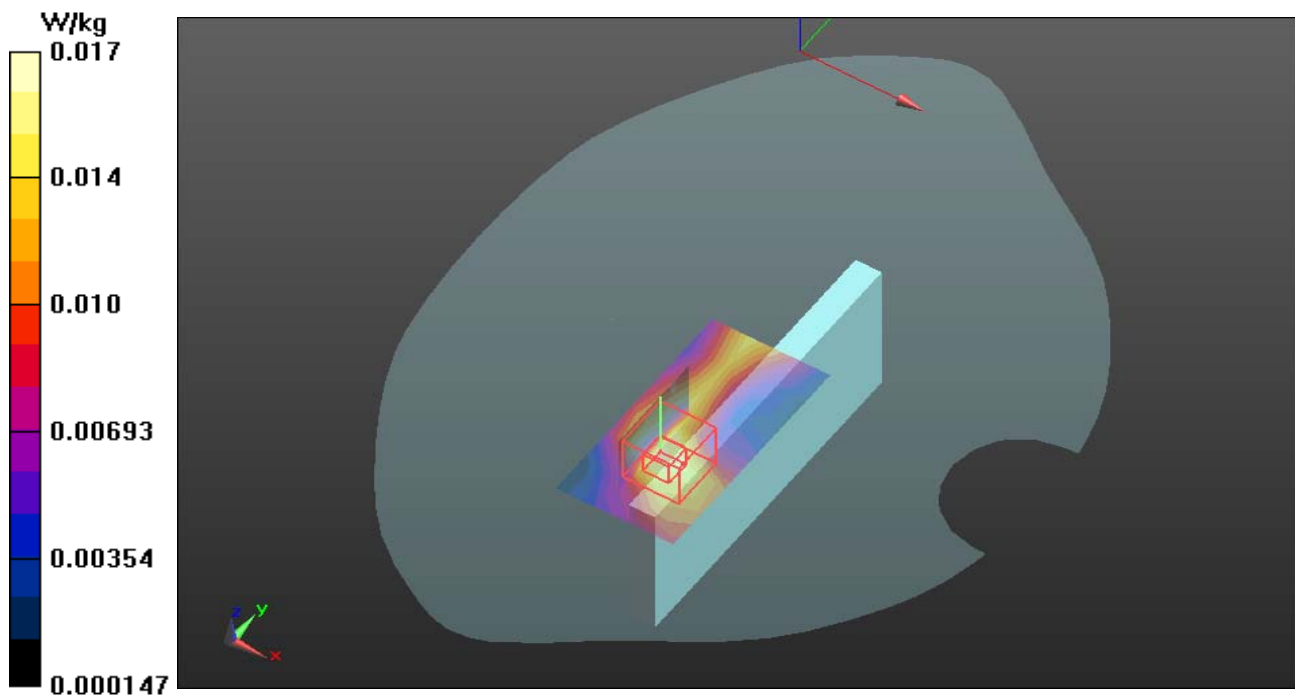



Test Laboratory: Compliance Certification Services Inc.

Date: 3/7/2013

PCS 1900-Body Right Low CH512

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1850.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 51.24$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GSM1900/GSM1900 Body Right Low CH512/Area Scan (7x5x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0148 W/kg

GSM1900/GSM1900 Body Right Low CH512/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 2.073 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0180 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.0076 W/kg

Maximum value of SAR (measured) = 0.0146 W/kg

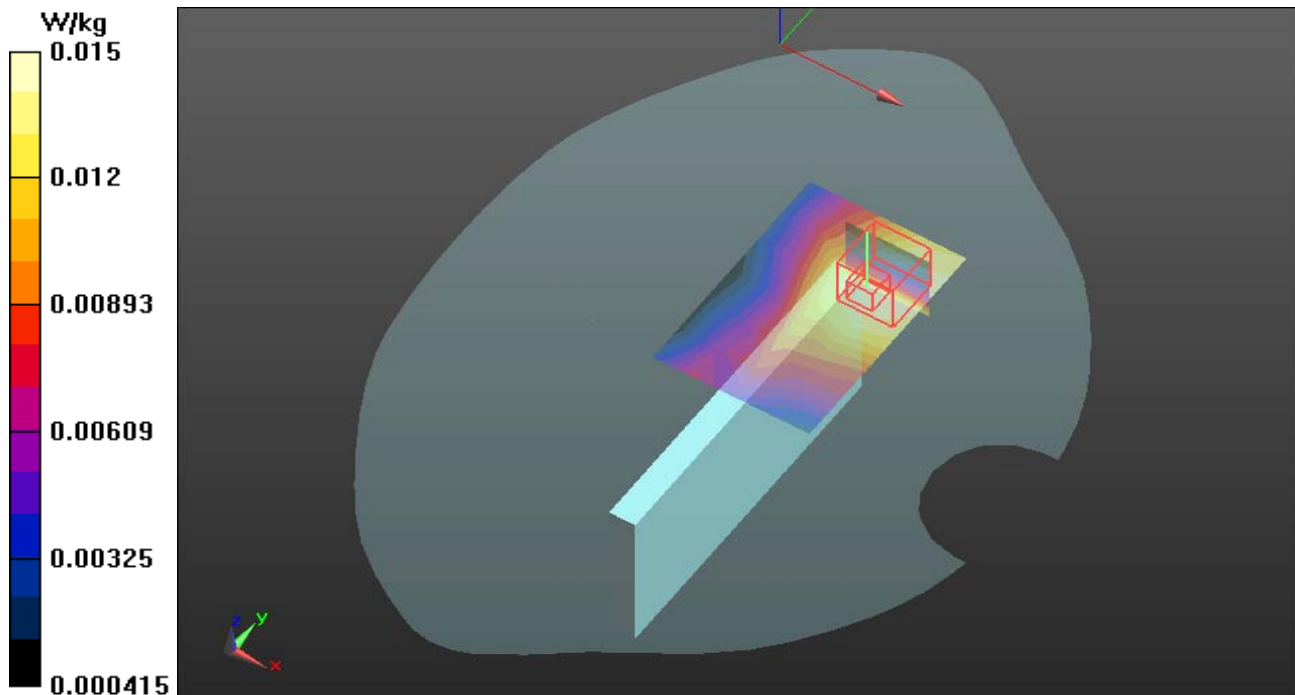



Test Laboratory: Compliance Certification Services Inc.

Date: 3/7/2013

GPRS 1900-Body Up Middle CH661

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1880 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.534$ S/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.4(1052);

GSM1900/GPRS 1900 Body Up Middle CH661/Area Scan (11x7x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0506 W/kg

GSM1900/GPRS 1900 Body Up Middle CH661/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=8$ mm

Reference Value = 2.166 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0700 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0538 W/kg

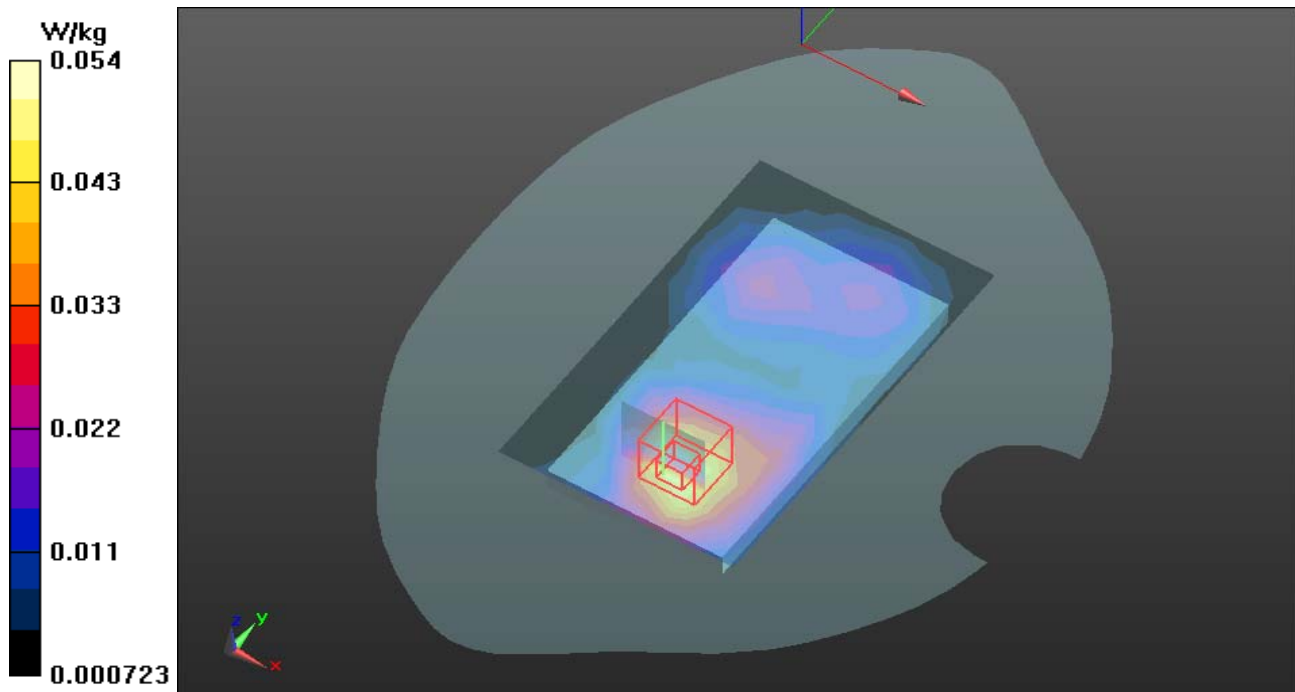



Test Laboratory: Compliance Certification Services Inc.

Date: 3/7/2013

GPRS 1900-Body Down Middle CH661

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1880 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.534$ S/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.4(1052);

GSM1900/GPRS 1900 Body Down Middle CH661/Area Scan (11x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.366 W/kg

GSM1900/GPRS 1900 Body Down Middle CH661/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 5.935 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.639 W/kg

SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.495 W/kg

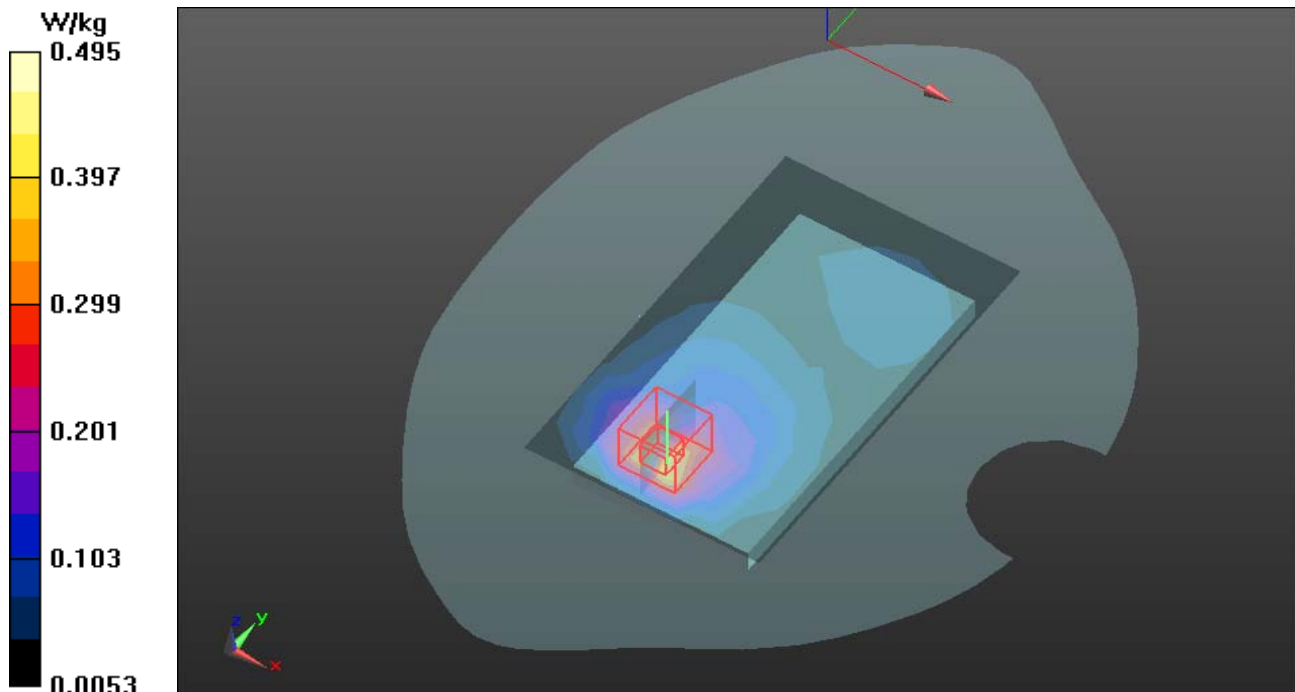



Test Laboratory: Compliance Certification Services Inc.

Date: 3/7/2013

GPRS 1900-Body Top Middle CH661

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1880 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.534$ S/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GSM1900/GPRS 1900 Body Top Middle CH661/Area Scan (4x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.277 W/kg

GSM1900/GPRS 1900 Body Top Middle CH661/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 10.160 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.343 W/kg

SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.107 W/kg

Maximum value of SAR (measured) = 0.289 W/kg

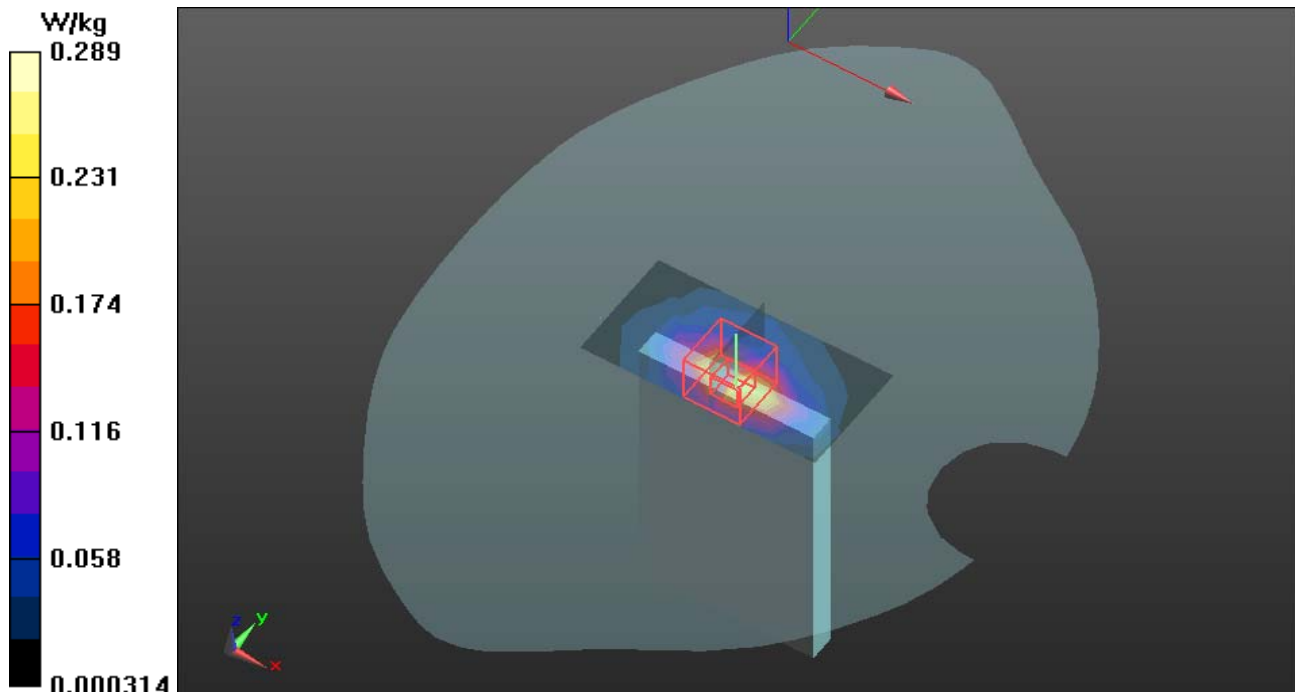



Test Laboratory: Compliance Certification Services Inc.

Date: 3/7/2013

GPRS 1900-Body Left Middle CH661

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1880 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.534$ S/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GSM1900/GPRS 1900 Body Left Middle CH661/Area Scan (7x5x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0302 W/kg

GSM1900/GPRS 1900 Body Left Middle CH661/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 3.457 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0327 W/kg

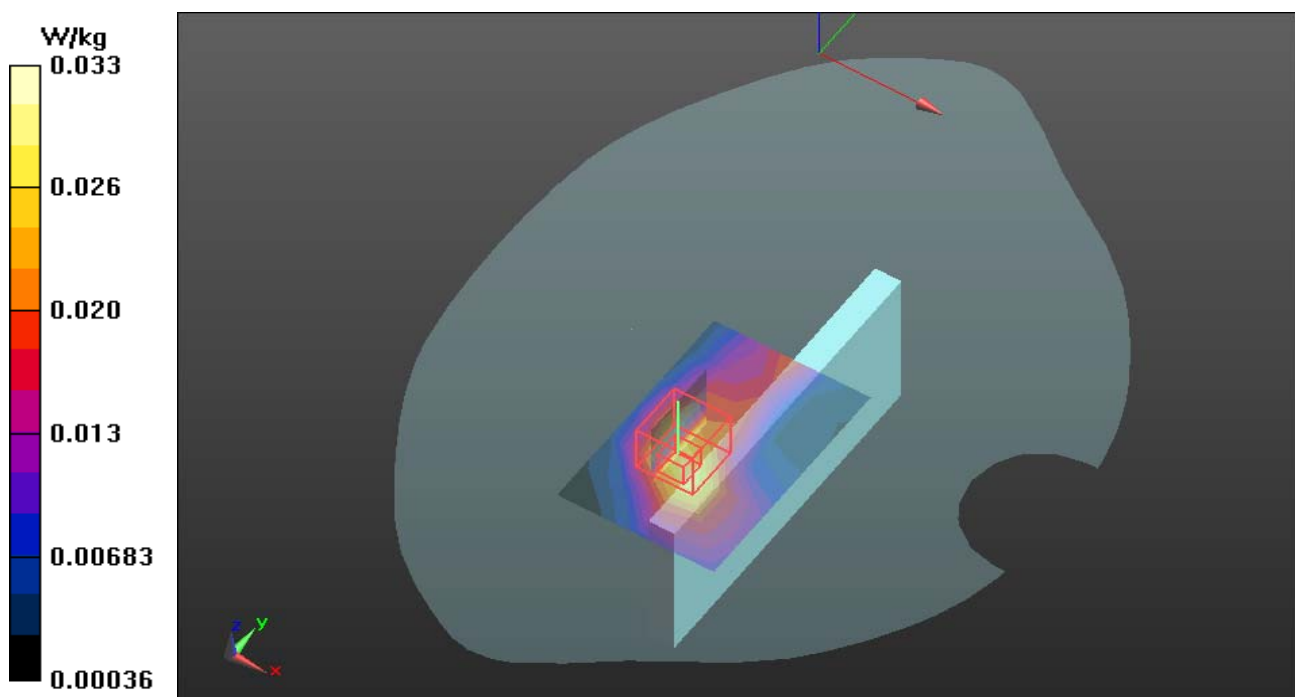



Test Laboratory: Compliance Certification Services Inc.

Date: 3/7/2013

GPRS 1900-Body Right Middle CH661

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1880 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.534$ S/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GSM1900/GPRS 1900 Body Right Middle CH661/Area Scan (7x5x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0172 W/kg

GSM1900/GPRS 1900 Body Right Middle CH661/Zoom Scan (5x5x5)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 1.697 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00855 W/kg

Maximum value of SAR (measured) = 0.0177 W/kg

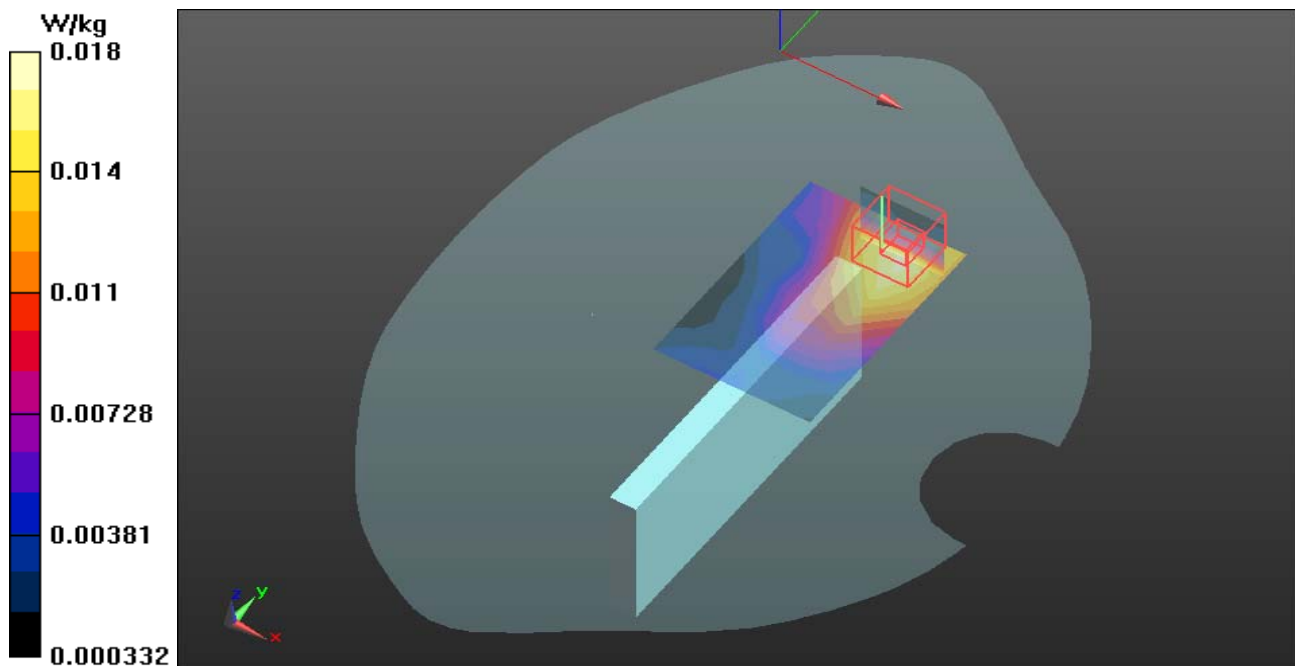



Test Laboratory: Compliance Certification Services Inc.

Date: 3/7/2013

IEEE 802.11b Body UP Middle CH6

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 22.5 °C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.978$ mho/m; $\epsilon_r = 53.231$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/UP Middle CH6/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.252 mW/g

IEEE 802.11b/UP Middle CH6/ Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.487 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.106mW/g

Maximum value of SAR (measured) = 0.257 mW/g

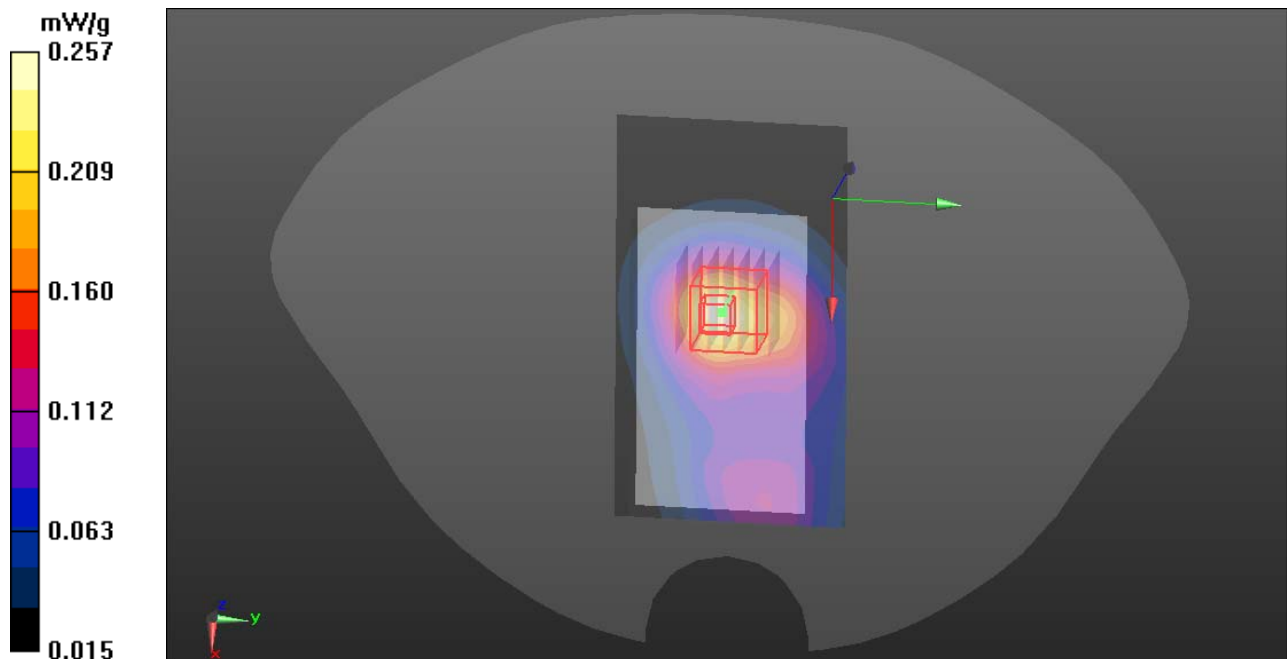



Test Laboratory: Compliance Certification Services Inc.

Date: 3/7/2013

IEEE 802.11b Body Down Middle CH6

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 24 °C Relative humidity: 58% Liquid : Temperature: 22.5 °C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 52.82$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/ Down Middle CH6 /Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.578 mW/g

IEEE 802.11b/ Down Middle CH6 /Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.220 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.342 W/kg

SAR(1 g) = 0.102 mW/g; SAR(10 g) = 0.089 mW/g

Maximum value of SAR (measured) = 0.183 mW/g

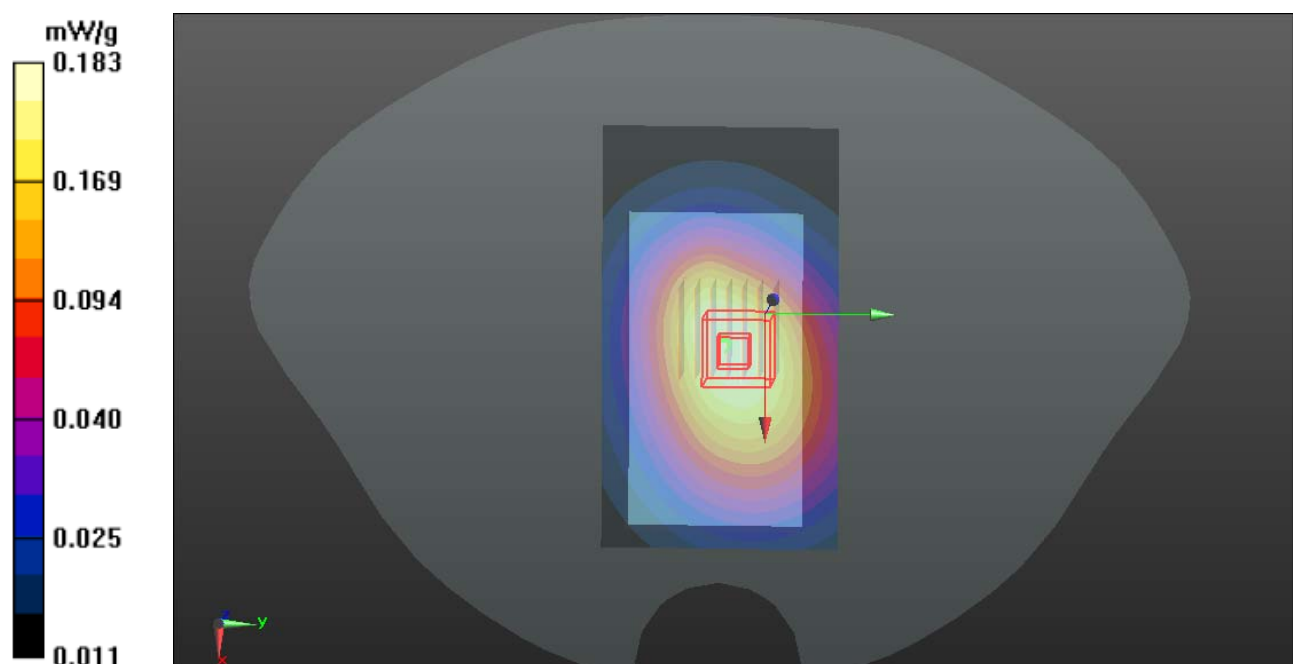



Test Laboratory: Compliance Certification Services Inc.

Date: 3/7/2013

IEEE 802.11b Body Right Middle CH6

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 53.52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/ Right Middle CH6/Area Scan (81x31x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.110 mW/g

IEEE 802.11b/ Right Middle CH6 Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.250 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.288 W/kg

SAR(1 g) = 0.102 mW/g; SAR(10 g) = 0.058 mW/g

Maximum value of SAR (measured) = 0.112 mW/g

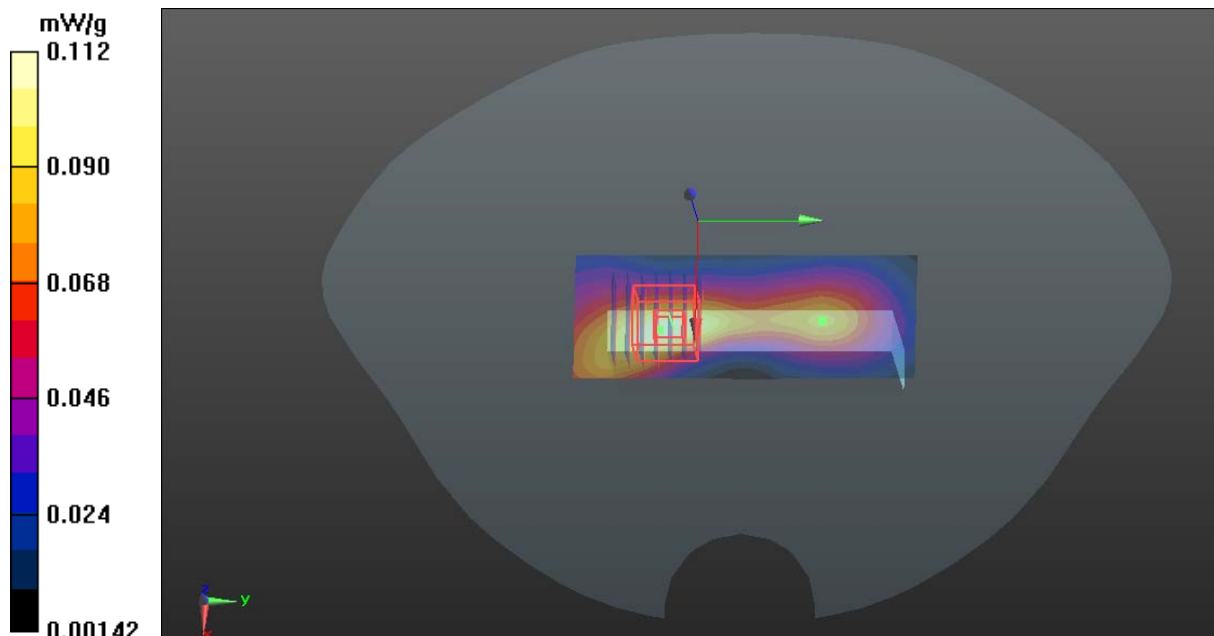



Test Laboratory: Compliance Certification Services Inc.

Date: 3/7/2013

IEEE 802.11b Top Middle CH6

DUT: GSM MOBILE PHONE; Type: 9300; Serial: 863055000237610

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 53.48$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/ Top Middle CH6/Area Scan (81x31x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.110 mW/g

IEEE 802.11b/ Top Middle CH6 Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.850 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.308 W/kg

SAR(1 g) = 0.121 mW/g; SAR(10 g) = 0.088 mW/g

Maximum value of SAR (measured) = 0.152 mW/g

