

FCC TEST REPORT
for
Comat Electronic (Shenzhen) Co., Ltd

2.4G Receiver
Model No.: CR710

Prepared for : Comat Electronic (Shenzhen) Co., Ltd
Address : No.2 Lane 1, Xin'an 3rd 28 District Baoan Shenzhen, China

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road,
Nanshan District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544
Fax: (86) 755-26014772

Report Number : R011606515I
Date of Test : Jun. 20~Jul. 05, 2016
Date of Report : Jul. 06, 2016

TABLE OF CONTENTS

Description

Page

Test Report

1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT).....	5
1.2. Auxiliary Equipment Used during Test.....	6
1.3. Description of Test Facility.....	7
1.4. Measurement Uncertainty.....	7
2. TEST METHODOLOGY.....	8
2.1. Summary of Test Results.....	8
2.2. Description of Test Modes.....	8
3. Test Procedure.....	9
4. CONDUCTED LIMITS.....	10
4.1. Block Diagram of Test Setup.....	10
4.2. Power Line Conducted Emission Measurement Limits (15.207).....	10
4.3. Configuration of EUT on Measurement.....	10
4.4. Operating Condition of EUT.....	10
4.5. Test Procedure.....	11
4.6. Test equipment.....	11
4.7. Power Line Conducted Emission Measurement Results.....	11
5. Radiation Interference.....	16
5.1. Requirements (15.249, 15.209).....	16
5.2. Test Procedure.....	16
5.3 Test Equipment.....	17
5.4. Test Results.....	17
6. Bandedge.....	23
6.1. Requirements (15.249).....	23
6.2. Test Procedure.....	23
6.3. Test Configuration:.....	23
6.4. Test Results.....	24
7. Occupied Bandwidth.....	33
7.1. Requirements.....	33
7.2. Test SET-UP.....	33
7.3 Test Equipment.....	33
7.4. Test Results.....	33
8. ANTENNA APPLICATION.....	36
8.1. Antenna requirement.....	36
8.2. Result.....	36
9. PHOTOGRAPH.....	37
9.1. Photo of Power Line Conducted Emission Measurement.....	37
9.2 Photo of Radiation Emission Test.....	38

APPENDIX I (EXTERNAL PHOTOS).....	39
APPENDIX II (INTERNAL PHOTOS).....	42

Anbotech

TEST REPORT

Applicant : Comat Electronic (Shenzhen) Co., Ltd
Manufacturer : Comat Electronic (Shenzhen) Co., Ltd
EUT : 2.4G Receiver
Model No. : CR710
Serial No. : N.A.
Trade Mark : COMAT
Rating : DC 5V, 22MA

Measurement Procedure Used:

FCC Part15 Subpart C, Paragraph 15.207, 15.249 & 15.209

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without

written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Test :

Jun. 20~Jul. 05, 2016

Prepared by :

Kebo Zhang

(Tested Engineer / Kebo Zhang)

Reviewer :

Dolly mo

(Project Manager / Dolly Mo)

Approved & Authorized Signer :

Tom Chen

(Manager / Tom Chen)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : 2.4G Receiver

Model Number : CR710

Test Power Supply : AC 120V, 60Hz for PC/
AC 240V, 60Hz for PC

Frequency : 2406-2477MHz

No. of Channels : 78 Channels, 1MHz Spacing

Antenna Specification : PCB Antenna:-2.0 dBi

Applicant : Comat Electronic (Shenzhen) Co., Ltd
Address : No.2 Lane 1, Xin'an 3rd 28 District Baoan Shenzhen, China

Manufacturer : Comat Electronic (Shenzhen) Co., Ltd
Address : No.2 Lane 1, Xin'an 3rd 28 District Baoan Shenzhen, China

Factory : Comat Electronic (Shenzhen) Co., Ltd
Address : No.2 Lane 1, Xin'an 3rd 28 District Baoan Shenzhen, China

Date of receipt : Jun. 20, 2016

Date of Test : Jun. 20~Jul. 05, 2016

1.2. Auxiliary Equipment Used during Test

PC	: Manufacturer: DELL M/N: Optiplex 3020 MT S/N: CN-079V51-70163-4AD-089K-A00 Input Rating: AC 100-240V, 50-60Hz 5.4A CE , FCC DOC, CCC
MONITOR	: Manufacturer: DELL M/N: UZ2215Hf S/N: CN-035VN6-72872-45A-A3AB Input Rating: AC 100-240V, 50-60Hz, 1.5A Output Rating: DC 19.5V, 4.62A TUV-GS FCC CE KCC VCCI
MOUSE	: Manufacturer: DELL M/N: MS111-T S/N: CN-0KW2YH-71616-488-1CBJ Input Rating: DC 5V,0.1A Cable: 1.8m, unshielded CE FCC VCCI KCC TUV-GS
Wireless Keyboard	: LK-591G
Printer	: Manufacturer: Brother M/N: MFC-3360C S/N: N/A CE, FCC:DOC
Power Line	: Non-Shielded, 1.5m
VGA Cable	: Non-Shielded, 1.5m

1.3. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 752021

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, Jul. 06, 2016

IC-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A-1, Jun. 13, 2016.

Test Location

All Emissions tests were performed at
Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC
Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong,
China

1.4. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal) Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and FCC Part 15, Paragraph 15.249.

2.1. Summary of Test Results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
§15.207 (a)	Conducted Emission	PASS	Complies
§15.205	Restricted Band of Operation	PASS	Complies
§15.209 §15.249(a)	Radiated Emission	PASS	Complies
§15.215(c)	20dB Bandwidth Test	PASS	Complies
§15.203	Antenna Requirement	PASS	Complies

2.2. Description of Test Modes

The EUT has been tested under operating condition.

Manual control the EUT for staying in continuous transmitting mode.

Channel Low(2408MHz), Channel Middle(2440MHz) and Channel High(2474MHz) are chosen for the final testing.

3. Test Procedure

GENERAL: This report shall NOT be reproduced except in full without the written approval of Shenzhen Anbotek Compliance Laboratory Limited. The EUT was transmitting a test signal during the testing.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.10-2013 using a spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz up to 1.0GHz and 1.0MHz with a video BW of 3.0MHz above 1.0GHz. The ambient temperature of the EUT was 74.3oF with a humidity of 69%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS
20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m


ANSI STANDARD C63.10-2013 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

4. Conducted Limits

4.1. Block Diagram of Test Setup

4.1.1. Block diagram of connection between the EUT and simulators

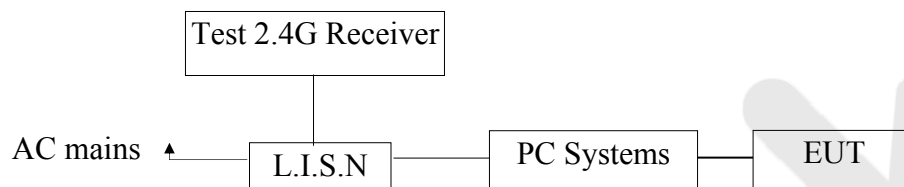

4.2. Power Line Conducted Emission Measurement Limits (15.207)

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

4.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

4.4. Operating Condition of EUT

- 4.4.1. Setup the EUT and simulator as shown as Section 4.1.
- 4.4.2. Turn on the power of all equipment.
- 4.4.3. Let the EUT work in test mode (On) and measure it.

4.5. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test results are reported on Section 4.6.

4.6. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Two-Line V-network	Rohde & Schwarz	ENV216	100055	Apr. 17, 2016	1 Year
2.	EMI Test 2.4G Receiver	Rohde & Schwarz	ESCI	100627	Apr. 17, 2016	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Apr. 17, 2016	1 Year

4.7. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150KHz to 30 MHz is investigated.


Please refer the following pages.

CONDUCTED EMISSION TEST DATA

Test Site: 1# Shielded Room
Operating Condition: ON
Test Specification: AC 120V, 60Hz for PC
Comment: Live Line
Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

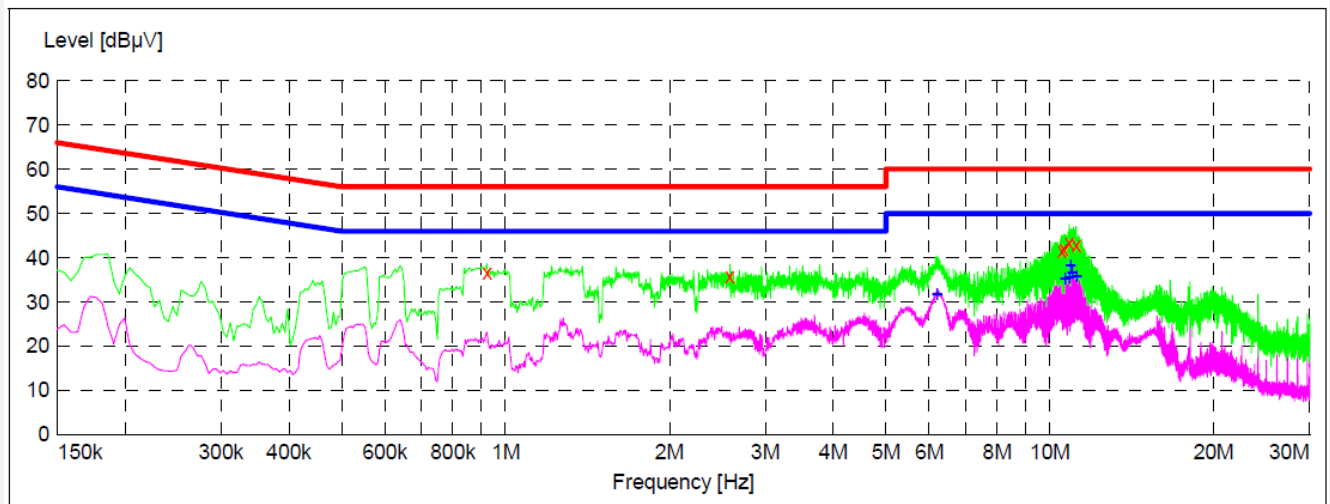

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.924000	36.60	20.1	56	19.4	QP	L1	GND
2.584000	35.80	20.4	56	20.2	QP	L1	GND
10.531000	41.50	20.6	60	18.5	QP	L1	GND
10.589500	42.10	20.6	60	17.9	QP	L1	GND
10.855000	43.30	20.6	60	16.7	QP	L1	GND
11.183500	42.90	20.6	60	17.1	QP	L1	GND


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
6.202000	31.80	20.5	50	18.2	AV	L1	GND
10.661500	35.20	20.6	50	14.8	AV	L1	GND
10.859500	35.50	20.6	50	14.5	AV	L1	GND
10.922500	38.40	20.6	50	11.6	AV	L1	GND
10.990000	36.60	20.6	50	13.4	AV	L1	GND
11.188000	35.90	20.6	50	14.1	AV	L1	GND

CONDUCTED EMISSION TEST DATA

Test Site: 1# Shielded Room
Operating Condition: ON
Test Specification: AC 120V, 60Hz for PC
Comment: Neutral Line
Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

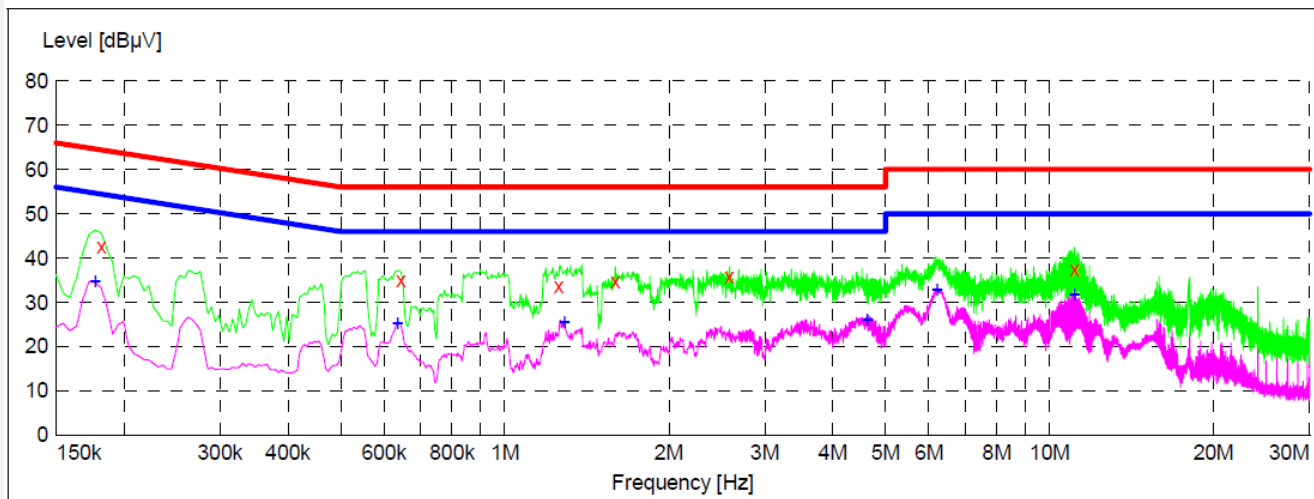

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.181500	42.60	20.1	64	21.8	QP	N	GND
0.645000	35.00	20.1	56	21.0	QP	N	GND
1.256500	33.80	20.2	56	22.2	QP	N	GND
1.594000	34.80	20.3	56	21.2	QP	N	GND
2.584000	35.70	20.4	56	20.3	QP	N	GND
11.107000	37.40	20.6	60	22.6	QP	N	GND


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.177000	34.80	20.1	55	19.8	AV	N	GND
0.636000	25.30	20.1	46	20.7	AV	N	GND
1.288000	25.60	20.2	46	20.4	AV	N	GND
4.622500	26.00	20.5	46	20.0	AV	N	GND
6.211000	32.80	20.5	50	17.2	AV	N	GND
11.116000	31.80	20.6	50	18.2	AV	N	GND

CONDUCTED EMISSION TEST DATA

Test Site: 1# Shielded Room
Operating Condition: ON
Test Specification: AC 240V, 60Hz for PC
Comment: Live Line
Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

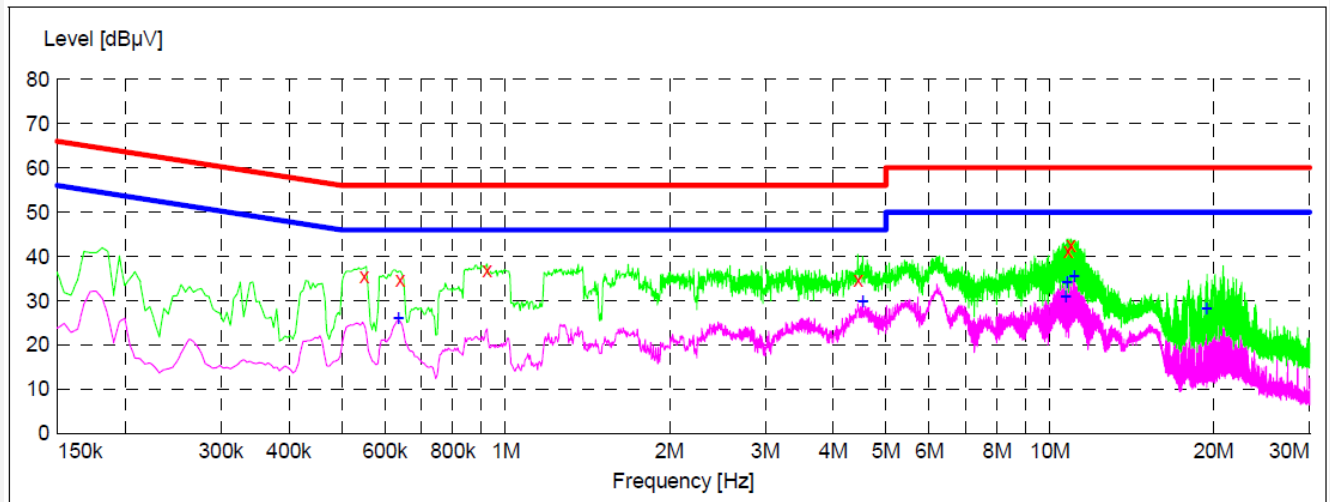

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.550500	35.60	20.1	56	20.4	QP	L1	GND
0.640500	34.90	20.1	56	21.1	QP	L1	GND
0.924000	37.00	20.1	56	19.0	QP	L1	GND
4.438000	34.80	20.5	56	21.2	QP	L1	GND
10.792000	41.40	20.6	60	18.6	QP	L1	GND
10.936000	42.60	20.6	60	17.4	QP	L1	GND


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.636000	26.00	20.1	46	20.0	AV	L1	GND
4.532500	29.90	20.5	46	16.1	AV	L1	GND
10.675000	31.00	20.6	50	19.0	AV	L1	GND
10.738000	34.20	20.6	50	15.8	AV	L1	GND
11.066500	35.50	20.6	50	14.5	AV	L1	GND
19.418500	28.40	20.8	50	21.6	AV	L1	GND

CONDUCTED EMISSION TEST DATA

Test Site: 1# Shielded Room
Operating Condition: ON
Test Specification: AC 240V, 60Hz for PC
Comment: Neutral Line
Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

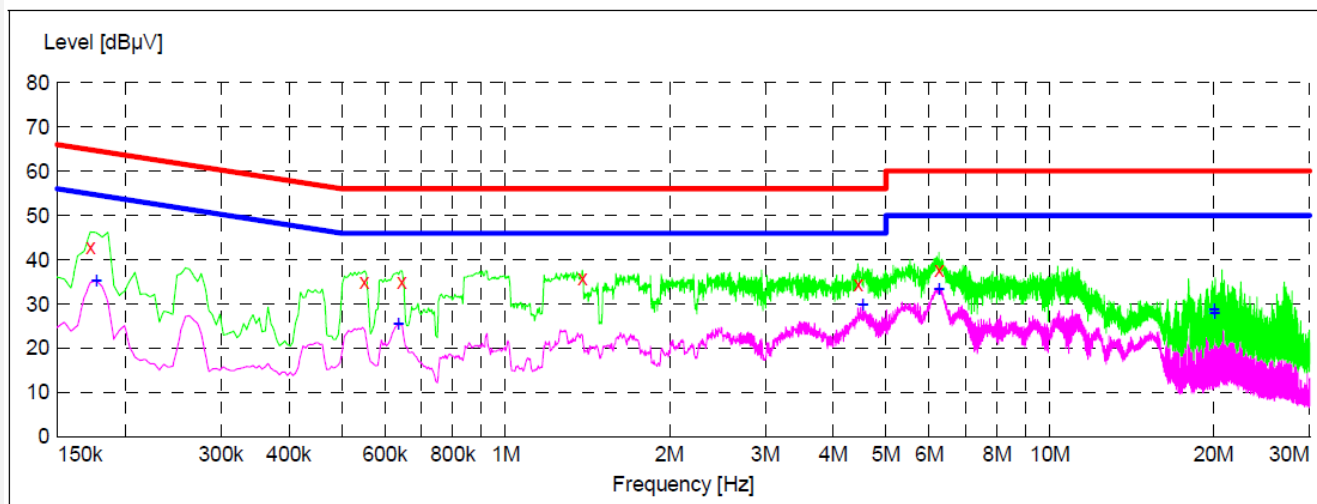

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.172500	42.80	20.1	65	22.0	QP	N	GND
0.550500	35.00	20.1	56	21.0	QP	N	GND
0.645000	35.00	20.1	56	21.0	QP	N	GND
1.382500	35.70	20.2	56	20.3	QP	N	GND
4.438000	34.60	20.5	56	21.4	QP	N	GND
6.251500	37.80	20.5	60	22.2	QP	N	GND

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.177000	35.20	20.1	55	19.4	AV	N	GND
0.636000	25.60	20.1	46	20.4	AV	N	GND
4.532500	29.80	20.5	46	16.2	AV	N	GND
6.251500	33.50	20.5	50	16.5	AV	N	GND
20.039500	28.90	20.8	50	21.1	AV	N	GND
20.089000	28.10	20.8	50	21.9	AV	N	GND

5. Radiation Interference

5.1. Requirements (15.249, 15.209)

FIELD STRENGTH of Fundamental: @3M 902-928 MHZ 2.4-2.4835 GHz 94 dB μ V/m @3m	FIELD STRENGTH of Harmonics 54 dB μ V/m @3m	S15.209 30 - 88 MHz 88 - 216 MHz 216 - 960 MHz ABOVE 960 MHz	40 dBuV/m 43.5 46 54dBuV/m
--	---	--	---

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation.

5.2. Test Procedure

For below 1GHz, the EUT is placed on a turn table which is 0.8 meter high above the ground. For above 1GHz, the EUT is placed on a turn table which is 1.5 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

All readings from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz. All reading are above 1GHz, peak & average values with a resolution bandwidth of 1MHz. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation. The test results are listed in Section 4.3.

5.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	Apr. 17, 2016	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	Apr. 17, 2016	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Apr. 17, 2016	1 Year
4.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 20, 2016	1 Year
5.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 20, 2016	1 Year
6.	Pre-amplifier	SONOMA	310N	186860	Apr. 17, 2016	1 Year
7.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
8	Power Sensor	DAER	RPR3006W	15I00041SN046	Jun 30, 2015	1 Year
9	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Jun 30, 2015	1 Year
10	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Jun 30, 2015	1 Year
11	Signal Generator	Agilent	E4421B	MY41000743	Jun 30, 2015	1 Year
12	DC Power supply	IV	IV-8080	YQSB0096	Jun 30, 2015	1 Year
13	TEMP&HUMI PROGRAMMABLE CHAMBER	Bell Group	BE-THK-150M8	SE-0137	Mar 16, 2016	1 Year


5.4. Test Results

PASS.

Please refer the following pages. Only the worst case (x orientation).


Below 1GHz:

Job No.:	0116065151	Polarziation:	Horizontal
Standard:	(RE)FCC PART15 C _3m	Power Source:	DC 5V Via USB Port
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Mode:	ON	Distance:	3m
Note:	30-1000MHz		

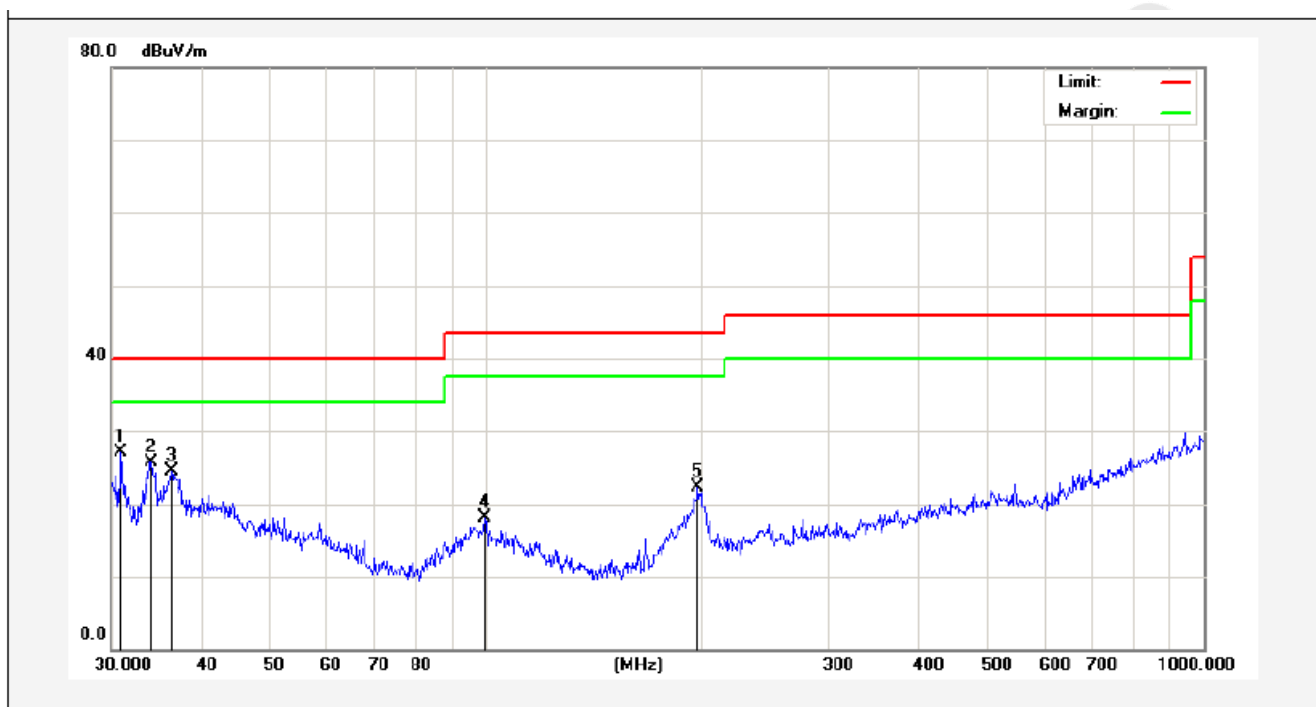

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.9618	43.57	-16.44	27.13	40.00	-12.87	peak			
2	34.0363	40.57	-14.80	25.77	40.00	-14.23	peak			
3	36.3813	37.63	-13.21	24.42	40.00	-15.58	peak			
4	99.5279	35.95	-17.79	18.16	43.50	-25.34	peak			
5	197.2000	40.13	-17.89	22.24	43.50	-21.26	peak			

Job No.: 011606515I Polarization: Vertical
Standard: (RE)FCC PART15 C_3m Power Source: DC 5V Via USB Port
Test item: Radiation Test Temp.(C)/Hum.(%RH): 24.3(C)/55%RH
Mode: ON Distance: 3m
Note: 30-1000MHz

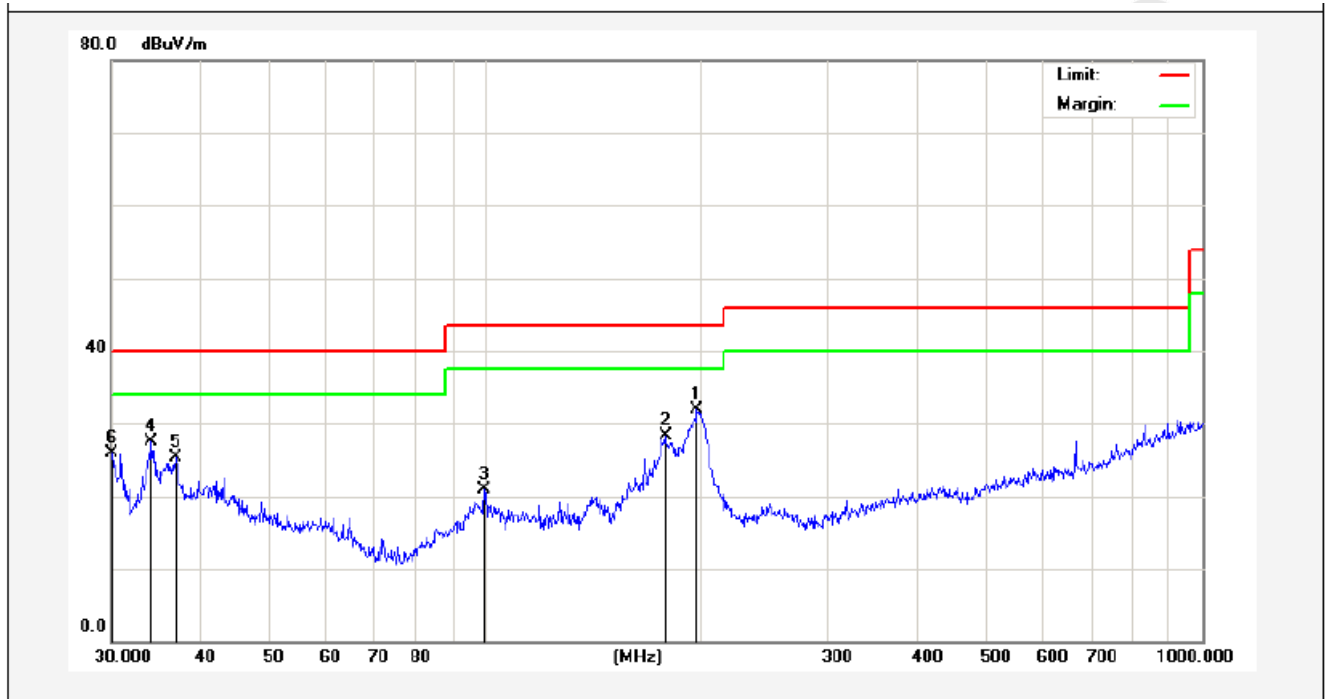

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	197.2001	47.79	-15.89	31.90	43.50	-11.60	peak			
2	178.1327	45.23	-16.98	28.25	43.50	-15.25	peak			
3	99.5281	36.75	-15.79	20.96	43.50	-22.54	peak			
4	34.1561	42.28	-14.74	27.54	40.00	-12.46	peak			
5	36.8953	38.00	-12.79	25.21	40.00	-14.79	peak			
6	30.1054	42.75	-16.90	25.85	40.00	-14.15	peak			

Above 1 GHz:

Horizontal CH Low (2408MHz)								
Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
2408.000	2.17	31.21	35.30	85.74	83.82	114.0	-30.18	Peak
2408.000	2.17	31.21	35.30	72.18	70.26	94.0	-23.74	AV
4816.240	2.56	34.01	34.71	47.66	49.52	74.0	-24.48	Peak
4816.240	2.56	34.01	34.71	32.74	34.60	54.0	-19.40	AV
7224.720	2.98	36.16	35.15	41.27	45.26	74.0	-28.74	Peak
7224.720	2.98	36.16	35.15	28.07	32.06	54.0	-21.94	AV
9632.000	---	---	---	---	---	---	---	---
12040.00	---	---	---	---	---	---	---	---
14448.00	---	---	---	---	---	---	---	---
16856.00	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---

Vertical CH Low (2408MHz)								
Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
2408.000	2.17	31.21	35.30	87.24	85.32	114.0	-28.68	Peak
2408.000	2.17	31.21	35.30	75.16	73.24	94.0	-20.76	AV
4816.240	2.56	34.01	34.71	49.47	51.33	74.0	-22.67	Peak
4816.240	2.56	34.01	34.71	28.36	30.22	54.0	-23.78	AV
7224.720	2.98	36.16	35.15	44.08	48.07	74.0	-25.93	Peak
7224.720	2.98	36.16	35.15	31.66	35.65	54.0	-18.35	AV
9632.000	---	---	---	---	---	---	---	---
12040.00	---	---	---	---	---	---	---	---
14448.00	---	---	---	---	---	---	---	---
16856.00	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---

Horizontal CH Middle (2440MHz)								
Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
2440.000	2.19	31.22	34.60	86.54	85.35	114.0	-28.65	Peak
2440.000	2.19	31.22	34.60	74.69	73.50	94.0	-20.50	AV
4880.160	2.57	35.00	34.58	40.17	43.16	74.0	-30.84	Peak
4880.160	2.57	35.00	34.58	32.78	35.77	54.0	-18.23	AV
7320.780	3.00	36.17	35.14	47.86	51.89	74.0	-22.11	Peak
7320.780	3.00	36.17	35.14	32.63	36.66	54.0	-17.34	AV
9760.000	---	---	---	---	---	---	---	---
12200.00	---	---	---	---	---	---	---	---
14640.00	---	---	---	---	---	---	---	---
17080.00	---	---	---	---	---	---	---	---

Vertical CH Middle (2440MHz)								
Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
2440.000	2.19	31.22	34.60	88.39	87.20	114.0	-26.80	Peak
2440.000	2.19	31.22	34.60	77.82	76.63	94.0	-17.37	AV
4880.160	2.57	35.00	34.58	45.33	48.32	74.0	-25.68	Peak
4880.160	2.57	35.00	34.58	32.67	35.66	54.0	-18.34	AV
7320.780	3.00	36.17	35.14	46.94	50.97	74.0	-23.03	Peak
7320.780	3.00	36.17	35.14	33.49	37.52	54.0	-16.48	AV
9760.000	---	---	---	---	---	---	---	---
12200.00	---	---	---	---	---	---	---	---
14640.00	---	---	---	---	---	---	---	---
17080.00	---	---	---	---	---	---	---	---

Horizontal CH High (2474MHz)								
Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
2474.000	2.20	31.65	36.00	90.54	88.39	114.0	-25.61	Peak
2474.000	2.20	31.65	36.00	77.79	75.64	94.0	-18.36	AV
4948.260	2.58	35.06	34.79	53.67	56.52	74.0	-17.48	Peak
4948.260	2.58	35.06	34.79	30.28	33.13	54.0	-20.87	AV
7422.770	3.02	36.19	34.90	43.43	47.74	74.0	-26.26	Peak
7422.770	3.02	36.20	35.20	34.30	38.32	54.0	-15.68	AV
9869.000	---	---	---	---	---	---	---	---
12370.00	---	---	---	---	---	---	---	---
14844.00	---	---	---	---	---	---	---	---
17318.00	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---

Vertical CH High (2474MHz)								
Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
2474.000	2.20	31.65	36.00	92.25	90.10	114.0	-23.90	Peak
2474.000	2.20	31.65	36.00	78.36	76.21	94.0	-17.79	AV
4948.260	2.58	35.06	34.79	48.24	51.09	74.0	-22.91	Peak
4948.260	2.58	35.06	34.79	31.43	34.28	54.0	-19.72	AV
7422.770	3.02	36.19	34.90	49.39	53.70	74.0	-20.30	Peak
7422.770	3.02	36.20	35.20	36.62	40.64	54.0	-13.36	AV
9869.000	---	---	---	---	---	---	---	---
12370.00	---	---	---	---	---	---	---	---
14844.00	---	---	---	---	---	---	---	---
17318.00	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---

NOTE: “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The results of different modulations are the same.

6. Bandedge

6.1. Requirements (15.249)

The field strength of any emissions appearing outside the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.249.

6.2. Test Procedure


The EUT is placed on a turn table which is 1.5 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test. The device is evaluated in xyz orientation.

Test Equipment


Same as the equipment listed in 6.3.

6.3. Test Configuration:

30M to 1G emissions:

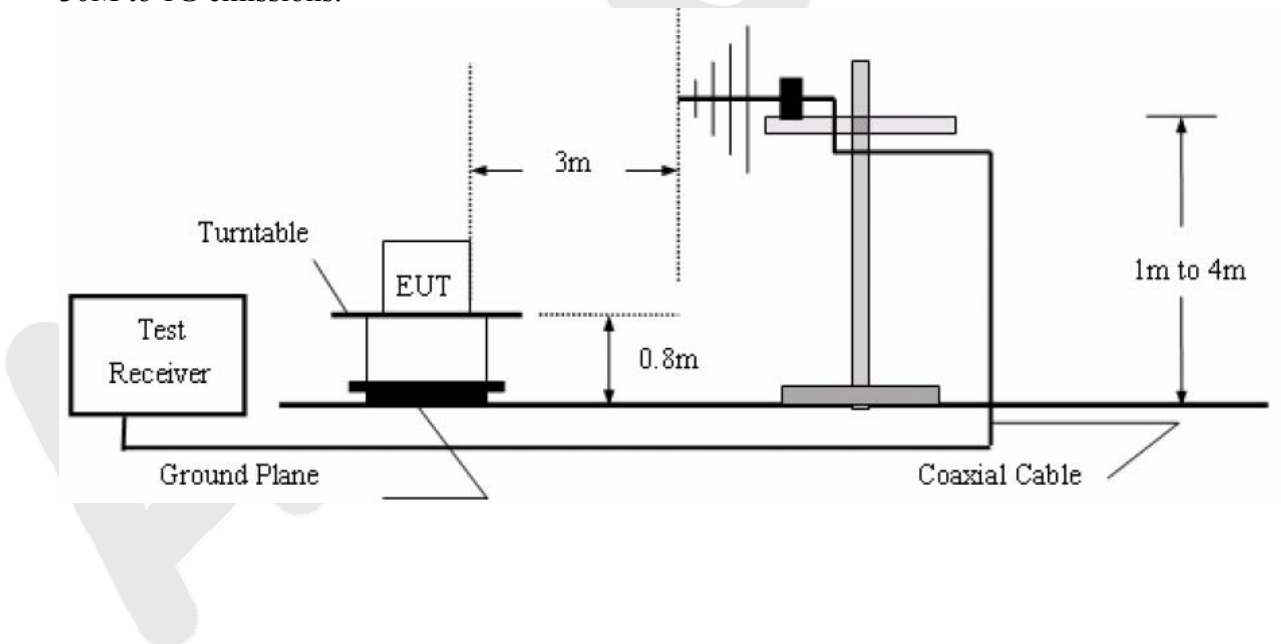

1G to 40G emissions:

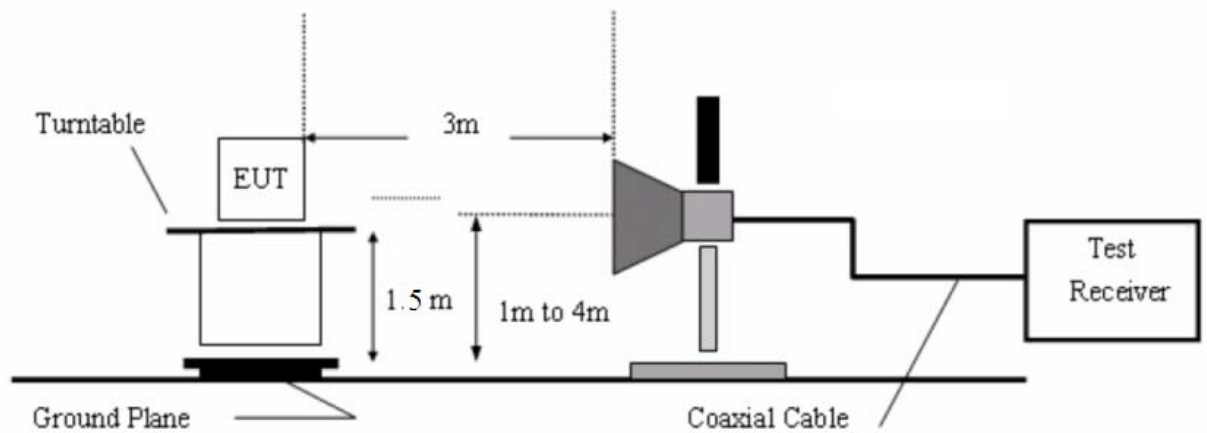


6.4. Test Results

Pass.


Please refer the following plot. Only the worst case (x orientation).

Job No.:	011606515I	Polarization:	Horizontal
Standard:	(RE)FCC PART15 C _3m	Power Source:	DC 5V Via USB Port
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Note:	PEAK	Distance:	3m

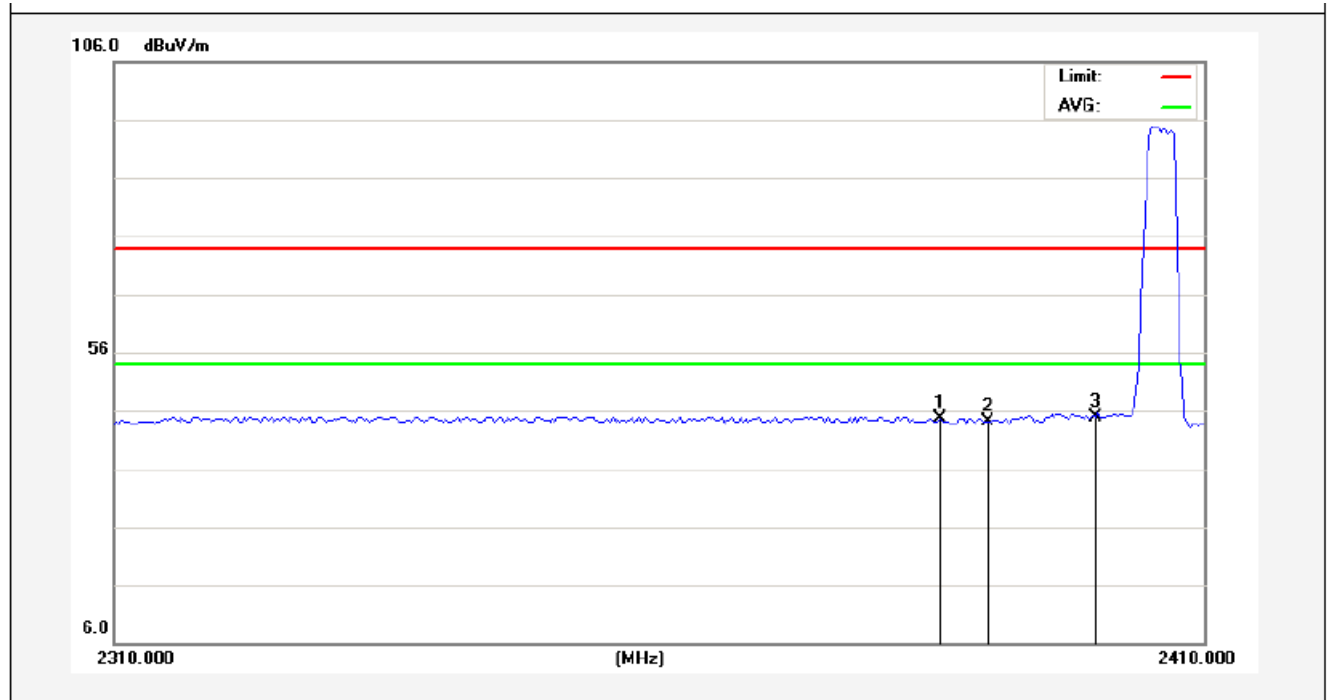


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2385.500	47.10	-2.52	44.58	74.00	-29.42	peak			
2	2390.000	46.71	-2.51	44.20	74.00	-29.80	peak			
3	2400.000	47.38	-2.49	44.89	74.00	-29.11	peak			

Job No.:	011606515I	Polarization:	Vertical
Standard:	(RE)FCC PART15 C _3m	Power Source:	DC 5V Via USB Port
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Note:	PEAK	Distance:	3m

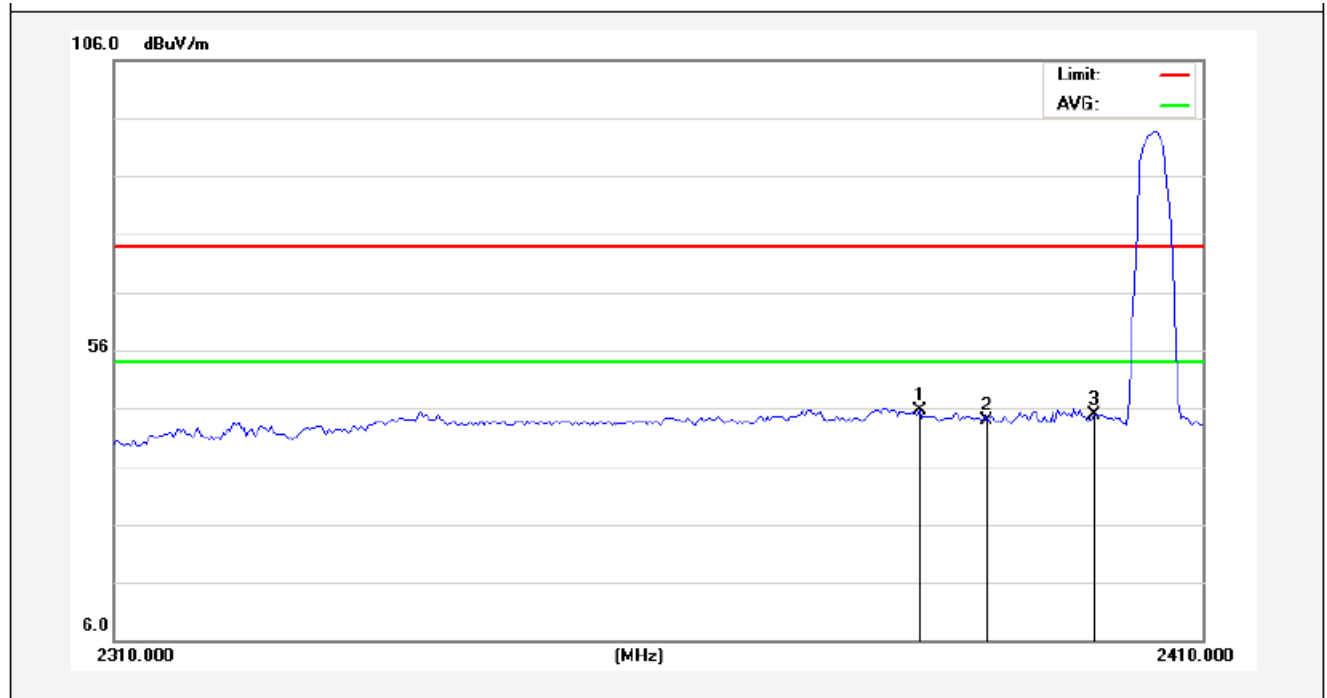


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2383.750	48.21	-2.53	45.68	74.00	-28.32	peak			
2	2390.000	46.51	-2.51	44.00	74.00	-30.00	peak			
3	2400.000	47.46	-2.49	44.97	74.00	-29.03	peak			

Job No.:	011606515I	Polarization:	Horizontal
Standard:	(RE)FCC PART15 C _3m	Power Source:	DC 5V Via USB Port
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Note:	AV	Distance:	3m

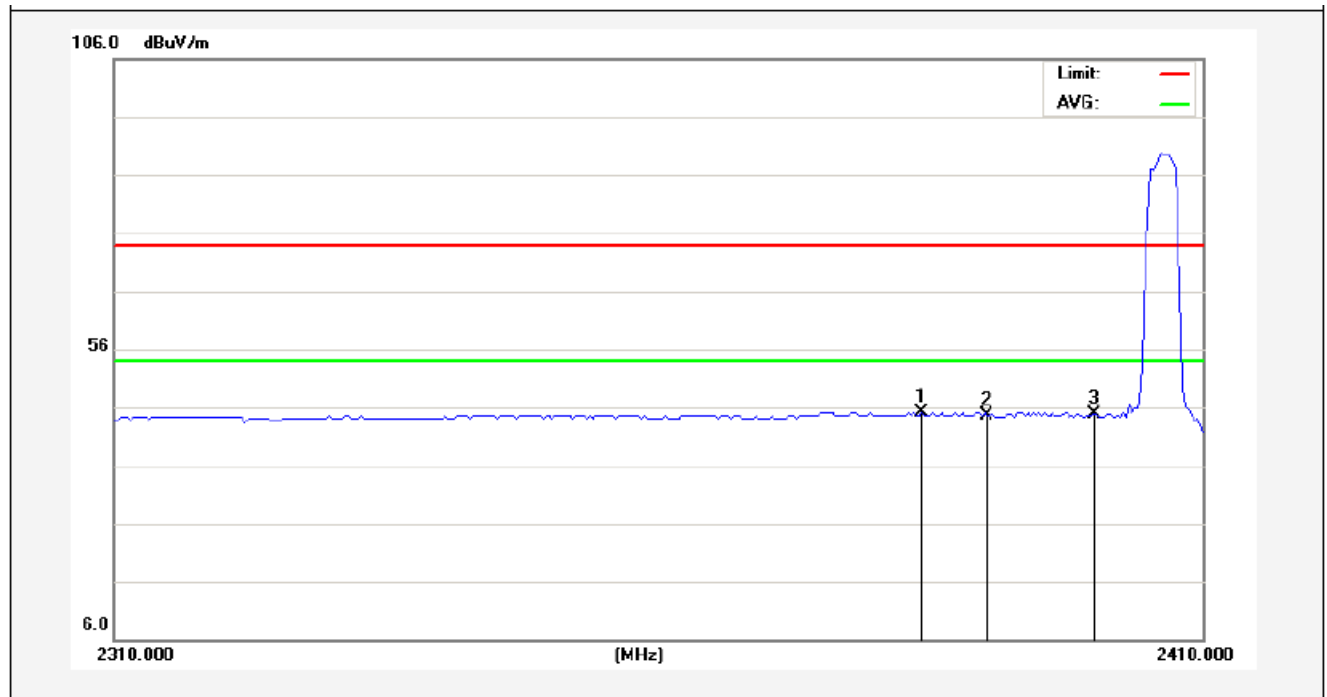


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2384.000	47.60	-2.53	45.07	54.00	-8.93	AVG			
2	2390.000	47.11	-2.51	44.60	54.00	-9.40	AVG			
3	2400.000	47.26	-2.49	44.77	54.00	-9.23	AVG			

Job No.:	011606515I	Polarization:	Vertical
Standard:	(RE)FCC PART15 C _3m	Power Source:	DC 5V Via USB Port
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Note:	AV	Distance:	3m

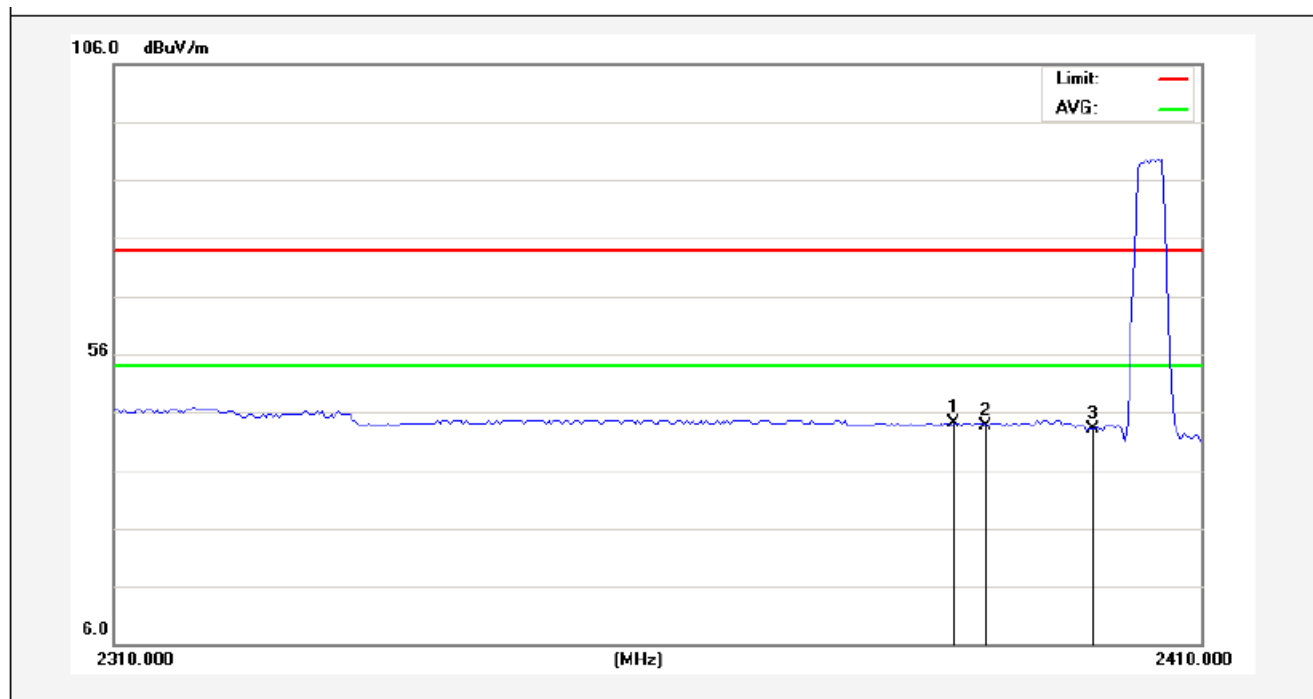


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2387.000	46.60	-2.52	44.08	54.00	-9.92	AVG			
2	2390.000	46.07	-2.51	43.56	54.00	-10.44	AVG			
3	2400.000	45.70	-2.49	43.21	54.00	-10.79	AVG			

Job No.:	011606515I	Polarization:	Horizontal
Standard:	(RE)FCC PART15 C _3m	Power Source:	DC 5V Via USB Port
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Note:	PEAK	Distance:	3m

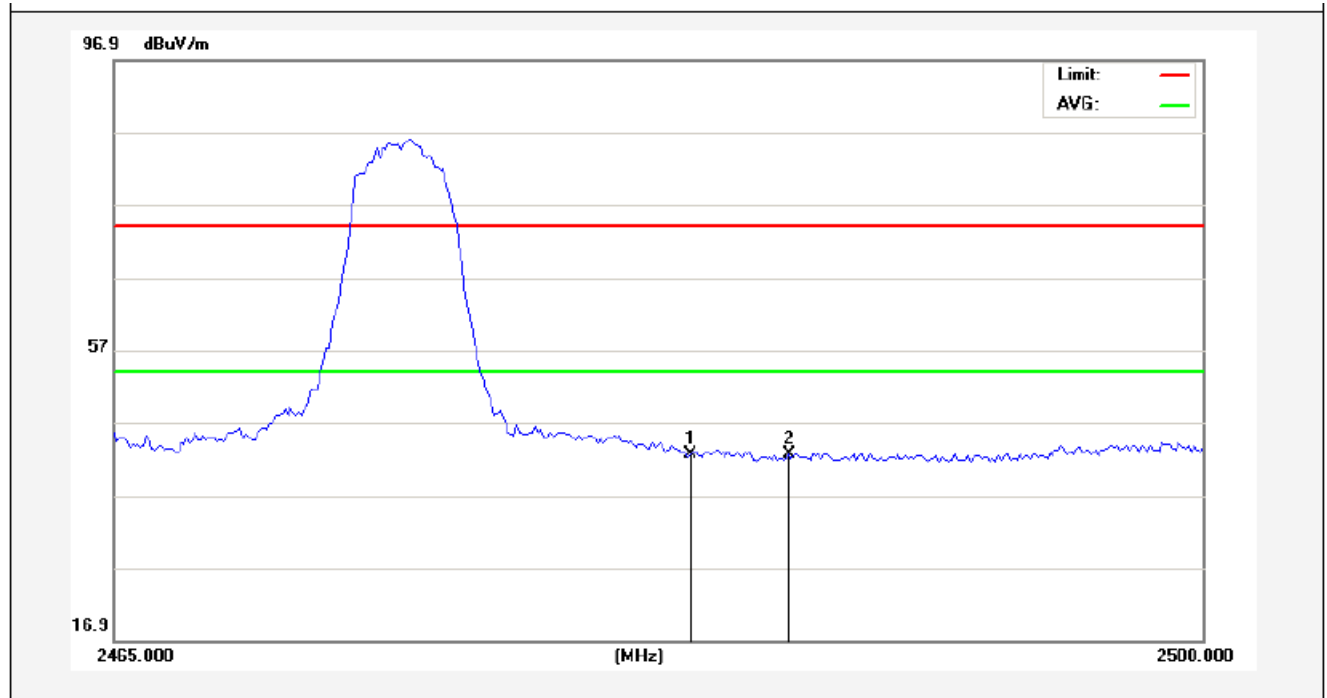


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	44.88	-2.31	42.57	74.00	-31.43	peak			
2	2486.700	44.97	-2.30	42.67	74.00	-31.33	peak			

Job No.:	011606515I	Polarization:	Vertical
Standard:	(RE)FCC PART15 C _3m	Power Source:	DC 5V Via USB Port
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Note:	PEAK	Distance:	3m

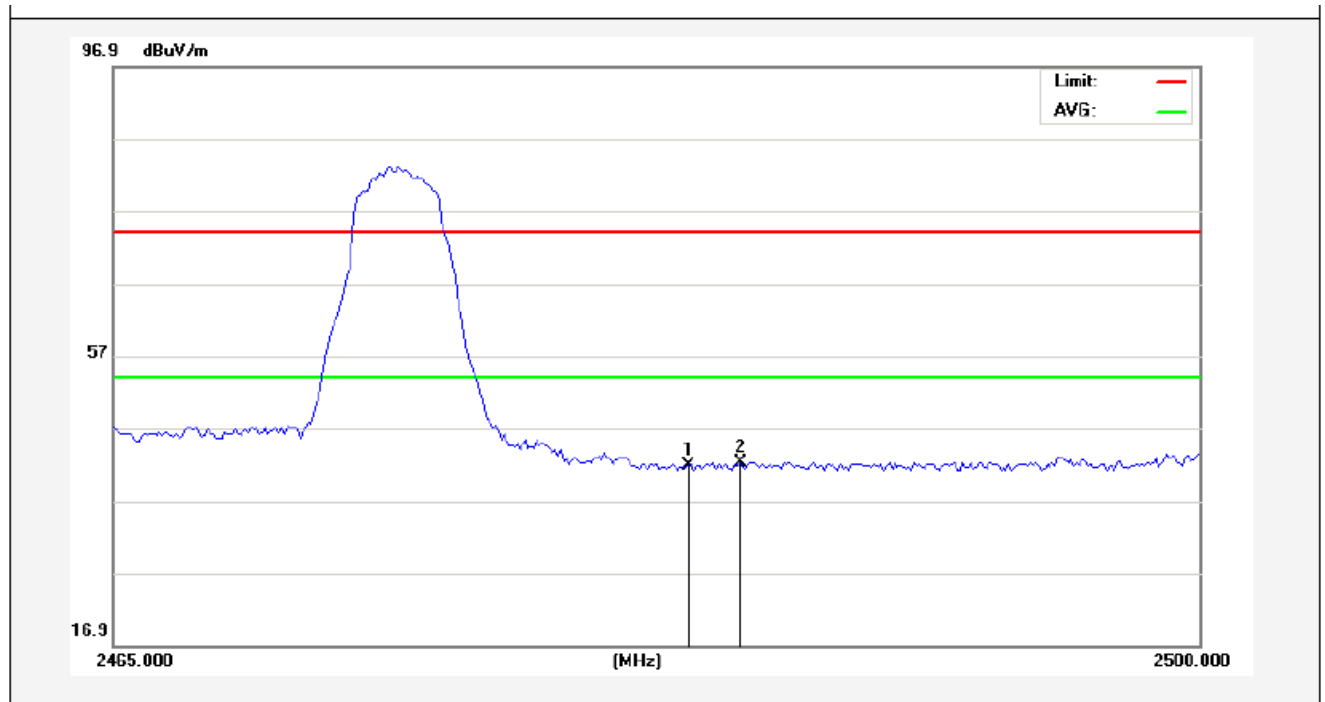


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	44.02	-2.31	41.71	74.00	-32.29	peak			
2	2485.213	44.46	-2.30	42.16	74.00	-31.84	peak			

Job No.:	011606515I	Polarization:	Horizontal
Standard:	(RE)FCC PART15 C _3m	Power Source:	DC 5V Via USB Port
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Note:	AV	Distance:	3m

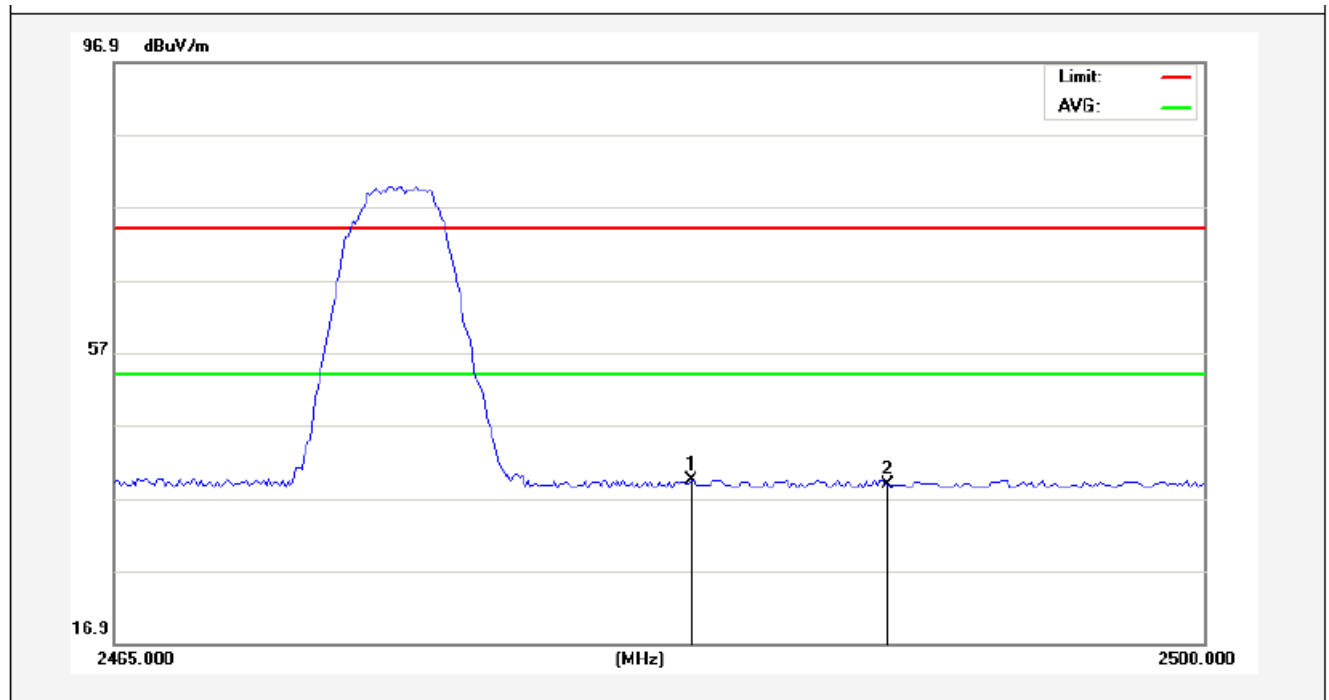

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	41.69	-2.31	39.38	54.00	-14.62	AVG			
2	2489.850	41.06	-2.29	38.77	54.00	-15.23	AVG			

Job No.:	011606515I	Polarization:	Vertical
Standard:	(RE)FCC PART15 C _3m	Power Source:	DC 5V Via USB Port
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Note:	AV	Distance:	3m

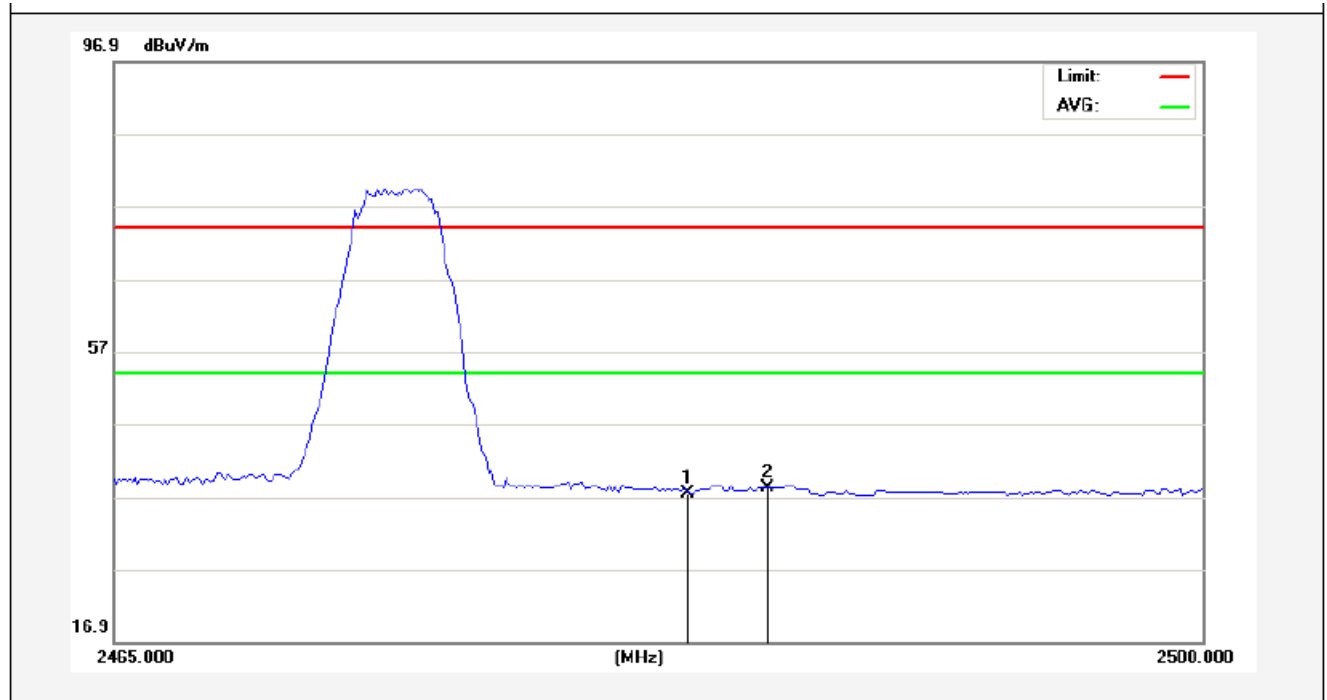


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	39.79	-2.31	37.48	54.00	-16.52	AVG			
2	2486.000	40.54	-2.30	38.24	54.00	-15.76	AVG			

7. Occupied Bandwidth

7.1. Requirements

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

7.2. Test SET-UP



7.3 Test Equipment



Same as the equipment listed in 5.3.


7.4. Test Results

Pass.

Please refer the following plot.

20dB Down:

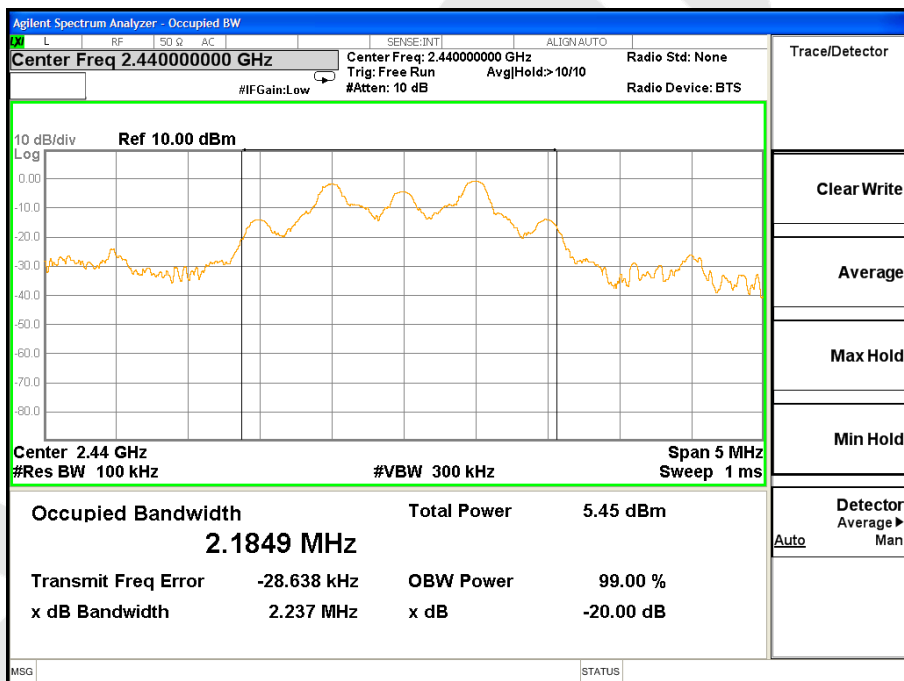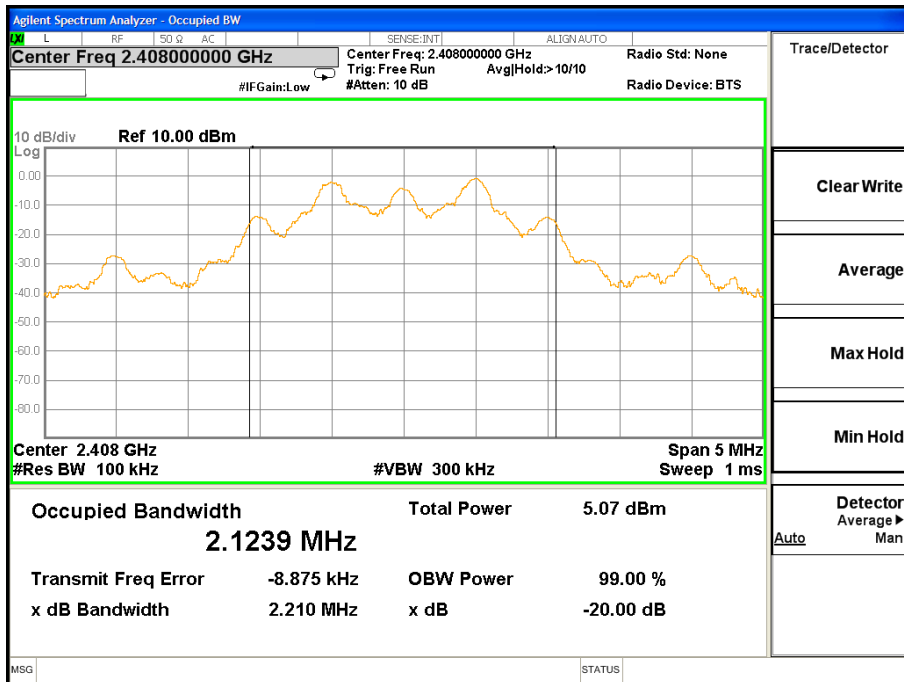

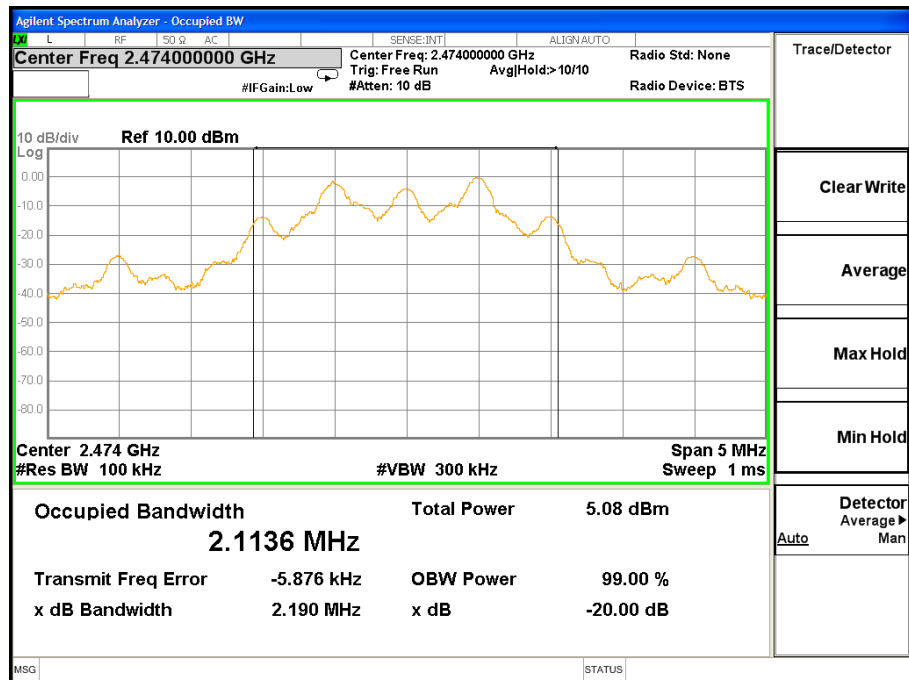

8. ANTENNA APPLICATION


8.1. Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

8.2. Result

The EUT's antenna used a PCB antenna which is permanently attached, The antenna's gain is -2.0dBi and meets the requirement.

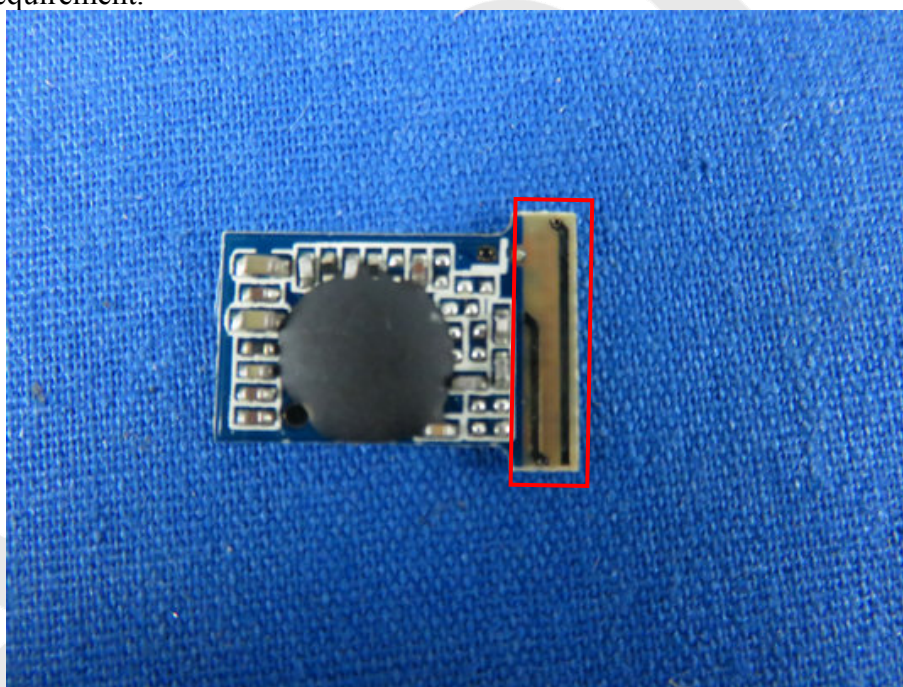


9. PHOTOGRAPH

9.1. Photo of Power Line Conducted Emission Measurement



9.2 Photo of Radiation Emission Test

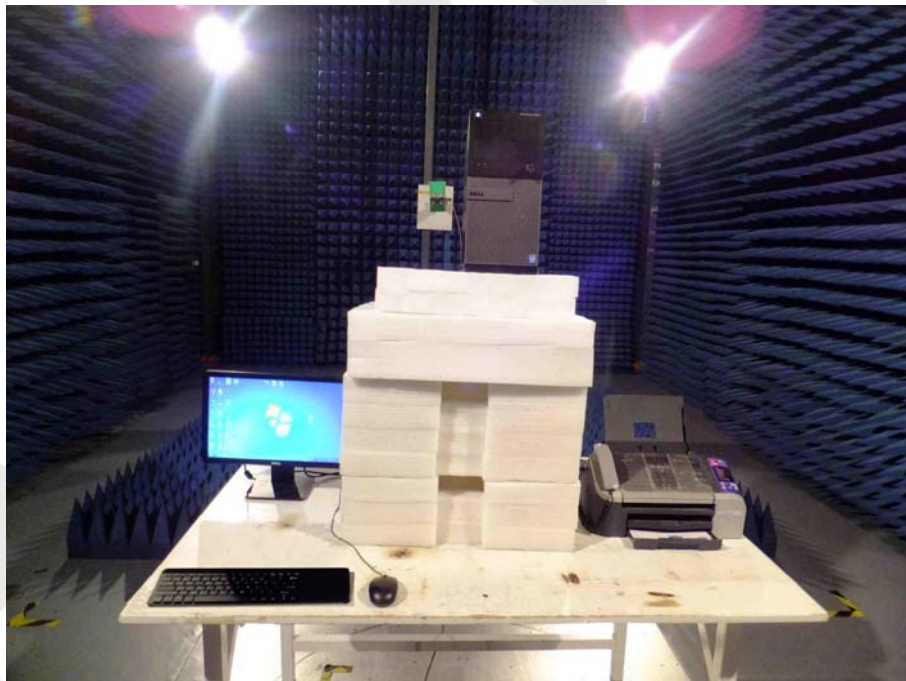


APPENDIX I (EXTERNAL PHOTOS)

1. Figure
The EUT- Top View



2. Figure
The EUT-Bottom View

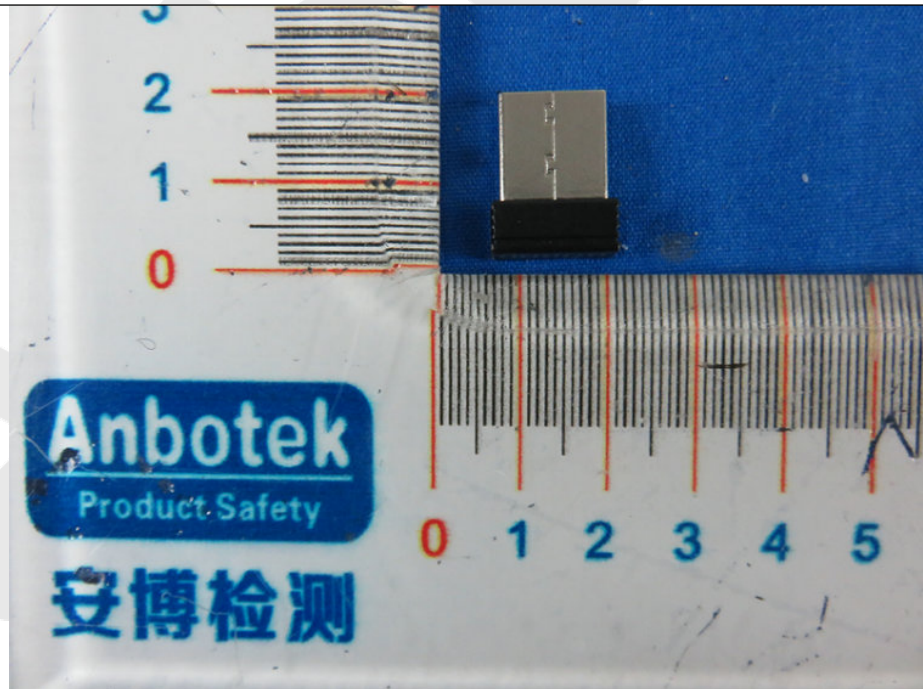

3. Figure
The EUT-Front View



4. Figure
The EUT-Back View



5. Figure
The EUT-Left View




6. Figure
The EUT-Right View




APPENDIX II (INTERNAL PHOTOS)


1. Figure
PCB of the EUT-Front View

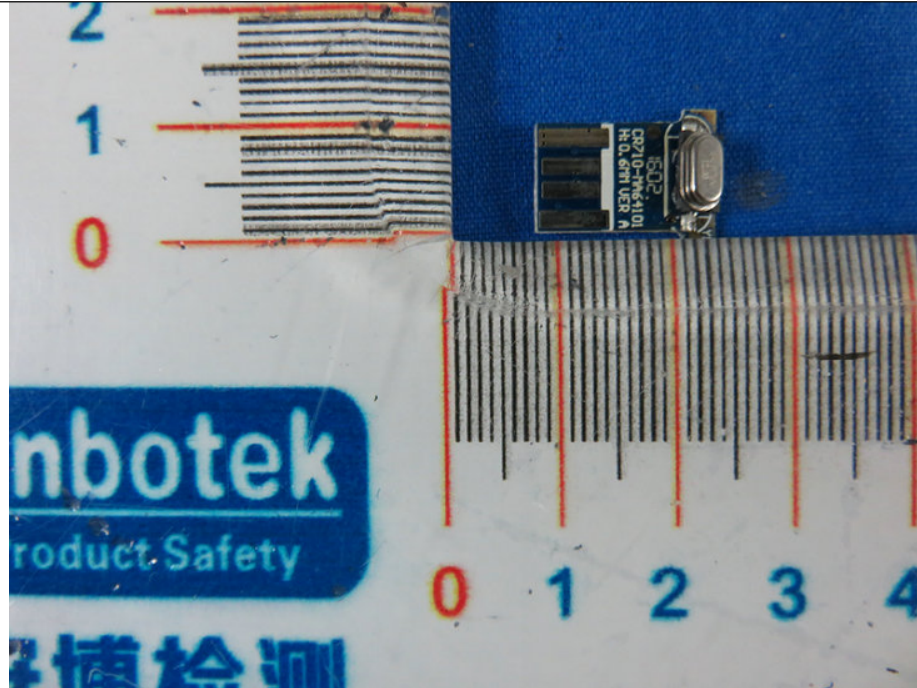

2. Figure
PCB of the EUT-Back View

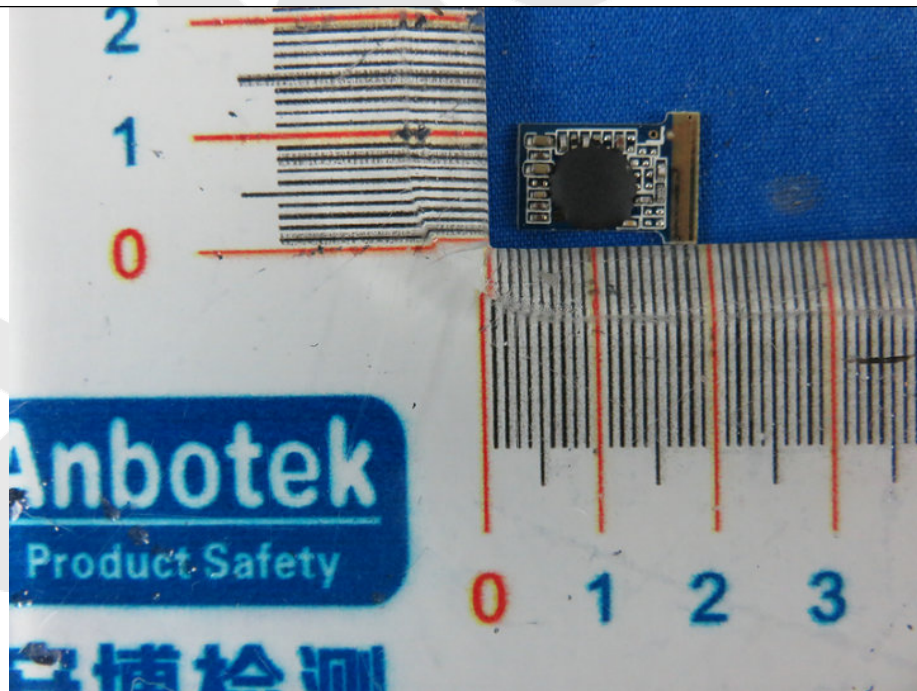

3. Figure
PCB of the EUT-Front View

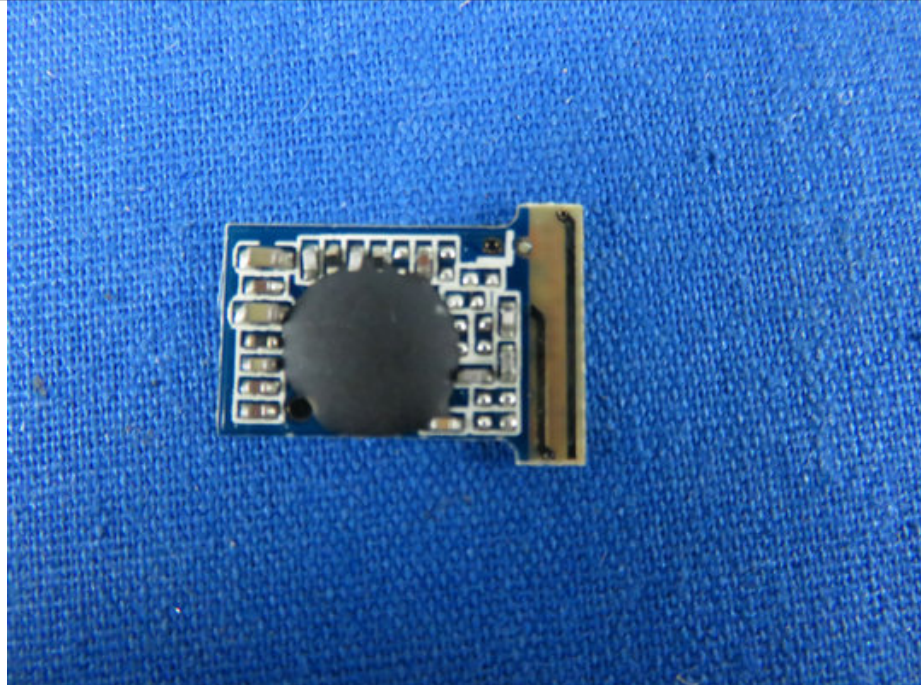

4. Figure
PCB of the EUT-Back View

