

ATTACHMENT O – SAR TEST PLOTS -1/2-

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 128

Liquid Temperature : 21.7 °C / Ambient Temperature: 22.0 °C

Date Tested : August 30, 2006

DUT: EZ600D Down; Type: Silde down; Serial: #1

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.863 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build d 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 128/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.445 mW/g


Left touch 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.5 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.564 W/kg

SAR(1 g) = 0.416 mW/g; SAR(10 g) = 0.296 mW/g

Maximum value of SAR (measured) = 0.436 mW/g

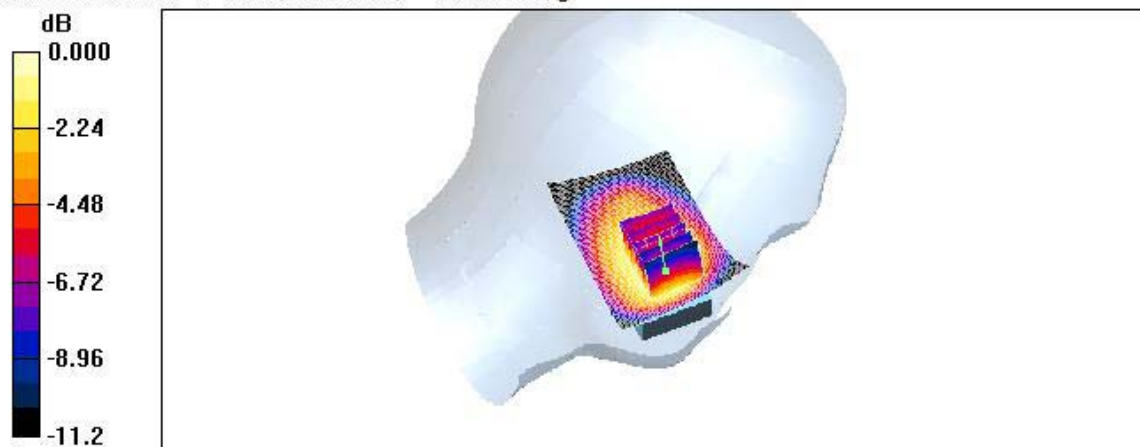

0 dB = 0.436mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 190

Liquid Temperature : 21.7 °C / Ambient Temperature: 22.0 °C

Date Tested : August 30, 2006

DUT: EZ600D Down; Type: Silde down; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 190/Area Scan (51x71x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.620 mW/g

Left touch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 14.2 V/m; Power Drift = -0.140 dB

Peak SAR (extrapolated) = 0.737 W/kg

SAR(1 g) = 0.537 mW/g; SAR(10 g) = 0.381 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.574 mW/g

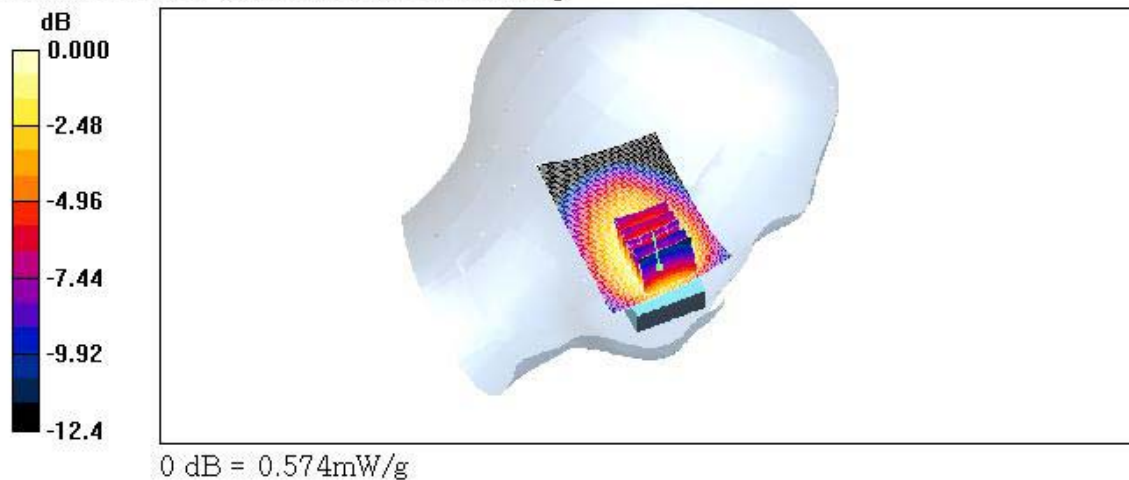

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850 / Antenna : Fixed / Channel : 251

Liquid Temperature : 21.7 °C/Ambient Temperature: 22.0 °C

Date Tested : August 30, 2006

DUT: EZ600D Down; Type: Silde down; Serial: #1

Communication System: GSM 850; Frequency: 849.8 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 850$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build d 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 251/Area Scan (51x71x1): Measurement grid: $\Delta x=15$ mm, $\Delta y=15$ mm

Maximum value of SAR (interpolated) = 0.800 mW/g


Left touch 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x=8$ mm, $\Delta y=8$ mm, $\Delta z=5$ mm

Reference Value = 16.2 V/m; Power Drift = -0.148 dB

Peak SAR (extrapolated) = 0.990 W/kg

SAR(1 g) = 0.729 mW/g; SAR(10 g) = 0.521 mW/g

Maximum value of SAR (measured) = 0.768 mW/g

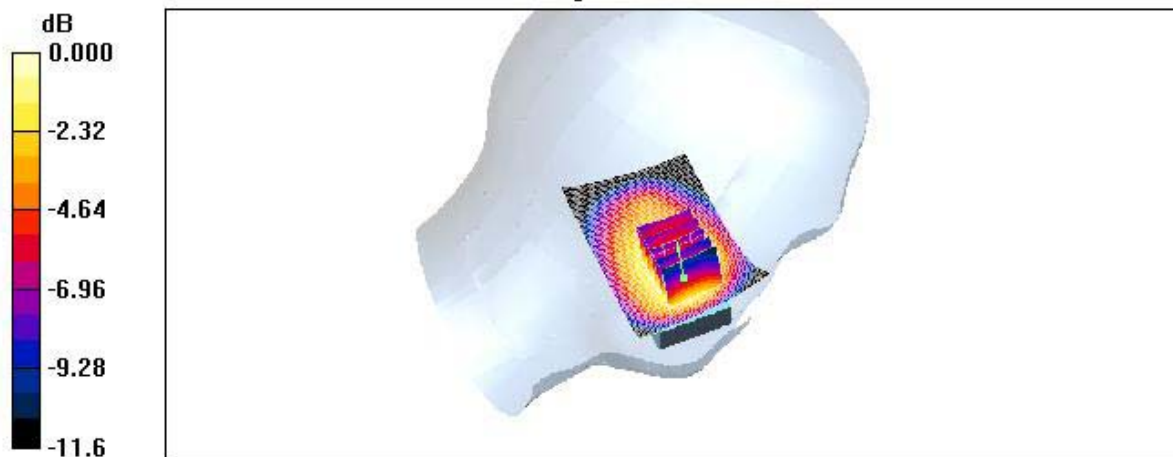

0 dB = 0.768mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.
Mode :GSM850 / Antenna : Fixed / Channel : 251 (Bluetooth)
Liquid Temperature : 21.7 °C / Ambient Temperature: 22.0 °C
Date Tested : August 30, 2006

DUT: EZ600D Down; Type: Silde down; Serial: #1


Communication System: GSM 850; Frequency: 849.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 850$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 251/Area Scan (51x71x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm
Maximum value of SAR (interpolated) = 0.738 mW/g

Left touch 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm
Reference Value = 14.4 V/m; Power Drift = -0.100 dB
Peak SAR (extrapolated) = 0.902 W/kg
SAR(1 g) = 0.680 mW/g; SAR(10 g) = 0.487 mW/g
Maximum value of SAR (measured) = 0.717 mW/g

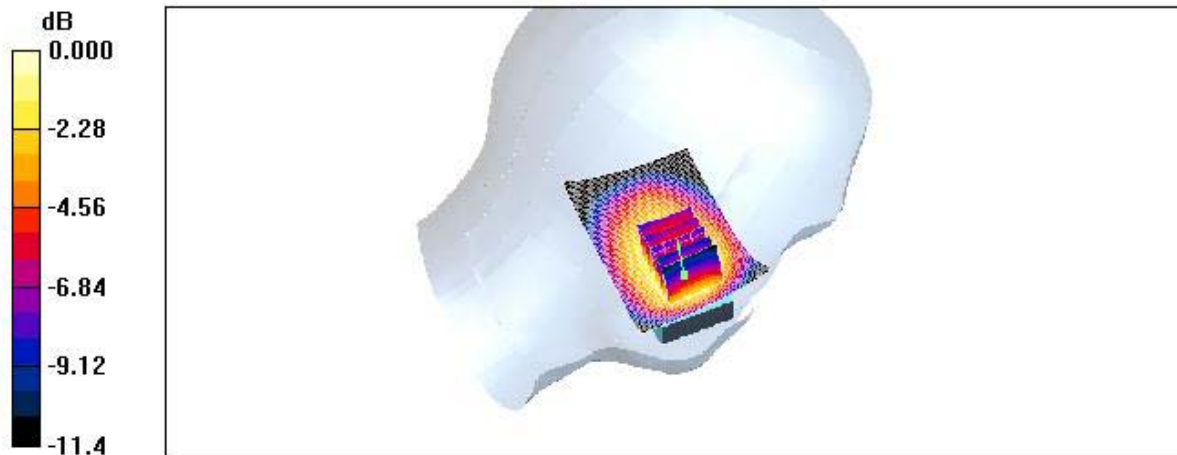

0 dB = 0.717mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850 / Antenna : Fixed / Channel : 128

Liquid Temperature : 21.7 °C / Ambient Temperature: 22.0 °C

Date Tested : August 30, 2006

DUT: EZ600D Down; Type: Silde down; Serial: #1

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.863 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 128/Area Scan (51x71x1): Measurement grid: $\Delta x = 15 \text{ mm}$, $\Delta y = 15 \text{ mm}$

Maximum value of SAR (interpolated) = 0.436 mW/g


Right touch 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8 \text{ mm}$, $\Delta y = 8 \text{ mm}$, $\Delta z = 5 \text{ mm}$

Reference Value = 12.0 V/m; Power Drift = 0.147 dB

Peak SAR (extrapolated) = 0.529 W/kg

SAR(1 g) = 0.400 mW/g; SAR(10 g) = 0.288 mW/g

Maximum value of SAR (measured) = 0.422 mW/g

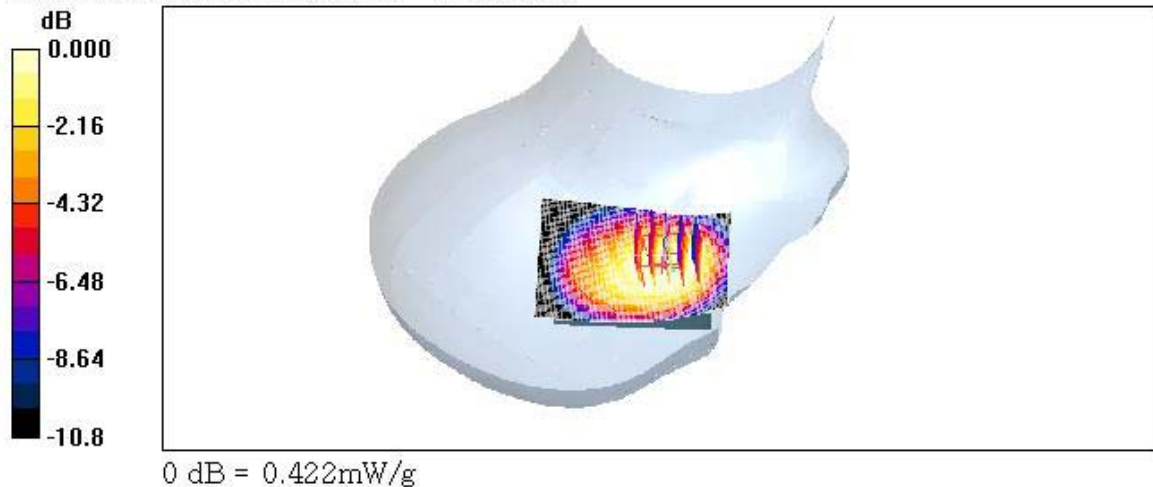

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 190

Liquid Temperature : 21.7 °C / Ambient Temperature: 22.0 °C

Date Tested : August 30, 2006

DUT: EZ600D Down; Type: Silde down; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.875 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 190/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.543 mW/g

Right touch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 13.0 V/m; Power Drift = -0.171 dB

Peak SAR (extrapolated) = 0.686 W/kg

SAR(1 g) = 0.508 mW/g; SAR(10 g) = 0.364 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.536 mW/g

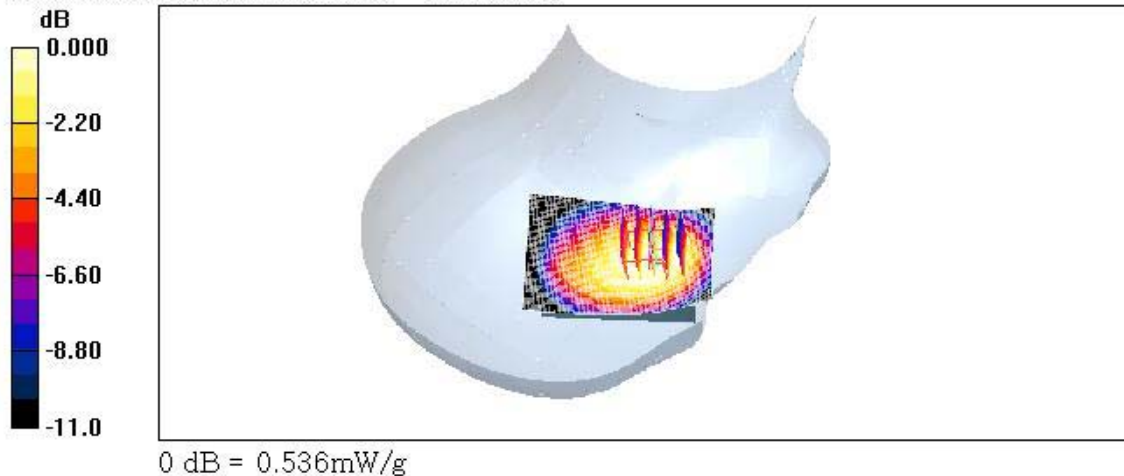

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 251

Liquid Temperature : 21.7 °C / Ambient Temperature: 22.0 °C

Date Tested : August 30, 2006

DUT: EZ600D Down; Type: Silde down; Serial: #1

Communication System: GSM 850; Frequency: 849.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 850$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 251/Area Scan (51x71x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.706 mW/g


Right touch 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.1 V/m; Power Drift = -0.201 dB

Peak SAR (extrapolated) = 0.848 W/kg

SAR(1 g) = 0.650 mW/g; SAR(10 g) = 0.471 mW/g

Maximum value of SAR (measured) = 0.691 mW/g

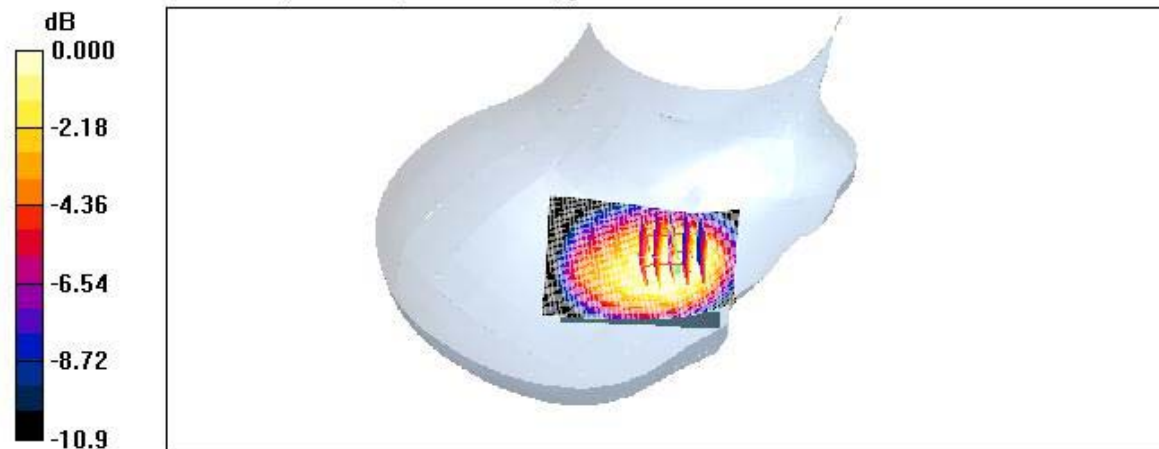

0 dB = 0.691mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850 / Antenna : Fixed / Channel : 190

Liquid Temperature : 21.7°C/Ambient Temperature: 22.0°C

Date Tested : August 30, 2006

DUT: EZ600D Down; Type: Silde down; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.875 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 190/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.276 mW/g

Left tilt 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 16.3 V/m; Power Drift = 0.065 dB

Peak SAR (extrapolated) = 0.340 W/kg

SAR(1 g) = 0.199 mW/g; SAR(10 g) = 0.140 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.225 mW/g

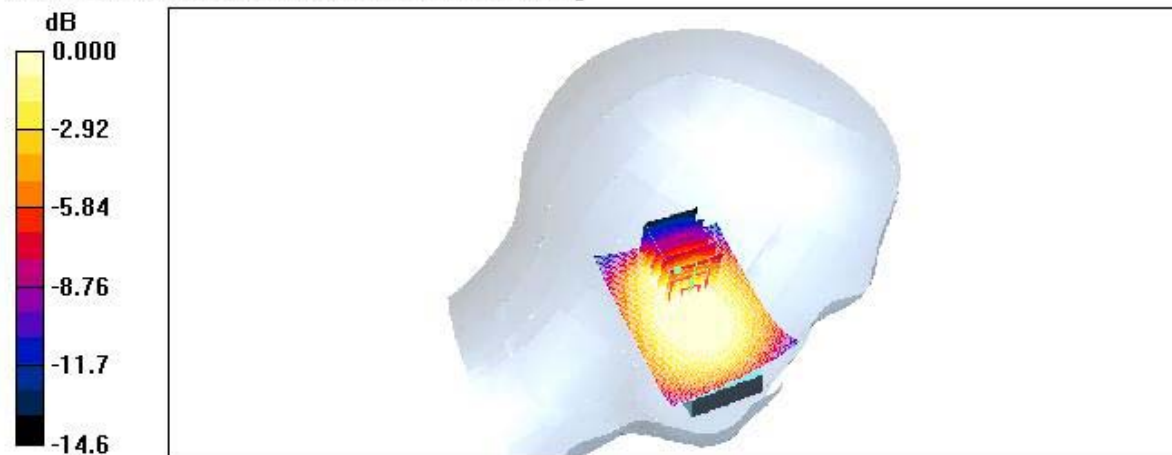

0 dB = 0.225mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850 / Antenna : Fixed / Channel : 190

Liquid Temperature : 21.7 °C / Ambient Temperature: 22.0 °C

Date Tested : August 30 , 2006

DUT: EZ600D Down; Type: Silde down; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.875 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 190/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.226 mW/g

Right touch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 14.4 V/m; Power Drift = -0.201 dB

Peak SAR (extrapolated) = 0.268 W/kg

SAR(1 g) = 0.219 mW/g; SAR(10 g) = 0.163 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.231 mW/g

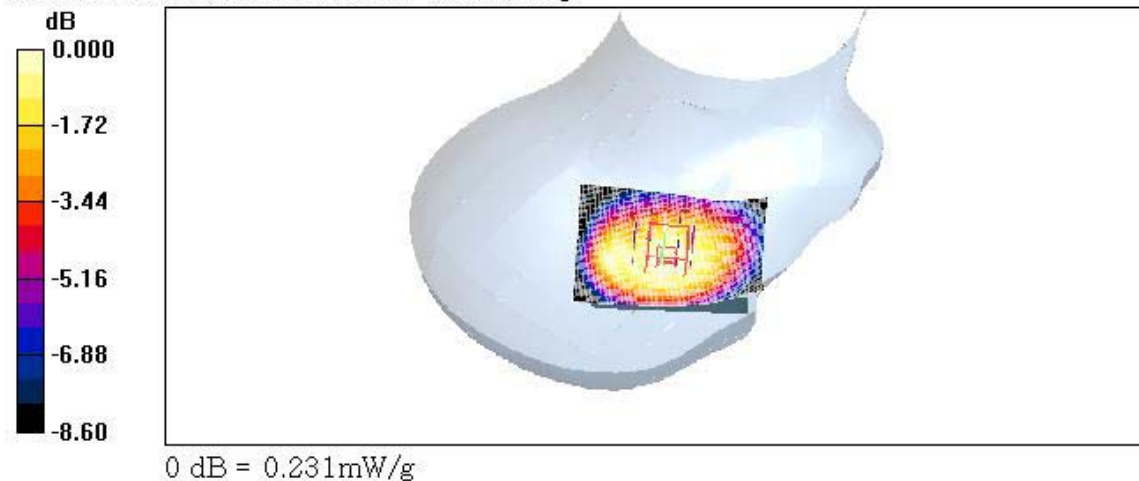

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850 / Antenna : Fixed / Channel : 128

Liquid Temperature : 21.7°C/Ambient Temperature: 22.0°C

Date Tested : August 30, 2006

DUT: EZ600D UP; Type: Silde up; Serial: #1

Communication System: GSM 850; Frequency: 824.2 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 825$ MHz; $\sigma = 0.863$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 128/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.445 mW/g


Left touch 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.0 V/m; Power Drift = -0.193 dB

Peak SAR (extrapolated) = 0.548 W/kg

SAR(1 g) = 0.418 mW/g; SAR(10 g) = 0.301 mW/g

Maximum value of SAR (measured) = 0.445 mW/g

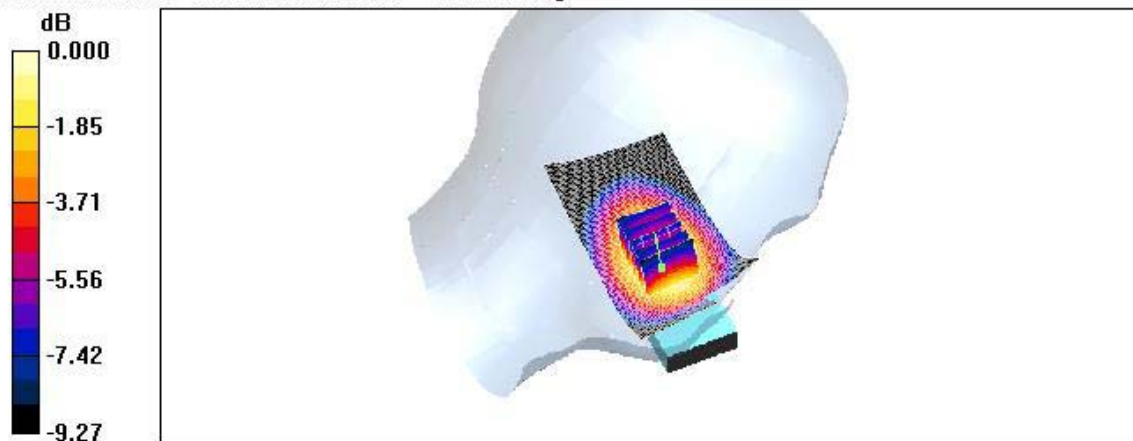

0 dB = 0.445mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 190

Liquid Temperature : 21.7 °C / Ambient Temperature: 22.0 °C

Date Tested : August 30, 2006

DUT: EZ600D UP; Type: Silde up; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.875 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 190/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.550 mW/g

Left touch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 12.8 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.679 W/kg

SAR(1 g) = 0.510 mW/g; SAR(10 g) = 0.365 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.543 mW/g

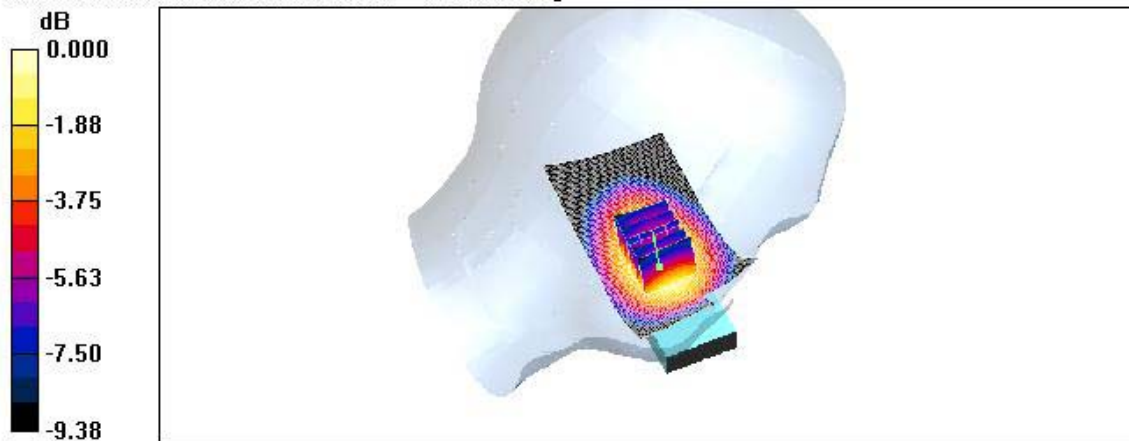

0 dB = 0.543mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850 / Antenna : Fixed / Channel : 251

Liquid Temperature : 21.7 °C / Ambient Temperature: 22.0 °C

Date Tested : August 30, 2006

DUT: EZ600D UP; Type: Slide up; Serial: #1

Communication System: GSM 850; Frequency: 849.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 850 \text{ MHz}$; $\sigma = 0.887 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 251/Area Scan (51x91x1): Measurement grid: $\Delta x = 15 \text{ mm}$, $\Delta y = 15 \text{ mm}$

Maximum value of SAR (interpolated) = 0.689 mW/g


Left touch 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8 \text{ mm}$, $\Delta y = 8 \text{ mm}$, $\Delta z = 5 \text{ mm}$

Reference Value = 14.5 V/m; Power Drift = -0.184 dB

Peak SAR (extrapolated) = 0.822 W/kg

SAR(1 g) = 0.631 mW/g; SAR(10 g) = 0.455 mW/g

Maximum value of SAR (measured) = 0.669 mW/g

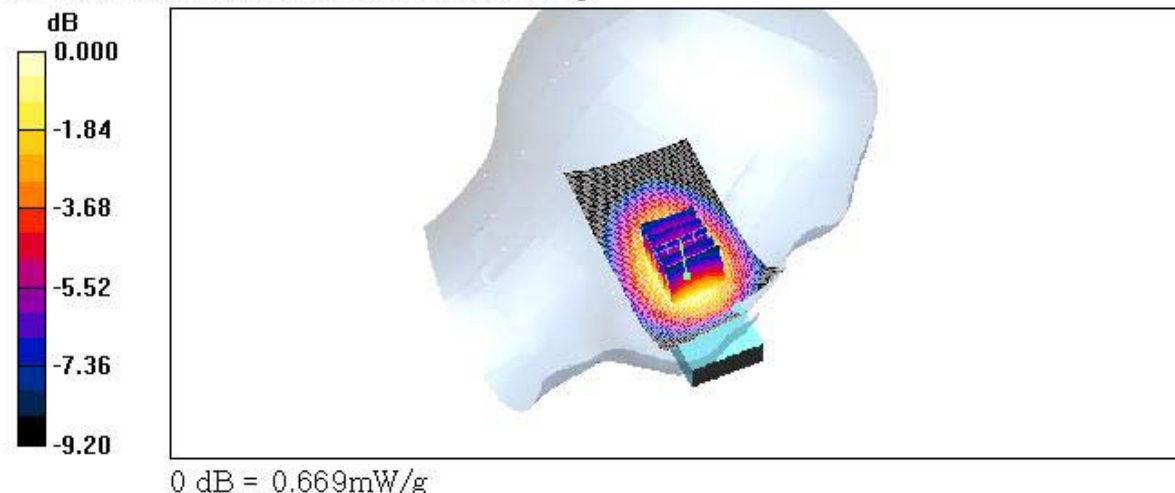

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850 / Antenna : Fixed / Channel : 251 (Bluetooth)

Liquid Temperature : 21.7 °C / Ambient Temperature: 22.0 °C

Date Tested : August 30, 2006

DUT: EZ600D UP; Type: Slide up; Serial: #1

Communication System: GSM 850; Frequency: 849.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 850$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 251/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.688 mW/g


Left touch 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.2 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.833 W/kg

SAR(1 g) = 0.630 mW/g; SAR(10 g) = 0.451 mW/g

Maximum value of SAR (measured) = 0.669 mW/g

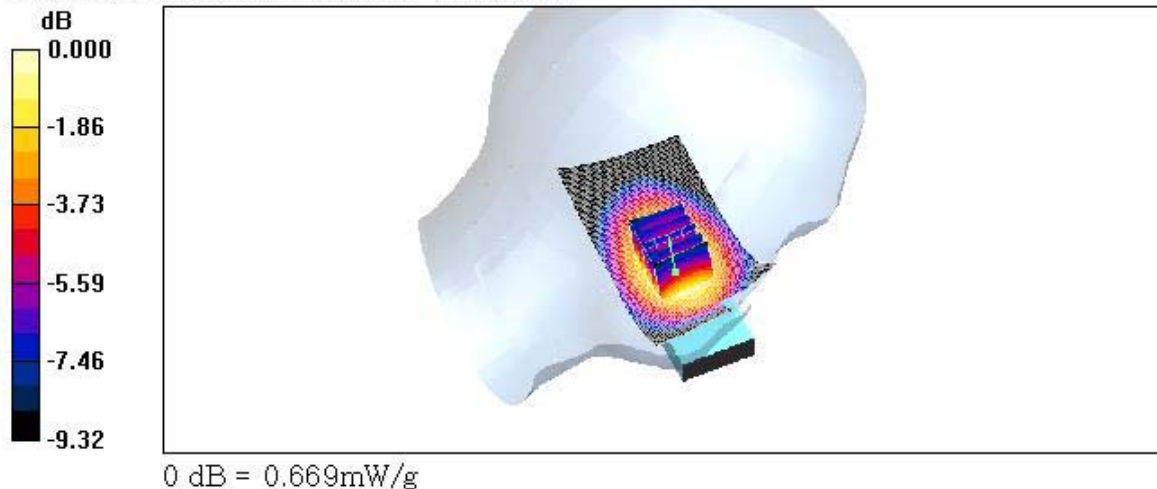

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850 / Antenna : Fixed / Channel : 128

Liquid Temperature : 21.7 °C/Ambient Temperature: 22.0 °C

Date Tested : August 30, 2006

DUT: EZ600D UP; Type: Silde up; Serial: #1

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.863 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 128/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.416 mW/g


Right touch 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.9 V/m; Power Drift = -0.100 dB

Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.394 mW/g; SAR(10 g) = 0.284 mW/g

Maximum value of SAR (measured) = 0.419 mW/g

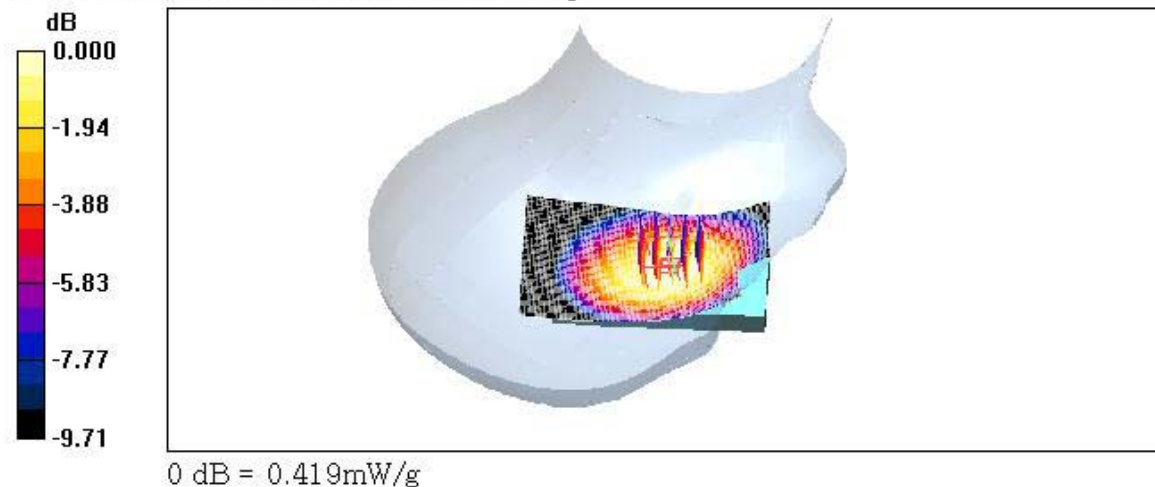

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850 / Antenna : Fixed / Channel : 190

Liquid Temperature : 21.7°C/Ambient Temperature: 22.0°C

Date Tested : August 30, 2006

DUT: EZ600D UP; Type: Silde up; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 190/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.518 mW/g

Right touch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 12.3 V/m; Power Drift = -0.092 dB

Peak SAR (extrapolated) = 0.636 W/kg

SAR(1 g) = 0.497 mW/g; SAR(10 g) = 0.357 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.527 mW/g

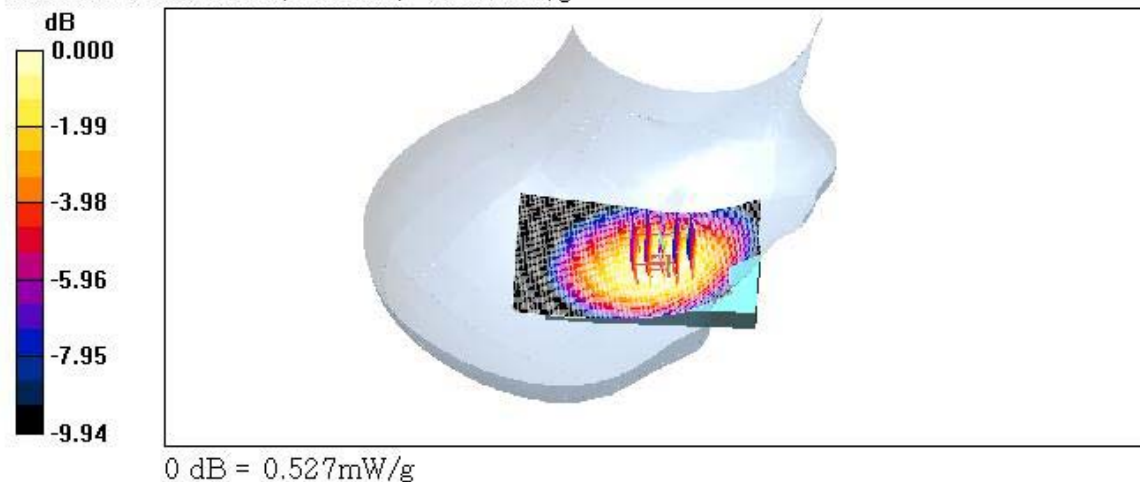

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 251

Liquid Temperature : 21.7 °C / Ambient Temperature: 22.0 °C

Date Tested : August 30, 2006

DUT: EZ600D UP; Type: Silde up; Serial: #1

Communication System: GSM 850; Frequency: 849.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 850$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 251/Area Scan (51x91x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Maximum value of SAR (interpolated) = 0.651 mW/g


Right touch 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm

Reference Value = 13.7 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.795 W/kg

SAR(1 g) = 0.618 mW/g; SAR(10 g) = 0.444 mW/g

Maximum value of SAR (measured) = 0.654 mW/g

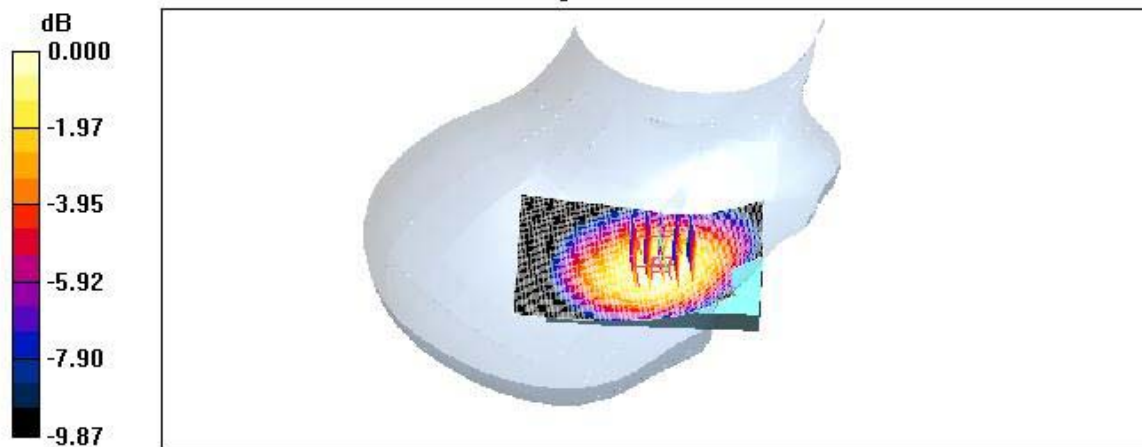

0 dB = 0.654mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 190

Liquid Temperature : 21.7 °C / Ambient Temperature: 22.0 °C

Date Tested : August 30, 2006

DUT: EZ600D UP; Type: Slide up; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.875 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 190/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.293 mW/g

Left tilt 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 17.7 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 0.352 W/kg

SAR(1 g) = 0.277 mW/g; SAR(10 g) = 0.204 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.293 mW/g

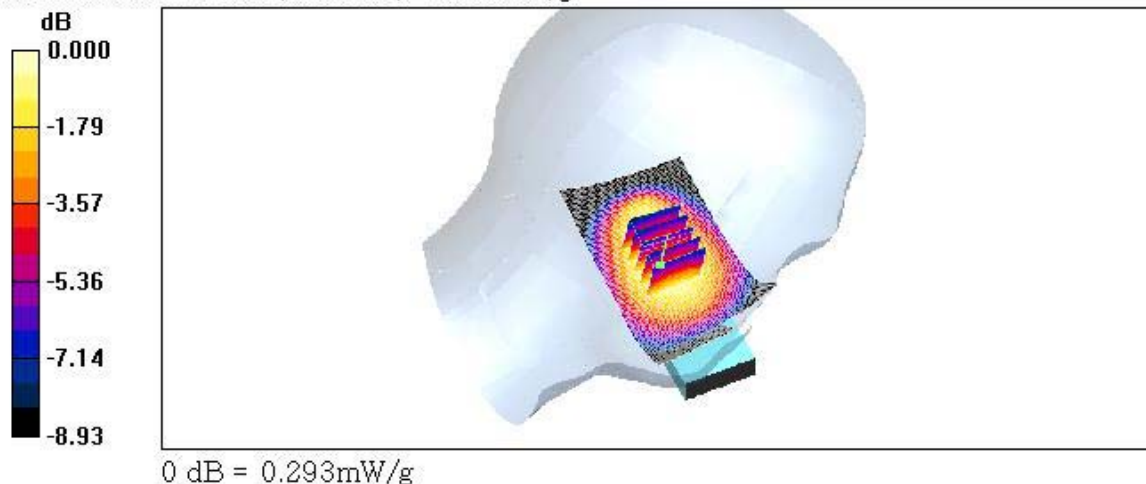

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850 / Antenna : Fixed / Channel : 190

Liquid Temperature : 21.7 °C/Ambient Temperature: 22.0 °C

Date Tested : August 30, 2006

DUT: EZ600D UP; Type: Silde up; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.875 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ,Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 190/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.301 mW/g

Right tilt 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 17.9 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 0.353 W/kg

SAR(1 g) = 0.279 mW/g; SAR(10 g) = 0.207 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.296 mW/g

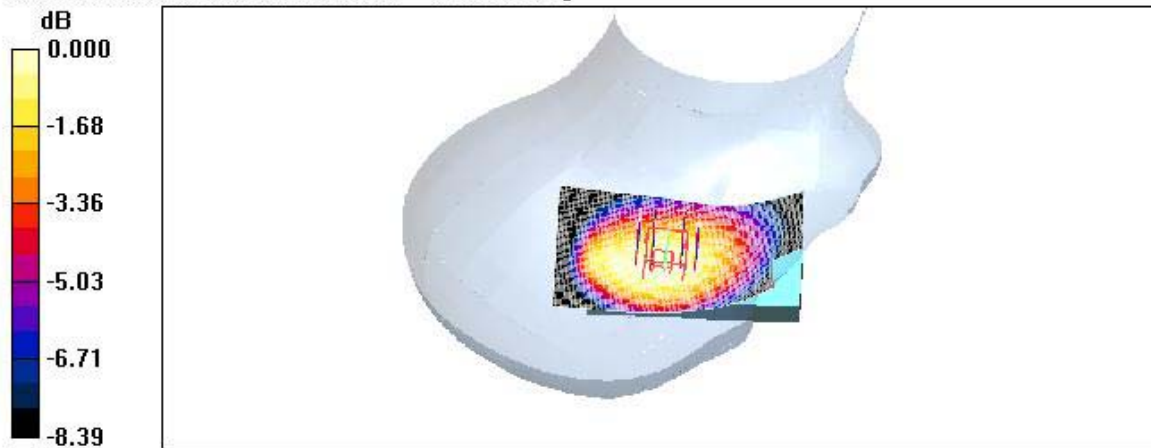

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900 / Antenna : Fixed / Channel : 512

Liquid Temperature : 21.8℃/Ambient Temperature: 22.1℃

Date Tested : August 31 , 2006

DUT: EZ600D Down; Type: Silde down; Serial: #1

Communication System: GSM 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 512/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.519 mW/g

Left touch 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 10.6 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.745 W/kg

SAR(1 g) = 0.446 mW/g; SAR(10 g) = 0.252 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.477 mW/g

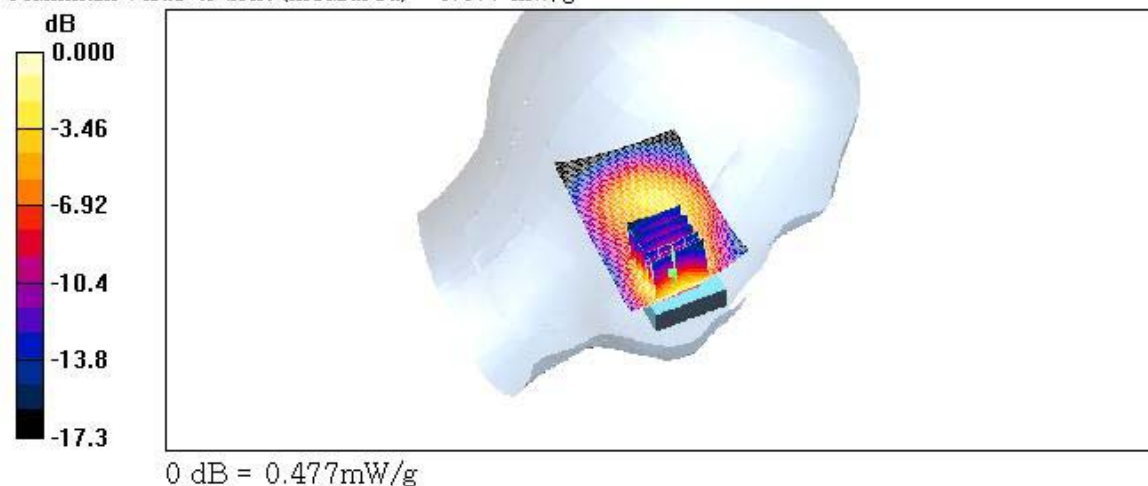

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900 / Antenna : Fixed / Channel : 661

Liquid Temperature : 21.8°C/Ambient Temperature: 22.1°C

Date Tested : August 31, 2006

DUT: EZ600D Down; Type: Silde down; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 661/Area Scan (51x71x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Maximum value of SAR (interpolated) = 0.644 mW/g


Left touch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm

Reference Value = 11.9 V/m; Power Drift = -0.185 dB

Peak SAR (extrapolated) = 0.896 W/kg

SAR(1 g) = 0.536 mW/g; SAR(10 g) = 0.302 mW/g

Maximum value of SAR (measured) = 0.578 mW/g

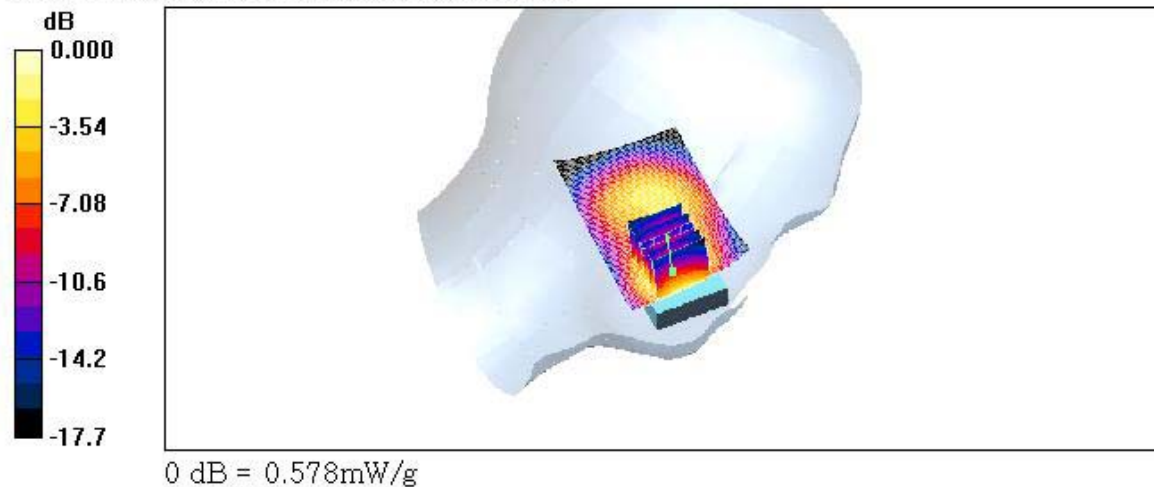

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM1900 / Antenna : Fixed / Channel : 810

Liquid Temperature : 21.8°C / Ambient Temperature: 22.1°C

Date Tested : August 31, 2006

DUT: EZ600D Down; Type: Silde down; Serial: #1

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 810/Area Scan (51x71x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Maximum value of SAR (interpolated) = 0.769 mW/g


Left touch 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm

Reference Value = 12.8 V/m; Power Drift = -0.115 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.642 mW/g; SAR(10 g) = 0.362 mW/g

Maximum value of SAR (measured) = 0.681 mW/g

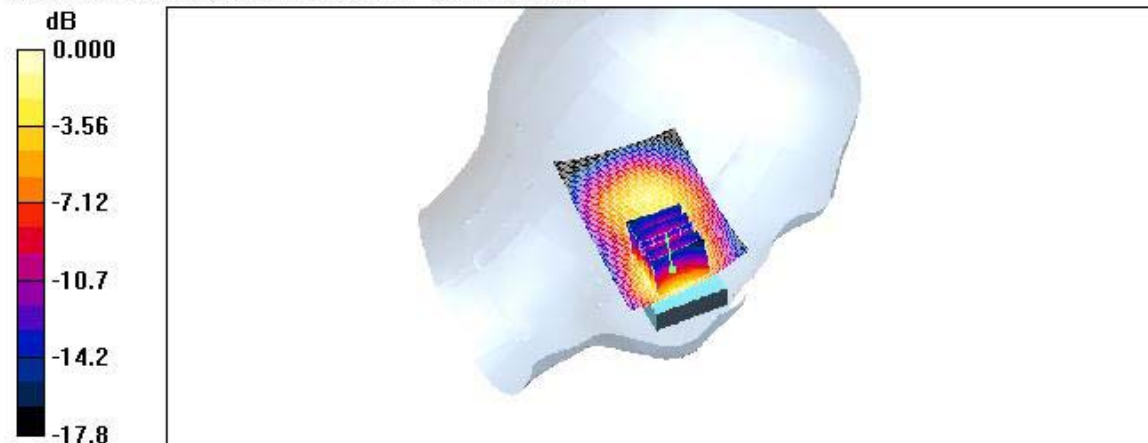

0 dB = 0.681mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900 / Antenna : Fixed / Channel : 512

Liquid Temperature : 21.8°C/Ambient Temperature: 22.1°C

Date Tested : August 31, 2006

DUT: EZ600D Down; Type: Silde down; Serial: #1

Communication System: GSM 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 512/Area Scan (51x71x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.736 mW/g

Right touch 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 10.6 V/m; Power Drift = 0.104 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.595 mW/g; SAR(10 g) = 0.341 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.642 mW/g

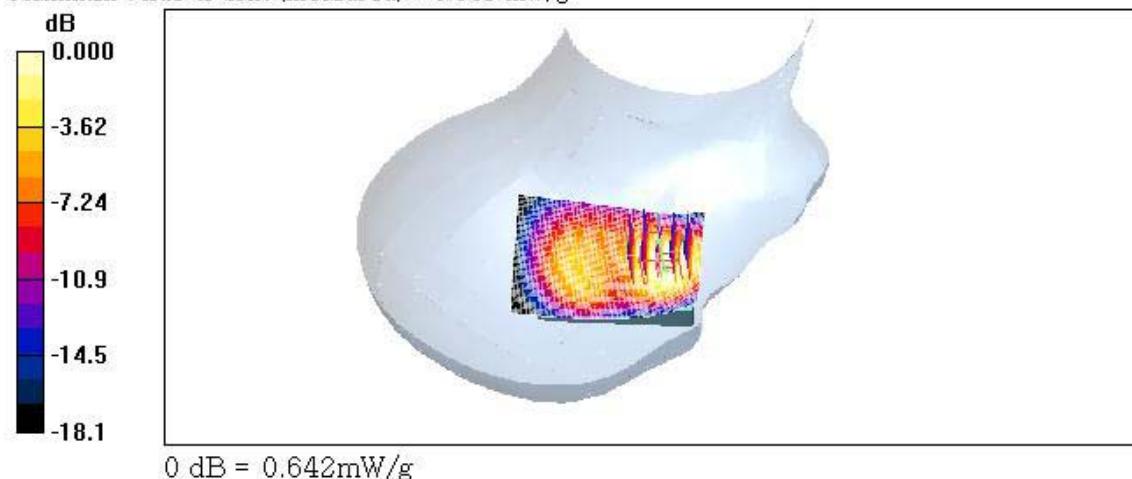

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.
Mode : GSM1900 / Antenna : Fixed / Channel : 661
Liquid Temperature : 21.8 °C / Ambient Temperature: 22.1 °C
Date Tested : August 31, 2006

DUT: EZ600D Down; Type: Silde down; Serial: #1


Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 661/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.876 mW/g

Right touch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 11.6 V/m; Power Drift = -0.087 dB
Peak SAR (extrapolated) = 1.22 W/kg
SAR(1 g) = 0.705 mW/g; SAR(10 g) = 0.400 mW/g
Maximum value of SAR (measured) = 0.765 mW/g

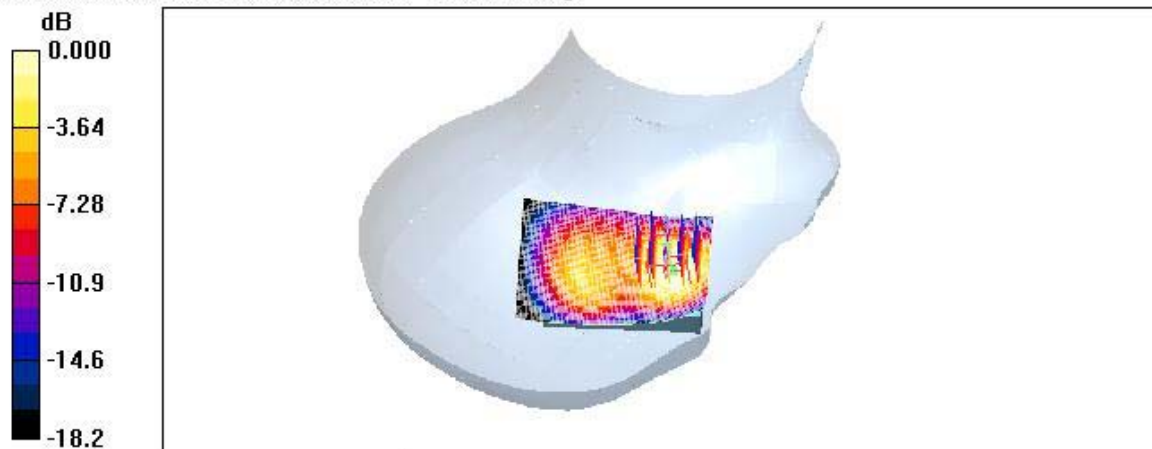

0 dB = 0.765mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900 / Antenna : Fixed / Channel : 810

Liquid Temperature : 21.8℃/Ambient Temperature: 22.1℃

Date Tested : August 31, 2006

DUT: EZ600D Down; Type: Silde down; Serial: #1

Communication System: GSM 1900; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 810/Area Scan (51x71x1): Measurement grid: $\Delta x=15$ mm, $\Delta y=15$ mm

Maximum value of SAR (interpolated) = 1.05 mW/g


Right touch 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x=8$ mm, $\Delta y=8$ mm, $\Delta z=5$ mm

Reference Value = 12.8 V/m; Power Drift = -0.078 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.839 mW/g; SAR(10 g) = 0.476 mW/g

Maximum value of SAR (measured) = 0.901 mW/g

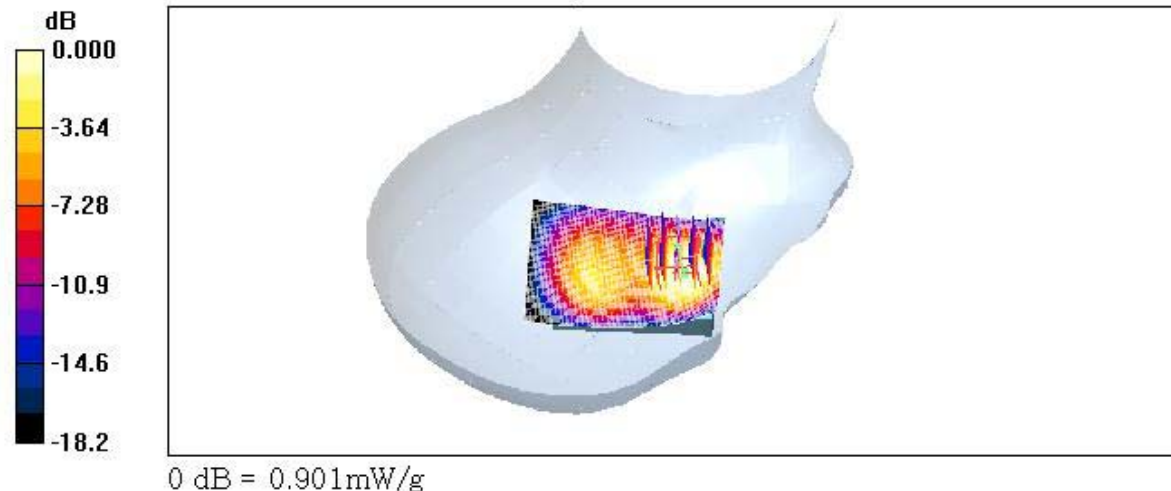

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.
Mode : GSM1900 / Antenna : Fixed / Channel : 810(Bluetooth)
Liquid Temperature : 21.8°C / Ambient Temperature: 22.1°C
Date Tested : August 31, 2006

DUT: EZ600D Down; Type: Silde down; Serial: #1


Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 810/Area Scan (51x71x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm
Maximum value of SAR (interpolated) = 1.05 mW/g

Right touch 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm
Reference Value = 12.8 V/m; Power Drift = -0.070 dB
Peak SAR (extrapolated) = 1.45 W/kg
SAR(1 g) = 0.837 mW/g; SAR(10 g) = 0.478 mW/g
Maximum value of SAR (measured) = 0.898 mW/g

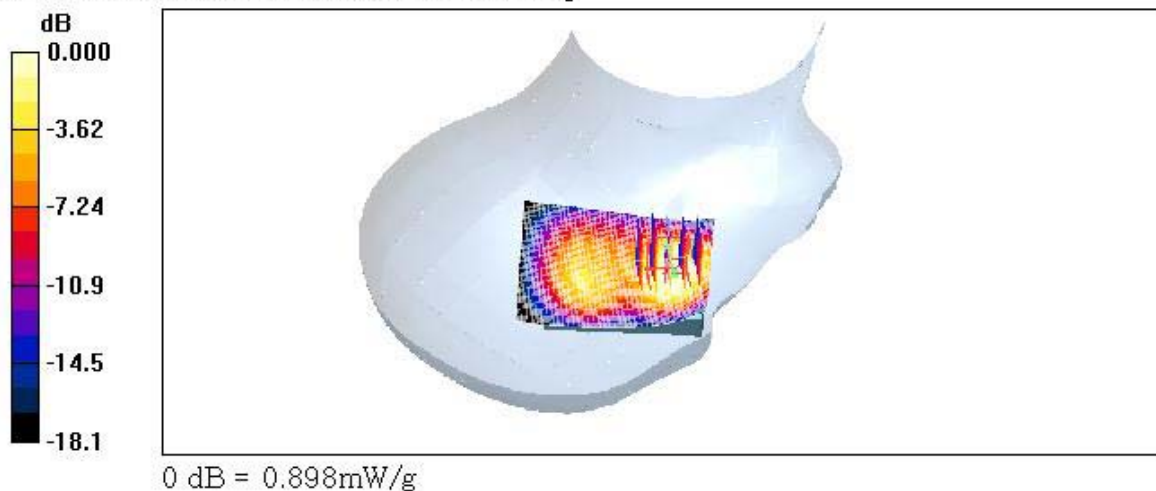

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900 / Antenna : Fixed / Channel : 661

Liquid Temperature : 21.8℃/Ambient Temperature: 22.1℃

Date Tested : August 31, 2006

DUT: EZ600D Down; Type: Slide down; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left tilt 661/Area Scan (51x71x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Maximum value of SAR (interpolated) = 0.280 mW/g


Left tilt 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$

Reference Value = 12.3 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.356 W/kg

SAR(1 g) = 0.244 mW/g; SAR(10 g) = 0.149 mW/g

Maximum value of SAR (measured) = 0.265 mW/g

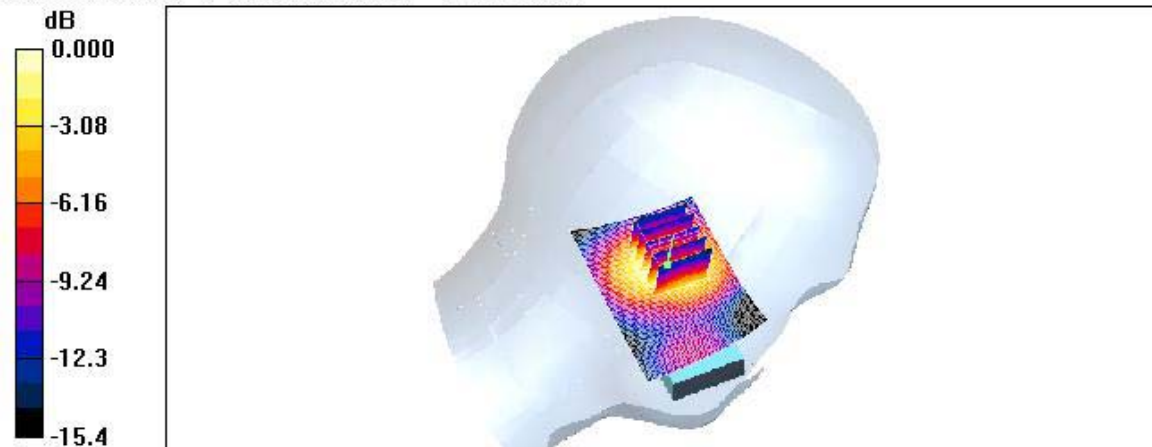

0 dB = 0.265mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM1900 / Antenna : Fixed / Channel : 661

Liquid Temperature : 21.8°C / Ambient Temperature: 22.1°C

Date Tested : August 31, 2006

DUT: EZ600D Down; Type: Slide down; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right tilt 661/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.273 mW/g


Right tilt 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.0 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.237 mW/g; SAR(10 g) = 0.148 mW/g

Maximum value of SAR (measured) = 0.255 mW/g

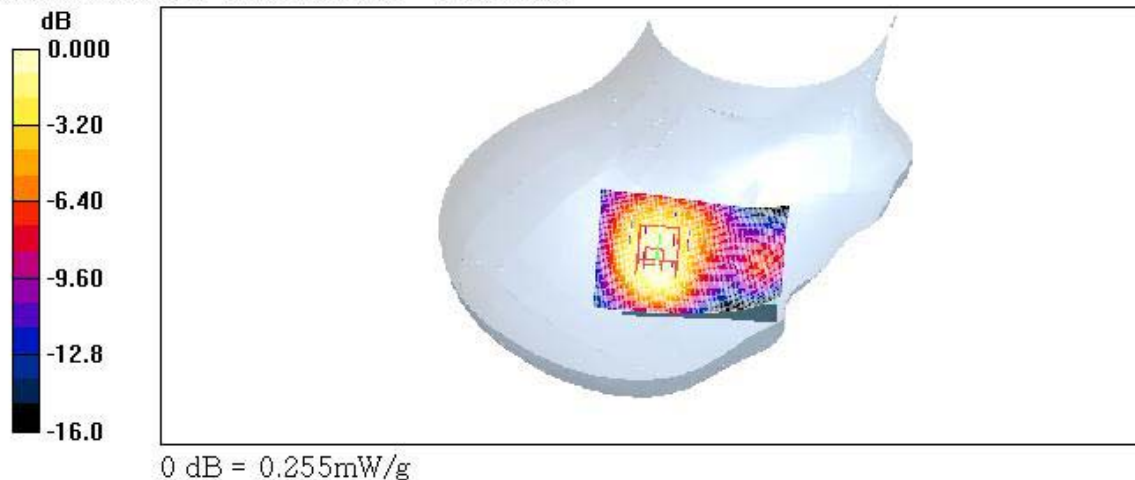

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900 / Antenna : Fixed / Channel : 512

Liquid Temperature : 21.8°C/Ambient Temperature: 22.1°C

Date Tested : August 31, 2006

DUT: EZ600D UP; Type: Silde up; Serial: #1

Communication System: GSM 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 512/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.669 mW/g

Left touch 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 11.9 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.817 W/kg

SAR(1 g) = 0.581 mW/g; SAR(10 g) = 0.377 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.629 mW/g

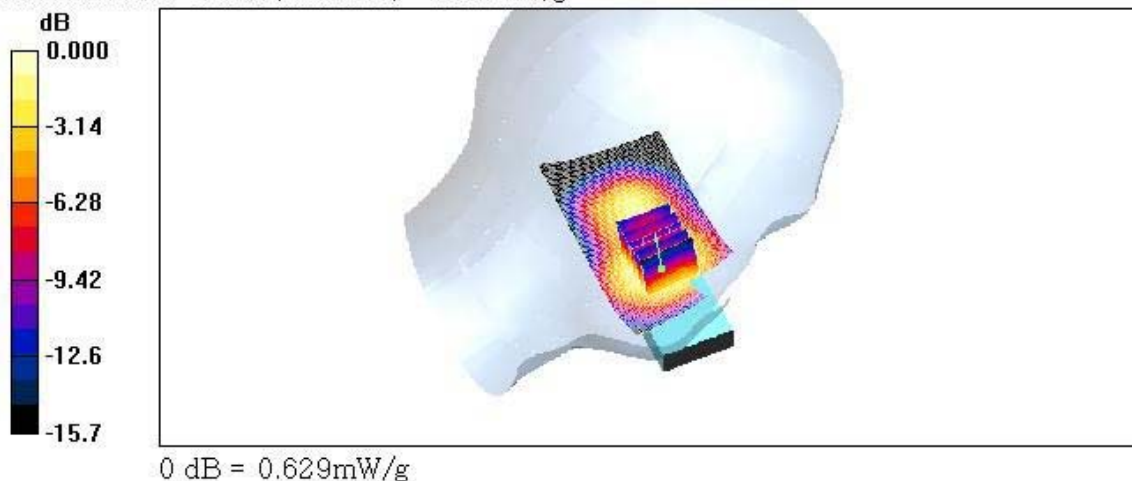

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900 / Antenna : Fixed / Channel:661

Liquid Temperature : 21.8°C/Ambient Temperature: 22.1°C

Date Tested : August 31, 2006

DUT: EZ600D UP; Type: Silde up; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 661/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.657 mW/g


Left touch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.8 V/m; Power Drift = -0.172 dB

Peak SAR (extrapolated) = 0.814 W/kg

SAR(1 g) = 0.569 mW/g; SAR(10 g) = 0.368 mW/g

Maximum value of SAR (measured) = 0.614 mW/g

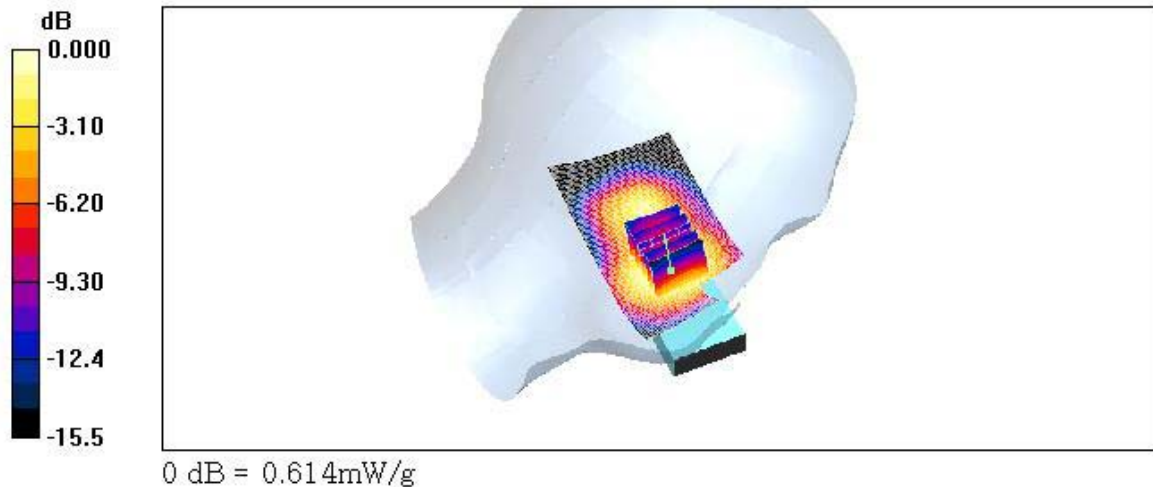

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900 / Antenna : Fixed / Channel : 810

Liquid Temperature : 21.8°C / Ambient Temperature: 22.1°C

Date Tested : August 31, 2006

DUT: EZ600D UP; Type: Silde up; Serial: #1

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 810/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.680 mW/g


Left touch 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.8 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 0.832 W/kg

SAR(1 g) = 0.581 mW/g; SAR(10 g) = 0.376 mW/g

Maximum value of SAR (measured) = 0.615 mW/g

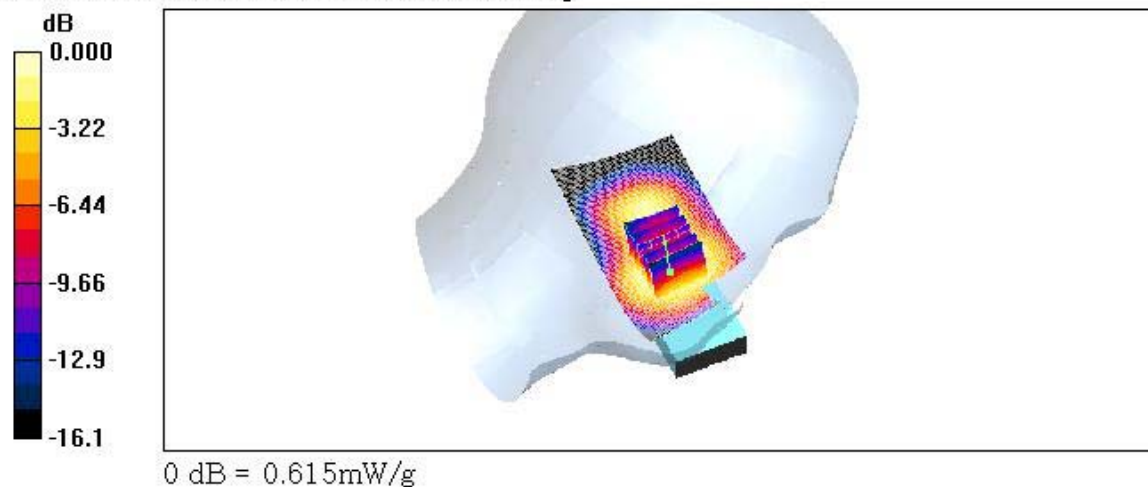

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900 / Antenna : Fixed / Channel : 512

Liquid Temperature : 21.8°C/Ambient Temperature: 22.1°C

Date Tested : August 31, 2006

DUT: EZ600D UP; Type: Slide up; Serial: #1

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

-Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

-Electronics: DAE4 Sn447; Calibrated: 2005-11-30

-Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 512/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.01 mW/g

Right touch 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 12.0 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.896 mW/g; SAR(10 g) = 0.548 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.967 mW/g

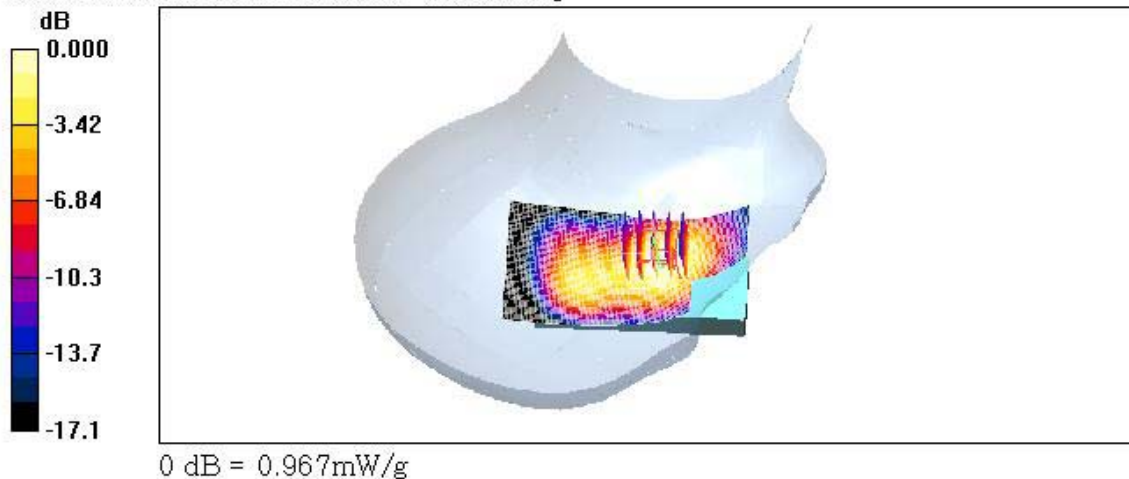

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900 / Antenna : Fixed / Channel : 512(Bluetooth)

Liquid Temperature : 21.8°C/Ambient Temperature: 22.1°C

Date Tested : August 31, 2006

DUT: EZ600D UP; Type: Silde up; Serial: #1

Communication System: GSM 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 512/Area Scan (51x91x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.01 mW/g

Right touch 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$


Reference Value = 12.1 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.894 mW/g; SAR(10 g) = 0.546 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.963 mW/g

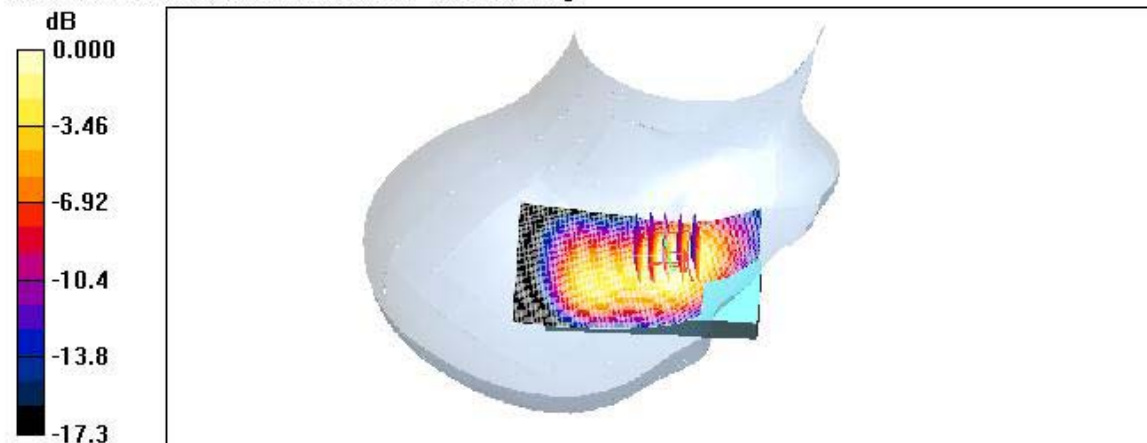

0 dB = 0.963mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM1900 / Antenna : Fixed / Channel : 661

Liquid Temperature : 21.8°C / Ambient Temperature: 22.1°C

Date Tested : August 31, 2006

DUT: EZ600D UP; Type: Silde up; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 661/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.957 mW/g


Right touch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.5 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.850 mW/g; SAR(10 g) = 0.514 mW/g

Maximum value of SAR (measured) = 0.888 mW/g

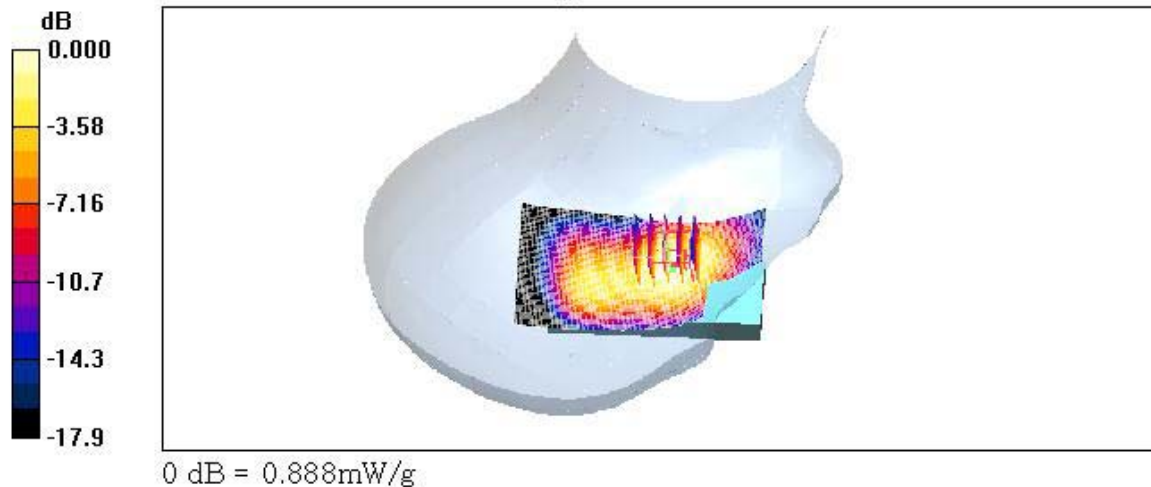

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900 / Antenna : Fixed / Channel : 810

Liquid Temperature : 21.8°C/Ambient Temperature: 22.1°C

Date Tested : August 31, 2006

DUT: EZ600D UP; Type: Silde up; Serial: #1

Communication System: GSM 1900; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 810/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.01 mW/g


Right touch 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.7 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.886 mW/g; SAR(10 g) = 0.534 mW/g

Maximum value of SAR (measured) = 0.942 mW/g

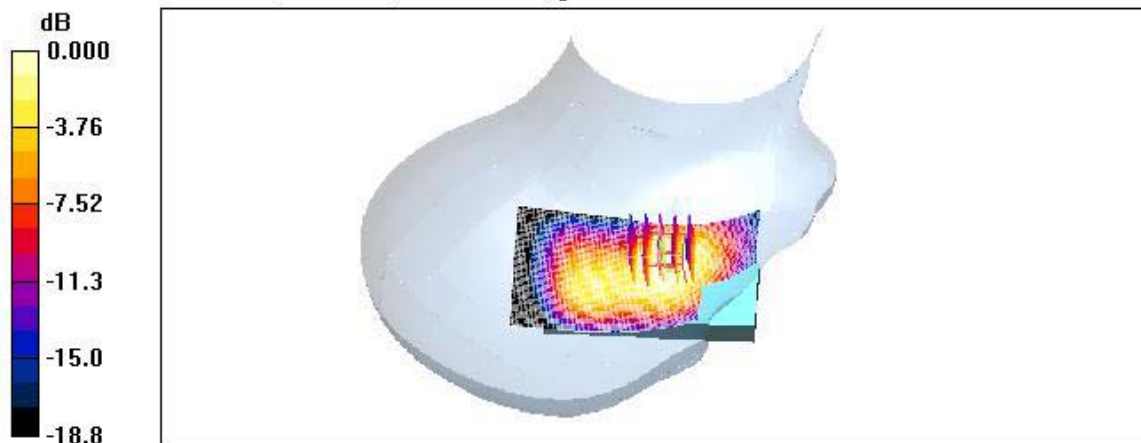

0 dB = 0.942mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900 / Antenna : Fixed / Channel: 661

Liquid Temperature : 21.8°C/Ambient Temperature: 22.1°C

Date Tested : August 31, 2006

DUT: EZ600D UP; Type: Silde up; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left tilt 661/Area Scan (51x91x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Maximum value of SAR (interpolated) = 0.687 mW/g


Left tilt 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$

Reference Value = 17.4 V/m; Power Drift = 0.065 dB

Peak SAR (extrapolated) = 0.810 W/kg

SAR(1 g) = 0.550 mW/g; SAR(10 g) = 0.339 mW/g

Maximum value of SAR (measured) = 0.592 mW/g

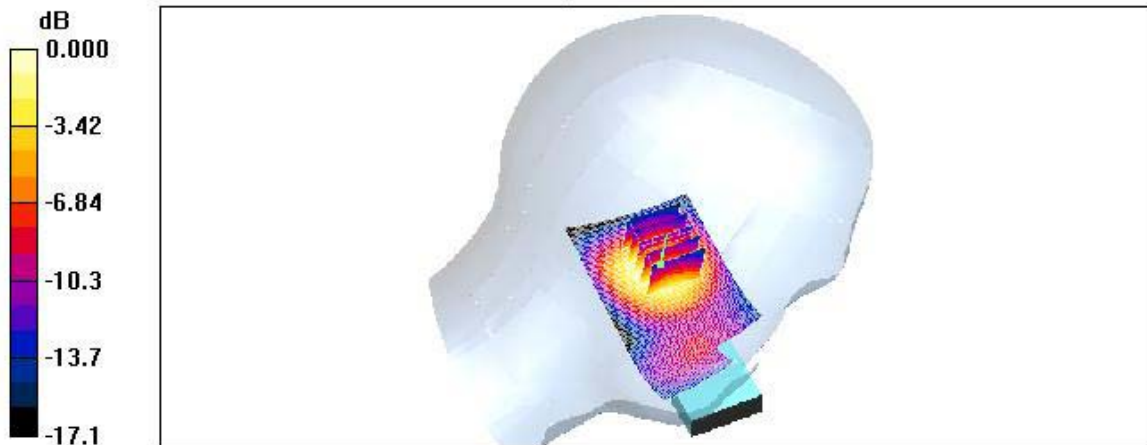

0 dB = 0.592mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900 / Antenna : Fixed / Channel : 661

Liquid Temperature : 21.8℃/Ambient Temperature: 22.1℃

Date Tested : August 31, 2006

DUT: EZ600D UP; Type: Silde up; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right tilt 661/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.715 mW/g

Right tilt 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.8 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.831 W/kg

SAR(1 g) = 0.563 mW/g; SAR(10 g) = 0.352 mW/g

Maximum value of SAR (measured) = 0.593 mW/g

