


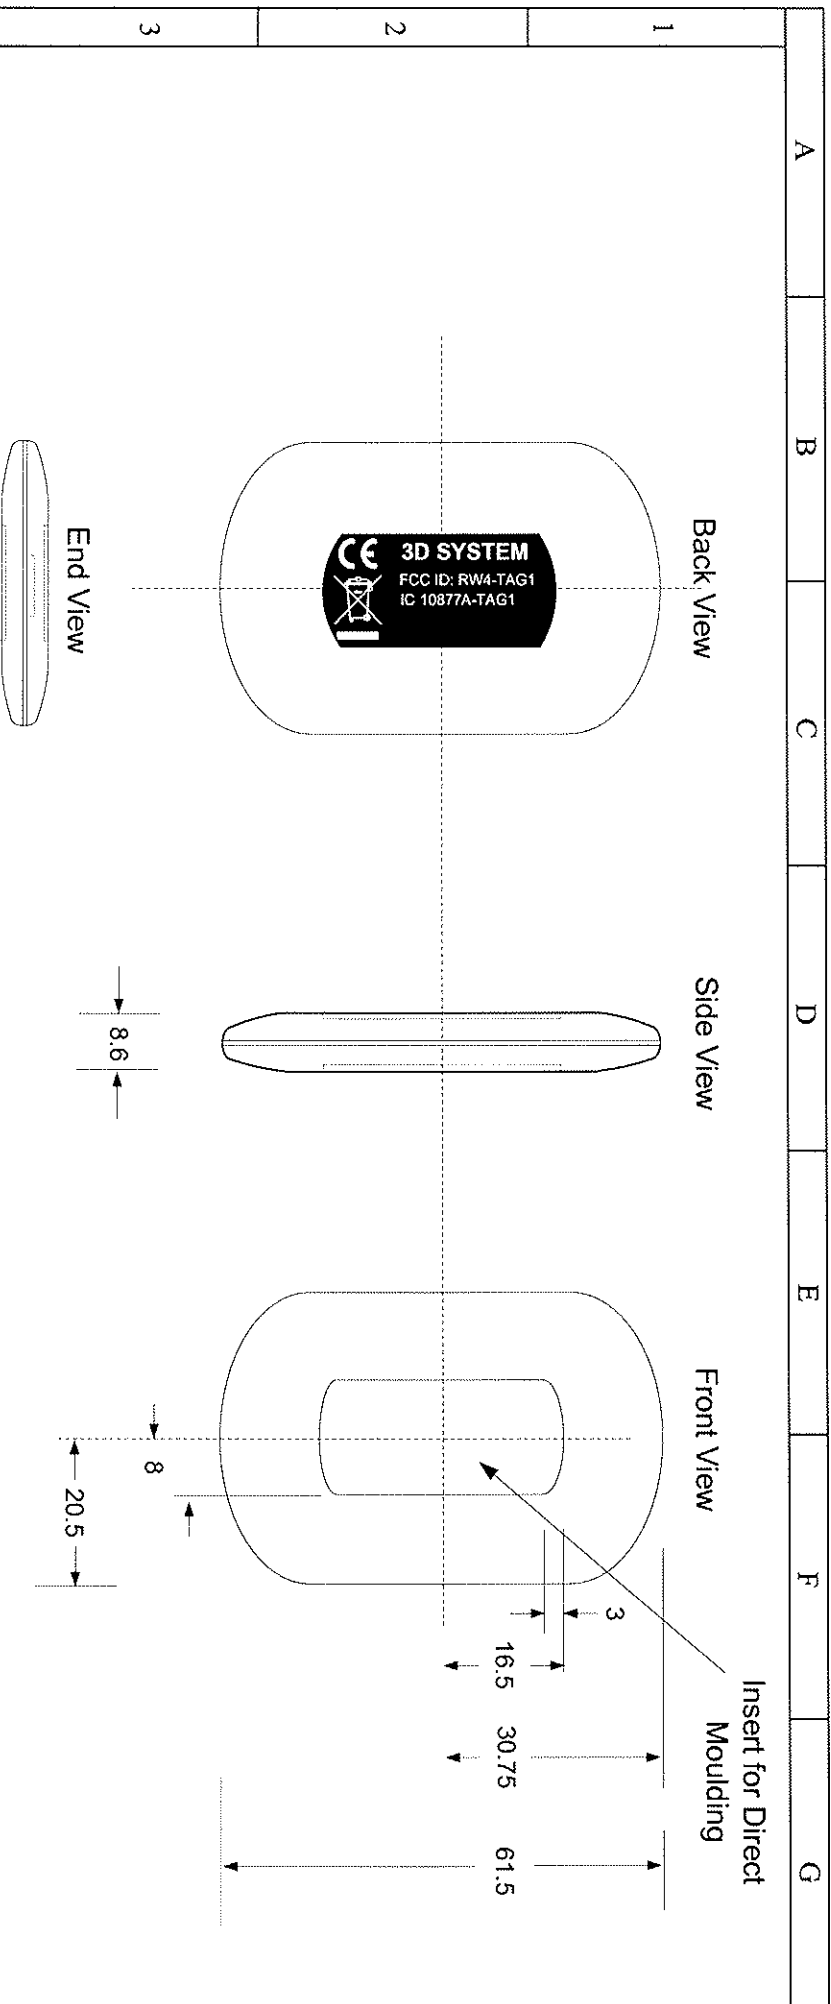

Material: ABS PA-757

Property	Unit	Test Method	Value
Tensile Strength	kg/cm ²	ASTM D-638	480
Tensile Elongation	%	ASTM D-638	20
Flexural Modulus	10kg/cm ²	ASTM D-790	2.7
Flexural Strength	kg/cm ²	ASTM D-790	790
Rockwell-Hardness		ASTM D-785	R-116
IZOD Impact Strength	1/8" kg-cm/cm	ASTM D-256	20
(Notched)	1/4" kg-cm/cm	ASTM D-256	18
Vicat Softening Temperature	°C	ASTM D-1525	105
Heat Distortion Temperature	°C	ASTM D-648 annealed	99
		ASTM D-648 unannealed	88
Specific Gravity		ASTM D-792	1.05
Melt Flow Index	Z30 °C x 5kg/10 min (cond. G)	ASTM D-1238	1.8
	220 °C x 10kg, 8/10 min	ISO 1133	22
Flammability	UL94		1/16 HB

Size Tolerance: +/- 0.3mm

Material Characteristics
High Gloss, Medium Impact Grade
Sparked Finish

Page:	1	of	1
Scale:	N. T. S.		
Date:	18/09/12		
Drawn By:	J HAMILTON		
Issue No.	A	RPC	

QM12/3 Issue 2

A	B	C	D	E	F	G
1						
2						
3						
4						
5						

AUTOMATIC TAG



Back View

DIMENSIONS ARE IN
MILLIMETRES
UNLESS OTHERWISE STATED

FINISHED PRODUCTS
TO
BE 100% TESTED

Project Name:
TAG1

Project Number:
H&P 140

Drawing Title:
TAG1 STICKER & POSITION

Drawing Number:
TAG1-06

Page: 1 of 1

Scale: N.T.S.

Date: 05/12/13

Drawn By: J HAMILTON

Issue No. A RPC

QM12/3 Issue 2



Hamilton & Palmer Installations Ltd. 2002

Designers, Manufacturers & Installers of Vehicle Security Systems