

TEST REPORT

Application No.: SZCR2510004622AT
Applicant: Razer Inc.
Address of Applicant: 9 Pasteur, Irvine, California 92618 United States
Manufacturer: Razer (Asia-Pacific) Pte. Ltd.
Address of Manufacturer: Razer SEA HQ, 1 one-north Crescent, #02-01, 138538, Singapore
Factory: RAZER TECHNOLOGY AND DEVELOPMENT (SHENZHEN) CO. LTD.
Address of Factory: East Wing, 3rd Floor, Block 2, Phase 1 of Vision Shenzhen Business Park
 Keji South Road, Hi-Tech Industrial Park, Shenzhen 518057, China

Equipment Under Test (EUT):

EUT Name: Wireless Earphones
Model No: 561
Trade Mark: RAZER
FCC ID: RWO-561
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2025-10-23
Date of Test: 2025-11-07 to 2025-11-28
Date of Issue: 2025-12-11

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Keny Xu

Keny Xu
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (EMC Laboratory)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251000462204

Page: 2 of 133

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2025-12-11		Original

Authorized for issue by:				
				
		Charlie Dai/Project Engineer		
				
		Eric Fu/Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence		N/A	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2020) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2020) Section 6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Conducted Peak Output Power		ANSI C63.10 (2020) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass
20dB Bandwidth		ANSI C63.10 (2020) Section 6.9.2	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Carrier Frequencies Separation		ANSI C63.10 (2020) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
Hopping Channel Number		ANSI C63.10 (2020) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Dwell Time		ANSI C63.10 (2020) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2020) Section 7.8.7.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2020) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(d)	Pass



3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty	7
4.4 Test Location	8
4.5 Test Facility	8
4.6 Deviation from Standards	8
4.7 Abnormalities from Standard Conditions	8
5 Equipment List	9
6 Radio Spectrum Technical Requirement	11
6.1 Antenna Requirement	11
6.1.1 Test Requirement:	11
6.1.2 Conclusion	11
6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	12
6.2.1 Test Requirement:	12
6.2.2 Conclusion	12
7 Radio Spectrum Matter Test Results	14
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	14
7.1.1 E.U.T. Operation	14
7.1.2 Test Mode Description	14
7.1.3 Test Setup Diagram	15
7.1.4 Measurement Procedure and Data	15
7.2 Radiated Emissions which fall in the restricted bands	18
7.2.1 E.U.T. Operation	18
7.2.2 Test Mode Description	18
7.2.3 Test Setup Diagram	19
7.2.4 Measurement Procedure and Data	20
7.3 Radiated Spurious Emissions Below 1GHz	37
7.3.1 E.U.T. Operation	37
7.3.2 Test Mode Description	37
7.3.3 Test Setup Diagram	38
7.3.4 Measurement Procedure and Data	38
7.4 Radiated Spurious Emissions Above 1GHz	42
7.4.1 E.U.T. Operation	42
7.4.2 Test Mode Description	42



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251000462204

Page: 5 of 133

7.4.3	Test Setup Diagram	43
7.4.4	Measurement Procedure and Data	44
7.5	Conducted Peak Output Power	69
7.5.1	E.U.T. Operation	69
7.5.2	Test Mode Description	69
7.5.3	Test Setup Diagram	70
7.5.4	Measurement Procedure and Data	70
7.6	20dB Bandwidth	71
7.6.1	E.U.T. Operation	71
7.6.2	Test Mode Description	71
7.6.3	Test Setup Diagram	71
7.6.4	Measurement Procedure and Data	71
7.7	Carrier Frequencies Separation	72
7.7.1	E.U.T. Operation	72
7.7.2	Test Mode Description	72
7.7.3	Test Setup Diagram	73
7.7.4	Measurement Procedure and Data	73
7.8	Hopping Channel Number	74
7.8.1	E.U.T. Operation	74
7.8.2	Test Mode Description	74
7.8.3	Test Setup Diagram	75
7.8.4	Measurement Procedure and Data	75
7.9	Dwell Time	76
7.9.1	E.U.T. Operation	76
7.9.2	Test Mode Description	76
7.9.3	Test Setup Diagram	77
7.9.4	Measurement Procedure and Data	77
7.10	Conducted Band Edges Measurement	78
7.10.1	E.U.T. Operation	78
7.10.2	Test Mode Description	78
7.10.3	Test Setup Diagram	79
7.10.4	Measurement Procedure and Data	79
7.11	Conducted Spurious Emissions	80
7.11.1	E.U.T. Operation	80
7.11.2	Test Mode Description	80
7.11.3	Test Setup Diagram	81
7.11.4	Measurement Procedure and Data	81
8	Test Setup Photo	82
9	EUT Constructional Details (EUT Photos)	82
10	Appendix	83



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:	Left earbud Li-Ion Polymer Battery: Model:1254W6 Normal Voltage:3.85V Rated capacity:80mAh Right earbud Li-Ion Polymer Battery: Model:1254W6 Normal Voltage:3.85V Rated capacity:80mAh Charging case Li-Ion Polymer Battery: Model:702231PN4 Normal Voltage:3.85V Rated capacity:600mAh Dongle: Powered by USB Type C
Cable(s):	USB-C to C cable 43cm shielded
Technology Type:	2.4G Proprietary
Operation Frequency:	1Mbps: 2402MHz to 2480MHz 2Mbps: 2404MHz to 2478MHz (Excluding 2426MHz)
Spectrum Spread Technology:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK
Data Rate:	1Mbps, 2Mbps
Number of Channels:	1Mbps: 40 2Mbps: 37
Channel Spacing:	2MHz
Antenna Type:	PIFA Antenna
Antenna Gain:	Left earbuds: -2.4dBi, Right earbuds: -1.4dBi
Cable Loss (for RF conducted test):	0.8dB

Remark:The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Adapter	HONOR	HN-200500CP0	N/A



4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	$\pm 3.2\text{dB}$
Radiated Emissions which fall in the restricted bands	$\pm 6.0\text{dB}$ (Below 1GHz); $\pm 4.6\text{dB}$ (Above 1GHz)
Radiated Spurious Emissions Below 1GHz	$\pm 6.0\text{dB}$ for 3m; $\pm 5.0\text{dB}$ for 10m
Radiated Spurious Emissions Above 1GHz	$\pm 4.6\text{dB}$ (1-18GHz); $\pm 4.8\text{dB}$ (18-40GHz)
Conducted Peak Output Power	$\pm 0.4\text{dB}$
20dB Bandwidth	$\pm 0.3\%$
Carrier Frequencies Separation	$\pm 5.4 \times 10^{-8}$
Hopping Channel Number	$\pm 5.4 \times 10^{-8}$
Dwell Time	$\pm 0.3\%$
Conducted Band Edges Measurement	$\pm 2.7\text{dB}$
Conducted Spurious Emissions	$\pm 2.7\text{dB}$

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251000462204

Page: 8 of 133

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2025-05-07	2028-05-06
EMI Test Receiver	Rohde&Schwarz	ESR	SZ-WRG-M-047	2025-01-08	2026-01-07
Measurement Software	AUDIX	e3 V8.2014-6-27a	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2025-07-05	2026-07-04
LISN	Rohde&Schwarz	ENV216	SEM007-01	2025-07-25	2026-07-24
LISN	ETS-LINDGREN	3816/2	SEM007-02	2025-03-03	2026-03-02

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-01-07	2026-01-06
Low Noise Amplifier 30M-8GHz	Tonscend	TAP30M8G30	SZ-WRG-M-050	2025-01-07	2026-01-06
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2023-12-21	2025-12-20
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2025-01-06	2028-01-05
Humidity and Temperature Indicator	deli	8838	SEM002-46	2025-07-23	2026-07-22

Radiated Spurious Emissions Below 1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2025-03-21	2026-03-20
MXE EMI receiver	KEYSIGHT	N9038A	SEM004-16	2025-07-25	2026-07-24
Trilog-Broadband Antenna	Schwarzbeck	VULB9168	SEM003-18	2025-08-29	2027-08-28
Pre-amplifier	Sonoma Instrument Co	310N	SEM005-04	2025-03-04	2026-03-03
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2023-11-20	2025-11-19
				2025-11-17	2027-11-16
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM029-01	2025-07-05	2026-07-04



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251000462204

Page: 10 of 133

Radiated Spurious Emissions Above 1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-01-07	2026-01-06
Low Noise Amplifier 1G-18GHz	Tonscend	TAP01018050	SZ-WRG-M-051	2025-01-07	2026-01-06
Low Noise Amplifier 18G-40GHz	Tonscend	TAP18040048	SZ-WRG-M-052	2025-01-08	2026-01-07
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2023-12-21	2025-12-20
SHF-EHF Horn 15GHz-40GHz	SCHWARZBECK	BBHA 9170	SZ-WRG-M-056	2023-12-25	2025-12-24
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2025-01-06	2028-01-05
Humidity and Temperature Indicator	deli	8838	SEM002-46	2025-07-23	2026-07-22

RF Conducted Test					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Power Sensor	TST PASS	TSPS2023R	SEM009-26	2025-03-04	2026-03-03
Power Sensor	KEYSIGHT	U2021XA	SEM009-16	2025-03-04	2026-03-03
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2025-07-24	2026-07-23
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2025-03-04	2026-03-03
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2025-07-05	2026-07-04
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2025-03-03	2026-03-02

General used equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2025-07-23	2026-07-22
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2025-07-23	2026-07-22
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2025-03-03	2026-03-02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is Left earbuds:-2.4dBi, Right earbuds:-1.4dBi

Antenna location: Refer to internal photo.



6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

6.2.2 Conclusion

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

> Number of shift register stages: 9


> Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

> Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence


An example of Pseudorandom Frequency Hopping Sequence as follow:



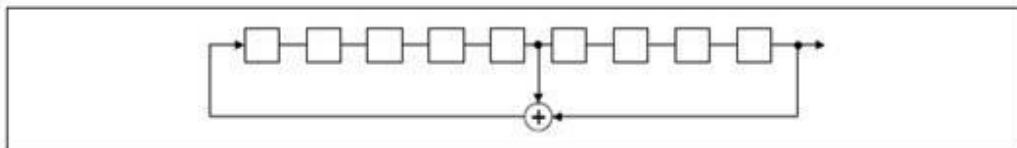

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

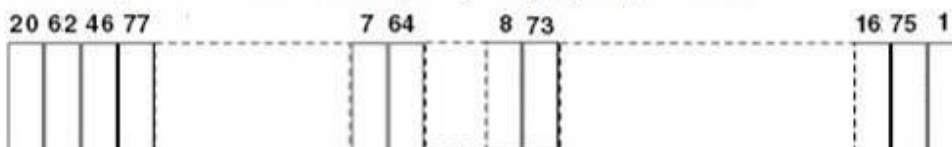

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207
 Test Method: ANSI C63.10 (2020) Section 6.2
 Test Engineer: Wade Li

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:


Temperature: 25.3 °C Humidity: 40.5 % RH Atmospheric Pressure: 1020 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Pre-scan	06	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.



7.1.3 Test Setup Diagram

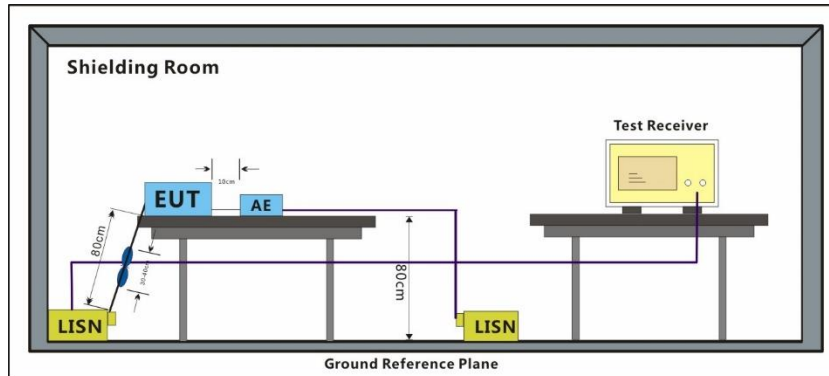


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark : Level=Read Level+ Cable Loss+ LISN Factor



Test Mode: 05; Line: Live line

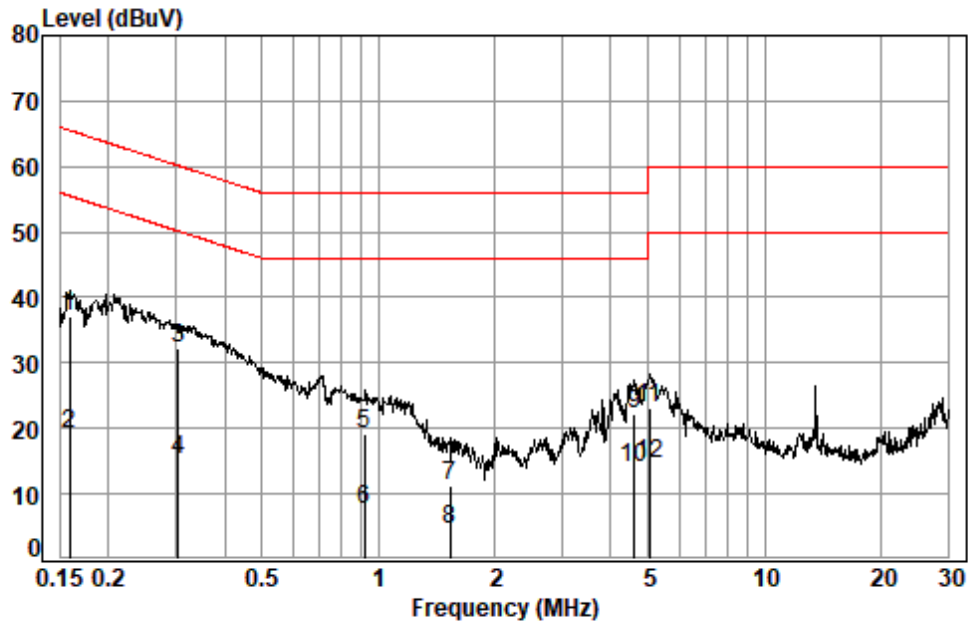


Site : Shielding Room
Condition: Line
Job No. : 04622AT
Test mode: 05

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1590	0.05	10.18	26.81	37.04	65.52	-28.48	QP
2	0.1590	0.05	10.18	9.02	19.25	55.52	-36.27	Average
3 *	0.3035	0.07	9.84	22.30	32.21	60.15	-27.94	QP
4	0.3035	0.07	9.84	5.32	15.23	50.15	-34.92	Average
5	0.9233	0.10	9.60	9.51	19.21	56.00	-36.79	QP
6	0.9233	0.10	9.60	-2.03	7.67	46.00	-38.33	Average
7	1.5355	0.11	9.58	1.53	11.22	56.00	-44.78	QP
8	1.5355	0.11	9.58	-5.14	4.55	46.00	-41.45	Average
9	4.5979	0.13	9.66	12.27	22.06	56.00	-33.94	QP
10 *	4.5979	0.13	9.66	4.35	14.14	46.00	-31.86	Average
11	5.0312	0.13	9.66	13.36	23.15	60.00	-36.85	QP
12	5.0312	0.13	9.66	4.94	14.73	50.00	-35.27	Average



Test Mode: 05; Line: Neutral Line

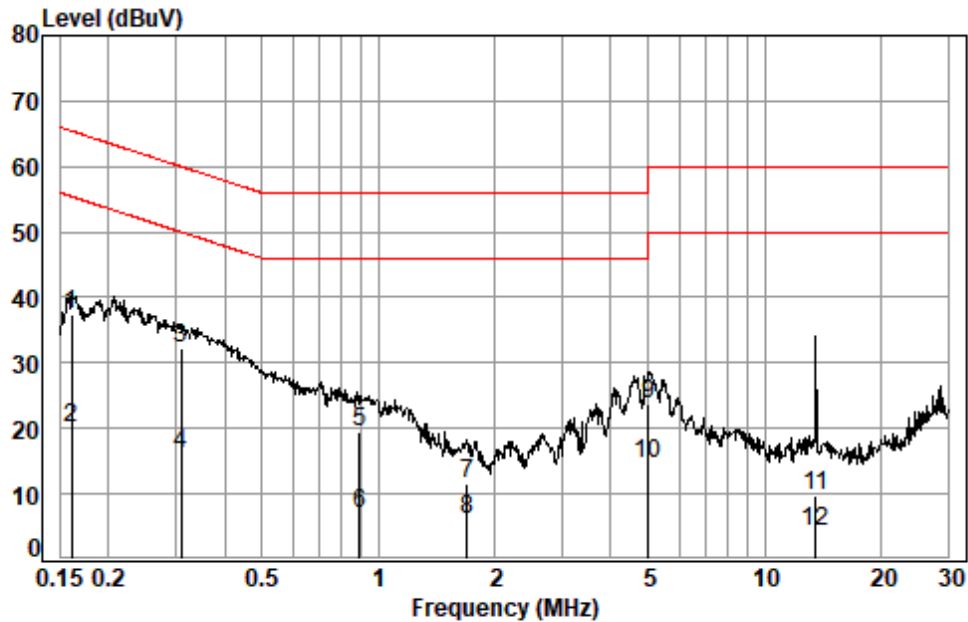

Site : Shielding Room
Condition: Neutral
Job No. : 04622AT
Test mode: 05

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1607	0.05	10.13	27.25	37.43	65.43	-28.00	QP
2	0.1607	0.05	10.13	9.91	20.09	55.43	-35.34	Average
3 *	0.3083	0.07	9.77	22.29	32.13	60.02	-27.89	QP
4 *	0.3083	0.07	9.77	6.27	16.11	50.02	-33.91	Average
5	0.8944	0.10	9.57	9.75	19.42	56.00	-36.58	QP
6	0.8944	0.10	9.57	-2.67	7.00	46.00	-39.00	Average
7	1.6981	0.11	9.55	1.84	11.50	56.00	-44.50	QP
8	1.6981	0.11	9.55	-3.49	6.17	46.00	-39.83	Average
9	5.0046	0.13	9.56	13.90	23.59	60.00	-36.41	QP
10	5.0046	0.13	9.56	4.77	14.46	50.00	-35.54	Average
11	13.5509	0.25	9.78	-0.29	9.74	60.00	-50.26	QP
12	13.5509	0.25	9.78	-5.73	4.30	50.00	-45.70	Average



7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2020) Section 6.10.5
 Measurement Distance: 3m
 Test Engineer: Xing Guo

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2.1 E.U.T. Operation

Operating Environment:


Temperature: 24.5 °C Humidity: 50.8 % RH Atmospheric Pressure: 1020 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	03	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Pre-scan	04	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	05	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Final test	06	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.



7.2.3 Test Setup Diagram

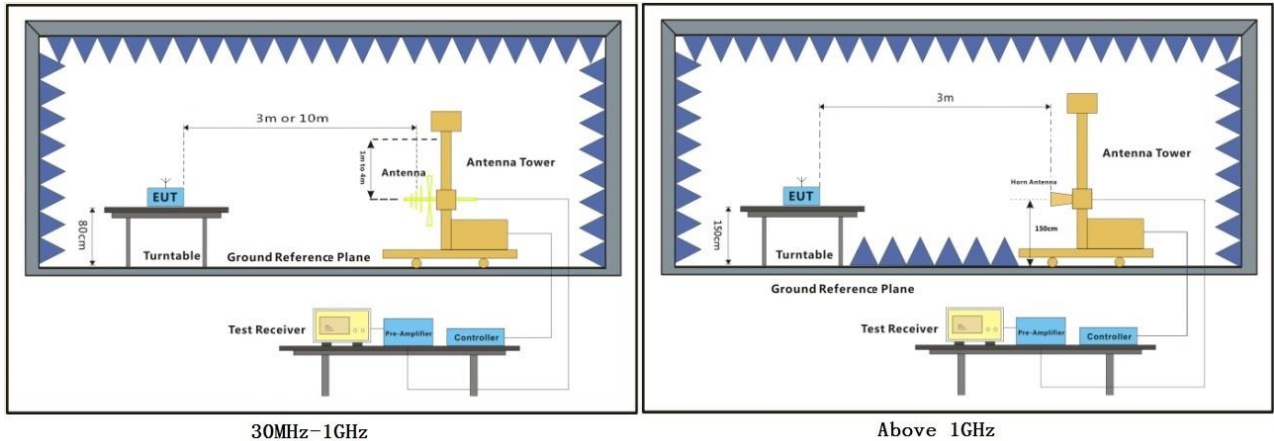

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 4: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251000462204

Page: 21 of 133

Right earbuds 1M

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:Low

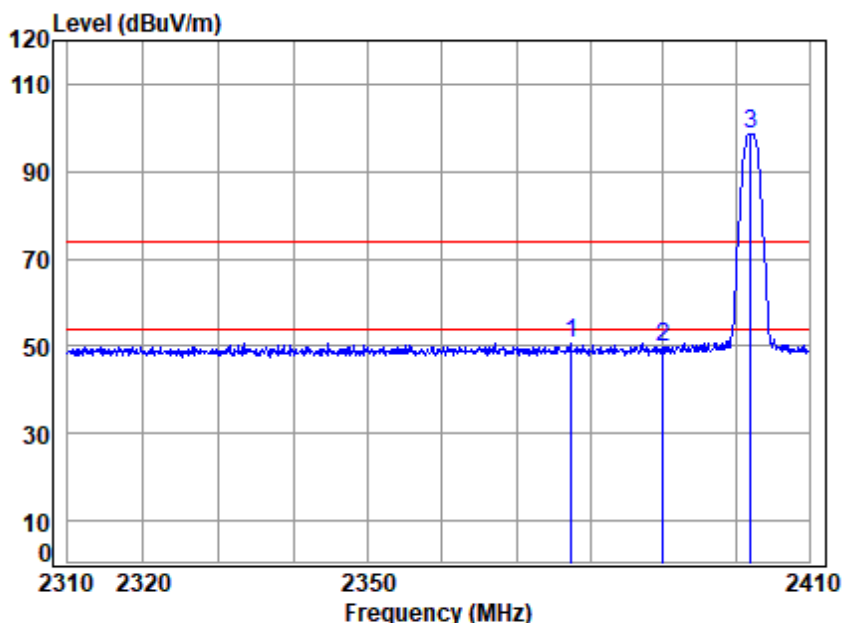

Condition: 3m HORIZONTAL

Job No : 04622AT

Mode : 2402 Band edge

: 2.4G SRD 1M R

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2377.437	6.82	27.41	30.69	47.18	50.72	74.00	-23.28	peak
2	2390.000	6.83	27.46	30.69	46.19	49.79	74.00	-24.21	peak
3 pp	2402.000	6.84	27.50	30.69	95.04	98.69	74.00	24.69	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:Low

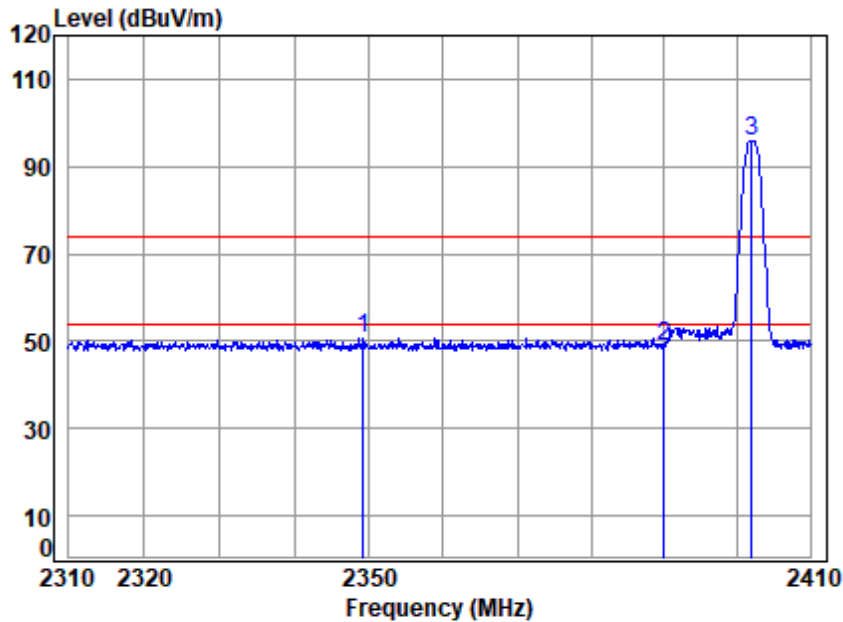

Condition: 3m VERTICAL

Job No : 04622AT

Mode : 2402 Band edge

: 2.4G SRD 1M R


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2349.194	6.80	27.30	30.68	47.33	50.75	74.00	-23.25	peak
2	2390.000	6.83	27.46	30.69	45.44	49.04	74.00	-24.96	peak
3 pp	2402.000	6.84	27.50	30.69	92.23	95.88	74.00	21.88	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:High

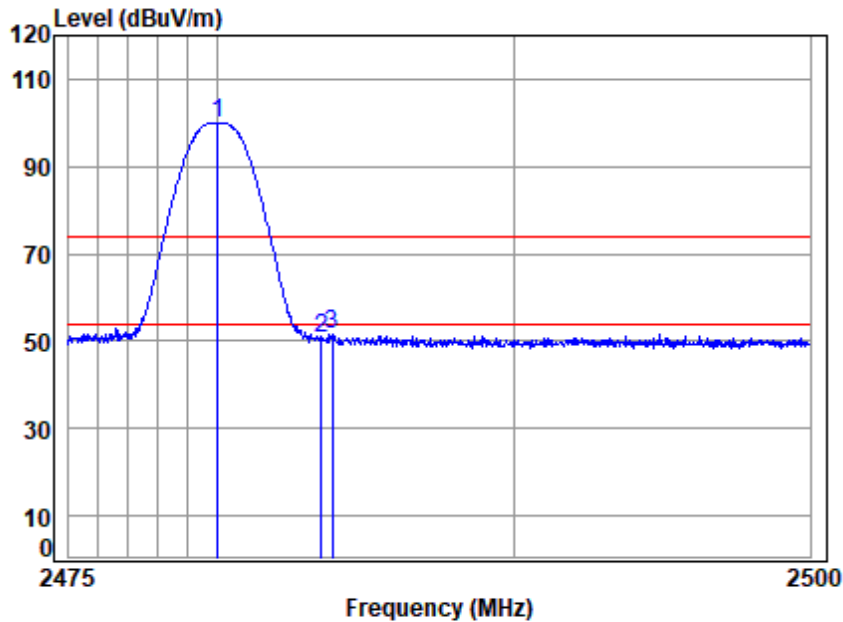

Condition: 3m HORIZONTAL

Job No : 04622AT


Mode : 2480 Band edge

: 2.4G SRD 1M R

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2480.000	7.38	27.78	30.71	95.40	99.85	74.00	25.85	peak
2	2483.500	7.40	27.80	30.71	46.38	50.87	74.00	-23.13	peak
3	2483.846	7.40	27.80	30.71	47.22	51.71	74.00	-22.29	peak



Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:High

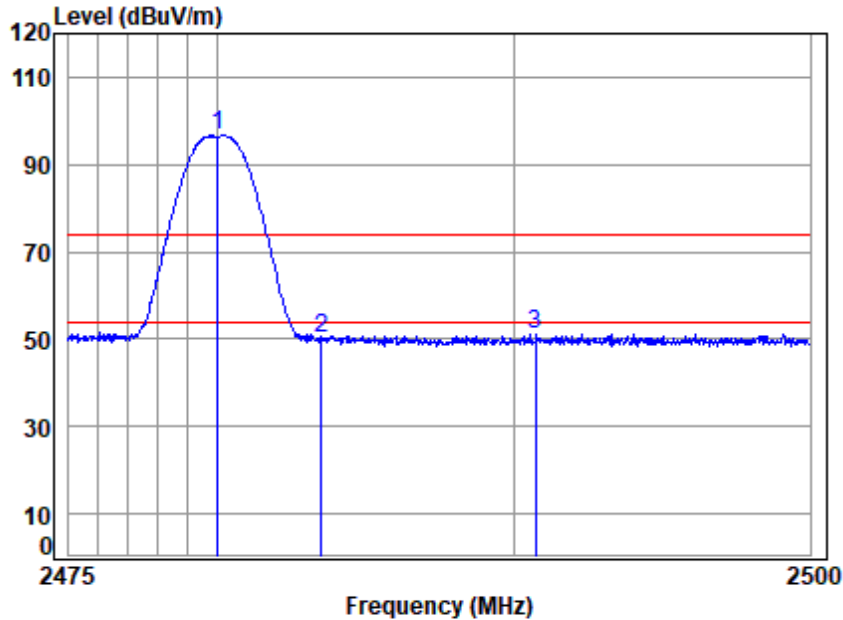

Condition: 3m VERTICAL

Job No : 04622AT

Mode : 2480 Band edge

: 2.4G SRD 1M R

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2480.000	7.38	27.78	30.71	92.10	96.55	74.00	22.55 peak
2	2483.500	7.40	27.80	30.71	45.57	50.06	74.00	-23.94 peak
3	2490.721	7.45	27.84	30.71	46.55	51.13	74.00	-22.87 peak



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251000462204

Page: 25 of 133

Right earbuds 2M

Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:Low

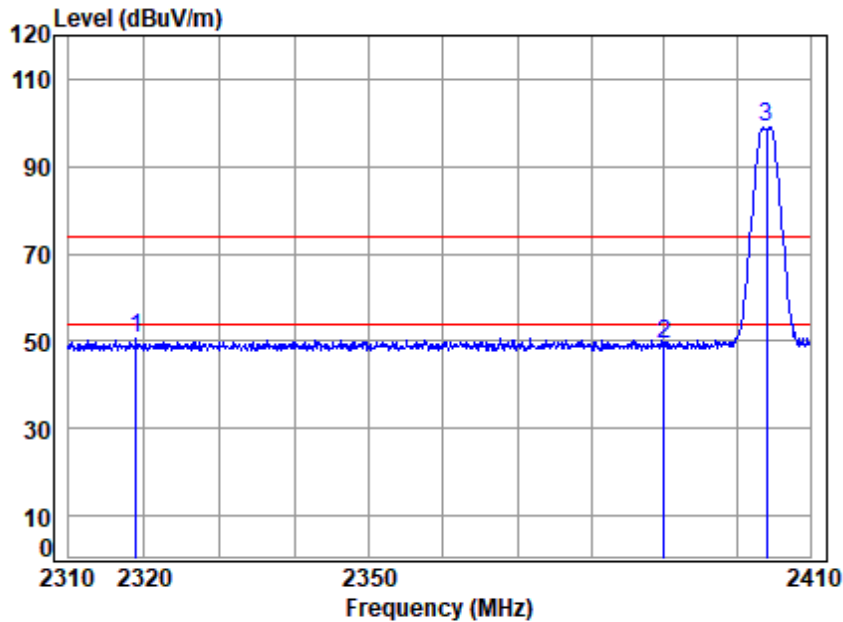

Condition: 3m HORIZONTAL

Job No : 04622AT

Mode : 2404 Band edge

: 2.4G SRD 2M R

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2318.926	6.79	27.24	30.67	47.32	50.68	74.00	-23.32	peak
2	2390.000	6.83	27.46	30.69	45.50	49.10	74.00	-24.90	peak
3 pp	2404.000	6.86	27.51	30.69	95.22	98.90	74.00	24.90	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:Low

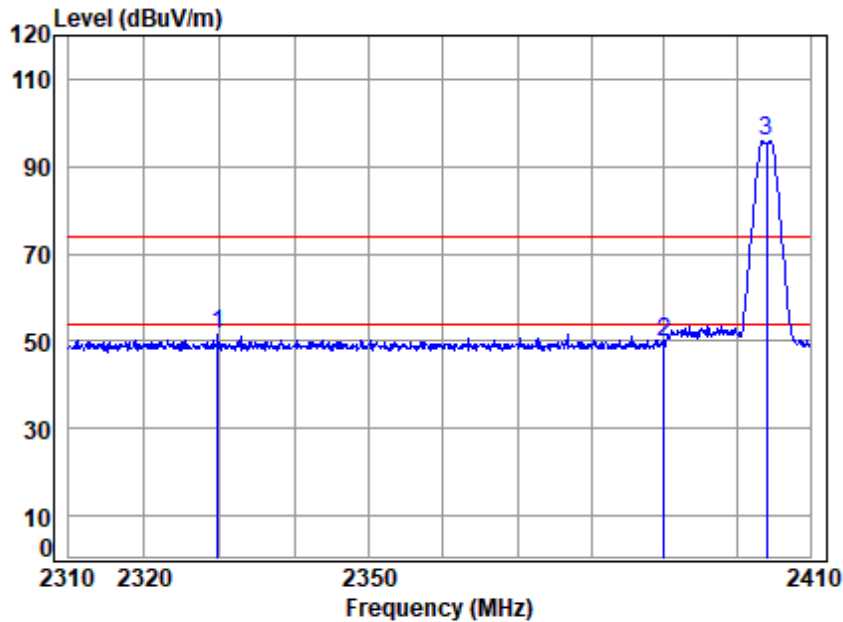

Condition: 3m VERTICAL

Job No : 04622AT

Mode : 2404 Band edge

: 2.4G SRD 2M R

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2329.761	6.80	27.26	30.68	48.33	51.71	74.00	-22.29	peak
2	2390.000	6.83	27.46	30.69	46.16	49.76	74.00	-24.24	peak
3 pp	2404.000	6.86	27.51	30.69	92.07	95.75	74.00	21.75	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:High

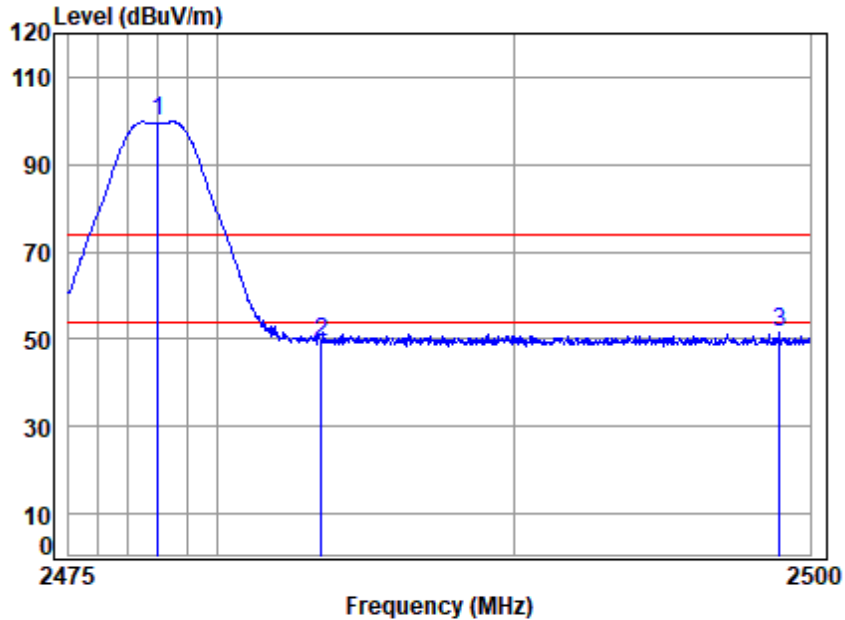

Condition: 3m HORIZONTAL

Job No : 04622AT


Mode : 2478 Band edge

: 2.4G SRD 2M R

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2478.000	7.36	27.77	30.71	95.33	99.75	74.00	25.75	peak
2	2483.500	7.40	27.80	30.71	44.94	49.43	74.00	-24.57	peak
3	2498.970	7.50	27.89	30.71	46.69	51.37	74.00	-22.63	peak



Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:High

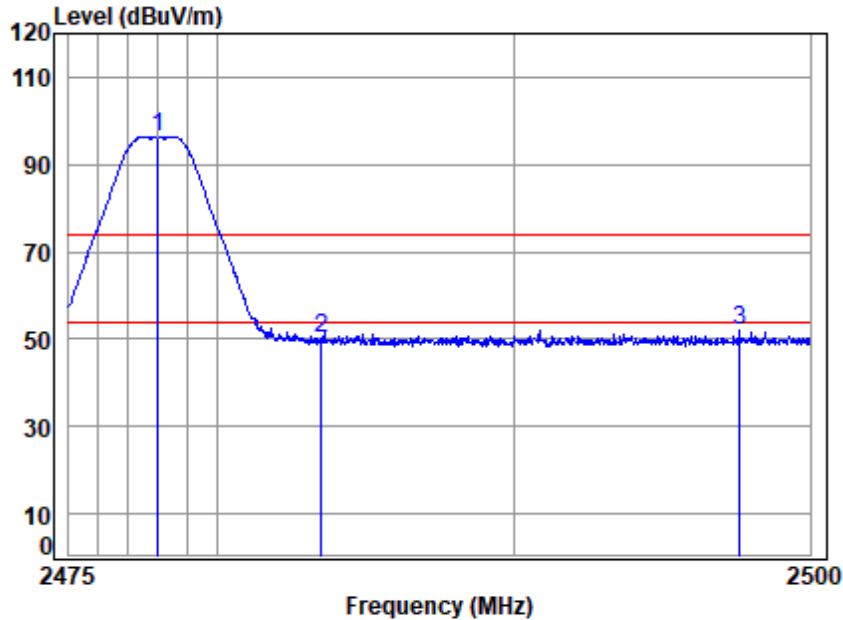

Condition: 3m VERTICAL

Job No : 04622AT

Mode : 2478 Band edge

: 2.4G SRD 2M R

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2478.000	7.36	27.77	30.71	91.96	96.38	74.00	22.38	peak
2	2483.500	7.40	27.80	30.71	45.52	50.01	74.00	-23.99	peak
3	2497.614	7.49	27.89	30.71	47.23	51.90	74.00	-22.10	peak



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251000462204

Page: 29 of 133

Left earbuds 1M

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:Low

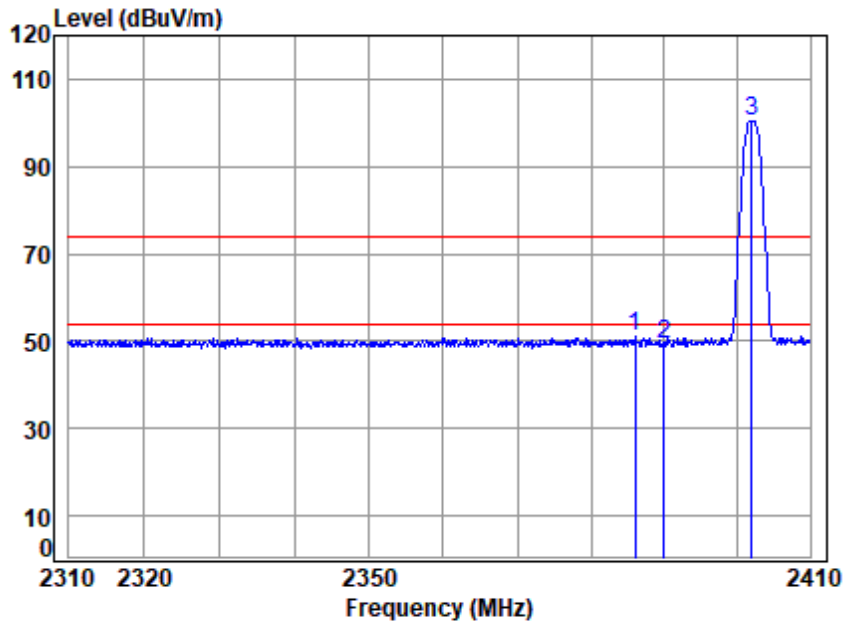

Condition: 3m HORIZONTAL

Job No : 04622AT

Mode : 2402 Band edge

: 2.4G SRD 1M L

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2386.017	6.82	27.44	30.69	47.40	50.97	74.00	-23.03	peak
2	2390.000	6.83	27.46	30.69	45.56	49.16	74.00	-24.84	peak
3 pp	2402.000	6.84	27.50	30.69	96.95	100.60	74.00	26.60	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:Low

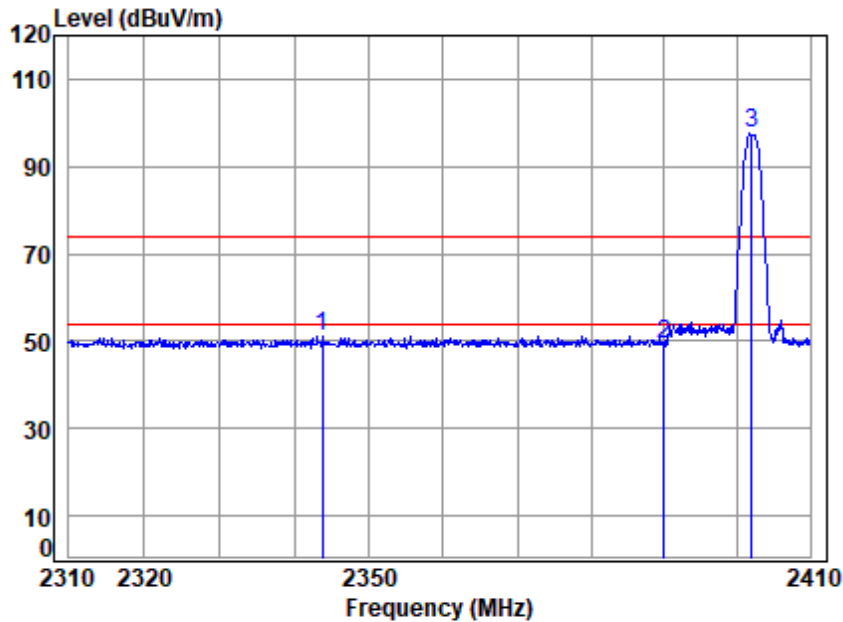

Condition: 3m VERTICAL

Job No : 04622AT


Mode : 2402 Band edge

: 2.4G SRD 1M L

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2343.724	6.80	27.29	30.68	47.63	51.04	74.00	-22.96	peak
2	2390.000	6.83	27.46	30.69	45.72	49.32	74.00	-24.68	peak
3 pp	2402.000	6.84	27.50	30.69	93.77	97.42	74.00	23.42	peak



Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:High

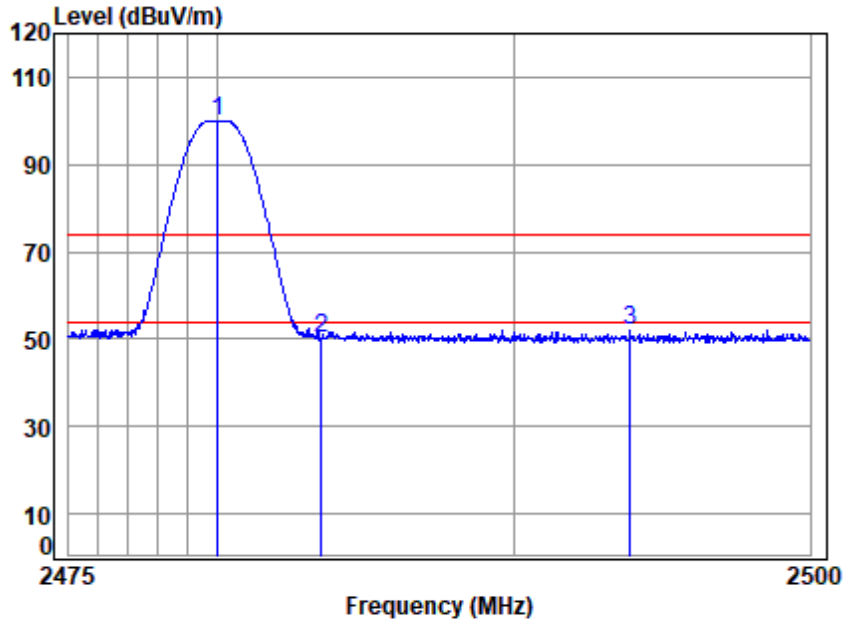

Condition: 3m HORIZONTAL

Job No : 04622AT


Mode : 2480 Band edge

: 2.4G SRD 1M L

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2480.000	7.38	27.78	30.71	95.68	100.13	74.00	26.13	peak
2	2483.500	7.40	27.80	30.71	45.84	50.33	74.00	-23.67	peak
3	2493.902	7.47	27.86	30.71	47.45	52.07	74.00	-21.93	peak



Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:High

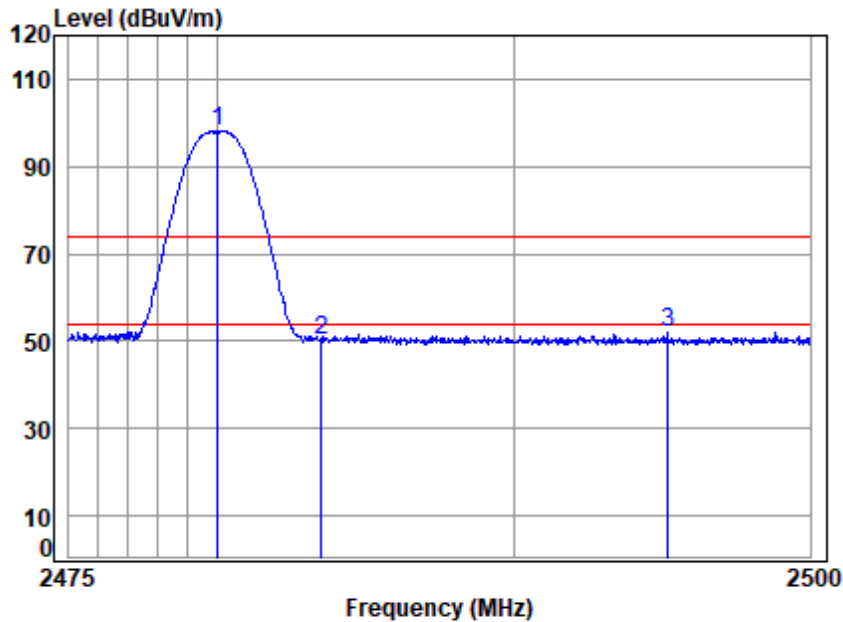

Condition: 3m VERTICAL

Job No : 04622AT

Mode : 2480 Band edge

: 2.4G SRD 1M L

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2480.000	7.38	27.78	30.71	93.54	97.99	74.00	23.99	peak
2	2483.500	7.40	27.80	30.71	45.87	50.36	74.00	-23.64	peak
3	2495.180	7.48	27.87	30.71	47.29	51.93	74.00	-22.07	peak



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251000462204

Page: 33 of 133

Left earbuds 2M

Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:Low

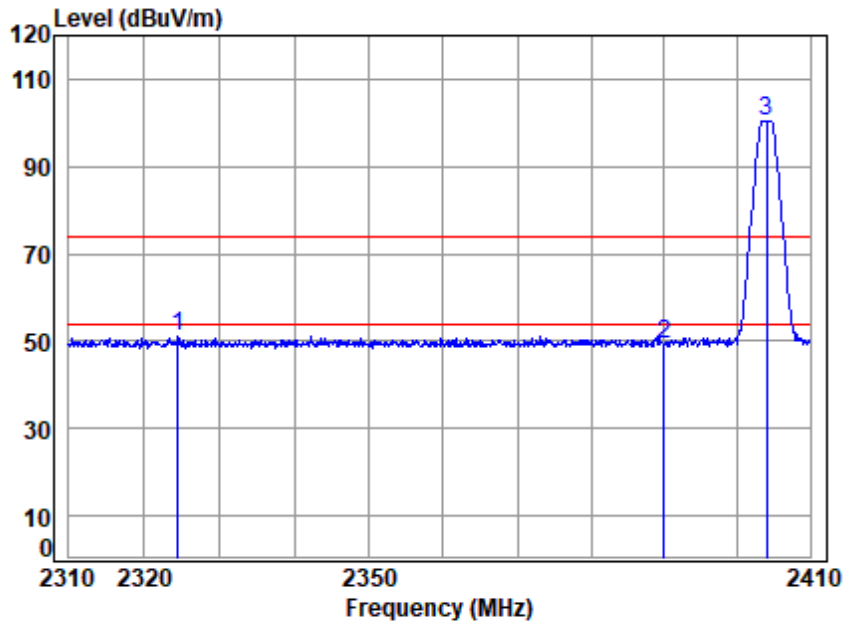

Condition: 3m HORIZONTAL

Job No : 04622AT

Mode : 2404 Band edge

: 2.4G SRD 2M L

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2324.436	6.79	27.25	30.67	47.91	51.28	74.00	-22.72	peak
2	2390.000	6.83	27.46	30.69	45.76	49.36	74.00	-24.64	peak
3 pp	2404.000	6.86	27.51	30.69	96.88	100.56	74.00	26.56	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:Low

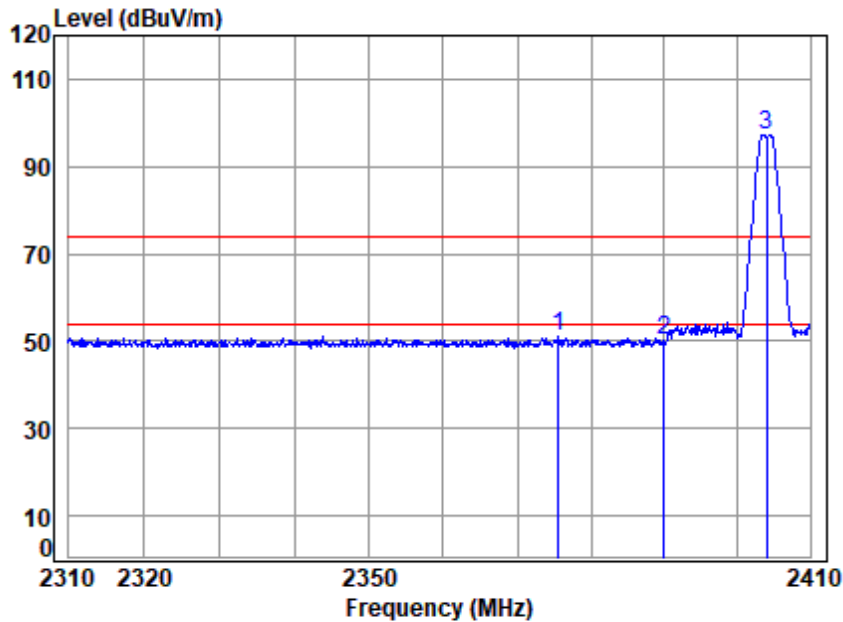

Condition: 3m VERTICAL

Job No : 04622AT


Mode : 2404 Band edge

: 2.4G SRD 2M L

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2375.624	6.82	27.40	30.68	47.47	51.01	74.00	-22.99	peak
2	2390.000	6.83	27.46	30.69	46.72	50.32	74.00	-23.68	peak
3 pp	2404.000	6.86	27.51	30.69	93.59	97.27	74.00	23.27	peak



Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:High

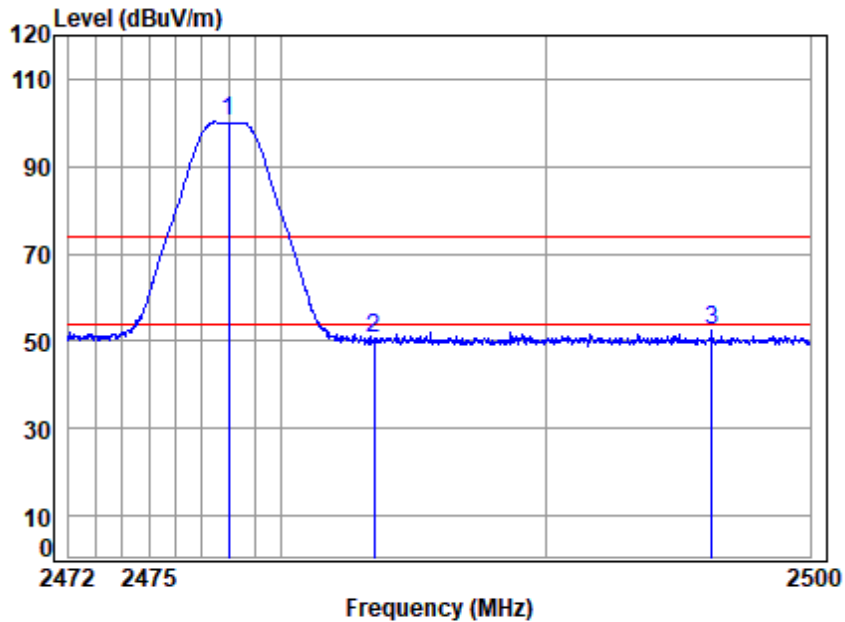

Condition: 3m HORIZONTAL

Job No : 04622AT


Mode : 2478 Band edge

: 2.4G SRD 2M L

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2478.000	7.36	27.77	30.71	95.79	100.21	74.00	26.21	peak
2	2483.500	7.40	27.80	30.71	45.94	50.43	74.00	-23.57	peak
3	2496.286	7.49	27.88	30.71	47.59	52.25	74.00	-21.75	peak



Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:High

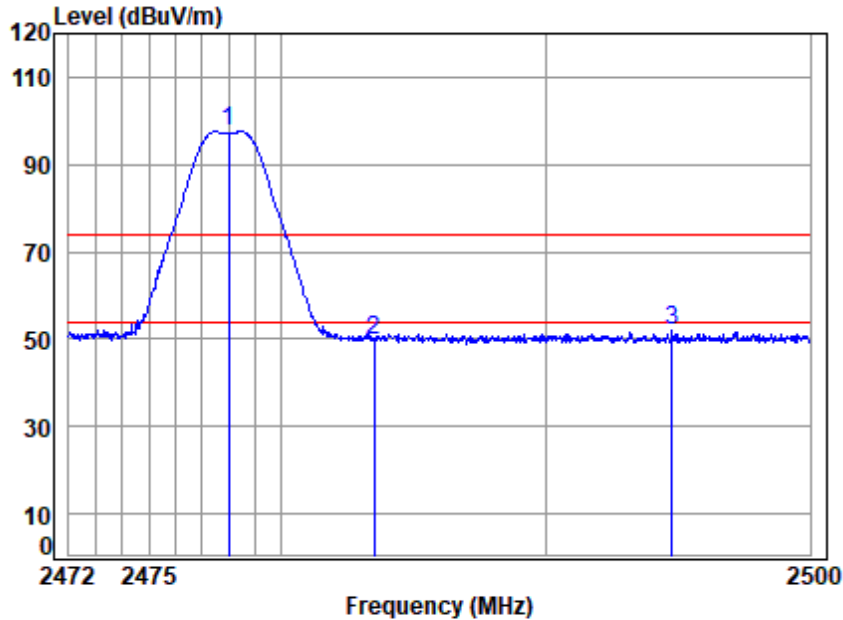

Condition: 3m VERTICAL

Job No : 04622AT

Mode : 2478 Band edge

: 2.4G SRD 2M L

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2478.000	7.36	27.77	30.71	93.20	97.62	74.00	23.62	peak
2	2483.500	7.40	27.80	30.71	45.26	49.75	74.00	-24.25	peak
3	2494.768	7.48	27.87	30.71	47.20	51.84	74.00	-22.16	peak



7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2020) Section 6.4,6.5
 Measurement Distance: 3m
 Test Engineer: Ted Wu

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.3.1 E.U.T. Operation

Operating Environment:


Temperature: 23.4 °C Humidity: 42.5 % RH Atmospheric Pressure: 1020 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Pre-scan	04	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Pre-scan	05	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Pre-scan	06	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.



7.3.3 Test Setup Diagram

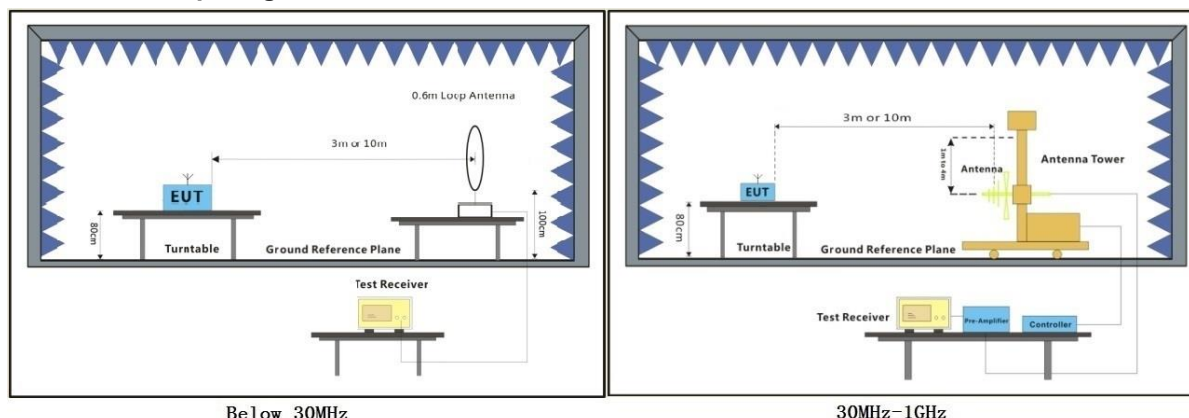


7.3.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test Mode: 03; Polarity: Horizontal

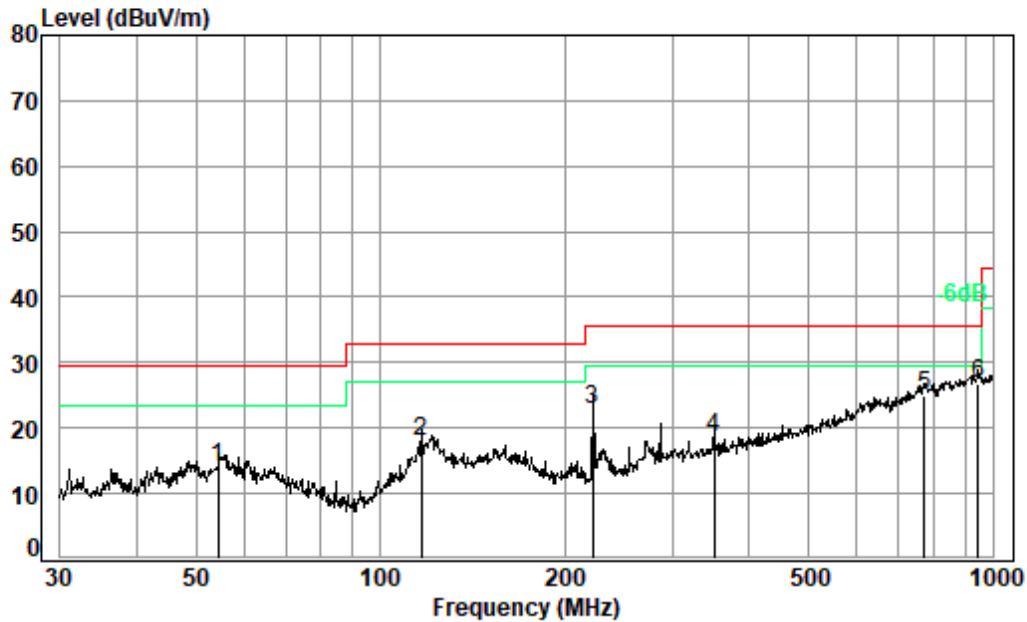

Condition: 10m HORIZONTAL

Job No. : 04622AT

Test Mode: 03

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	54.452	28.22	18.00	0.22	32.42	14.02	29.50	-15.48	QP
2	116.540	34.54	15.15	0.71	32.50	17.90	33.00	-15.10	QP
3	222.170	40.27	14.38	0.72	32.50	22.87	35.60	-12.73	QP
4	350.477	31.10	18.52	1.34	32.45	18.51	35.60	-17.09	QP
5	774.158	28.33	26.45	2.49	32.47	24.80	35.60	-10.80	QP
6 pp	945.440	28.01	27.92	2.75	31.77	26.91	35.60	-8.69	QP




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Vertical

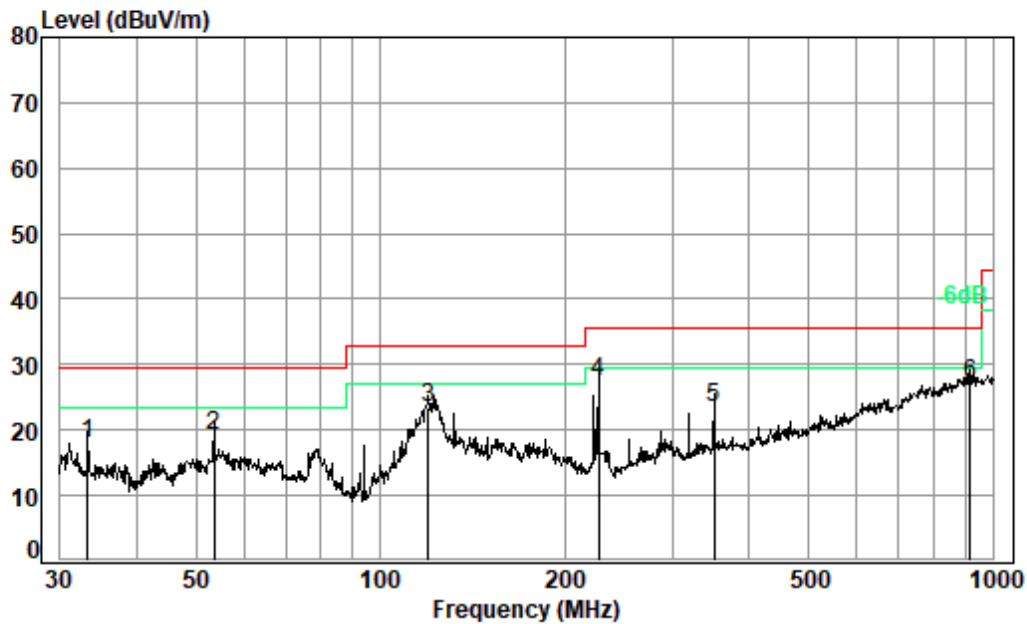

Condition: 10m VERTICAL

Job No. : 04622AT

Test Mode: 03

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	33.328	33.98	16.20	0.11	32.40	17.89	29.50	-11.61	QP
2	53.505	33.23	18.12	0.23	32.41	19.17	29.50	-10.33	QP
3	119.856	39.77	15.42	0.70	32.50	23.39	33.00	-9.61	QP
4 pp	226.894	44.59	14.59	0.75	32.50	27.43	35.60	-8.17	QP
5	350.477	36.06	18.52	1.34	32.45	23.47	35.60	-12.13	QP
6	919.287	28.59	27.76	2.69	31.90	27.14	35.60	-8.46	QP



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251000462204

Page: 41 of 133

The test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

$$L_3 / L_{10} = D_{10} / D_3$$

Note:

L₃: Level @ 3m distance. Unit: uV/m;

L₁₀: Level @ 10m distance. Unit: uV/m;

D₃: 3m distance. Unit: m

D₁₀: 10m distance. Unit: m

The level at 3m test distance is below:

Frequency (MHz)	Level @ 10m (dBuV/m)	Level @ 10m (uV/m)	Level @ 3m (uV/m)	Level @ 3m (dBuV/m)	Limit @ 3m (dBuV/m)	Margin (dB)	Ant. Polarization
54.452	14.02	5.02	16.74	24.48	40	-15.52	H
116.540	17.90	7.85	26.17	28.36	43.5	-15.14	H
222.170	22.87	13.92	46.39	33.33	46	-12.67	H
350.477	18.51	8.42	28.08	28.97	46	-17.03	H
774.158	24.80	17.38	57.93	35.26	46	-10.74	H
945.440	26.91	22.16	73.85	37.37	46	-8.63	H
33.328	17.89	7.84	26.14	28.35	40	-11.65	V
53.505	19.17	9.09	30.30	29.63	40	-10.37	V
119.856	23.39	14.77	49.25	33.85	43.5	-9.65	V
226.894	27.43	23.52	78.41	37.89	46	-8.11	V
350.477	23.47	14.91	49.70	33.93	46	-12.07	V
919.287	27.14	22.75	75.84	37.60	46	-8.40	V



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2020) Section 6.6
 Measurement Distance: 3m
 Test Engineer: Xing Guo

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.4.1 E.U.T. Operation

Operating Environment:


Temperature: 24.5 °C Humidity: 50.8 % RH Atmospheric Pressure: 1020 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	03	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Pre-scan	04	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	05	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Final test	06	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.



7.4.3 Test Setup Diagram

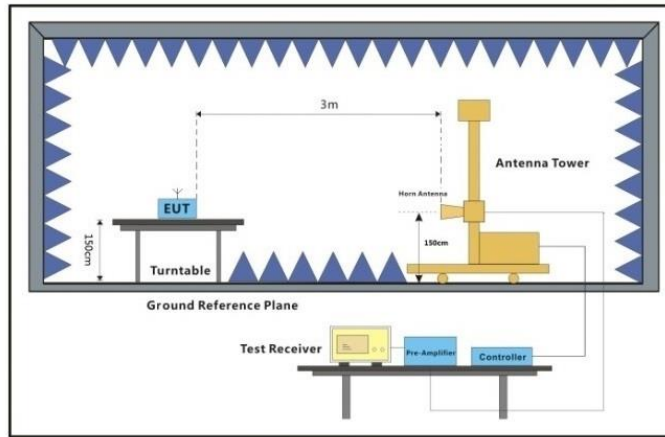

Above 1GHz



7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
- 4: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
- 5:For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle<98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251000462204

Page: 45 of 133

Right earbuds 1M

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:Low

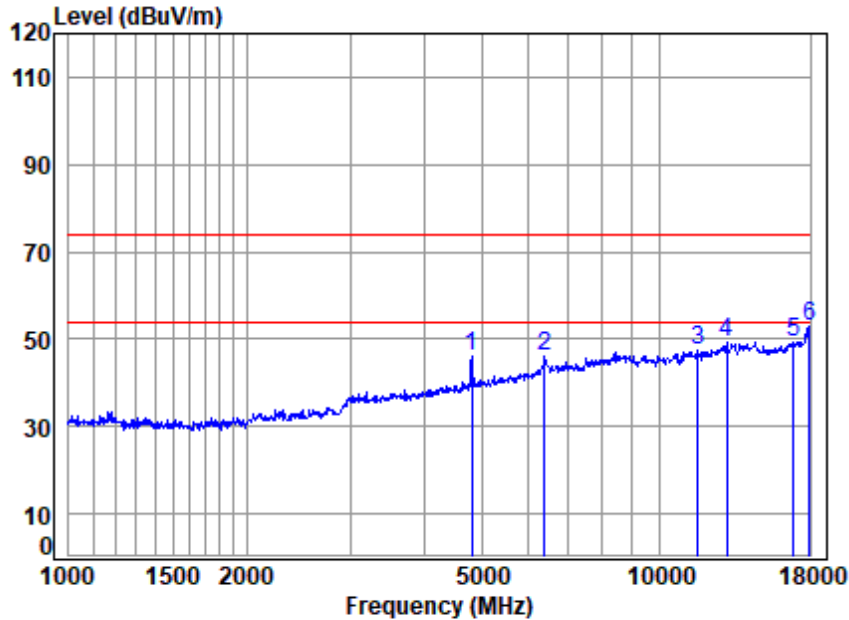

Condition: 3m HORIZONTAL

Job No : 04622AT

Mode : 2402 TX RSE

: 2.4G SRD 1M R

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	4804.110	9.03	31.92	55.41	60.42	45.96	74.00	-28.04	peak
2	6395.654	13.23	34.79	56.27	54.15	45.90	74.00	-28.10	peak
3	11633.930	14.68	39.57	55.30	48.34	47.29	74.00	-26.71	peak
4	13022.130	15.82	40.30	54.83	48.21	49.50	74.00	-24.50	peak
5	16891.040	18.12	39.60	54.09	45.76	49.39	74.00	-24.61	peak
6	pp17948.050	18.30	43.44	54.20	45.28	52.82	74.00	-21.18	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:Low

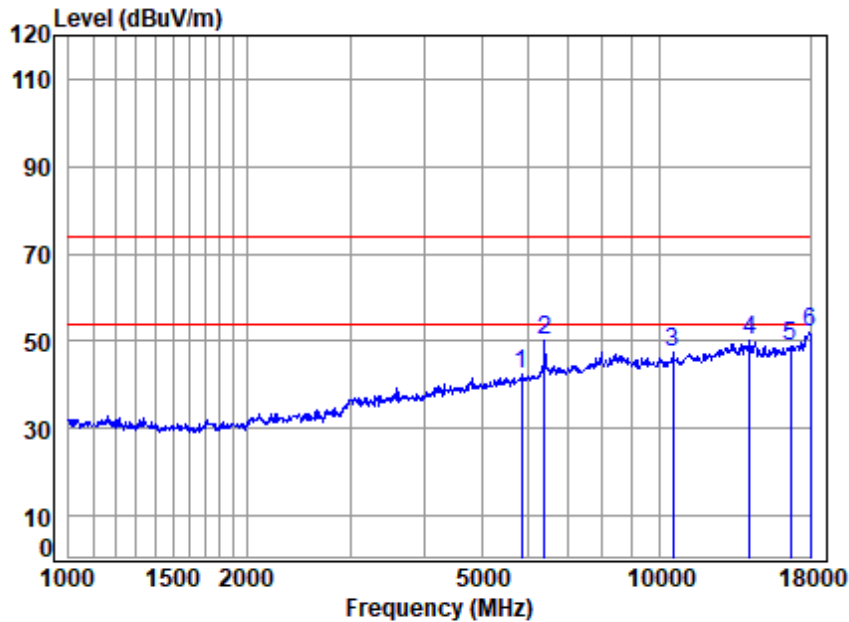

Condition: 3m VERTICAL

Job No : 04622AT


Mode : 2402 TX RSE

: 2.4G SRD 1M R

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5847.517	10.18	33.59	55.84	54.51	42.44	74.00	-31.56	peak
2	6395.654	13.23	34.79	56.27	58.36	50.11	74.00	-23.89	peak
3	10545.010	13.62	39.19	55.63	50.22	47.40	74.00	-26.60	peak
4	14242.800	16.12	39.80	54.40	48.64	50.16	74.00	-23.84	peak
5	16648.690	17.62	39.30	54.07	46.07	48.92	74.00	-25.08	peak
6	pp18000.000	18.35	43.80	54.20	44.15	52.10	74.00	-21.90	peak



Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:middle

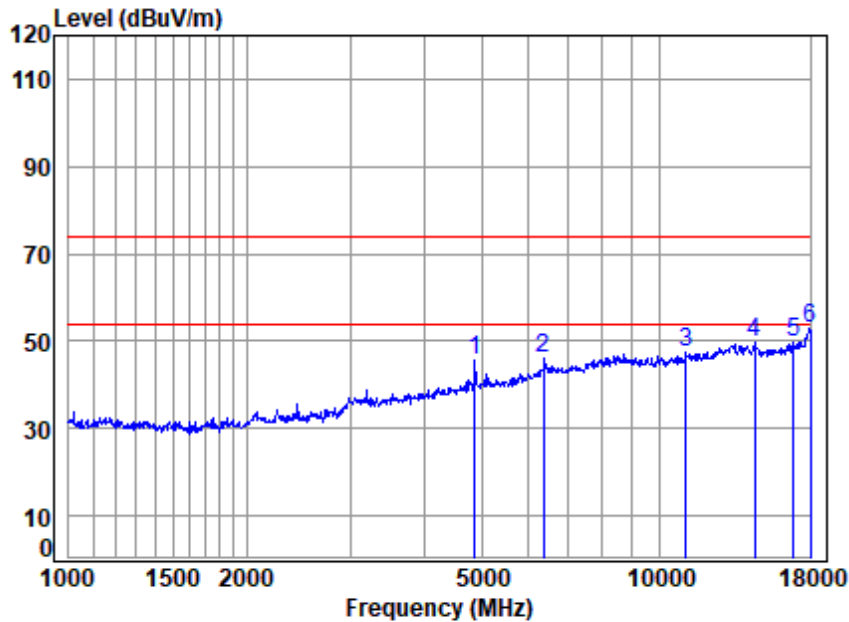

Condition: 3m HORIZONTAL

Job No : 04622AT


Mode : 2440 TX RSE

: 2.4G SRD 1M R

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	4874.043	9.12	32.15	55.44	59.90	45.73	74.00	-28.27	peak
2	6377.195	12.74	34.75	56.26	55.05	46.28	74.00	-27.72	peak
3	11076.100	14.54	39.48	55.46	48.70	47.26	74.00	-26.74	peak
4	14491.960	17.07	39.51	54.30	47.30	49.58	74.00	-24.42	peak
5	16891.040	18.12	39.60	54.09	45.91	49.54	74.00	-24.46	peak
6	pp18000.000	18.35	43.80	54.20	45.10	53.05	74.00	-20.95	peak



Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:middle

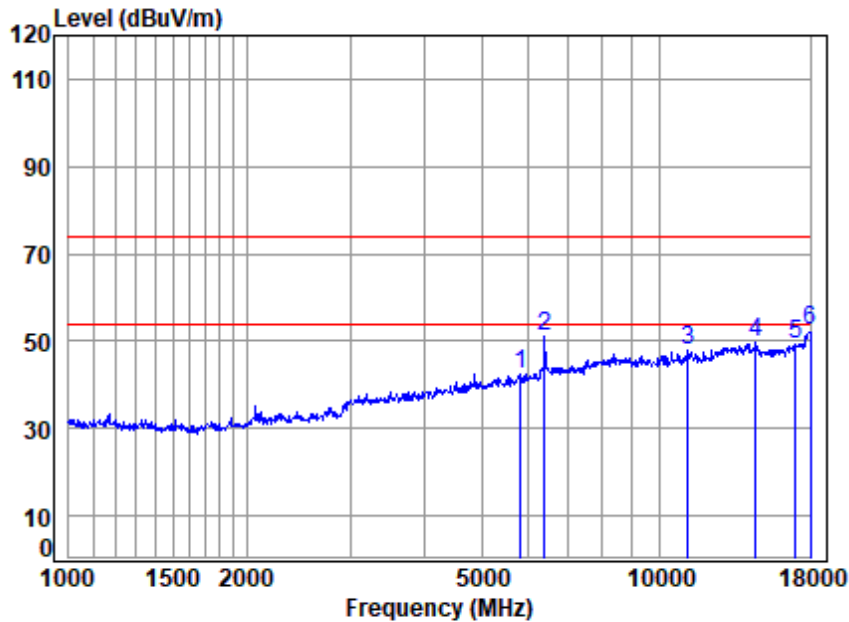

Condition: 3m VERTICAL

Job No : 04622AT


Mode : 2440 TX RSE

: 2.4G SRD 1M R

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5813.812	10.20	33.46	55.83	54.79	42.62	74.00	-31.38	peak
2	6395.654	13.23	34.79	56.27	59.41	51.16	74.00	-22.84	peak
3	11172.560	14.73	39.57	55.44	49.23	48.09	74.00	-25.91	peak
4	14533.910	16.79	39.43	54.28	47.67	49.61	74.00	-24.39	peak
5	16988.970	18.08	39.69	54.10	45.40	49.07	74.00	-24.93	peak
6	pp18000.000	18.35	43.80	54.20	44.29	52.24	74.00	-21.76	peak



Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:High

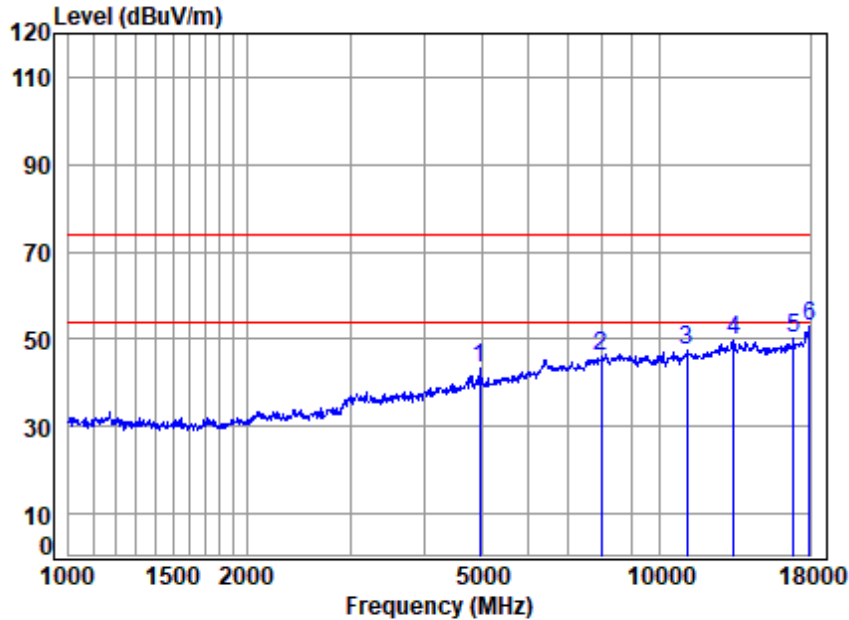

Condition: 3m HORIZONTAL

Job No : 04622AT


Mode : 2480 TX RSE

: 2.4G SRD 1M R

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	4959.307	9.22	32.20	55.48	57.58	43.52	74.00	-30.48	peak
2	7989.893	11.56	37.78	56.50	53.44	46.28	74.00	-27.72	peak
3	11140.310	14.70	39.54	55.44	48.86	47.66	74.00	-26.34	peak
4	13365.320	16.13	40.30	54.71	47.86	49.58	74.00	-24.42	peak
5	16891.040	18.12	39.60	54.09	46.53	50.16	74.00	-23.84	peak
6	pp17948.050	18.30	43.44	54.20	45.41	52.95	74.00	-21.05	peak



Test Mode: 05; Polarity: Vertical; Modulation: GFSK; Channel: High

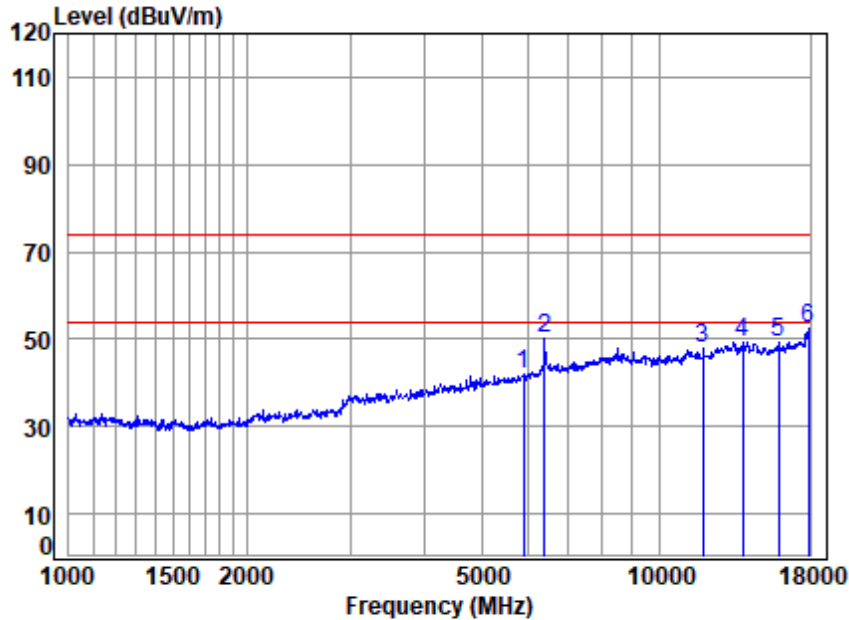

Condition: 3m VERTICAL

Job No : 04622AT

Mode : 2480 TX RSE

: 2.4G SRD 1M R

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5881.418	10.16	33.54	55.86	54.21	42.05	74.00	-31.95	peak
2	6395.654	13.23	34.79	56.27	58.59	50.34	74.00	-23.66	peak
3	11871.710	14.82	39.67	55.24	48.67	47.92	74.00	-26.08	peak
4	13837.020	15.95	39.90	54.55	48.15	49.45	74.00	-24.55	peak
5	15896.290	17.27	38.69	54.01	47.20	49.15	74.00	-24.85	peak
6	pp17896.250	18.25	43.08	54.19	45.35	52.49	74.00	-21.51	peak



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251000462204

Page: 51 of 133

Right earbuds 2M

Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:Low

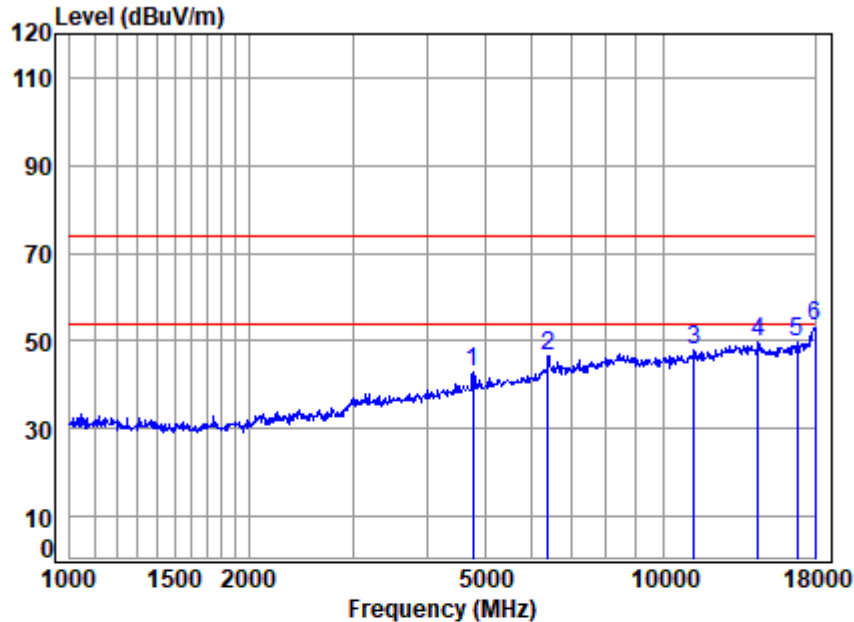

Condition: 3m HORIZONTAL

Job No : 04622AT

Mode : 2404 TX RSE

: 2.4G SRD 2M R

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	4776.419	9.01	31.85	55.40	57.26	42.72	74.00	-31.28	peak
2	6395.654	13.23	34.79	56.27	54.61	46.36	74.00	-27.64	peak
3	11269.860	14.68	39.67	55.41	48.82	47.76	74.00	-26.24	peak
4	14450.130	16.98	39.55	54.32	47.41	49.62	74.00	-24.38	peak
5	16842.290	17.77	39.60	54.09	46.26	49.54	74.00	-24.46	peak
6	pp18000.000	18.35	43.80	54.20	45.22	53.17	74.00	-20.83	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:Low

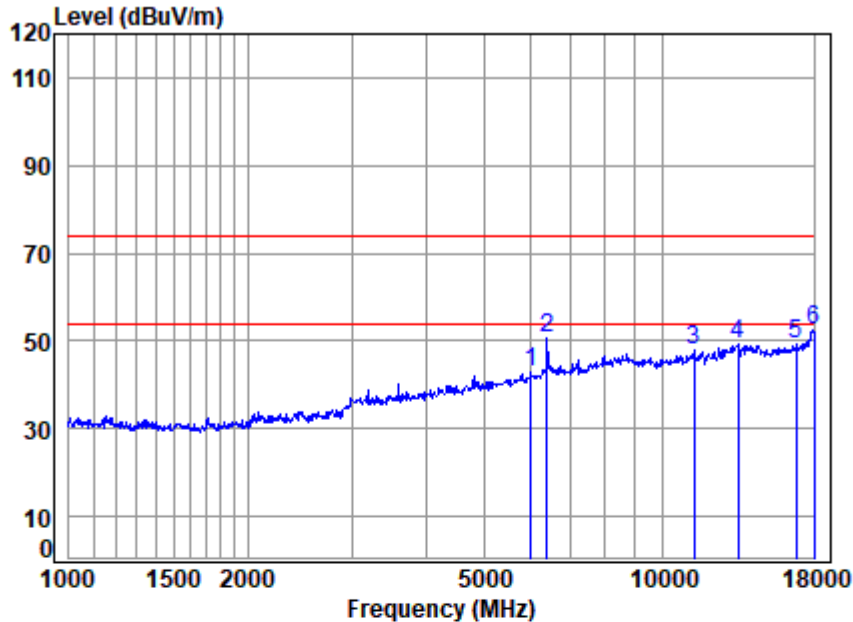

Condition: 3m VERTICAL

Job No : 04622AT


Mode : 2404 TX RSE

: 2.4G SRD 2M R

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6001.626	10.18	33.80	55.90	54.59	42.67	74.00	-31.33	peak
2	6395.654	13.23	34.79	56.27	59.02	50.77	74.00	-23.23	peak
3	11302.480	14.63	39.70	55.40	49.03	47.96	74.00	-26.04	peak
4	13404.010	15.91	40.29	54.70	47.63	49.13	74.00	-24.87	peak
5	16842.290	17.77	39.60	54.09	46.17	49.45	74.00	-24.55	peak
6	pp18000.000	18.35	43.80	54.20	44.70	52.65	74.00	-21.35	peak



Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:middle

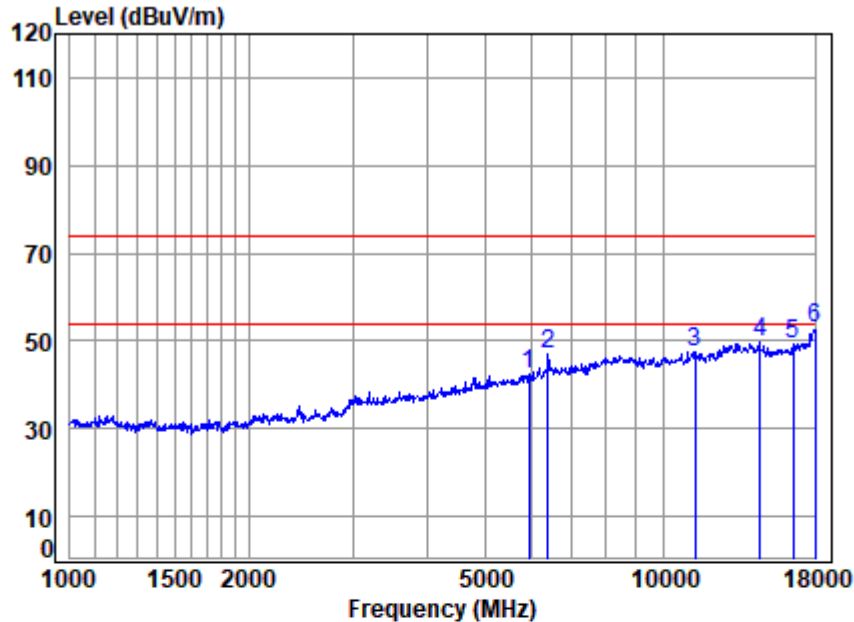

Condition: 3m HORIZONTAL

Job No : 04622AT


Mode : 2440 TX RSE

: 2.4G SRD 2M R

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5932.638	10.16	33.57	55.88	54.41	42.26	74.00	-31.74	peak
2	6395.654	13.23	34.79	56.27	55.24	46.99	74.00	-27.01	peak
3	11302.480	14.63	39.70	55.40	48.69	47.62	74.00	-26.38	peak
4	14533.910	16.79	39.43	54.28	47.80	49.74	74.00	-24.26	peak
5	16552.730	17.69	39.06	54.06	46.67	49.36	74.00	-24.64	peak
6	pp18000.000	18.35	43.80	54.20	44.97	52.92	74.00	-21.08	peak



Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:middle

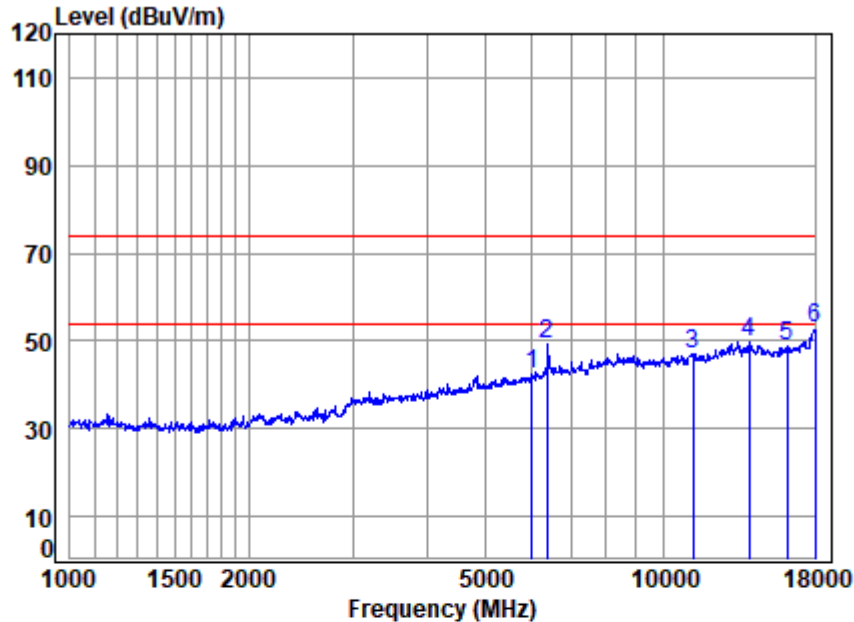

Condition: 3m VERTICAL

Job No : 04622AT


Mode : 2440 TX RSE

: 2.4G SRD 2M R

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6001.626	10.18	33.80	55.90	54.35	42.43	74.00	-31.57	peak
2	6377.195	12.74	34.75	56.26	57.99	49.22	74.00	-24.78	peak
3	11204.900	14.75	39.60	55.43	48.27	47.19	74.00	-26.81	peak
4	13957.530	16.25	39.90	54.51	48.09	49.73	74.00	-24.27	peak
5	16174.370	17.17	38.50	54.02	47.03	48.68	74.00	-25.32	peak
6	pp18000.000	18.35	43.80	54.20	45.04	52.99	74.00	-21.01	peak



Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:High

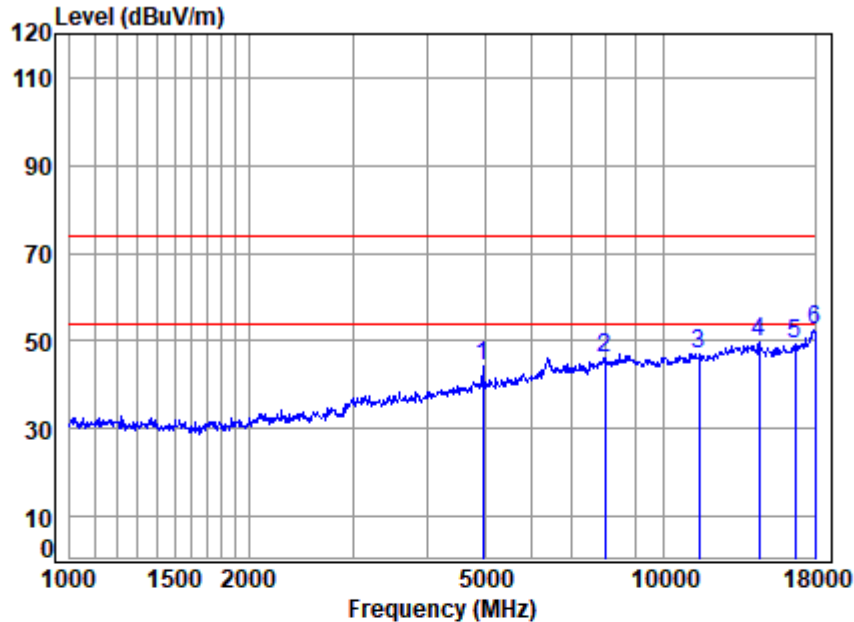

Condition: 3m HORIZONTAL

Job No : 04622AT


Mode : 2478 TX RSE

: 2.4G SRD 2M R

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	4959.307	9.22	32.20	55.48	58.28	44.22	74.00	-29.78	peak
2	7966.832	11.55	37.73	56.51	53.42	46.19	74.00	-27.81	peak
3	11500.200	15.05	39.60	55.34	47.75	47.06	74.00	-26.94	peak
4	14491.960	17.07	39.51	54.30	47.66	49.94	74.00	-24.06	peak
5	16648.690	17.62	39.30	54.07	46.28	49.13	74.00	-24.87	peak
6	pp18000.000	18.35	43.80	54.20	44.69	52.64	74.00	-21.36	peak



Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:High

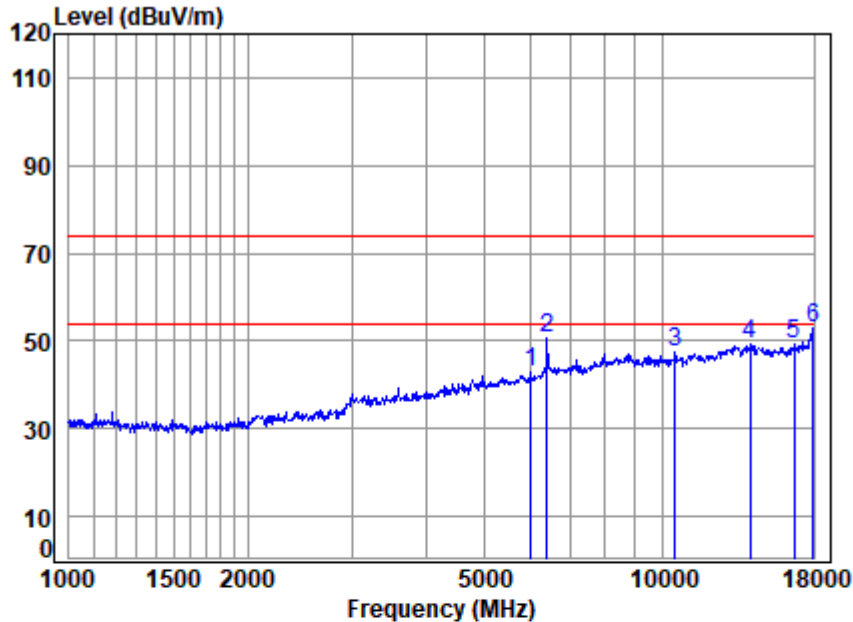

Condition: 3m VERTICAL

Job No : 04622AT

Mode : 2478 TX RSE

: 2.4G SRD 2M R

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6001.626	10.18	33.80	55.90	54.71	42.79	74.00	-31.21	peak
2	6395.654	13.23	34.79	56.27	58.83	50.58	74.00	-23.42	peak
3	10514.580	13.63	39.13	55.63	50.19	47.32	74.00	-26.68	peak
4	14038.450	16.51	39.90	54.48	47.40	49.33	74.00	-24.67	peak
5	16648.690	17.62	39.30	54.07	46.34	49.19	74.00	-24.81	peak
6	pp17948.050	18.30	43.44	54.20	45.41	52.95	74.00	-21.05	peak



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251000462204

Page: 57 of 133

Left earbuds 1M

Test Mode: 05; Polarity: Horizontal; Modulation: GFSK; Channel: Low

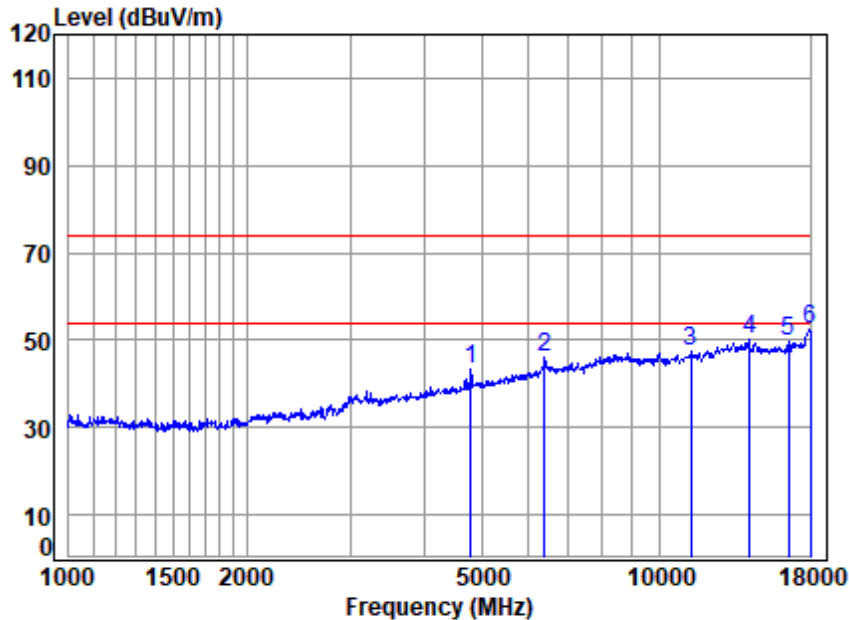

Condition: 3m HORIZONTAL

Job No : 04622AT

Mode : 2402 TX RSE

: 2.4G SRD 1M L

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	4790.245	9.02	31.88	55.40	57.67	43.17	74.00	-30.83	peak
2	6395.654	13.23	34.79	56.27	54.35	46.10	74.00	-27.90	peak
3	11302.480	14.63	39.70	55.40	48.30	47.23	74.00	-26.77	peak
4	14201.690	15.93	39.80	54.42	48.98	50.29	74.00	-23.71	peak
5	16552.730	17.69	39.06	54.06	47.16	49.85	74.00	-24.15	peak
6	pp18000.000	18.35	43.80	54.20	44.59	52.54	74.00	-21.46	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:Low

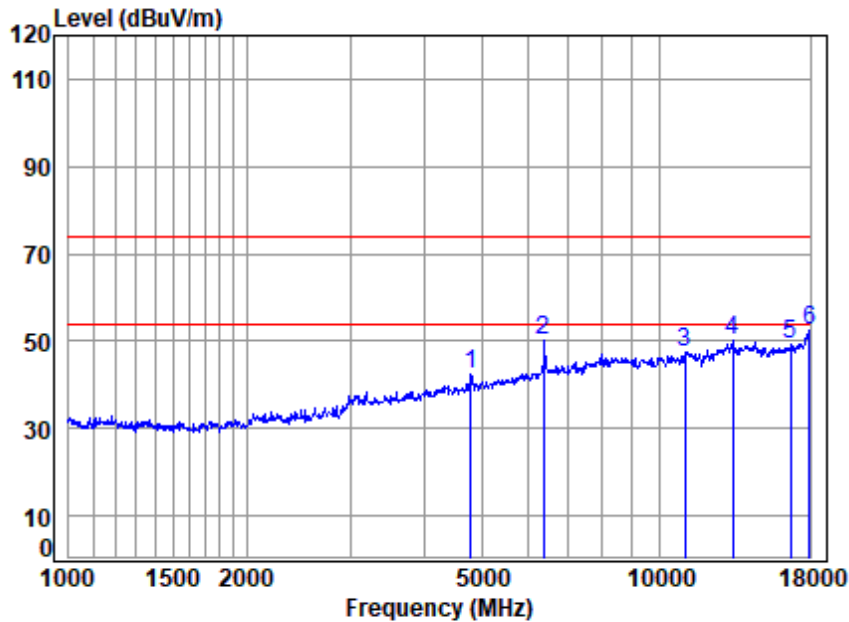

Condition: 3m VERTICAL

Job No : 04622AT


Mode : 2402 TX RSE

: 2.4G SRD 1M L

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	4790.245	9.02	31.88	55.40	57.11	42.61	74.00	-31.39	peak
2	6377.195	12.74	34.75	56.26	58.75	49.98	74.00	-24.02	peak
3	11044.130	14.39	39.44	55.47	49.04	47.40	74.00	-26.60	peak
4	13326.750	16.37	40.30	54.72	48.03	49.98	74.00	-24.02	peak
5	16648.690	17.62	39.30	54.07	46.32	49.17	74.00	-24.83	peak
6	pp17948.050	18.30	43.44	54.20	44.82	52.36	74.00	-21.64	peak



Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:middle

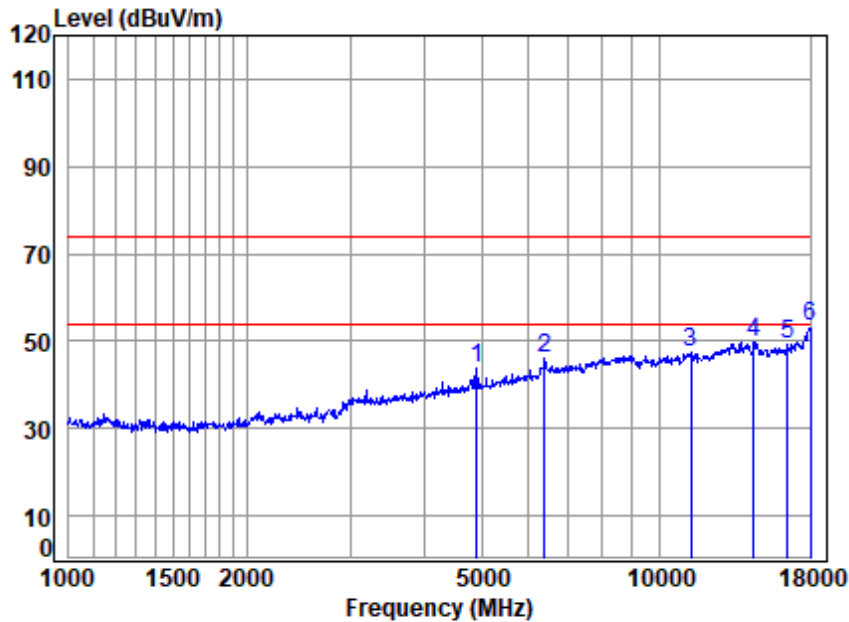

Condition: 3m HORIZONTAL

Job No : 04622AT


Mode : 2440 TX RSE

: 2.4G SRD 1M L

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	4916.490	9.17	32.20	55.46	57.68	43.59	74.00	-30.41	peak
2	6395.654	13.23	34.79	56.27	54.40	46.15	74.00	-27.85	peak
3	11302.480	14.63	39.70	55.40	48.52	47.45	74.00	-26.55	peak
4	14450.130	16.98	39.55	54.32	47.58	49.79	74.00	-24.21	peak
5	16504.960	17.74	38.91	54.05	46.78	49.38	74.00	-24.62	peak
6	pp18000.000	18.35	43.80	54.20	45.44	53.39	74.00	-20.61	peak



Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:middle

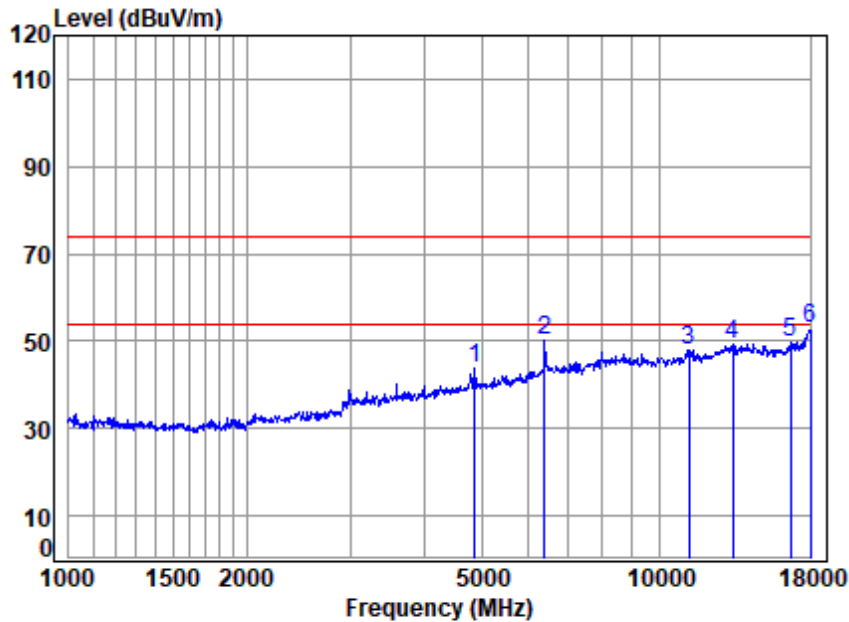

Condition: 3m VERTICAL

Job No : 04622AT


Mode : 2440 TX RSE

: 2.4G SRD 1M L

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	4874.043	9.12	32.15	55.44	58.11	43.94	74.00	-30.06	peak
2	6395.654	13.23	34.79	56.27	58.37	50.12	74.00	-23.88	peak
3	11204.900	14.75	39.60	55.43	48.94	47.86	74.00	-26.14	peak
4	13326.750	16.37	40.30	54.72	47.49	49.44	74.00	-24.56	peak
5	16648.690	17.62	39.30	54.07	46.88	49.73	74.00	-24.27	peak
6	pp18000.000	18.35	43.80	54.20	45.20	53.15	74.00	-20.85	peak



Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:High

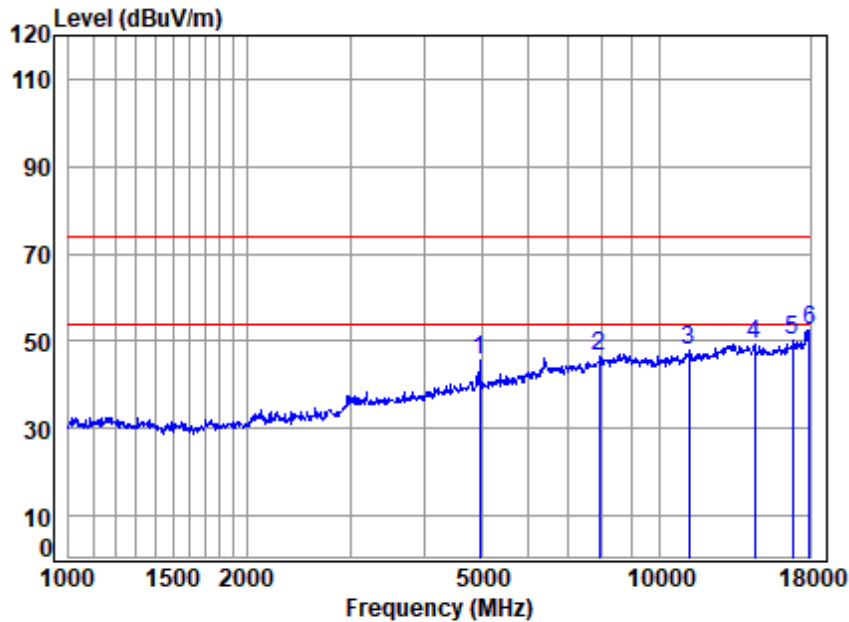

Condition: 3m HORIZONTAL

Job No : 04622AT


Mode : 2480 TX RSE

: 2.4G SRD 1M L

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	4959.307	9.22	32.20	55.48	59.59	45.53	74.00	-28.47	peak
2	7920.911	11.54	37.64	56.52	53.75	46.41	74.00	-27.59	peak
3	11204.900	14.75	39.60	55.43	48.93	47.85	74.00	-26.15	peak
4	14491.960	17.07	39.51	54.30	47.08	49.36	74.00	-24.64	peak
5	16842.290	17.77	39.60	54.09	46.76	50.04	74.00	-23.96	peak
6	pp17948.050	18.30	43.44	54.20	45.07	52.61	74.00	-21.39	peak



Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:High

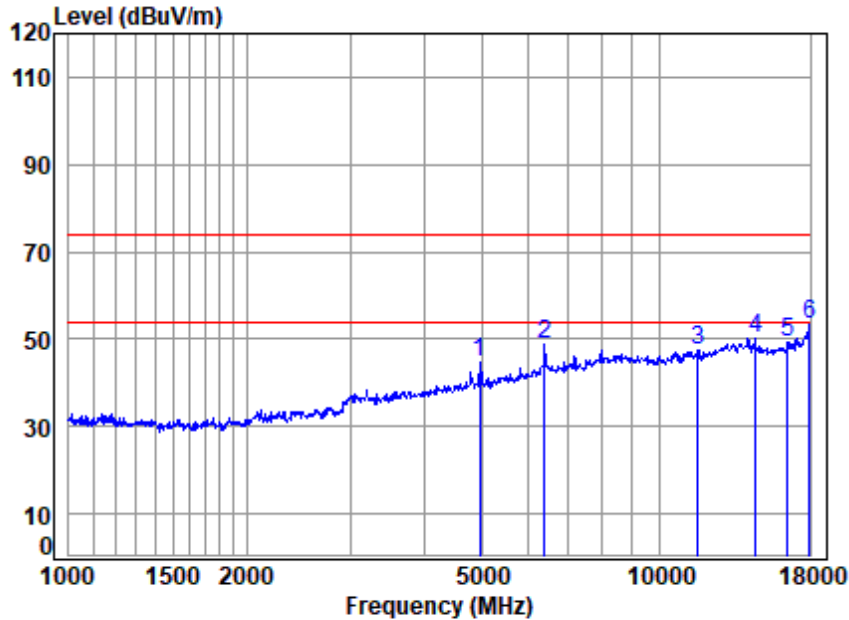

Condition: 3m VERTICAL

Job No : 04622AT

Mode : 2480 TX RSE

: 2.4G SRD 1M L

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	4959.307	9.22	32.20	55.48	58.62	44.56	74.00	-29.44	peak
2	6395.654	13.23	34.79	56.27	57.17	48.92	74.00	-25.08	peak
3	11633.930	14.68	39.57	55.30	48.54	47.49	74.00	-26.51	peak
4	14533.910	16.79	39.43	54.28	48.31	50.25	74.00	-23.75	peak
5	16504.960	17.74	38.91	54.05	46.74	49.34	74.00	-24.66	peak
6	pp17948.050	18.30	43.44	54.20	45.67	53.21	74.00	-20.79	peak



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251000462204

Page: 63 of 133

Left earbuds 2M

Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:Low

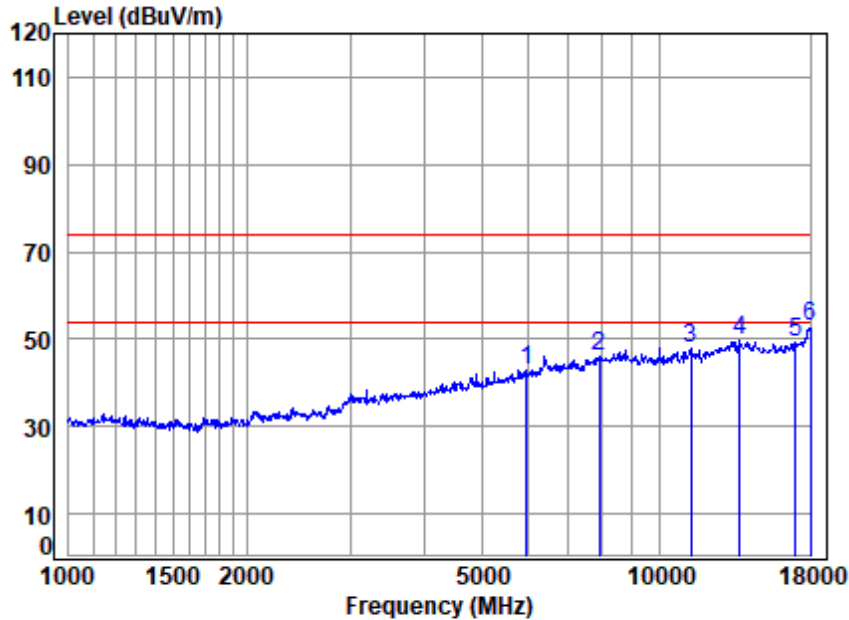

Condition: 3m HORIZONTAL

Job No : 04622AT

Mode : 2404 TX RSE

: 2.4G SRD 2M L

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5967.033	10.16	33.67	55.89	55.01	42.95	74.00	-31.05	peak
2	7898.049	11.54	37.59	56.53	53.68	46.28	74.00	-27.72	peak
3	11302.480	14.63	39.70	55.40	48.78	47.71	74.00	-26.29	peak
4	13677.970	16.27	40.00	54.61	48.24	49.90	74.00	-24.10	peak
5	16988.970	18.08	39.69	54.10	45.61	49.28	74.00	-24.72	peak
6	pp18000.000	18.35	43.80	54.20	44.78	52.73	74.00	-21.27	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:Low

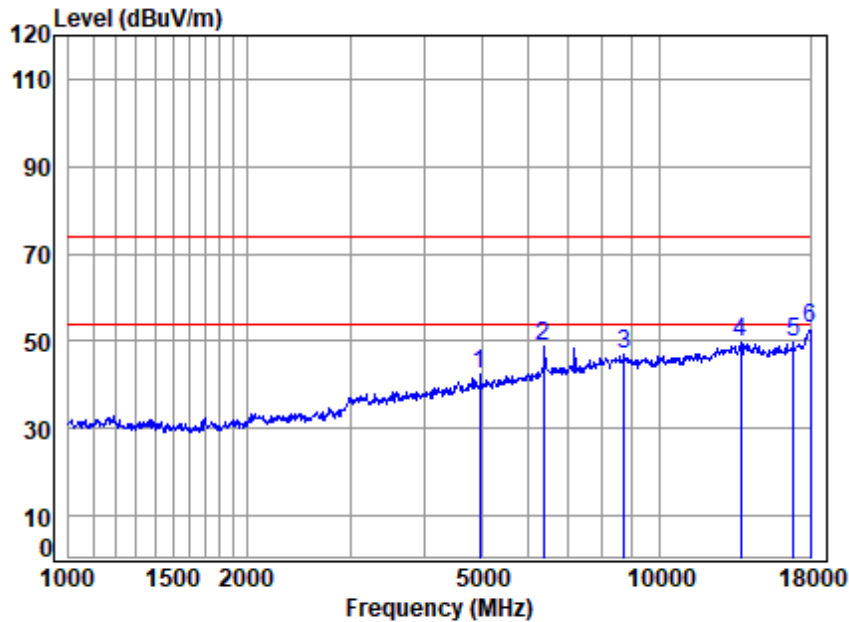

Condition: 3m VERTICAL

Job No : 04622AT


Mode : 2404 TX RSE

: 2.4G SRD 2M L

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	4973.662	9.24	32.20	55.49	56.44	42.39	74.00	-31.61	peak
2	6377.195	12.74	34.75	56.26	57.51	48.74	74.00	-25.26	peak
3	8713.630	12.11	38.57	56.23	52.66	47.11	74.00	-26.89	peak
4	13717.560	16.33	39.98	54.59	48.10	49.82	74.00	-24.18	peak
5	16891.040	18.12	39.60	54.09	45.98	49.61	74.00	-24.39	peak
6	pp18000.000	18.35	43.80	54.20	45.01	52.96	74.00	-21.04	peak



Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:middle

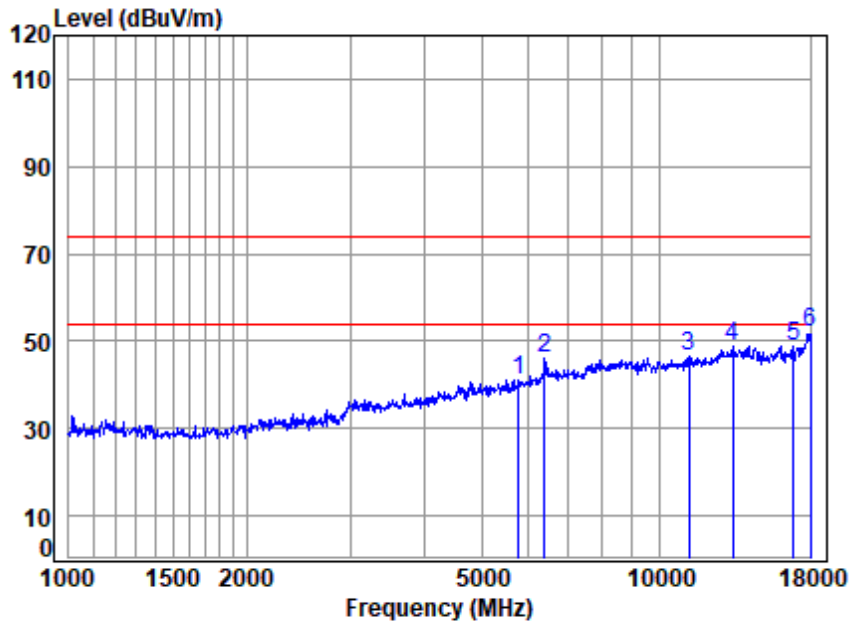

Condition: 3m HORIZONTAL

Job No : 04622AT


Mode : 2440 TX RSE

: 2.4G SRD 2M L

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5780.300	10.17	33.36	55.82	53.36	41.07	74.00	-32.93	peak
2	6395.654	13.23	34.79	56.27	54.33	46.08	74.00	-27.92	peak
3	11204.900	14.75	39.60	55.43	47.46	46.38	74.00	-27.62	peak
4	13326.750	16.37	40.30	54.72	46.95	48.90	74.00	-25.10	peak
5	16891.040	18.12	39.60	54.09	45.14	48.77	74.00	-25.23	peak
6	pp18000.000	18.35	43.80	54.20	44.26	52.21	74.00	-21.79	peak



Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:middle

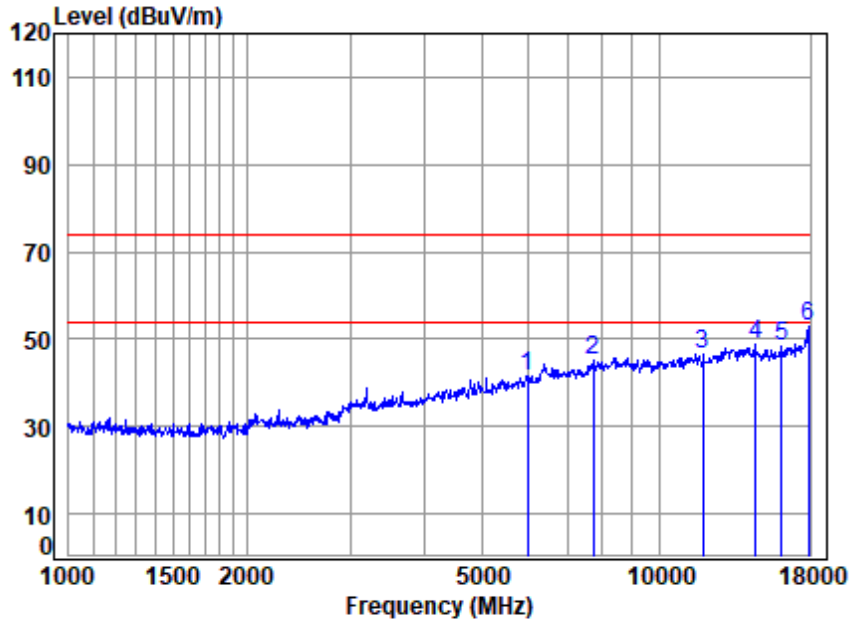

Condition: 3m VERTICAL

Job No : 04622AT


Mode : 2440 TX RSE

: 2.4G SRD 2M L

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5984.305	10.17	33.74	55.89	53.66	41.68	74.00	-32.32	peak
2	7717.518	11.43	36.94	56.58	53.39	45.18	74.00	-28.82	peak
3	11871.710	14.82	39.67	55.24	47.44	46.69	74.00	-27.31	peak
4	14533.910	16.79	39.43	54.28	46.69	48.63	74.00	-25.37	peak
5	16127.690	17.11	38.50	54.01	46.59	48.19	74.00	-25.81	peak
6	pp17896.250	18.25	43.08	54.19	45.63	52.77	74.00	-21.23	peak



Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:High

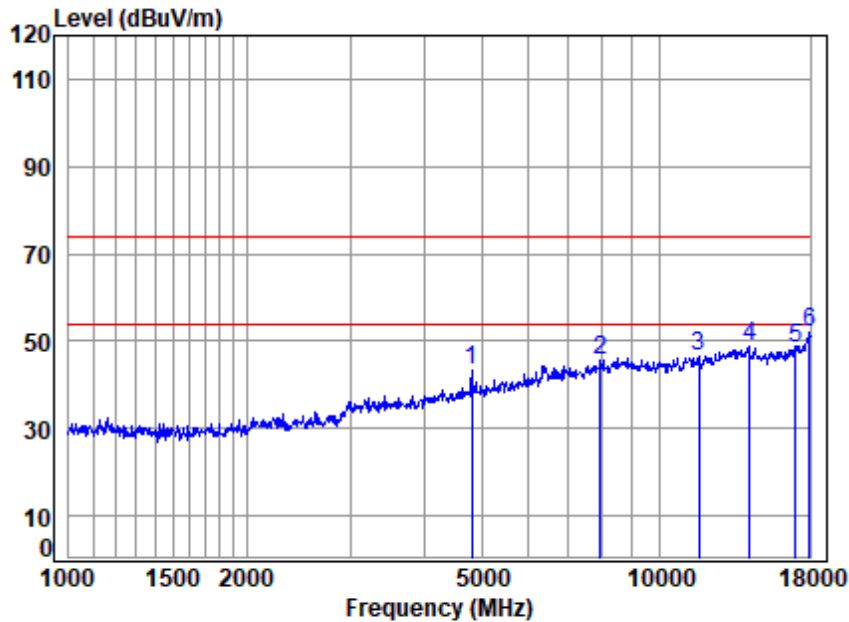

Condition: 3m HORIZONTAL

Job No : 04622AT


Mode : 2478 TX RSE

: 2.4G SRD 2M L

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	4804.110	9.03	31.92	55.41	57.61	43.15	74.00	-30.85	peak
2	7943.838	11.55	37.69	56.52	52.73	45.45	74.00	-28.55	peak
3	11667.600	14.71	39.53	55.29	47.78	46.73	74.00	-27.27	peak
4	14201.690	15.93	39.80	54.42	47.44	48.75	74.00	-25.25	peak
5	16988.970	18.08	39.69	54.10	44.72	48.39	74.00	-25.61	peak
6	pp17948.050	18.30	43.44	54.20	44.61	52.15	74.00	-21.85	peak



Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:High

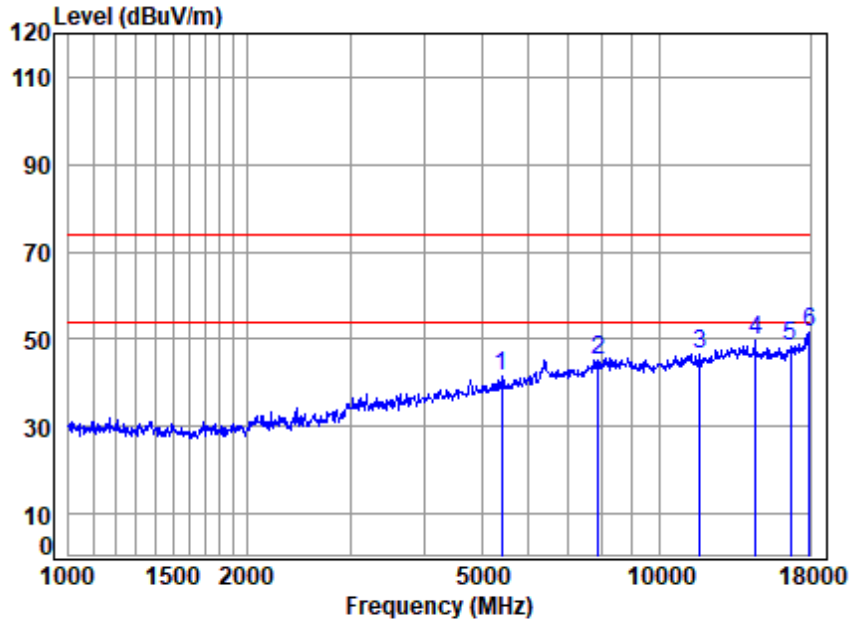

Condition: 3m VERTICAL

Job No : 04622AT

Mode : 2478 TX RSE

: 2.4G SRD 2M L

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5408.529	9.63	32.82	55.67	54.77	41.55	74.00	-32.45	peak
2	7875.254	11.48	37.50	56.54	52.73	45.17	74.00	-28.83	peak
3	11735.250	14.68	39.54	55.27	47.66	46.61	74.00	-27.39	peak
4	14533.910	16.79	39.43	54.28	47.65	49.59	74.00	-24.41	peak
5	16648.690	17.62	39.30	54.07	45.52	48.37	74.00	-25.63	peak
6	pp17948.050	18.30	43.44	54.20	44.06	51.60	74.00	-22.40	peak



7.5 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(1)
 Test Method: ANSI C63.10 (2020) Section 7.8.5
 Test Engineer: Byron Liang

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.5.1 E.U.T. Operation

Operating Environment:


Temperature: 21.4 °C Humidity: 44.7 % RH Atmospheric Pressure: 1020 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	04	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.



7.5.3 Test Setup Diagram

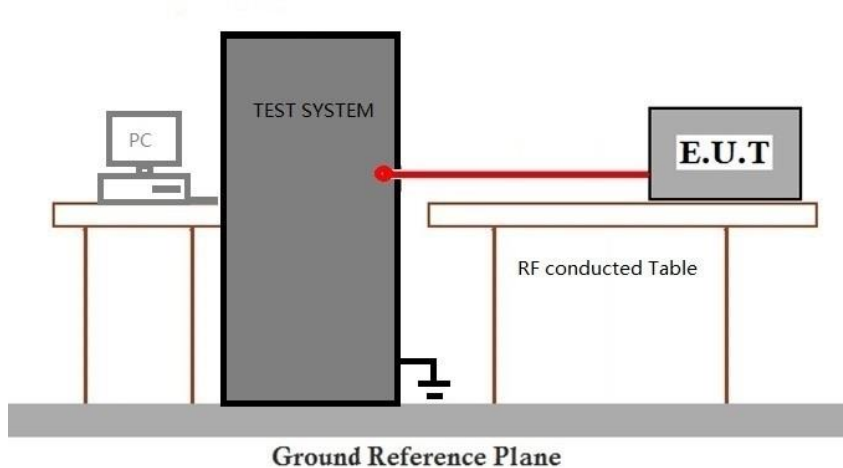

7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details



7.6 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)
 Test Method: ANSI C63.10 (2020) Section 6.9.2
 Test Engineer: Byron Liang


7.6.1 E.U.T. Operation

Operating Environment:
 Temperature: 21.4 °C Humidity: 44.7 % RH Atmospheric Pressure: 1020 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	04	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.6.3 Test Setup Diagram

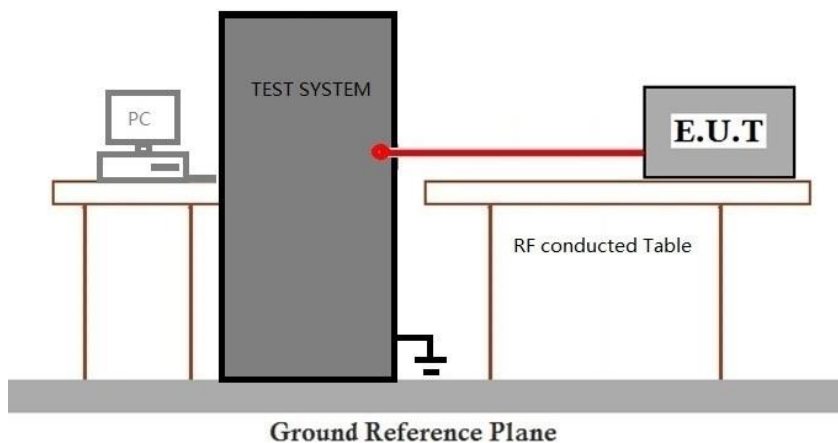

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.7 Carrier Frequencies Separation

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)
 Test Method: ANSI C63.10 (2020) Section 7.8.2
 Test Engineer: Byron Liang

Limit:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.7.1 E.U.T. Operation

Operating Environment:


Temperature: 21.4 °C Humidity: 44.7 % RH Atmospheric Pressure: 1020 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX Hop mode (1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	04	TX Hop mode (2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.



7.7.3 Test Setup Diagram

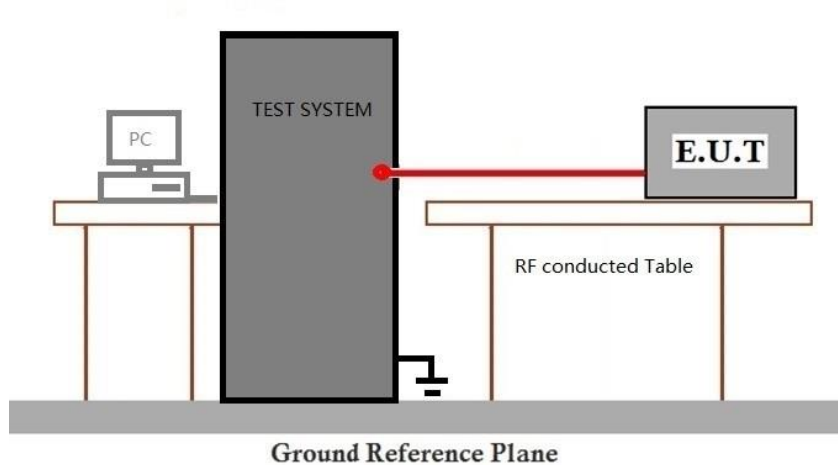

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251000462204

Page: 74 of 133

7.8 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)
 Test Method: ANSI C63.10 (2020) Section 7.8.3
 Test Engineer: Byron Liang

Limit:

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 21.4 °C Humidity: 44.7 % RH Atmospheric Pressure: 1020 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX Hop mode (1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	04	TX Hop mode (2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.




SGS-CSTC Standards Technical Services Co., Ltd.
 Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.8.3 Test Setup Diagram

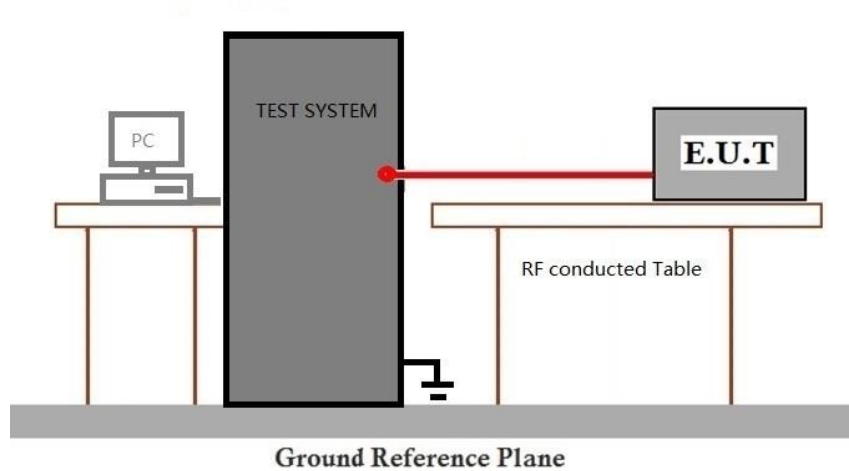

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251000462204

Page: 76 of 133

7.9 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)
 Test Method: ANSI C63.10 (2020) Section 7.8.4
 Test Engineer: Byron Liang

Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 21.4 °C Humidity: 44.7 % RH Atmospheric Pressure: 1020 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX Hop mode (1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	04	TX Hop mode (2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.




SGS-CSTC Standards Technical Services Co., Ltd.
 Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.9.3 Test Setup Diagram

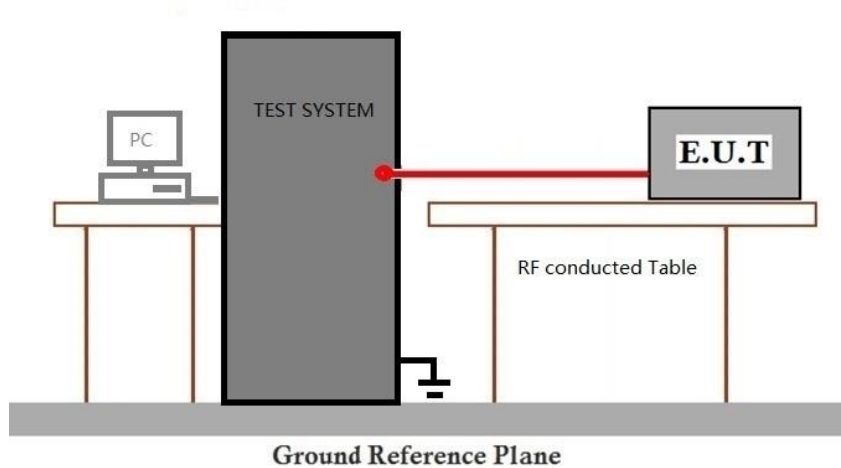

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.10 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10 (2020) Section 7.8.7.2
 Test Engineer: Byron Liang

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.10.1 E.U.T. Operation

Operating Environment:


Temperature: 21.4 °C Humidity: 44.7 % RH Atmospheric Pressure: 1020 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX Hop mode (1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	01	TX Hop mode (2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	02	TX non-Hop mode (1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX non-Hop mode (2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.



7.10.3 Test Setup Diagram

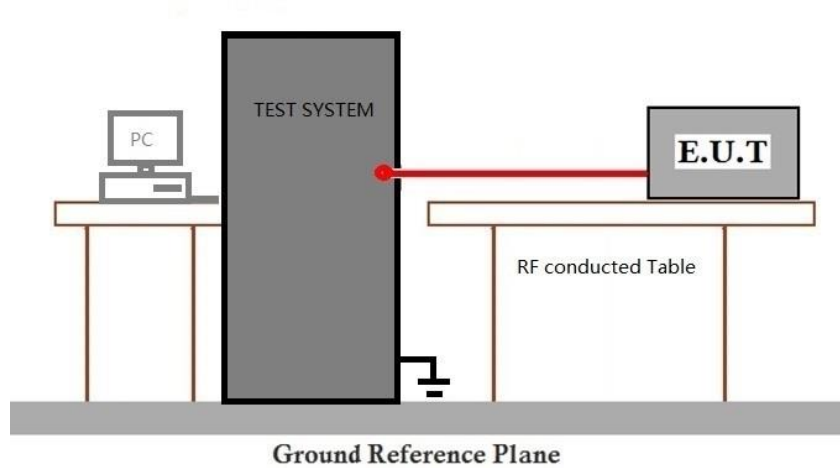

7.10.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.11 Conducted Spurious Emissions

Test Requirement: 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10 (2020) Section 7.8.7
 Test Engineer: Byron Liang

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.11.1 E.U.T. Operation

Operating Environment:


Temperature: 21.4 °C Humidity: 44.7 % RH Atmospheric Pressure: 1020 mbar

7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	04	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.



7.11.3 Test Setup Diagram

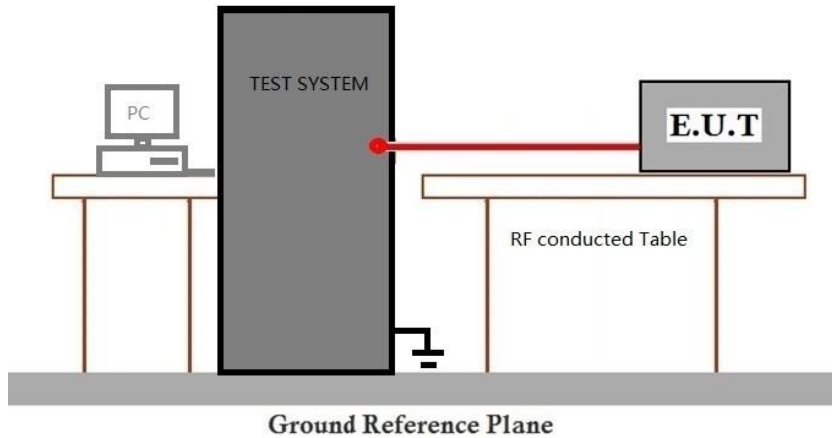

7.11.4 Measurement Procedure and Data

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SZCR2510004622AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix – External and Internal Photos for SZCR2510004622AT



10 Appendix

For right earbud:

1. Bandwidth

1.1 Test Result

1.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.034	/	Pass
		2440	1	1.033	/	Pass
		2480	1	1.033	/	Pass
2M	SISO	2404	1	2.066	/	Pass
		2440	1	2.067	/	Pass
		2478	1	2.067	/	Pass

1.1.2 20dB BW


Mode	TX Type	Frequency (MHz)	ANT	20dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.135	/	Pass
		2440	1	1.133	/	Pass
		2480	1	1.134	/	Pass
2M	SISO	2404	1	2.237	/	Pass
		2440	1	2.233	/	Pass
		2478	1	2.233	/	Pass

1.2 Test Graph

1.2.1 OBW

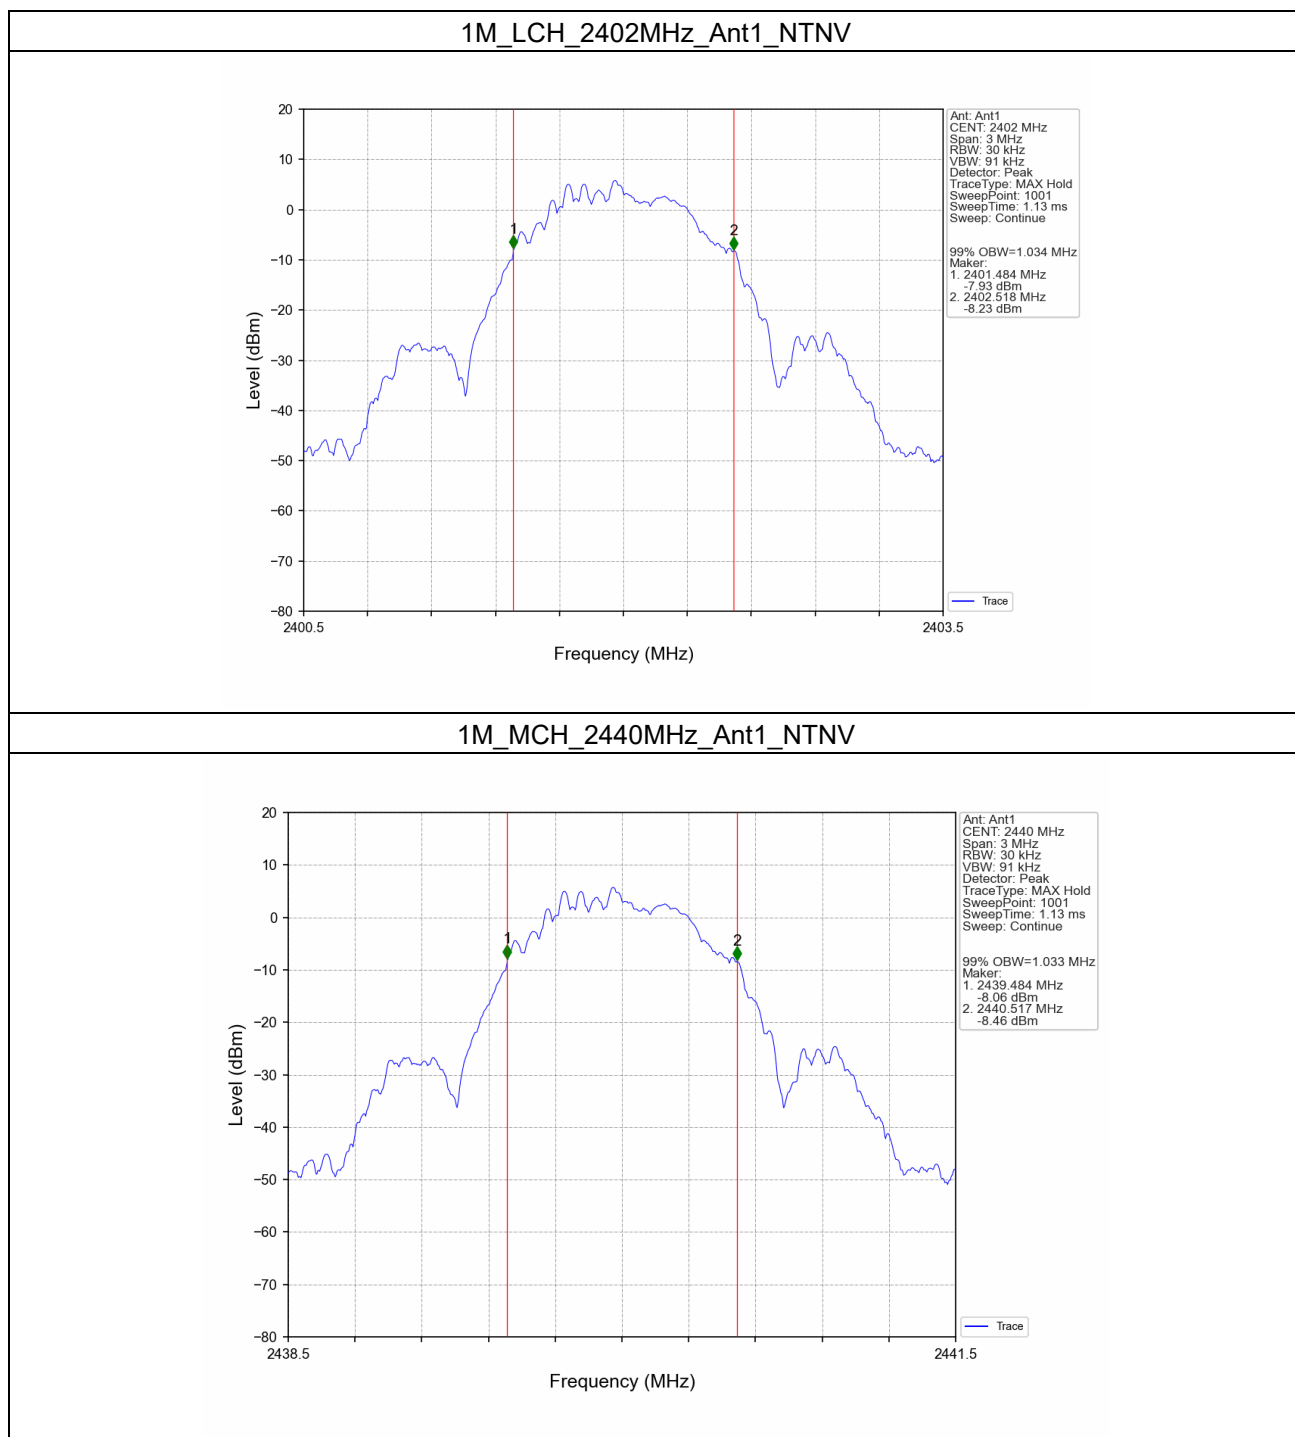


1M_HCH_2480MHz_Ant1_NTNV

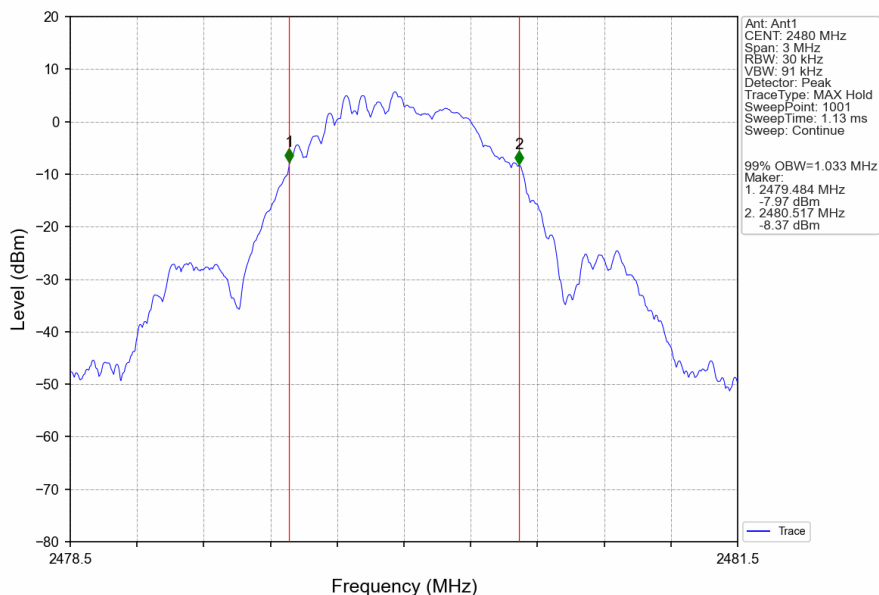


2M_LCH_2404MHz_Ant1_NTNV




2M_MCH_2440MHz_Ant1_NTNV

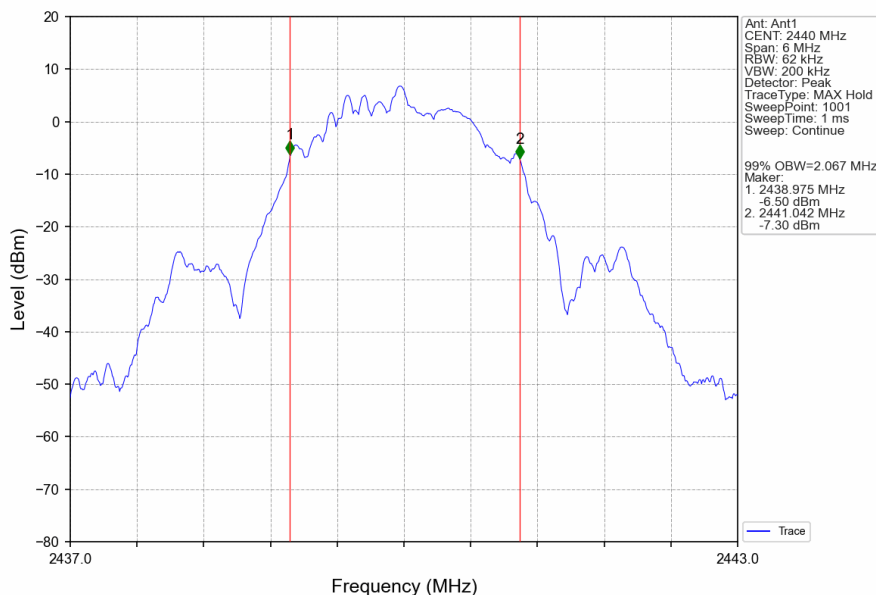


2M_HCH_2478MHz_Ant1_NTNV

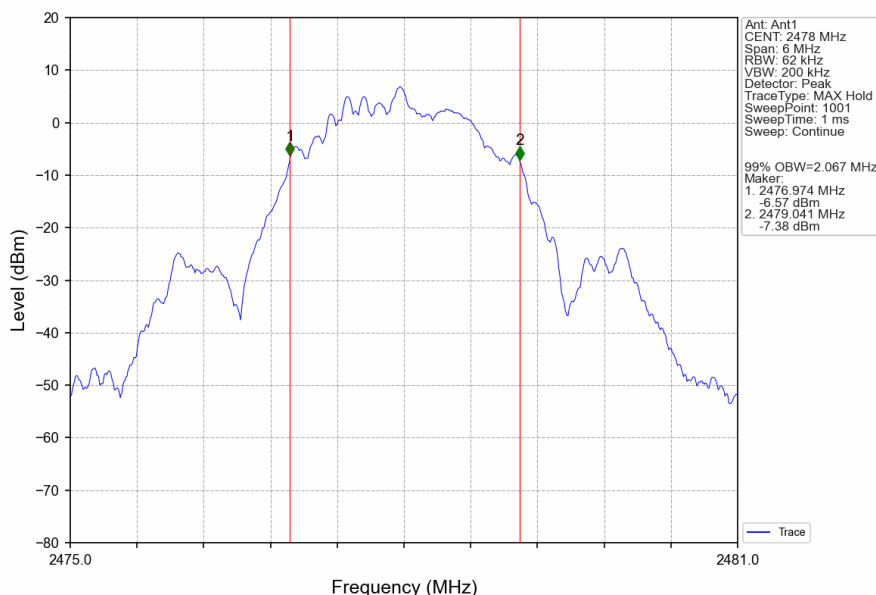


1.2.2 20dB BW

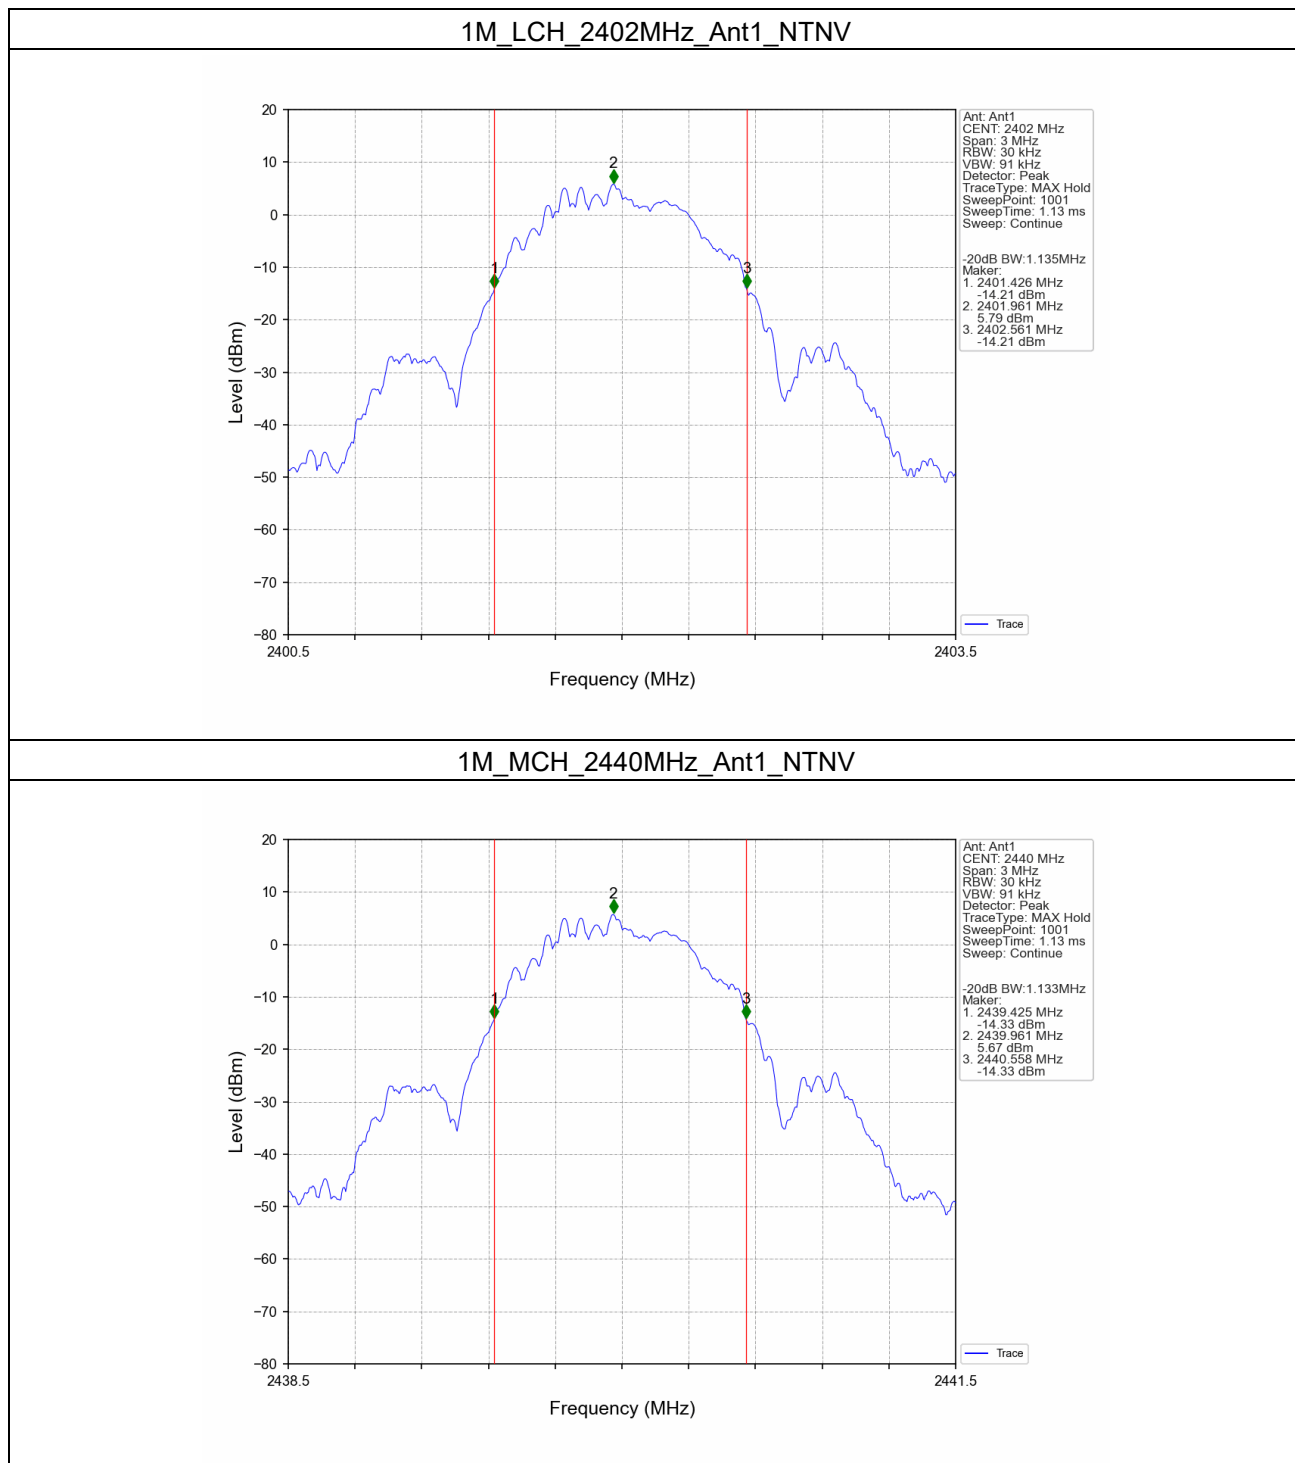


1M_HCH_2480MHz_Ant1_NTNV

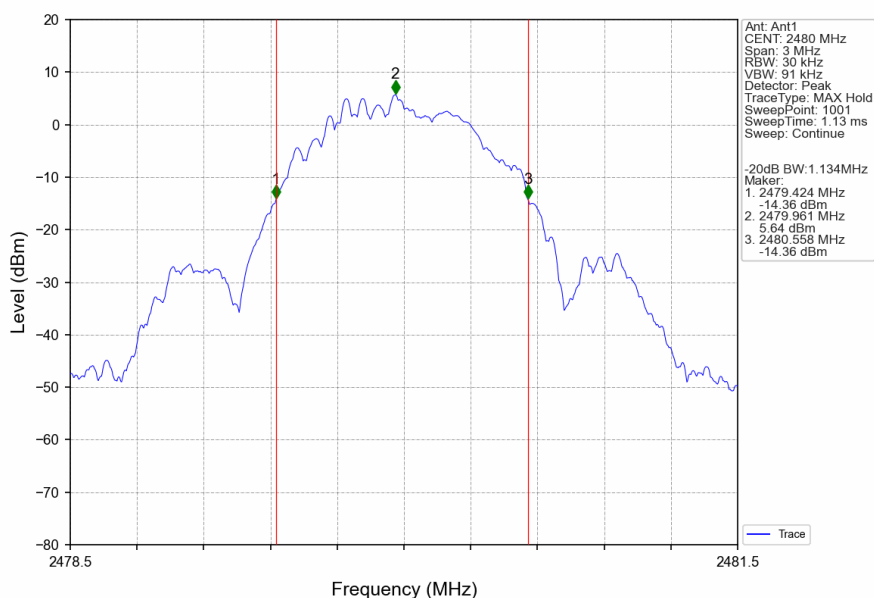


2M_LCH_2404MHz_Ant1_NTNV

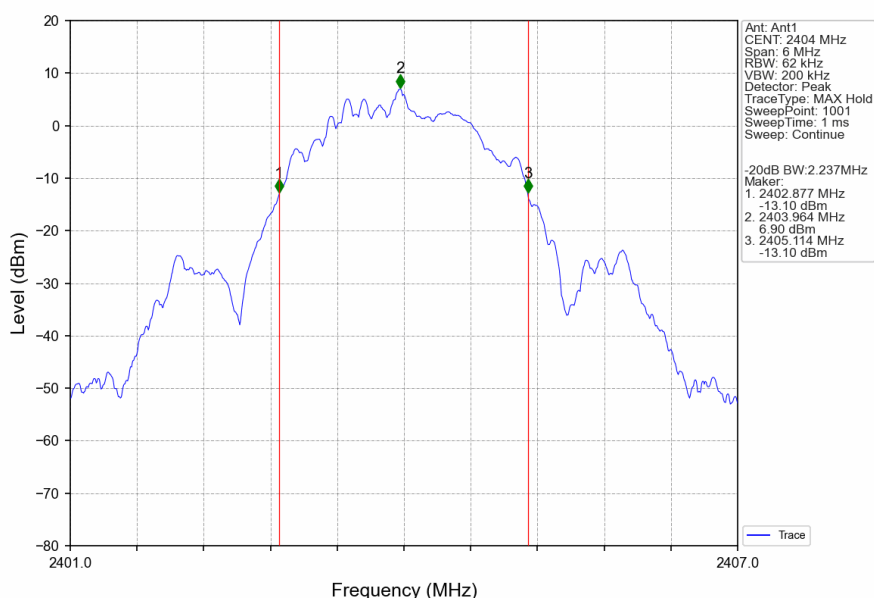

2M_MCH_2440MHz_Ant1_NTNV

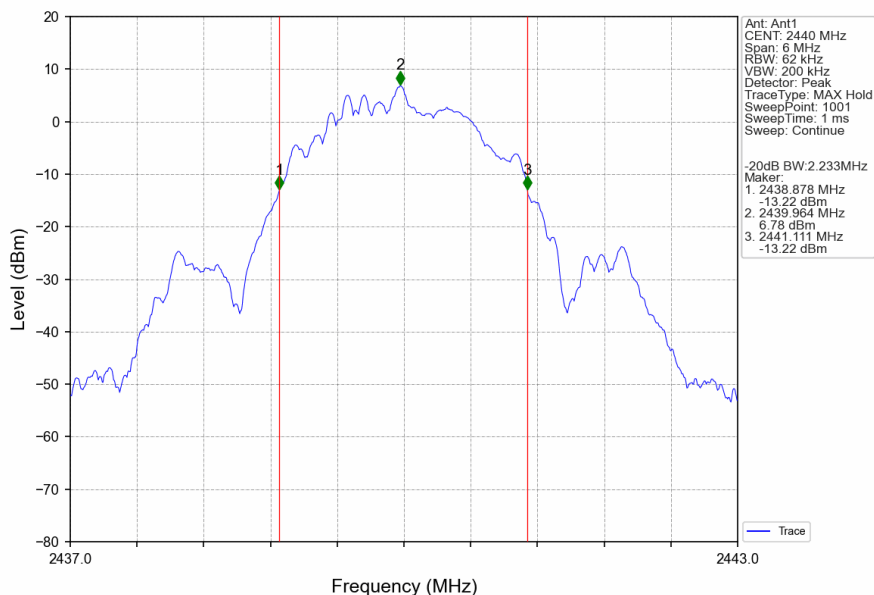

2M_HCH_2478MHz_Ant1_NTNV

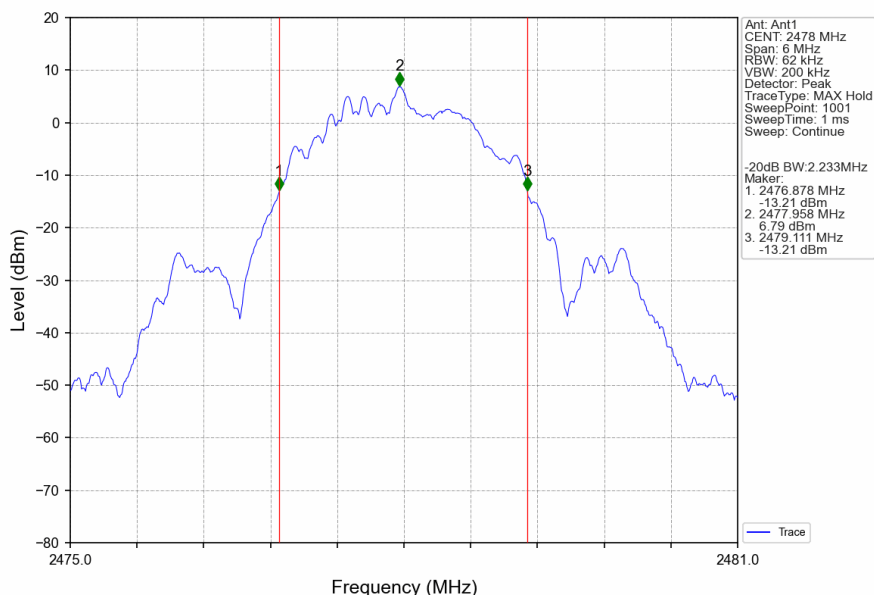

2. Maximum Conducted Output Power

2.1 Test Result

3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	10.43	<=20.97	Pass
		2440	10.38	<=20.97	Pass
		2480	10.39	<=20.97	Pass
2M	SISO	2404	10.47	<=20.97	Pass
		2440	10.43	<=20.97	Pass
		2478	10.42	<=20.97	Pass

Note1: Antenna Gain: Ant1: -1.40dBi;



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

3. Carrier Frequency Separation

3.1 Test Result


3.1.1 Ant1

Ant1						
Mode	TX Type	Frequency (MHz)	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
1M	SISO	HOPP	2.012	1.135	≥ 1.135	Pass
2M	SISO	HOPP	2.004	2.237	≥ 1.491	Pass



4.2 Test Graph

4.2.1 Ant1

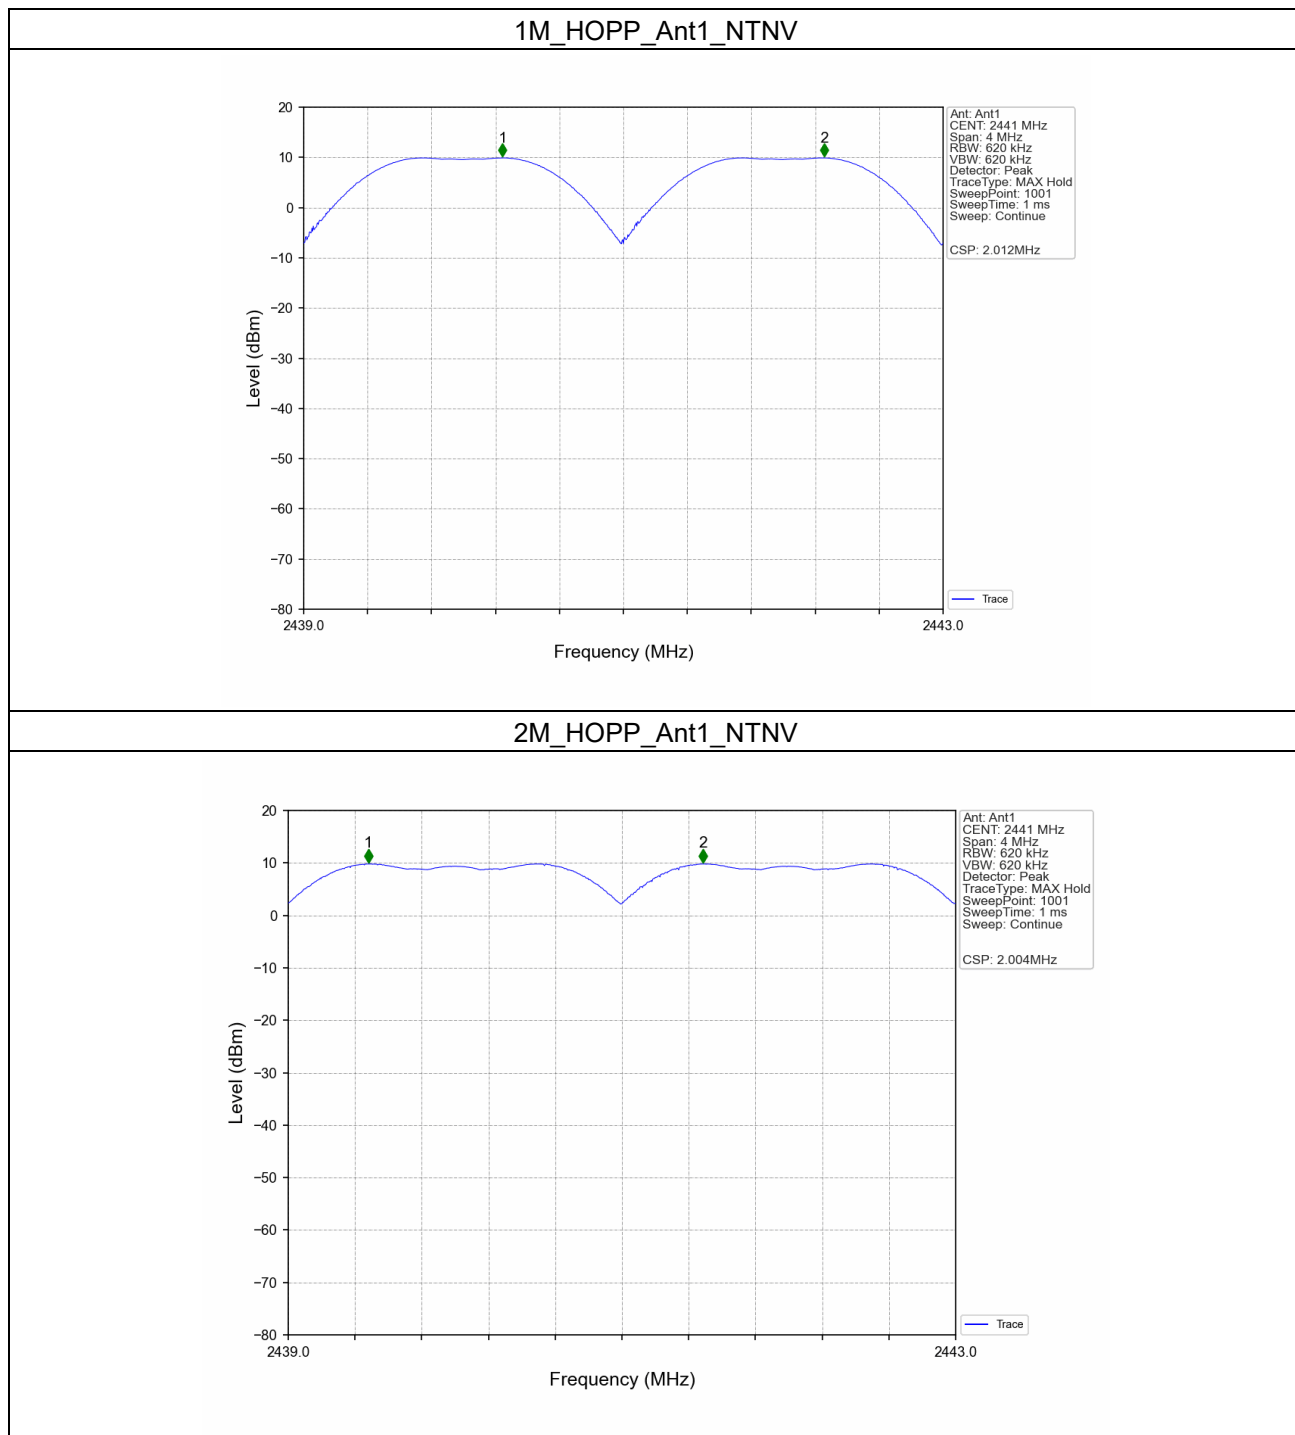

4. Number of Hopping Frequencies


4.1 Test Result

4.1.1 HoppNum

Mode	TX Type	Frequency (MHz)	Num of Hopping Frequencies		Verdict
			ANT1	Limit	
1M	SISO	HOPP	39	>=15	Pass
2M	SISO	HOPP	37	>=15	Pass

4.2 Test Graph

4.2.1 HoppNum

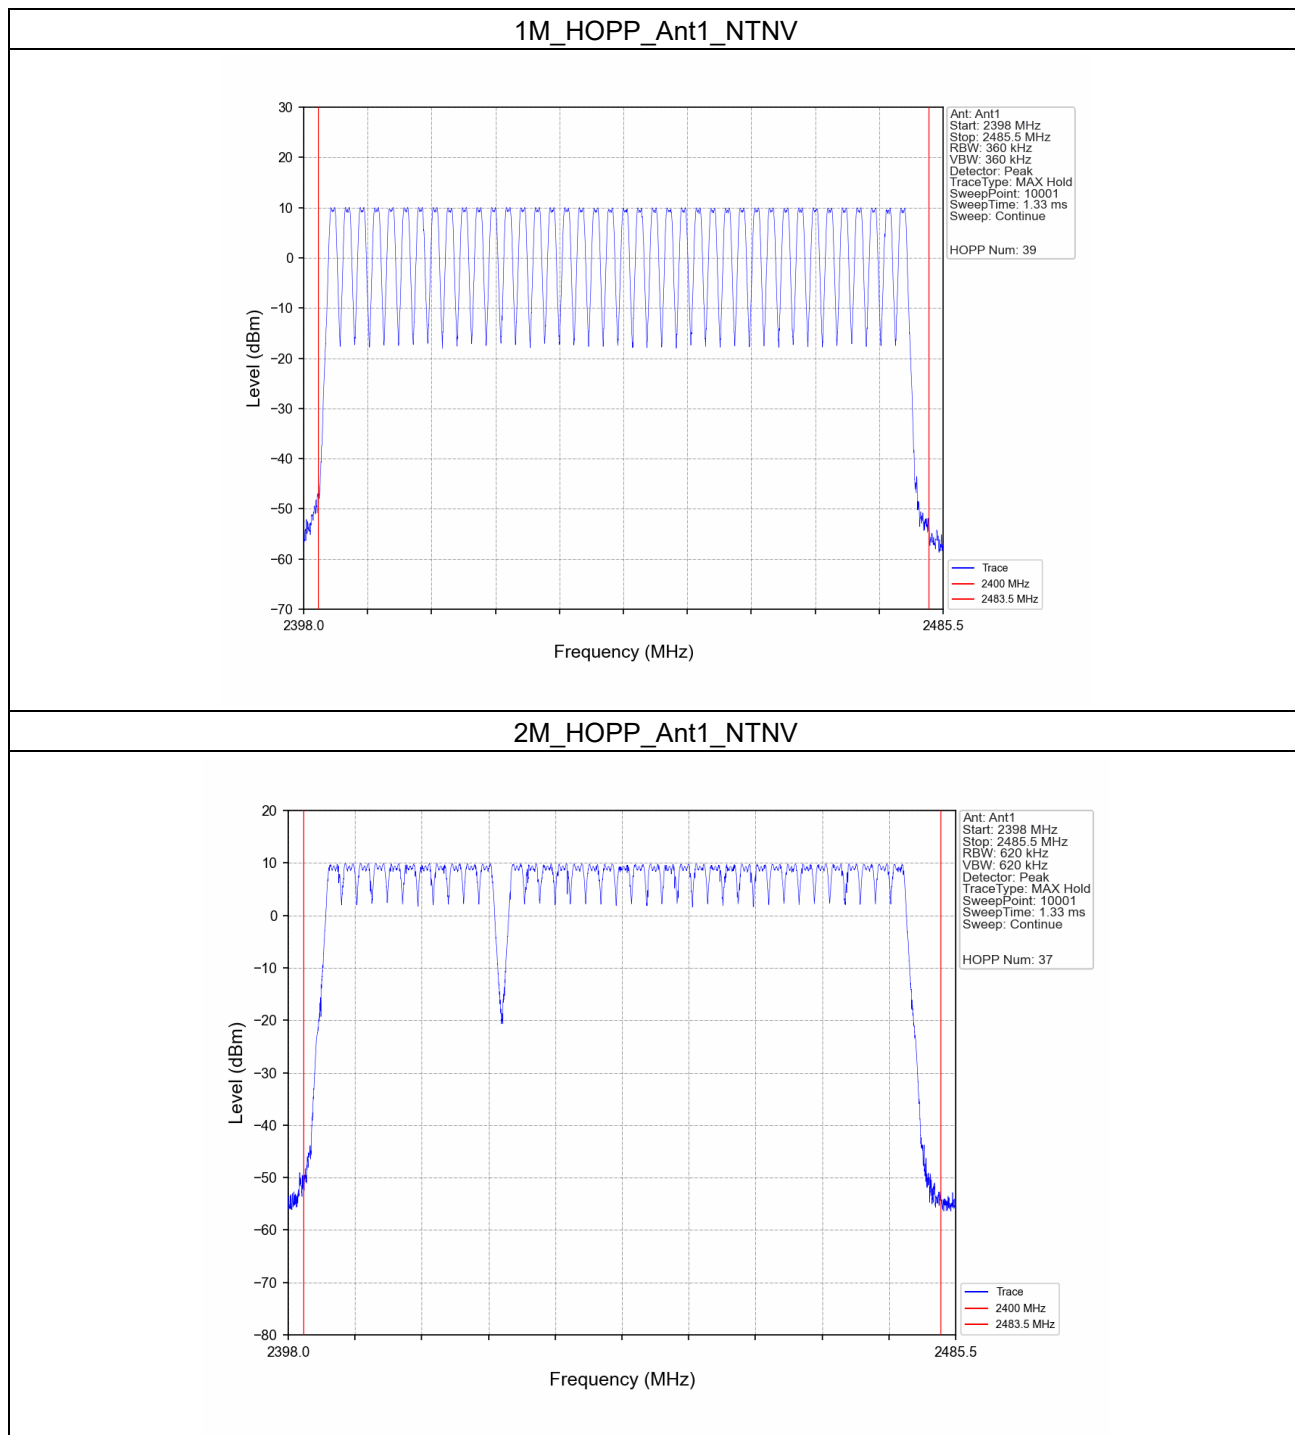

5. Time of Occupancy (Dwell Time)

5.1 Test Result


5.1.1 Ant1

Ant1								
Mode	TX Type	Frequency (MHz)	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
1M	SISO	HOPP	0.380	15.600	624	237.120	<=400	Pass
2M	SISO	HOPP	0.196	14.800	640	125.440	<=400	Pass




5.2 Test Graph


5.2.1 Ant1

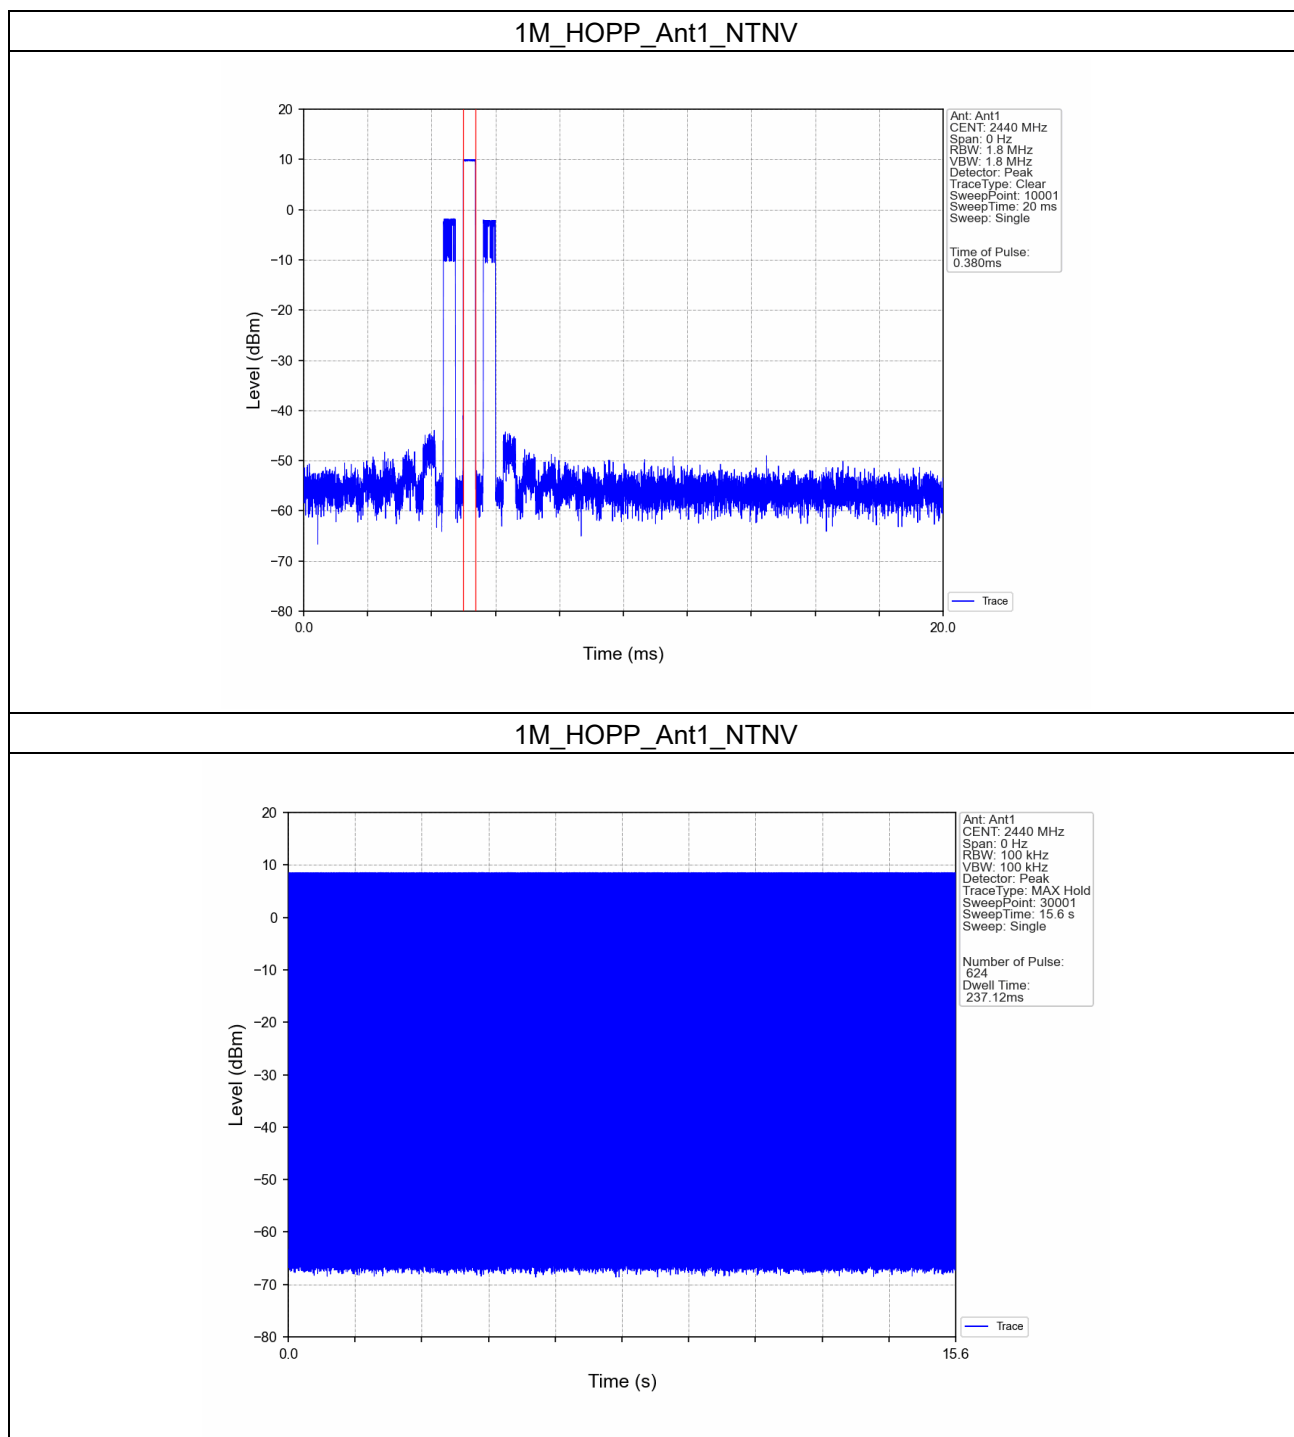

2M_HOPP_Ant1_NTNV

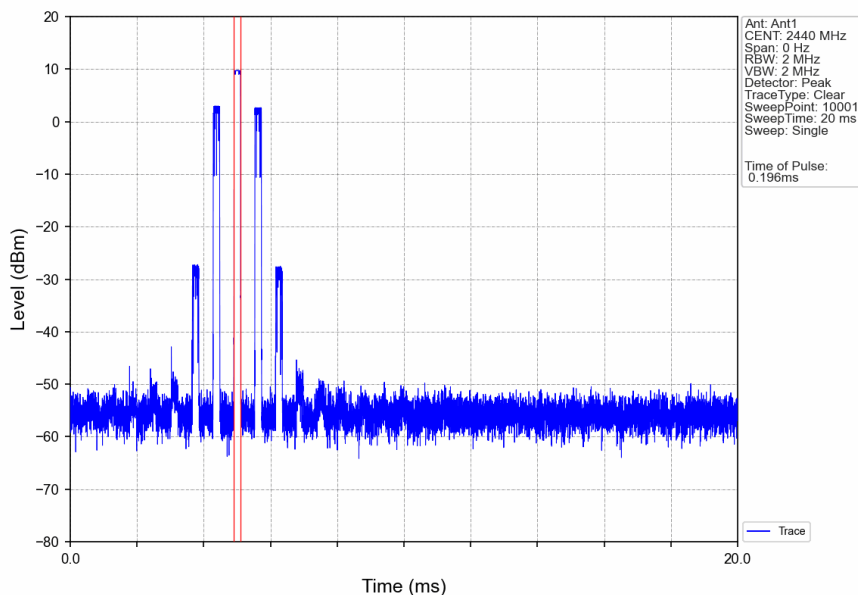

2M_HOPP_Ant1_NTNV

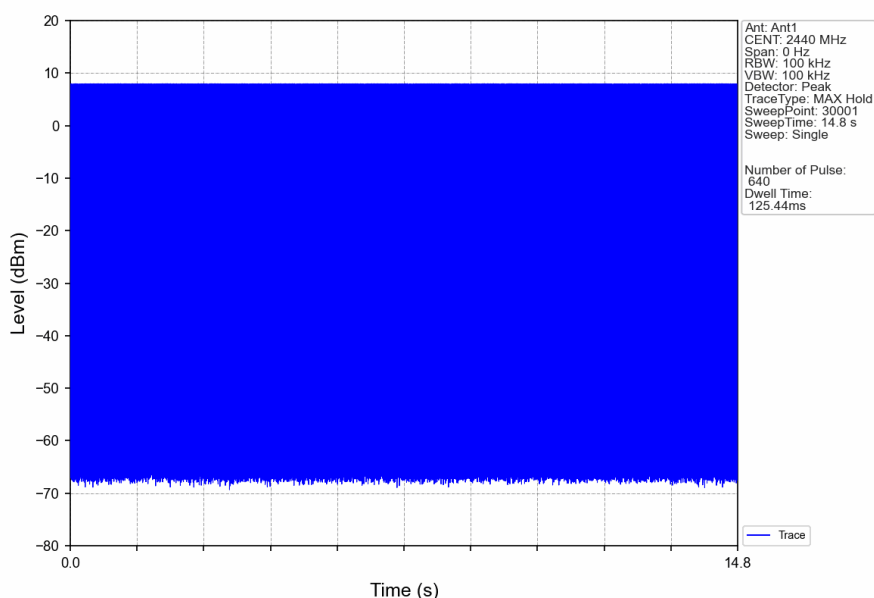

6. Unwanted Emissions In Non-restricted Frequency Bands

6.1 Test Result

6.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	9.21
		2440	1	9.14
		2480	1	9.11
2M	SISO	2404	1	8.79
		2440	1	8.69
		2478	1	8.66

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


7.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	9.21	-10.79	Pass
		2440	1	9.21	-10.79	Pass
		2480	1	9.21	-10.79	Pass
		HOPP	1	9.21	-10.79	Pass
				9.21	-10.79	Pass
2M	SISO	2404	1	8.79	-11.21	Pass
		2440	1	8.79	-11.21	Pass
		2478	1	8.79	-11.21	Pass
		HOPP	1	8.79	-11.21	Pass
				8.79	-11.21	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

6.2 Test Graph


6.2.1 Ref

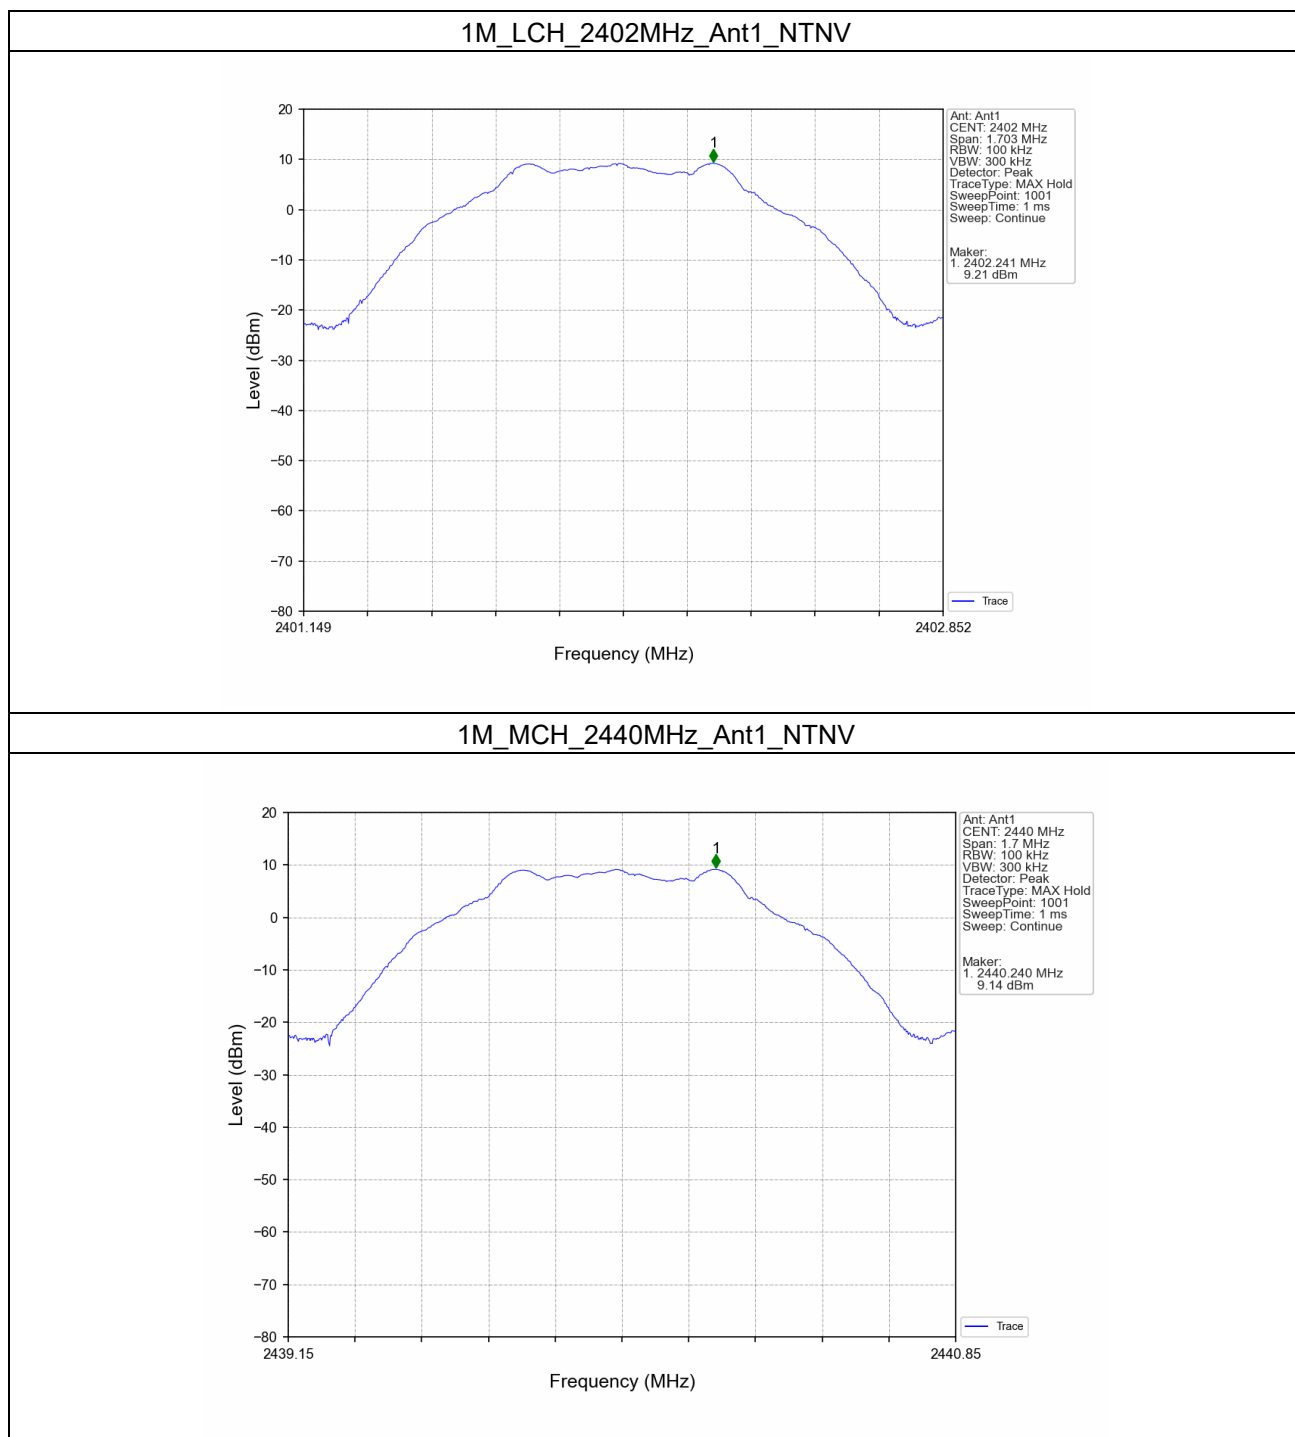


1M_HCH_2480MHz_Ant1_NTNV

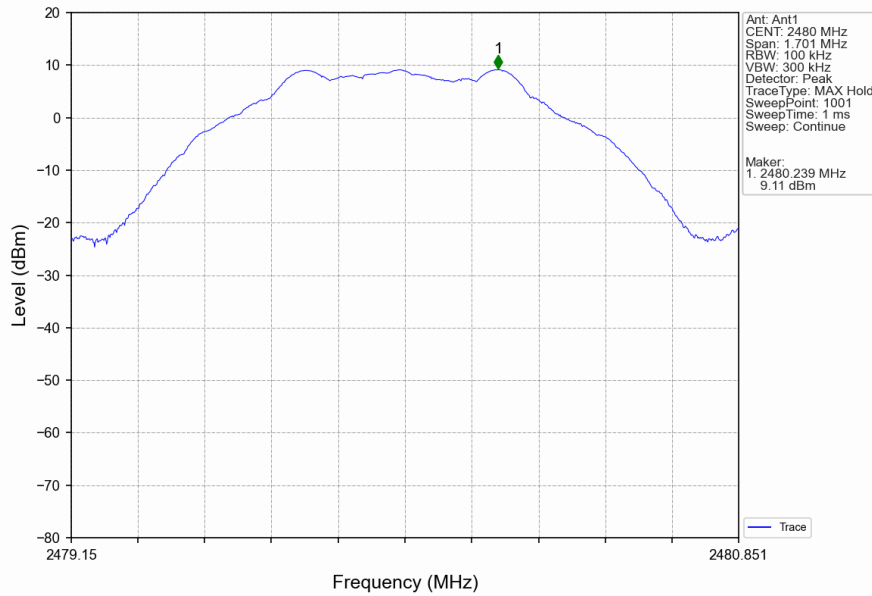


2M_LCH_2404MHz_Ant1_NTNV

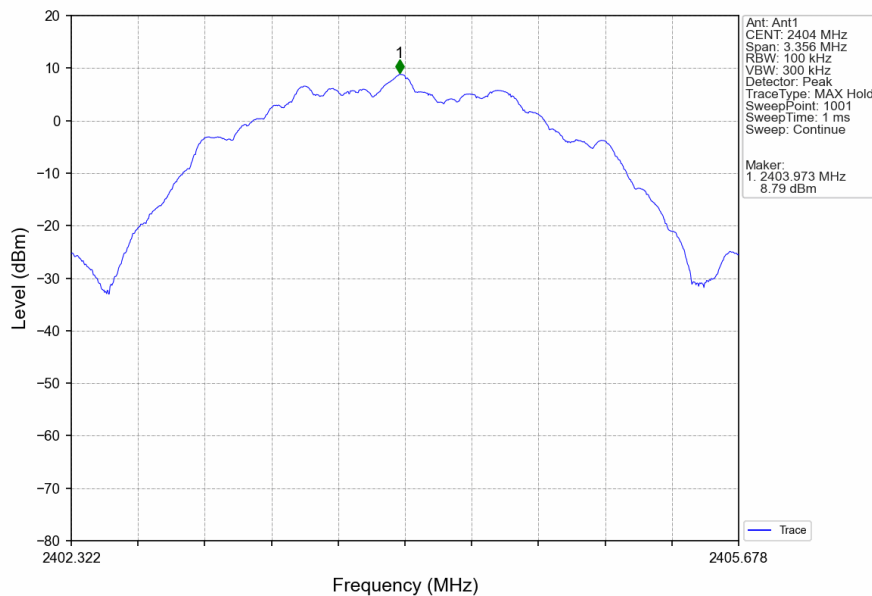


2M_MCH_2440MHz_Ant1_NTNV

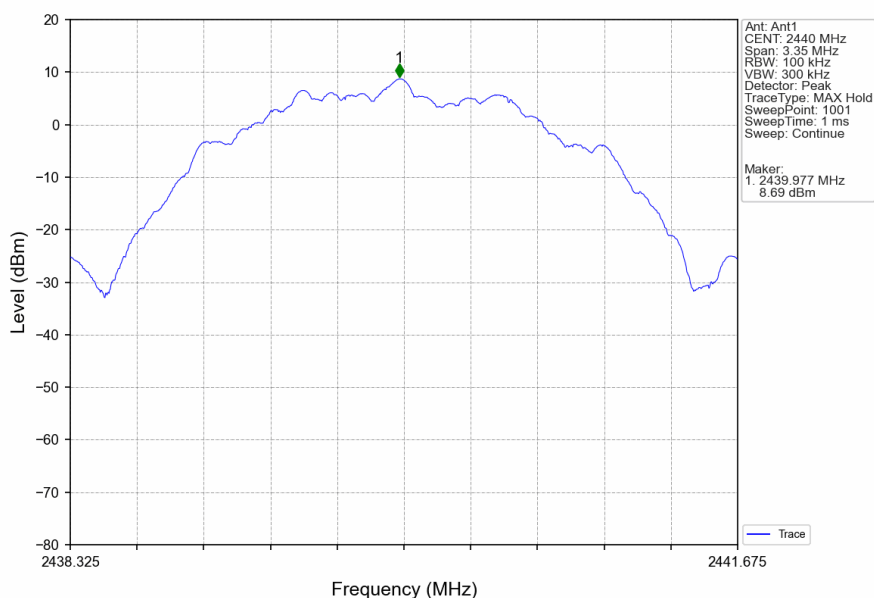

2M_HCH_2478MHz_Ant1_NTNV

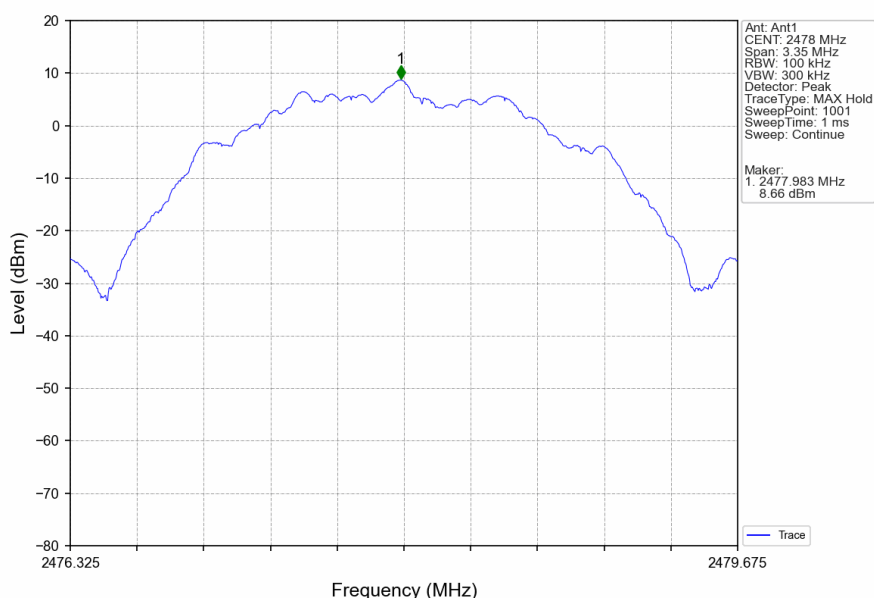

6.2.2 CSE

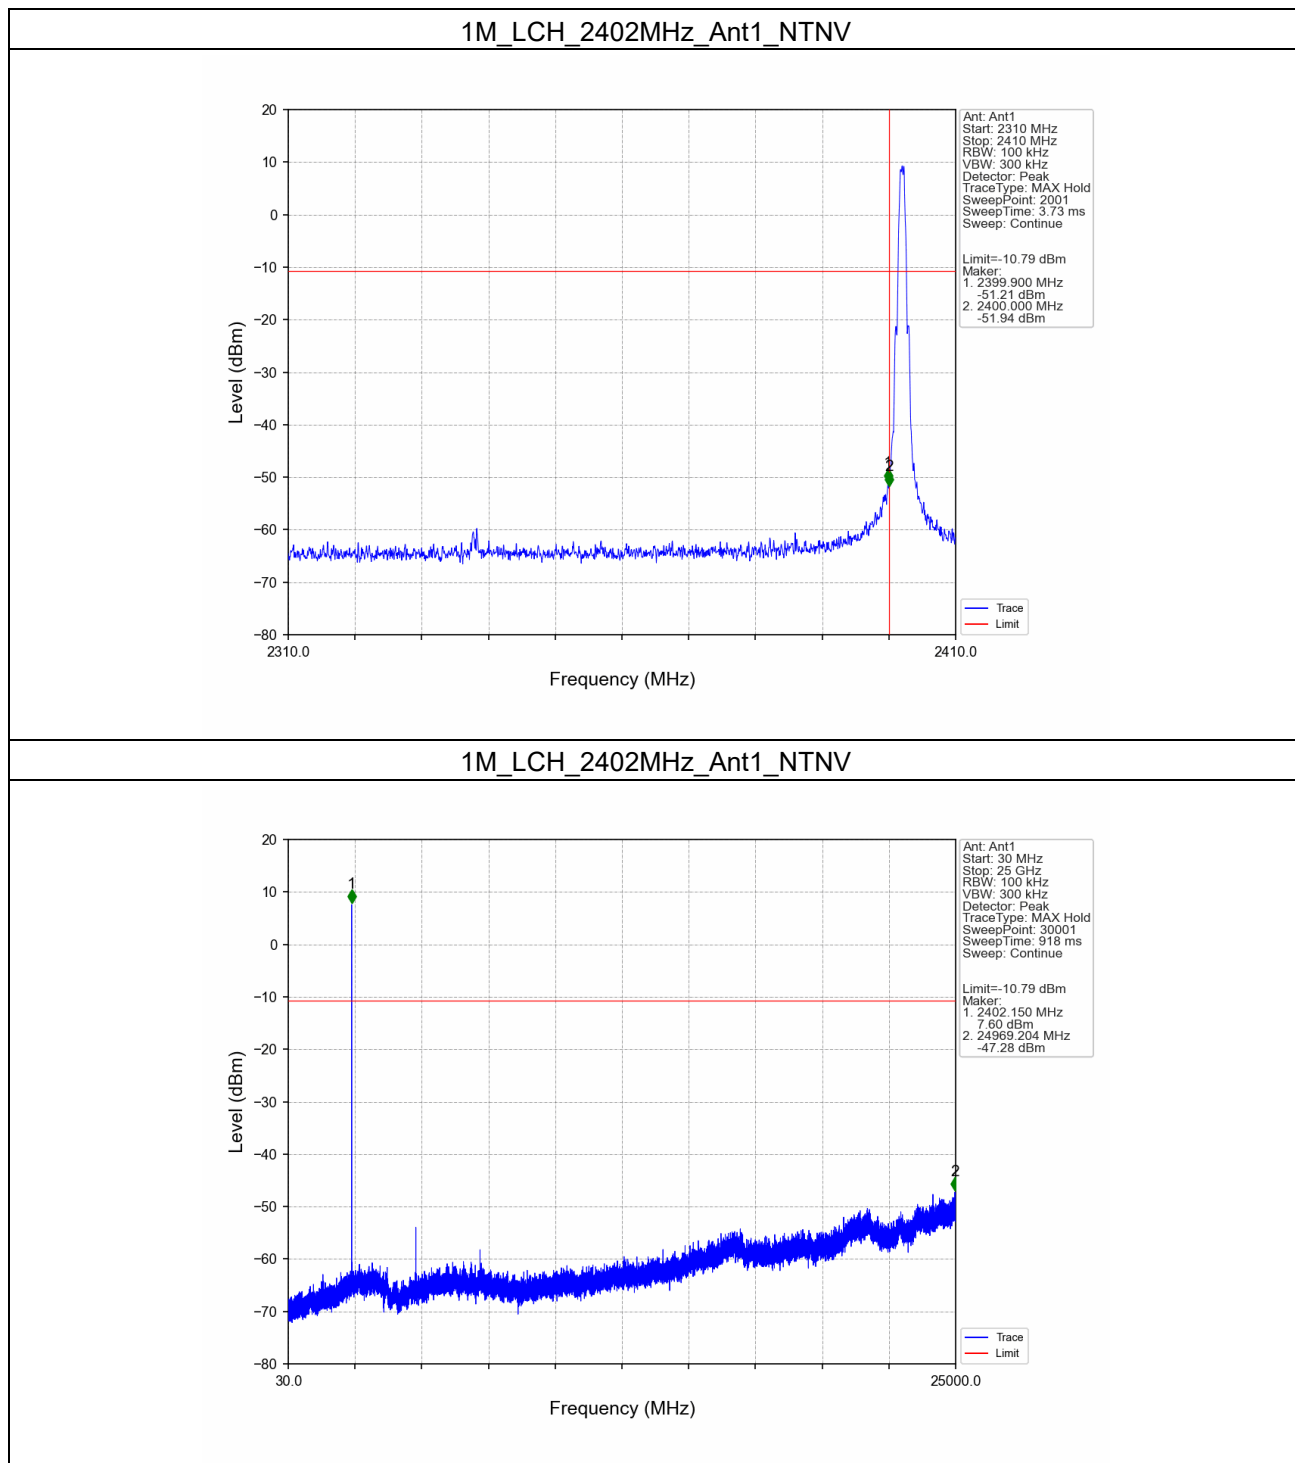


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


1M_MCH_2440MHz_Ant1_NTNV

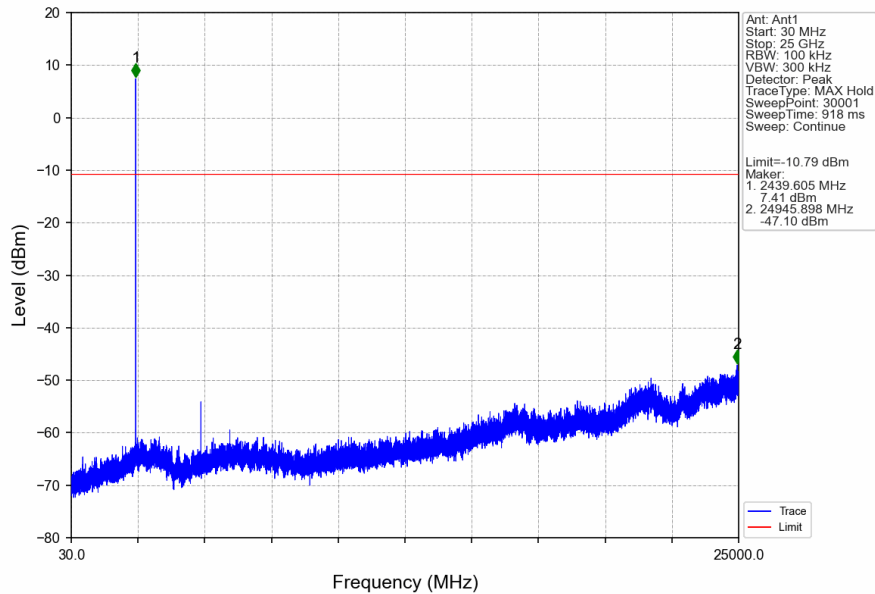


1M_HCH_2480MHz_Ant1_NTNV

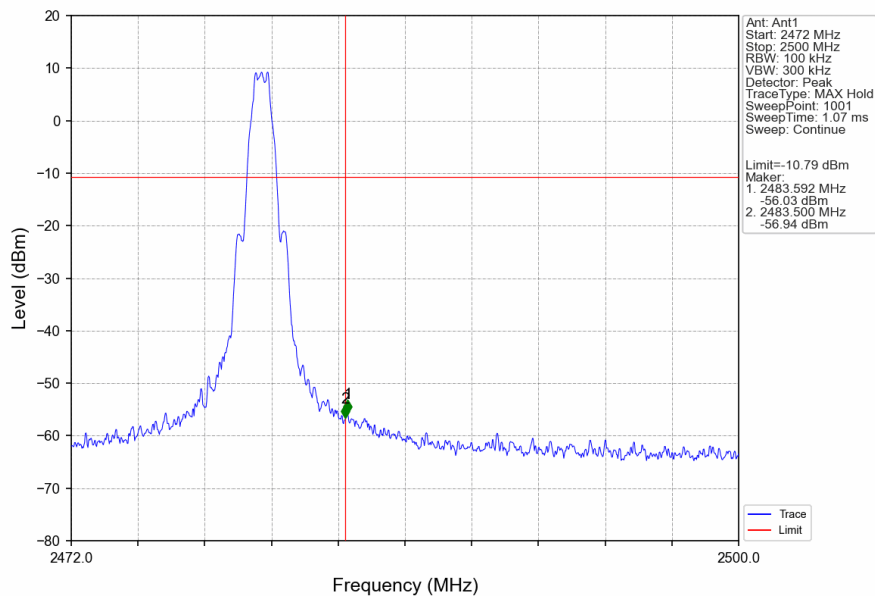


1M_HCH_2480MHz_Ant1_NTNV

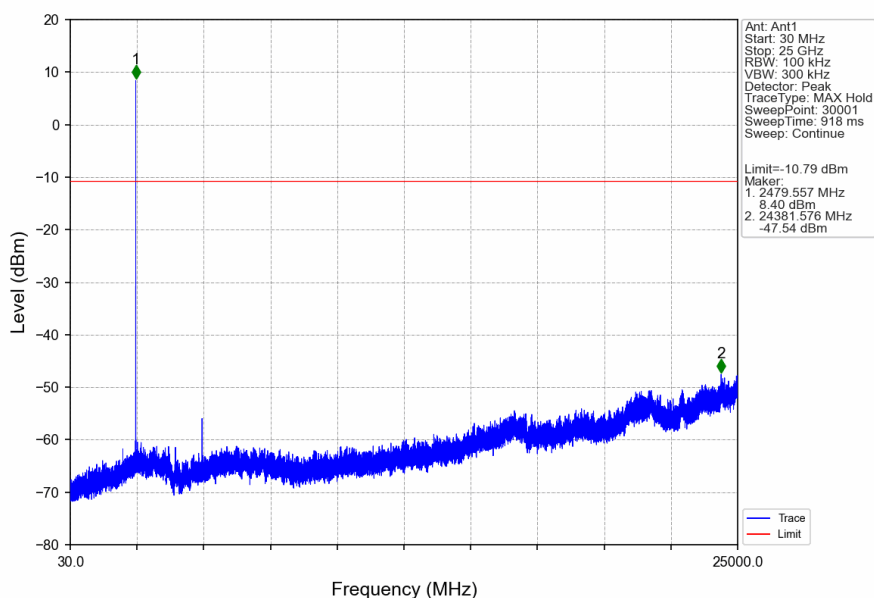


1M_HOPP_Ant1_NTNV

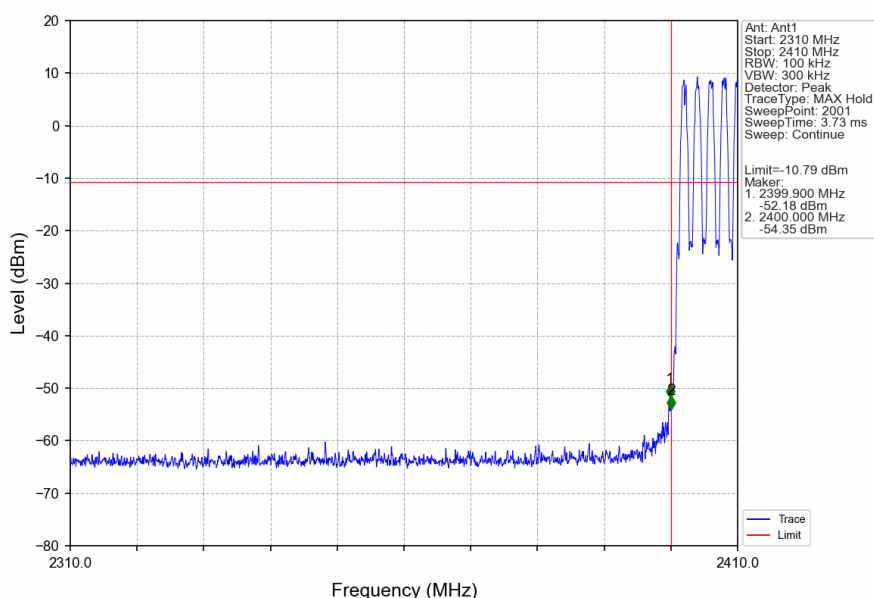

1M_HOPP_Ant1_NTNV

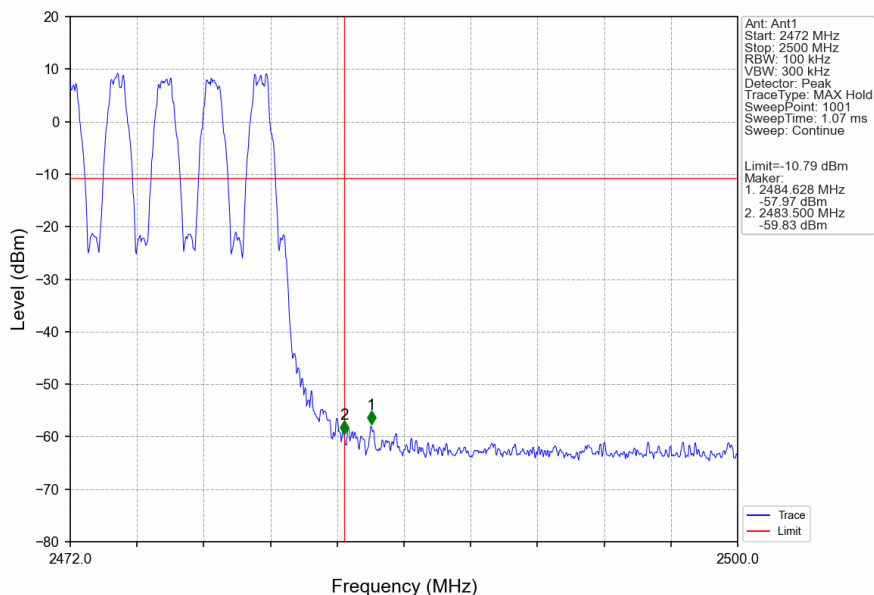

2M_LCH_2404MHz_Ant1_NTNV

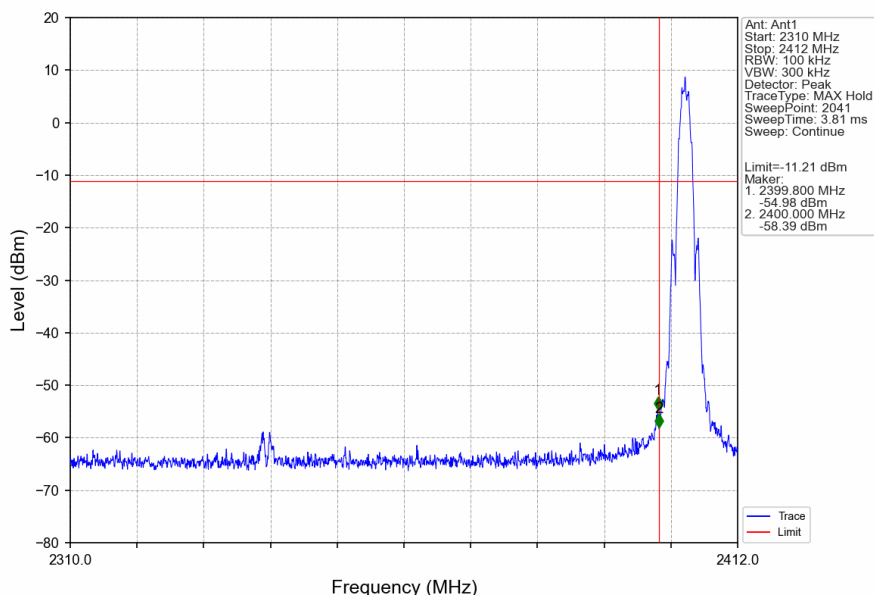


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


2M_LCH_2404MHz_Ant1_NTNV

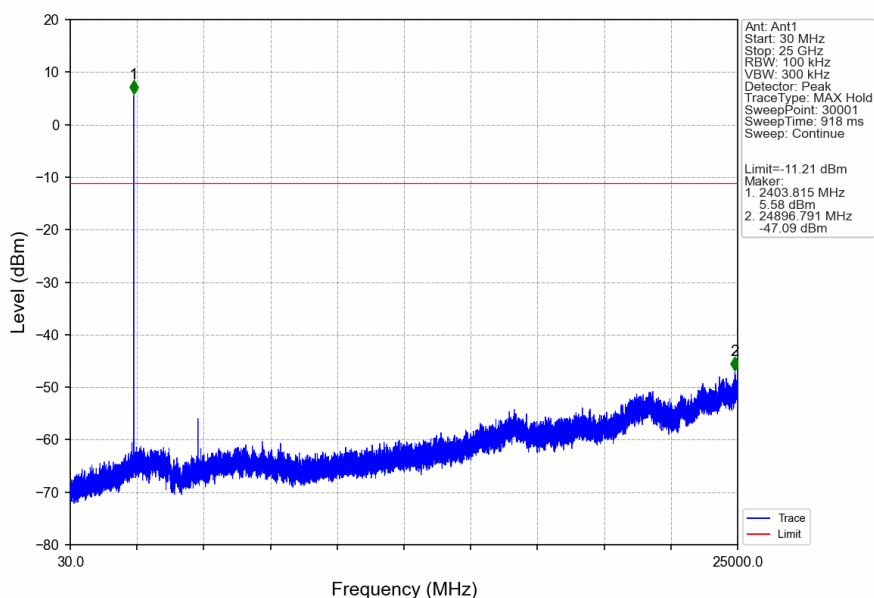


2M_MCH_2440MHz_Ant1_NTNV

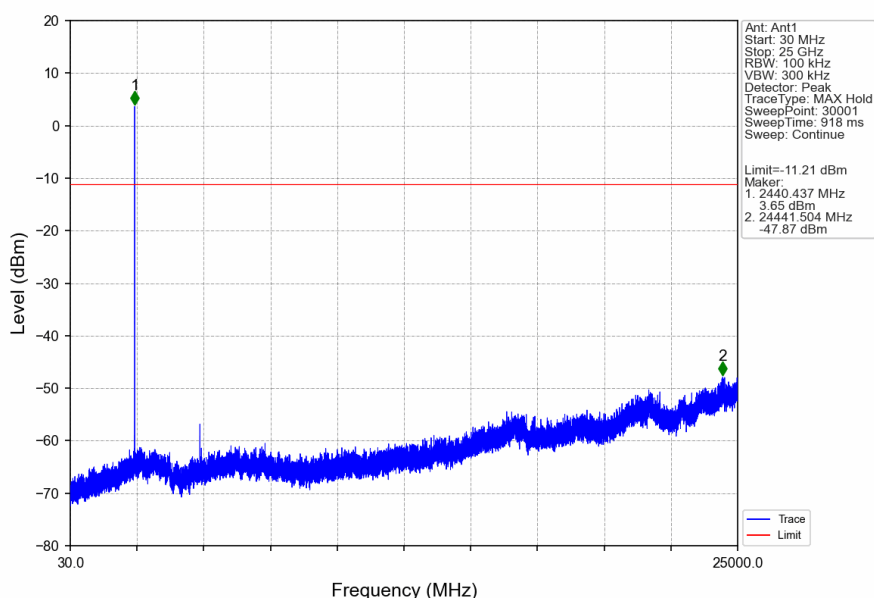


2M_HCH_2478MHz_Ant1_NTNV

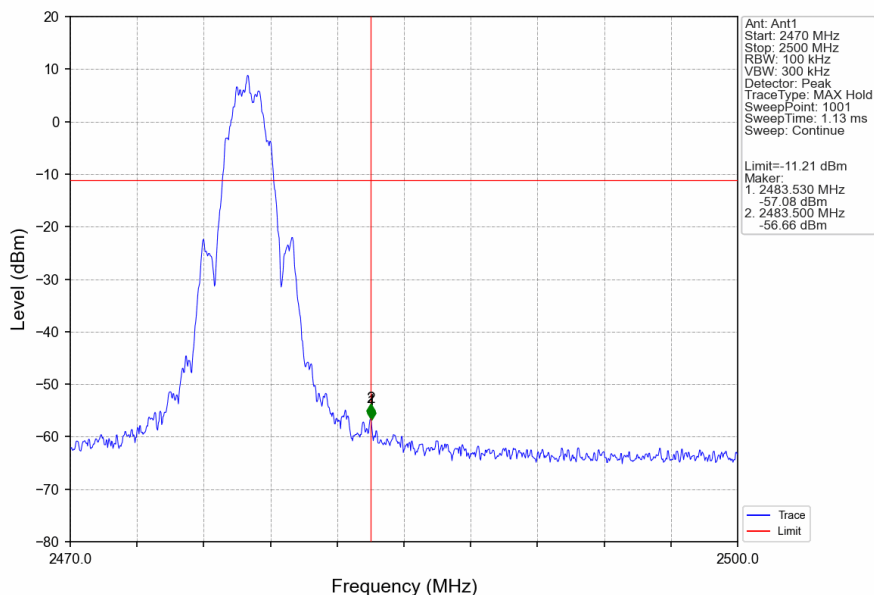


2M_HCH_2478MHz_Ant1_NTNV

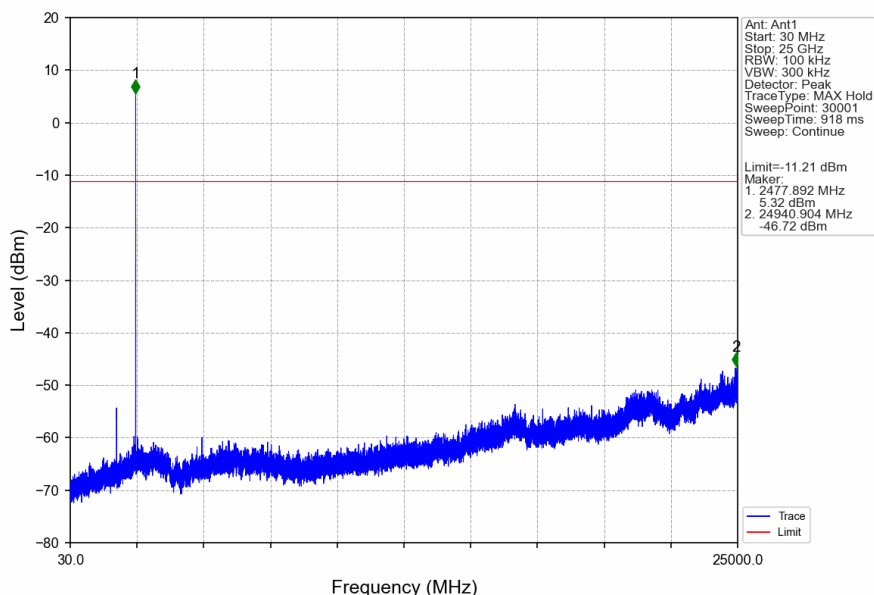

2M_HOPP_Ant1_NTNV

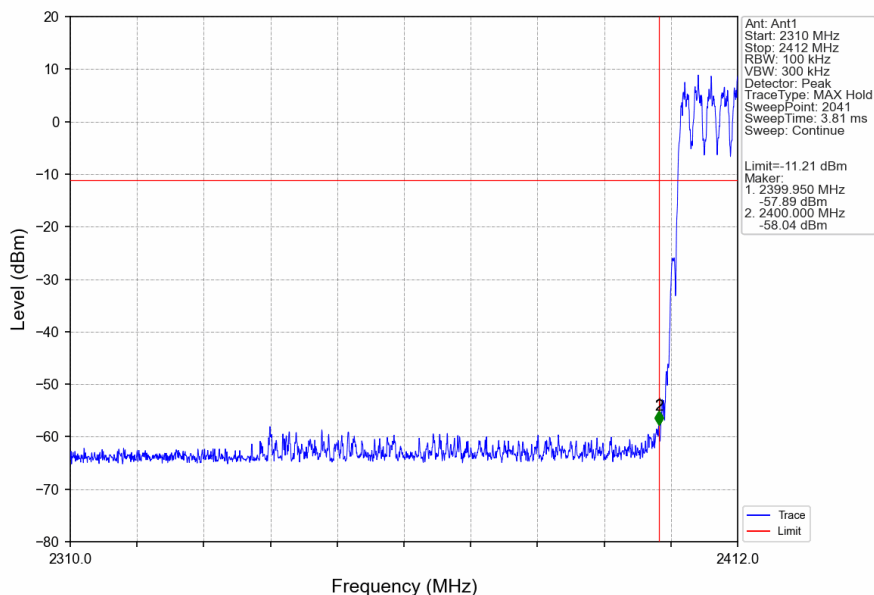

2M_HOPP_Ant1_NTNV

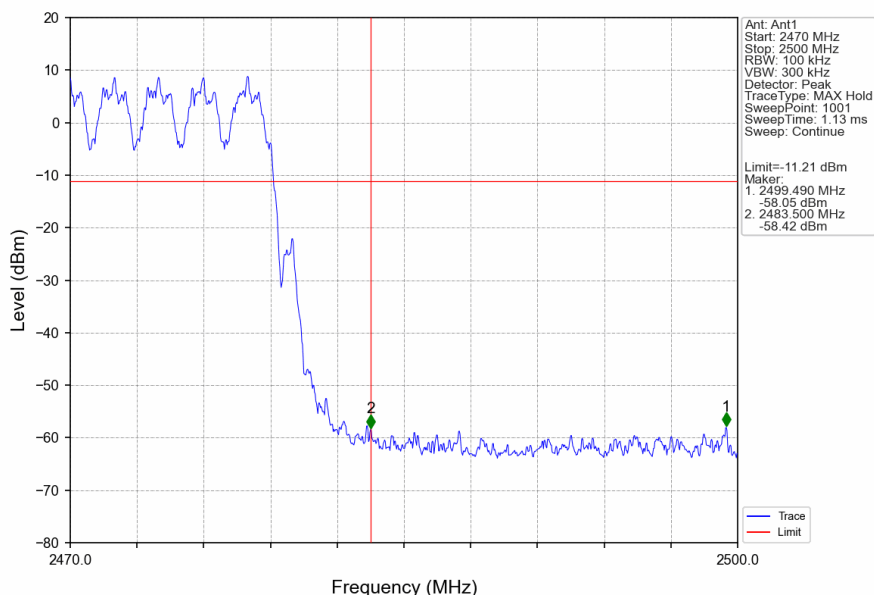

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251000462204

Page: 109 of 133

For left earbud:

1. Bandwidth

1.1 Test Result

1.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.033	/	Pass
		2440	1	1.033	/	Pass
		2480	1	1.034	/	Pass
2M	SISO	2404	1	2.066	/	Pass
		2440	1	2.066	/	Pass
		2478	1	2.064	/	Pass

2.1.2 20dB BW


Mode	TX Type	Frequency (MHz)	ANT	20dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.134	/	Pass
		2440	1	1.134	/	Pass
		2480	1	1.134	/	Pass
2M	SISO	2404	1	2.234	/	Pass
		2440	1	2.230	/	Pass
		2478	1	2.234	/	Pass

1.2 Test Graph


1.2.1 OBW

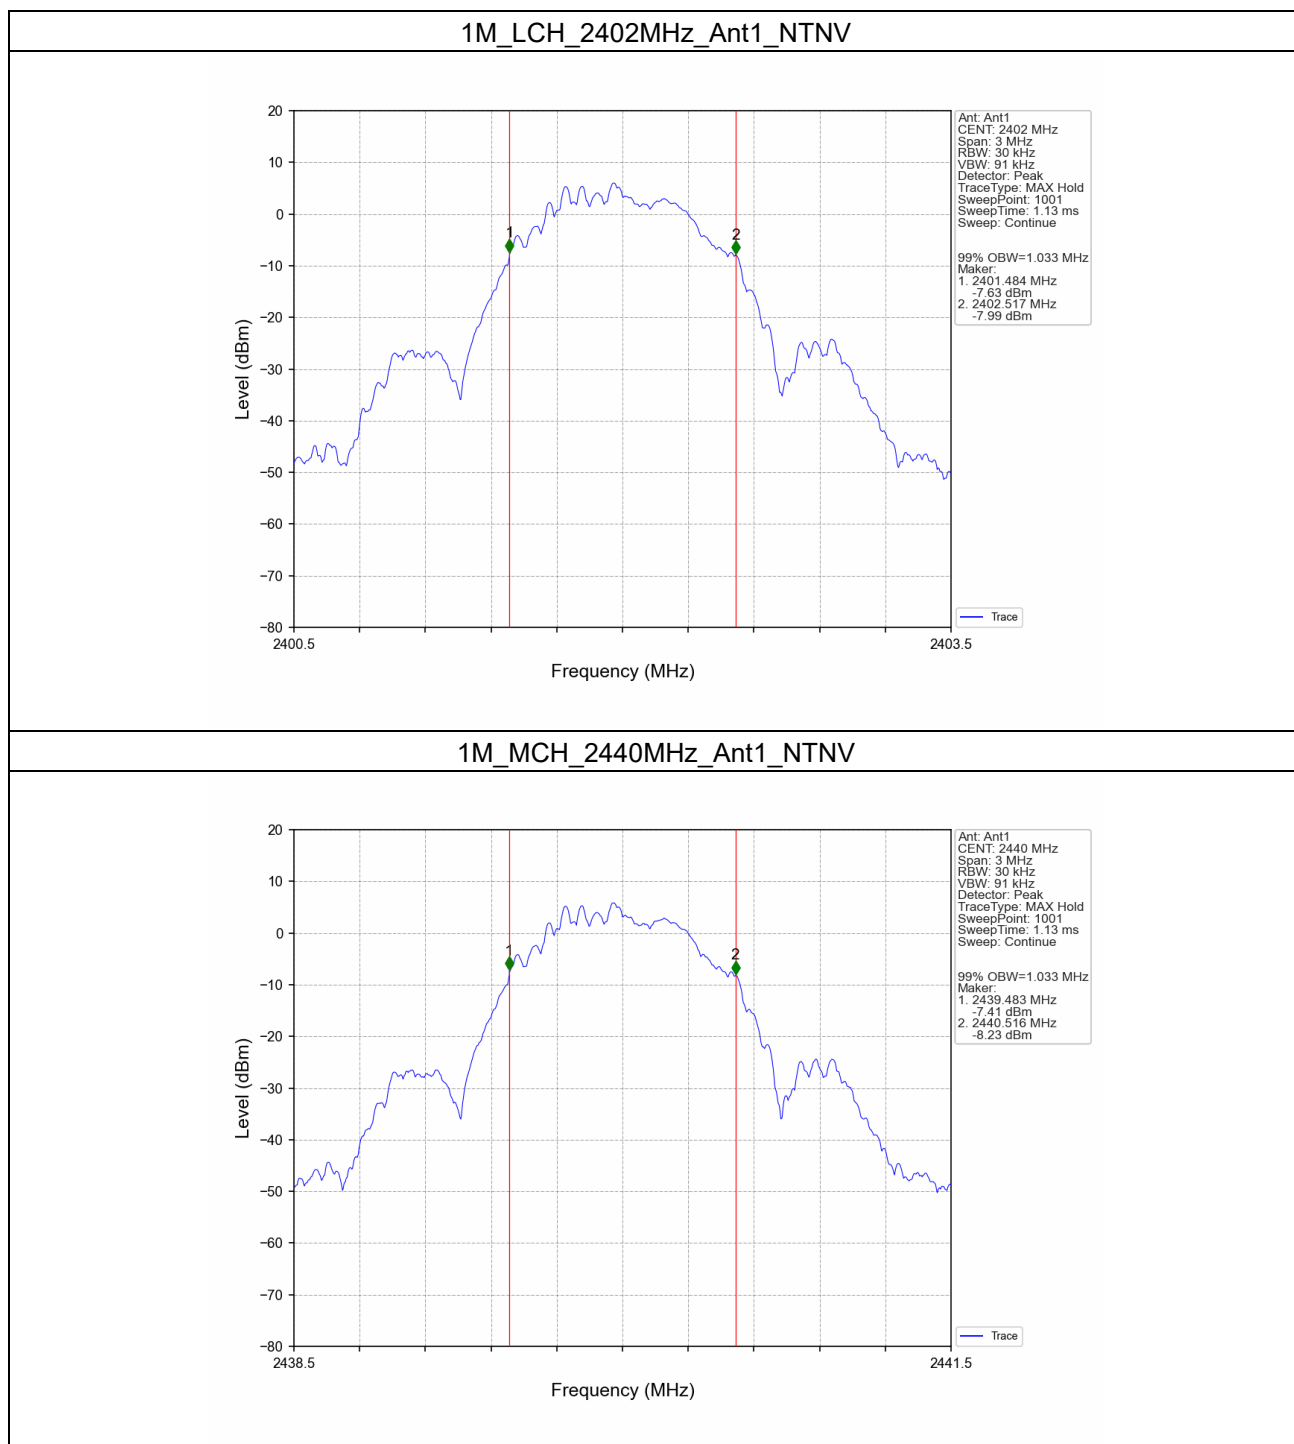


1M_HCH_2480MHz_Ant1_NTNV

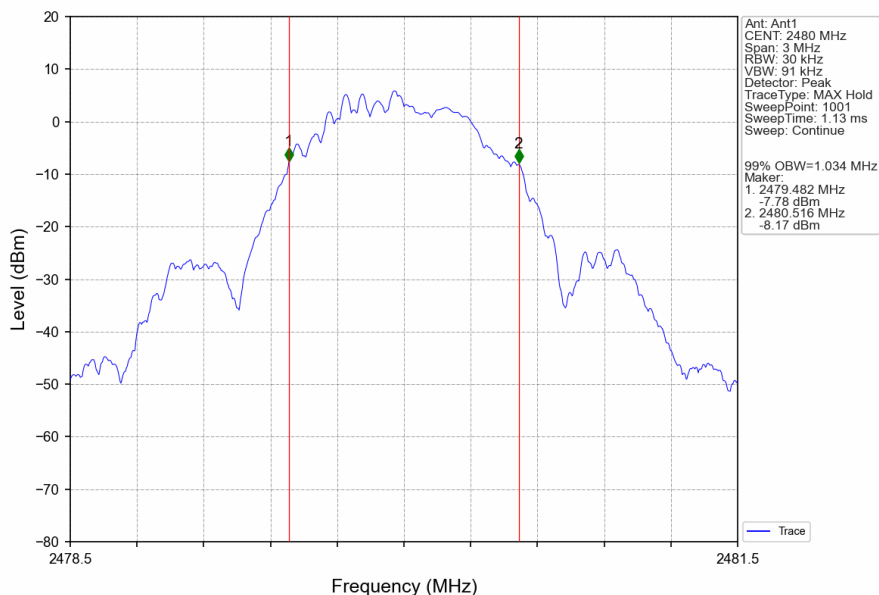


2M_LCH_2404MHz_Ant1_NTNV

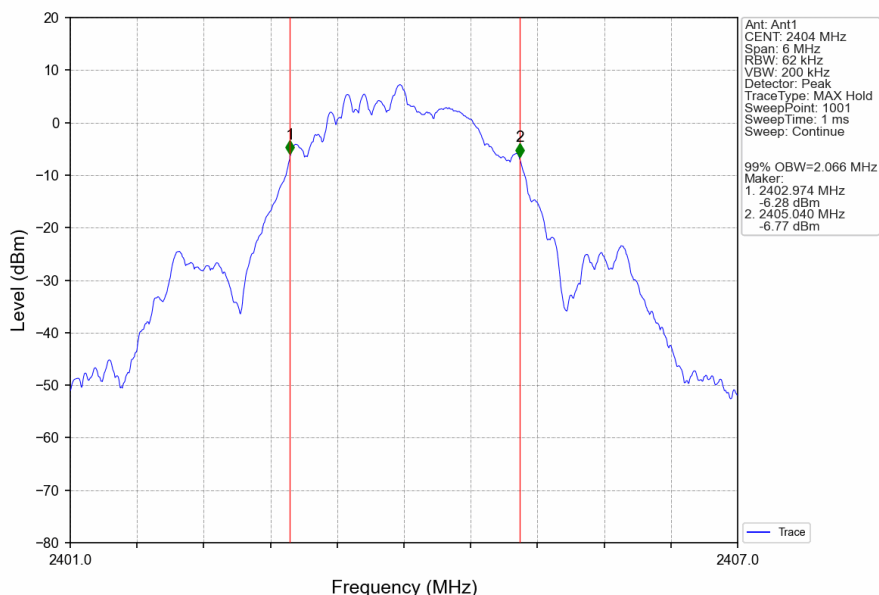


2M_MCH_2440MHz_Ant1_NTNV

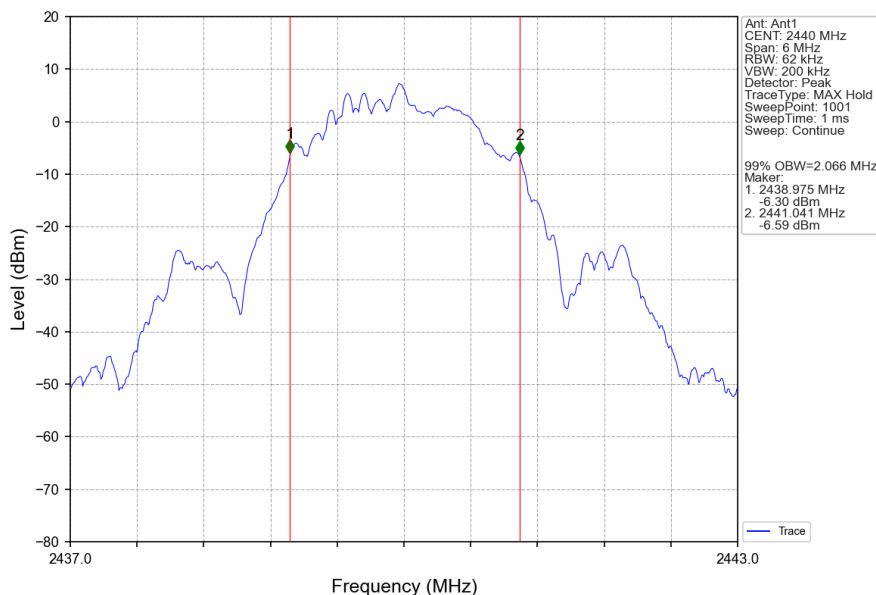

2M_HCH_2478MHz_Ant1_NTNV

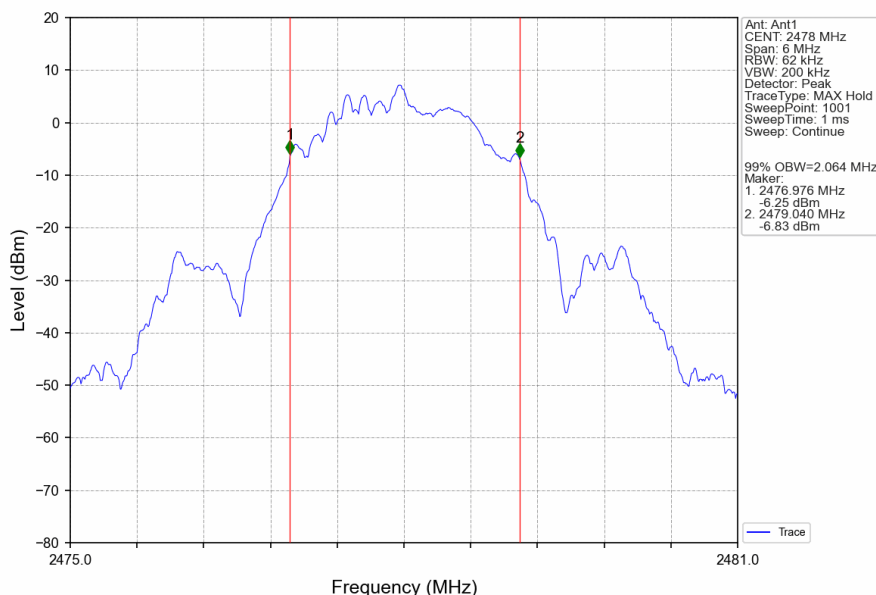

1.2.2 20dB BW

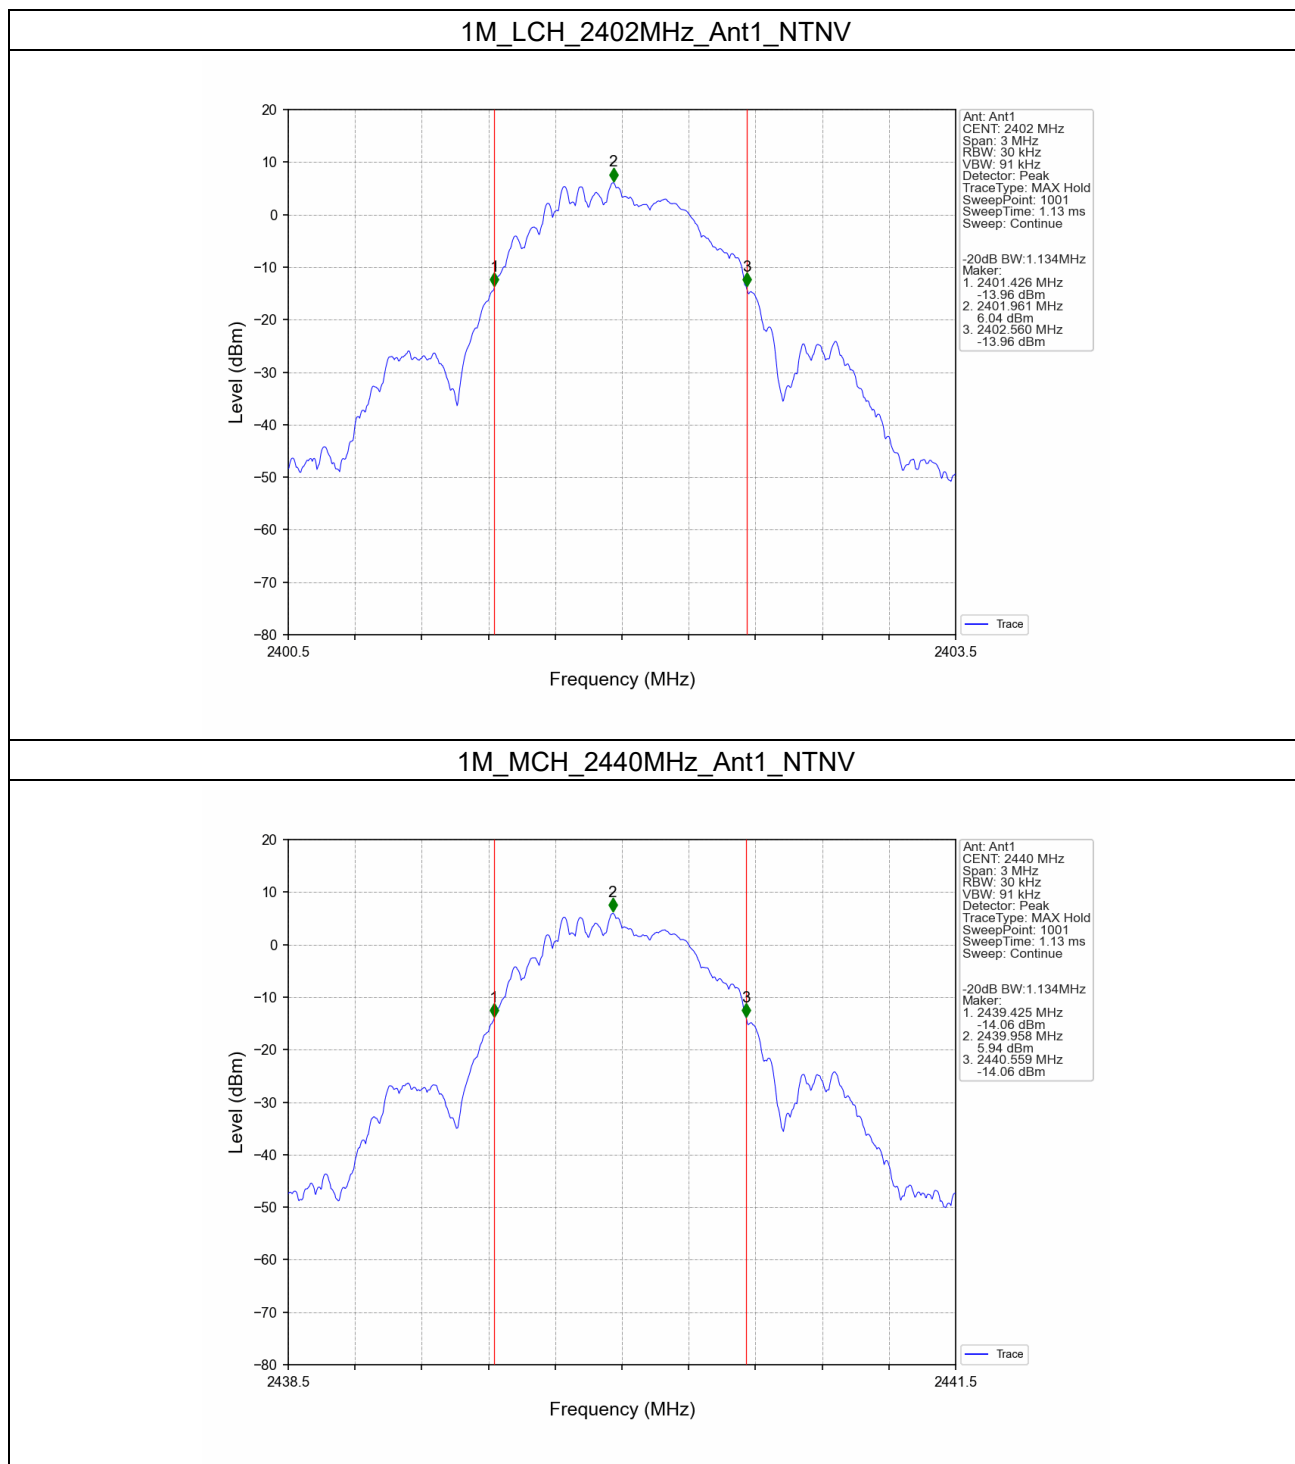


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


1M_HCH_2480MHz_Ant1_NTNV

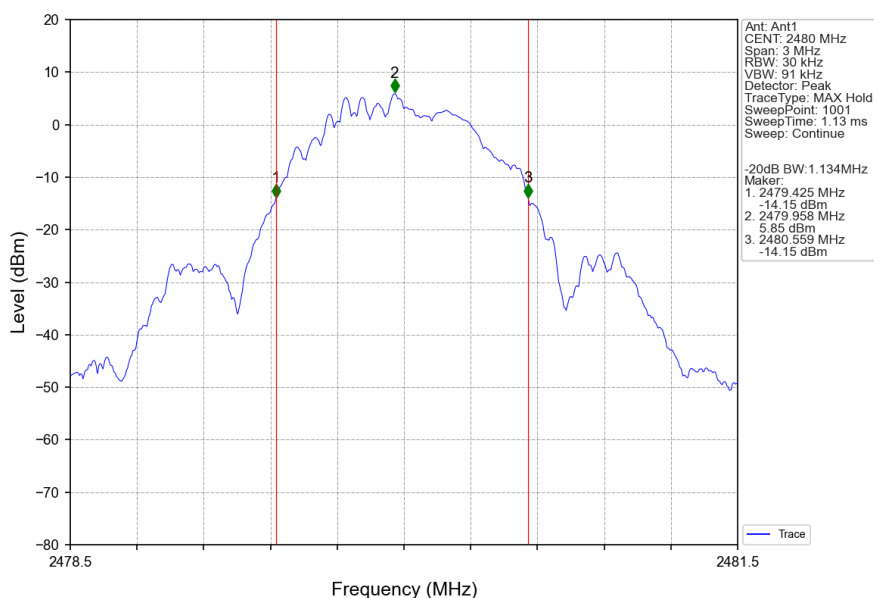


2M_LCH_2404MHz_Ant1_NTNV

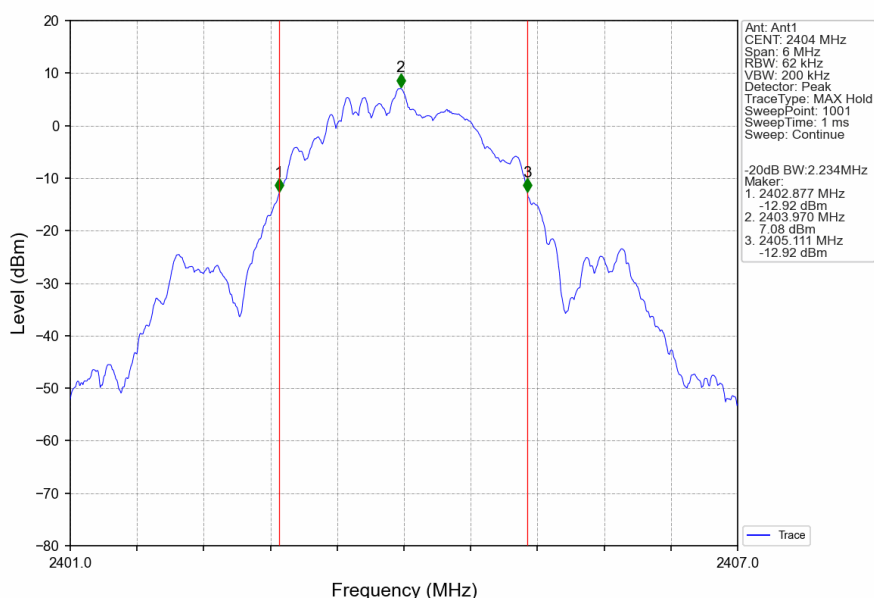

2M_MCH_2440MHz_Ant1_NTNV

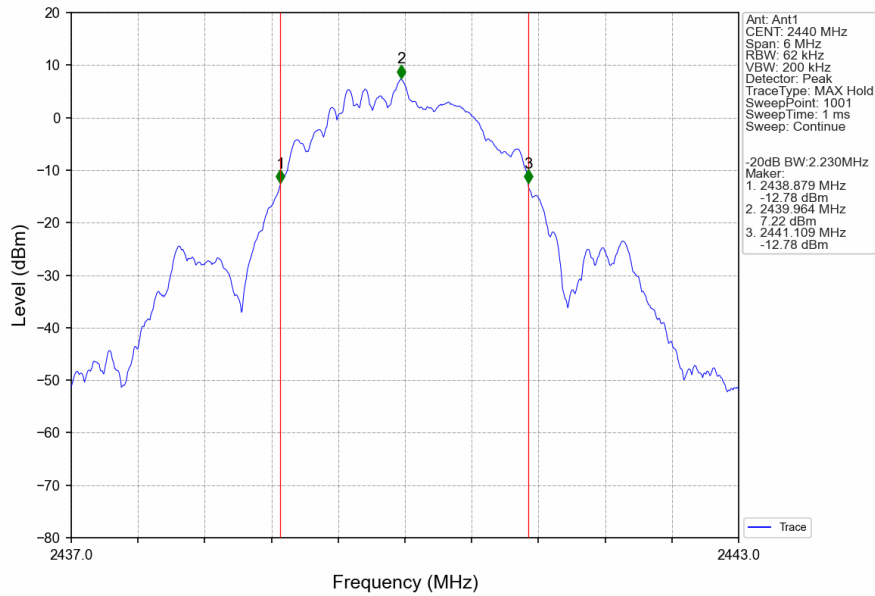

2M_HCH_2478MHz_Ant1_NTNV

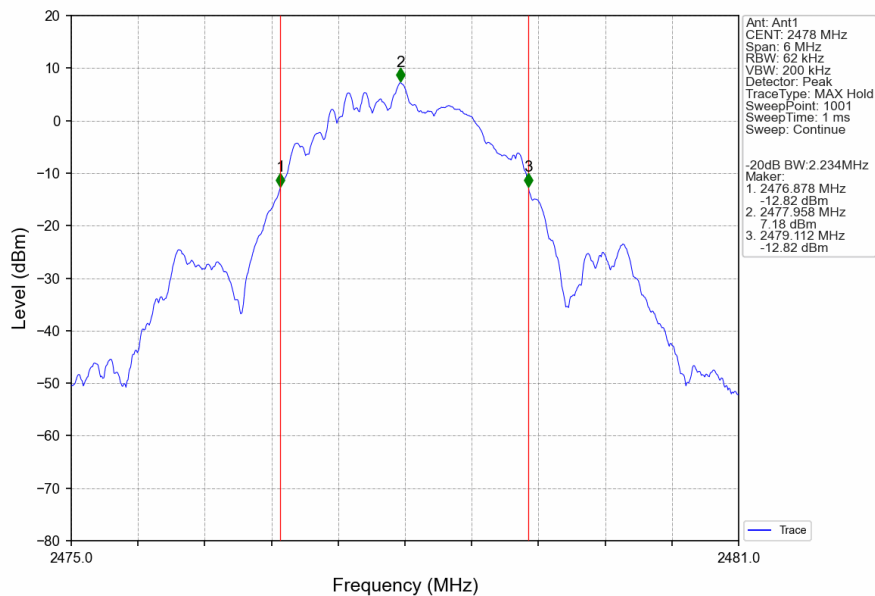

2. Maximum Conducted Output Power

2.1 Test Result

2.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	9.94	<=20.97	Pass
		2440	9.86	<=20.97	Pass
		2480	9.85	<=20.97	Pass
2M	SISO	2404	9.91	<=20.97	Pass
		2440	9.95	<=20.97	Pass
		2478	9.92	<=20.97	Pass

Note1: Antenna Gain: Ant1: -2.40dBi;

3. Carrier Frequency Separation


3.1 Test Result

3.1.1 Ant1

Ant1						
Mode	TX Type	Frequency (MHz)	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
1M	SISO	HOPP	1.996	1.134	>=1.134	Pass
2M	SISO	HOPP	1.984	2.234	>=1.489	Pass

3.2 Test Graph

3.2.1 Ant1

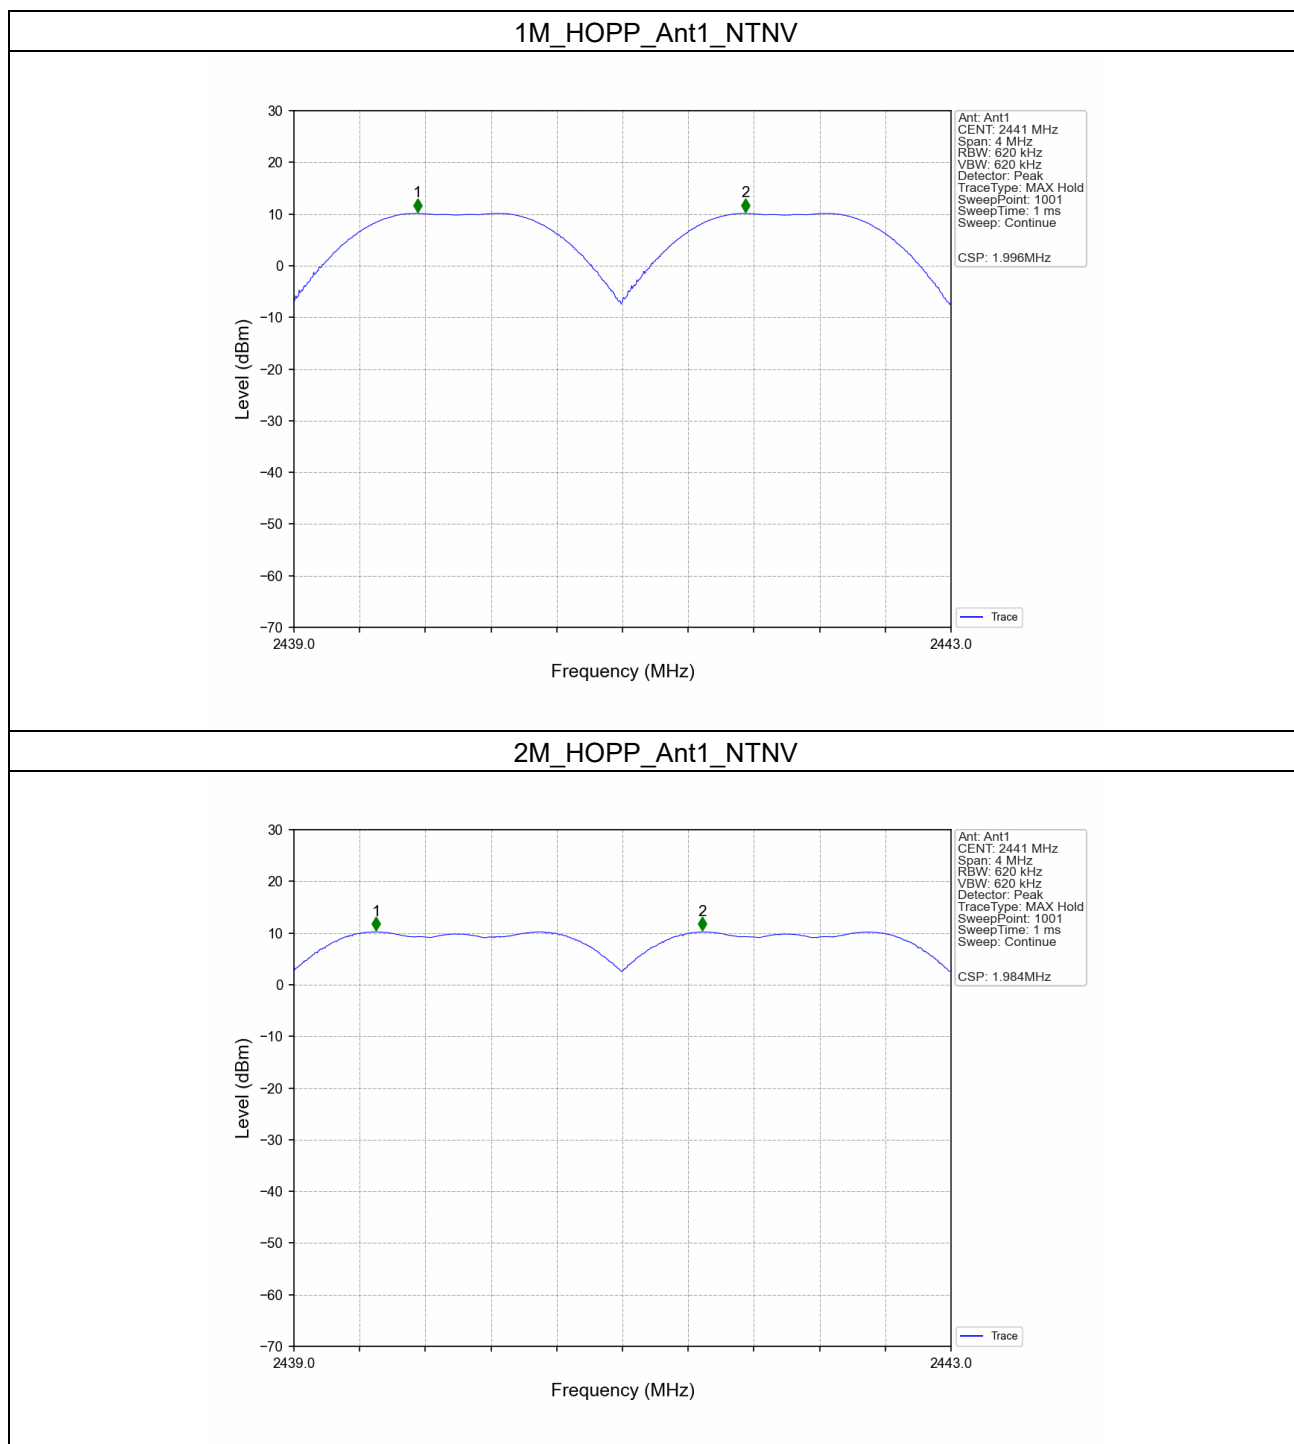

4. Number of Hopping Frequencies


4.1 Test Result

4.1.1 HoppNum

Mode	TX Type	Frequency (MHz)	Num of Hopping Frequencies		Verdict
			ANT1	Limit	
1M	SISO	HOPP	39	>=15	Pass
2M	SISO	HOPP	37	>=15	Pass

4.2 Test Graph

4.2.1 HoppNum

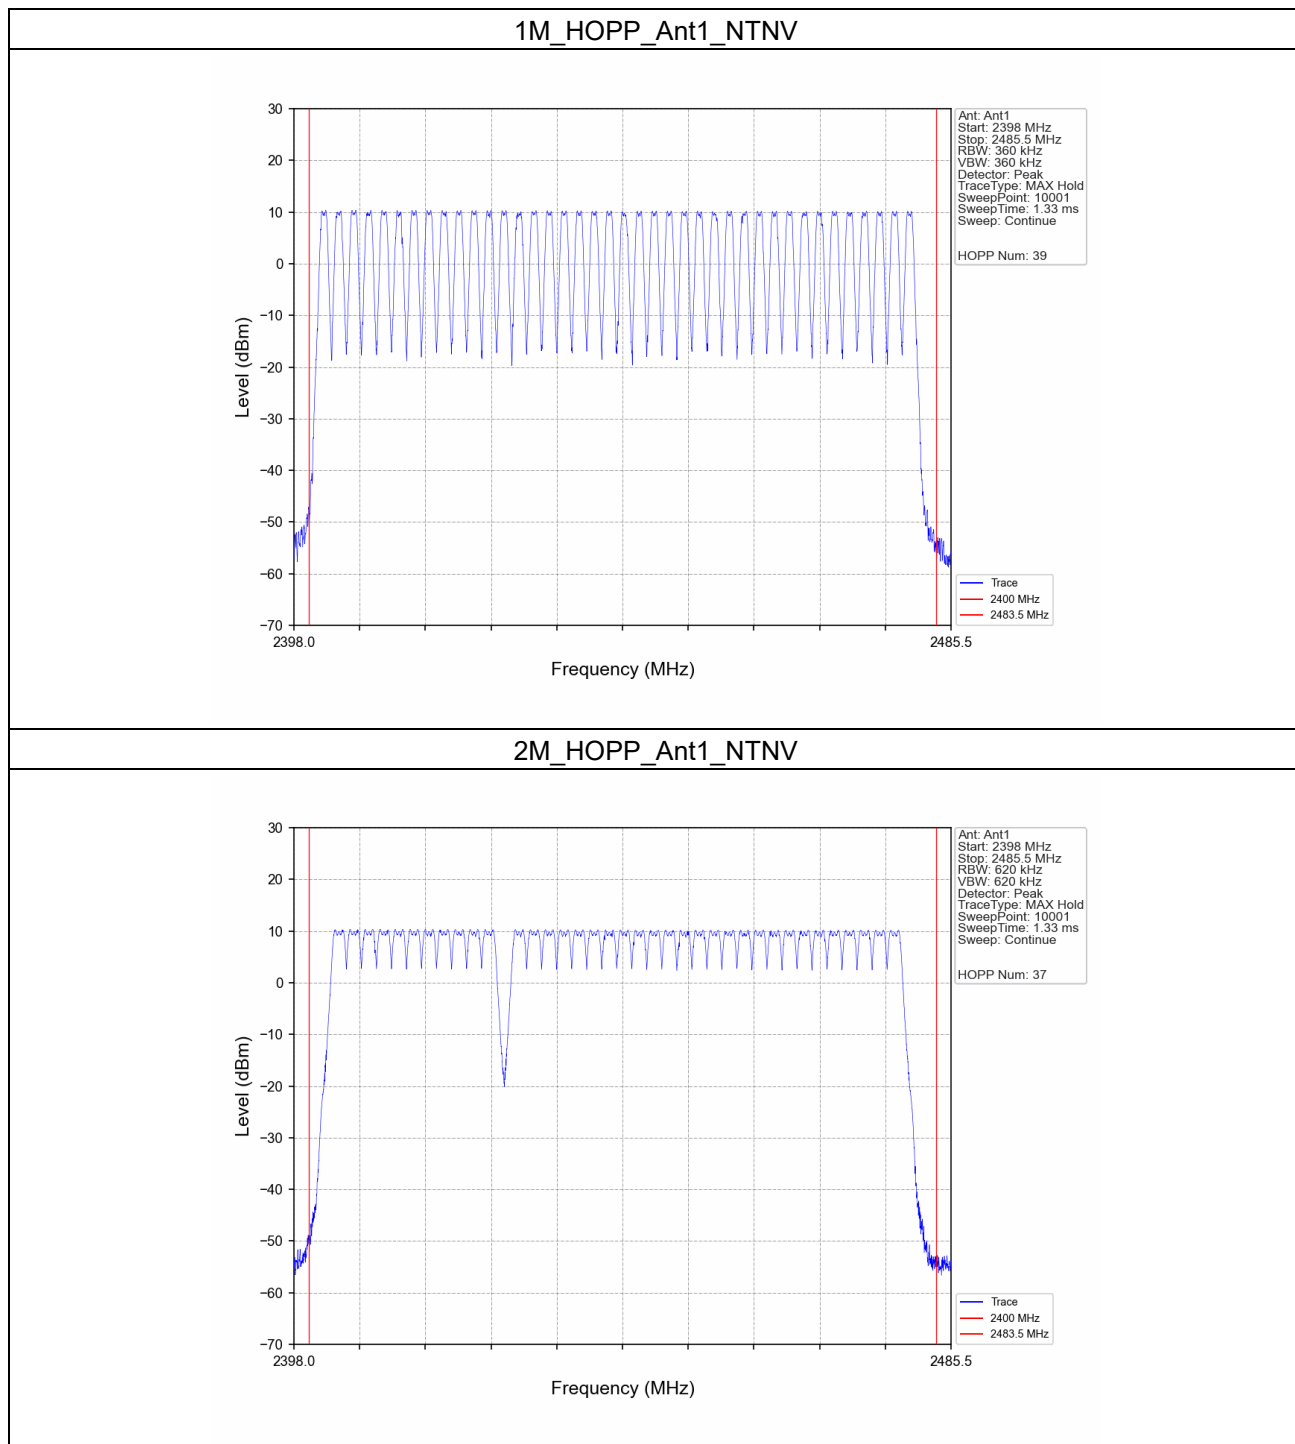

5. Time of Occupancy (Dwell Time)

5.1 Test Result

5.1.1 Ant1

Ant1								
Mode	TX Type	Frequency (MHz)	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
1M	SISO	HOPP	0.380	15.600	624	237.120	<=400	Pass
2M	SISO	HOPP	0.196	14.800	640	125.440	<=400	Pass




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

5.2 Test Graph

5.2.1 Ant1

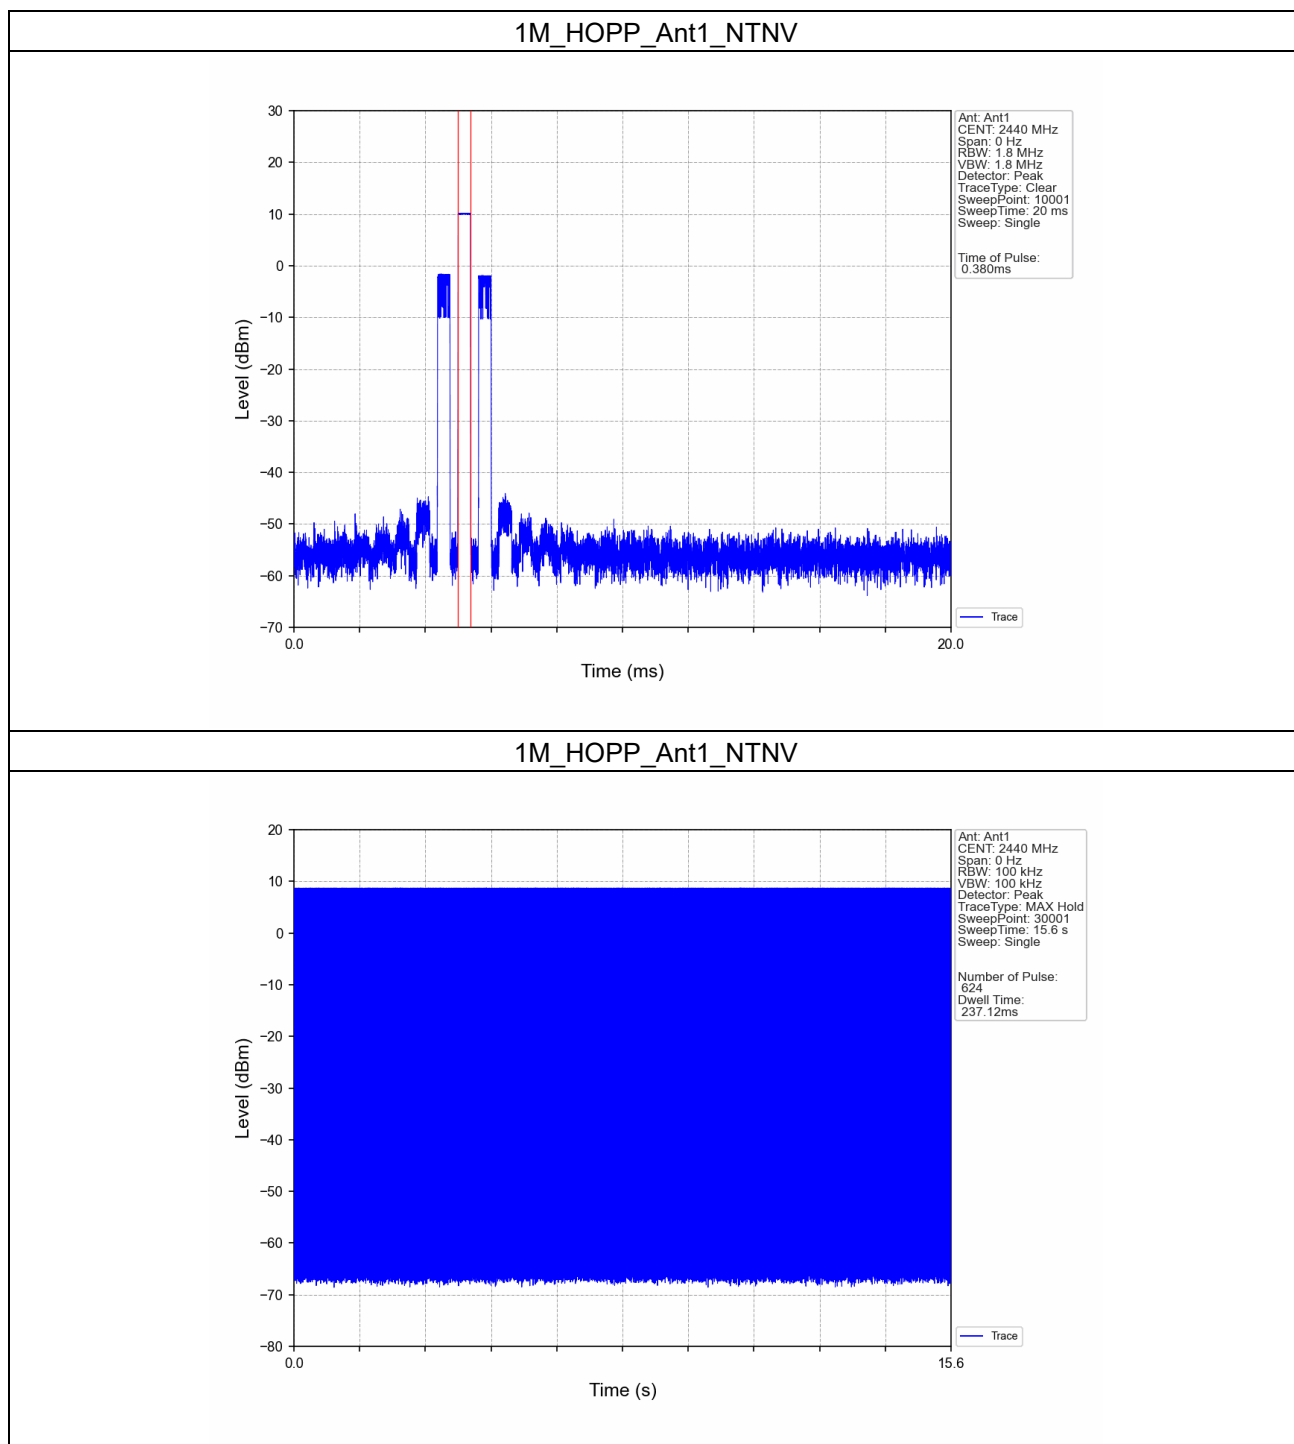


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2M_HOPP_Ant1_NTNV

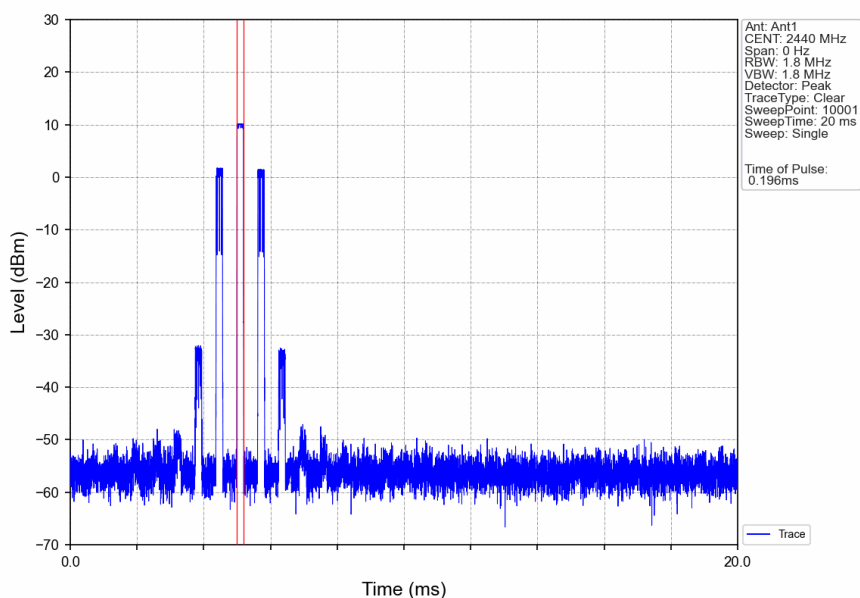

2M_HOPP_Ant1_NTNV

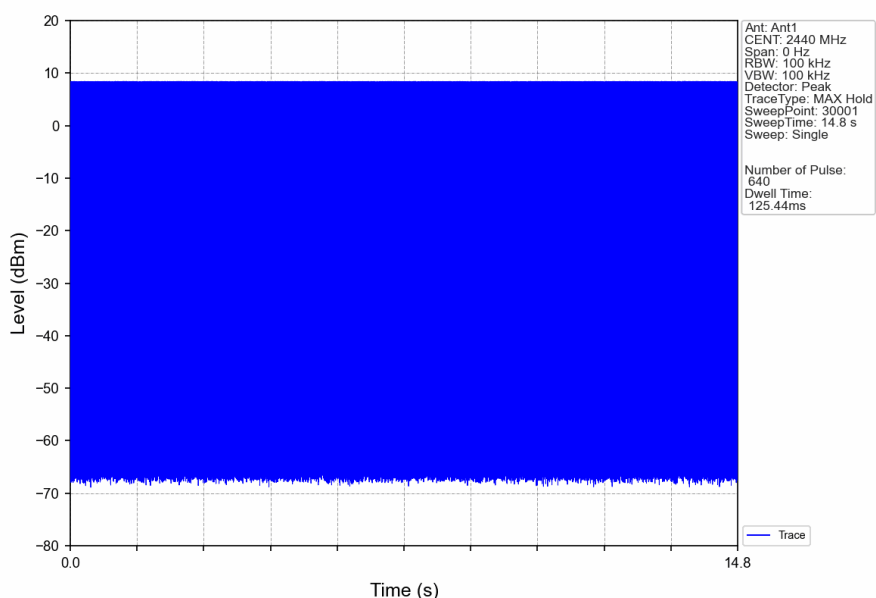

6. Unwanted Emissions In Non-restricted Frequency Bands

6.1 Test Result

6.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	9.49
		2440	1	9.38
		2480	1	9.29
2M	SISO	2404	1	9.11
		2440	1	9.08
		2478	1	9.03

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


7.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	9.49	-10.51	Pass
		2440	1	9.49	-10.51	Pass
		2480	1	9.49	-10.51	Pass
		HOPP	1	9.49	-10.51	Pass
				9.49	-10.51	Pass
2M	SISO	2404	1	9.11	-10.89	Pass
		2440	1	9.11	-10.89	Pass
		2478	1	9.11	-10.89	Pass
		HOPP	1	9.11	-10.89	Pass
				9.11	-10.89	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

6.2 Test Graph


6.2.1 Ref

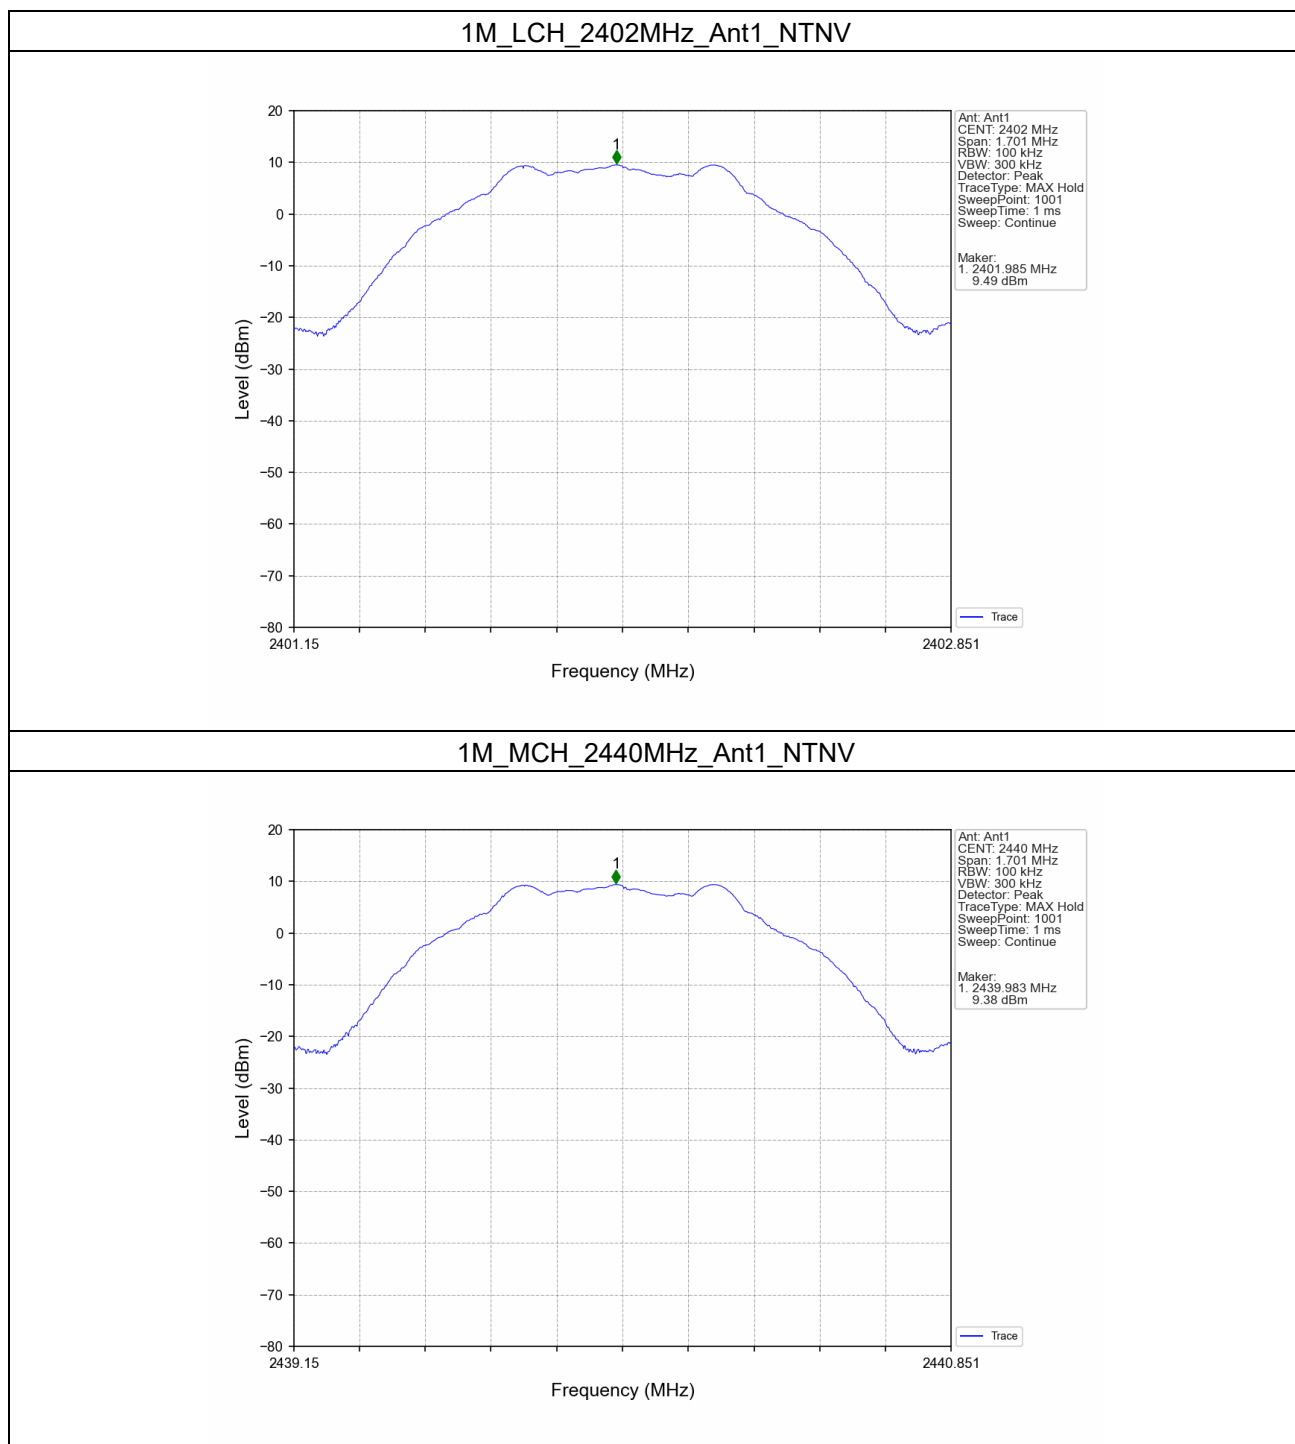


1M_HCH_2480MHz_Ant1_NTNV

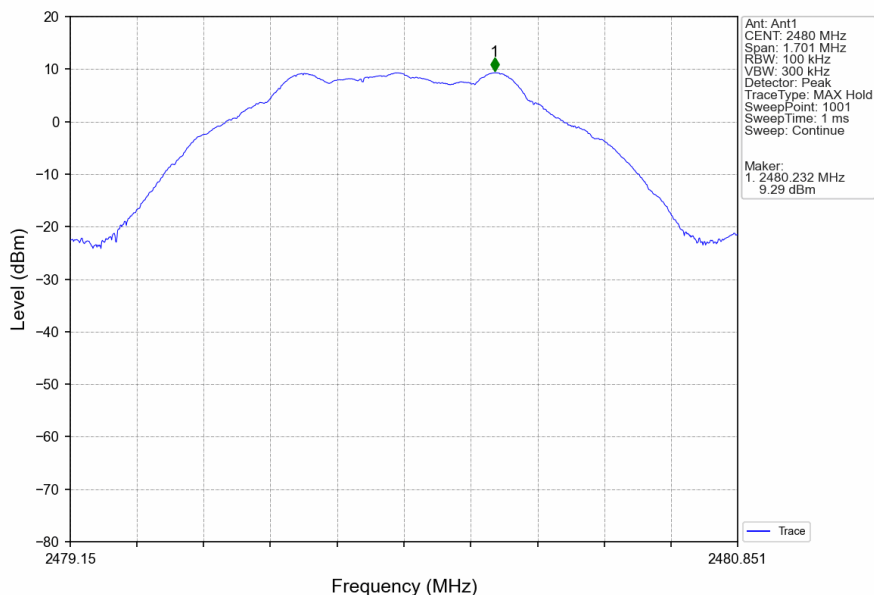


2M_LCH_2404MHz_Ant1_NTNV

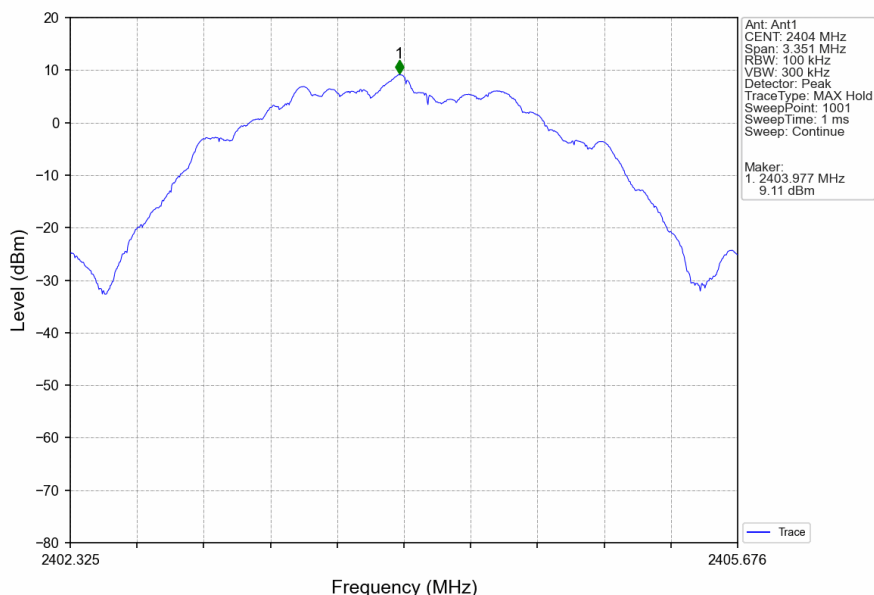


2M_MCH_2440MHz_Ant1_NTNV

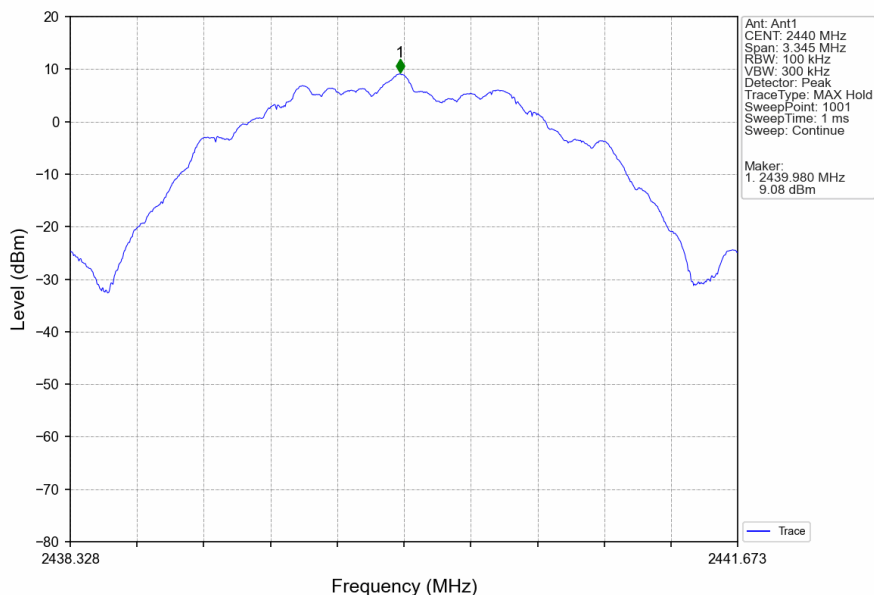


2M_HCH_2478MHz_Ant1_NTNV

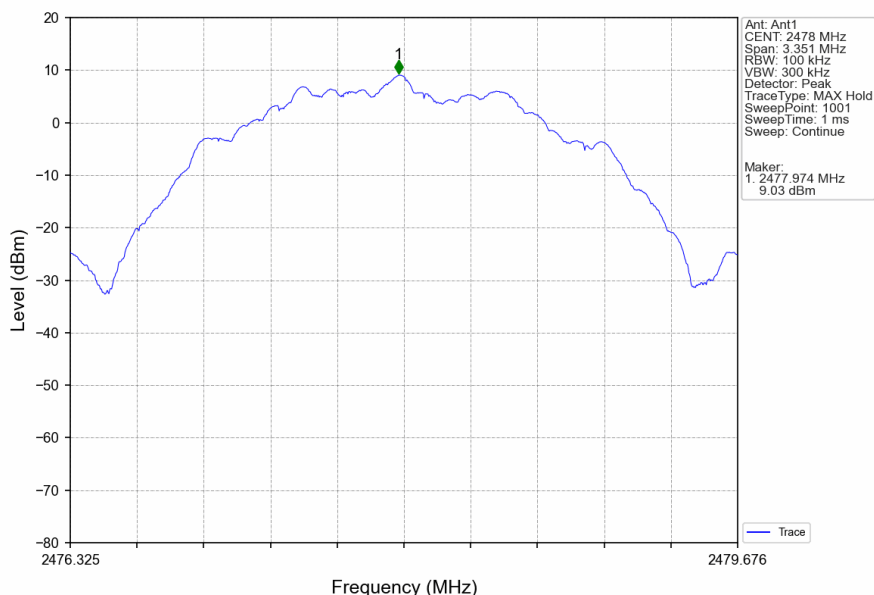


6.2.2 CSE

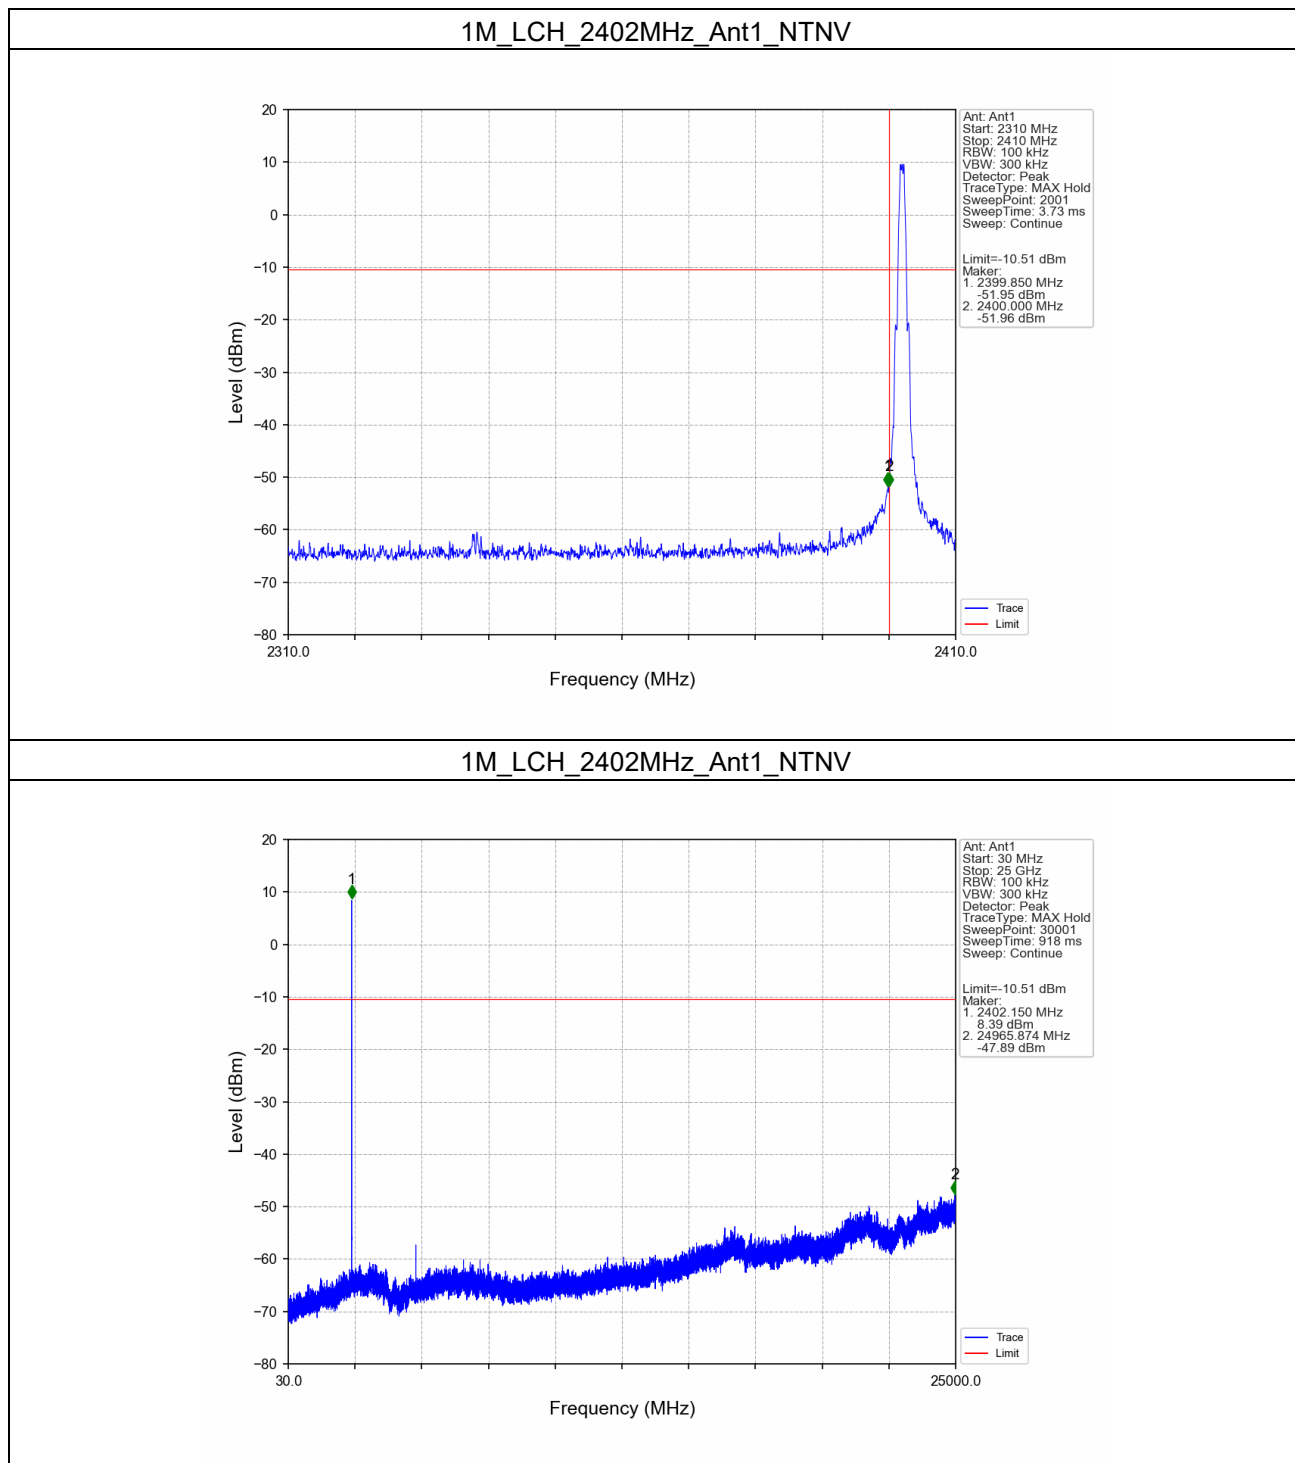


1M_MCH_2440MHz_Ant1_NTNV

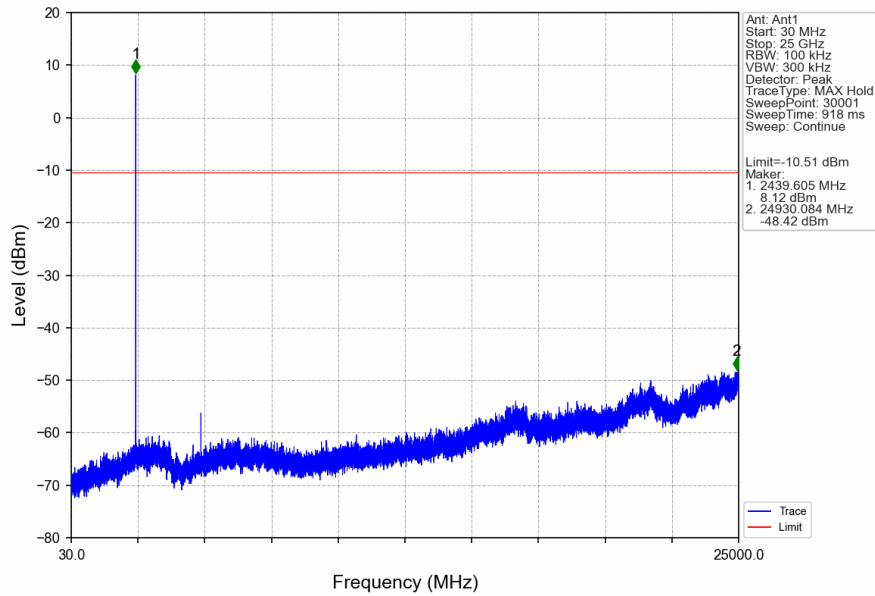


1M_HCH_2480MHz_Ant1_NTNV

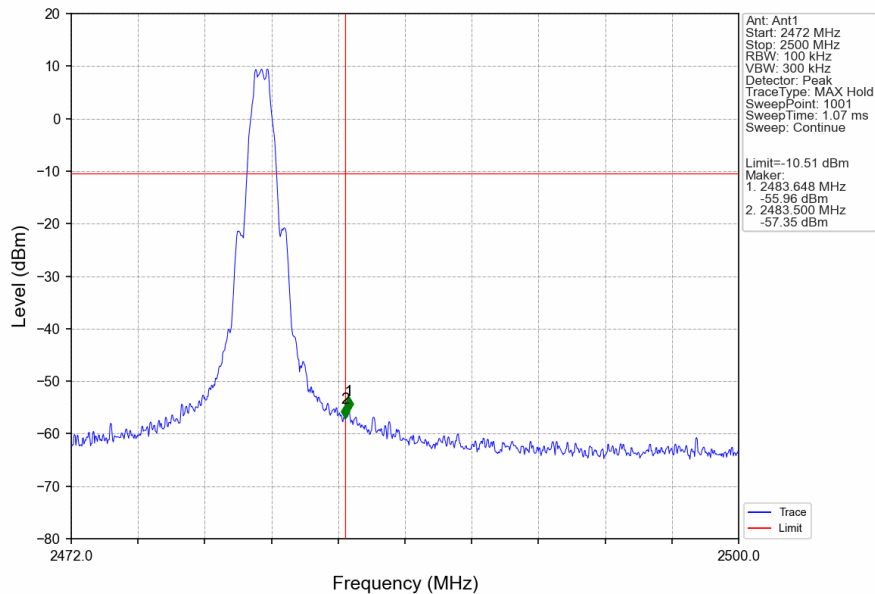


1M_HCH_2480MHz_Ant1_NTNV

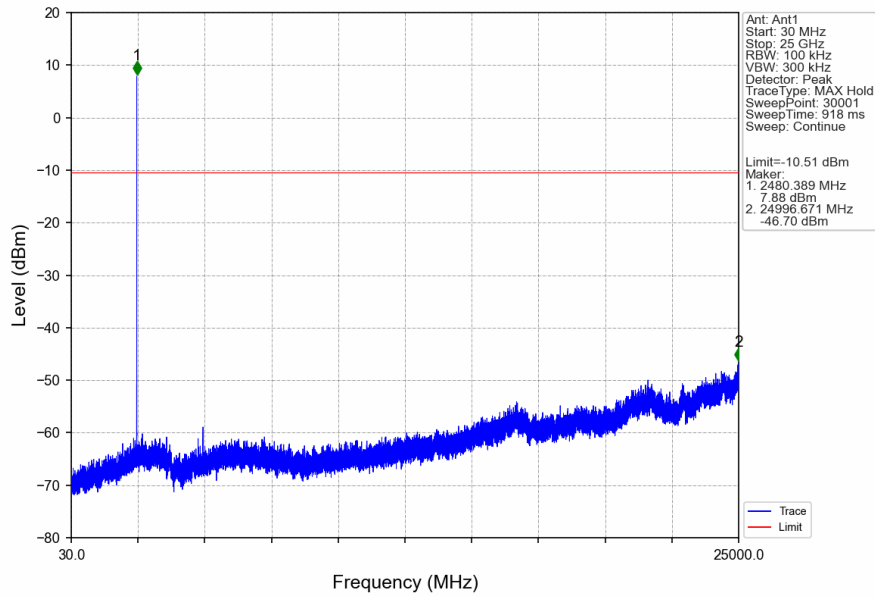


1M_HOPP_Ant1_NTNV

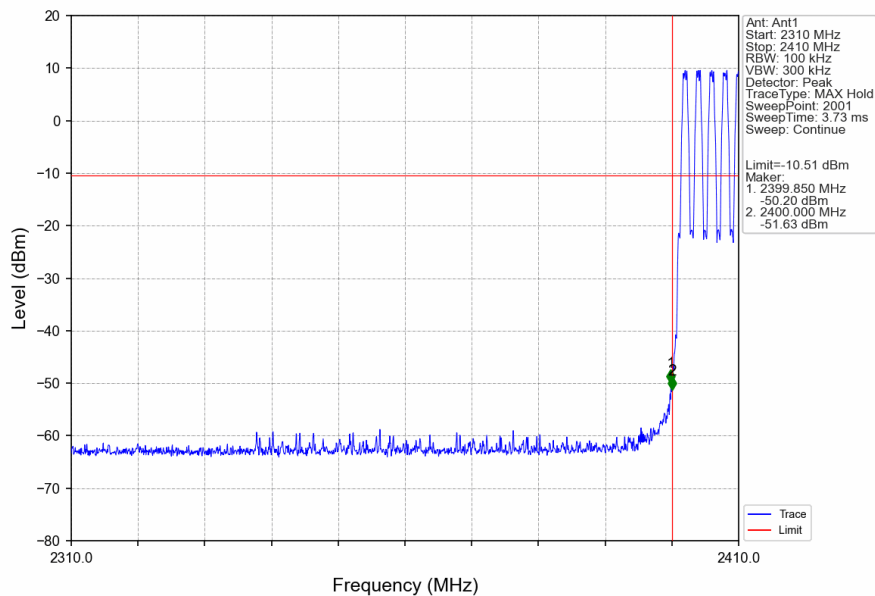


1M_HOPP_Ant1_NTNV

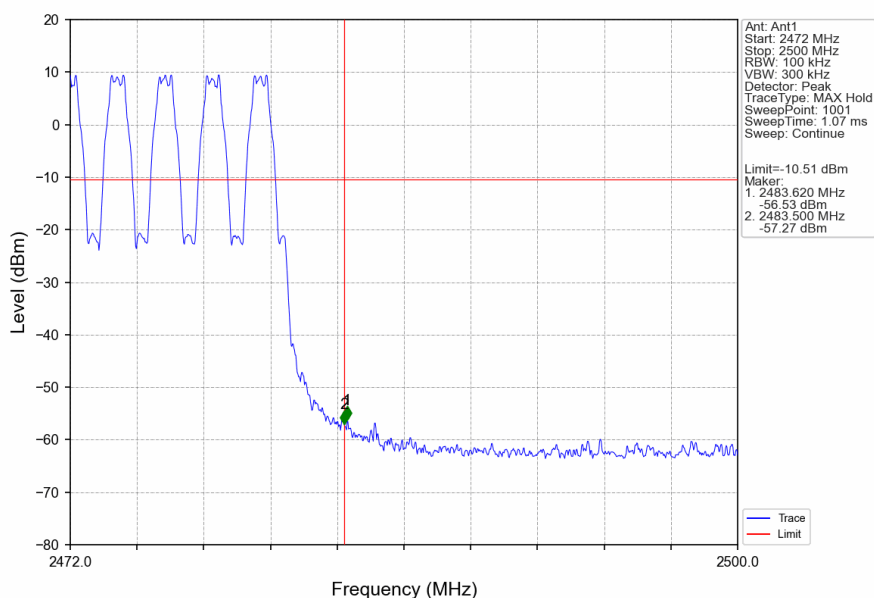


2M_LCH_2404MHz_Ant1_NTNV

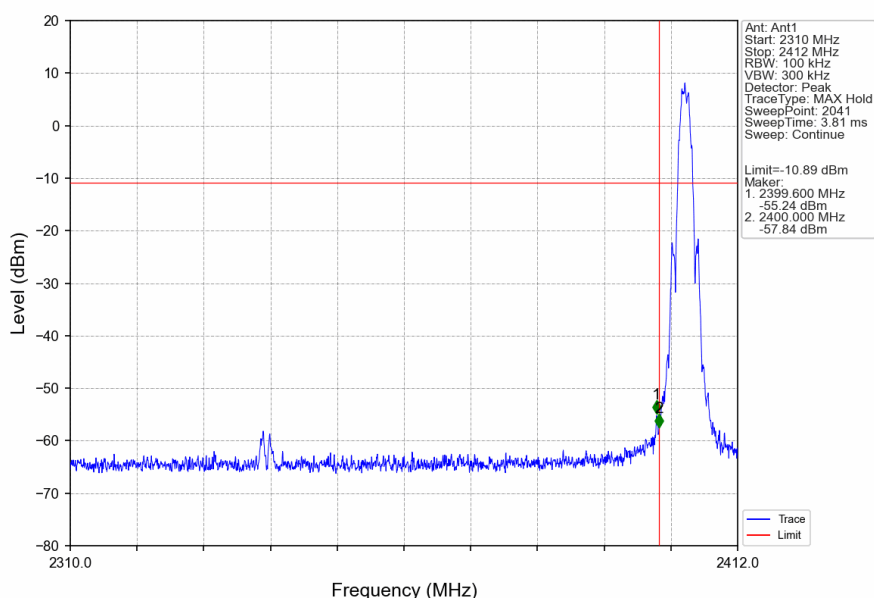


2M_LCH_2404MHz_Ant1_NTNV

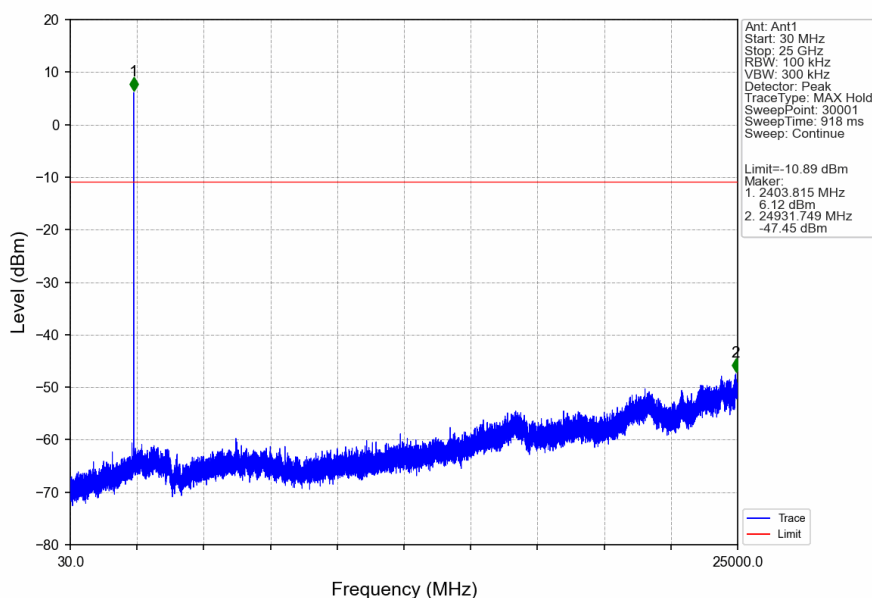


2M_MCH_2440MHz_Ant1_NTNV

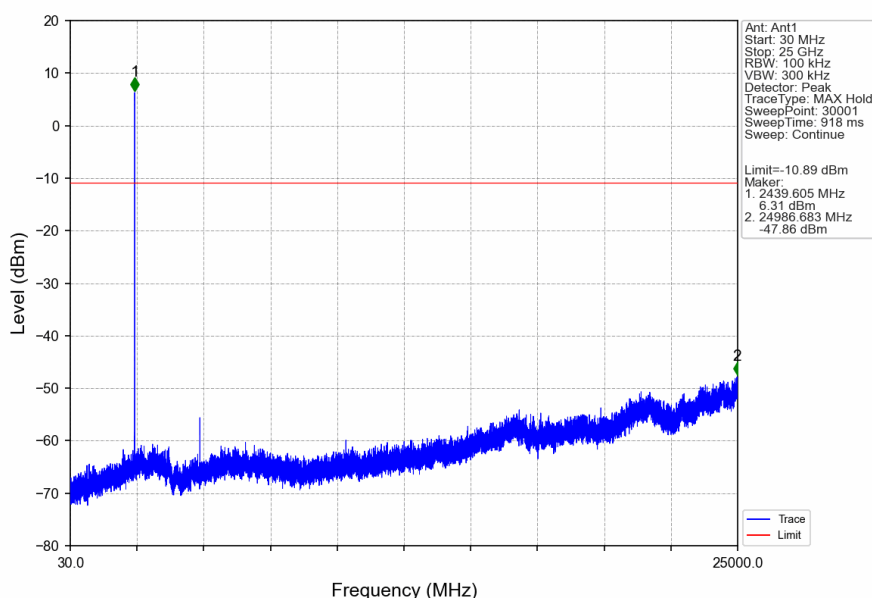


2M_HCH_2478MHz_Ant1_NTNV

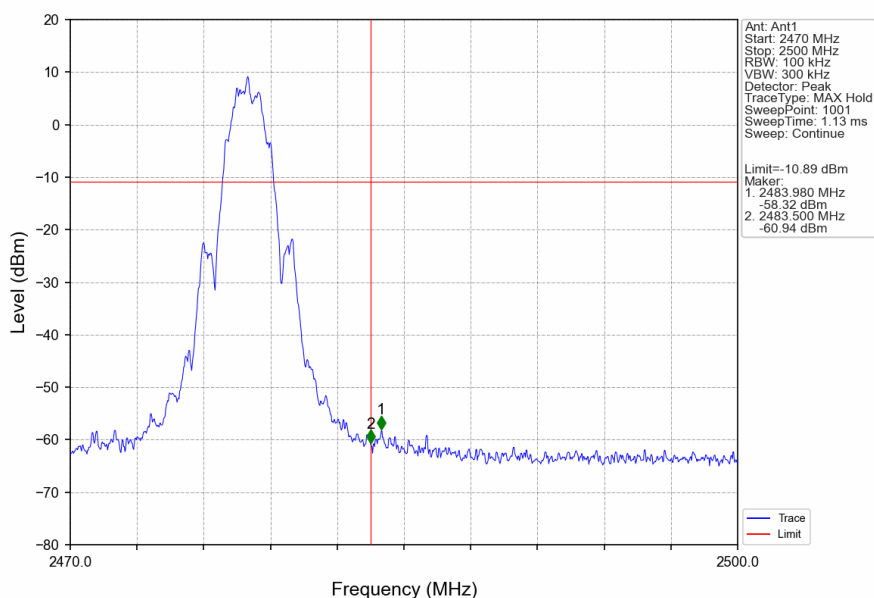


2M_HCH_2478MHz_Ant1_NTNV

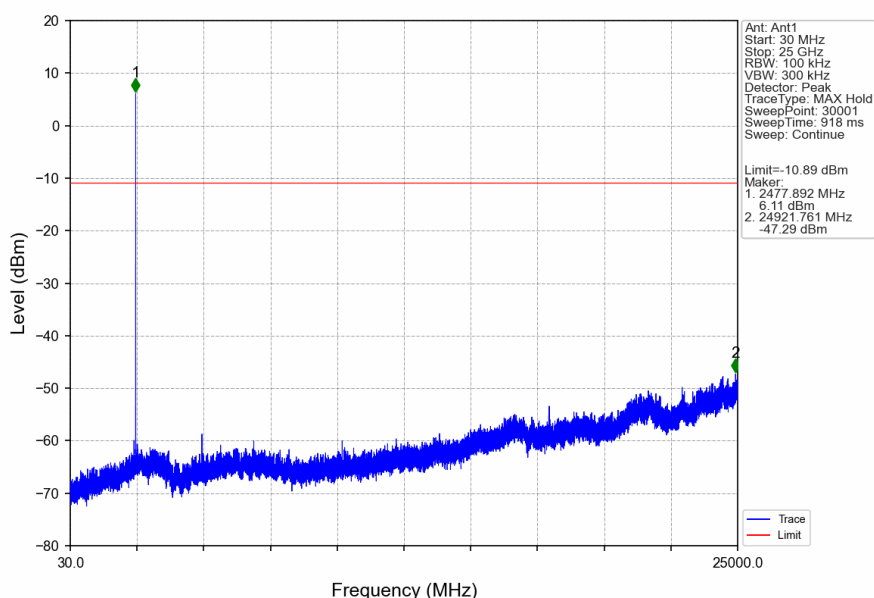

2M_HOPP_Ant1_NTNV

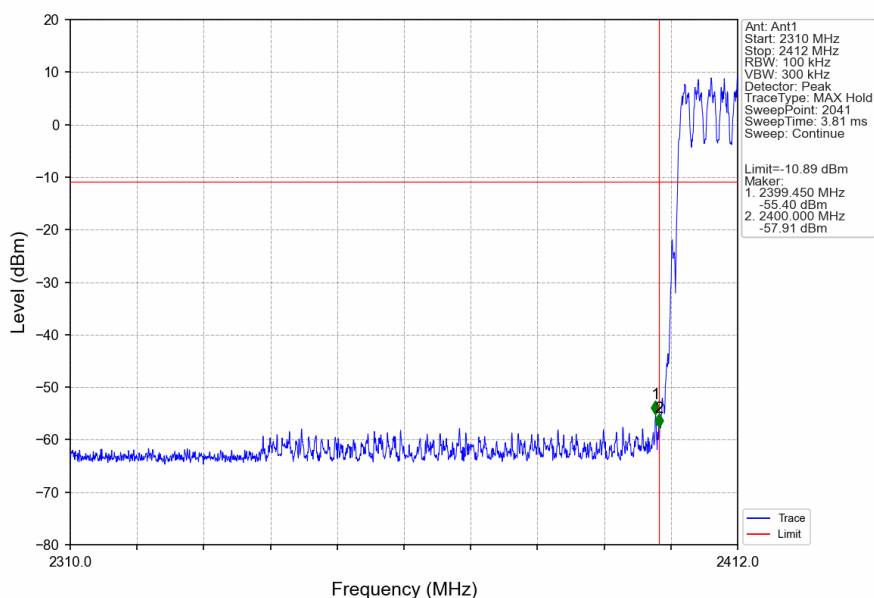

2M_HOPP_Ant1_NTNV

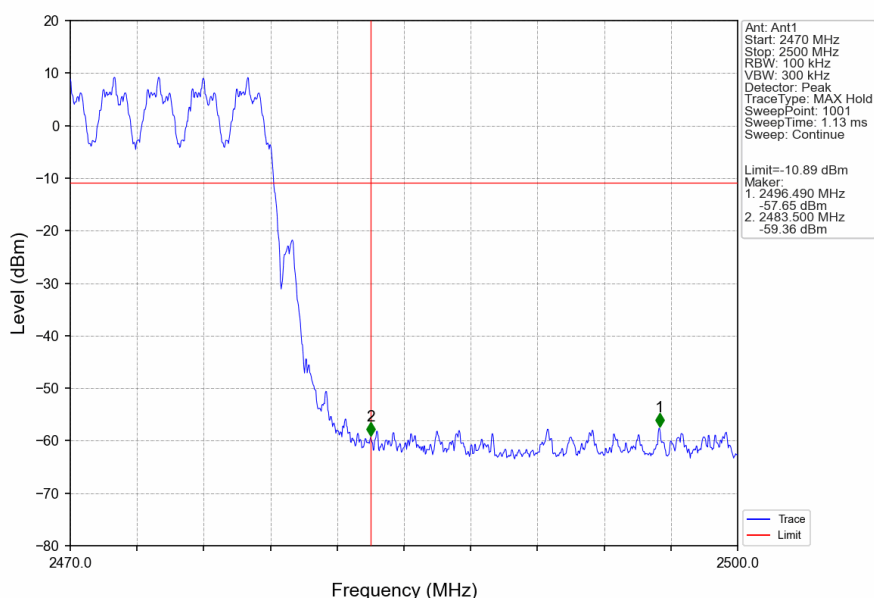

- End of the Report -

