



FCC Radio Test Report

FCC ID: RWO-RC21024501

This report concerns: Original Grant

Project No. : 2605C154
Equipment : Wireless Charging Dock
Brand Name : 
Model Name : RAZER, RC21-024501, RC21-024501XX-XXXX (X can be 0-9 or A-Z)
Applicant : Razer Inc.
Address : 9 Pasteur, Irvine, CA 92618, USA
Manufacturer : RAZER (ASIA-PACIFIC) PTE. LTD.
Address : Razer SEA HQ, 1 One-north Crescent, #02-01, Singapore 138538
Factory : RAZER TECHNOLOGY AND DEVELOPMENT (SHENZHEN) CO., LTD
Address : East Wing, 3rd Floor, Block 2, Phase 1 of Vision Shenzhen Business Park
 Keji South Road, Hi-Tech Industrial Park, Shenzhen 518057, China
Date of Receipt : Jun. 01, 2026
Date of Test : Jun. 03, 2026 ~ Jul. 21, 2026
Issued Date : Sep. 16, 2026
Test Sample : Sample No.: DG920260601552
Standard(s) : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by : 
 Jaden Kong
Approved by : 
 Treay Chen

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.
 Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	5
1 . APPLICABLE STANDARDS	6
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
2.3 TEST ENVIRONMENT CONDITIONS	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 SUPPORT UNITS	11
3.5 CUSTOMER INFORMATION DESCRIPTION	11
4 . AC POWER LINE CONDUCTED EMISSIONS TEST	12
4.1 LIMIT	12
4.2 TEST PROCEDURE	12
4.3 DEVIATION FROM TEST STANDARD	12
4.4 TEST SETUP	12
4.5 EUT OPERATING CONDITIONS	13
4.6 TEST RESULTS	13
5 . RADIATED EMISSION TEST	14
5.1 LIMIT	14
5.2 TEST PROCEDURE	14
5.3 DEVIATION FROM TEST STANDARD	14
5.4 TEST SETUP	15
5.5 EUT OPERATING CONDITIONS	16
5.6 TEST RESULT - 9 KHZ TO 30 MHZ	16
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	16
6 . BANDWIDTH	17
6.1 LIMIT	17
6.2 TEST PROCEDURE	17
6.3 DEVIATION FROM STANDARD	17
6.4 TEST SETUP	17
6.5 EUT OPERATION CONDITIONS	17

Table of Contents**Page**

6.6 TEST RESULTS	17
7 . MEASUREMENT INSTRUMENTS LIST	18
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	19
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	22
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	27
APPENDIX D - BANDWIDTH	30

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-3-2605C154	R00	Original Report.	Jul. 29, 2026	Invalid
BTL-FCCP-3-2605C154	R01	This report changed the antenna information in chapter 3.1 note 6. It is a revision of the report BTL-FCCP-3-2605C154 R00. This is a newly released report, replacing the BTL-FCCP-3-2605C154 R00 report.	Sep. 16, 2026	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standard:

ANSI C63.10-2020

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C	PASS	-----
15.215(c)	Bandwidth	APPENDIX D	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

NOTE:

- (1) "N/A" denotes test is not applicable to this device.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor ($k=2$))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions Measurement:

Test Site	Method	Measurement Frequency Range	U_1 (dB)
DGDLC02	CISPR	150kHz ~ 30MHz	2.66

B. Radiated emissions Measurement:

Test Site	Method	Measurement Frequency Range	U_1 (dB)
DGDLCB03	CISPR	9kHz ~ 30MHz	2.26

Test Site	Method	Measurement Frequency Range	Ant. H / V	U_1 (dB)
DGDLCB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

C. Other Measurement:

Test Item	Uncertainty
Bandwidth	0.75 %
Temperature	0.7 °C
Humidity	1.7 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	24°C	54%	AC 120V/60Hz	Hayden Chen
Radiated Emissions -9 kHz to 30 MHz	23°C	55%	DC 5V	Hayden Chen
Radiated Emissions -30 MHz to 1000 MHz	24°C	49%	DC 5V	AllenTong
Bandwidth	25°C	51%	DC 5V	Jay Wei

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless Charging Dock
Brand Name	RAZER, 
Test Model	RC21-024501
Model Name	RC21-024501, RC21-024501XX-XXXX (X can be 0-9 or A-Z)
Model Difference(s)	Only differ in the model name.
Hardware Version	DVT
Software Version	1.00.02.00
Power Source	Supplied from Type-C port.
Power Rating	5V  1.5A
Operation Frequency	110.5 kHz ~ 205 kHz

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
2. The system's model name is RZ81-0245XXXX-XXXX (X: Can be 0-9, A-Z), and the system contains a Charging Dock (Model name: RC21-024501) and Wireless Charging Puck(Model name: RC21-024502).
3. Output power from primary coil is to 2.5 watts (MAX).
4. Wireless Charging: Input: 5V/1.5A, Output: 2.5W MAX.
5. Mobile exposure conditions only.

6. Table for Filed Antenna:

Ant.	Manufacturer	Model Name	Antenna Type	Operation Frequency
1	DONGGUAN KIMCHEN INDUSTRY INTL LIMITED	710000082500	Loop Coil Antenna	110.5 kHz ~ 205 kHz

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 1	TX Mode

Radiated emissions test	
Final Test Mode	Description
Mode 1	TX Mode


Bandwidth test	
Final Test Mode	Description
Mode 1	TX Mode

Note:


- 1) The EUT has the maximum average output power when the support unit is in low power and being charged by EUT.
- 2) For radiated emission test, every axis (X, Y, Z) are verified. The test results shown in the following sections represent the worst case emissions.

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

AC power line conducted emissions test

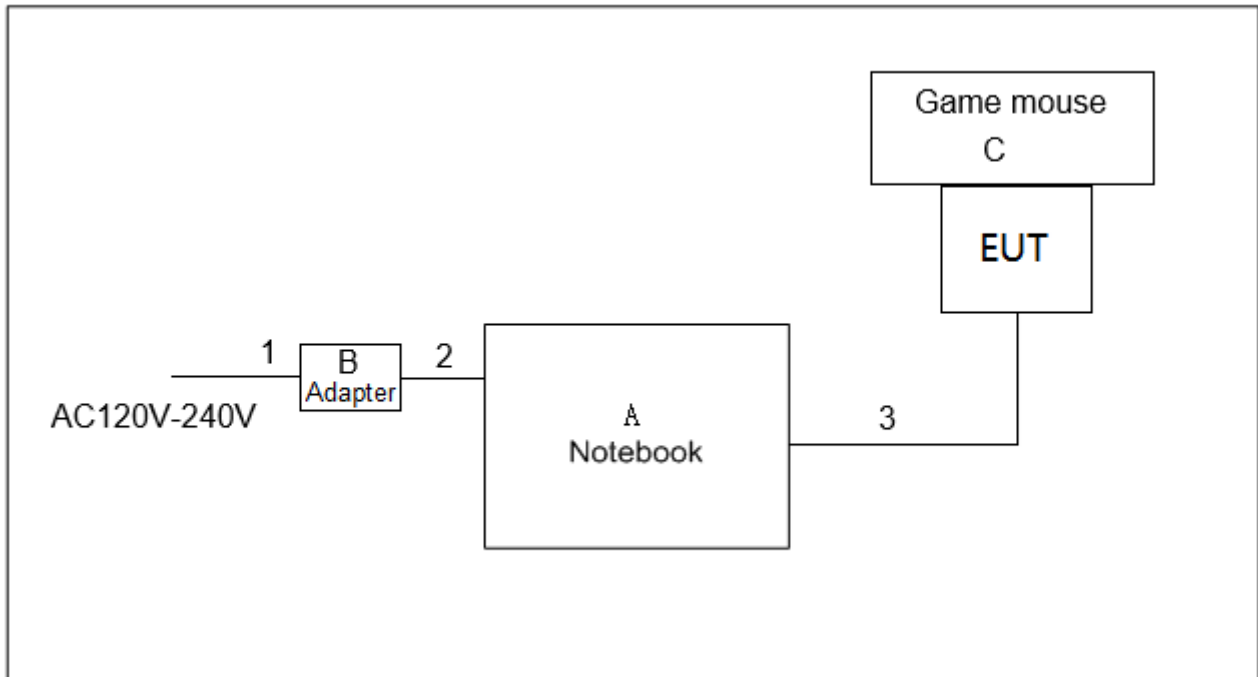

For Radiated emissions test

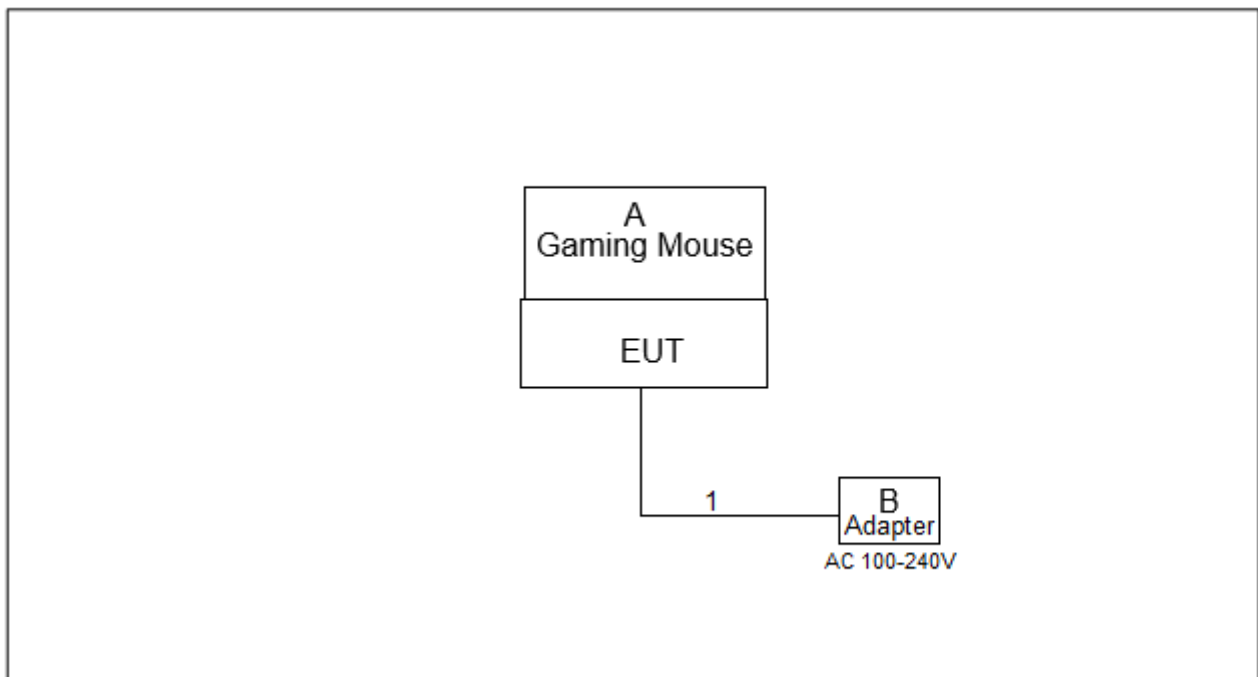

3.4 SUPPORT UNITS

AC power line conducted emissions test

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	DELL	Inspiron 14-3421	N/A
B	Adapter	N/A	N/A	N/A
C	Game mouse	N/A	N/A	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	AC Cable	NO	NO	1.2m
2	DC Cable	NO	NO	0.8m
3	USB Cable	NO	NO	0.8m

For Radiated emissions test

Item	Equipment	Brand	Model No.	Series No.
A	Gaming Mouse	N/A	N/A	N/A
B	Adapter	HUAWEI	P0018	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	USB Cable	NO	NO	1.2m

3.5 CUSTOMER INFORMATION DESCRIPTION

- 1) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS TEST

4.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

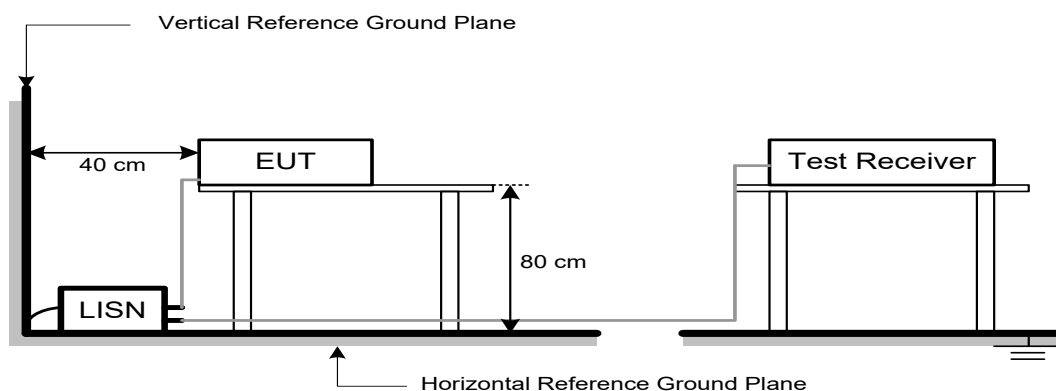

4.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

5. RADIATED EMISSION TEST

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT(9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- d. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP

9 kHz to 30 MHz

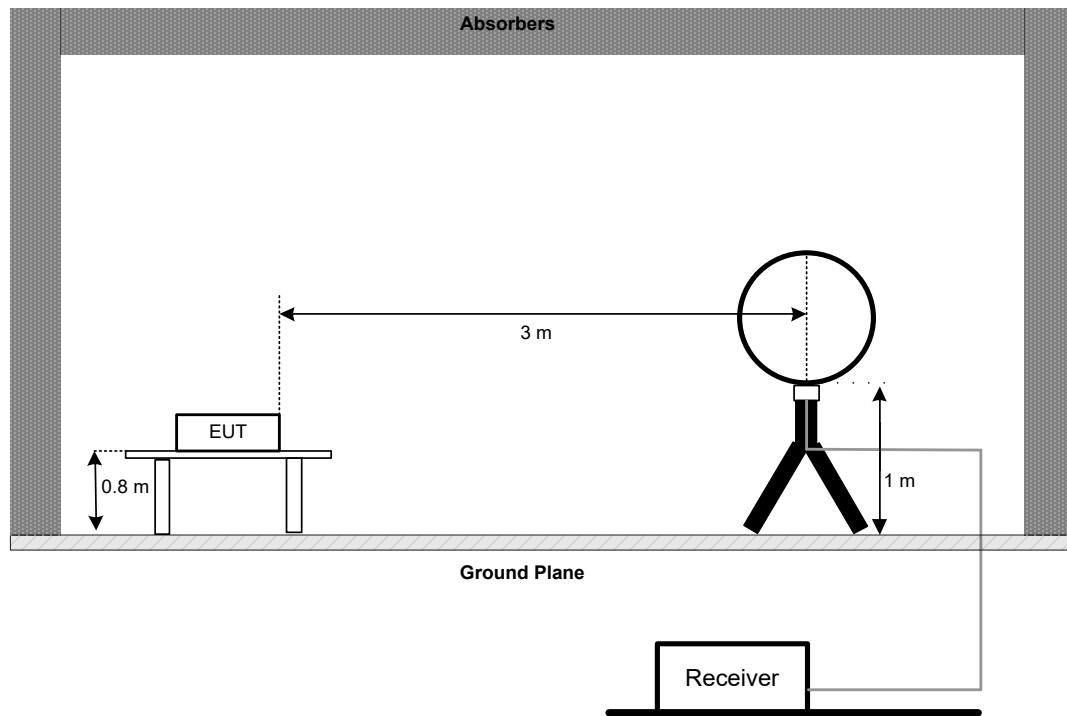

30 MHz to 1 GHz

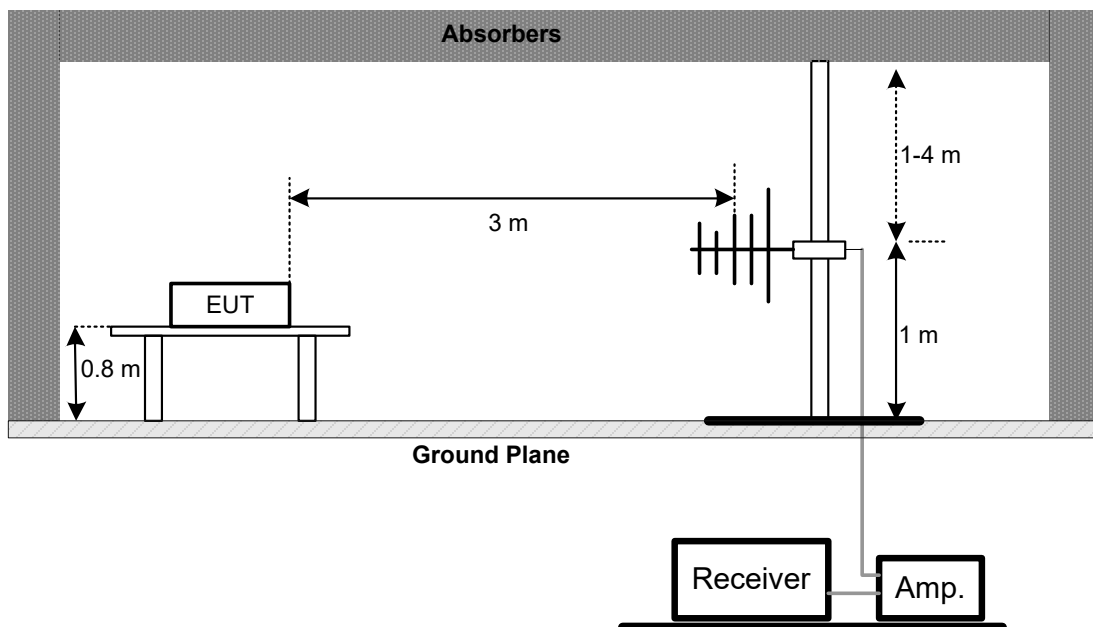

5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT - 9 kHz TO 30 MHz

Please refer to the APPENDIX B

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit
15.215(c)	20 dB Bandwidth	-

6.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Span Frequency	Between 2 times and 5 times the BW
RBW	Range of 1% to 5% of the BW
VBW	Approximately 3 times RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

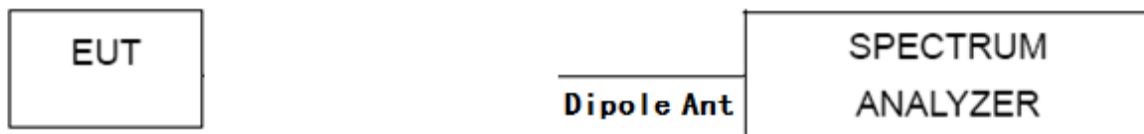

6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX D.

7. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions (Test Date: Jun. 03, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Nov. 21, 2026
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Nov. 21, 2026
3	BTL RE System	BTL	BTL RE System	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Jul. 08, 2026
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz (Test Date: Jun. 06, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 14, 2027
2	Receiver	Agilent	N9038A	MY52130039	Apr. 25, 2027
3	Cable	RegalWay	LMR400-NMNM-6m	N/A	Apr. 22, 2027
4	Cable	RegalWay	LMR400-NMRANM-3.5m	N/A	Apr. 22, 2027
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	CM	9*6*6	N/A	May 14, 2027

Radiated Emissions - 30 MHz to 1 GHz (Test Date: Jun. 10, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec. 07, 2026
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 07, 2026
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	Apr. 25, 2027
4	Cable	RegalWay	LMR400-NMNM-12.5m	N/A	May 17, 2027
5	Cable	RegalWay	LMR400-NMNM-3m	N/A	May 17, 2027
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	May 17, 2027
7	Receiver	Agilent	N9038A	MY52130039	Apr. 25, 2027
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 14, 2027


Bandwidth (Test Date: Jul. 16, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyze	R&S	FSP38	100852	Apr. 25, 2027

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX Mode	Phase	Line
-----------	---------	-------	------

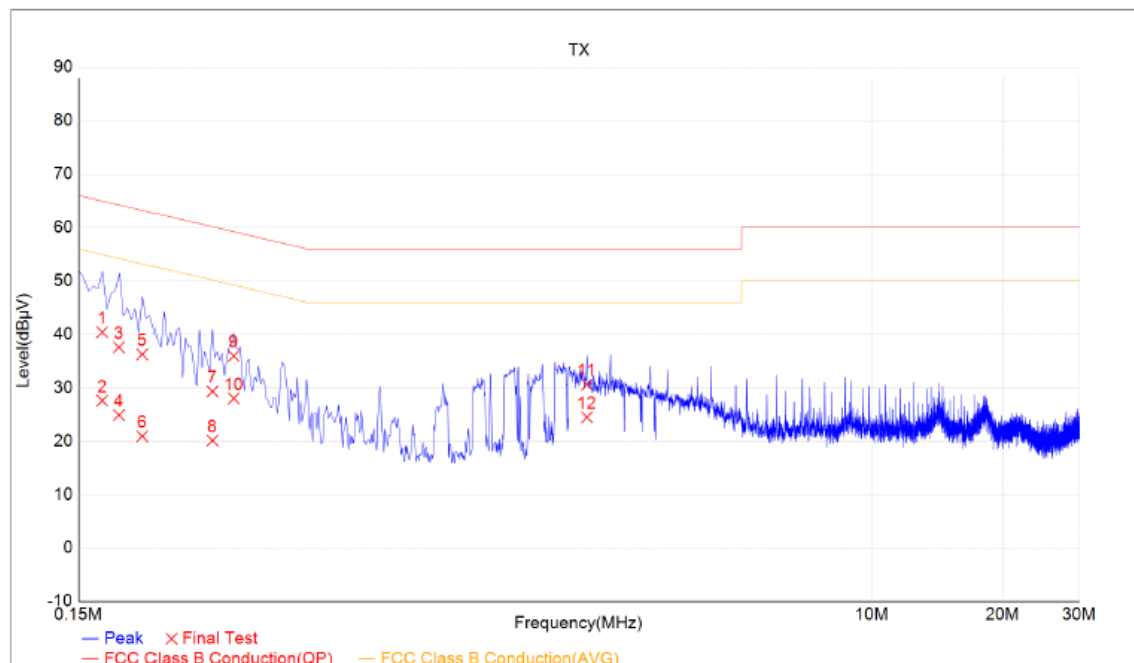


Suspected Note List									
	NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content
	1	0.1698	30.65	9.77	40.41	64.96	-24.55	QP	
	2	0.1698	17.84	9.77	27.6	54.96	-27.36	AVG	
	3	0.1855	27.8	9.78	37.58	64.21	-26.64	QP	
	4	0.1855	15.12	9.78	24.9	54.21	-29.32	AVG	
	5	0.2099	26.47	9.8	36.27	63.21	-26.94	QP	
	6	0.2099	11.15	9.8	20.94	53.21	-32.26	AVG	
	7	0.3024	19.49	9.84	29.33	60.19	-30.86	QP	
	8	0.3024	10.29	9.84	20.13	50.19	-30.06	AVG	
	9	0.3384	26.12	9.85	35.97	59.25	-23.29	QP	
*	10	0.3384	18.18	9.85	28.03	49.25	-21.22	AVG	
	11	2.2022	20.56	10.05	30.61	56	-25.39	QP	
	12	2.2022	14.45	10.05	24.5	46	-21.5	AVG	

REMARKS:

(1) Level = Reading + Factor.

(2) Margin = Level - Limit.

Test Mode	TX Mode	Phase	Neutral
-----------	---------	-------	---------

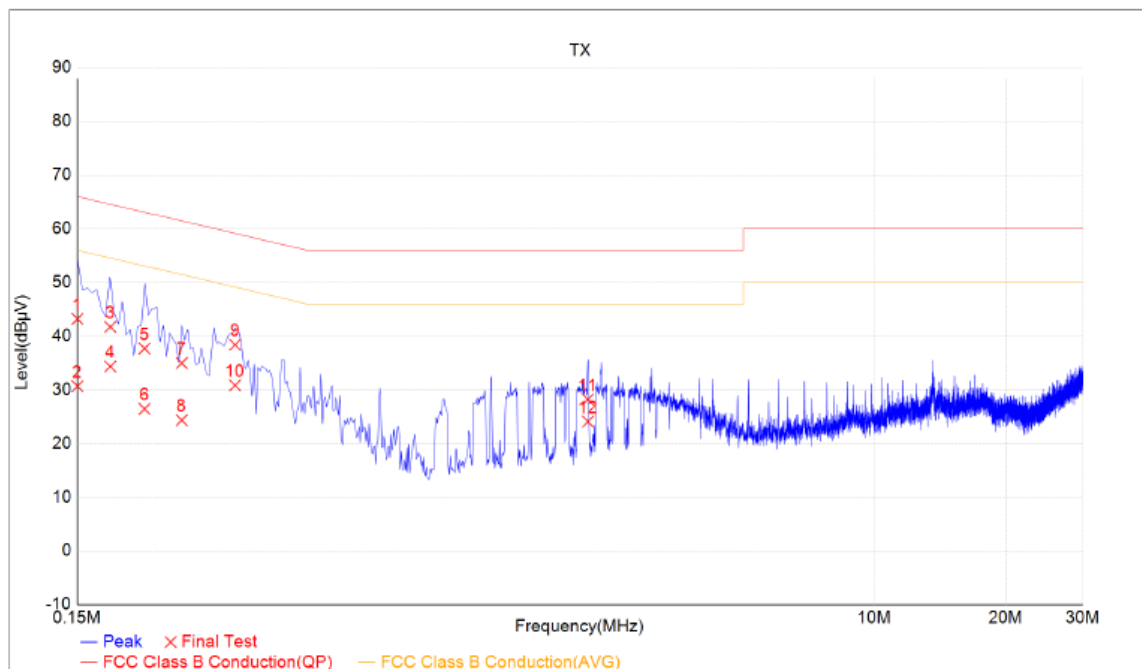


Suspected Note List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content	
1	0.15	33.47	9.76	43.22	66	-22.78	QP		
2	0.15	20.93	9.76	30.68	56	-25.32	AVG		
3	0.1784	31.96	9.77	41.73	64.58	-22.85	QP		
4	0.1784	24.59	9.77	34.36	54.58	-20.22	AVG		
5	0.2137	27.94	9.77	37.71	63.05	-25.34	QP		
6	0.2137	16.69	9.77	26.46	53.05	-26.59	AVG		
7	0.258	25.22	9.78	34.99	61.5	-26.5	QP		
8	0.258	14.59	9.78	24.37	51.5	-27.13	AVG		
9	0.3418	28.61	9.8	38.4	59.15	-20.75	QP		
*	10	0.3418	21.05	30.85	49.15	-18.31	AVG		
11	2.2018	18.32	9.89	28.21	56	-27.79	QP		
12	2.2018	14.21	9.89	24.1	46	-21.9	AVG		

REMARKS:

- (1) Level = Reading + Factor.
- (2) Margin = Level - Limit.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX Mode	Polarization	Ant 0°
-----------	---------	--------------	--------

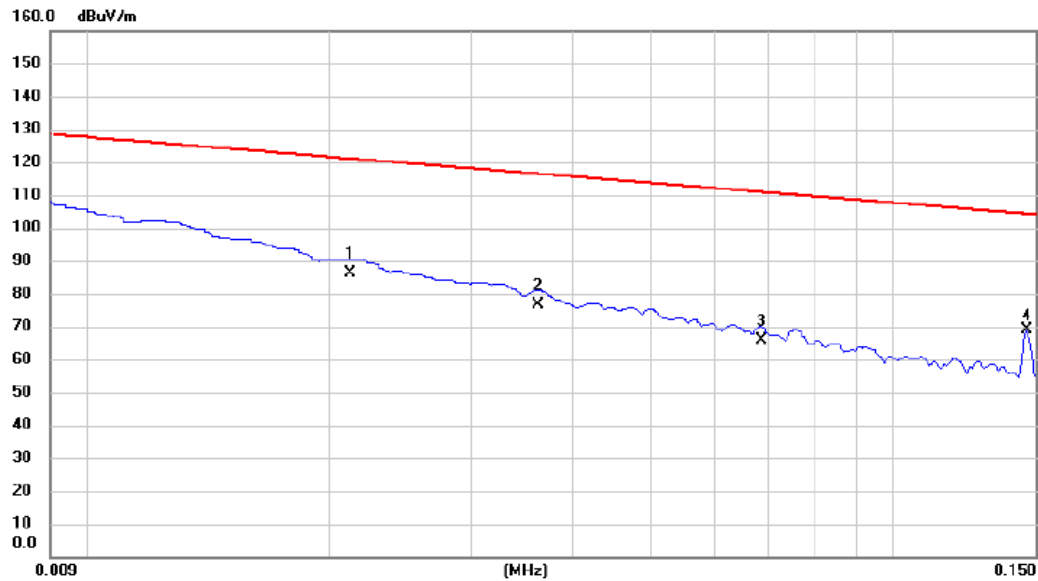


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.021	65.70	20.68	86.38	121.08	-34.70	AVG	
2	0.036	56.14	20.58	76.72	116.43	-39.71	AVG	
3	0.069	45.15	20.59	65.74	110.89	-45.15	AVG	
4	0.146	48.26	20.57	68.83	104.30	-35.47	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.


Test Mode	TX Mode	Polarization	Ant 0°
-----------	---------	--------------	--------

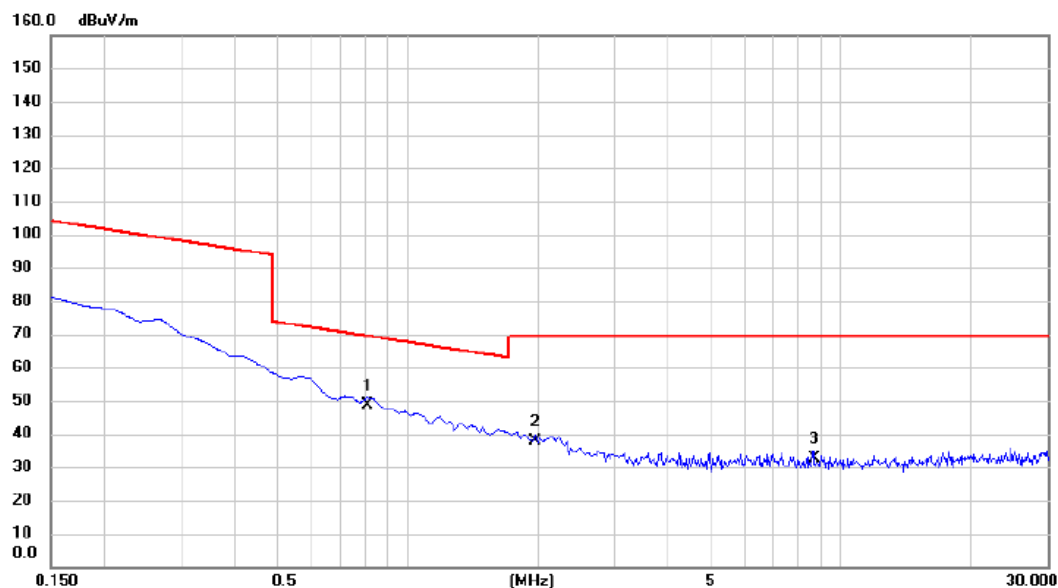

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.806	28.30	20.46	48.76	69.47	-20.71	QP	
2		1.971	17.30	20.32	37.62	69.54	-31.92	QP	
3		8.657	12.28	20.49	32.77	69.54	-36.77	QP	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode	Polarization	Ant 90°
-----------	---------	--------------	---------

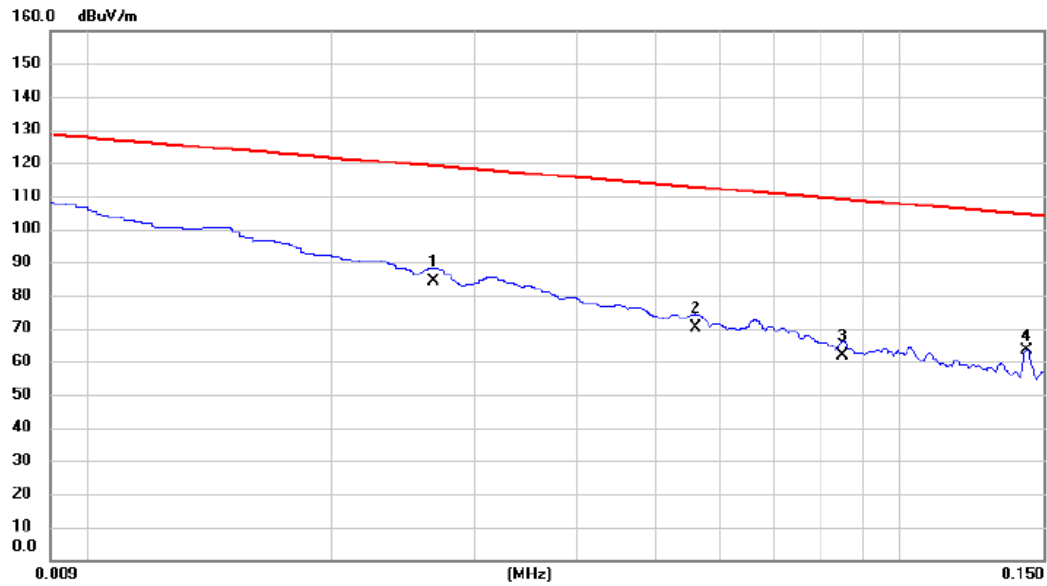


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.027	63.45	20.60	84.05	119.07	-35.02	AVG	
2		0.056	49.77	20.63	70.40	112.64	-42.24	AVG	
3		0.085	41.25	20.55	61.80	109.02	-47.22	AVG	
4		0.143	42.73	20.57	63.30	104.49	-41.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode	Polarization	Ant 90°
-----------	---------	--------------	---------

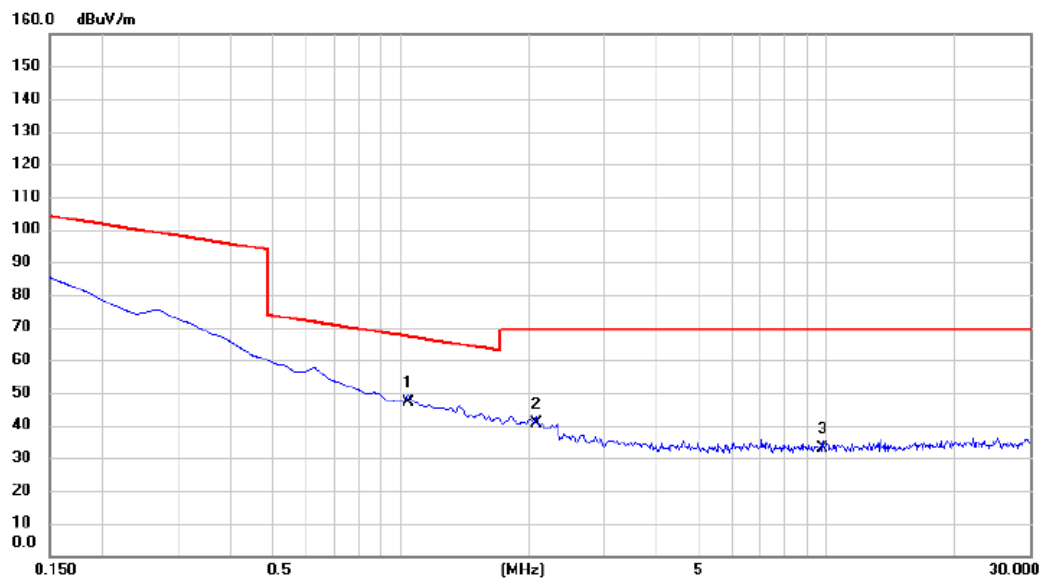


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	1.046	27.15	20.03	47.18	67.22	-20.04	QP	
2		2.090	20.30	20.33	40.63	69.54	-28.91	QP	
3		9.791	12.64	20.49	33.13	69.54	-36.41	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX Mode	Polarization	Vertical
-----------	---------	--------------	----------

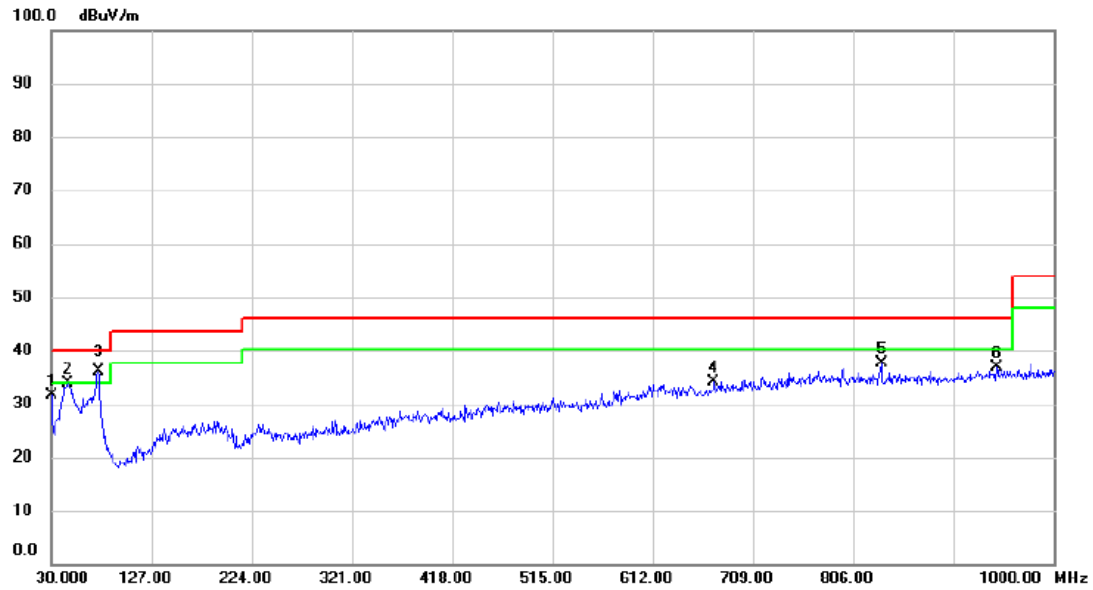


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.000	43.25	-11.64	31.61	40.00	-8.39	peak	
2		46.490	45.45	-11.50	33.95	40.00	-6.05	peak	
3	*	75.590	50.58	-14.54	36.04	40.00	-3.96	QP	
4		671.170	36.98	-2.88	34.10	46.02	-11.92	peak	
5		833.160	38.20	-0.64	37.56	46.02	-8.46	peak	
6		944.710	35.87	0.91	36.78	46.02	-9.24	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode	Polarization	Horizontal
-----------	---------	--------------	------------

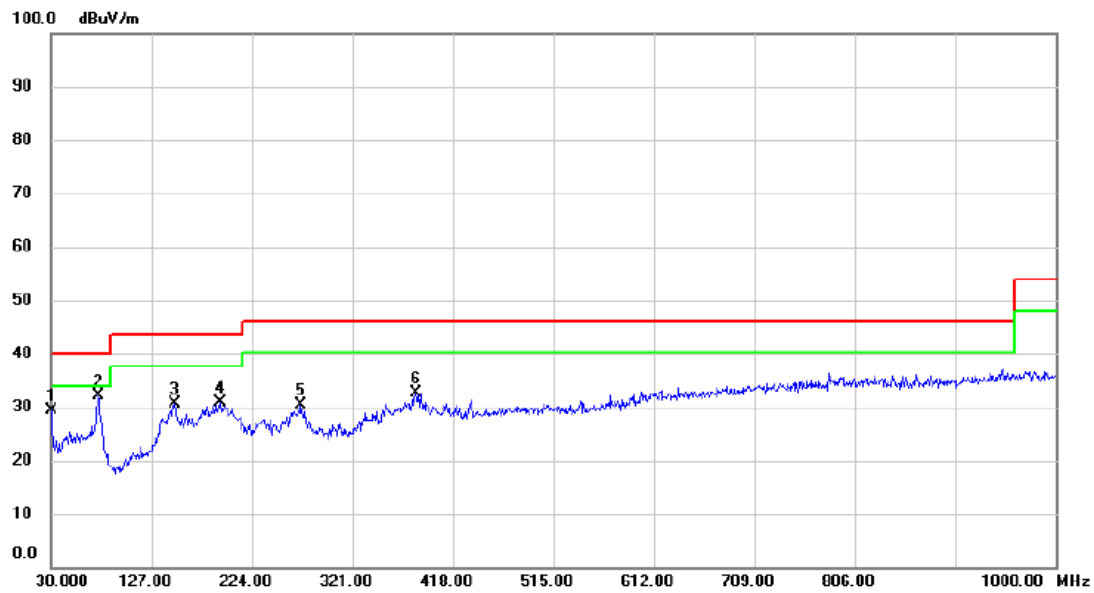

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.000	41.05	-11.64	29.41	40.00	-10.59	peak	
2	*	75.590	46.64	-14.54	32.10	40.00	-7.90	peak	
3		149.310	41.66	-11.05	30.61	43.52	-12.91	peak	
4		193.930	44.62	-13.79	30.83	43.52	-12.69	peak	
5		270.560	41.83	-11.47	30.36	46.02	-15.66	peak	
6		382.110	41.22	-8.49	32.73	46.02	-13.29	peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - BANDWIDTH

Test Mode	TX Mode
-----------	---------


Frequency (kHz)	20 dB Bandwidth (kHz)	99 % Occupied Bandwidth (kHz)	Result
145.83	26.40	0.594	Complies

20 dB Bandwidth

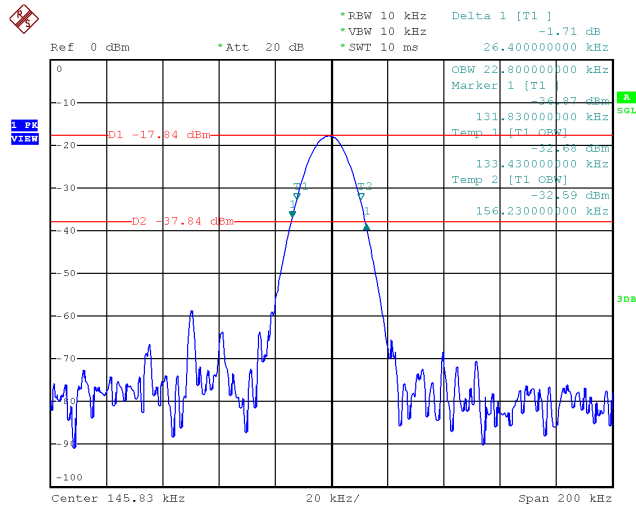

Date: 16.JUL.2026 13:34:15

99 % Occupied Bandwidth

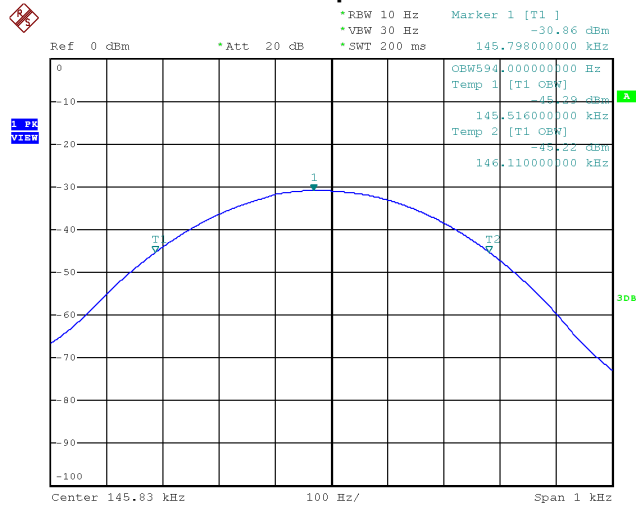

Date: 16.JUL.2026 13:30:44

End of Test Report