TEST REPORT

Application No.:	FYCR2606000152AT
Applicant:	Razer Inc.
Address of Applicant:	9 Pasteur, Irvine, California 92618 United States
Manufacturer:	Razer Inc.
Address of Manufacturer:	9 Pasteur, Irvine, California 92618 United States
Factory:	Razer Technology and Development (Shenzhen) Co., Ltd
Address of Factory:	East Wing, 3rd Floor, Block 2, Phase 1 of Vision Shenzhen Business Park, Keji South Road, Hi-Tech Industrial Park, Shenzhen 518057, China
Equipment Under Test (EUT):	
EUT Name:	Gaming & Music Soundbar
Model No.:	RZ05-0392, RZ05-0392XXXX-XXXX (X = 0-9 or A-Z) (Gaming & Music Sound Bar Model: RC30-039201; Subwoofer Model: RC30-039202) ♣
♣	Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Trade Mark:	RAZER
FCC ID:	RWO-RC300392011
Standard(s) :	47 CFR Part 15, Subpart C 15.247
Date of Receipt:	2026-06-18
Date of Test:	2026-07-04 to 2026-07-22
Date of Issue:	2026-07-24
Test Result:	**Pass***

* In the configuration tested, the EUT complied with the standards specified above.

Revision Record				
Version	**Chapter**	**Date**	**Modifier**	**Remark**
01		2026-07-24		Original

Authorized for issue by:				
		Byron Liang **Byron Liang/Project Engineer**		
		Tree Zhan **Tree Zhan/Reviewer**		

2 Test Summary

Radio Spectrum Matter Part				
Item	**Standard**	**Method**	**Requirement**	**Result**
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10-2020+Cor.1-2023 Section 6.10.5 & 11.12	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10-2020+Cor.1-2023 Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10-2020+Cor.1-2023 Section 6.6 & 11.12	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Maximum Conducted Output Power		ANSI C63.10-2020+Cor.1-2023 Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Conducted Band Edges Measurement		ANSI C63.10-2020+Cor.1-2023 Section 6.10.4	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10-2020+Cor.1-2023 Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass

Remark:

Model No.:RZ05-0392, RZ05-0392XXXX-XXXX (X = 0-9 or A-Z)

(Gaming & Music Sound Bar Model: RC30-039201; Subwoofer Model: RC30-039202)

This test report (Ref. No.: FYCR260600015202) is only valid with the original test report (Ref. No.: SZCR260100005703).

Review with the original report, this report just changed the information of manufacture.

According to the declaration from the applicant, the models in this report and the models in original report were identical, the differences are the added test points and the MOS circuit on the IO board for preventing sparking when connecting the DC power supply.

Considering to the difference, pre-scan were performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest.

Therefore in this report the test items in section 2 were fully retested on model RZ05-0392 and shown the data in this report, other tests please refer to original report SZCR260100005703.

3 Contents

4 General Information

4.1 Details of E.U.T.

Power supply:	Powered by DC 22.0V, 2.95A from Adapter Model: DYS865-220295W INPUT: AC 100-240V, 50/60Hz, 1.5A MAX Output: DC 22.0V, 2.95A, 64.9W
Cable(s):	AC cable 102cm unshielded DC cable from adapter 146cm unshielded with one core Type-C cable 186cm shielded Subwoofer output cable 210cm unshielded
Technology Type:	BLE
Operation Frequency:	2402MHz to 2480MHz
Modulation Type:	GFSK
Channel Spacing:	2MHz
Data Rate:	1Mbps, 2Mbps
Number of Channels:	40
Antenna Type:	FPC Antenna
Antenna Gain:	1.94dBi
Cable Loss (for RF conducted test):	1.0dB

Remark: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--
The EUT has been tested as an independent unit.			

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Radiated Emissions which fall in the restricted bands	± 4.7dB
Radiated Spurious Emissions Below 1GHz	± 5.7dB
Radiated Spurious Emissions Above 1GHz	± 4.7dB (1-18GHz); ± 4.7dB (18-40GHz)
Maximum Conducted Output Power	2.4G:± 0.80dB; 5G:± 0.43dB
Conducted Band Edges Measurement	± 2.7dB
Conducted Spurious Emissions	± 2.7dB

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{cispr/ETSI}$ (CISPR/ETSI Uncertainty), so the test results

– compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

– non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

– the measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.4 Test Location

All tests were performed at:

Compliance Certification Services（Kunshan）Inc. Shenzhen branch.

Fuyong lab. Xinlong TechnoPark,Fengtang Road, Fuyong Subdistrict, Bao'an, Shenzhen, China

Tel: +86 755 8866 3988 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6606.01)

Compliance Certification Services（Kunshan）Inc. Shenzhen branch is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6606.01.

• FCC –Designation Number: CN1322

Compliance Certification Services（Kunshan）Inc. Shenzhen branch has been recognized as an accredited testing laboratory.

Designation Number: CN1322. Test Firm Registration Number: 718073

• Innovation, Science and Economic Development Canada

Compliance Certification Services（Kunshan）Inc. Shenzhen branch has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0129.

IC#: 28189.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

Radiated Emissions which fall in the restricted bands					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
3m Anechoic Chamber	CRT	N/A	SEM001-13	2025/10/13	2028/10/12
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	SEM003-54	2025/5/24	2027/5/23
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-23	2026/2/5	2027/2/4
Coaxial Cable	CCS	N/A	SEM035-02	2026/5/12	2027/5/11
Pre-amplifier	TST PASS	LNA04080G30	SEM005-27	2026/2/5	2027/2/4
Pre-amplifier	TST PASS	LNA10180G45	SEM005-28	2026/2/5	2027/2/4
Signal Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2026/3/4	2027/3/3
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A

Radiated Spurious Emissions Below 1GHz					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
3m Anechoic Chamber	CRT	N/A	SEM001-13	2025/10/13	2028/10/12
Trilog-Broadband Antenna	Schwarzbeck	VULB9168	SEM003-26	2025/8/29	2027/08/28
Loop Antenna	ETS-LINDGREN	6502	SEM003-43	2025/6/16	2027/6/15
MXE EMI receiver	Agilent	N9038A	SEM004-05	2025/12/15	2026/12/14
Pre-amplifier	HP	8447D	SEM005-02	2026/02/02	2027/02/01
Coaxial Cable	CCS	N/A	SEM035-01	2026/5/12	2027/5/11
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A

Radiated Spurious Emissions Above 1GHz					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
3m Anechoic Chamber	CRT	N/A	SEM001-13	2025/10/13	2028/10/12
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2025/7/29	2027/7/28
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	SEM003-54	2025/5/24	2027/5/23
Pre-amplifier	TST PASS	LNA180400G40	SEM005-39	2026/4/29	2027/4/28
Pre-amplifier	TST PASS	LNA10180G60	SEM005-32	2026/4/4	2027/4/3
Coaxial Cable	CCS	N/A	SEM035-02	2026/5/12	2027/5/11
Coaxial Cable	CCS	N/A	SEM035-03	2026/5/12	2027/5/11
Pre-amplifier	TST PASS	LNA04080G30	SEM005-27	2026/2/5	2027/2/4
Pre-amplifier	TST PASS	LNA10180G45	SEM005-28	2026/2/5	2027/2/4

Signal Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2026/3/4	2027/3/3
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A

RF Conducted Test					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2026/2/3	2027/2/2
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-25	2026/2/3	2027/2/2
Power Sensor	Erika Fiedler	U2021XA	SEM009-16	2026/2/4	2027/2/3
Programmable DC Source	Chroma	62024P-80-60	SEM011-09	2026/2/5	2027/2/4
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2026/2/2	2027/2/1
Coaxial Cable	CCS	N/A	SEM037-01	2026/5/12	2027/5/11
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
MXA Signal Analyzer	KEYSIGHT	N9020B	SEM004-24	2026/2/3	2027/2/2

General used equipment					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2026/07/08	2027/7/7
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2026/04/01	2027/03/31
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2026/02/14	2027/02/13

6 Radio Spectrum Matter Test Results

6.1 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10-2020+Cor.1-2023 Section 6.10.5 & 11.12
Measurement Distance: 3m
Test Engineer: Rex Liu

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3
Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.		

6.1.1 E.U.T. Operation

Operating Environment:
Temperature: 20.3 °C Humidity: 51.4 % RH Atmospheric Pressure: 1000 mbar

6.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	04	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

6.1.3 Test Setup Diagram

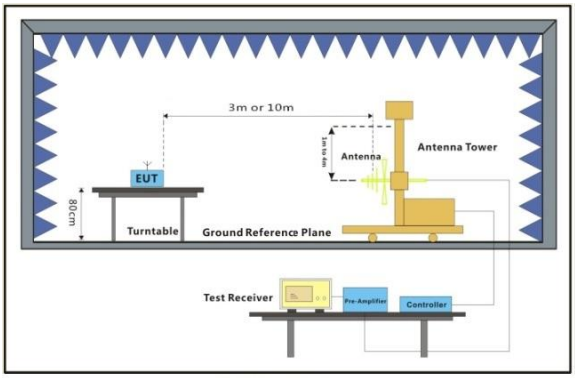

30MHz-1GHz

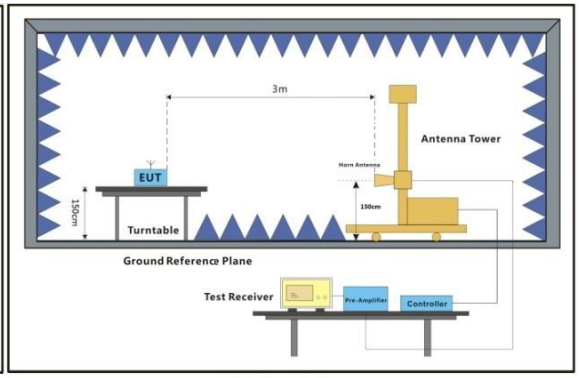

Above 1GHz

6.1.4 Measurement Procedure and Data

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 4:For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geqslant$1/T (Duty cycle$<$98%) or 10Hz (Duty cycle$\geqslant$98%) for Average detection (AV) at frequency above 1GHz.

BLE_1M_TX_CH_00_Horizontal-Peak

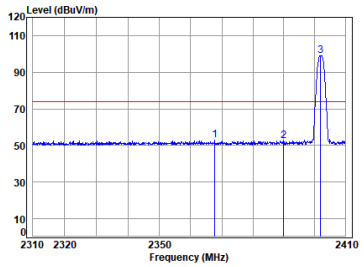

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00152AT\00153AT
Mode : 2402 Band edge
: BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2367.684	4.86	27.16	32.97	53.65	52.70	74.00	-21.30	Peak	0.00
2	2390.000	4.86	27.12	32.96	53.24	52.26	74.00	-21.74	Peak	0.00
3 p	2402.000	4.86	27.12	32.95	100.00	99.03	74.00	25.03	Peak	0.00

BLE_1M_TX_CH_00_Horizontal-AVG

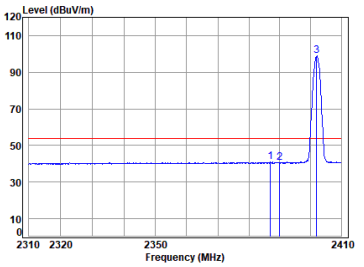

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00152AT\00153AT
Mode : 2402 Band edge
: BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2387.028	4.86	27.13	32.96	41.92	40.95	54.00	-13.05	Average	0.00
2	2390.000	4.86	27.12	32.96	41.61	40.63	54.00	-13.37	Average	0.00
3 q	2402.000	4.86	27.12	32.95	99.76	98.79	54.00	44.79	Average	0.00

BLE_1M_TX_CH_00_Vertical-Peak

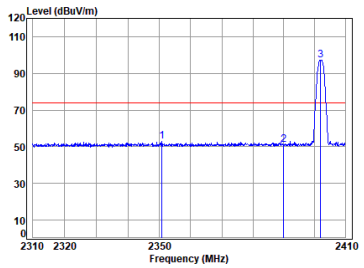

Site : chamber
Condition: 3m VERTICAL
Job No : 00152AT\00153AT
Mode : 2402 Band edge
: BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2350.787	4.86	27.20	32.98	53.72	52.80	74.00	-21.20	Peak	0.00
2	2390.000	4.86	27.12	32.96	51.91	50.93	74.00	-23.07	Peak	0.00
3 p	2402.000	4.86	27.12	32.95	98.25	97.28	74.00	23.28	Peak	0.00

BLE_1M_TX_CH_00_Vertical-AVG

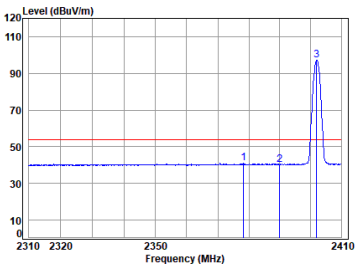

Site : chamber
Condition: 3m VERTICAL
Job No : 00152AT\00153AT
Mode : 2402 Band edge
: BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2378.344	4.86	27.14	32.97	41.83	40.86	54.00	-13.14	Average	0.00
2	2390.000	4.86	27.12	32.96	41.24	40.26	54.00	-13.74	Average	0.00
3 q	2402.000	4.86	27.12	32.95	98.00	97.03	54.00	43.03	Average	0.00

BLE_1M_TX_CH_39_Horizontal-Peak

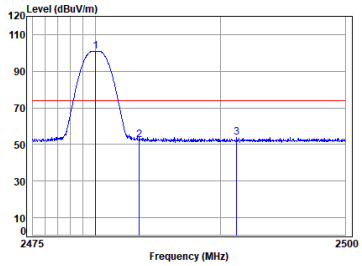


```
Site     : chamber
Condition: 3m HORIZONTAL
Job No   : 00152AT\00153AT
Mode     : 2480 Band edge
         : BLE 1M
            Cable    Ant Preamp   Read          Limit   Over              Aux
      Freq   Loss Factor Factor  Level  Level   Line  Limit Remark     Factor
       MHz     dB   dB/m     dB  dBuV dBuV/m dBuV/m     dB              dB
1 p 2480.000  4.84 27.68 32.91 101.45 101.06 74.00  27.06 Peak          0.00
2   2483.500  4.84 27.70 32.91  53.01  52.64 74.00 -21.36 Peak          0.00
3   2491.297  4.84 27.75 32.90  54.37  54.06 74.00 -19.94 Peak          0.00
```

BLE_1M_TX_CH_39_Horizontal-AVG

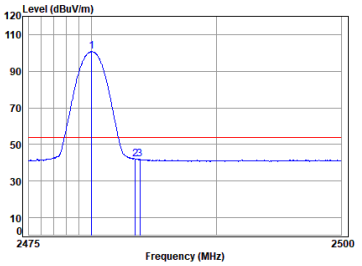


```
Site     : chamber
Condition: 3m HORIZONTAL
Job No   : 00152AT\00153AT
Mode     : 2480 Band edge
         : BLE 1M
            Cable    Ant Preamp   Read          Limit   Over              Aux
      Freq   Loss Factor Factor  Level  Level   Line  Limit Remark     Factor
       MHz     dB   dB/m     dB  dBuV dBuV/m dBuV/m     dB              dB
1 q 2480.000  4.84 27.68 32.91 101.04 100.65 54.00  46.65 Average       0.00
2   2483.500  4.84 27.70 32.91  42.30  41.93 54.00 -12.07 Average       0.00
3   2483.846  4.84 27.70 32.91  42.34  41.97 54.00 -12.03 Average       0.00
```

BLE_1M_TX_CH_39_Vertical-Peak

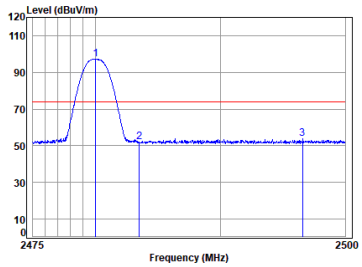


```
Site     : chamber
Condition: 3m VERTICAL
Job No   : 00152AT\00153AT
Mode     : 2480 Band edge
         : BLE 1M
            Cable    Ant Preamp   Read          Limit   Over              Aux
      Freq   Loss Factor Factor  Level  Level   Line  Limit Remark     Factor
       MHz     dB   dB/m     dB  dBuV dBuV/m dBuV/m     dB              dB
1 p 2480.000  4.84 27.68 32.91  97.42  97.03 74.00  23.03 Peak          0.00
2   2483.500  4.84 27.70 32.91  52.52  52.15 74.00 -21.85 Peak          0.00
3   2496.585  4.84 27.78 32.90  54.05  53.77 74.00 -20.23 Peak          0.00
```

BLE_1M_TX_CH_39_Vertical-AVG

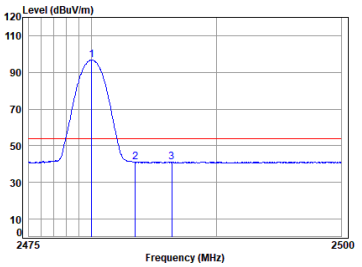


```
Site     : chamber
Condition: 3m VERTICAL
Job No   : 00152AT\00153AT
Mode     : 2480 Band edge
         : BLE 1M
            Cable    Ant Preamp   Read          Limit   Over              Aux
      Freq   Loss Factor Factor  Level  Level   Line  Limit Remark     Factor
       MHz     dB   dB/m     dB  dBuV dBuV/m dBuV/m     dB              dB
1 q 2480.000  4.84 27.68 32.91  97.10  96.71 54.00  42.71 Average       0.00
2   2483.500  4.84 27.70 32.91  41.39  41.02 54.00 -12.98 Average       0.00
3   2486.419  4.84 27.72 32.91  41.64  41.29 54.00 -12.71 Average       0.00
```

BLE_2M_TX_CH_00_Horizontal-Peak

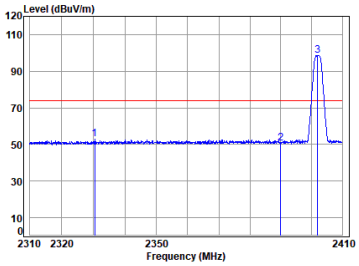

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00152AT\00153AT
Mode : 2402 Band edge
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2330.452	4.87	27.16	32.99	53.84	52.88	74.00	-21.12	Peak	0.00
2	2390.000	4.86	27.12	32.96	51.84	50.86	74.00	-23.14	Peak	0.00
3 p	2402.000	4.86	27.12	32.95	99.57	98.60	74.00	24.60	Peak	0.00

BLE_2M_TX_CH_00_Horizontal-AVG

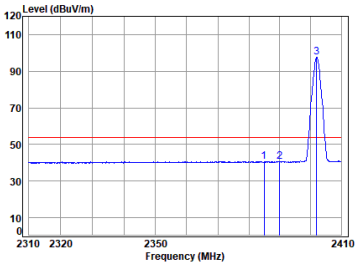

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00152AT\00153AT
Mode : 2402 Band edge
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2384.905	4.86	27.13	32.96	41.76	40.79	54.00	-13.21	Average	0.00
2	2390.000	4.86	27.12	32.96	41.57	40.59	54.00	-13.41	Average	0.00
3 q	2402.000	4.86	27.12	32.95	98.41	97.44	54.00	43.44	Average	0.00

BLE_2M_TX_CH_00_Vertical-Peak

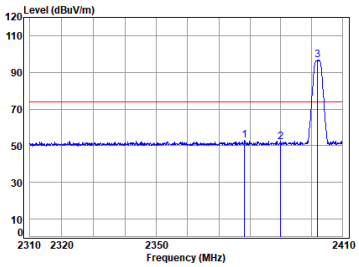

Site : chamber
Condition: 3m VERTICAL
Job No : 00152AT\00153AT
Mode : 2402 Band edge
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2378.344	4.86	27.14	32.97	53.71	52.74	74.00	-21.26	Peak	0.00
2	2390.000	4.86	27.12	32.96	53.02	52.04	74.00	-21.96	Peak	0.00
3 p	2402.000	4.86	27.12	32.95	97.67	96.70	74.00	22.70	Peak	0.00

BLE_2M_TX_CH_00_Vertical-AVG

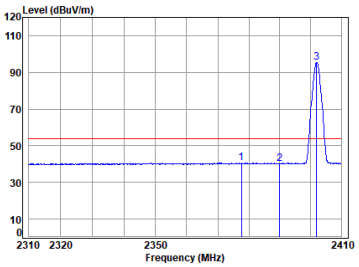

Site : chamber
Condition: 3m VERTICAL
Job No : 00152AT\00153AT
Mode : 2402 Band edge
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2377.638	4.86	27.14	32.97	41.73	40.76	54.00	-13.24	Average	0.00
2	2390.000	4.86	27.12	32.96	41.32	40.34	54.00	-13.66	Average	0.00
3 q	2402.000	4.86	27.12	32.95	96.56	95.59	54.00	41.59	Average	0.00

BLE_2M_TX_CH_39_Horizontal-Peak

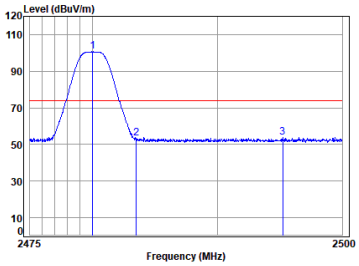

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00152AT\00153AT
Mode : 2480 Band edge
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 p	2480.000	4.84	27.68	32.91	101.02	100.63	74.00	26.63	Peak	0.00
2	2483.500	4.84	27.70	32.91	53.68	53.31	74.00	-20.69	Peak	0.00
3	2495.231	4.84	27.77	32.90	54.16	53.87	74.00	-20.13	Peak	0.00

BLE_2M_TX_CH_39_Horizontal-AVG

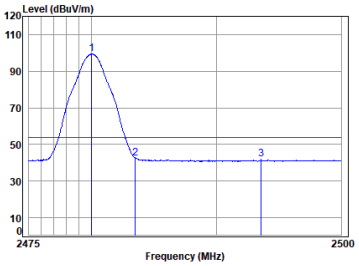

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00152AT\00153AT
Mode : 2480 Band edge
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q	2480.000	4.84	27.68	32.91	99.72	99.33	54.00	45.33	Average	0.00
2	2483.500	4.84	27.70	32.91	42.77	42.40	54.00	-11.60	Average	0.00
3	2493.576	4.84	27.76	32.90	42.09	41.79	54.00	-12.21	Average	0.00

BLE_2M_TX_CH_39_Vertical-Peak

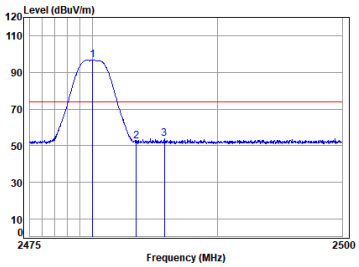

Site : chamber
Condition: 3m VERTICAL
Job No : 00152AT\00153AT
Mode : 2480 Band edge
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 p	2480.000	4.84	27.68	32.91	97.13	96.74	74.00	22.74	Peak	0.00
2	2483.500	4.84	27.70	32.91	52.65	52.28	74.00	-21.72	Peak	0.00
3	2485.744	4.84	27.72	32.91	54.21	53.86	74.00	-20.14	Peak	0.00

BLE_2M_TX_CH_39_Vertical-AVG

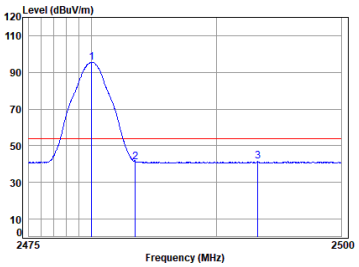

Site : chamber
Condition: 3m VERTICAL
Job No : 00152AT\00153AT
Mode : 2480 Band edge
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q	2480.000	4.84	27.68	32.91	95.82	95.43	54.00	41.43	Average	0.00
2	2483.500	4.84	27.70	32.91	41.61	41.24	54.00	-12.76	Average	0.00
3	2493.300	4.84	27.76	32.90	41.63	41.33	54.00	-12.67	Average	0.00

6.2 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10-2020+Cor.1-2023 Section 6.4,6.5
Measurement Distance: 3m
Test Engineer: Rex Liu

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

Note

1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

2. At frequencies below 1GHz, measurements may be performed at a distance different to specified in the regulations.

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Below 30MHz, Aux Factor = 40 dB/decade of distance, the aux factor is 40log(3/300) = -80dB (for 3m test distance).

EX. Above 30MHz, Aux Factor = 20 dB/decade of distance, the aux factor is 20log(10/3) = 10.46dB (for 10m test distance).

6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 20.4 °C Humidity: 51.6 % RH Atmospheric Pressure: 1000 mbar

6.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	03	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Pre-scan	04	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

Final test	05	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Pre-scan	06	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

6.2.3 Test Setup Diagram

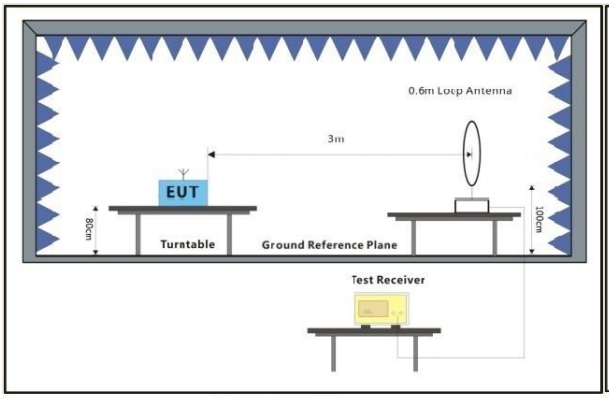

Below 30MHz

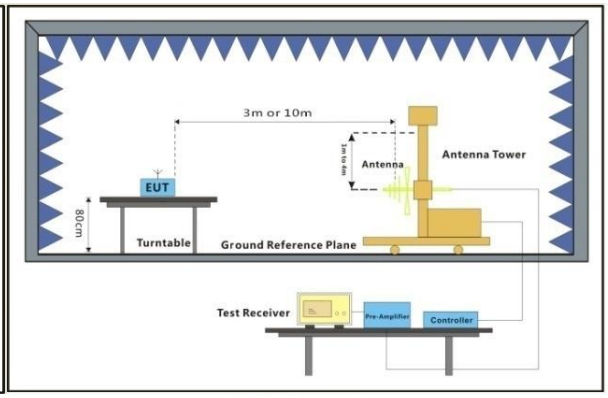

30MHz-1GHz

6.2.4 Measurement Procedure and Data

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8m above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3m or 10m away from the interference-receiving antenna, which was mounted on the variable-height antenna tower.

c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1m) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the middle channel, the Highest channel.

h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

i. Repeat above procedures until all frequencies measured was complete.

Remark:

1 Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

2. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the worst-case test curve is displayed.

Test Mode: 05

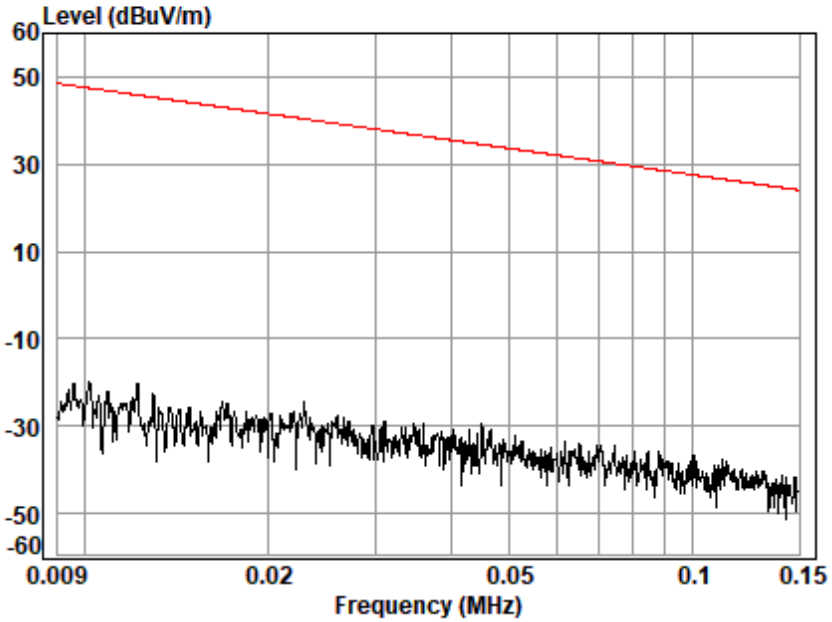


```
Site      : chamber
Condition: 3m
Job No.   : 00152AT
Test Mode: 05
          : coaxial
```


Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistrict, Bao'an, Shenzhen, China 518103 t (86–755) 88663988 f (86–755) 26710594 www.sgsgroup.com.cn
中国·深圳·宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86–755) 88663988 f (86–755) 26710594 sgs.china@sgs.com

Test Mode: 05

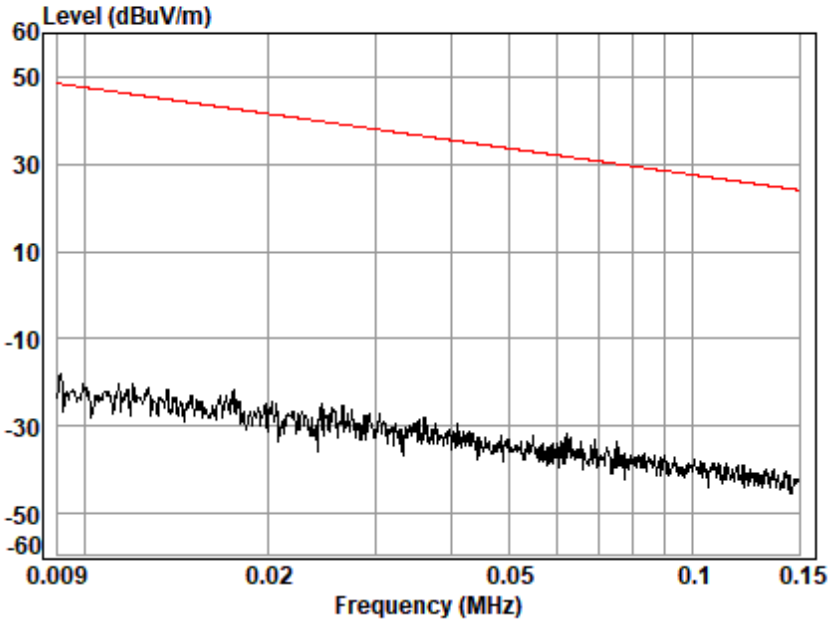


```
Site      : chamber
Condition: 3m
Job No.   : 00152AT
Test Mode: 05
          : coplanar
```

Test Mode: 05

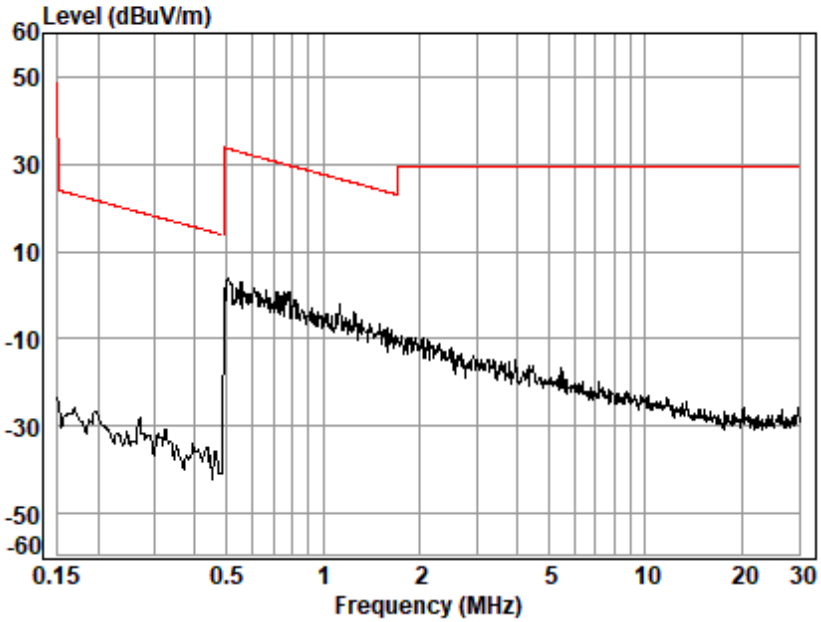


```
Site      : chamber
Condition: 3m
Job No.   : 00152AT
Test Mode: 05
          : coaxial
```


Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistrict, Bao'an, Shenzhen, China 518103 t (86–755) 88663988 f (86–755) 26710594 www.sgsgroup.com.cn
中国·深圳·宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86–755) 88663988 f (86–755) 26710594 sgs.china@sgs.com

Test Mode: 05

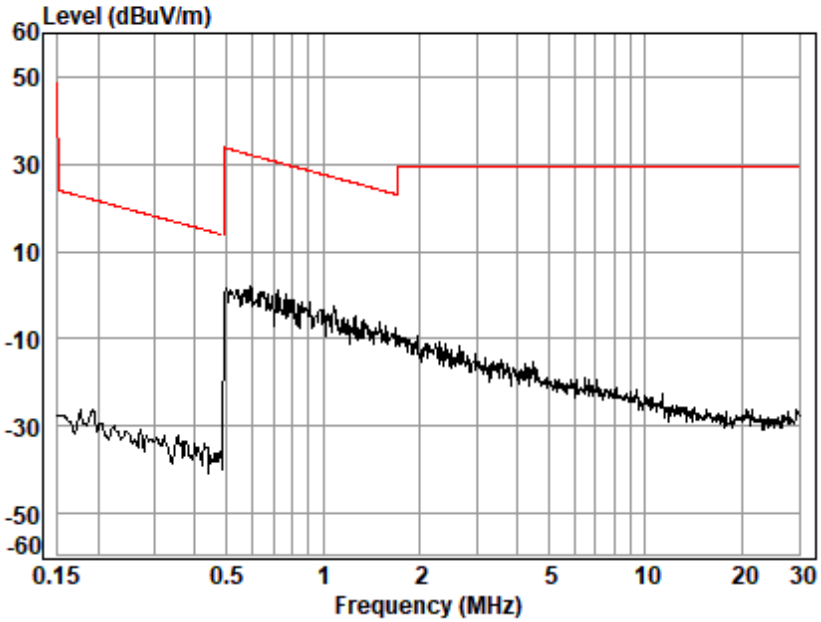


```
Site      : chamber
Condition: 3m
Job No.   : 00152AT
Test Mode: 05
          : coplanar
```

Test Mode: 05

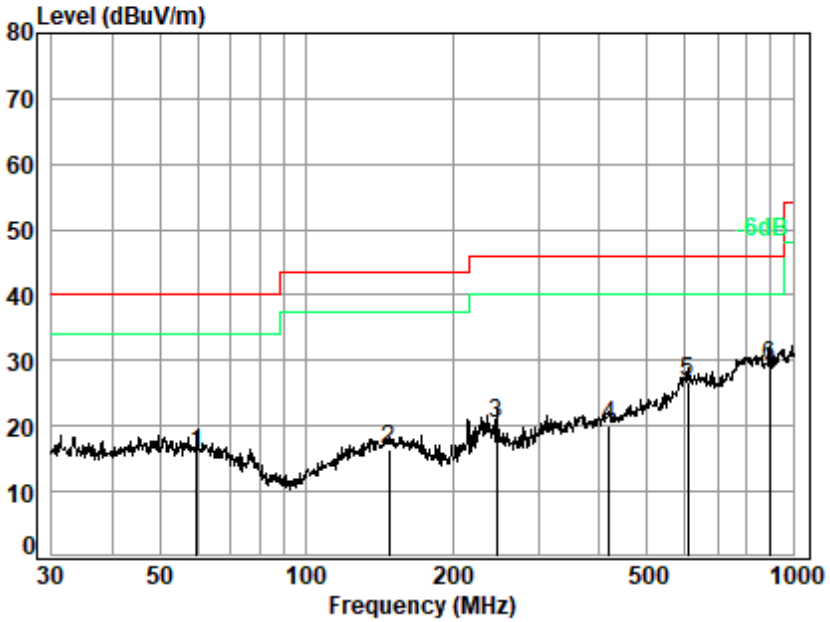

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00152AT/00153AT
Mode : 05

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	59.44	0.74	17.33	26.10	23.76	15.73	40.00	-24.27	QP
2	147.92	1.31	17.40	25.65	23.26	16.32	43.50	-27.18	QP
3	245.95	0.36	15.68	25.33	29.77	20.48	46.00	-25.52	QP
4	419.11	1.32	20.10	26.12	24.80	20.10	46.00	-25.90	QP
5	607.79	3.40	24.21	26.56	25.78	26.83	46.00	-19.17	QP
6	893.86	2.00	27.09	26.40	26.55	29.24	46.00	-16.76	QP

Test Mode: 05

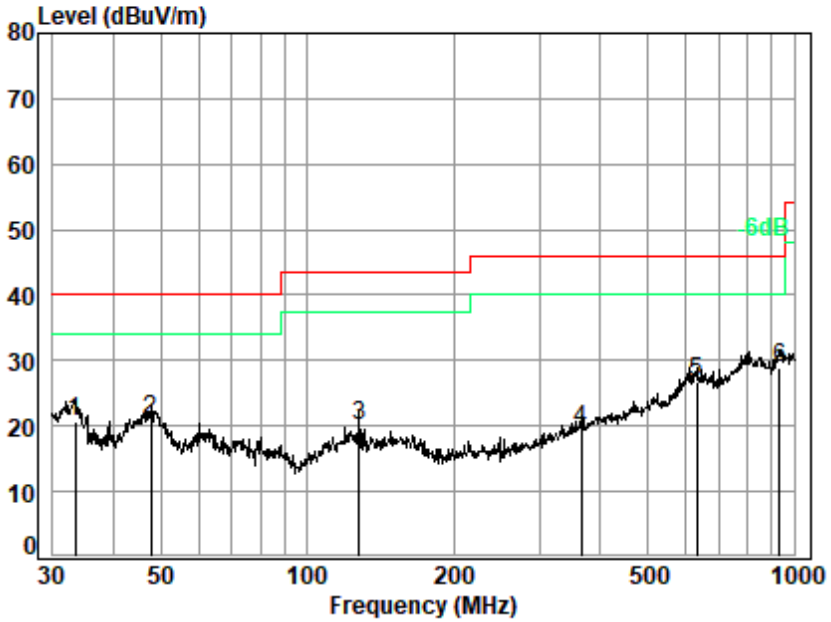

Site : chamber
Condition: 3m VERTICAL
Job No : 00152AT/00153AT
Mode : 05

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	33.33	0.62	16.67	26.13	29.62	20.78	40.00	-19.22	QP
2	47.66	0.71	17.75	26.10	28.76	21.12	40.00	-18.88	QP
3	128.11	1.40	15.83	25.74	28.61	20.10	43.50	-23.40	QP
4	365.54	1.48	18.88	25.74	24.93	19.55	46.00	-26.45	QP
5	631.69	3.01	24.28	26.55	26.17	26.91	46.00	-19.09	QP
6	935.55	2.60	28.05	26.36	24.47	28.76	46.00	-17.24	QP

6.3 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10-2020+Cor.1-2023 Section 6.6 & 11.12
Measurement Distance: 3m
Test Engineer: Rex Liu

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

Note:

At Above 18GHz, measurements may be performed at a distance shorter than that specified in the regulations

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Above 18GHz, Aux Factor = 20 dB/decade of distance, the aux factor is 20log(1/3) = -9.54dB (for 1m test distance).

6.3.1 E.U.T. Operation

Operating Environment:

Temperature: 20.3 °C Humidity: 51.4 % RH Atmospheric Pressure: 1000 mbar

6.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	04	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

6.3.3 Test Setup Diagram

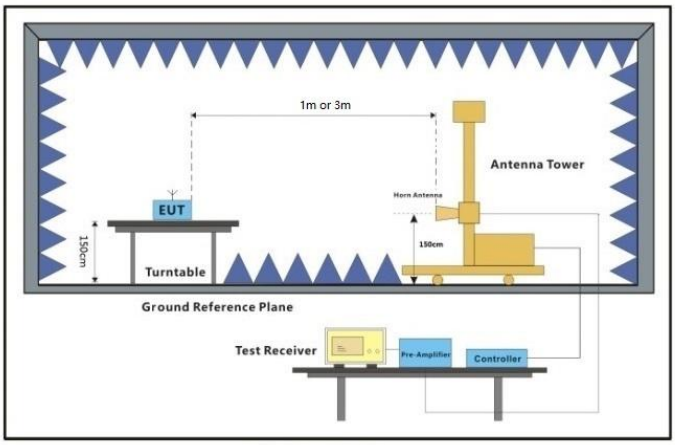

Above 1GHz

6.3.4 Measurement Procedure and Data

a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5m above the ground at a 3m fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3m away from the interference-receiving antenna from 1GHz to 18GHz, and 1m away from the interference-receiving antenna above 18GHz.

b. The interference-receiving antenna was mounted on the variable-height antenna tower, with its boresight facing the EUT throughout the test.

c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. Test the EUT in the lowest channel, the middle channel, the Highest channel.

g. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

h. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Scan from 1GHz to 10th harmonic of the highest frequency or 40 GHz, whichever is lower.

2. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

3. For the frequency above 18GHz, testing had been executed under all test modes, only the worst-case test curve is displayed in the report.

4. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s).

BLE_1M_TX_CH_00_Horizontal-Peak

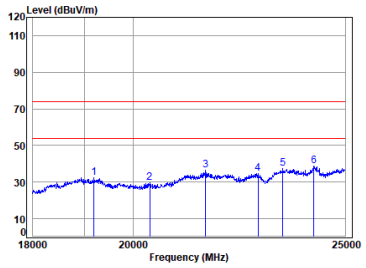

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00152AT/00153AT
Mode : 2402 TX RSE
: BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	19197.090	5.97	37.76	56.54	54.61	32.26	74.00	-41.74	Peak	-9.54
2	20353.080	5.91	38.16	56.42	51.40	29.51	74.00	-44.49	Peak	-9.54
3	21585.780	6.00	37.40	54.71	57.31	36.46	74.00	-37.54	Peak	-9.54
4	22810.550	6.59	37.37	54.49	54.87	34.80	74.00	-39.20	Peak	-9.54
5	23410.280	6.76	38.60	51.12	52.52	37.22	74.00	-36.78	Peak	-9.54
6	p24192.080	6.79	39.00	50.86	53.56	38.95	74.00	-35.05	Peak	-9.54

BLE_1M_TX_CH_00_Vertical-Peak

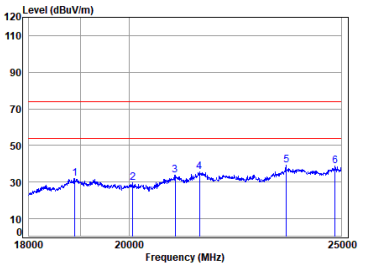

Site : chamber
Condition: 3m VERTICAL
Job No : 00152AT/00153AT
Mode : 2402 TX RSE
: BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	18890.550	5.86	37.29	56.26	54.45	31.80	74.00	-42.20	Peak	-9.54
2	20080.790	5.85	38.00	56.63	51.86	29.54	74.00	-44.46	Peak	-9.54
3	20998.270	6.06	37.50	55.10	54.74	33.66	74.00	-40.34	Peak	-9.54
4	21543.270	6.01	37.40	54.76	56.56	35.67	74.00	-38.33	Peak	-9.54
5	p23595.570	6.76	38.72	50.32	53.51	39.13	74.00	-34.87	Peak	-9.54
6	24844.450	6.84	39.28	51.88	54.18	38.88	74.00	-35.12	Peak	-9.54

BLE_1M_TX_CH_00_Horizontal-Peak

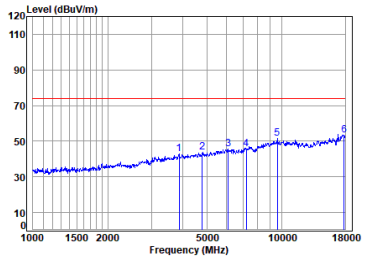

Condition: 3m HORIZONTAL
Job No : 00152AT\00153AT
Mode : 2402 TX RSE
: BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	3879.027	8.25	30.13	52.90	57.30	42.78	74.00	-31.22	Peak	0.00
2	4804.000	8.21	31.98	53.15	56.93	43.97	74.00	-30.03	Peak	0.00
3	6106.616	8.19	34.00	53.29	56.93	45.83	74.00	-28.17	Peak	0.00
4	7206.000	8.83	36.06	53.42	54.35	45.82	74.00	-28.18	Peak	0.00
5	9608.000	11.93	38.52	54.02	55.12	51.55	74.00	-22.45	Peak	0.00
6	pp17793.090	14.47	40.19	51.54	50.41	53.53	74.00	-20.47	Peak	0.00

BLE_1M_TX_CH_00_Horizontal-Avg

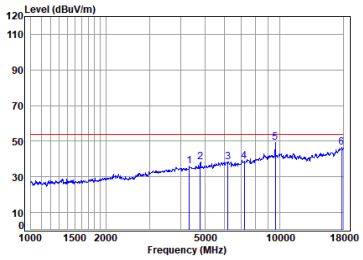

Condition: 3m HORIZONTAL
Job No : 00152AT\00153AT
Mode : 2402 TX RSE
: BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4341.886	8.20	30.86	53.01	49.84	35.89	54.00	-18.11	Average	0.00
2	4804.000	8.21	31.98	53.15	51.18	38.22	54.00	-15.78	Average	0.00
3	6195.508	8.32	34.27	53.28	49.12	38.43	54.00	-15.57	Average	0.00
4	7206.000	8.83	36.06	53.42	47.09	38.56	54.00	-15.44	Average	0.00
5	pp 9608.000	11.93	38.52	54.02	53.04	49.47	54.00	-4.53	Average	0.00
6	17741.740	14.46	40.14	51.55	43.47	46.52	54.00	-7.48	Average	0.00

BLE_1M_TX_CH_00_Vertical-Peak

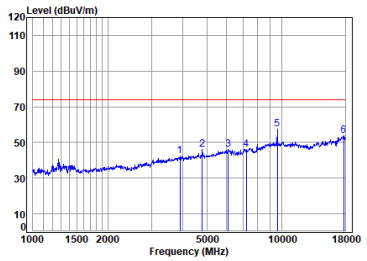

Condition: 3m VERTICAL
Job No : 00152AT\00153AT
Mode : 2402 TX RSE
: BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	3901.516	8.33	30.02	52.90	56.89	42.34	74.00	-31.66	Peak	0.00
2	4804.000	8.21	31.98	53.15	58.85	45.89	74.00	-28.11	Peak	0.00
3	6106.616	8.19	34.00	53.29	57.29	46.19	74.00	-27.81	Peak	0.00
4	7206.000	8.83	36.06	53.42	54.73	46.20	74.00	-27.80	Peak	0.00
5	pp 9608.000	11.93	38.52	54.02	60.88	57.31	74.00	-16.69	Peak	0.00
6	17741.740	14.46	40.14	51.55	50.77	53.82	74.00	-20.18	Peak	0.00

BLE_1M_TX_CH_00_Vertical-Avg

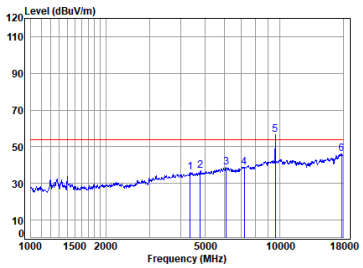

Site : chamber
Condition: 3m VERTICAL
Job No : 00152AT\00153AT
Mode : 2402 TX RSE
: BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4367.058	0.00	0.00	0.00	35.90	35.90	54.00	-18.10	Average	0.00
2	4804.000	0.00	0.00	0.00	36.93	36.93	54.00	-17.07	Average	0.00
3	6088.991	0.00	0.00	0.00	38.70	38.70	54.00	-15.30	Average	0.00
4	7206.000	0.00	0.00	0.00	38.63	38.63	54.00	-15.37	Average	0.00
5	9608.000	0.00	0.00	0.00	56.74	56.74	------	------	Average	0.00
6	q17741.740	0.00	0.00	0.00	46.11	46.11	54.00	-7.89	Average	0.00

BLE_1M_TX_CH_19_Horizontal-Peak

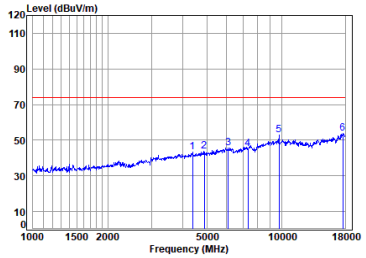

Condition: 3m HORIZONTAL
Job No : 00152AT\00153AT
Mode : 2440 TX RSE
: BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4392.376	8.13	31.31	53.03	56.86	43.27	74.00	-30.73	Peak	0.00
2	4880.000	8.26	32.06	53.17	56.43	43.58	74.00	-30.42	Peak	0.00
3	6106.616	8.19	34.00	53.29	56.92	45.82	74.00	-28.18	Peak	0.00
4	7320.000	8.98	36.14	53.53	53.39	44.98	74.00	-29.02	Peak	0.00
5	9760.000	11.90	38.32	54.05	56.96	53.13	74.00	-20.87	Peak	0.00
6	pp17639.470	14.45	39.86	51.57	51.14	53.88	74.00	-20.12	Peak	0.00

BLE_1M_TX_CH_19_Horizontal-Avg

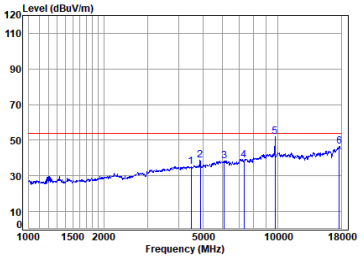

Condition: 3m HORIZONTAL
Job No : 00152AT\00153AT
Mode : 2440 TX RSE
: BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4495.125	7.99	30.92	53.06	49.50	35.35	54.00	-18.65	Average	0.00
2	4880.000	8.26	32.06	53.17	51.51	38.66	54.00	-15.34	Average	0.00
3	6088.991	8.17	33.89	53.29	49.74	38.51	54.00	-15.49	Average	0.00
4	7320.000	8.98	36.14	53.53	47.13	38.72	54.00	-15.28	Average	0.00
5	pp 9760.000	11.90	38.32	54.05	55.92	52.09	54.00	-1.91	Average	0.00
6	17690.530	14.45	40.06	51.56	43.67	46.62	54.00	-7.38	Average	0.00

BLE_1M_TX_CH_19_Vertical-Peak

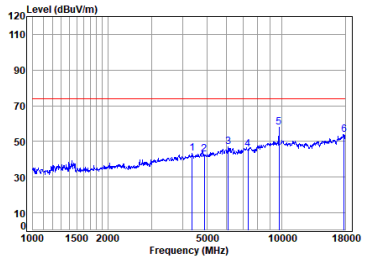

Condition: 3m VERTICAL
Job No : 00152AT\00153AT
Mode : 2440 TX RSE
: BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4367.058	8.17	31.01	53.02	57.07	43.23	74.00	-30.77	Peak	0.00
2	4880.000	8.26	32.06	53.17	55.76	42.91	74.00	-31.09	Peak	0.00
3	6106.616	8.19	34.00	53.29	57.90	46.80	74.00	-27.20	Peak	0.00
4	7320.000	8.98	36.14	53.53	54.26	45.85	74.00	-28.15	Peak	0.00
5	pp 9760.000	11.90	38.32	54.05	61.60	57.77	74.00	-16.23	Peak	0.00
6	17844.590	14.47	40.83	51.53	50.26	54.03	74.00	-19.97	Peak	0.00

BLE_1M_TX_CH_19_Vertical-Avg

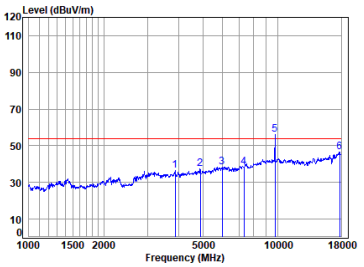

Site : chamber
Condition: 3m VERTICAL
Job No : 00152AT\00153AT
Mode : 2440 TX RSE
: BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	3867.831	0.00	0.00	0.00	36.41	36.41	54.00	-17.59	Average	0.00
2	4880.000	0.00	0.00	0.00	37.59	37.59	54.00	-16.41	Average	0.00
3	5984.305	0.00	0.00	0.00	38.45	38.45	54.00	-15.55	Average	0.00
4	7320.000	0.00	0.00	0.00	38.46	38.46	54.00	-15.54	Average	0.00
5	9760.000	0.00	0.00	0.00	56.18	------	------	------	Average	0.00
6	q17741.740	0.00	0.00	0.00	46.72	46.72	54.00	-7.28	Average	0.00

BLE_1M_TX_CH_39_Horizontal-Peak

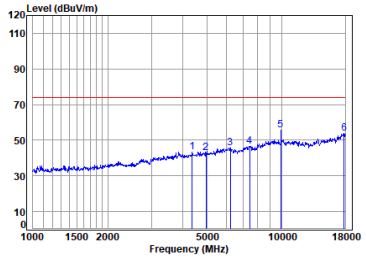

Condition: 3m HORIZONTAL
Job No : 00152AT\00153AT
Mode : 2480 TX RSE
: BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4367.058	8.17	31.01	53.02	57.17	43.33	74.00	-30.67	Peak	0.00
2	4960.000	8.32	32.26	53.19	55.45	42.84	74.00	-31.16	Peak	0.00
3	6213.441	8.34	34.41	53.28	56.26	45.73	74.00	-28.27	Peak	0.00
4	7440.000	9.14	36.90	53.66	54.10	46.48	74.00	-27.52	Peak	0.00
5 pp	9920.000	11.86	38.86	54.08	58.85	55.49	74.00	-18.51	Peak	0.00
6	17793.090	14.47	40.19	51.54	50.88	54.00	74.00	-20.00	Peak	0.00

BLE_1M_TX_CH_39_Horizontal-Avg

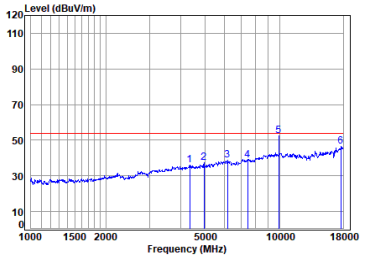

Condition: 3m HORIZONTAL
Job No : 00152AT\00153AT
Mode : 2480 TX RSE
: BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4354.454	8.18	30.85	53.01	50.01	36.03	54.00	-17.97	Average	0.00
2	4960.000	8.32	32.26	53.19	50.14	37.53	54.00	-16.47	Average	0.00
3	6177.627	8.29	34.17	53.28	49.50	38.68	54.00	-15.32	Average	0.00
4	7440.000	9.14	36.90	53.66	46.53	38.91	54.00	-15.09	Average	0.00
5 pp	9920.000	11.86	38.86	54.08	56.01	52.65	54.00	-1.35	Average	0.00
6	17639.470	14.45	39.86	51.57	43.89	46.63	54.00	-7.37	Average	0.00

BLE_1M_TX_CH_39_Vertical-Peak

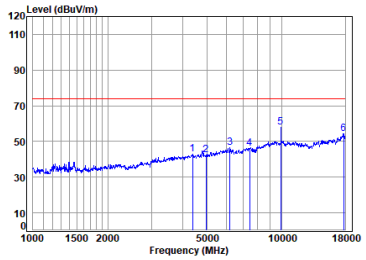

Condition: 3m VERTICAL
Job No : 00152AT\00153AT
Mode : 2480 TX RSE
: BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4379.699	8.15	31.16	53.02	56.53	42.82	74.00	-31.18	Peak	0.00
2	4960.000	8.32	32.26	53.19	54.86	42.25	74.00	-31.75	Peak	0.00
3	6195.508	8.32	34.27	53.28	57.40	46.71	74.00	-27.29	Peak	0.00
4	7440.000	9.14	36.90	53.66	53.81	46.19	74.00	-27.81	Peak	0.00
5 pp	9920.000	11.86	38.86	54.08	61.11	57.75	74.00	-16.25	Peak	0.00
6	17741.740	14.46	40.14	51.55	51.18	54.23	74.00	-19.77	Peak	0.00

BLE_1M_TX_CH_39_Vertical-Avg

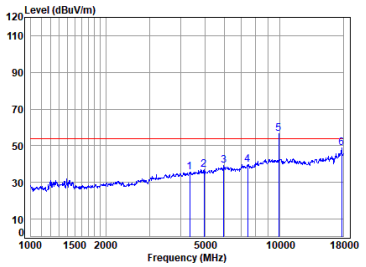

Site : chamber
Condition: 3m VERTICAL
Job No : 00152AT\00153AT
Mode : 2480 TX RSE
: BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4354.454	0.00	0.00	0.00	35.67	35.67	54.00	-18.33	Average	0.00
2	4960.000	0.00	0.00	0.00	36.75	36.75	54.00	-17.25	Average	0.00
3	5967.033	0.00	0.00	0.00	39.09	39.09	54.00	-14.91	Average	0.00
4	7440.000	0.00	0.00	0.00	39.60	39.60	54.00	-14.40	Average	0.00
5	9920.000	0.00	0.00	0.00	56.55	56.55	------	------	Average	0.00
6 q	17741.740	0.00	0.00	0.00	48.61	48.61	54.00	-5.39	Average	0.00

BLE_2M_TX_CH_00_Horizontal-Peak

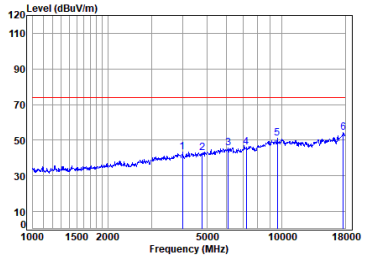

Condition: 3m HORIZONTAL
Job No : 00152AT\00153AT
Mode : 2402 TX RSE
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	3992.781	8.68	30.60	52.90	57.19	43.57	74.00	-30.43	Peak	0.00
2	4804.000	8.21	31.98	53.15	56.07	43.11	74.00	-30.89	Peak	0.00
3	6106.616	8.19	34.00	53.29	56.77	45.67	74.00	-28.33	Peak	0.00
4	7206.000	8.83	36.06	53.42	54.43	45.90	74.00	-28.10	Peak	0.00
5	9608.000	11.93	38.52	54.02	54.87	51.30	74.00	-22.70	Peak	0.00
6	pp17690.530	14.45	40.06	51.56	51.24	54.19	74.00	-19.81	Peak	0.00

BLE_2M_TX_CH_00_Horizontal-Avg

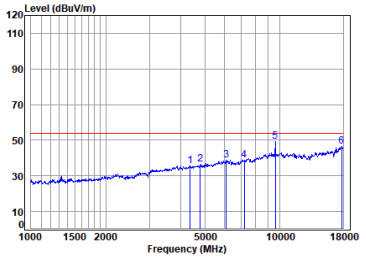

Condition: 3m HORIZONTAL
Job No : 00152AT\00153AT
Mode : 2402 TX RSE
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4367.058	8.17	31.01	53.02	49.45	35.61	54.00	-18.39	Average	0.00
2	4804.000	8.21	31.98	53.15	49.57	36.61	54.00	-17.39	Average	0.00
3	6106.616	8.19	34.00	53.29	49.76	38.66	54.00	-15.34	Average	0.00
4	7206.000	8.83	36.06	53.42	47.51	38.98	54.00	-15.02	Average	0.00
5	pp 9608.000	11.93	38.52	54.02	52.76	49.19	54.00	-4.81	Average	0.00
6	17741.740	14.46	40.14	51.55	43.57	46.62	54.00	-7.38	Average	0.00

BLE_2M_TX_CH_00_Vertical-Peak

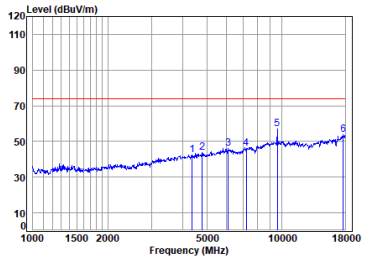

Condition: 3m VERTICAL
Job No : 00152AT\00153AT
Mode : 2402 TX RSE
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4367.058	8.17	31.01	53.02	56.31	42.47	74.00	-31.53	Peak	0.00
2	4804.000	8.21	31.98	53.15	56.68	43.72	74.00	-30.28	Peak	0.00
3	6088.991	8.17	33.89	53.29	57.38	46.15	74.00	-27.85	Peak	0.00
4	7206.000	8.83	36.06	53.42	54.62	46.09	74.00	-27.91	Peak	0.00
5	pp 9608.000	11.93	38.52	54.02	60.40	56.83	74.00	-17.17	Peak	0.00
6	17690.530	14.45	40.06	51.56	50.78	53.73	74.00	-20.27	Peak	0.00

BLE_2M_TX_CH_00_Vertical-Avg

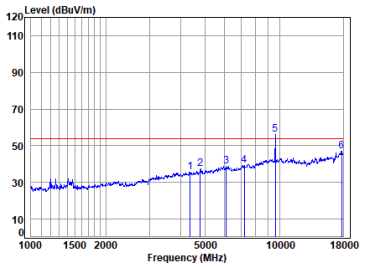

Site : chamber
Condition: 3m VERTICAL
Job No : 00152AT\00153AT
Mode : 2402 TX RSE
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4367.058	0.00	0.00	0.00	35.78	35.78	54.00	-18.22	Average	0.00
2	4804.000	0.00	0.00	0.00	37.32	37.32	54.00	-16.68	Average	0.00
3	6106.616	0.00	0.00	0.00	38.87	38.87	54.00	-15.13	Average	0.00
4	7206.000	0.00	0.00	0.00	39.29	39.29	54.00	-14.71	Average	0.00
5	9608.000	0.00	0.00	0.00	56.17	56.17	------	------	Average	0.00
6	q17741.740	0.00	0.00	0.00	47.01	47.01	54.00	-6.99	Average	0.00

BLE_2M_TX_CH_19_Horizontal-Peak

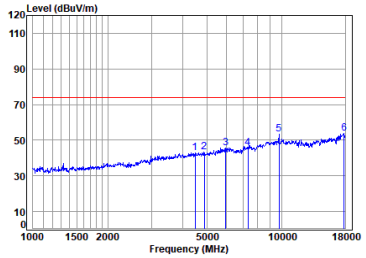

Condition: 3m HORIZONTAL
Job No : 00152AT\00153AT
Mode : 2440 TX RSE
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4495.125	7.99	30.92	53.06	56.89	42.74	74.00	-31.26	Peak	0.00
2	4880.000	8.26	32.06	53.17	56.27	43.42	74.00	-30.58	Peak	0.00
3	5967.033	8.07	33.70	53.30	57.27	45.74	74.00	-28.26	Peak	0.00
4	7320.000	8.98	36.14	53.53	53.96	45.55	74.00	-28.45	Peak	0.00
5	9760.000	11.90	38.32	54.05	57.41	53.58	74.00	-20.42	Peak	0.00
6	pp17793.090	14.47	40.19	51.54	50.84	53.96	74.00	-20.04	Peak	0.00

BLE_2M_TX_CH_19_Horizontal-Avg

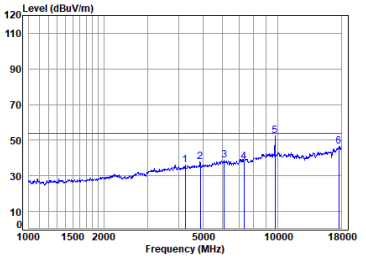

Condition: 3m HORIZONTAL
Job No : 00152AT\00153AT
Mode : 2440 TX RSE
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4254.921	8.33	31.11	52.98	49.46	35.92	54.00	-18.08	Average	0.00
2	4880.000	8.26	32.06	53.17	50.51	37.66	54.00	-16.34	Average	0.00
3	6088.991	8.17	33.89	53.29	49.87	38.64	54.00	-15.36	Average	0.00
4	7320.000	8.98	36.14	53.53	46.50	38.09	54.00	-15.91	Average	0.00
5	pp 9760.000	11.90	38.32	54.05	56.13	52.30	54.00	-1.70	Average	0.00
6	17639.470	14.45	39.86	51.57	43.65	46.39	54.00	-7.61	Average	0.00

BLE_2M_TX_CH_19_Vertical-Peak

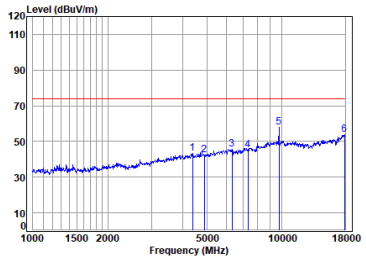

Condition: 3m VERTICAL
Job No : 00152AT\00153AT
Mode : 2440 TX RSE
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4379.699	8.15	31.16	53.02	56.86	43.15	74.00	-30.85	Peak	0.00
2	4880.000	8.26	32.06	53.17	55.50	42.65	74.00	-31.35	Peak	0.00
3	6322.136	8.49	34.30	53.27	56.33	45.85	74.00	-28.15	Peak	0.00
4	7320.000	8.98	36.14	53.53	53.43	45.02	74.00	-28.98	Peak	0.00
5	pp 9760.000	11.90	38.32	54.05	61.68	57.85	74.00	-16.15	Peak	0.00
6	17896.250	14.48	41.55	51.52	49.34	53.85	74.00	-20.15	Peak	0.00

BLE_2M_TX_CH_19_Vertical-Avg

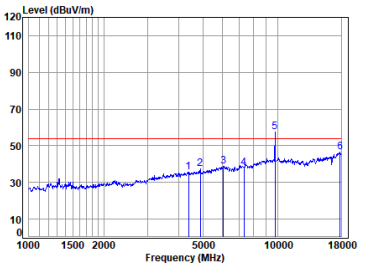

Site : chamber
Condition: 3m VERTICAL
Job No : 00152AT\00153AT
Mode : 2440 TX RSE
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4379.699	0.00	0.00	0.00	35.80	35.80	54.00	-18.20	Average	0.00
2	4880.000	0.00	0.00	0.00	37.26	37.26	54.00	-16.74	Average	0.00
3	6053.894	0.00	0.00	0.00	38.64	38.64	54.00	-15.36	Average	0.00
4	7320.000	0.00	0.00	0.00	37.98	37.98	54.00	-16.02	Average	0.00
5	9760.000	0.00	0.00	0.00	57.59	57.59	------	------	Average	0.00
6	q17844.590	0.00	0.00	0.00	46.46	46.46	54.00	-7.54	Average	0.00

BLE_2M_TX_CH_39_Horizontal-Peak

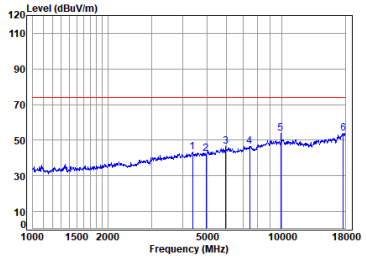

Condition: 3m HORIZONTAL
Job No : 00152AT\00153AT
Mode : 2480 TX RSE
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4379.699	8.15	31.16	53.02	57.05	43.34	74.00	-30.66	Peak	0.00
2	4960.000	8.32	32.26	53.19	55.09	42.48	74.00	-31.52	Peak	0.00
3	5949.811	8.09	33.90	53.30	57.68	46.37	74.00	-27.63	Peak	0.00
4	7440.000	9.14	36.90	53.66	53.94	46.32	74.00	-27.68	Peak	0.00
5	9920.000	11.86	38.86	54.08	57.03	53.67	74.00	-20.33	Peak	0.00
6	pp17690.530	14.45	40.06	51.56	50.80	53.75	74.00	-20.25	Peak	0.00

BLE_2M_TX_CH_39_Horizontal-Avg

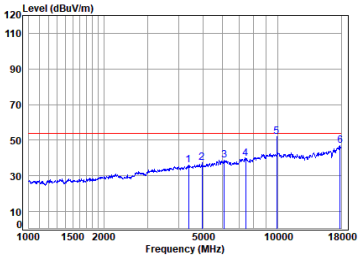

Condition: 3m HORIZONTAL
Job No : 00152AT\00153AT
Mode : 2480 TX RSE
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4379.699	8.15	31.16	53.02	49.53	35.82	54.00	-18.18	Average	0.00
2	4960.000	8.32	32.26	53.19	49.86	37.25	54.00	-16.75	Average	0.00
3	6088.991	8.17	33.89	53.29	49.91	38.68	54.00	-15.32	Average	0.00
4	7440.000	9.14	36.90	53.66	47.38	39.76	54.00	-14.24	Average	0.00
5	pp 9920.000	11.86	38.86	54.08	55.60	52.24	54.00	-1.76	Average	0.00
6	17793.090	14.47	40.19	51.54	43.73	46.85	54.00	-7.15	Average	0.00

BLE_2M_TX_CH_39_Vertical-Peak

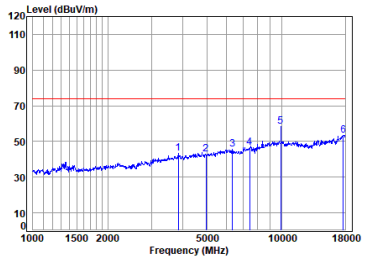

Condition: 3m VERTICAL
Job No : 00152AT\00153AT
Mode : 2480 TX RSE
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	3845.537	8.12	30.29	52.90	57.62	43.13	74.00	-30.87	Peak	0.00
2	4960.000	8.32	32.26	53.19	55.50	42.89	74.00	-31.11	Peak	0.00
3	6340.436	8.52	33.97	53.26	56.25	45.48	74.00	-28.52	Peak	0.00
4	7440.000	9.14	36.90	53.66	54.21	46.59	74.00	-27.41	Peak	0.00
5	pp 9920.000	11.86	38.86	54.08	61.64	58.28	74.00	-15.72	Peak	0.00
6	17690.530	14.45	40.06	51.56	50.59	53.54	74.00	-20.46	Peak	0.00

BLE_2M_TX_CH_39_Vertical-Avg

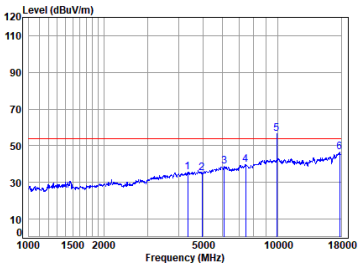

Site : chamber
Condition: 3m VERTICAL
Job No : 00152AT\00153AT
Mode : 2480 TX RSE
: BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4354.454	0.00	0.00	0.00	35.65	35.65	54.00	-18.35	Average	0.00
2	4960.000	0.00	0.00	0.00	35.23	35.23	54.00	-18.77	Average	0.00
3	6088.991	0.00	0.00	0.00	38.95	38.95	54.00	-15.05	Average	0.00
4	7440.000	0.00	0.00	0.00	39.61	39.61	54.00	-14.39	Average	0.00
5	9920.000	0.00	0.00	0.00	56.64	56.64	------	------	Average	0.00
6	q17741.740	0.00	0.00	0.00	46.32	46.32	54.00	-7.68	Average	0.00

6.4 Maximum Conducted Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method: ANSI C63.10-2020+Cor.1-2023 Section 11.9.1
Test Engineer: Mingli Hu

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥50 hopping channels
	0.25 for 25≤ hopping channels <50
	1 for digital modulation
2400-2483.5	1 for ≥75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

6.4.1 E.U.T. Operation

Operating Environment:
Temperature: 26.3 °C Humidity: 45.5 % RH Atmospheric Pressure: 1000 mbar

6.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	04	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

6.4.3 Test Setup Diagram

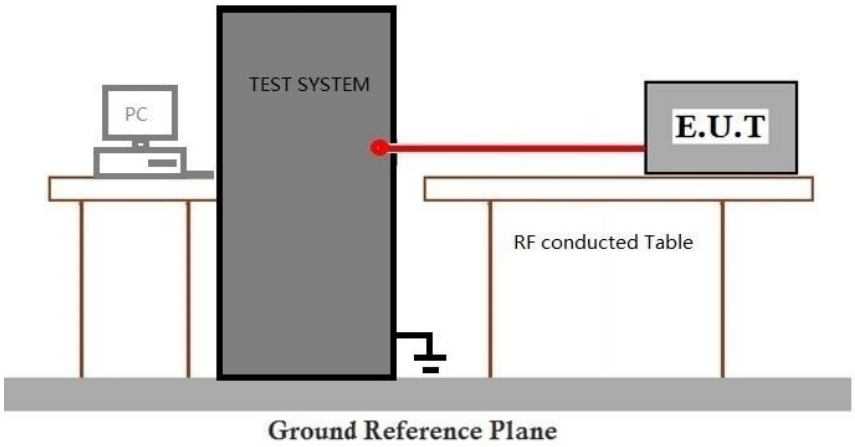

6.4.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

6.5 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10-2020+Cor.1-2023 Section 6.10.4
Test Engineer: Mingli Hu

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c).

6.5.1 E.U.T. Operation

Operating Environment:

Temperature: 26.5 °C Humidity: 45.5 % RH Atmospheric Pressure: 1000 mbar

6.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	04	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

6.5.3 Test Setup Diagram

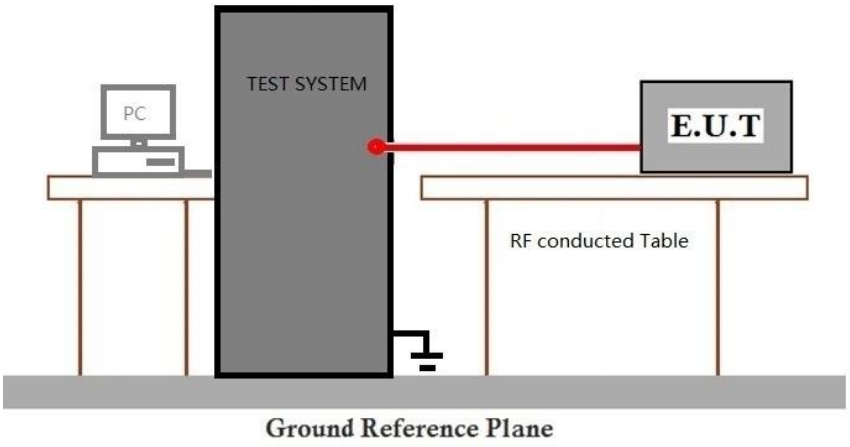

6.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

6.6 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10-2020+Cor.1-2023 Section 11.11
Test Engineer: Mingli Hu

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c).

6.6.1 E.U.T. Operation

Operating Environment:

Temperature: 26.5 °C Humidity: 45.5 % RH Atmospheric Pressure: 1000 mbar

6.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	04	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

6.6.3 Test Setup Diagram

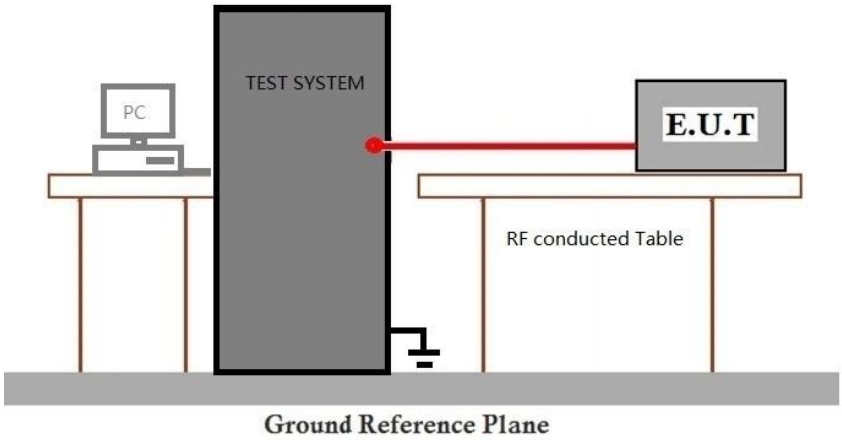

6.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7 Test Setup Photo

Refer to Appendix - Test Setup Photos for FYCR2606000152AT

8 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for FYCR2606000152AT

9 Appendix

1. Maximum Conducted Output Power

1.1 Test Result

1.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	4.48	<=30	Pass
		2440	3.93	<=30	Pass
		2480	4.03	<=30	Pass
2M	SISO	2402	4.35	<=30	Pass
		2440	3.83	<=30	Pass
		2480	3.94	<=30	Pass
Note1: Antenna Gain: Ant1: 1.94dBi;					

2. Unwanted Emissions In Non-restricted Frequency Bands

2.1 Test Result

2.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	2.34
		2440	1	1.79
		2480	1	1.90
2M	SISO	2402	1	1.96
		2440	1	1.43
		2480	1	1.56

5.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	2.34	-17.66	Pass
		2440	1	2.34	-17.66	Pass
		2480	1	2.34	-17.66	Pass
2M	SISO	2402	1	1.96	-18.04	Pass
		2440	1	1.96	-18.04	Pass
		2480	1	1.96	-18.04	Pass

2.2 Test Graph

2.2.1 Ref

1M_LCH_2402MHz_Ant1_NTNV
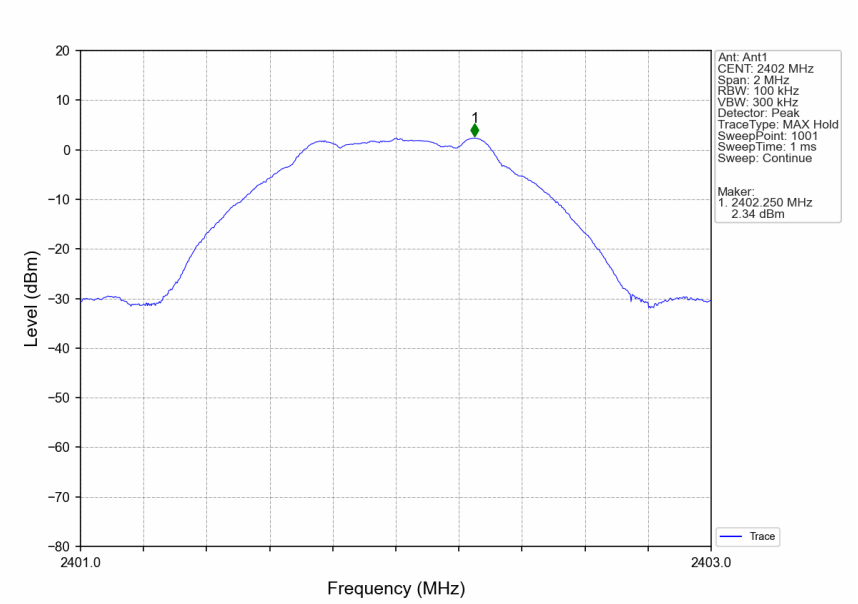

1M_MCH_2440MHz_Ant1_NTNV
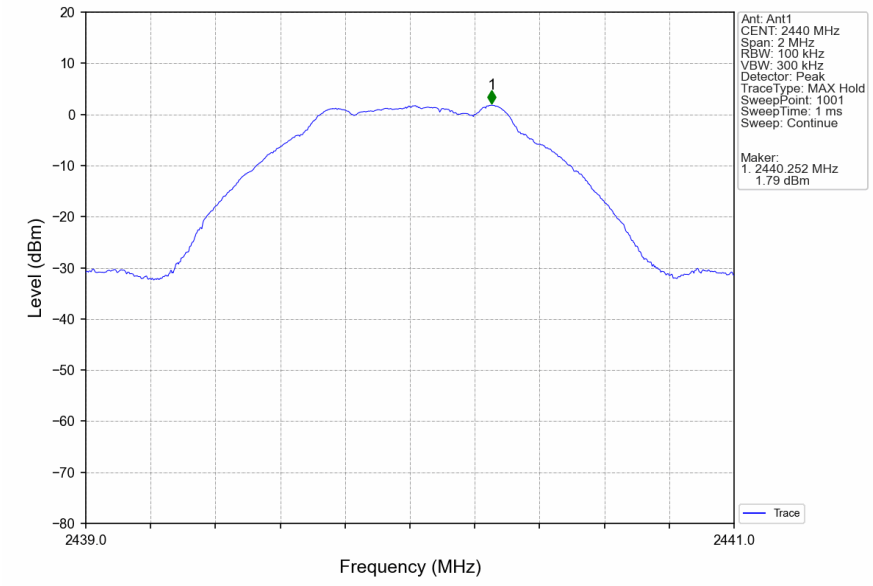

1M_HCH_2480MHz_Ant1_NTNV

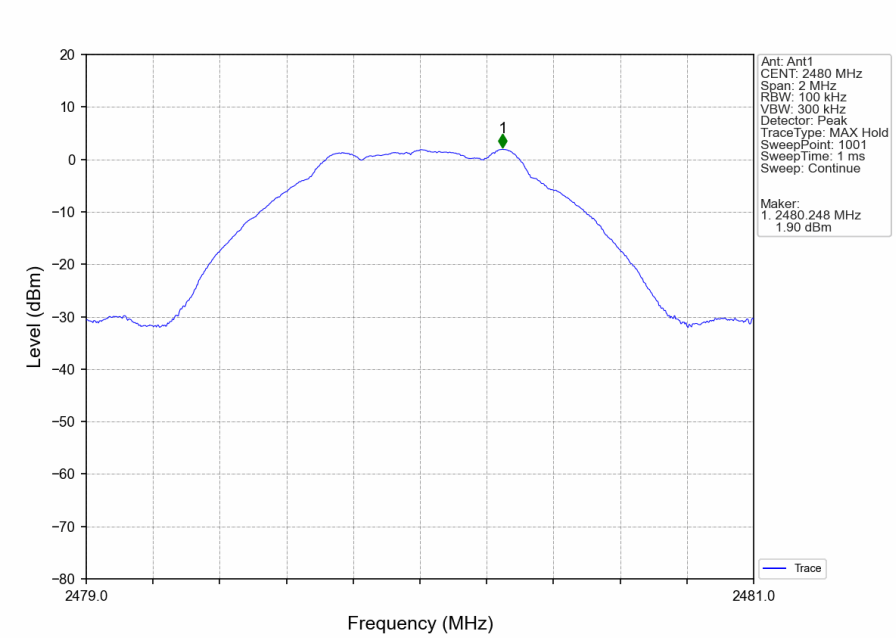

2M_LCH_2402MHz_Ant1_NTNV

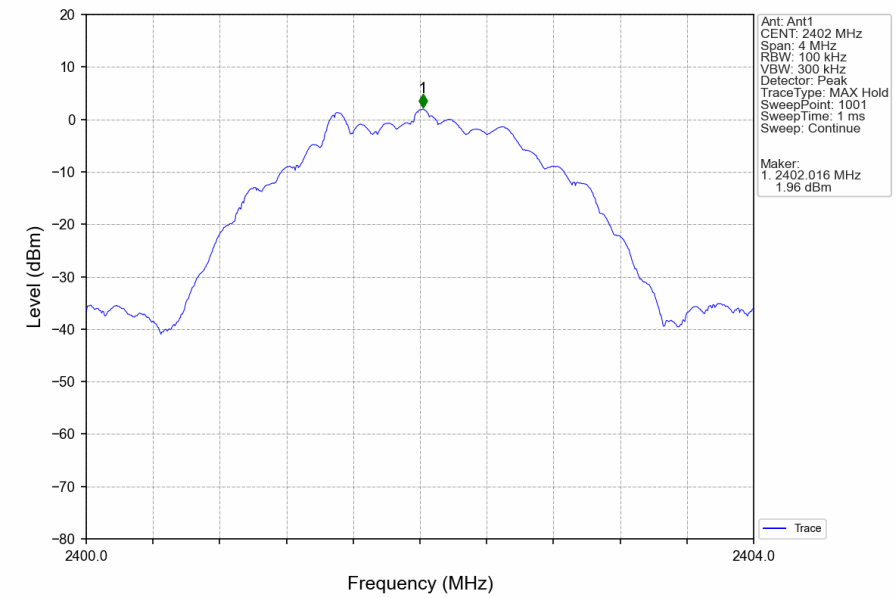

2M_MCH_2440MHz_Ant1_NTNV

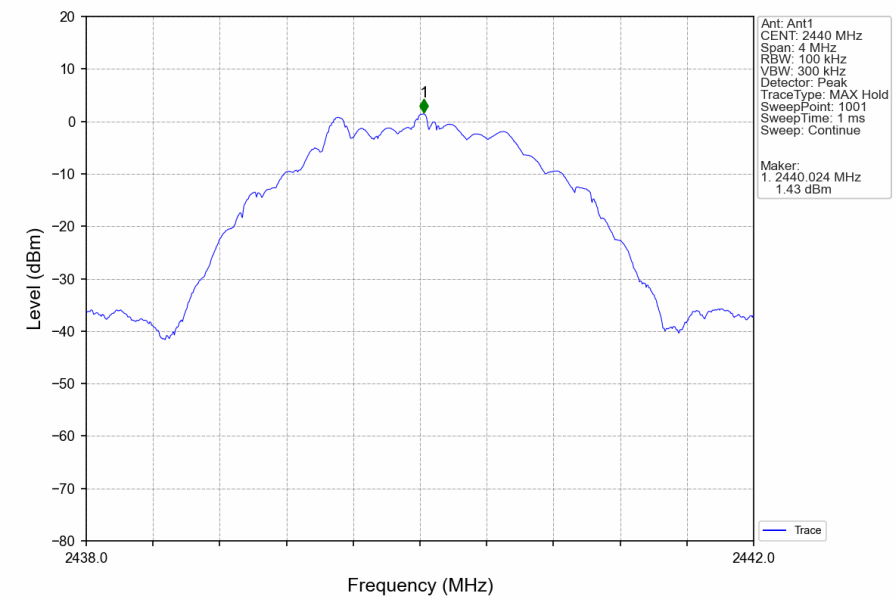

2M_HCH_2480MHz_Ant1_NTNV

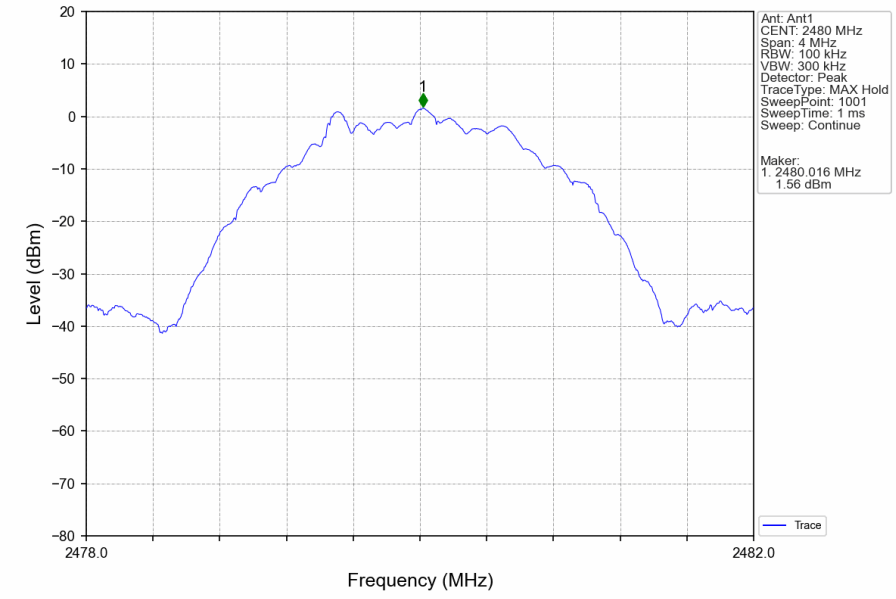

2.2.2 CSE

1M_LCH_2402MHz_Ant1_NTNV

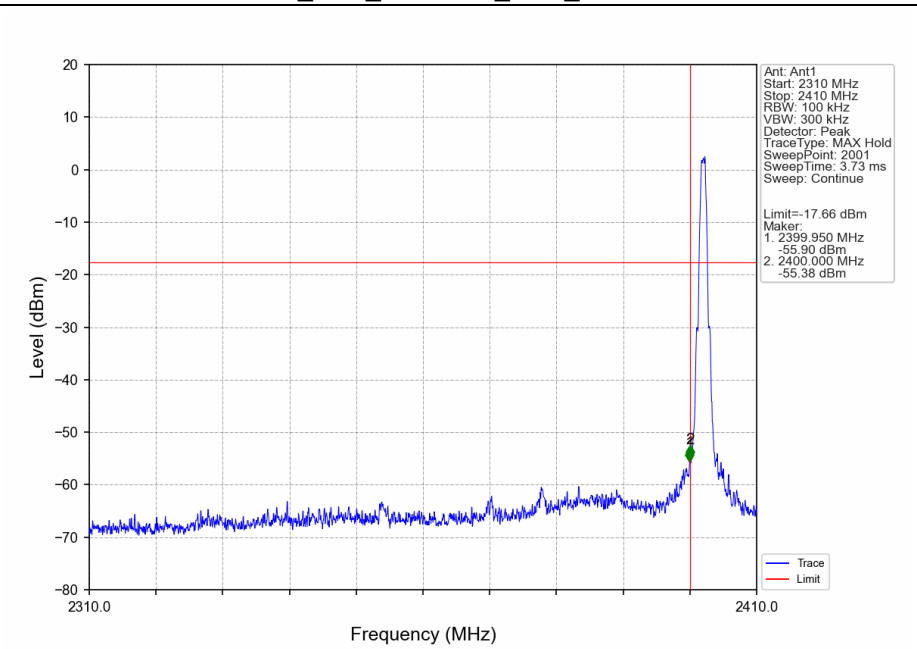

1M_LCH_2402MHz_Ant1_NTNV

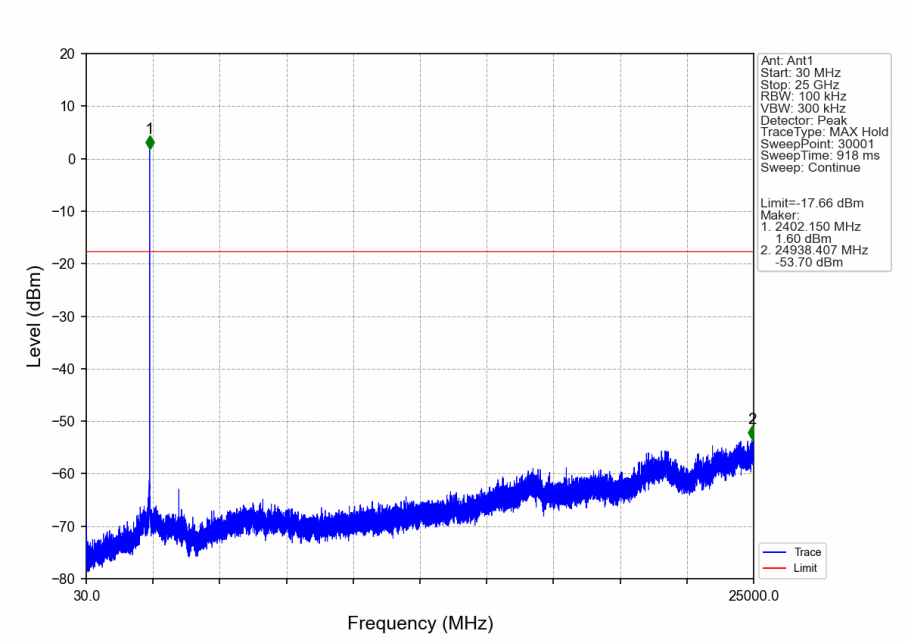

1M_MCH_2440MHz_Ant1_NTNV

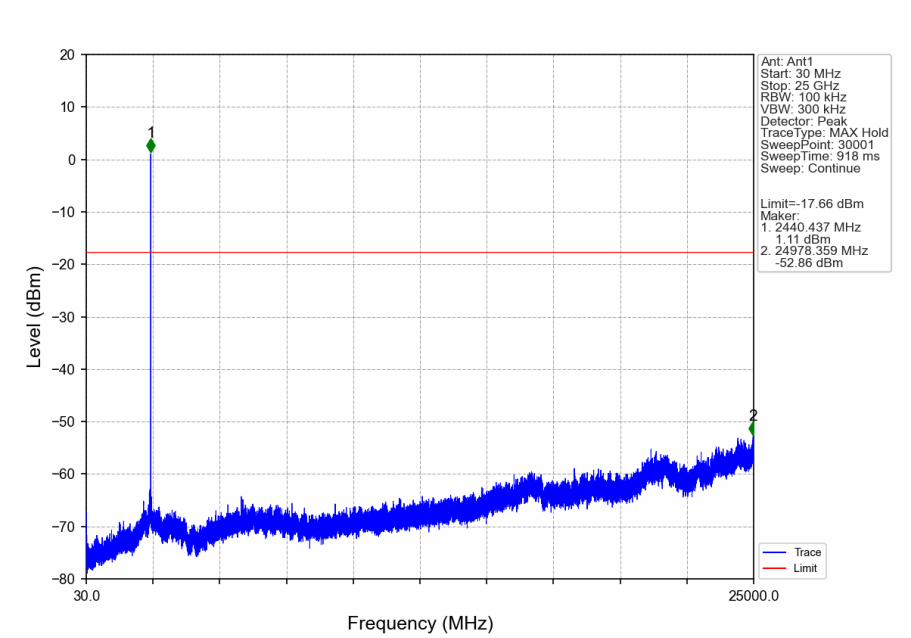

1M_HCH_2480MHz_Ant1_NTNV

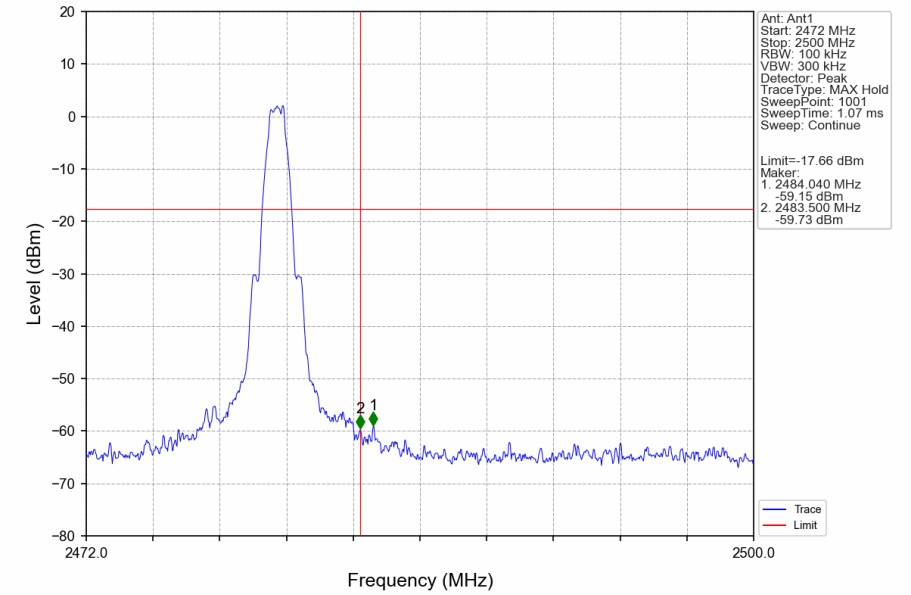

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistrict, Bao'an, Shenzhen, China 518103 t (86–755) 88663988 f (86–755) 26710594 www.sgsgroup.com.cn
中国·深圳·宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86–755) 88663988 f (86–755) 26710594 sgs.china@sgs.com

1M_HCH_2480MHz_Ant1_NTNV

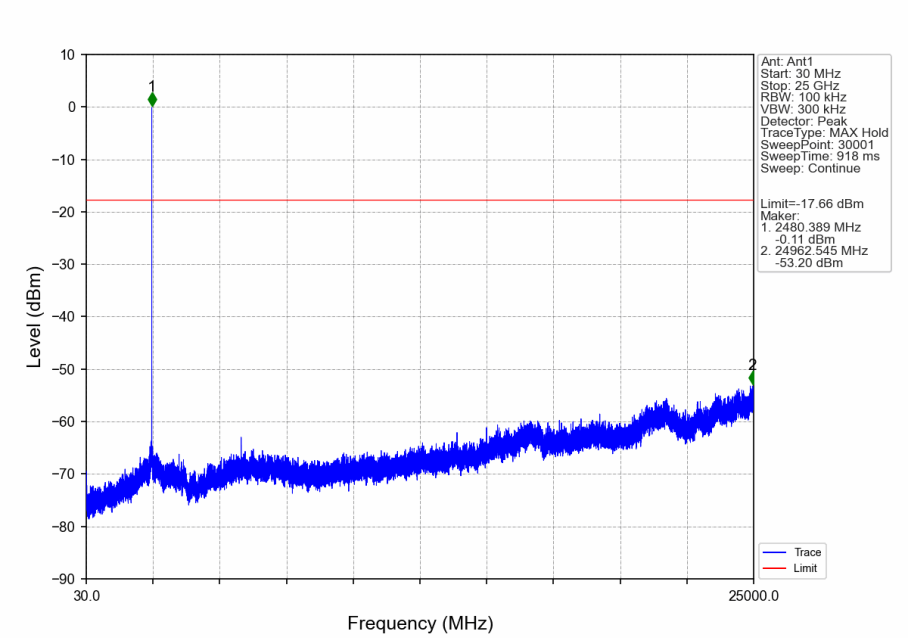

2M_LCH_2402MHz_Ant1_NTNV

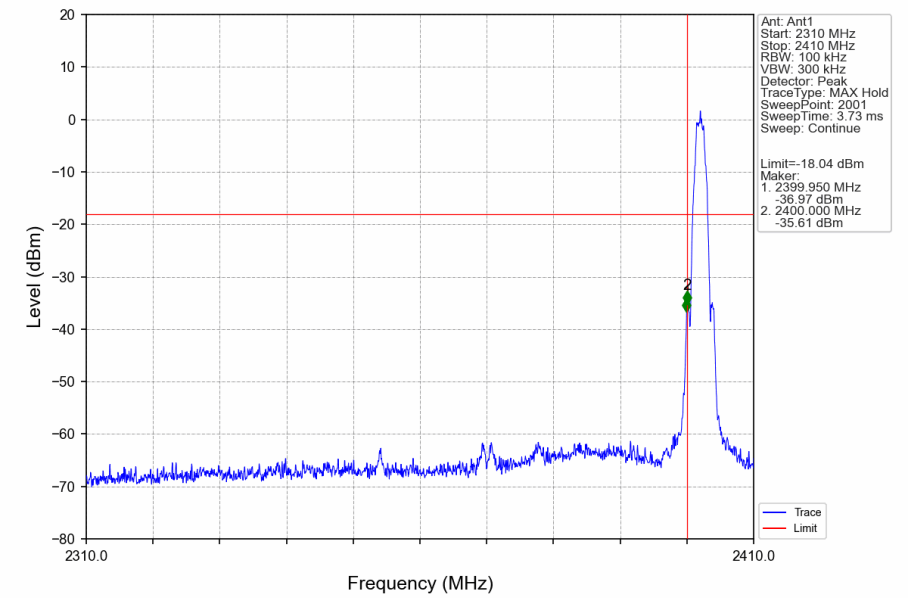

2M_LCH_2402MHz_Ant1_NTNV

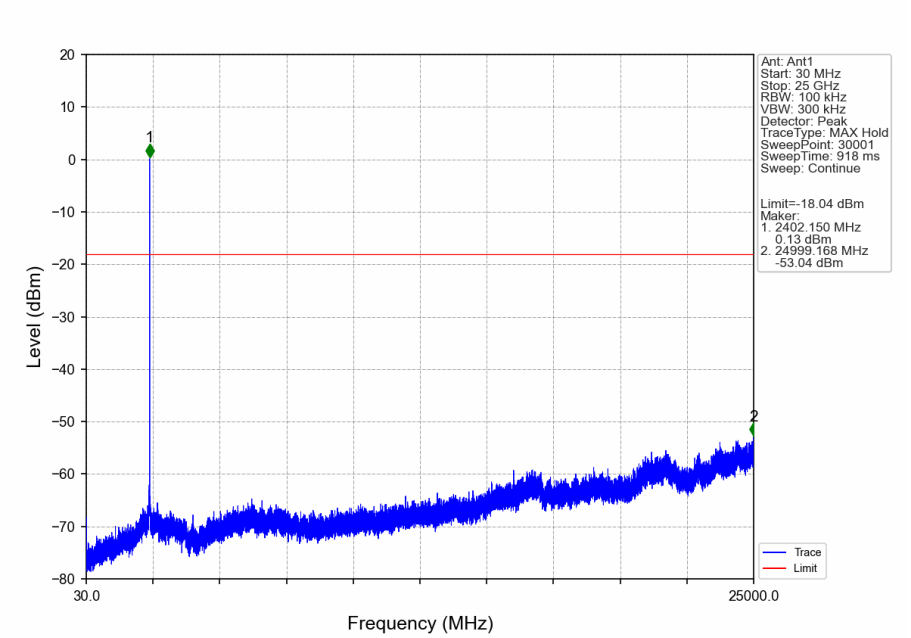

2M_MCH_2440MHz_Ant1_NTNV

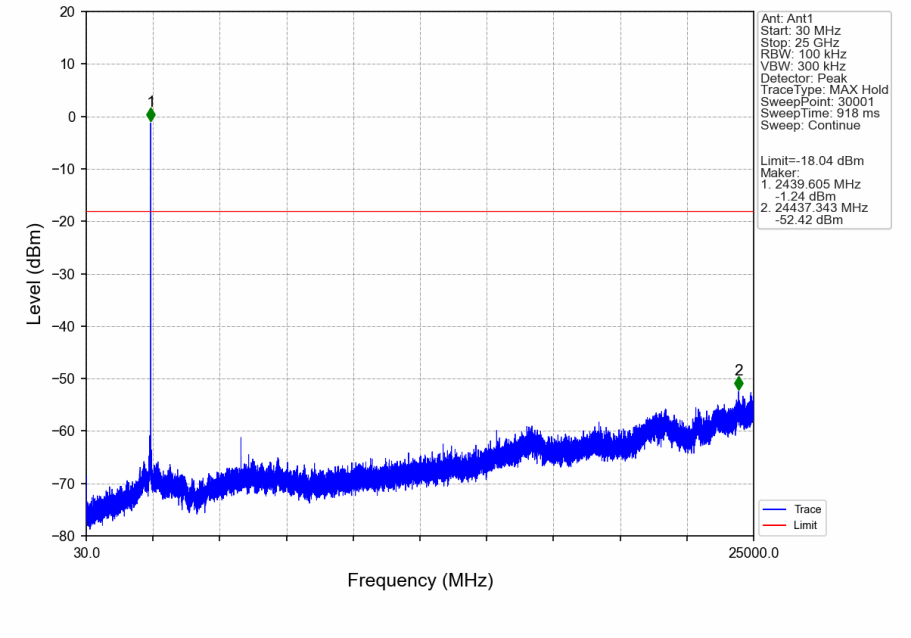

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistrict, Bao'an, Shenzhen, China 518103 t (86–755) 88663988 f (86–755) 26710594 www.sgsgroup.com.cn
中国·深圳·宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86–755) 88663988 f (86–755) 26710594 sgs.china@sgs.com

2M_HCH_2480MHz_Ant1_NTNV

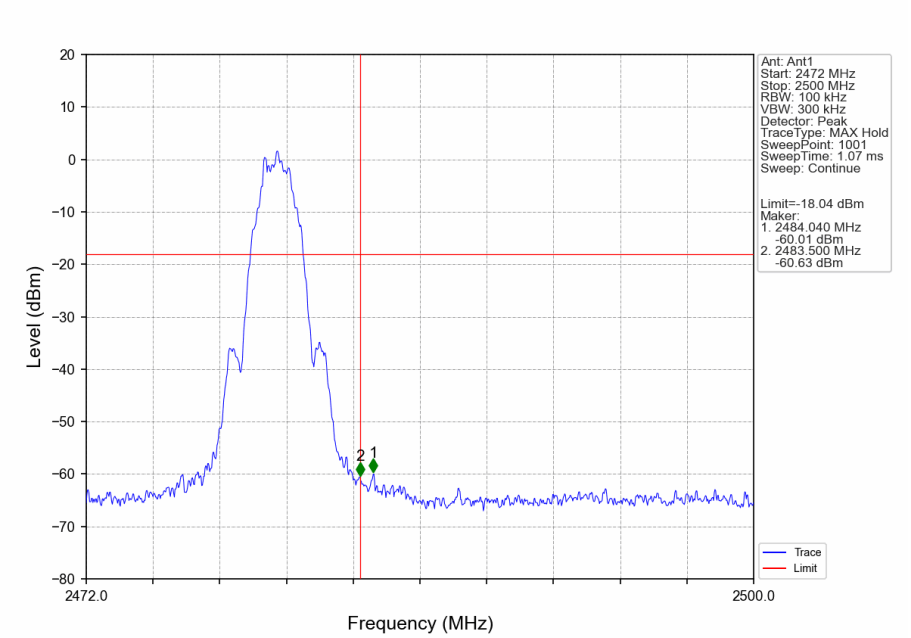

2M_HCH_2480MHz_Ant1_NTNV

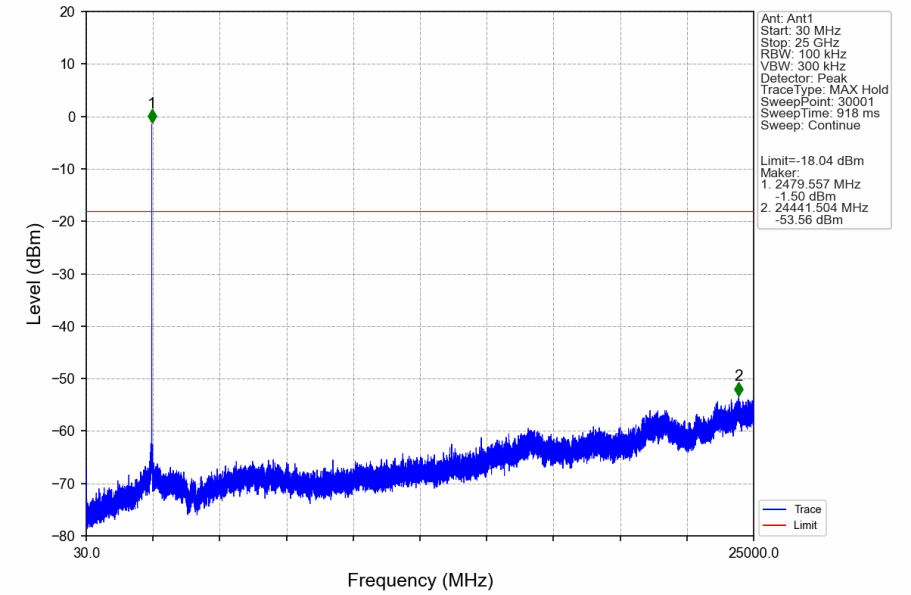

- End of the Report -

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistrict, Bao'an, Shenzhen, China 518103 t (86–755) 88663988 f (86–755) 26710594 www.sgsgroup.com.cn
中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86–755) 88663988 f (86–755) 26710594 sgs.china@sgs.com