




FCC Radio Test Report


FCC ID: RWO-RZ010253

This report concerns: Original Grant

Project No. : 2508C464
Equipment : Gaming Mouse
Brand Name : 
Model Name : RZ01-0253, RZ01-0253XXXX-XXXX (X can be 0-9 or A-Z)
Applicant : Razer Inc.
Address : 9 Pasteur, Irvine, CA 92618, USA
Manufacturer : RAZER (ASIA-PACIFIC) PTE. LTD.
Address : Razer SEA HQ, 1 One-north Crescent, #02-01, Singapore 138538
Factory : RAZER TECHNOLOGY AND DEVELOPMENT (SHENZHEN) CO., LTD
Address : East Wing, 3rd Floor, Block 2, Phase 1 of Vision Shenzhen Business Park
 Keji South Road, Hi-Tech Industrial Park, Shenzhen 518057, China
Date of Receipt : Aug. 18, 2025
Date of Test : Aug. 18, 2025 ~ Oct. 31, 2025
Issued Date : Dec. 08, 2025
Test Sample : Engineering Sample No.: DG920250818143
Standard(s) : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by : 
 Chella Zheng

Approved by : 
 Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.
 Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	5
1 . APPLICABLE STANDARDS	6
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
2.3 TEST ENVIRONMENT CONDITIONS	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 SUPPORT UNITS	10
3.5 CUSTOMER INFORMATION DESCRIPTION	10
4 . AC POWER LINE CONDUCTED EMISSIONS TEST	11
4.1 LIMIT	11
4.2 TEST PROCEDURE	11
4.3 DEVIATION FROM TEST STANDARD	11
4.4 TEST SETUP	12
4.5 EUT OPERATING CONDITIONS	12
4.6 TEST RESULTS	12
5 . RADIATED EMISSION TEST	13
5.1 LIMIT	13
5.2 TEST PROCEDURE	13
5.3 DEVIATION FROM TEST STANDARD	13
5.4 TEST SETUP	14
5.5 EUT OPERATING CONDITIONS	15
5.6 TEST RESULT - 9 KHZ TO 30 MHZ	15
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	15
6 . BANDWIDTH	16
6.1 LIMIT	16
6.2 TEST PROCEDURE	16
6.3 DEVIATION FROM STANDARD	16
6.4 TEST SETUP	16
6.5 EUT OPERATION CONDITIONS	16

Table of Contents**Page**

6.6 TEST RESULTS	16
7 . MEASUREMENT INSTRUMENTS LIST	17
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	18
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	21
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	26
APPENDIX D - BANDWIDTH	29

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-4-2508C464	R00	Original Report.	Nov. 07, 2025	Invalid
BTL-FCCP-4-2508C464	R01	It is a revision of the report BTL-FCCP-4-2508C464 R00, with the following revisions: a. According to C63.10:2020 and the requirements of the 2025 Autumn Workshop, the spectrum diagram of the unacceptable read points is required. So re-provide a complete spectrum diagram of radiated emission 30MHz to 1000MHz. b. Added the antenna information on page 8. This is a newly released report, replacing the BTL-FCCP-4-2508C464 R00 report.	Dec. 08, 2025	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standard :

ANSI C63.10-2020

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C	PASS	-----
15.215(c)	Bandwidth	APPENDIX D	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

NOTE:

- (1) "N/A" denotes test is not applicable to this device.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions Measurement:

Test Site	Method	Measurement Frequency Range	U_i (Db)
DGDLC02	CISPR	150kHz ~ 30MHz	1.82

B. Radiated emissions Measurement:

Test Site	Method	Measurement Frequency Range	U_i (Db)
DGDLCB03	CISPR	9kHz ~ 30MHz	2.26

Test Site	Method	Measurement Frequency Range	Ant. H / V	U_i (Db)
DGDLCB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

C. Other Measurement:

Test Item	Uncertainty
Bandwidth	0.75 %
Temperature	0.7 °C
Humidity	1.7 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	23°C	55%	DC 5V	Hayden Chen	Aug. 22, 2025
Radiated Emissions-9kHz to 30MHz	22°C	50%	DC 5V	Hayden Chen	Sep. 18, 2025
Radiated Emissions-30MHz to 1000MHz	25°C	54%	DC 5V	Calvin Wen	Sep. 18, 2025
Bandwidth	23°C	56%	DC 5V	Jayden Li	Sep. 19, 2025

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Gaming Mouse
Brand Name	 RAZER,
Test Model	RZ01-0253
Model Name	RZ01-0253, RZ01-0253XXXX-XXXX (X can be 0-9 or A-Z)
Model Difference(s)	Only differ in the model name.
Hardware Version	V0.00.40
Software Version	V1.0
Power Source	For Gaming Mouse: 1# Supplied from Wireless Charging Dock. Model: RC21-019901 2# Supplied from battery. Model: PL642930 For Wireless Charging Dock: 1# Supplied from Type-C Port.
Power Rating	For Gaming Mouse: 1# 5V $\overline{=}$ 500Ma 2# DC 3.7V 600mAh 2.22Wh For Wireless Charging Dock: 1#5V $\overline{=}$ 1.5A
Operation Frequency	110.5 kHz ~ 205 kHz

Note:

- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
- The system's model name is RZ01-0253XXXX-XXXX (X: Can be 0-9, A-Z), and the system contains a Gaming Mouse (Model name:RZ01-0253) and Wireless Charging Dock (Model name: RC21-019901).
- Output power from primary coil is to 2.5 watts (MAX).
- Mobile exposure conditions only.
- Table for Filed Antenna:

Ant.	Manufacturer	P/N	Antenna Type	Operation Frequency
1	DONGGUAN KIMCHEN INDUSTRY INTL LIMITED	J30-000721-001	Loop Coil Antenna	110 kHz ~ 205 kHz

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 1	TX Mode


Radiated emissions test	
Final Test Mode	Description
Mode 1	TX Mode

Bandwidth test	
Final Test Mode	Description
Mode 1	TX Mode

Note:

- 1) The EUT has the maximum average output power when the support unit is in low power and being charged by EUT.
- 2) For radiated emission test, every axis (X, Y, Z) are verified. The test results shown in the following sections represent the worst case emissions.

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

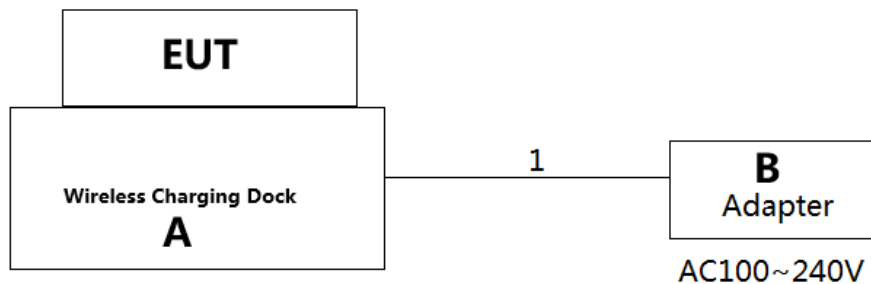

3.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Wireless Charging Dock	RAZER	RC21-019901	N/A
B	Adapter	HW	HW-050100U01	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	USB Cable	NO	NO	1.8m

3.5 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS TEST

4.1 LIMIT

Frequency of Emission (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

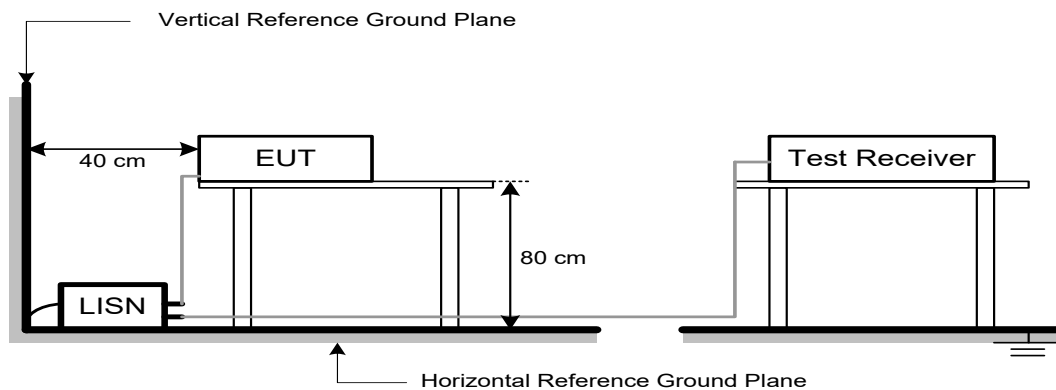

4.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform..In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

5. RADIATED EMISSION TEST

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT(9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- d. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP

9 kHz to 30 MHz

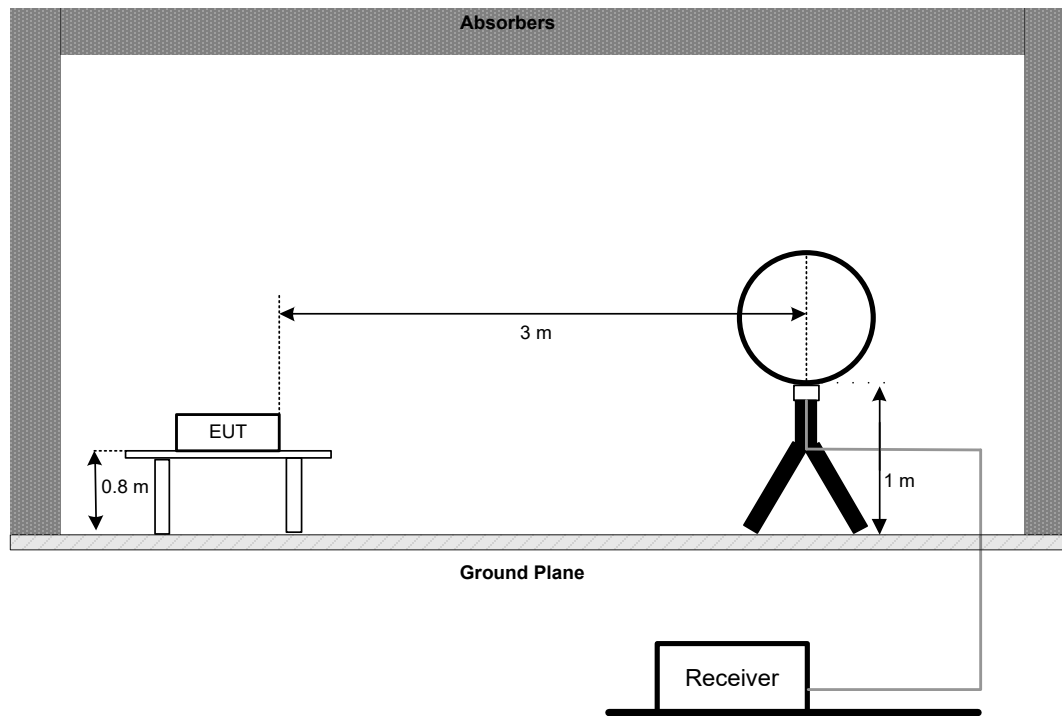

30 MHz to 1 GHz

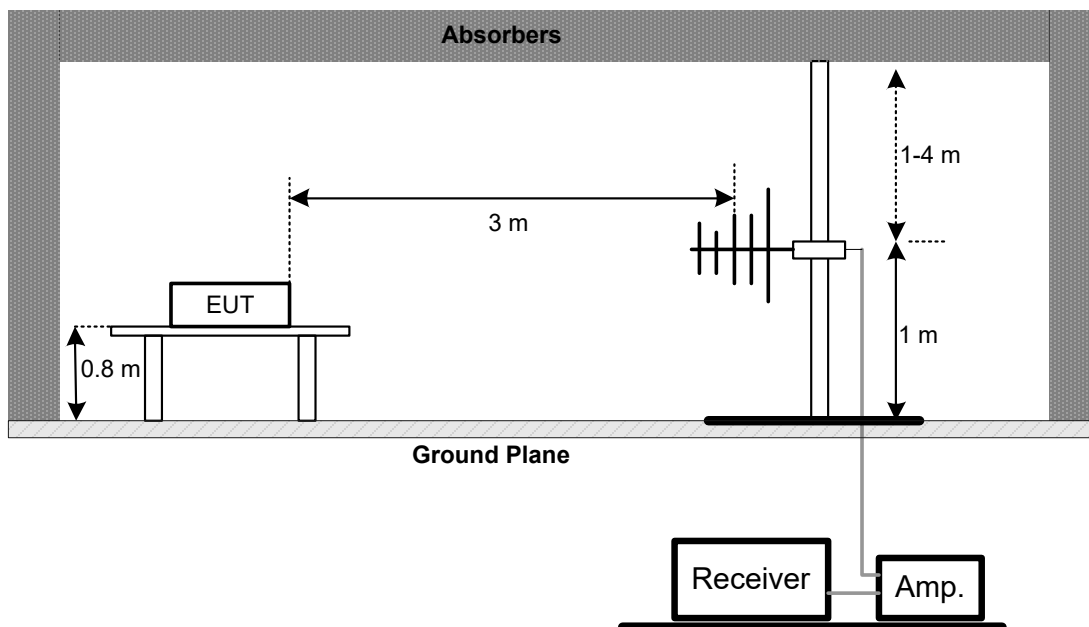

5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT - 9 kHz TO 30 MHz

Please refer to the APPENDIX B

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit
15.215(c)	20 dB Bandwidth	-

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Span Frequency	Between 2 times and 5 times the BW
RBW	Range of 1% to 5% of the BW
VBW	Approximately 3 times RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX D.

7. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 06, 2025
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 06, 2025
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Nov. 11, 2025
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 01, 2026
2	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
3	Cable	RegalWay	LMR400-NMNM-6 m	N/A	Apr. 26, 2026
4	Cable	RegalWay	LMR400-NMRANM -3.5m	N/A	Apr. 26, 2026
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	CM	9*6*6	N/A	May 15, 2026

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec. 14, 2025
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 14, 2025
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 17, 2026
4	Cable	RegalWay	LMR400-NMNM-12.5m	N/A	Jun. 04, 2026
5	Cable	RegalWay	LMR400-NMNM-3 m	N/A	Jun. 04, 2026
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	Jun. 04, 2026
7	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 15, 2026


Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	May 17, 2026
2	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A
3	CTA	BTL	CTA	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX Mode	Phase	Line
-----------	---------	-------	------

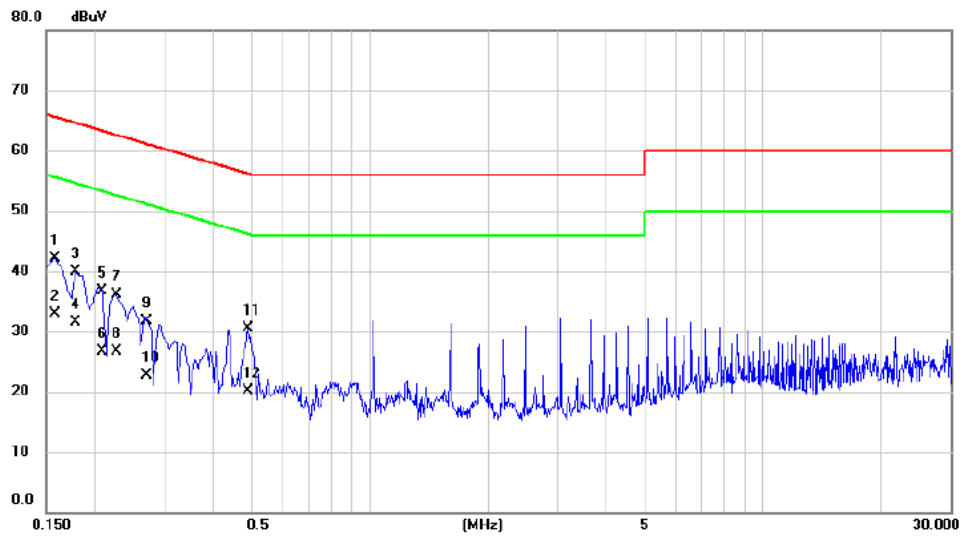


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1580	32.27	9.91	42.18	65.57	-23.39	QP	
2	*	0.1580	22.90	9.91	32.81	55.57	-22.76	AVG	
3		0.1780	30.07	9.92	39.99	64.58	-24.59	QP	
4		0.1780	21.60	9.92	31.52	54.58	-23.06	AVG	
5		0.2083	26.74	9.90	36.64	63.27	-26.63	QP	
6		0.2083	16.80	9.90	26.70	53.27	-26.57	AVG	
7		0.2260	26.27	9.90	36.17	62.60	-26.43	QP	
8		0.2260	16.90	9.90	26.80	52.60	-25.80	AVG	
9		0.2714	21.76	9.92	31.68	61.07	-29.39	QP	
10		0.2714	12.80	9.92	22.72	51.07	-28.35	AVG	
11		0.4900	20.52	9.96	30.48	56.17	-25.69	QP	
12		0.4900	10.20	9.96	20.16	46.17	-26.01	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode	Phase	Neutral
-----------	---------	-------	---------

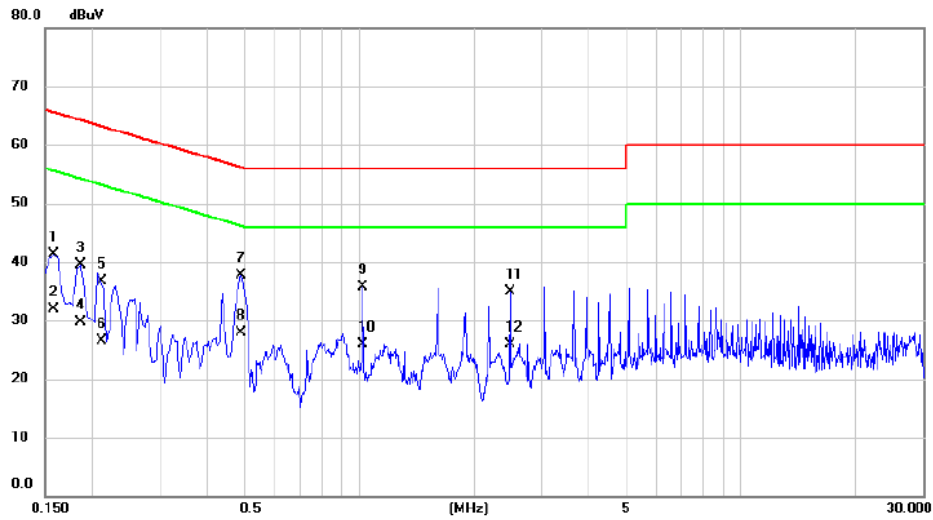

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1580	31.24	9.98	41.22	65.57	-24.35	QP	
2		0.1580	21.90	9.98	31.88	55.57	-23.69	AVG	
3		0.1860	29.54	9.97	39.51	64.21	-24.70	QP	
4		0.1860	19.80	9.97	29.77	54.21	-24.44	AVG	
5		0.2106	26.68	9.97	36.65	63.18	-26.53	QP	
6		0.2106	16.60	9.97	26.57	53.18	-26.61	AVG	
7		0.4900	27.66	10.04	37.70	56.17	-18.47	QP	
8	*	0.4900	17.90	10.04	27.94	46.17	-18.23	AVG	
9		1.0220	25.71	10.08	35.79	56.00	-20.21	QP	
10		1.0220	15.80	10.08	25.88	46.00	-20.12	AVG	
11		2.4820	24.70	10.27	34.97	56.00	-21.03	QP	
12		2.4820	15.70	10.27	25.97	46.00	-20.03	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX Mode	Polarization	Ant 0°
-----------	---------	--------------	--------

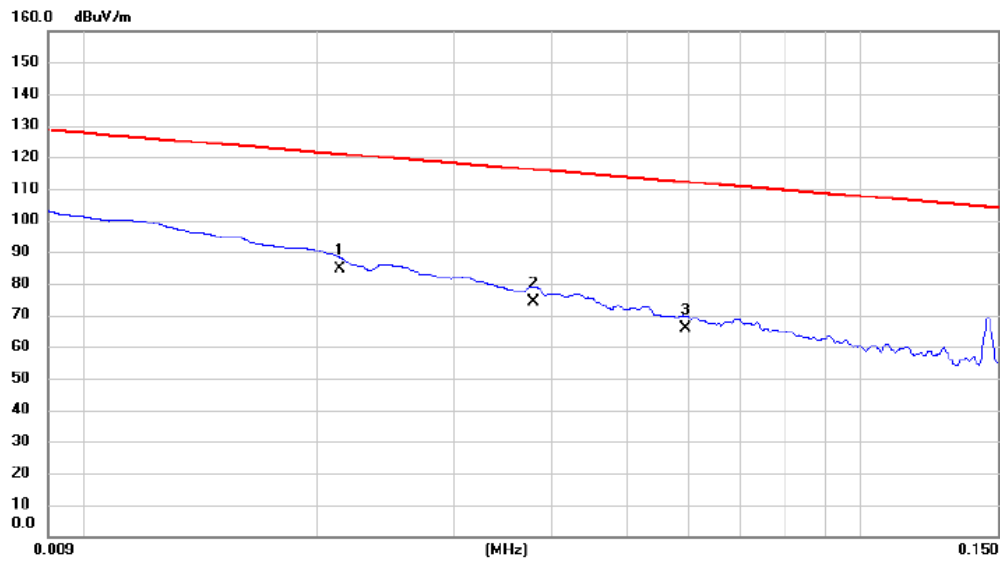


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.021	64.20	20.31	84.51	121.00	-36.49	AVG	
2		0.038	54.23	20.14	74.37	116.01	-41.64	AVG	
3		0.060	45.69	20.14	65.83	112.10	-46.27	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode	Polarization	Ant 0°
-----------	---------	--------------	--------

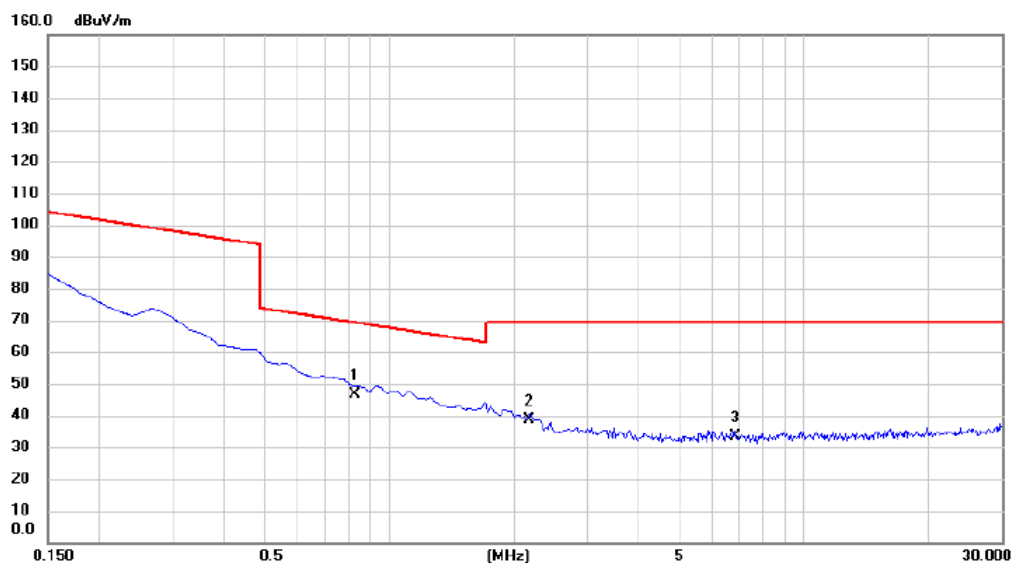


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.826	26.54	19.97	46.51	69.26	-22.75	QP	
2		2.180	18.67	20.02	38.69	69.54	-30.85	QP	
3		6.806	13.10	20.28	33.38	69.54	-36.16	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode	Polarization	Ant 90°
-----------	---------	--------------	---------

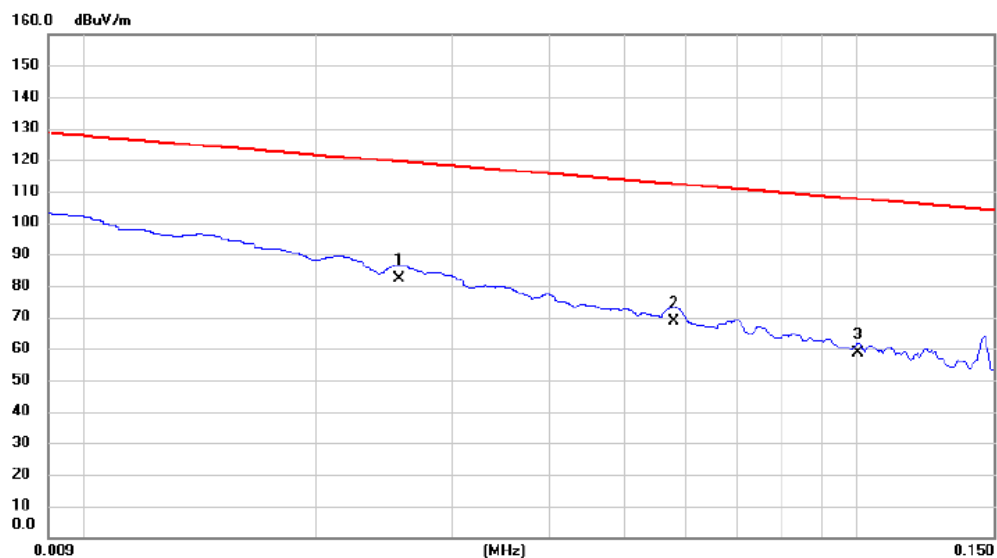


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.026	62.10	20.23	82.33	119.44	-37.11	AVG	
2		0.058	48.52	20.14	68.66	112.34	-43.68	AVG	
3		0.100	38.64	20.14	58.78	107.57	-48.79	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode	Polarization	Ant 90°
-----------	---------	--------------	---------

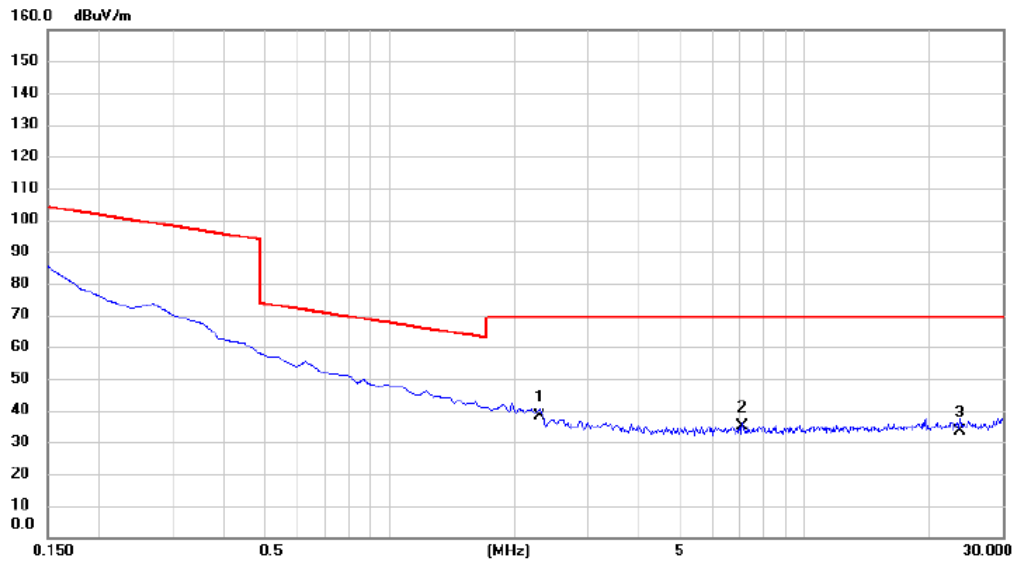

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2.299	18.20	20.02	38.22	69.54	-31.32	QP	
2		7.075	14.59	20.28	34.87	69.54	-34.67	QP	
3		23.731	12.65	20.84	33.49	69.54	-36.05	QP	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX Mode	Polarization	Vertical
-----------	---------	--------------	----------

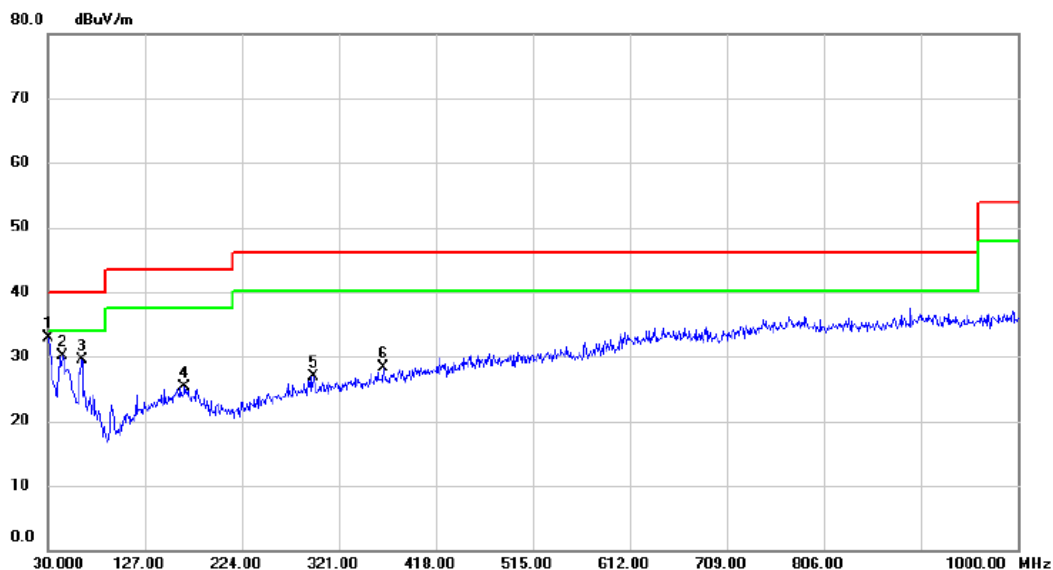


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.000	45.80	-12.92	32.88	40.00	-7.12	peak	
2	44.550	41.33	-11.20	30.13	40.00	-9.87	peak	
3	63.950	41.67	-12.08	29.59	40.00	-10.41	peak	
4	166.770	35.90	-10.61	25.29	43.52	-18.23	peak	
5	295.780	36.73	-9.78	26.95	46.02	-19.07	peak	
6	365.620	36.63	-8.23	28.40	46.02	-17.62	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode	Polarization	Horizontal
-----------	---------	--------------	------------

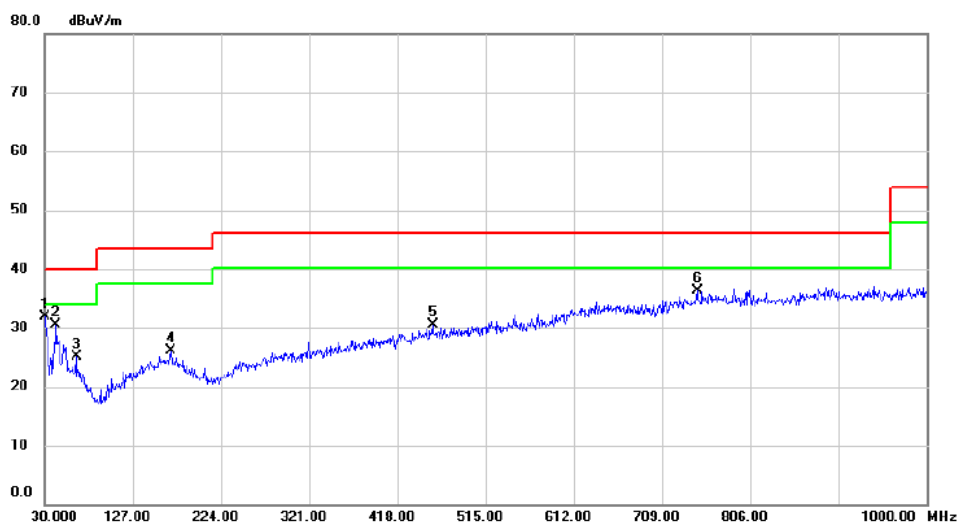

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.000	44.80	-12.92	31.88	40.00	-8.12	peak	
2		42.610	41.78	-11.34	30.44	40.00	-9.56	peak	
3		64.920	37.30	-12.21	25.09	40.00	-14.91	peak	
4		168.710	36.75	-10.64	26.11	43.52	-17.41	peak	
5		456.800	36.29	-5.88	30.41	46.02	-15.61	peak	
6		747.800	36.90	-0.55	36.35	46.02	-9.67	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


APPENDIX D - BANDWIDTH

Test Mode	TX Mode
-----------	---------

Frequency (kHz)	20 dB Bandwidth (kHz)	99 % Occupied Bandwidth (kHz)	Result
144.9	26.40	0.601	Complies

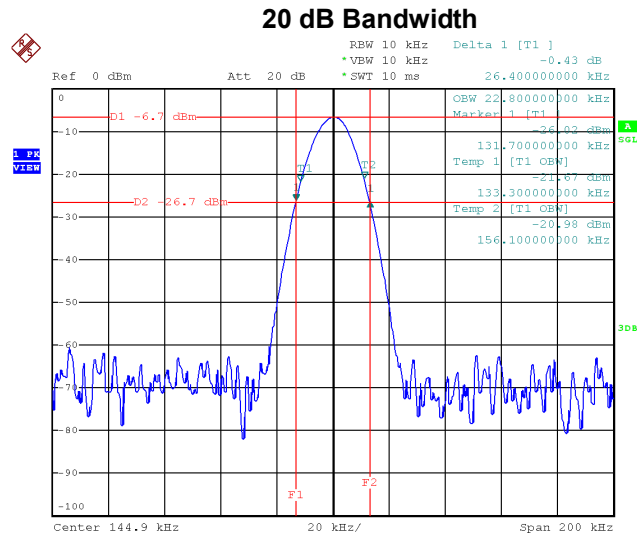

Date: 19.SEP.2025 10:45:03

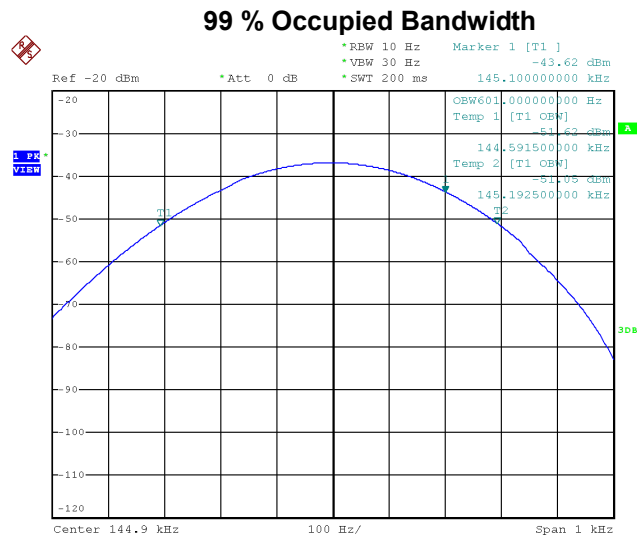

Date: 19.SEP.2025 11:00:31

End of Test Report