

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/8/24

B08_BT_2DH5_CH78_Right Side_0mm**DUT: Test sample;**

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.858$ S/m; $\epsilon_r = 38.542$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.57, 7.57, 7.57) @ 2480 MHz; Calibrated: 2026/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x13x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.139 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.304 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.038 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 45.8%

Maximum value of SAR (measured) = 0.159 W/kg

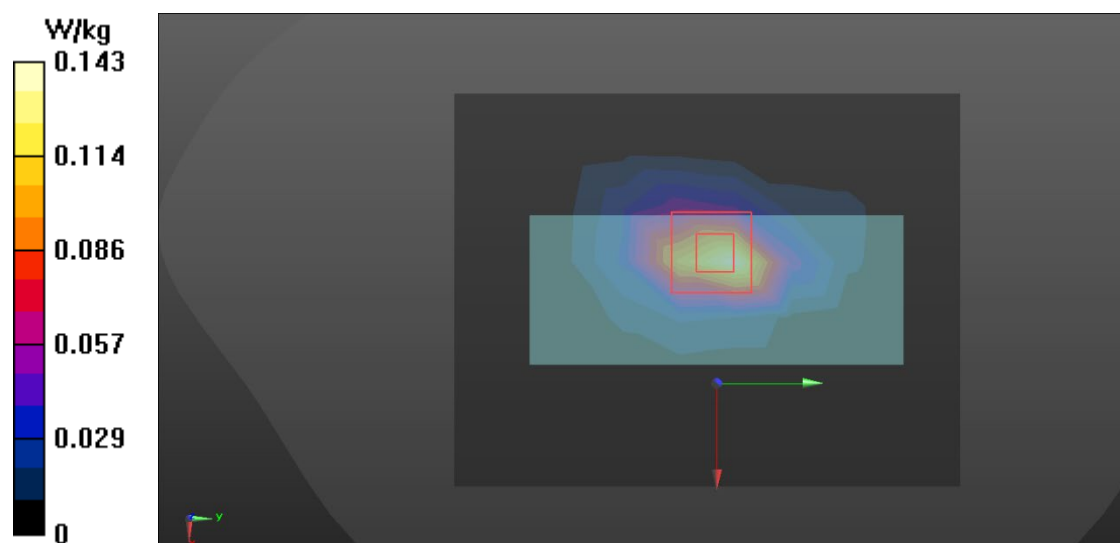

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/8/24

B17_BLE 1M_CH39_Right Side_0mm**DUT: Test sample;**

Communication System: UID 10670 - AAA, Bluetooth Low Energy; Frequency: 2480 MHz;

Duty Cycle: 1:1

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.858$ S/m; $\epsilon_r = 38.542$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.57, 7.57, 7.57) @ 2480 MHz; Calibrated: 2026/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x13x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.196 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.337 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.275 W/kg

SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.055 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 46%

Maximum value of SAR (measured) = 0.225 W/kg

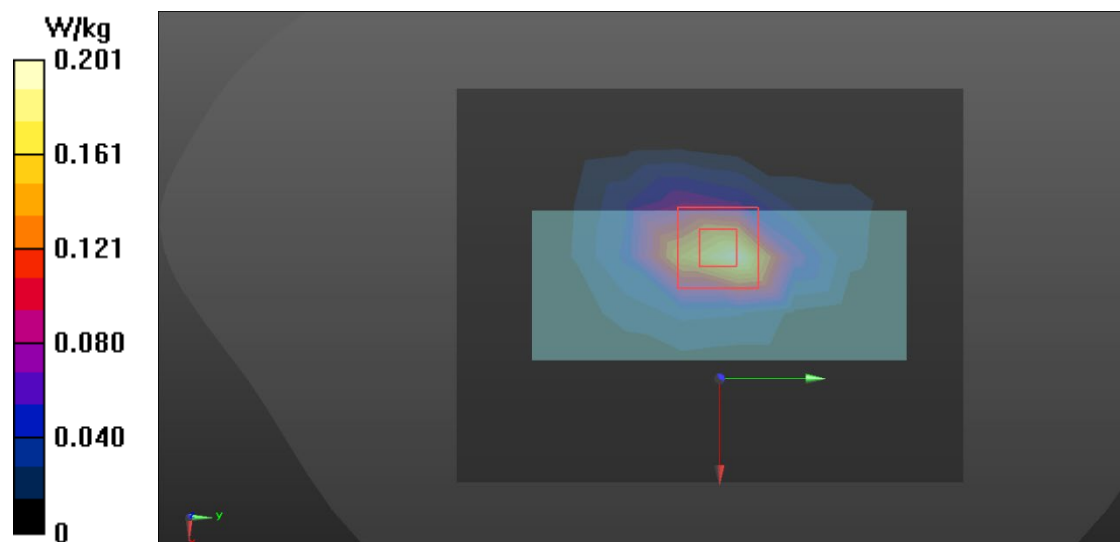

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/8/24

B26_2.4G SRD_Frequency 2478MHz_Right Side_0mm**DUT: Test sample;**

Communication System: UID 0, 2.4G (0); Frequency: 2478 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2478 \text{ MHz}$; $\sigma = 1.856 \text{ S/m}$; $\epsilon_r = 38.547$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$ **DASY Configuration:**

- Probe: EX3DV4 - SN7544; ConvF(7.57, 7.57, 7.57) @ 2478 MHz; Calibrated: 2026/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x13x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.0961 W/kg **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.414 V/m ; Power Drift = 0.00 dB Peak SAR (extrapolated) = 0.136 W/kg **SAR(1 g) = 0.062 W/kg ; SAR(10 g) = 0.026 W/kg** Smallest distance from peaks to all points 3 dB below = 8.9 mm Ratio of SAR at M2 to SAR at M1 = 46.1% Maximum value of SAR (measured) = 0.107 W/kg 