

# FCC Radio Test Report

## FCC ID: RWO-RZ090300


This report concerns: Original Grant

Project No. : 1903C316  
Equipment : Notebook  
Test Model : RZ09-0300  
Series Model : N/A  
Applicant : Razer Inc.  
Address : 201 3rd Street, Suite 900, San Francisco, CA 94103  
USA

Date of Receipt : Mar. 27, 2019  
Date of Test : Mar. 28, 2019 ~ Apr. 22, 2019  
Issued Date : May 09, 2019  
Tested by : BTL Inc.

Testing Engineer

:



(Kai Xu)

Technical Manager


:



(Steven Lu)

Authorized Signatory

:



(Ethan Ma)

# B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Certificate #5123.02

## Declaration

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

## Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

## Table of Contents

## Page

|                                                              |           |
|--------------------------------------------------------------|-----------|
| <b>REPORT ISSUED HISTORY</b>                                 | <b>6</b>  |
| <b>1 . GENERAL SUMMARY</b>                                   | <b>7</b>  |
| <b>2 . SUMMARY OF TEST RESULTS</b>                           | <b>8</b>  |
| 2.1 TEST FACILITY                                            | 9         |
| 2.2 MEASUREMENT UNCERTAINTY                                  | 9         |
| <b>3 . GENERAL INFORMATION</b>                               | <b>10</b> |
| 3.1 GENERAL DESCRIPTION OF EUT                               | 10        |
| 3.2 DESCRIPTION OF TEST MODES                                | 12        |
| 3.3 PARAMETERS OF TEST SOFTWARE                              | 13        |
| 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 14        |
| 3.5 SUPPORT UNITS                                            | 14        |
| <b>4 . AC POWER LINE CONDUCTED EMISSIONS TEST</b>            | <b>15</b> |
| 4.1 LIMIT                                                    | 15        |
| 4.2 TEST PROCEDURE                                           | 15        |
| 4.3 DEVIATION FROM TEST STANDARD                             | 15        |
| 4.4 TEST SETUP                                               | 16        |
| 4.5 EUT OPERATING CONDITIONS                                 | 16        |
| 4.6 EUT TEST CONDITIONS                                      | 16        |
| 4.7 TEST RESULTS                                             | 16        |
| <b>5 . RADIATED EMISSION TEST</b>                            | <b>17</b> |
| 5.1 LIMIT                                                    | 17        |
| 5.2 TEST PROCEDURE                                           | 18        |
| 5.3 DEVIATION FROM TEST STANDARD                             | 18        |
| 5.4 TEST SETUP                                               | 19        |
| 5.5 EUT OPERATING CONDITIONS                                 | 20        |
| 5.6 EUT TEST CONDITIONS                                      | 20        |
| 5.7 TEST RESULTS - 9 KHZ TO 30 MHZ                           | 20        |
| 5.8 TEST RESULTS - 30 MHZ TO 1000 MHZ                        | 20        |
| 5.9 TEST RESULTS - ABOVE 1000 MHZ                            | 20        |
| <b>6 . NUMBER OF HOPPING FREQUENCY</b>                       | <b>21</b> |
| 6.1 LIMIT                                                    | 21        |
| 6.2 TEST PROCEDURE                                           | 21        |
| 6.3 DEVIATION FROM STANDARD                                  | 21        |

| Table of Contents                          | Page |
|--------------------------------------------|------|
| 6.4 TEST SETUP                             | 21   |
| 6.5 EUT OPERATION CONDITIONS               | 21   |
| 6.6 EUT TEST CONDITIONS                    | 21   |
| 6.7 TEST RESULTS                           | 21   |
| 7 . AVERAGE TIME OF OCCUPANCY              | 22   |
| 7.1 LIMIT                                  | 22   |
| 7.2 TEST PROCEDURE                         | 22   |
| 7.3 DEVIATION FROM STANDARD                | 22   |
| 7.4 TEST SETUP                             | 22   |
| 7.5 EUT OPERATION CONDITIONS               | 22   |
| 7.6 EUT TEST CONDITIONS                    | 22   |
| 7.7 TEST RESULTS                           | 22   |
| 8 . HOPPING CHANNEL SEPARATION MEASUREMENT | 23   |
| 8.1 LIMIT                                  | 23   |
| 8.2 TEST PROCEDURE                         | 23   |
| 8.3 DEVIATION FROM STANDARD                | 23   |
| 8.4 TEST SETUP                             | 23   |
| 8.5 EUT OPERATION CONDITIONS               | 23   |
| 8.6 EUT TEST CONDITIONS                    | 23   |
| 8.7 TEST RESULTS                           | 23   |
| 9 . BANDWIDTH TEST                         | 24   |
| 9.1 LIMIT                                  | 24   |
| 9.2 TEST PROCEDURE                         | 24   |
| 9.3 DEVIATION FROM STANDARD                | 24   |
| 9.4 TEST SETUP                             | 24   |
| 9.5 EUT OPERATION CONDITIONS               | 24   |
| 9.6 EUT TEST CONDITIONS                    | 24   |
| 9.7 TEST RESULTS                           | 24   |
| 10 . MAXIMUM OUTPUT POWER                  | 25   |
| 10.1 LIMIT                                 | 25   |
| 10.2 TEST PROCEDURE                        | 25   |
| 10.3 DEVIATION FROM STANDARD               | 25   |
| 10.4 TEST SETUP                            | 25   |
| 10.5 EUT OPERATION CONDITIONS              | 25   |

| <b>Table of Contents</b>                                   | <b>Page</b> |
|------------------------------------------------------------|-------------|
| <b>10.6 EUT TEST CONDITIONS</b>                            | <b>25</b>   |
| <b>10.7 TEST RESULTS</b>                                   | <b>25</b>   |
| <b>11 . CONDUCTED SPURIOUS EMISSION</b>                    | <b>26</b>   |
| <b>11.1 LIMIT</b>                                          | <b>26</b>   |
| <b>11.2 TEST PROCEDURE</b>                                 | <b>26</b>   |
| <b>11.3 DEVIATION FROM STANDARD</b>                        | <b>26</b>   |
| <b>11.4 TEST SETUP</b>                                     | <b>26</b>   |
| <b>11.5 EUT OPERATION CONDITIONS</b>                       | <b>26</b>   |
| <b>11.6 EUT TEST CONDITIONS</b>                            | <b>26</b>   |
| <b>11.7 TEST RESULTS</b>                                   | <b>26</b>   |
| <b>12 . MEASUREMENT INSTRUMENTS LIST</b>                   | <b>27</b>   |
| <b>APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS</b>      | <b>29</b>   |
| <b>APPENDIX B - RADIATED EMISSION - 9 KHZ-30 MHZ</b>       | <b>32</b>   |
| <b>APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ</b> | <b>37</b>   |
| <b>APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ</b>     | <b>40</b>   |
| <b>APPENDIX E - NUMBER OF HOPPING FREQUENCY</b>            | <b>65</b>   |
| <b>APPENDIX F - AVERAGE TIME OF OCCUPANCY</b>              | <b>67</b>   |
| <b>APPENDIX G - HOPPING CHANNEL SEPARATION MEASUREMENT</b> | <b>72</b>   |
| <b>APPENDIX H - BANDWIDTH</b>                              | <b>74</b>   |
| <b>APPENDIX I - MAXIMUM OUTPUT POWER</b>                   | <b>76</b>   |
| <b>APPENDIX J - CONDUCTED SPURIOUS EMISSION</b>            | <b>78</b>   |

## REPORT ISSUED HISTORY

| Report Version | Description     | Issued Date  |
|----------------|-----------------|--------------|
| R00            | Original Issue. | May 09, 2019 |

## 1. GENERAL SUMMARY

Equipment : Notebook  
Brand Name : RAZER  
Test Model : RZ09-0300  
Series Model : N/A  
Applicant : Razer Inc.  
Manufacturer : Razer Inc.  
Address : 201 3rd Street, Suite 900, San Francisco, CA 94103 USA  
Date of Test : Mar. 28, 2019 ~ Apr. 22, 2019  
Test Sample : Engineering Sample No.: D190303120  
Standard(s) : FCC Part15, Subpart C (15.247)  
ANSI C63.10-2013  
KDB 558074 D01 15.247 Meas Guidance

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1903C316) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of A2LA according to the ISO/IEC 17025 quality assessment standard and technical standard(s).

**Test results included in this report are only for the Bluetooth EDR part.**

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| Applied Standard(s): FCC Part15, Subpart C (15.247) |                                   |                                        |          |        |
|-----------------------------------------------------|-----------------------------------|----------------------------------------|----------|--------|
| Standard(s) Section                                 | Test Item                         | Test Result                            | Judgment | Remark |
| 15.207                                              | AC Power Line Conducted Emissions | Appendix A                             | PASS     | -----  |
| 15.247(d)<br>15.205(a)<br>15.209(a)                 | Radiated Emission                 | Appendix B<br>Appendix C<br>Appendix D | PASS     | -----  |
| 15.247(a)(1)(iii)                                   | Number of Hopping Frequency       | Appendix E                             | PASS     | -----  |
| 15.247(a)(1)(iii)                                   | Average Time Of Occupancy         | Appendix F                             | PASS     | -----  |
| 15.247(a)(1)                                        | Hopping Channel Separation        | Appendix G                             | PASS     | -----  |
| 15.247(a)(1)                                        | Bandwidth                         | Appendix H                             | PASS     | -----  |
| 15.247(a)(1)                                        | Maximum Output Power              | APPENDIX I                             | PASS     | -----  |
| 15.247(d)                                           | Conducted Spurious Emission       | APPENDIX J                             | PASS     | -----  |
| 15.203                                              | Antenna Requirement               | -----                                  | PASS     | -----  |

Note:

(1) "N/A" denotes test is not applicable in this test report

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China  
BTL's Test Firm Registration Number for FCC: 357015  
BTL's Designation Number for FCC: CN1240

## 2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ( $k=2$ ))  
The BTL measurement uncertainty as below table:

### A. AC power line conducted emissions test:

| Test Site | Method | Measurement Frequency Range | U, (dB) |
|-----------|--------|-----------------------------|---------|
| DG-C02    | CISPR  | 150 kHz ~ 30 MHz            | 2.32    |

### B. Radiated emissions test:

| Test Site | Method | Measurement Frequency Range | Ant. H / V | U, (dB) |
|-----------|--------|-----------------------------|------------|---------|
| DG-CB03   | CISPR  | 9 kHz~30 MHz                | V          | 3.79    |
|           |        | 9 kHz~30 MHz                | H          | 3.57    |
|           |        | 30 MHz~200 MHz              | V          | 3.82    |
|           |        | 30 MHz~200 MHz              | H          | 3.78    |
|           |        | 200 MHz~1,000 MHz           | V          | 4.10    |
|           |        | 200 MHz~1,000 MHz           | H          | 4.06    |
|           |        | 1 GHz~18 GHz                | V          | 3.12    |
|           |        | 1 GHz~18 GHz                | H          | 3.68    |
|           |        | 18 GHz~40 GHz               | V          | 4.15    |
|           |        | 18 GHz~40 GHz               | H          | 4.14    |

### C. Other Measurement:

| Test Item                   | Uncertainty |
|-----------------------------|-------------|
| Conducted Spurious Emission | 2.67 dB     |
| Hopping Channel Separation  | 53.46 MHz   |
| Output Power                | 0.95 dB     |
| Number of Hopping Frequency | 53.46 MHz   |
| Temperature                 | 0.08 °C     |
| Humidity                    | 1.5%        |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                         |                                                                                                                                                                       |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment               | Notebook                                                                                                                                                              |
| Brand Name              | RAZER                                                                                                                                                                 |
| Test Model              | RZ09-0300                                                                                                                                                             |
| Series Model            | N/A                                                                                                                                                                   |
| Model Difference(s)     | N/A                                                                                                                                                                   |
| Software Version        | Windows 10                                                                                                                                                            |
| Hardware Version        | DA530_MB                                                                                                                                                              |
| Power Source            | 1# DC voltage supplied from AC/DC adapter.<br>Brand / Model: RAZER / RC30-0238<br>2# Supplied from battery.<br>Brand / Model: RAZER / RC30-0270                       |
| Power Rating            | 1# I/P: 100-240V~2.5A 50/60Hz      O/P: 19.5V  10.26A<br>2# DC 15.4V, 4221mAh/65Wh |
| Operation Frequency     | 2402 MHz ~ 2480 MHz                                                                                                                                                   |
| Modulation Technology   | GFSK, $\pi/4$ -DQPSK, 8-DPSK                                                                                                                                          |
| Bit Rate of Transmitter | 1/2/3Mbps                                                                                                                                                             |
| Output Power Max.       | 3.87 dBm (0.0024 W) For 1Mbps<br>3.37 dBm (0.0022 W) For 3Mbps                                                                                                        |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. This product has the mode of BT AFH, which was considered during testing, but this mode is not the worst case mode, and this report only shows the worst case mode.

### 3. Channel List:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|
| 00      | 2402            | 27      | 2429            | 54      | 2456            |
| 01      | 2403            | 28      | 2430            | 55      | 2457            |
| 02      | 2404            | 29      | 2431            | 56      | 2458            |
| 03      | 2405            | 30      | 2432            | 57      | 2459            |
| 04      | 2406            | 31      | 2433            | 58      | 2460            |
| 05      | 2407            | 32      | 2434            | 59      | 2461            |
| 06      | 2408            | 33      | 2435            | 60      | 2462            |
| 07      | 2409            | 34      | 2436            | 61      | 2463            |
| 08      | 2410            | 35      | 2437            | 62      | 2464            |
| 09      | 2411            | 36      | 2438            | 63      | 2465            |
| 10      | 2412            | 37      | 2439            | 64      | 2466            |
| 11      | 2413            | 38      | 2440            | 65      | 2467            |
| 12      | 2414            | 39      | 2441            | 66      | 2468            |
| 13      | 2415            | 40      | 2442            | 67      | 2469            |
| 14      | 2416            | 41      | 2443            | 68      | 2470            |
| 15      | 2417            | 42      | 2444            | 69      | 2471            |
| 16      | 2418            | 43      | 2445            | 70      | 2472            |
| 17      | 2419            | 44      | 2446            | 71      | 2473            |
| 18      | 2420            | 45      | 2447            | 72      | 2474            |
| 19      | 2421            | 46      | 2448            | 73      | 2475            |
| 20      | 2422            | 47      | 2449            | 74      | 2476            |
| 21      | 2423            | 48      | 2450            | 75      | 2477            |
| 22      | 2424            | 49      | 2451            | 76      | 2478            |
| 23      | 2425            | 50      | 2452            | 77      | 2479            |
| 24      | 2426            | 51      | 2453            | 78      | 2480            |
| 25      | 2427            | 52      | 2454            |         |                 |
| 26      | 2428            | 53      | 2455            |         |                 |

### 4. Table for Filed Antenna:

| Ant. | Brand                                                                               | P/N             | Antenna Type | Connector | Gain (dBi) |
|------|-------------------------------------------------------------------------------------|-----------------|--------------|-----------|------------|
| 1    |  | BY5810-16-001-C | PIFA         | IPEX      | 3.69       |

### 3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

| Pretest Mode | Description               |
|--------------|---------------------------|
| Mode 1       | TX Mode <b>NOTE (1)</b>   |
| Mode 2       | TX Mode Channel 00 _1Mbps |

Following mode(s) as (were) found to be the worst case(s) and selected for the final test.

| AC power line conducted emissions test |                           |
|----------------------------------------|---------------------------|
| Final Test Mode                        | Description               |
| Mode 2                                 | TX Mode Channel 00 _1Mbps |

| Radiated emissions test - Below 1GHz |                           |
|--------------------------------------|---------------------------|
| Final Test Mode                      | Description               |
| Mode 2                               | TX Mode Channel 00 _1Mbps |

| Radiated emissions test - Above 1GHz |                         |
|--------------------------------------|-------------------------|
| Final Test Mode                      | Description             |
| Mode 1                               | TX Mode <b>NOTE (1)</b> |

| Conducted test  |                         |
|-----------------|-------------------------|
| Final Test Mode | Description             |
| Mode 1          | TX Mode <b>NOTE (1)</b> |

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) The measurements for Hopping Channel Separation, Bandwidth and Maximum Output Power were tested during 1Mbps, 2Mbps and 3Mbps, the worst case are 1Mbps and 3Mbps, only worst case was documented.
- (3) For radiated emission above 1 GHz test, 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.

### 3.3 PARAMETERS OF TEST SOFTWARE

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

| Test Software     | DRTU |      |      |
|-------------------|------|------|------|
| Frequency (MHz)   | 2402 | 2441 | 2480 |
| Parameters(1Mbps) | 4    | 4    | 4    |
| Parameters(3Mbps) | 1    | 1    | 1    |

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



### 3.5 SUPPORT UNITS

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. |
|------|-----------|-----------|----------------|------------|
| -    | -         | -         | -              | -          |

| Item | Shielded Type | Ferrite Core | Length | Note     |
|------|---------------|--------------|--------|----------|
| 1    | NO            | NO           | 2m     | DC Cable |
| 2    | NO            | NO           | 1m     | AC Cable |

## 4. AC POWER LINE CONDUCTED EMISSIONS TEST

### 4.1 LIMIT

| Frequency of Emission (MHz) | Limit (dB $\mu$ V) |           |
|-----------------------------|--------------------|-----------|
|                             | Quasi-peak         | Average   |
| 0.15 - 0.5                  | 66 to 56*          | 56 to 46* |
| 0.5 - 5.0                   | 56                 | 46        |
| 5.0 - 30.0                  | 60                 | 50        |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |


### 4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 4.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4 TEST SETUP

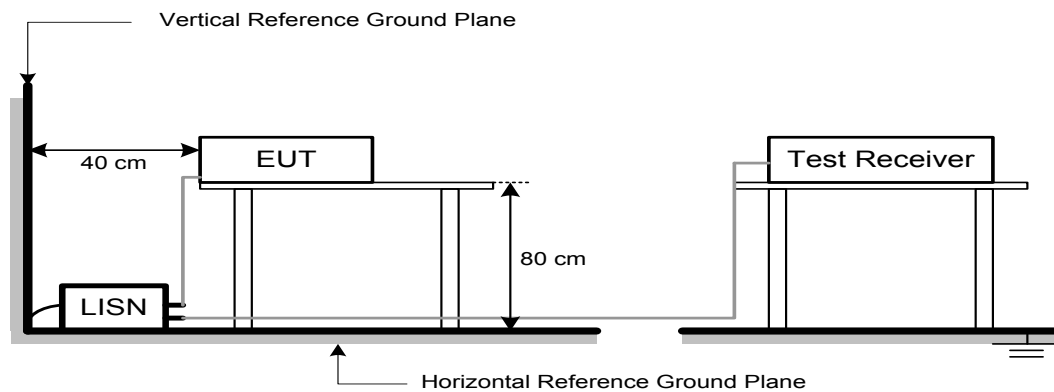

#### 4.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting data or hopping on mode.

#### 4.6 EUT TEST CONDITIONS

Temperature: 25°C      Relative Humidity: 53%      Test Voltage: AC 120V/60Hz

#### 4.7 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a “\*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

## 5. RADIATED EMISSION TEST

### 5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009-0.490        | 2400/F(kHz)                          | 300                              |
| 0.490-1.705        | 24000/F(kHz)                         | 30                               |
| 1.705-30.0         | 30                                   | 30                               |
| 30-88              | 100                                  | 3                                |
| 88-216             | 150                                  | 3                                |
| 216-960            | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

| Frequency (MHz) | (dBuV/m at 3 m) |         |
|-----------------|-----------------|---------|
|                 | Peak            | Average |
| Above 1000      | 74              | 54      |

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

| Spectrum Parameter                         | Setting                                                                     |
|--------------------------------------------|-----------------------------------------------------------------------------|
| Attenuation                                | Auto                                                                        |
| Start Frequency                            | 1000 MHz                                                                    |
| Stop Frequency                             | 10th carrier harmonic                                                       |
| RBW / VBW<br>(Emission in restricted band) | RBW 1 MHz VBW 3 MHz peak detector for Pk value<br>RMS detector for AV value |

| Receiver Parameter     | Setting                             |
|------------------------|-------------------------------------|
| Attenuation            | Auto                                |
| Start ~ Stop Frequency | 9 kHz~90 kHz for PK/AVG detector    |
| Start ~ Stop Frequency | 90 kHz~110 kHz for QP detector      |
| Start ~ Stop Frequency | 110 kHz~490 kHz for PK/AVG detector |
| Start ~ Stop Frequency | 490 kHz~30 MHz for QP detector      |
| Start ~ Stop Frequency | 30 MHz~1000 MHz for QP detector     |

## 5.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

## 5.3 DEVIATION FROM TEST STANDARD


No deviation


## 5.4 TEST SETUP

9 kHz-30 MHz

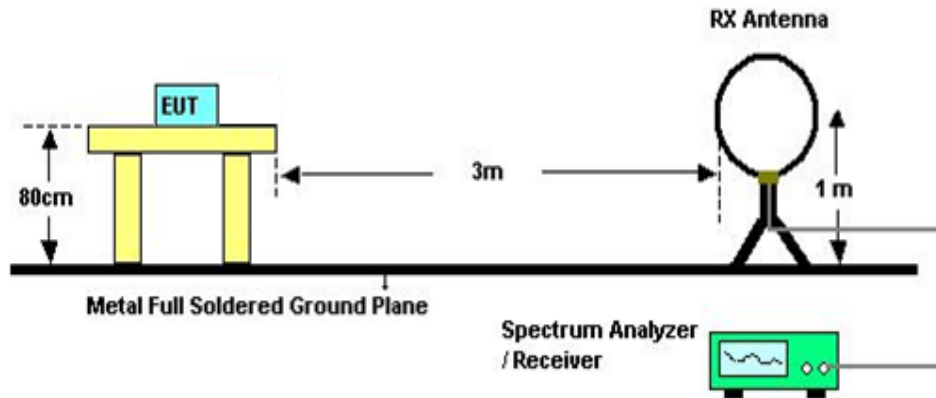

30 MHz to 1 GHz

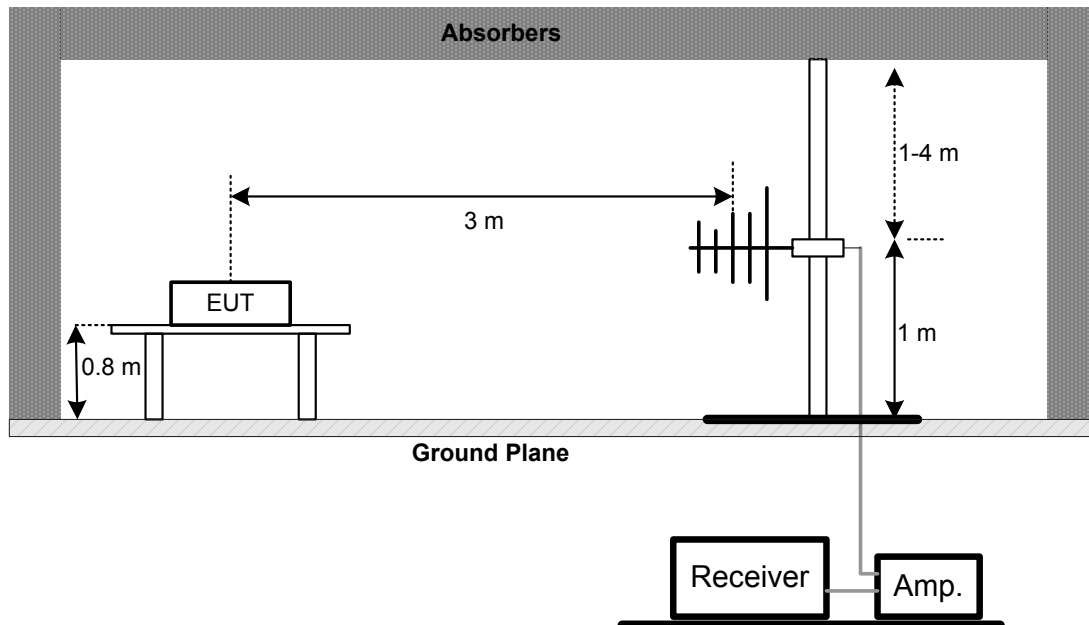

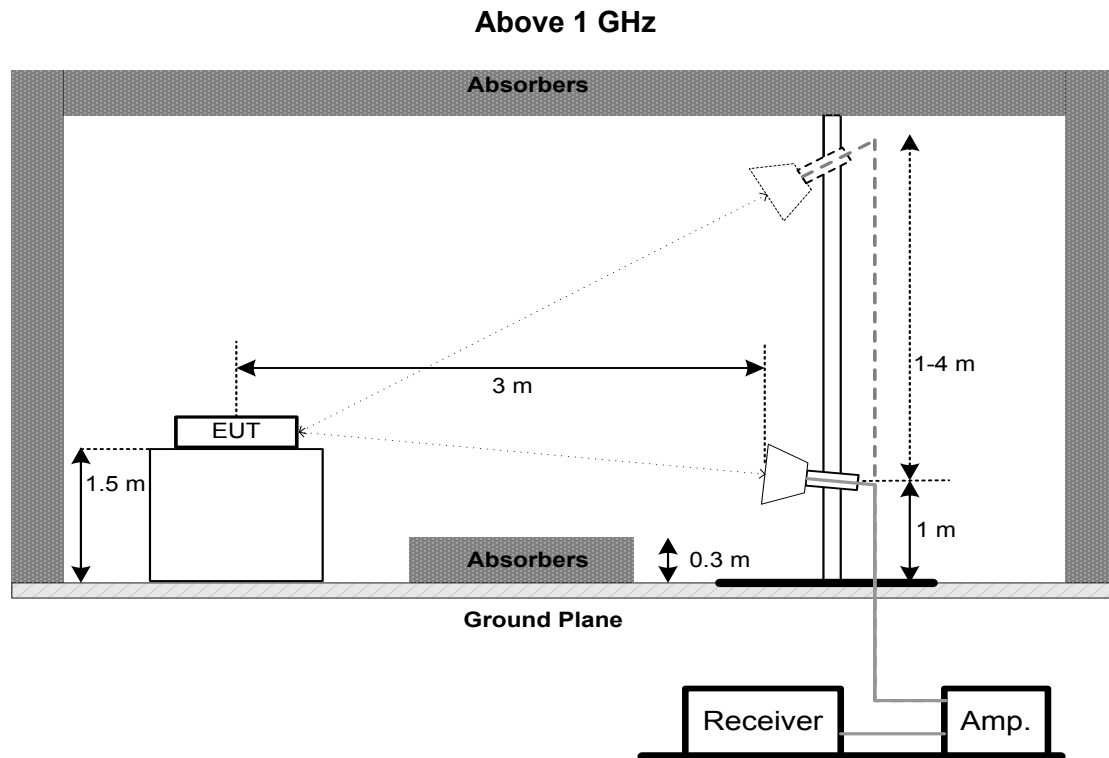

#### 5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

#### 5.6 EUT TEST CONDITIONS

Temperature: 24°C    Relative Humidity: 68%    Test Voltage: AC 120V/60Hz

#### 5.7 TEST RESULTS - 9 kHz TO 30 MHz

Please refer to the APPENDIX B

Remark:

- (1) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 5.8 TEST RESULTS - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

#### 5.9 TEST RESULTS - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 6. NUMBER OF HOPPING FREQUENCY

### 6.1 LIMIT

| FCC Part15, Subpart C (15.247) |                             |
|--------------------------------|-----------------------------|
| Section                        | Test Item                   |
| 15.247(a)(1)(iii)              | Number of Hopping Frequency |

| Spectrum Parameters | Setting                     |
|---------------------|-----------------------------|
| Attenuation         | Auto                        |
| Span Frequency      | > Operating Frequency Range |
| RBW                 | 100 kHz                     |
| VBW                 | 100 kHz                     |
| Detector            | Peak                        |
| Trace               | Max Hold                    |
| Sweep Time          | Auto                        |

### 6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=100 kHz, VBW=100 kHz, Sweep time = Auto.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP



### 6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 6.6 EUT TEST CONDITIONS

Temperature: 22.2°C    Relative Humidity: 55%    Test Voltage: AC 120V/60Hz

### 6.7 TEST RESULTS

Please refer to the APPENDIX E

## 7. AVERAGE TIME OF OCCUPANCY

### 7.1 LIMIT

| FCC Part15, Subpart C (15.247) |                           |        |
|--------------------------------|---------------------------|--------|
| Section                        | Test Item                 | Limit  |
| 15.247(a)(1)(iii)              | Average Time of Occupancy | 0.4sec |

### 7.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz
- Use a video trigger with the trigger level set to enable triggering only on full pulses
- Sweep Time is more than once pulse time
- Set the center frequency on any frequency would be measure and set the frequency span to zero span
- Measure the maximum time duration of one single pulse
- Set the EUT for DH5, DH3 and DH1 packet transmitting
- Measure the maximum time duration of one single pulse
- DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds
- DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds
- DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP



### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 7.6 EUT TEST CONDITIONS

Temperature: 22.2°C    Relative Humidity: 55%    Test Voltage: AC 120V/60Hz

### 7.7 TEST RESULTS

Please refer to the APPENDIX F

## 8. HOPPING CHANNEL SEPARATION MEASUREMENT

### 8.1 LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

| Spectrum Parameter | Setting                                       |
|--------------------|-----------------------------------------------|
| Attenuation        | Auto                                          |
| Span Frequency     | > Measurement Bandwidth or Channel Separation |
| RBW                | 30 kHz                                        |
| VBW                | 100 kHz                                       |
| Detector           | Peak                                          |
| Trace              | Max Hold                                      |
| Sweep Time         | Auto                                          |

### 8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Span = wide enough to capture the peaks of two adjacent channels  
Resolution (or IF) Bandwidth (RBW)  $\geq 1\%$  of the span  
Video (or Average) Bandwidth (VBW)  $\geq$  RBW  
Sweep = Auto  
Detector function = Peak  
Trace = Max Hold

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP



### 8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 8.6 EUT TEST CONDITIONS

Temperature: 22.2°C    Relative Humidity: 55%    Test Voltage: AC 120V/60Hz

### 8.7 TEST RESULTS

Please refer to the APPENDIX G

## 9. BANDWIDTH TEST

### 9.1 LIMIT

| FCC Part15, Subpart C (15.247) |           |
|--------------------------------|-----------|
| Section                        | Test Item |
| 15.247(a)(1)                   | Bandwidth |

| Spectrum Parameter | Setting                 |
|--------------------|-------------------------|
| Attenuation        | Auto                    |
| Span Frequency     | > Measurement Bandwidth |
| RBW                | 30 kHz                  |
| VBW                | 100 kHz                 |
| Detector           | Peak                    |
| Trace              | Max Hold                |
| Sweep Time         | Auto                    |

### 9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 30 kHz, VBW=100 kHz, Sweep Time = Auto.

### 9.3 DEVIATION FROM STANDARD

No deviation.

### 9.4 TEST SETUP



### 9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 9.6 EUT TEST CONDITIONS

Temperature: 22.2°C    Relative Humidity: 55%    Test Voltage: AC 120V/60Hz

### 9.7 TEST RESULTS

Please refer to the APPENDIX H

## 10. MAXIMUM OUTPUT POWER

### 10.1 LIMIT

| FCC Part15 , Subpart C (15.247) |                      |                    |
|---------------------------------|----------------------|--------------------|
| Section                         | Test Item            | Limit              |
| 15.247(a)(1)                    | Maximum Output Power | 0.125Watt or 21dBm |

Note: Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


### 10.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 1 MHz/3 MHz, VBW= 1 MHz/3 MHz, Sweep time = Auto.

### 10.3 DEVIATION FROM STANDARD

No deviation.

### 10.4 TEST SETUP

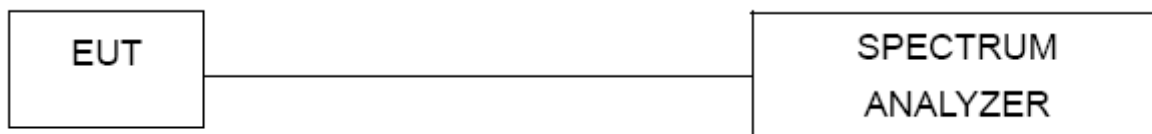

### 10.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 10.6 EUT TEST CONDITIONS

Temperature: 22.2°C    Relative Humidity: 55%    Test Voltage: AC 120V/60Hz

### 10.7 TEST RESULTS

Please refer to the APPENDIX I

## 11. CONDUCTED SPURIOUS EMISSION

### 11.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


### 11.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 100 kHz, VBW=100 kHz, Sweep time = Auto.

### 11.3 DEVIATION FROM STANDARD

No deviation.

### 11.4 TEST SETUP

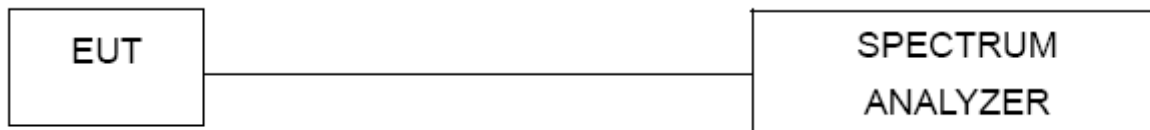

### 11.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 11.6 EUT TEST CONDITIONS

Temperature: 22.2°C    Relative Humidity: 55%    Test Voltage: AC 120V/60Hz

### 11.7 TEST RESULTS

Please refer to the APPENDIX J

## 12. MEASUREMENT INSTRUMENTS LIST

| AC Power Line Conducted Emissions |                          |              |                          |            |                  |
|-----------------------------------|--------------------------|--------------|--------------------------|------------|------------------|
| Item                              | Kind of Equipment        | Manufacturer | Type No.                 | Serial No. | Calibrated until |
| 1                                 | EMI Test Receiver        | R&S          | ESCI                     | 100382     | Mar. 10, 2020    |
| 2                                 | LISN                     | EMCO         | 3816/2                   | 52765      | Mar. 10, 2020    |
| 3                                 | 50ohm Terminator         | SHX          | TF5-3                    | 15041305   | Mar. 10, 2020    |
| 4                                 | Artificial-Mains Network | SCHWARZBECK  | NSLK 8127                | 8127685    | Mar. 10, 2020    |
| 5                                 | TRANSIENT LIMITER        | EM           | EM-7600                  | 772        | Mar. 10, 2020    |
| 6                                 | Measurement Software     | Farad        | EZ-EMC<br>Ver.NB-03A1-01 | N/A        | N/A              |
| 7                                 | Cable                    | N/A          | RG223                    | 12m        | Mar. 12, 2020    |

| Radiated Emissions - 9 kHz to 30 MHz |                      |              |                          |            |                  |
|--------------------------------------|----------------------|--------------|--------------------------|------------|------------------|
| Item                                 | Kind of Equipment    | Manufacturer | Type No.                 | Serial No. | Calibrated until |
| 1                                    | Loop Antenna         | EM           | EM-6876-1                | 230        | Jan. 15, 2020    |
| 2                                    | Cable                | N/A          | RG 213/U                 | C-102      | Jun. 01, 2019    |
| 3                                    | EMI Test Receiver    | R&S          | ESCI                     | 100895     | Mar. 10, 2020    |
| 4                                    | Measurement Software | Farad        | EZ-EMC<br>Ver.NB-03A1-01 | N/A        | N/A              |

| Radiated Emissions - 30 MHz to 1 GHz |                      |              |                            |             |                  |
|--------------------------------------|----------------------|--------------|----------------------------|-------------|------------------|
| Item                                 | Kind of Equipment    | Manufacturer | Type No.                   | Serial No.  | Calibrated until |
| 1                                    | Antenna              | Schwarzbeck  | VULB9160                   | 9160-3232   | Mar. 09, 2020    |
| 2                                    | Amplifier            | HP           | 8447D                      | 2944A09673  | Aug. 11, 2019    |
| 3                                    | Receiver             | Agilent      | N9038A                     | MY52130039  | Aug. 11, 2019    |
| 4                                    | Cable                | emci         | LMR-400(30MHz-1GHz)(8m+5m) | N/A         | May 25, 2019     |
| 5                                    | Controller           | CT           | SC100                      | N/A         | N/A              |
| 6                                    | Controller           | MF           | MF-7802                    | MF780208416 | N/A              |
| 7                                    | Measurement Software | Farad        | EZ-EMC<br>Ver.NB-03A1-01   | N/A         | N/A              |

| Radiated Emissions - Above 1 GHz |                                     |                |                          |               |                  |
|----------------------------------|-------------------------------------|----------------|--------------------------|---------------|------------------|
| Item                             | Kind of Equipment                   | Manufacturer   | Type No.                 | Serial No.    | Calibrated until |
| 1                                | Double Ridged Guide Antenna         | ETS            | 3115                     | 75789         | Mar. 09, 2020    |
| 2                                | Broad-Band Horn Antenna             | Schwarzbeck    | BBHA 9170                | 9170319       | Jun. 30, 2019    |
| 3                                | Amplifier                           | Agilent        | 8449B                    | 3008A02333    | Mar. 10, 2020    |
| 4                                | Microwave Preamplifier With Adaptor | EMC INSTRUMENT | EMC2654045               | 980039 & HA01 | Mar. 10, 2020    |
| 5                                | Receiver                            | Agilent        | N9038A                   | MY52130039    | Aug. 11, 2019    |
| 6                                | Controller                          | CT             | SC100                    | N/A           | N/A              |
| 7                                | Controller                          | MF             | MF-7802                  | MF780208416   | N/A              |
| 8                                | Cable                               | mitron         | B10-01-01-12M            | 18072744      | Jul. 30, 2019    |
| 9                                | Measurement Software                | Farad          | EZ-EMC<br>Ver.NB-03A1-01 | N/A           | N/A              |

### Number of Hopping Frequency

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|-------------------|--------------|----------|------------|------------------|
| 1    | Spectrum Analyzer | R&S          | FSP40    | 100185     | Aug. 11, 2019    |

### Average Time of Occupancy

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|-------------------|--------------|----------|------------|------------------|
| 1    | Spectrum Analyzer | R&S          | FSP40    | 100185     | Aug. 11, 2019    |

### Hopping Channel Separation Measurement

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|-------------------|--------------|----------|------------|------------------|
| 1    | Spectrum Analyzer | R&S          | FSP40    | 100185     | Aug. 11, 2019    |

### Bandwidth

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|-------------------|--------------|----------|------------|------------------|
| 1    | Spectrum Analyzer | R&S          | FSP40    | 100185     | Aug. 11, 2019    |

### Maximum Output Power

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|-------------------|--------------|----------|------------|------------------|
| 1    | Spectrum Analyzer | R&S          | FSP40    | 100185     | Aug. 11, 2019    |

### Antenna Conducted Spurious Emission

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|-------------------|--------------|----------|------------|------------------|
| 1    | Spectrum Analyzer | R&S          | FSP40    | 100185     | Aug. 11, 2019    |


Remark "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

## APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode: TX Mode Channel 00 \_1Mbps

# Line

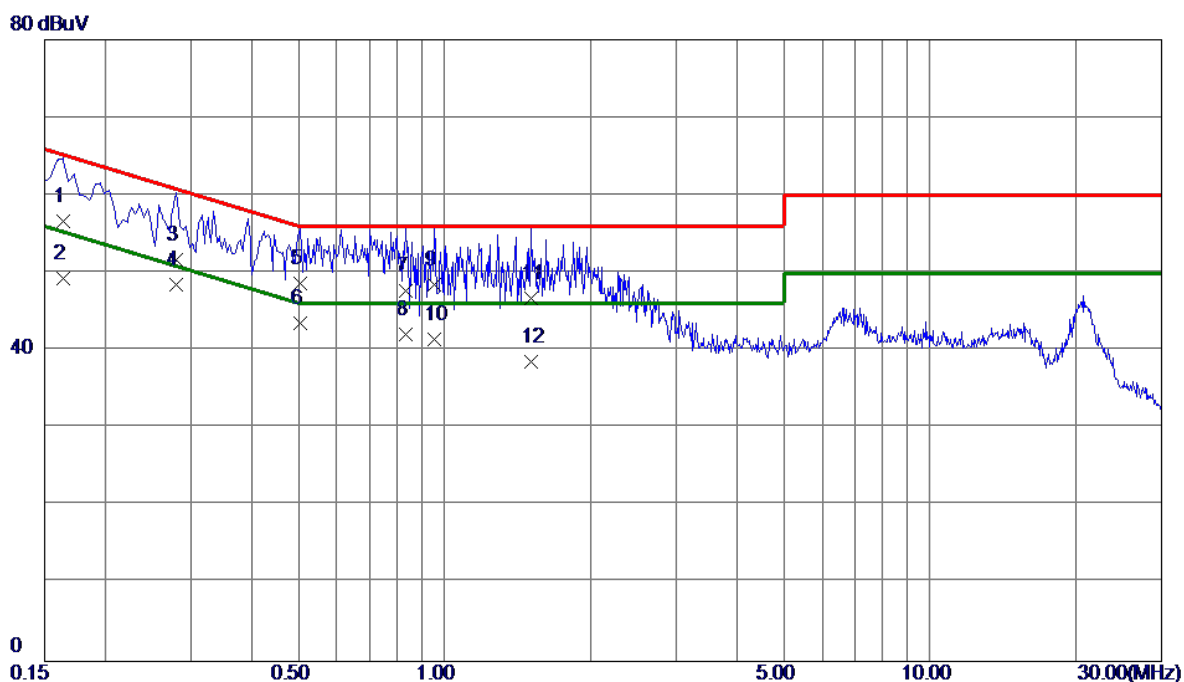


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|---------|
| 1   | 0.1635       | 46.80                    | 9.82                    | 56.62                   | 65.28         | -8.66        | QP       |         |
| 2   | 0.1635       | 39.40                    | 9.82                    | 49.22                   | 55.28         | -6.06        | AVG      |         |
| 3   | 0.2805       | 41.80                    | 9.82                    | 51.62                   | 60.80         | -9.18        | QP       |         |
| 4 * | 0.2805       | 38.60                    | 9.82                    | 48.42                   | 50.80         | -2.38        | AVG      |         |
| 5   | 0.5055       | 38.90                    | 9.79                    | 48.69                   | 56.00         | -7.31        | QP       |         |
| 6   | 0.5055       | 33.70                    | 9.79                    | 43.49                   | 46.00         | -2.51        | AVG      |         |
| 7   | 0.8340       | 37.70                    | 9.91                    | 47.61                   | 56.00         | -8.39        | QP       |         |
| 8   | 0.8340       | 32.20                    | 9.91                    | 42.11                   | 46.00         | -3.89        | AVG      |         |
| 9   | 0.9510       | 38.50                    | 9.92                    | 48.42                   | 56.00         | -7.58        | QP       |         |
| 10  | 0.9510       | 31.50                    | 9.92                    | 41.42                   | 46.00         | -4.58        | AVG      |         |
| 11  | 1.5045       | 36.80                    | 9.96                    | 46.76                   | 56.00         | -9.24        | QP       |         |
| 12  | 1.5045       | 28.60                    | 9.96                    | 38.56                   | 46.00         | -7.44        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX Mode Channel 00 \_1Mbps

### Neutral

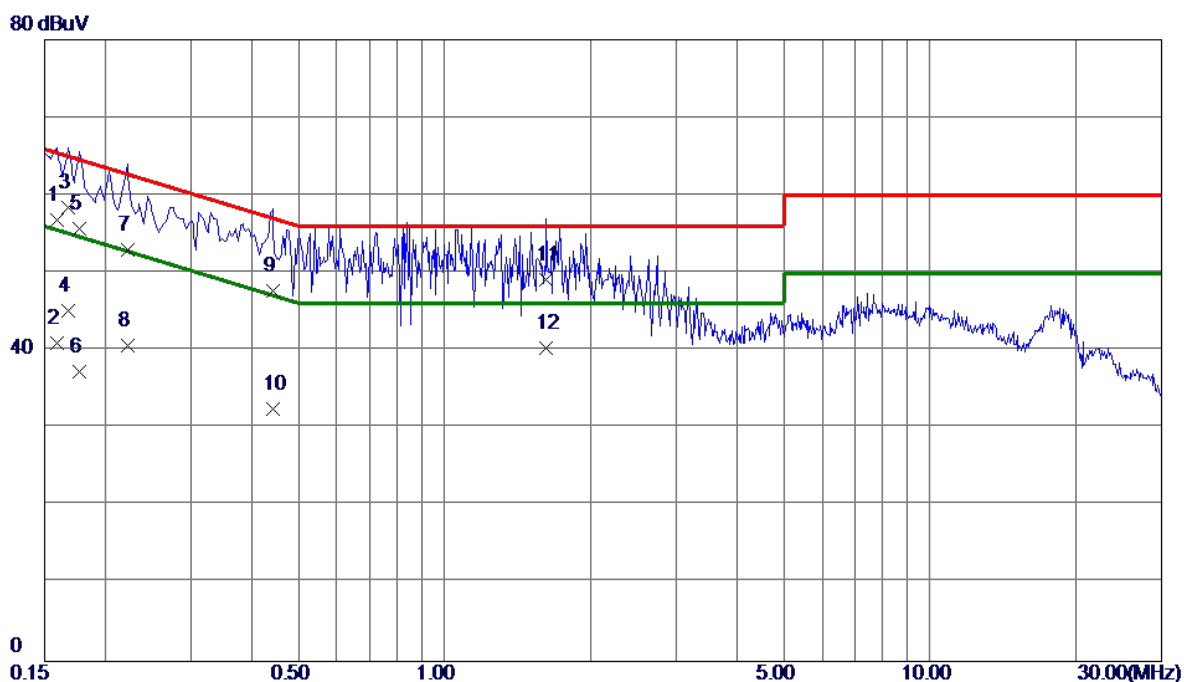

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|------|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|---------|
| 1    | 0.1590       | 46.90                    | 9.91                    | 56.81                   | 65.52         | -8.71        | QP       |         |
| 2    | 0.1590       | 31.00                    | 9.91                    | 40.91                   | 55.52         | -14.61       | AVG      |         |
| 3    | 0.1680       | 48.50                    | 9.91                    | 58.41                   | 65.06         | -6.65        | QP       |         |
| 4    | 0.1680       | 35.27                    | 9.91                    | 45.18                   | 55.06         | -9.88        | AVG      |         |
| 5    | 0.1770       | 45.81                    | 9.91                    | 55.72                   | 64.63         | -8.91        | QP       |         |
| 6    | 0.1770       | 27.41                    | 9.91                    | 37.32                   | 54.63         | -17.31       | AVG      |         |
| 7    | 0.2220       | 43.11                    | 9.91                    | 53.02                   | 62.74         | -9.72        | QP       |         |
| 8    | 0.2220       | 30.71                    | 9.91                    | 40.62                   | 52.74         | -12.12       | AVG      |         |
| 9    | 0.4425       | 37.79                    | 9.95                    | 47.74                   | 57.01         | -9.27        | QP       |         |
| 10   | 0.4425       | 22.59                    | 9.95                    | 32.54                   | 47.01         | -14.47       | AVG      |         |
| 11   | 1.6215       | 38.90                    | 10.16                   | 49.06                   | 56.00         | -6.94        | QP       |         |
| 12 * | 1.6215       | 30.10                    | 10.16                   | 40.26                   | 46.00         | -5.74        | AVG      |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

## APPENDIX B - RADIATED EMISSION - 9 KHZ-30 MHZ

Test Mode: TX Mode Channel 00 \_1Mbps

Ant 0°

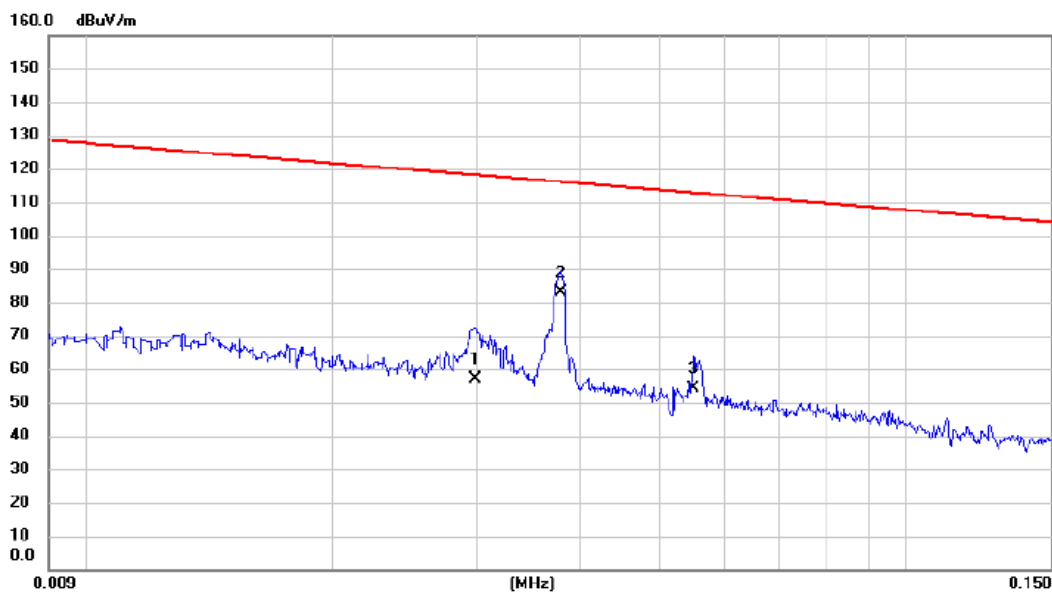

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 0.0298       | 37.20                    | 19.86                   | 57.06                      | 118.12          | -61.06       | AVG      |         |
| 2   | *   | 0.0380       | 63.10                    | 19.73                   | 82.83                      | 116.01          | -33.18       | AVG      |         |
| 3   |     | 0.0550       | 34.90                    | 19.43                   | 54.33                      | 112.80          | -58.47       | AVG      |         |


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX Mode Channel 00 \_1Mbps

Ant 0°

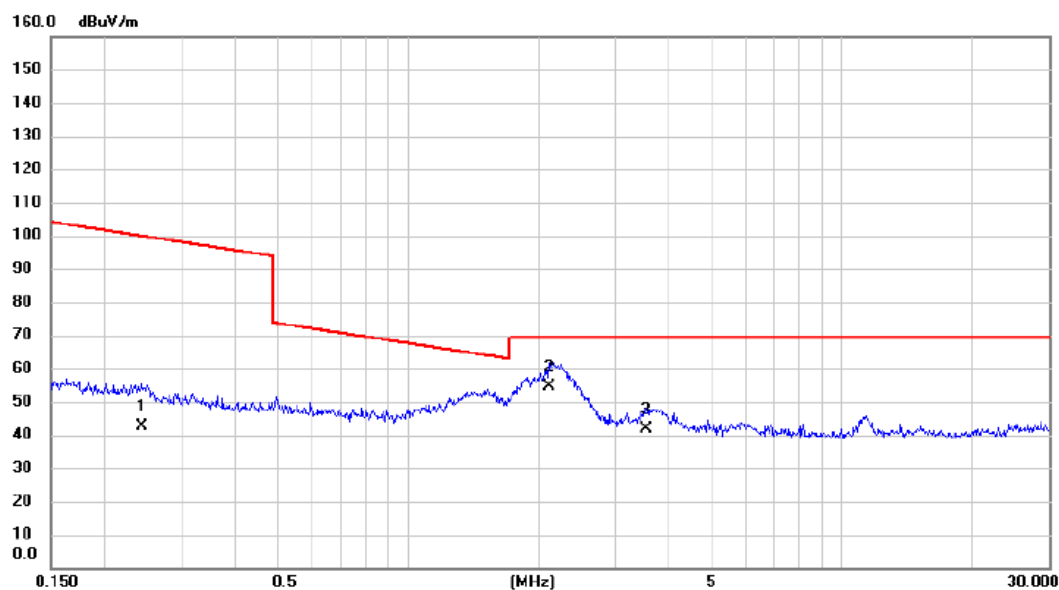


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 0.2442       | 25.50                    | 17.07                   | 42.57                      | 99.85           | -57.28       | AVG      |         |
| 2   | *   | 2.1213       | 37.70                    | 17.05                   | 54.75                      | 69.54           | -14.79       | QP       |         |
| 3   |     | 3.5466       | 25.60                    | 16.10                   | 41.70                      | 69.54           | -27.84       | QP       |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX Mode Channel 00 \_1Mbps

Ant 90°

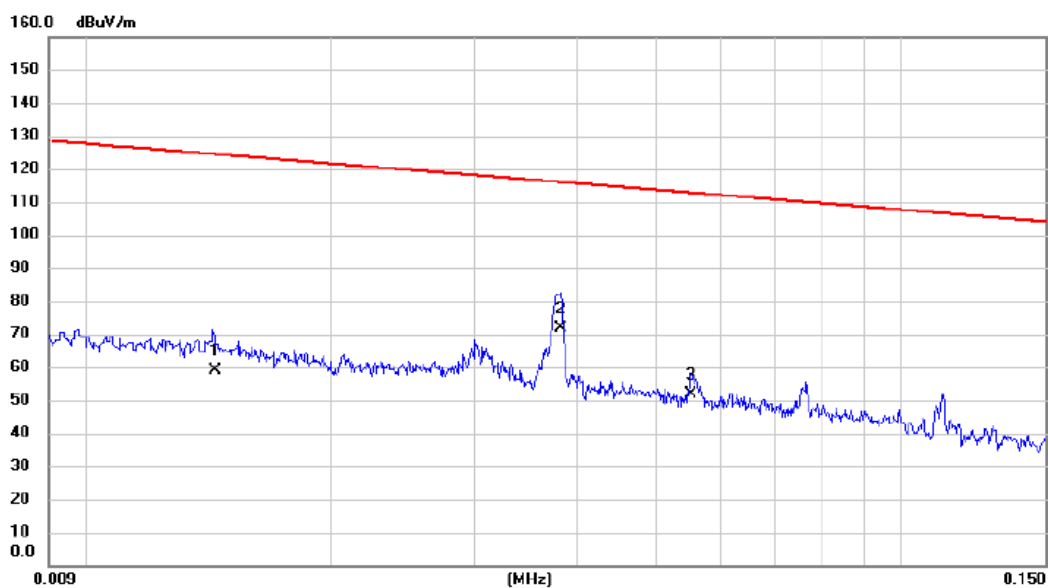

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 0.0144       | 38.30                    | 20.80                   | 59.10                      | 124.44          | -65.34       | AVG      |         |
| 2   | *   | 0.0382       | 52.10                    | 19.73                   | 71.83                      | 115.96          | -44.13       | AVG      |         |
| 3   |     | 0.0553       | 32.50                    | 19.42                   | 51.92                      | 112.75          | -60.83       | AVG      |         |


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX Mode Channel 00 \_1Mbps

Ant 90°

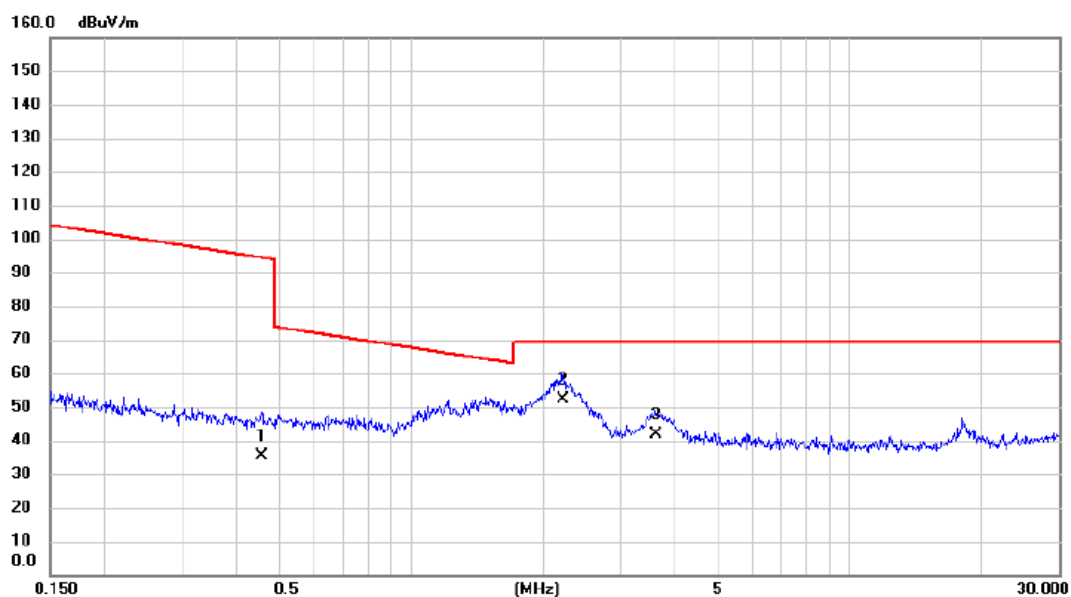

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 0.4564       | 18.50                    | 16.98                   | 35.48                      | 94.42           | -58.94       | AVG      |         |
| 2   | *   | 2.2132       | 35.40                    | 16.99                   | 52.39                      | 69.54           | -17.15       | QP       |         |
| 3   |     | 3.6034       | 25.80                    | 16.06                   | 41.86                      | 69.54           | -27.68       | QP       |         |

**REMARKS:**


- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

## APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode: TX Mode Channel 00 \_1Mbps

Vertical

80 dBuV/m

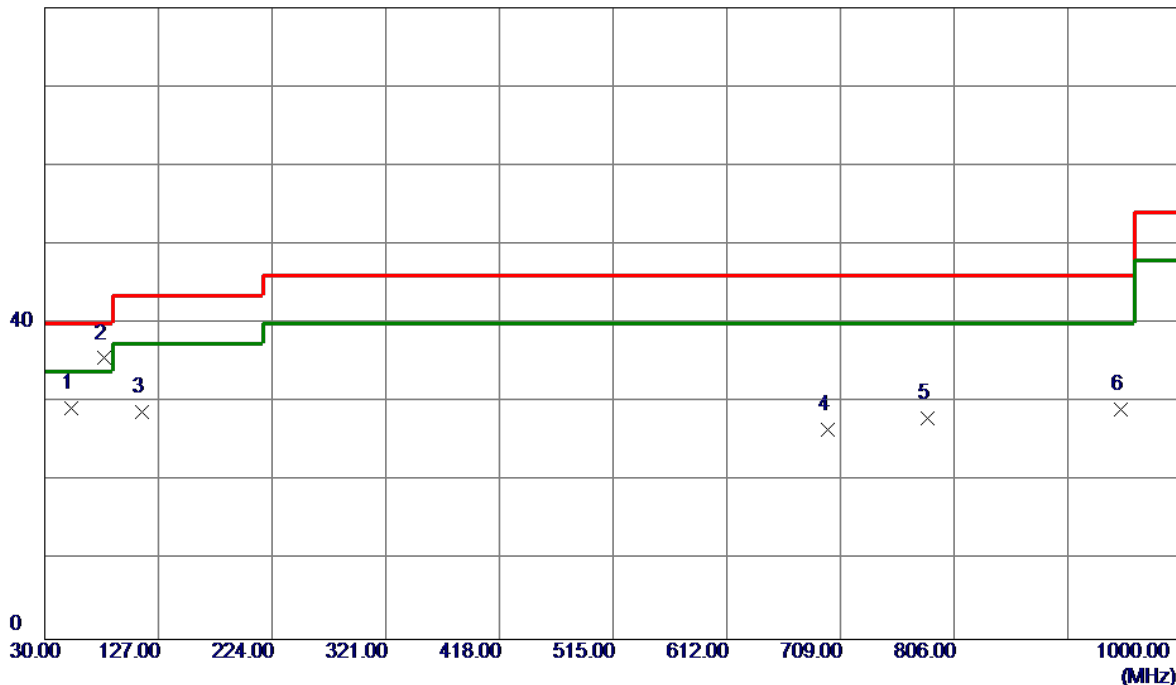

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 52.3100      | 44.20                      | -14.89                  | 29.31                     | 40.00           | -10.69       | Peak     |         |
| 2 * | 80.4400      | 54.22                      | -18.62                  | 35.60                     | 40.00           | -4.40        | Peak     |         |
| 3   | 113.4200     | 44.58                      | -15.74                  | 28.84                     | 43.50           | -14.66       | Peak     |         |
| 4   | 698.3300     | 29.41                      | -2.83                   | 26.58                     | 46.00           | -19.42       | Peak     |         |
| 5   | 783.6900     | 29.95                      | -2.02                   | 27.93                     | 46.00           | -18.07       | Peak     |         |
| 6   | 948.5900     | 27.71                      | 1.35                    | 29.06                     | 46.00           | -16.94       | Peak     |         |

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX Mode Channel 00 \_1Mbps

### Horizontal

80 dBuV/m

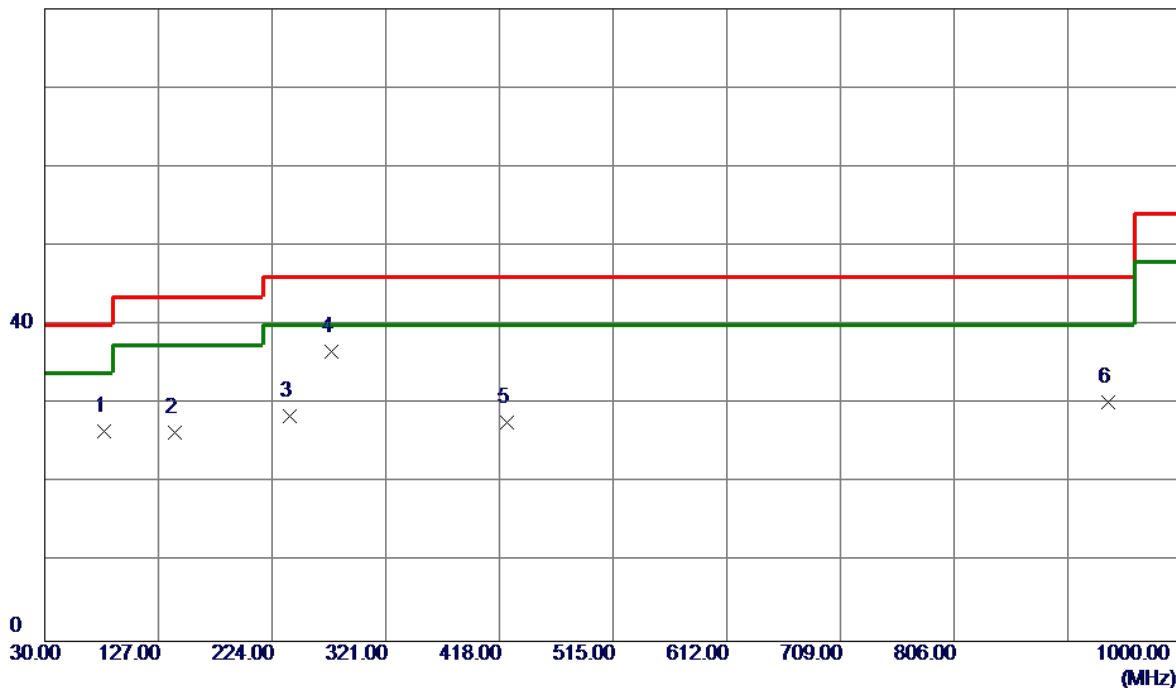

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 80.4400      | 45.24                      | -18.62                  | 26.62                     | 40.00           | -13.38       | Peak     |         |
| 2   | 140.5800     | 38.46                      | -12.06                  | 26.40                     | 43.50           | -17.10       | Peak     |         |
| 3   | 238.5500     | 43.14                      | -14.72                  | 28.42                     | 46.00           | -17.58       | Peak     |         |
| 4 * | 274.4400     | 48.57                      | -12.00                  | 36.57                     | 46.00           | -9.43        | Peak     |         |
| 5   | 424.7900     | 36.15                      | -8.40                   | 27.75                     | 46.00           | -18.25       | Peak     |         |
| 6   | 936.9500     | 29.32                      | 0.89                    | 30.21                     | 46.00           | -15.79       | Peak     |         |

#### REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

## APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode: TX 2402 MHz \_CH00\_1Mbps

**Vertical**

130 dBuV/m

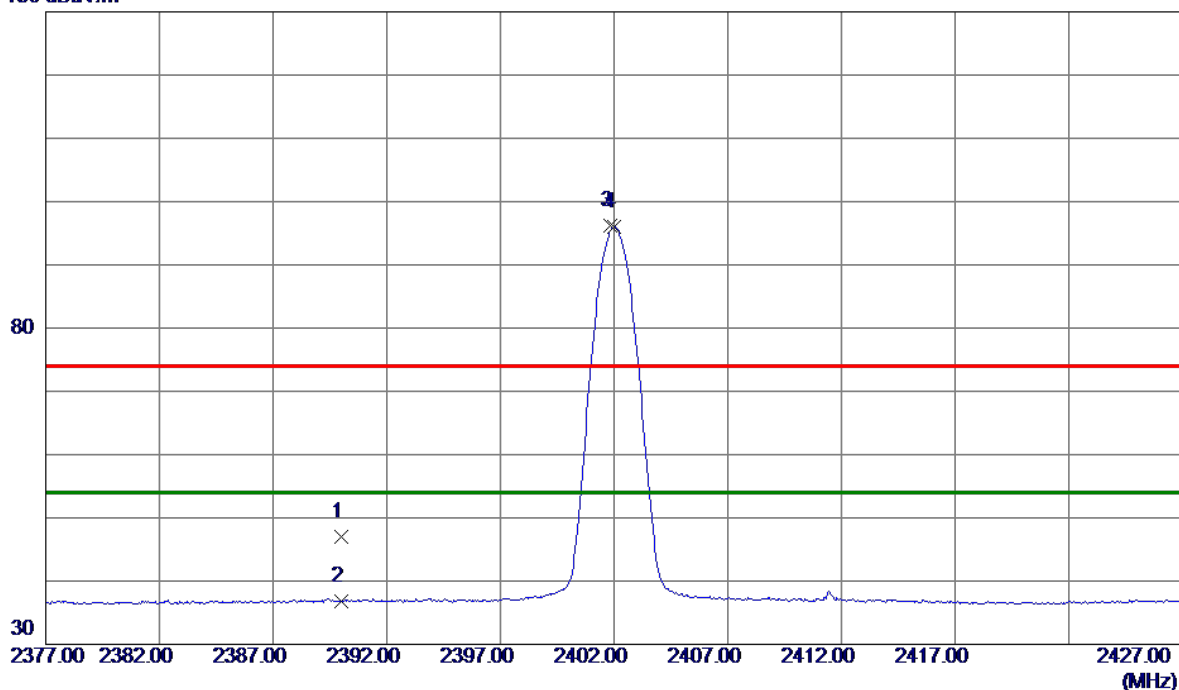

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 40.05                      | 7.01                    | 47.06                     | 74.00           | -26.94       | Peak     |          |
| 2   | 2390.0000    | 29.78                      | 7.01                    | 36.79                     | 54.00           | -17.21       | AVG      |          |
| 3   | 2401.8500    | 89.12                      | 7.01                    | 96.13                     | 74.00           | 22.13        | Peak     | No Limit |
| 4 * | 2402.0000    | 88.90                      | 7.01                    | 95.91                     | 54.00           | 41.91        | AVG      | No Limit |

**REMARKS:**


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX 2402 MHz _CH00_1Mbps |
|------------|-------------------------|

### Vertical

80 dBuV/m

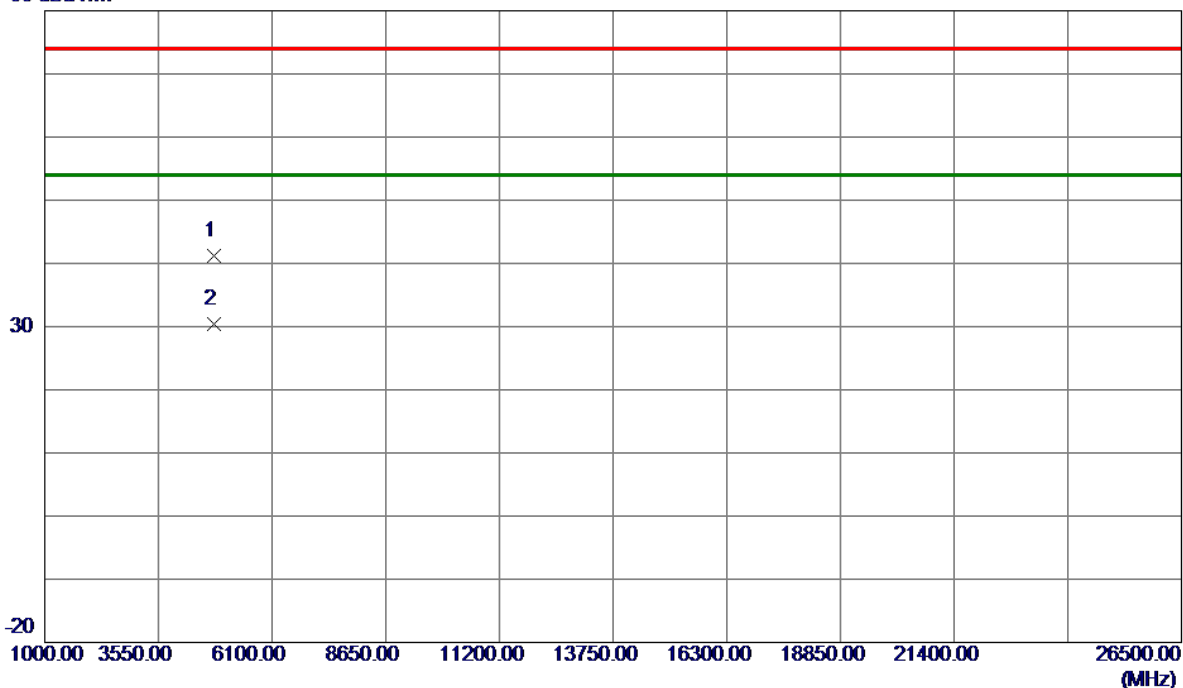


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4802.7550    | 37.10                      | 4.19                    | 41.29                     | 74.00           | -32.71       | Peak     |         |
| 2 * | 4803.6850    | 26.13                      | 4.19                    | 30.32                     | 54.00           | -23.68       | AVG      |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2402 MHz \_CH00\_1Mbps

### Horizontal

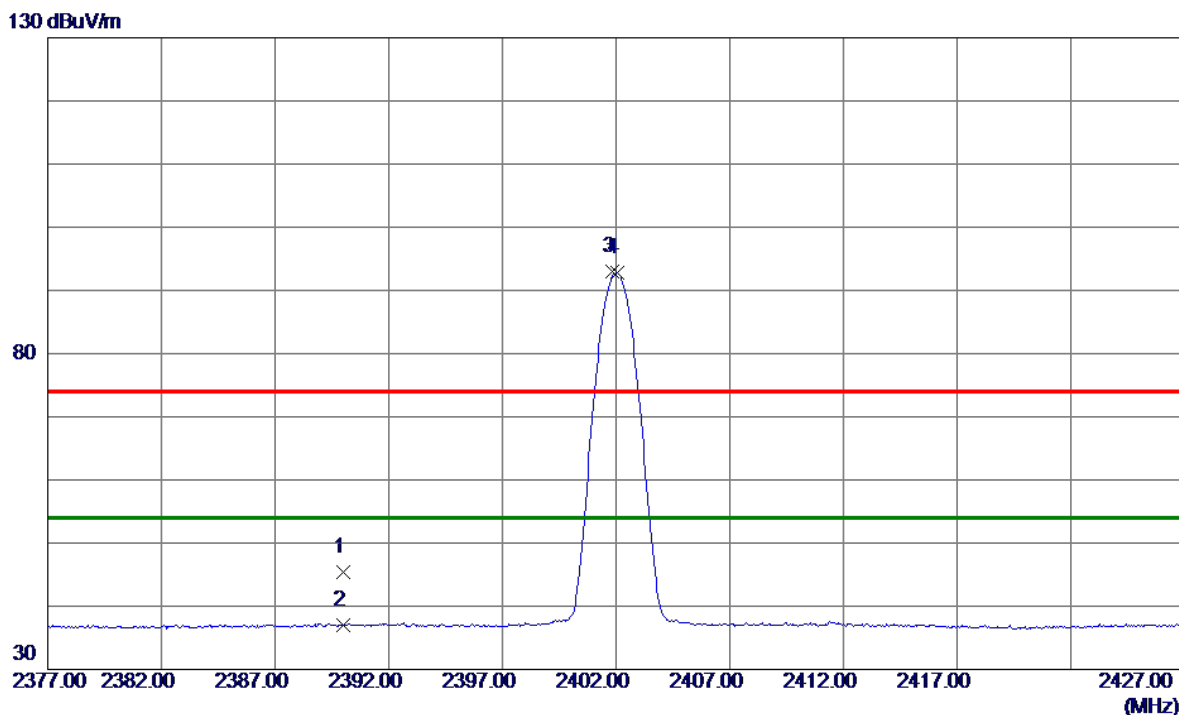

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 38.45                      | 7.01                    | 45.46                     | 74.00           | -28.54       | Peak     |          |
| 2   | 2390.0000    | 30.01                      | 7.01                    | 37.02                     | 54.00           | -16.98       | AVG      |          |
| 3   | 2401.8500    | 86.00                      | 7.01                    | 93.01                     | 74.00           | 19.01        | Peak     | No Limit |
| 4 * | 2402.0500    | 85.72                      | 7.01                    | 92.73                     | 54.00           | 38.73        | AVG      | No Limit |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX 2402 MHz _CH00_1Mbps |
|------------|-------------------------|

### Horizontal

80 dBuV/m

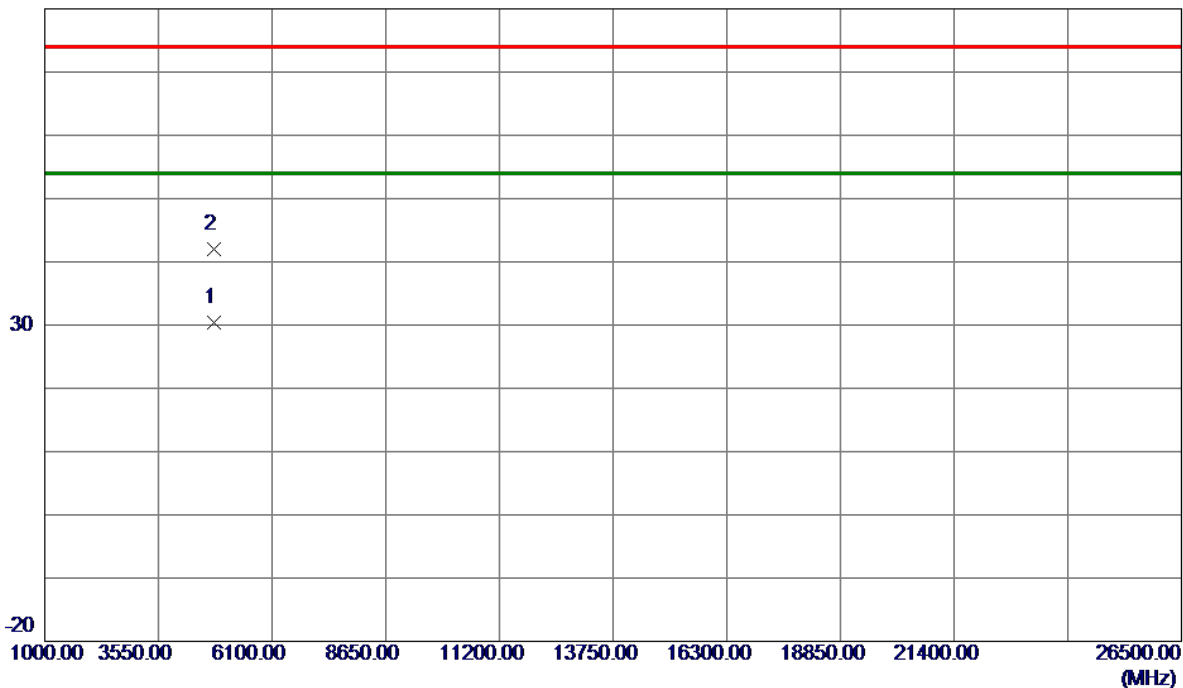


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4806.0950    | 26.12                      | 4.19                    | 30.31                     | 54.00           | -23.69       | AVG      |         |
| 2   | 4806.1150    | 37.77                      | 4.19                    | 41.96                     | 74.00           | -32.04       | Peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441 MHz \_CH39\_1Mbps

### Vertical

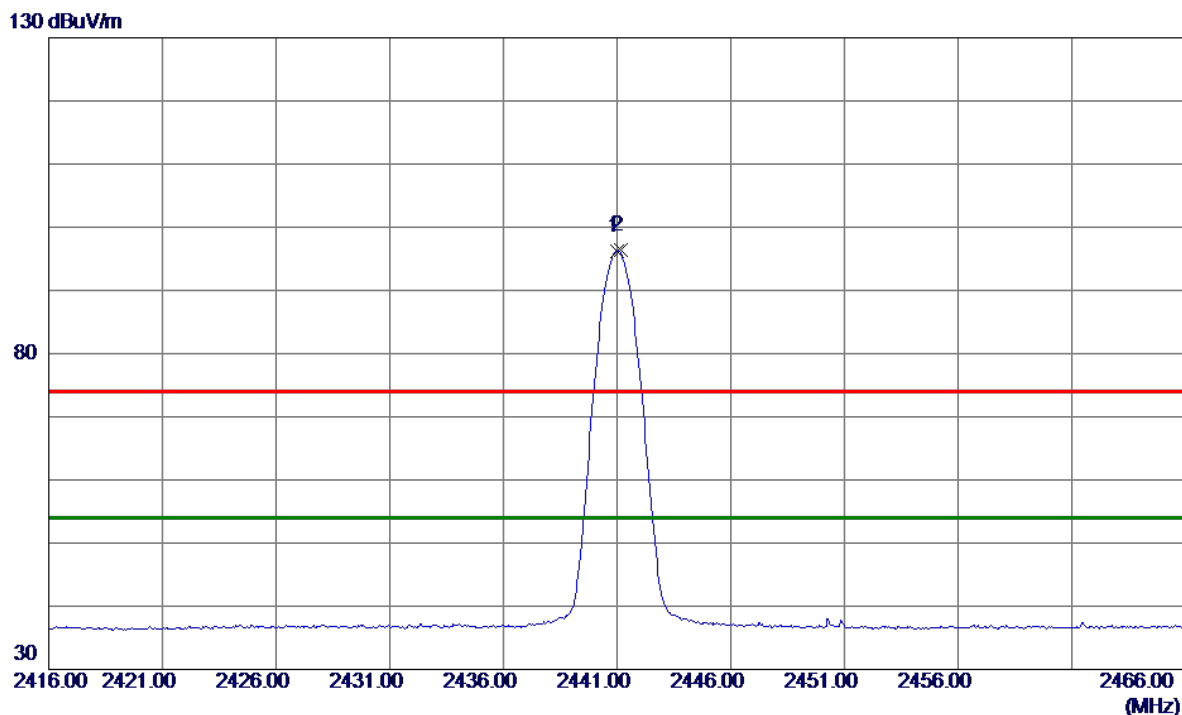

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 2441.0000    | 89.18                      | 7.02                    | 96.20                     | 54.00           | 42.20        | AVG      | No Limit |
| 2   | 2441.1500    | 89.43                      | 7.02                    | 96.45                     | 74.00           | 22.45        | Peak     | No Limit |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX 2441 MHz _CH39_1Mbps |
|------------|-------------------------|

### Vertical

80 dBuV/m

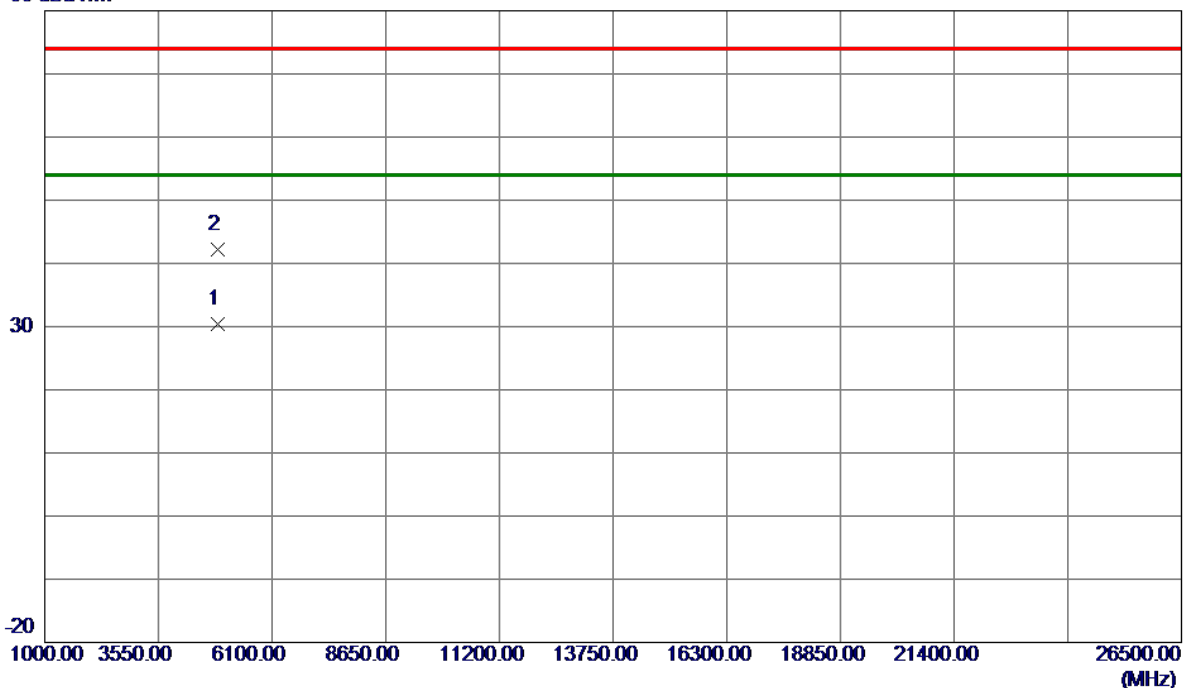


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4880.2400    | 26.03                      | 4.35                    | 30.38                     | 54.00           | -23.62       | AVG      |         |
| 2   | 4883.6700    | 37.80                      | 4.36                    | 42.16                     | 74.00           | -31.84       | Peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX 2441 MHz _CH39_1Mbps |
|------------|-------------------------|

### Horizontal

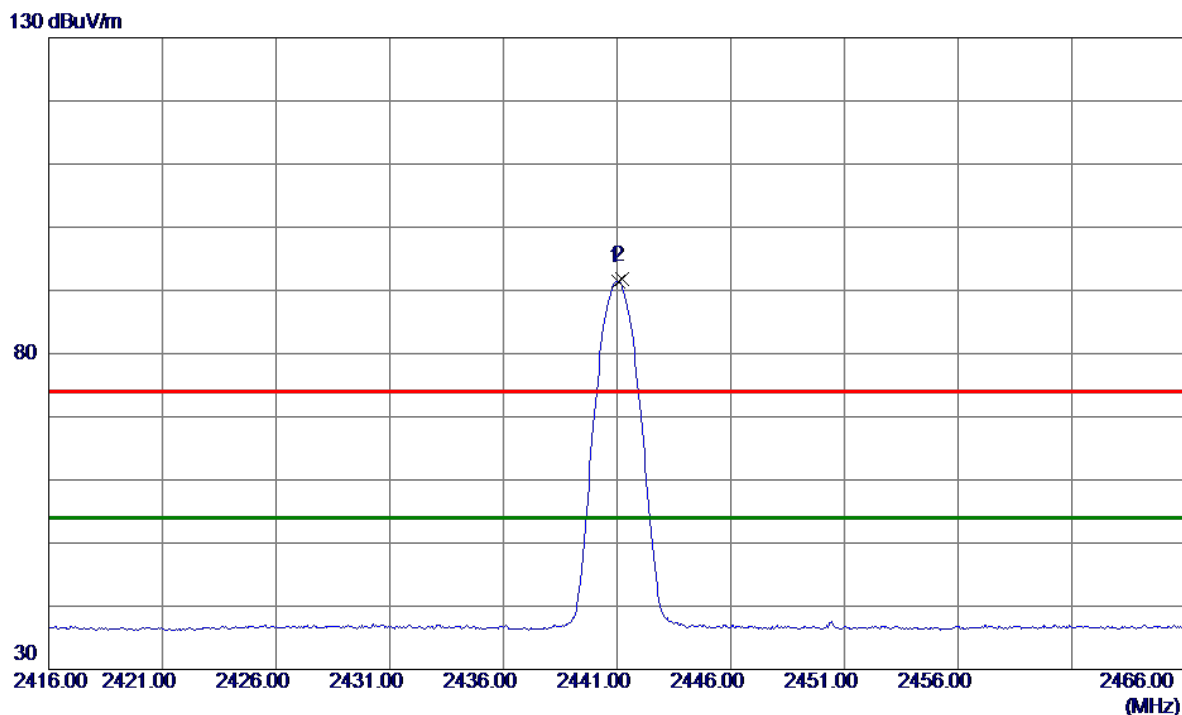

| No. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |          |
|-----|-----------|---------------|----------------|-------------|--------|--------|----------|----------|
|     | MHz       | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment  |
| 1 * | 2441.0500 | 84.37         | 7.02           | 91.39       | 54.00  | 37.39  | AVG      | No Limit |
| 2   | 2441.2000 | 84.68         | 7.02           | 91.70       | 74.00  | 17.70  | Peak     | No Limit |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX 2441 MHz _CH39_ 1Mbps |
|------------|--------------------------|

### Horizontal

80 dBuV/m

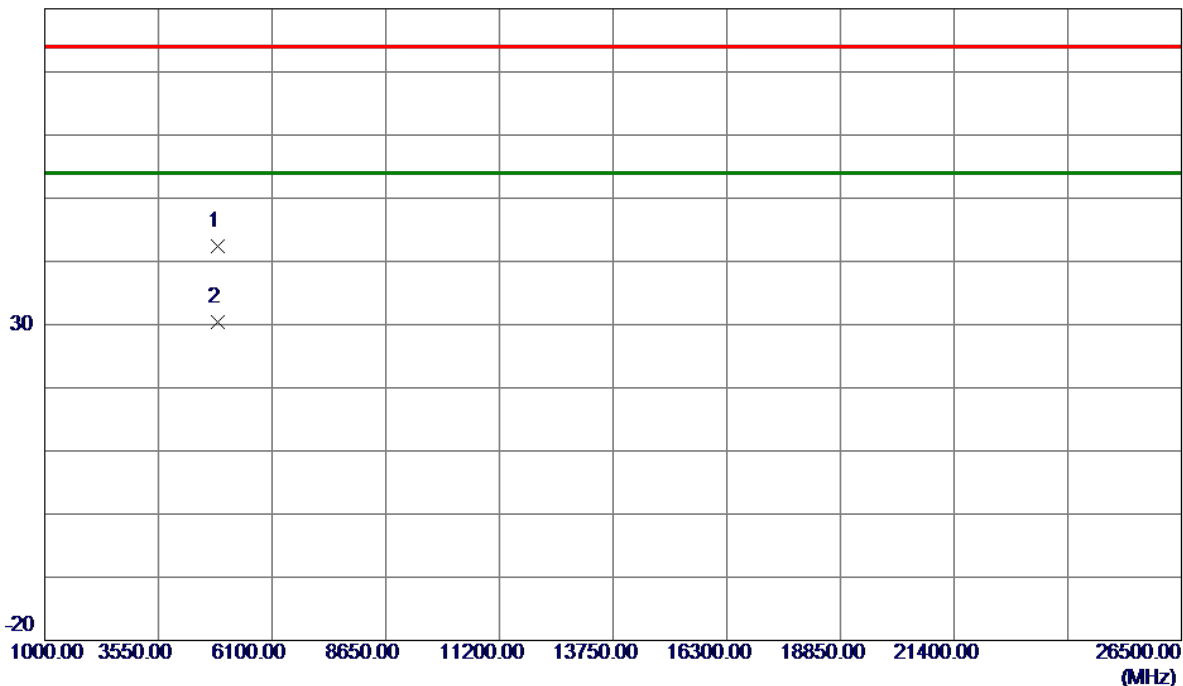

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4879.8500    | 38.10                      | 4.35                    | 42.45                     | 74.00           | -31.55       | Peak     |         |
| 2 * | 4880.7750    | 26.09                      | 4.35                    | 30.44                     | 54.00           | -23.56       | AVG      |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2480 MHz \_CH78\_1Mbps

**Vertical**

130 dBuV/m

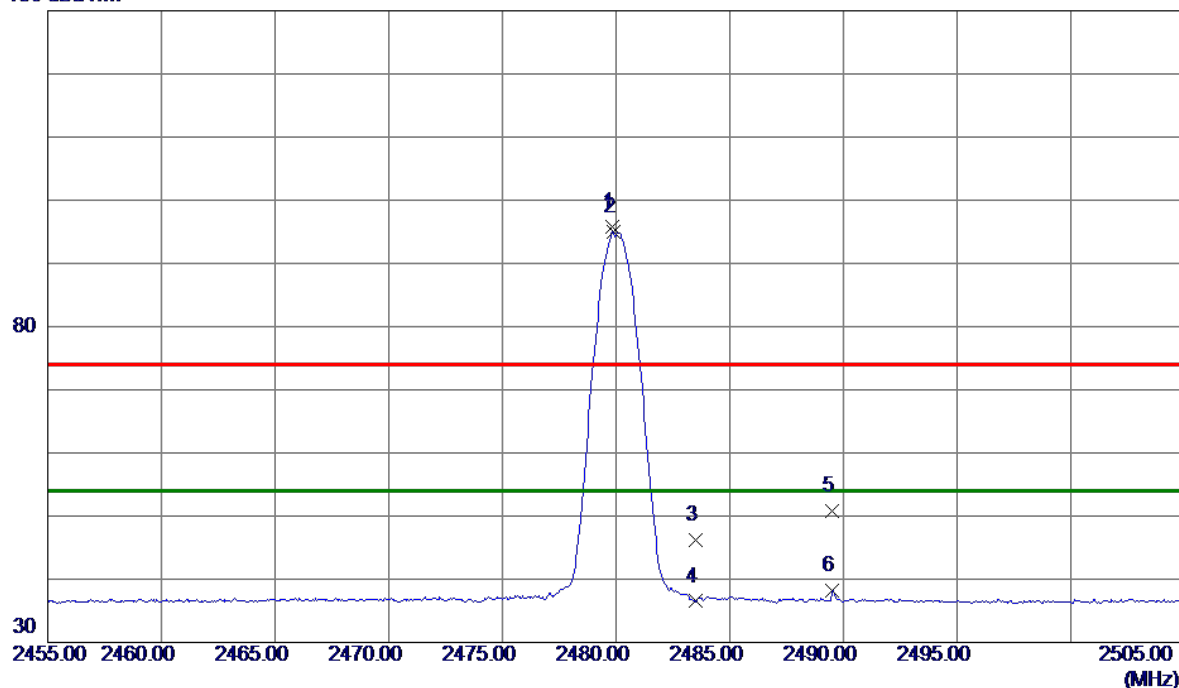

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2479.8500    | 88.70                      | 7.03                    | 95.73                     | 74.00           | 21.73        | Peak     | No Limit |
| 2 * | 2479.9000    | 88.01                      | 7.03                    | 95.04                     | 54.00           | 41.04        | AVG      | No Limit |
| 3   | 2483.5000    | 39.16                      | 7.03                    | 46.19                     | 74.00           | -27.81       | Peak     |          |
| 4   | 2483.5000    | 29.47                      | 7.03                    | 36.50                     | 54.00           | -17.50       | AVG      |          |
| 5   | 2489.5000    | 43.81                      | 7.03                    | 50.84                     | 74.00           | -23.16       | Peak     |          |
| 6   | 2489.5000    | 31.24                      | 7.03                    | 38.27                     | 54.00           | -15.73       | AVG      |          |

**REMARKS:**


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX 2480 MHz _CH78_1Mbps |
|------------|-------------------------|

### Vertical

80 dBuV/m

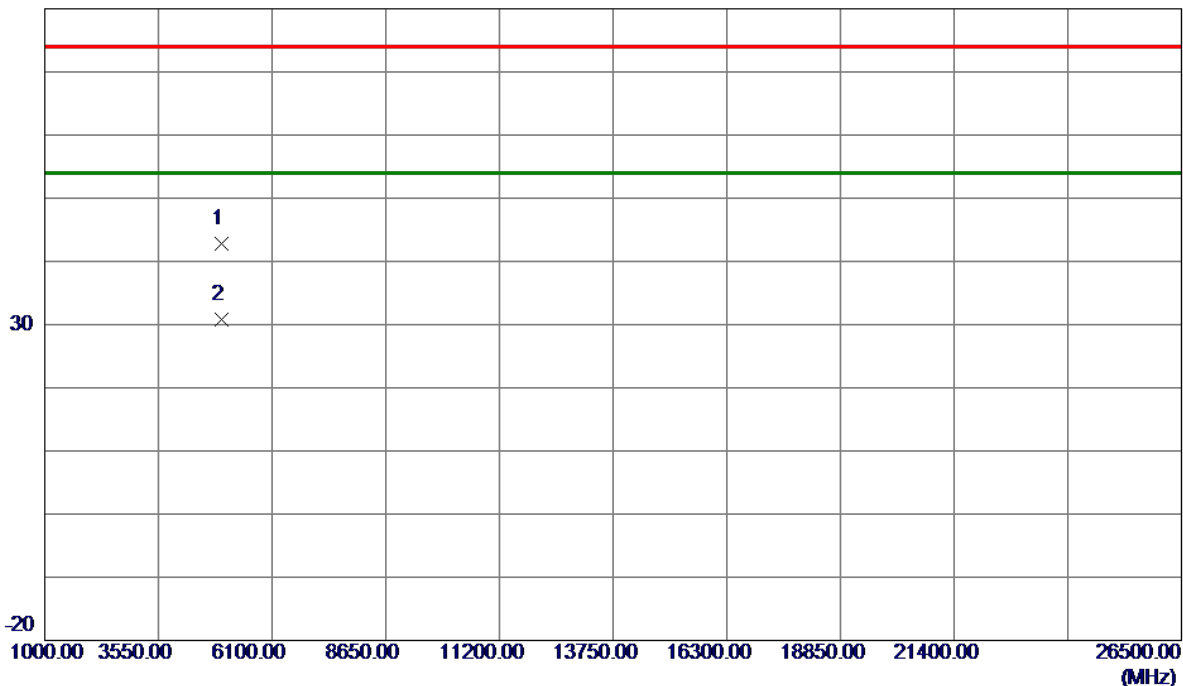


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4959.4100    | 38.34                      | 4.52                    | 42.86                     | 74.00           | -31.14       | Peak     |         |
| 2 * | 4960.4700    | 26.36                      | 4.52                    | 30.88                     | 54.00           | -23.12       | AVG      |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2480 MHz \_CH78\_1Mbps

### Horizontal

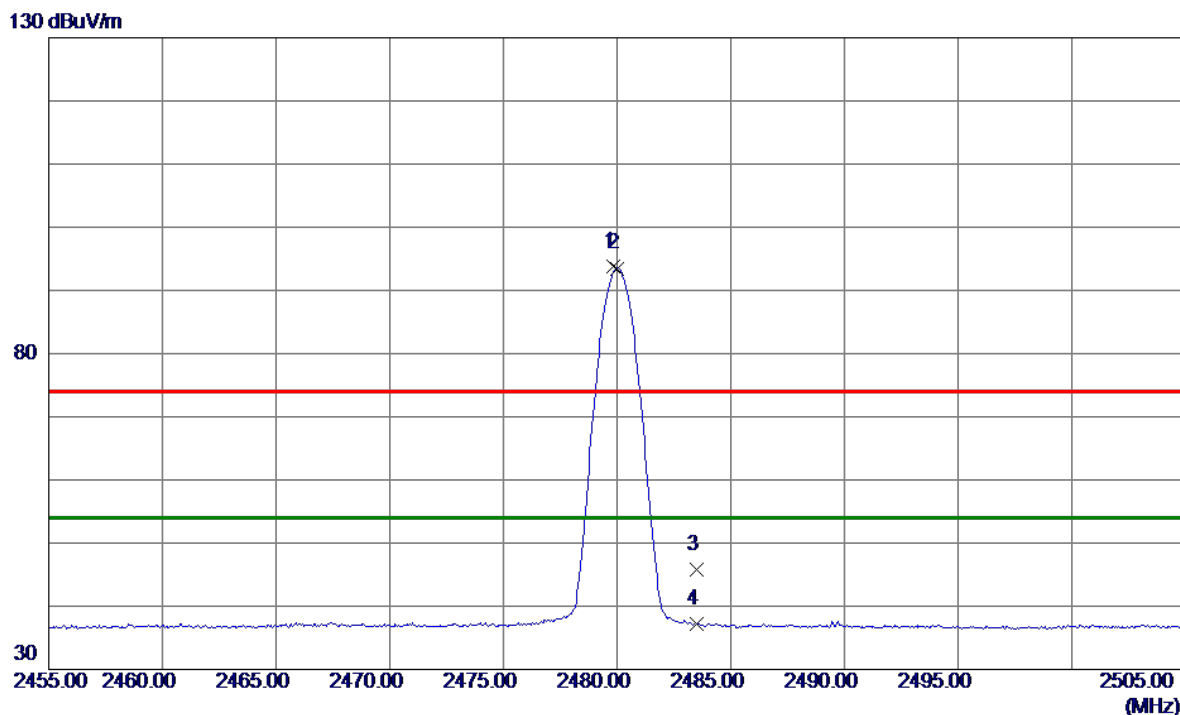

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2479.8500    | 86.76                      | 7.03                    | 93.79                     | 74.00           | 19.79        | Peak     | No Limit |
| 2 * | 2480.0000    | 86.47                      | 7.03                    | 93.50                     | 54.00           | 39.50        | AVG      | No Limit |
| 3   | 2483.5000    | 38.77                      | 7.03                    | 45.80                     | 74.00           | -28.20       | Peak     |          |
| 4   | 2483.5000    | 30.16                      | 7.03                    | 37.19                     | 54.00           | -16.81       | AVG      |          |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX 2480 MHz _CH78_1Mbps |
|------------|-------------------------|

### Horizontal

80 dBuV/m

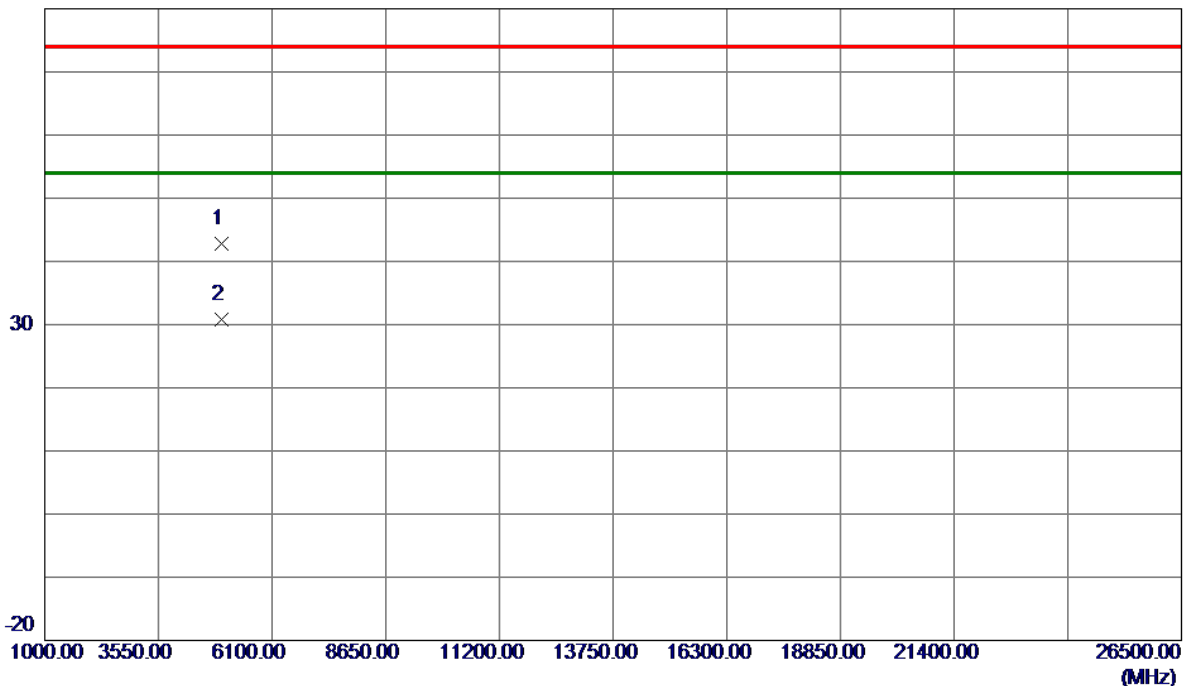


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4957.6200    | 38.20                      | 4.51                    | 42.71                     | 74.00           | -31.29       | Peak     |         |
| 2 * | 4961.4550    | 26.29                      | 4.52                    | 30.81                     | 54.00           | -23.19       | AVG      |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2402 MHz \_CH00\_3Mbps

### Vertical

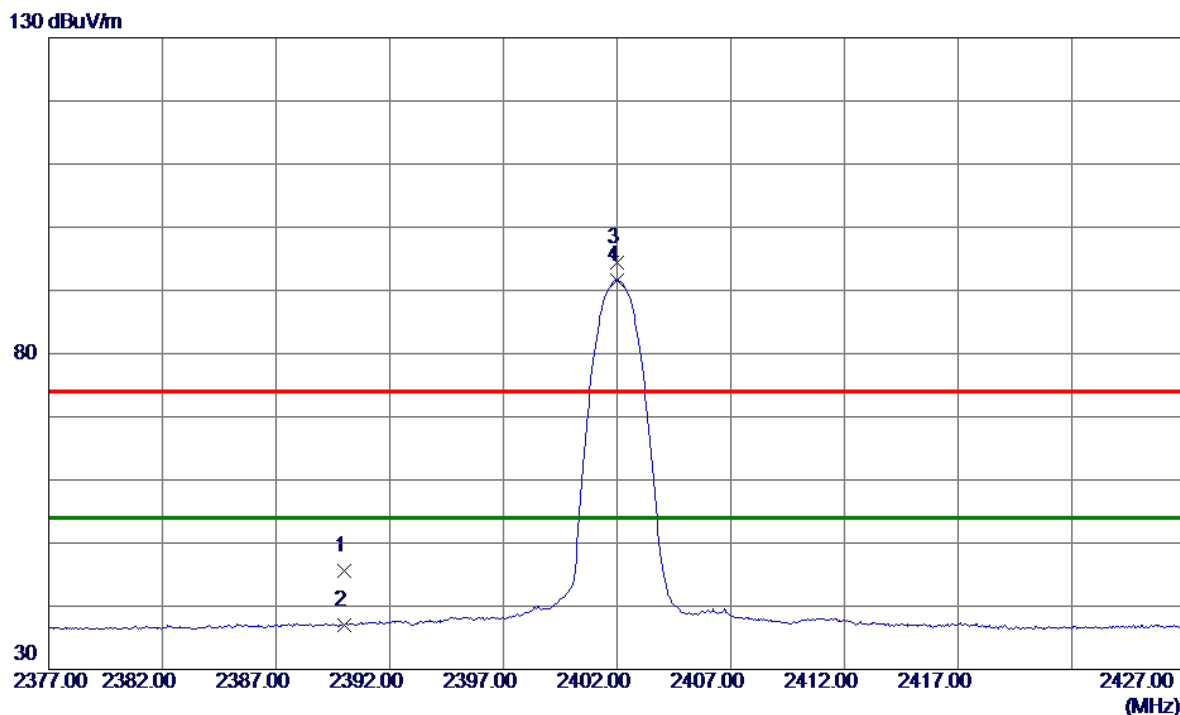

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 38.67                      | 7.01                    | 45.68                     | 74.00           | -28.32       | Peak     |          |
| 2   | 2390.0000    | 29.98                      | 7.01                    | 36.99                     | 54.00           | -17.01       | AVG      |          |
| 3   | 2402.0000    | 87.35                      | 7.01                    | 94.36                     | 74.00           | 20.36        | Peak     | No Limit |
| 4 * | 2402.0000    | 84.56                      | 7.01                    | 91.57                     | 54.00           | 37.57        | AVG      | No Limit |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX 2402 MHz _CH00_3Mbps |
|------------|-------------------------|

### Vertical

80 dBuV/m

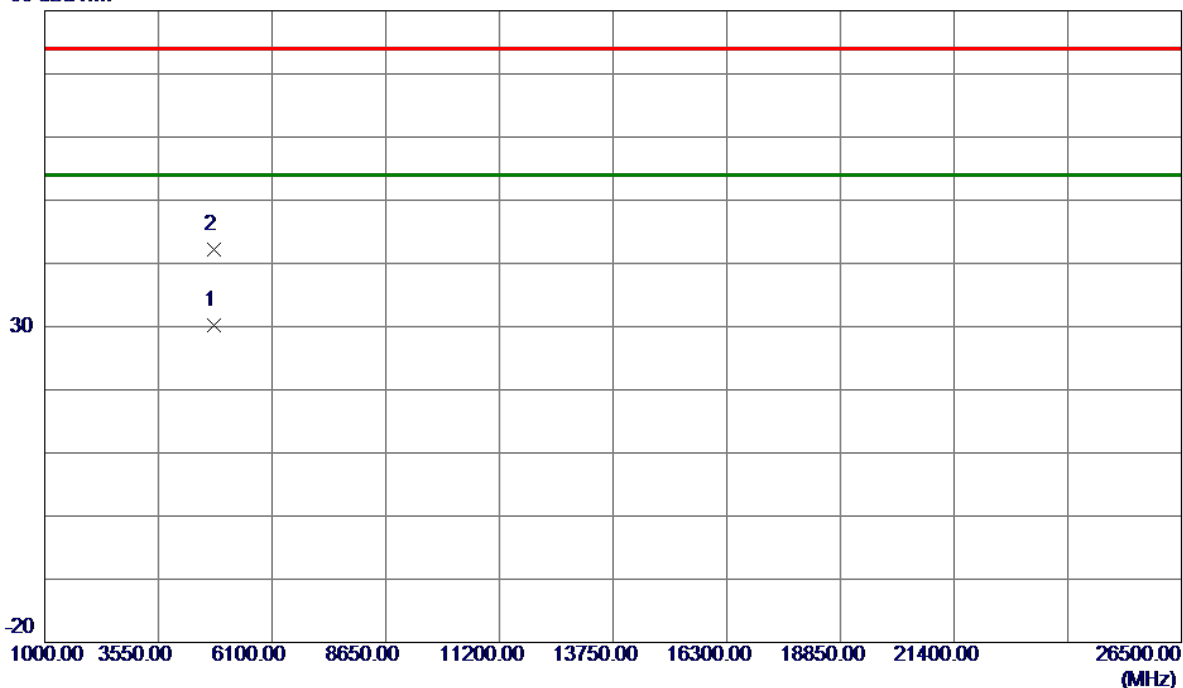

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4805.2799    | 26.00                      | 4.19                    | 30.19                     | 54.00           | -23.81       | AVG      |         |
| 2   | 4806.4100    | 37.98                      | 4.20                    | 42.18                     | 74.00           | -31.82       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2402 MHz \_CH00\_3Mbps

### Horizontal

130 dBuV/m

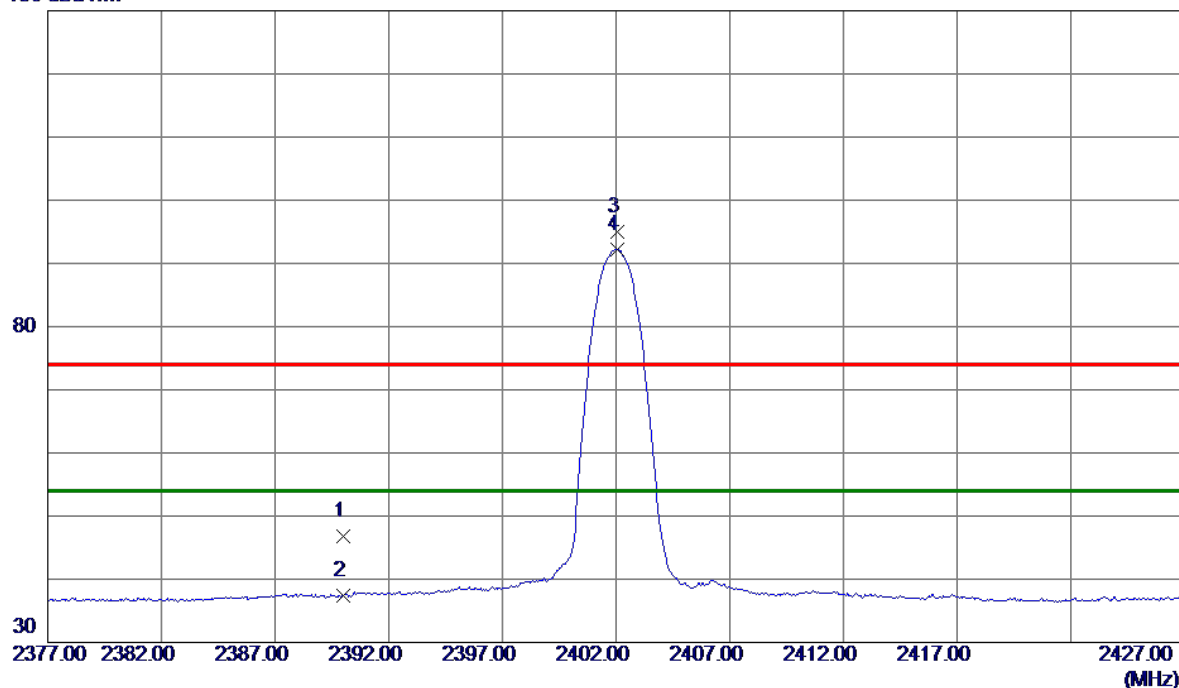

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 39.77                      | 7.01                    | 46.78                     | 74.00           | -27.22       | Peak     |          |
| 2   | 2390.0000    | 30.48                      | 7.01                    | 37.49                     | 54.00           | -16.51       | AVG      |          |
| 3   | 2402.0500    | 88.00                      | 7.01                    | 95.01                     | 74.00           | 21.01        | Peak     | No Limit |
| 4 * | 2402.0500    | 85.16                      | 7.01                    | 92.17                     | 54.00           | 38.17        | AVG      | No Limit |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX 2402 MHz _CH00_ 3Mbps |
|------------|--------------------------|

### Horizontal

80 dBuV/m

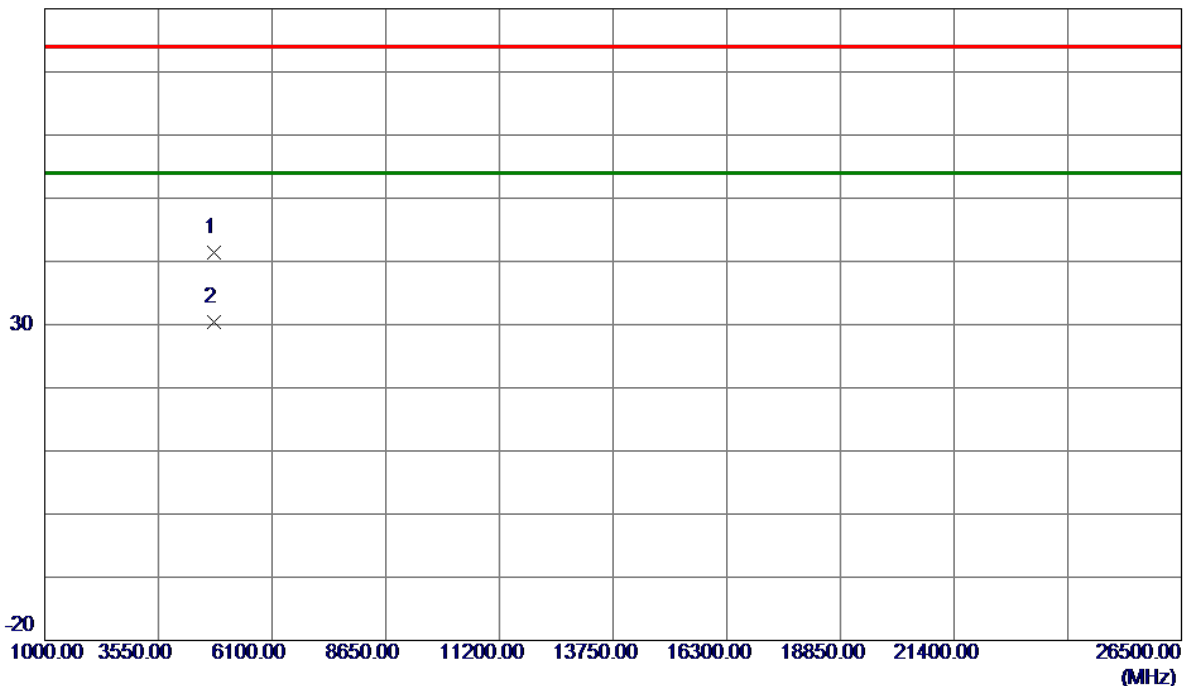


| No. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz       | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | 4804.5650 | 37.24         | 4.19           | 41.43       | 74.00  | -32.57 | Peak     |         |
| 2 * | 4806.2350 | 26.23         | 4.20           | 30.43       | 54.00  | -23.57 | AVG      |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441 MHz \_CH39\_3Mbps

### Vertical

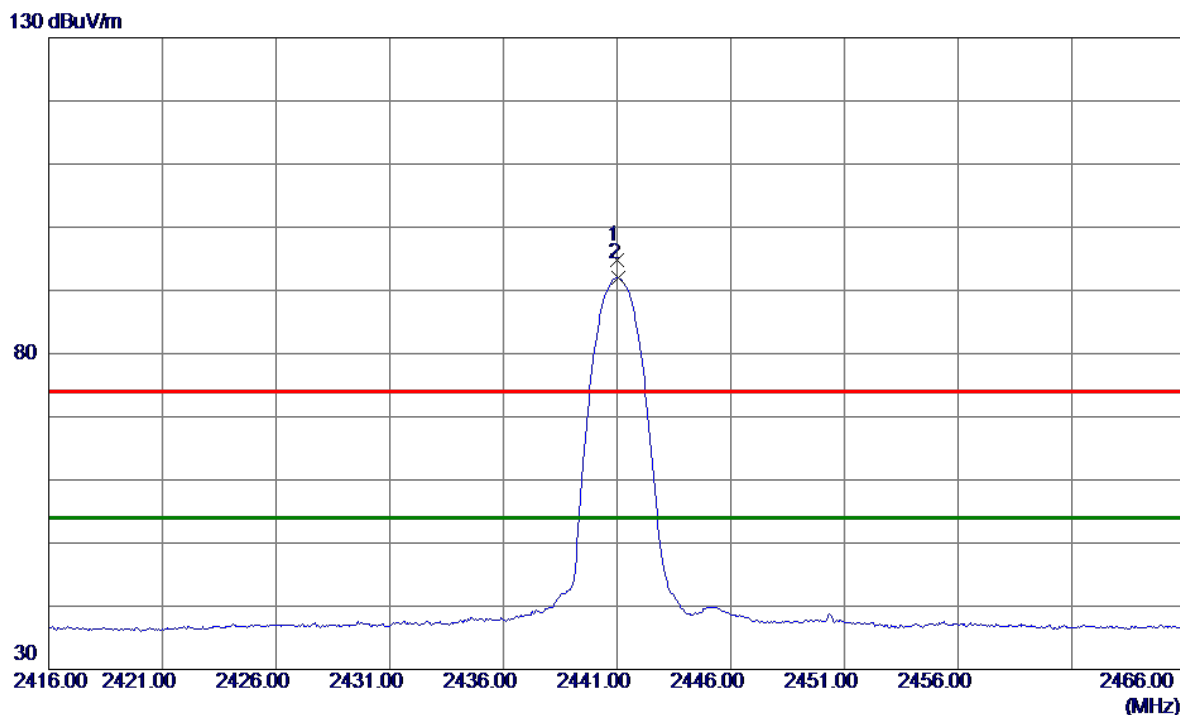

| No. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |          |
|-----|-----------|---------------|----------------|-------------|--------|--------|----------|----------|
|     | MHz       | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment  |
| 1   | 2441.0000 | 87.75         | 7.02           | 94.77       | 74.00  | 20.77  | Peak     | No Limit |
| 2 * | 2441.0500 | 85.00         | 7.02           | 92.02       | 54.00  | 38.02  | AVG      | No Limit |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX 2441 MHz _CH39_ 3Mbps |
|------------|--------------------------|

### Vertical

80 dBuV/m

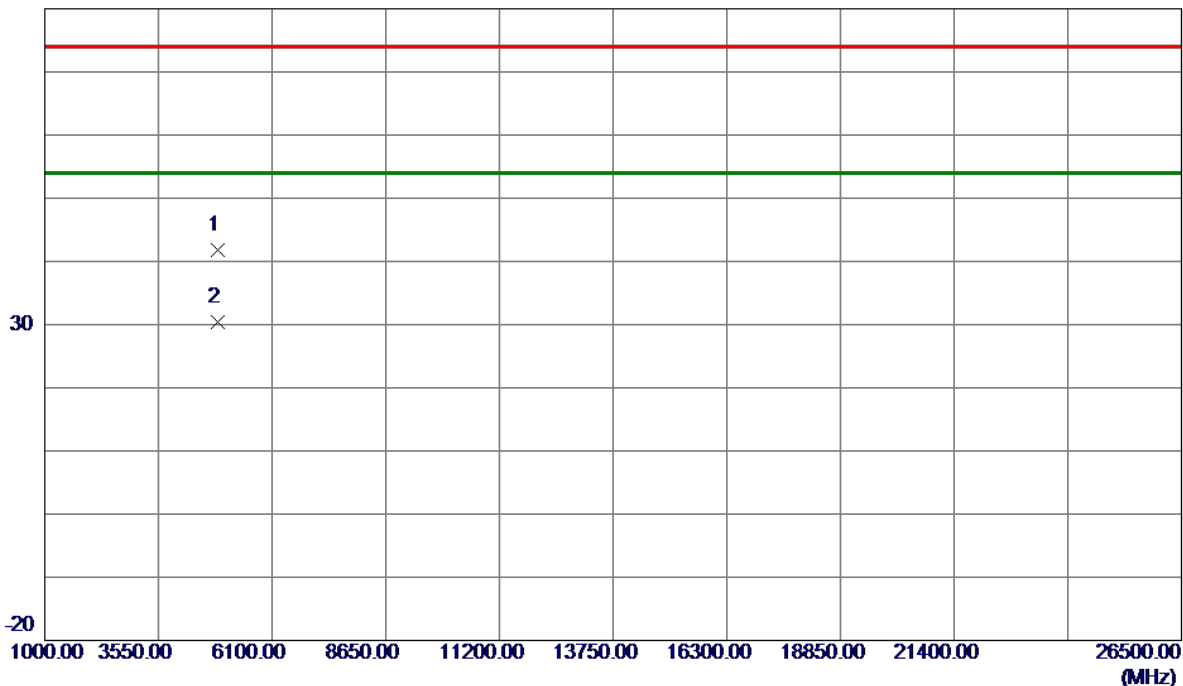


| No. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz       | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | 4881.7350 | 37.46         | 4.35           | 41.81       | 74.00  | -32.19 | Peak     |         |
| 2 * | 4883.8350 | 26.11         | 4.36           | 30.47       | 54.00  | -23.53 | AVG      |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX 2441 MHz _CH39_3Mbps |
|------------|-------------------------|

### Horizontal

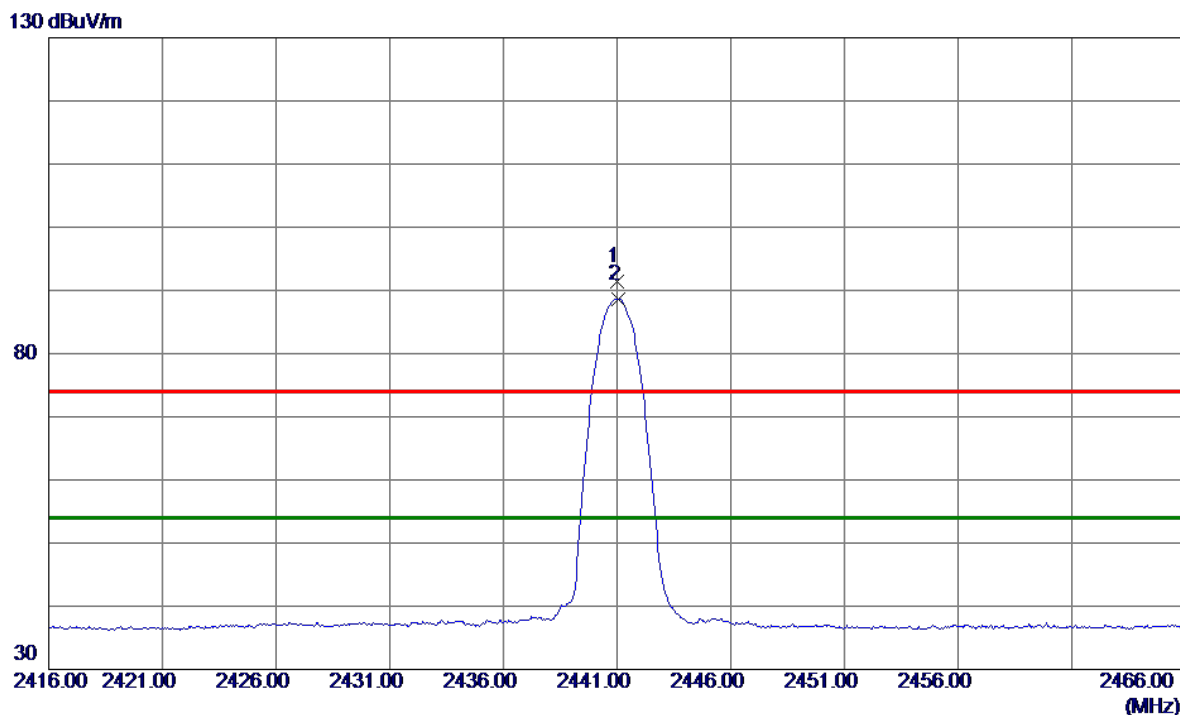

| No. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |          |
|-----|-----------|---------------|----------------|-------------|--------|--------|----------|----------|
|     | MHz       | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment  |
| 1   | 2441.0000 | 84.37         | 7.02           | 91.39       | 74.00  | 17.39  | Peak     | No Limit |
| 2 * | 2441.0500 | 81.65         | 7.02           | 88.67       | 54.00  | 34.67  | AVG      | No Limit |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX 2441 MHz _CH39_ 3Mbps |
|------------|--------------------------|

### Horizontal

80 dBuV/m

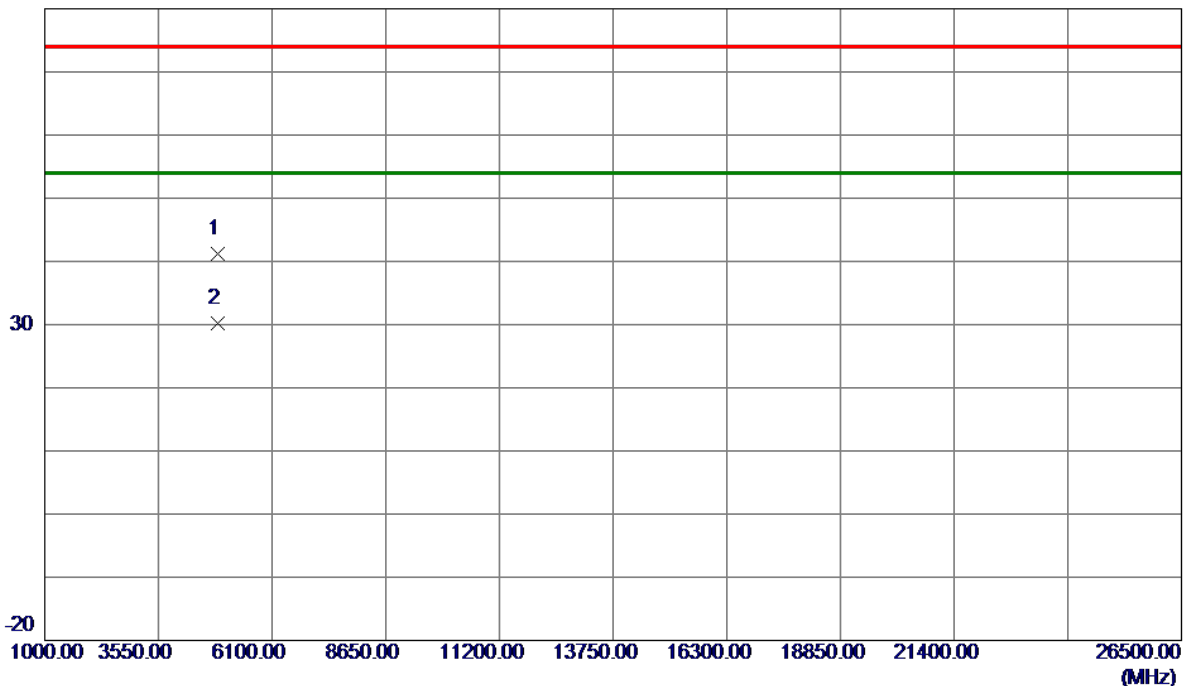

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4880.3000    | 36.93                      | 4.35                    | 41.28                     | 74.00           | -32.72       | Peak     |         |
| 2 * | 4883.3600    | 25.93                      | 4.36                    | 30.29                     | 54.00           | -23.71       | AVG      |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2480 MHz \_CH78\_3Mbps

**Vertical**

130 dBuV/m

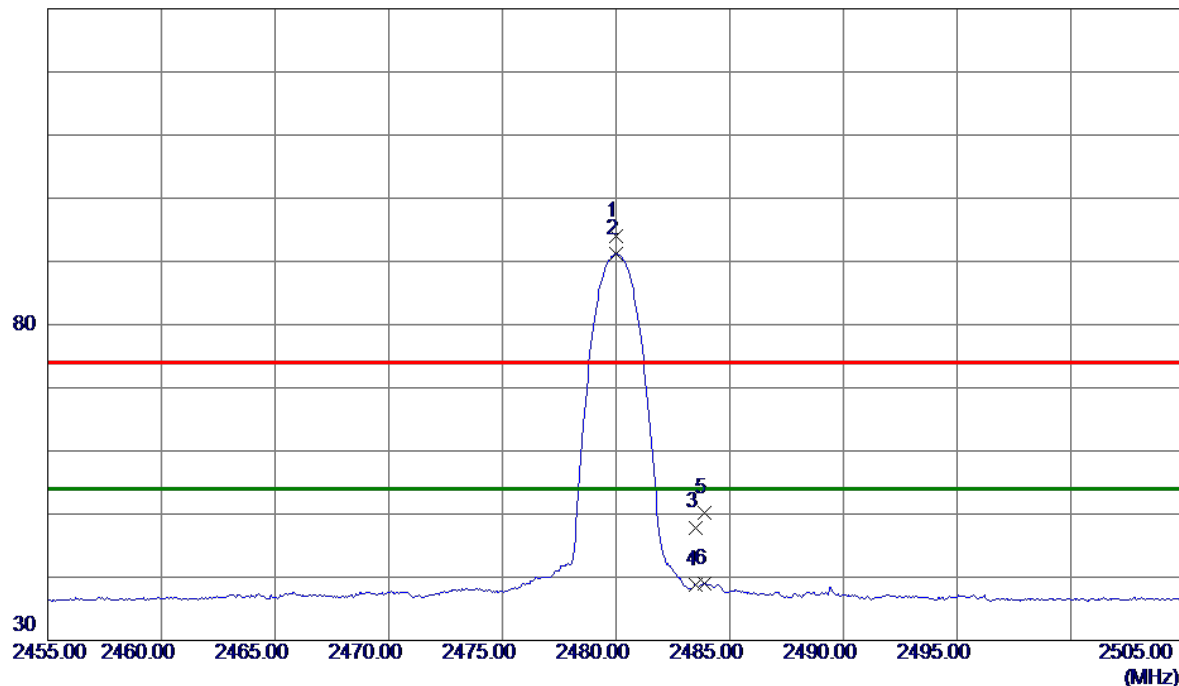

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2480.0000    | 86.97                      | 7.03                    | 94.00                     | 74.00           | 20.00        | Peak     | No Limit |
| 2 * | 2480.0000    | 84.14                      | 7.03                    | 91.17                     | 54.00           | 37.17        | AVG      | No Limit |
| 3   | 2483.5000    | 40.87                      | 7.03                    | 47.90                     | 74.00           | -26.10       | Peak     |          |
| 4   | 2483.5000    | 31.74                      | 7.03                    | 38.77                     | 54.00           | -15.23       | AVG      |          |
| 5   | 2483.9000    | 43.19                      | 7.03                    | 50.22                     | 74.00           | -23.78       | Peak     |          |
| 6   | 2483.9000    | 32.03                      | 7.03                    | 39.06                     | 54.00           | -14.94       | AVG      |          |

**REMARKS:**


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX 2480 MHz _CH78_ 3Mbps |
|------------|--------------------------|

### Vertical

80 dBuV/m

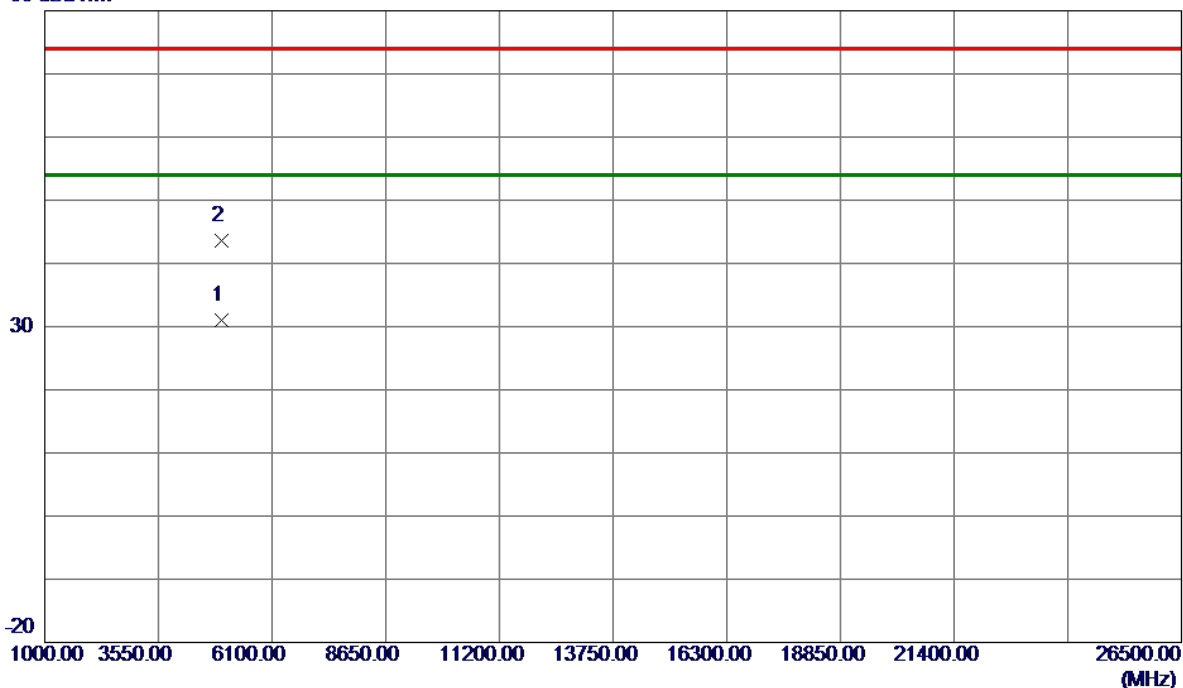

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4959.3350    | 26.44                      | 4.52                    | 30.96                     | 54.00           | -23.04       | AVG      |         |
| 2   | 4960.4950    | 39.07                      | 4.52                    | 43.59                     | 74.00           | -30.41       | Peak     |         |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2480 MHz \_CH78\_3Mbps

### Horizontal

130 dBuV/m

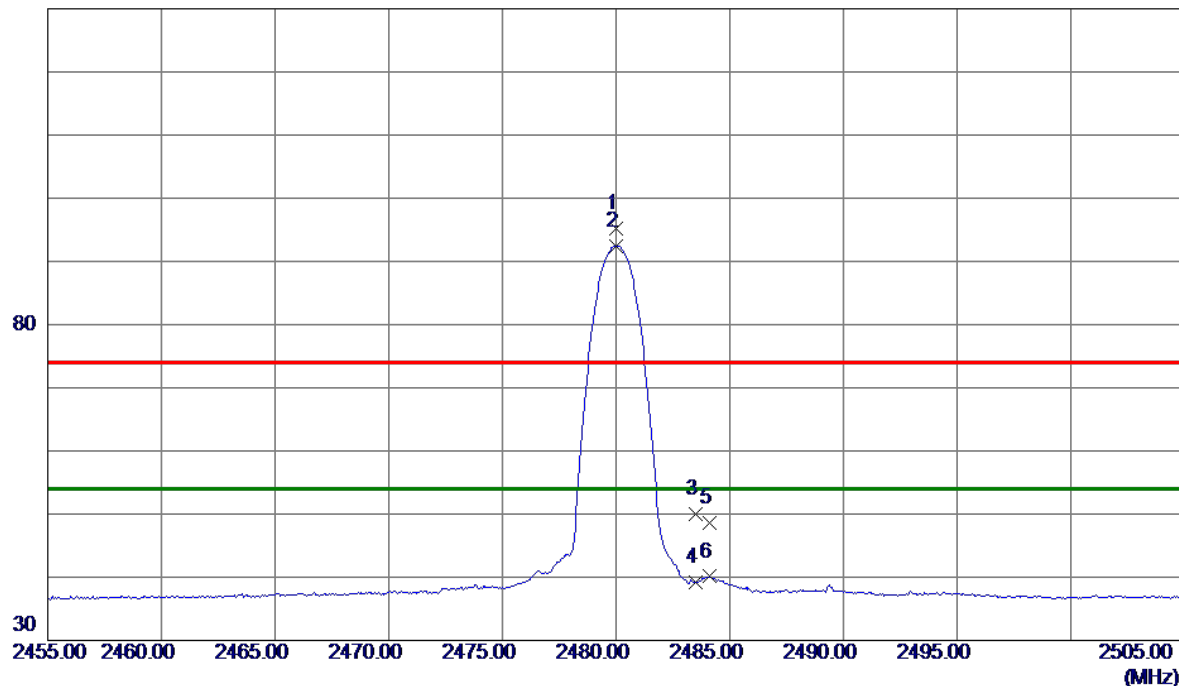

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2480.0000    | 88.19                      | 7.03                    | 95.22                     | 74.00           | 21.22        | Peak     | No Limit |
| 2 * | 2480.0000    | 85.39                      | 7.03                    | 92.42                     | 54.00           | 38.42        | AVG      | No Limit |
| 3   | 2483.5000    | 42.92                      | 7.03                    | 49.95                     | 74.00           | -24.05       | Peak     |          |
| 4   | 2483.5000    | 32.13                      | 7.03                    | 39.16                     | 54.00           | -14.84       | AVG      |          |
| 5   | 2484.1000    | 41.60                      | 7.03                    | 48.63                     | 74.00           | -25.37       | Peak     |          |
| 6   | 2484.1000    | 33.07                      | 7.03                    | 40.10                     | 54.00           | -13.90       | AVG      |          |


#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX 2480 MHz _CH78_ 3Mbps |
|------------|--------------------------|

### Horizontal

80 dBuV/m

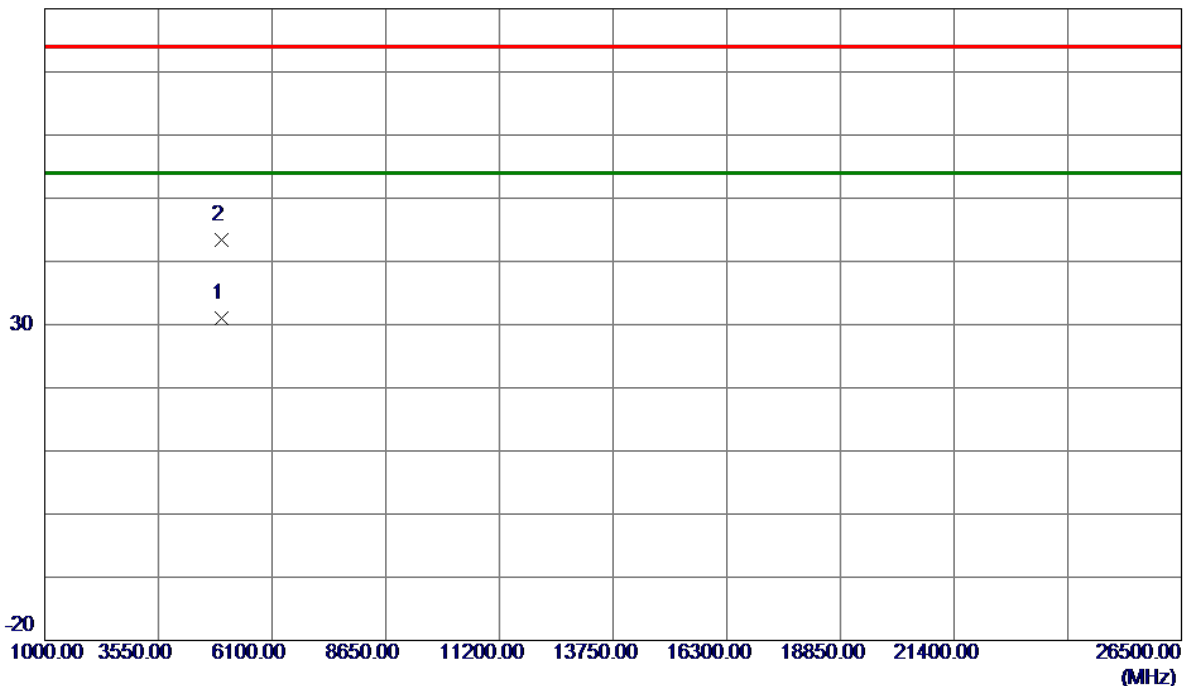

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4959.4049    | 26.50                      | 4.52                    | 31.02                     | 54.00           | -22.98       | AVG      |         |
| 2   | 4960.1050    | 38.87                      | 4.52                    | 43.39                     | 74.00           | -30.61       | Peak     |         |


#### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.


## APPENDIX E - NUMBER OF HOPPING FREQUENCY

| Test Mode                   | Hopping Mode_1Mbps |
|-----------------------------|--------------------|
| Number of Hopping Frequency | 79                 |

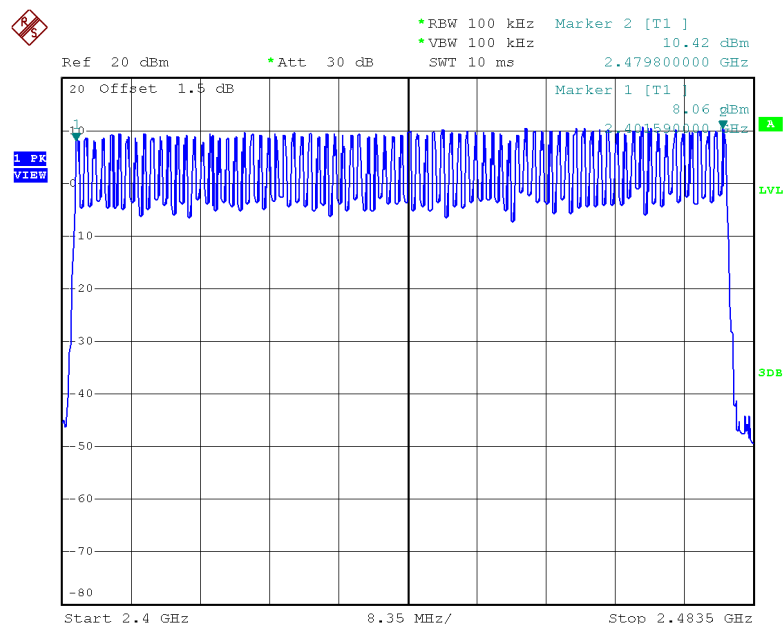

Date: 2.APR.2019 11:48:26

| Test Mode                   | Hopping Mode_3Mbps |
|-----------------------------|--------------------|
| Number of Hopping Frequency | 79                 |

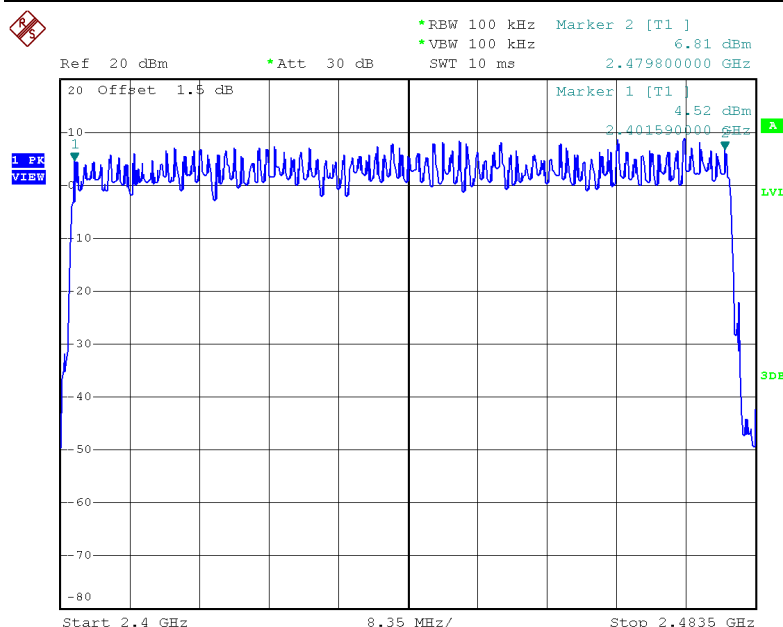


Date: 2.APR.2019 12:13:35

## APPENDIX F - AVERAGE TIME OF OCCUPANCY

|            |               |
|------------|---------------|
| Test Mode: | TX Mode_1Mbps |
|------------|---------------|


| Data Packet | Frequency (MHz) | Pulse Duration (ms) | Dwell Time (s) | Limits (s) | Test Result |
|-------------|-----------------|---------------------|----------------|------------|-------------|
| DH5         | 2402            | 2.8800              | 0.3072         | 0.4000     | Pass        |
| DH3         | 2402            | 1.6400              | 0.2624         | 0.4000     | Pass        |
| DH1         | 2402            | 0.3800              | 0.1216         | 0.4000     | Pass        |
| DH5         | 2441            | 2.8800              | 0.3072         | 0.4000     | Pass        |
| DH3         | 2441            | 1.6400              | 0.2624         | 0.4000     | Pass        |
| DH1         | 2441            | 0.3800              | 0.1216         | 0.4000     | Pass        |
| DH5         | 2480            | 2.9200              | 0.3115         | 0.4000     | Pass        |
| DH3         | 2480            | 1.6400              | 0.2624         | 0.4000     | Pass        |
| DH1         | 2480            | 0.3800              | 0.1216         | 0.4000     | Pass        |

**CH00-DH1**

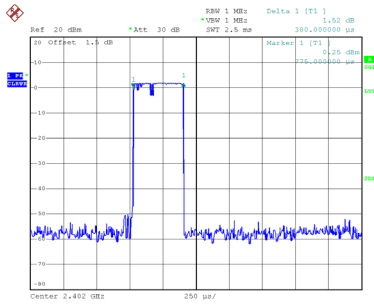


Date: 2.APR.2019 11:54:16

**CH39-DH1**

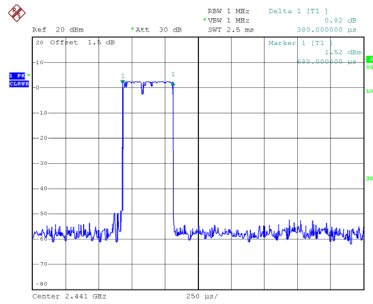


Date: 2.APR.2019 11:43:16

**CH78-DH1**

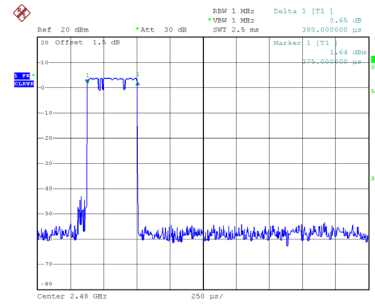


Date: 2.APR.2019 11:43:20

**CH00-DH3**

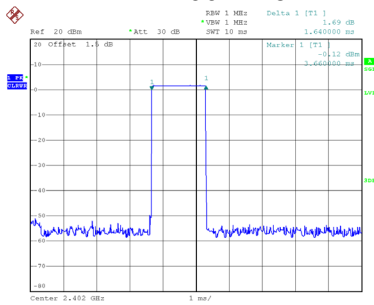


Date: 2.APR.2019 11:54:41

**CH39-DH3**

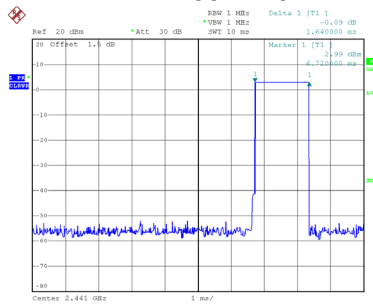


Date: 2.APR.2019 11:50:16

**CH78-DH3**

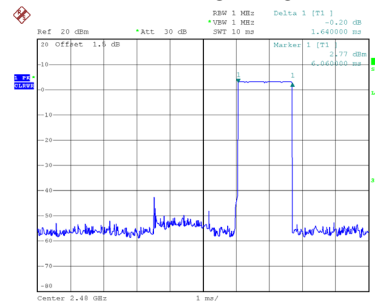


Date: 2.APR.2019 11:55:07

**CH00-DH5**

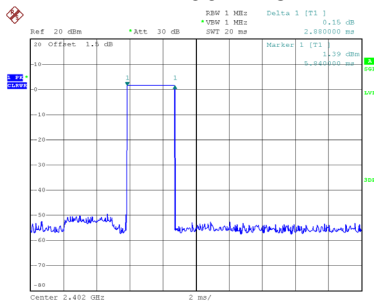


Date: 2.APR.2019 11:55:30

**CH39-DH5**

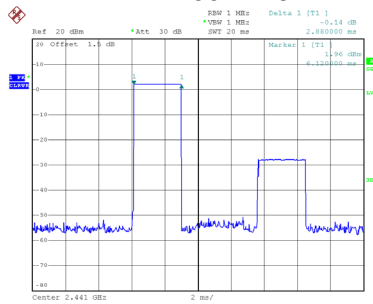

Date: 2.APR.2019 11:55:34

**CH78-DH5**

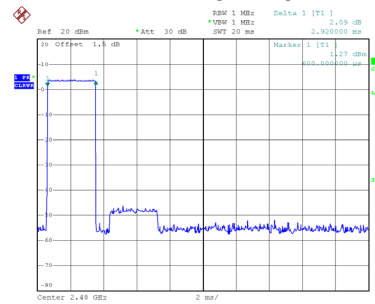


Date: 2.APR.2019 11:55:39

|            |               |
|------------|---------------|
| Test Mode: | TX Mode_3Mbps |
|------------|---------------|


| Data Packet | Frequency | Pulse Duration(ms) | Dwell Time(s) | Limits(s) | Test Result |
|-------------|-----------|--------------------|---------------|-----------|-------------|
| DH5         | 2402      | 2.8800             | 0.3072        | 0.4000    | Pass        |
| DH3         | 2402      | 1.6400             | 0.2624        | 0.4000    | Pass        |
| DH1         | 2402      | 0.3900             | 0.1248        | 0.4000    | Pass        |
| DH5         | 2441      | 2.9200             | 0.3115        | 0.4000    | Pass        |
| DH3         | 2441      | 1.6400             | 0.2624        | 0.4000    | Pass        |
| DH1         | 2441      | 0.3950             | 0.1264        | 0.4000    | Pass        |
| DH5         | 2480      | 2.9200             | 0.3115        | 0.4000    | Pass        |
| DH3         | 2480      | 1.6400             | 0.2624        | 0.4000    | Pass        |
| DH1         | 2480      | 0.3950             | 0.1264        | 0.4000    | Pass        |

### CH00-DH1

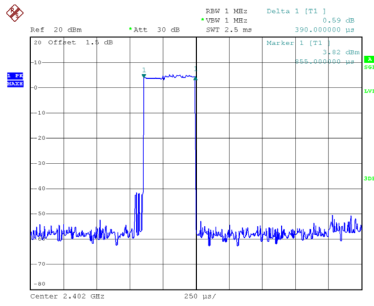


Date: 2.APR.2019 12:06:49

### CH39-DH1

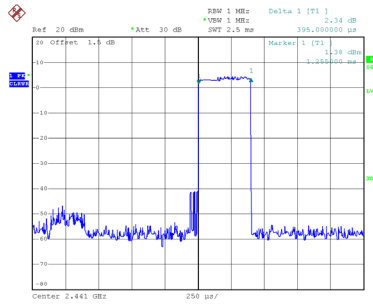


Date: 2.APR.2019 12:23:58

### CH78-DH1

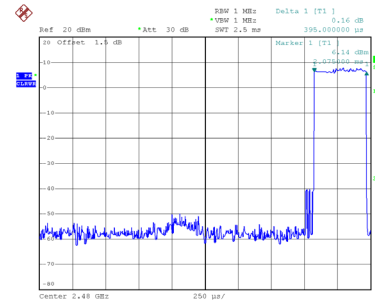


Date: 2.APR.2019 12:07:03

### CH00-DH3

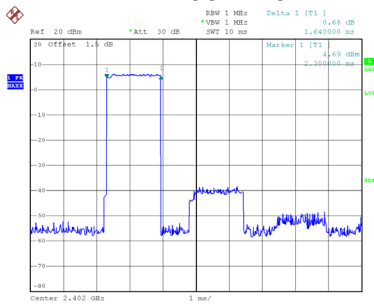


Date: 2.APR.2019 12:15:05

### CH39-DH3

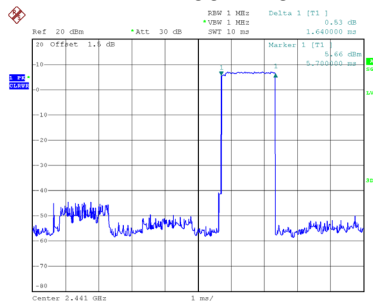


Date: 2.APR.2019 12:15:09

### CH78-DH3

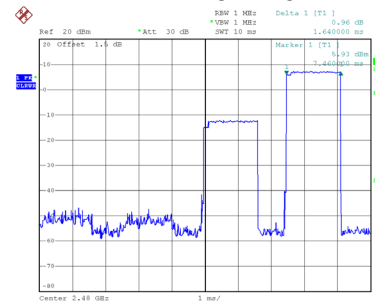


Date: 2.APR.2019 12:15:14

### CH00-DH5

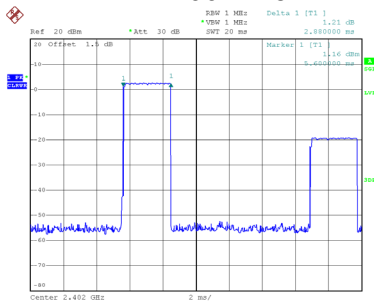


Date: 2.APR.2019 12:21:46

### CH39-DH5

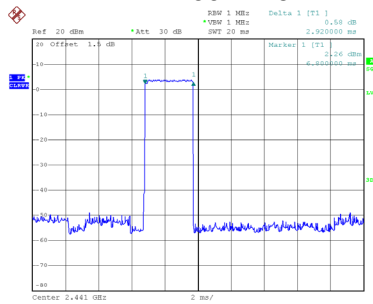

Date: 2.APR.2019 12:21:50

### CH78-DH5

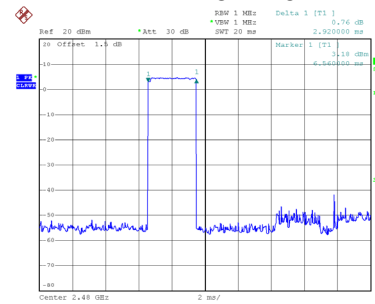


Date: 2.APR.2019 12:21:56


## APPENDIX G - HOPPING CHANNEL SEPARATION MEASUREMENT

Test Mode: Hopping on \_1Mbps


| Channel | Frequency (MHz) | Channel Separation (MHz) | 2/3 of 20 dB Bandwidth (MHz) | Test Result |
|---------|-----------------|--------------------------|------------------------------|-------------|
| 00      | 2402            | 0.972                    | 0.623                        | Pass        |
| 39      | 2441            | 0.968                    | 0.636                        | Pass        |
| 78      | 2480            | 1.026                    | 0.637                        | Pass        |

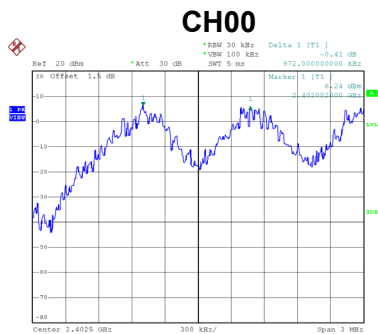

Date: 2.APR.2019 11:44:25

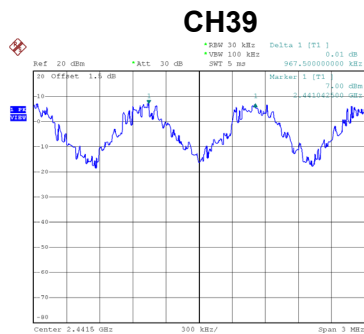


Date: 2.APR.2019 11:45:33

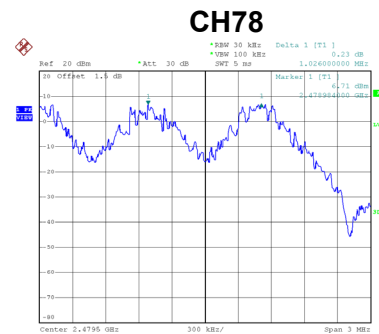


Date: 2.APR.2019 11:46:37

Test Mode: Hopping on \_3Mbps

| Channel | Frequency (MHz) | Channel Separation (MHz) | 2/3 of 20 dB Bandwidth (MHz) | Test Result |
|---------|-----------------|--------------------------|------------------------------|-------------|
| 00      | 2402            | 1.183                    | 1.007                        | Pass        |
| 39      | 2441            | 1.002                    | 0.983                        | Pass        |
| 78      | 2480            | 1.178                    | 1.024                        | Pass        |

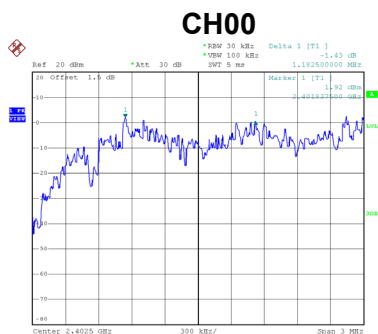

Date: 2.APR.2019 12:09:34

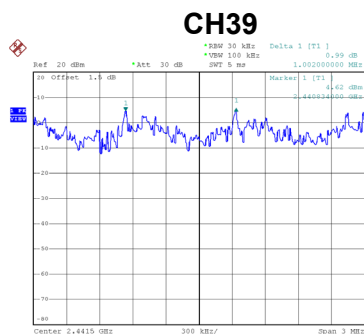

Date: 2.APR.2019 12:10:39




Date: 11.APR.2019 16:14:57


## APPENDIX H - BANDWIDTH

Test Mode: TX Mode \_1Mbps


| Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 00      | 2402            | 0.934                 | 0.872                         |
| 39      | 2441            | 0.954                 | 0.888                         |
| 78      | 2480            | 0.956                 | 0.892                         |

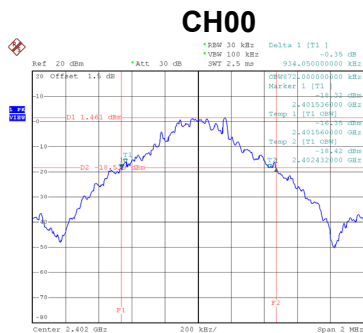

Date: 2.APR.2019 11:36:23

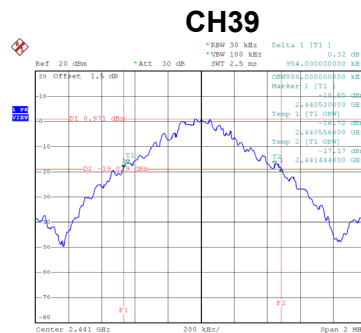


Date: 2.APR.2019 11:39:06

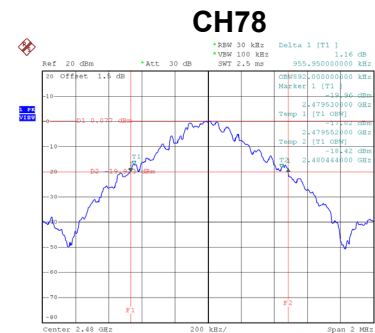


Date: 2.APR.2019 11:40:13

Test Mode: TX Mode \_3Mbps


| Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) | 99 % Emission Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 00      | 2402            | 1.510                 | 1.372                         |
| 39      | 2441            | 1.474                 | 1.364                         |
| 78      | 2480            | 1.536                 | 1.372                         |

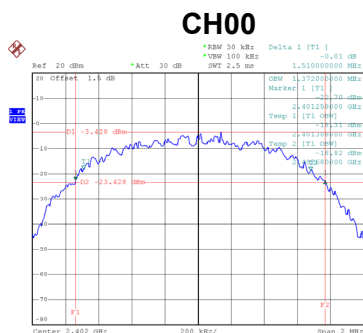

Date: 2.APR.2019 12:02:51

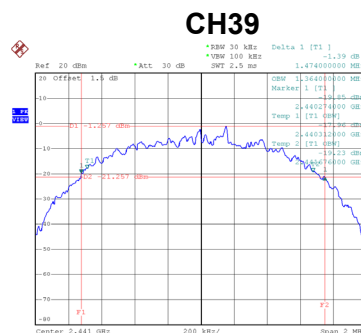

Date: 2.APR.2019 12:04:45

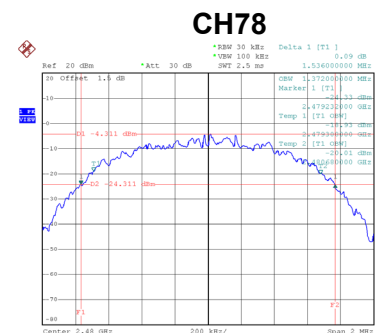


Date: 2.APR.2019 12:05:32


## APPENDIX I - MAXIMUM OUTPUT POWER

Test Mode: TX Mode \_1Mbps


| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Max. Limit (dBm) | Max. Limit (W) | Test Result |
|---------|-----------------|--------------------|------------------|------------------|----------------|-------------|
| 00      | 2402            | 3.87               | 0.0024           | 21.00            | 0.125          | Pass        |
| 39      | 2441            | 3.64               | 0.0023           | 21.00            | 0.125          | Pass        |
| 78      | 2480            | 2.85               | 0.0019           | 21.00            | 0.125          | Pass        |

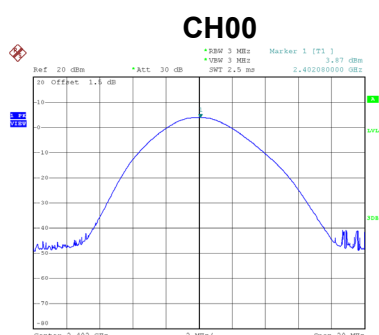

Date: 2.APR.2019 11:35:46

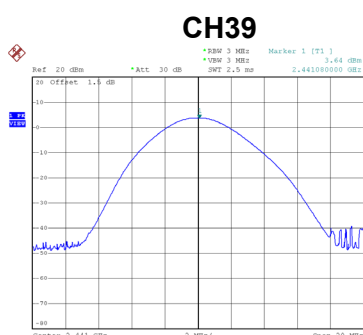


Date: 2.APR.2019 11:38:02

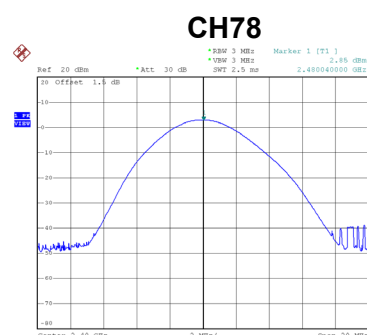


Date: 2.APR.2019 12:00:00

Test Mode: TX Mode \_3Mbps


| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Max. Limit (dBm) | Max. Limit (W) | Test Result |
|---------|-----------------|--------------------|------------------|------------------|----------------|-------------|
| 00      | 2402            | 3.37               | 0.0022           | 21.00            | 0.125          | Pass        |
| 39      | 2441            | 3.06               | 0.0020           | 21.00            | 0.125          | Pass        |
| 78      | 2480            | 2.20               | 0.0017           | 21.00            | 0.125          | Pass        |

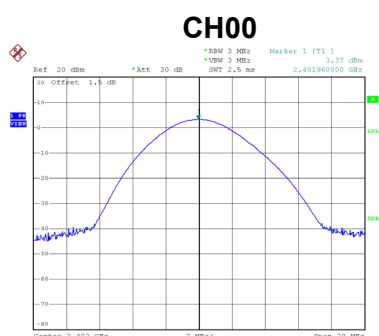

Date: 2.APR.2019 12:02:26

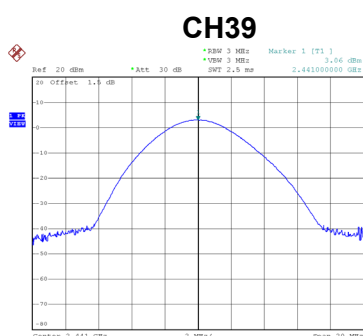

Date: 2.APR.2019 12:03:50

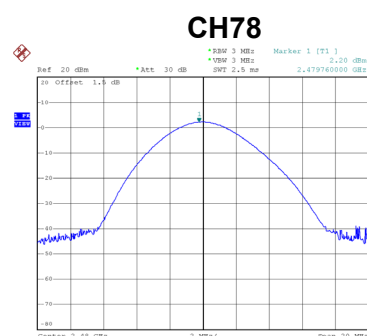


Date: 2.APR.2019 12:05:09


## APPENDIX J - CONDUCTED SPURIOUS EMISSION

## Test Mode : TX Mode \_1Mbps

### Bandedge- CH00 (Lower)

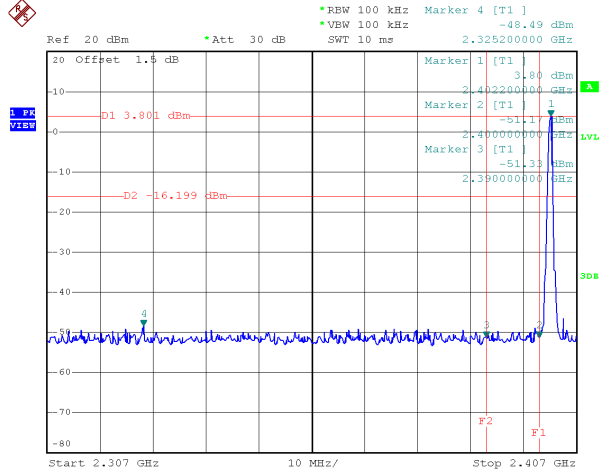


### Bandedge CH78 (Upper)

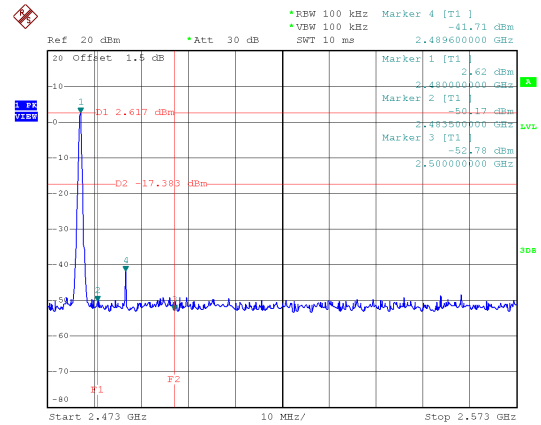


Date: 2.APR.2019 11:39:46

Date: 2.APR.2019 11:35:54

### Hopping on mode (Lower)

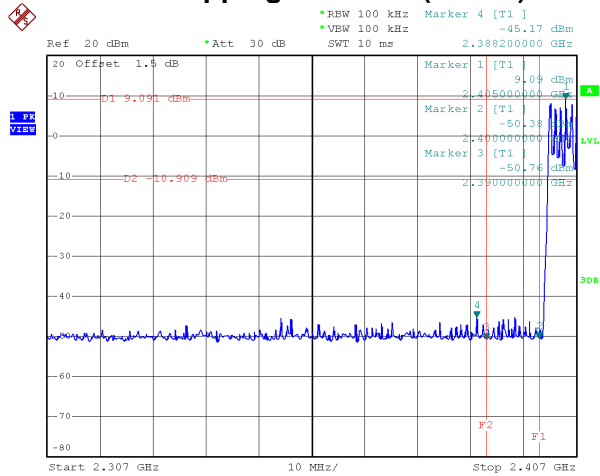


### Hopping on mode (Upper)

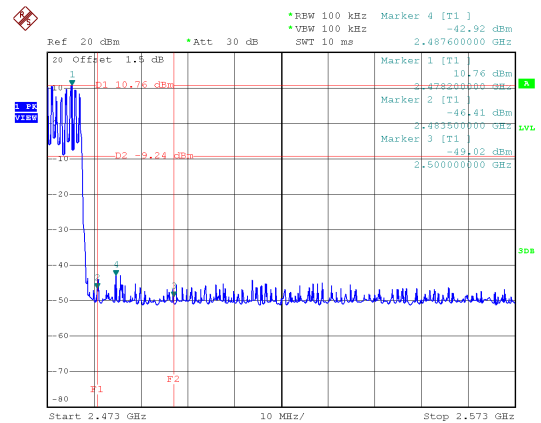


Date: 2.APR.2019 11:49:36

Date: 2.APR.2019 11:49:01


## CH00 – 10th Harmonic of the fundamental frequency

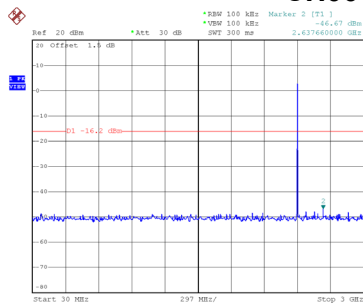

Date: 2.APR.2019 11:36:37

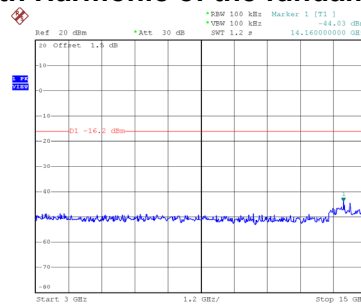


Date: 2.APR.2019 11:36:45

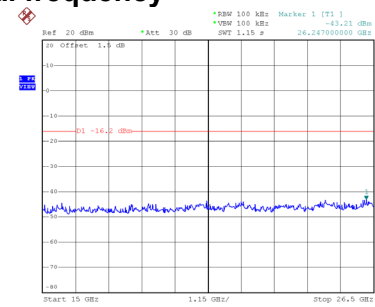


Date: 2.APR.2019 11:36:53


## CH39 – 10th Harmonic of the fundamental frequency

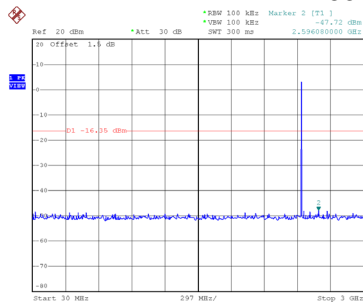

Date: 2.APR.2019 11:38:23

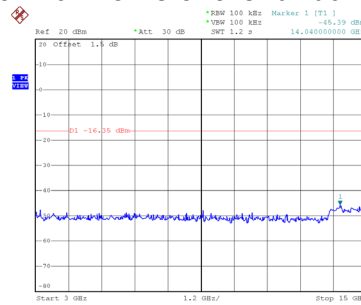


Date: 2.APR.2019 11:38:31

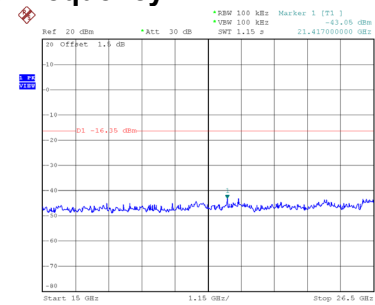


Date: 2.APR.2019 11:38:39


## CH78 – 10th Harmonic of the fundamental frequency

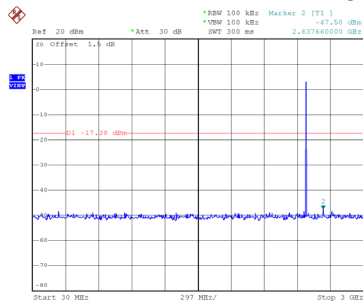

Date: 2.APR.2019 11:40:27

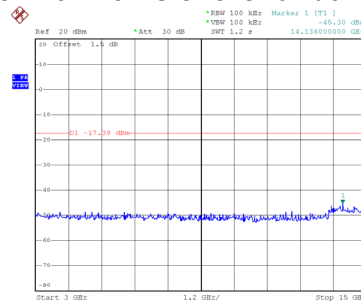


Date: 2.APR.2019 11:40:35

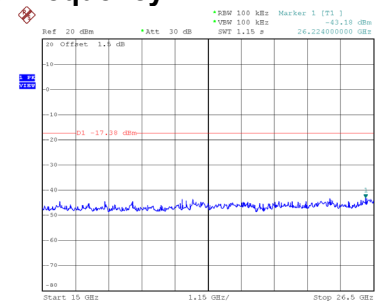

Date: 2.APR.2019 11:40:43


# Test Mode : TX Mode \_3Mbps

## Bandedge- CH00 (Lower)

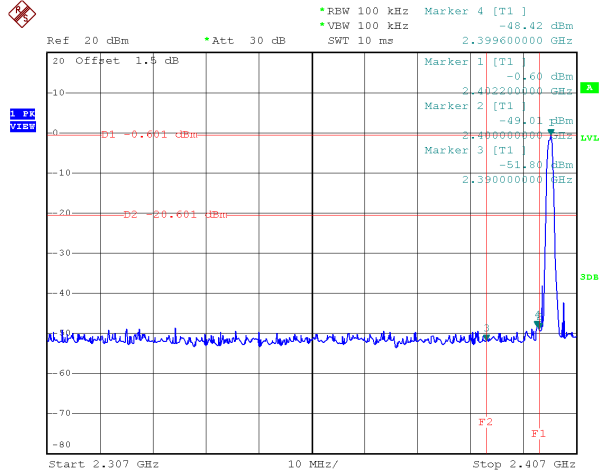


Date: 2.APR.2019 12:02:34

## Bandedge CH78 (Upper)

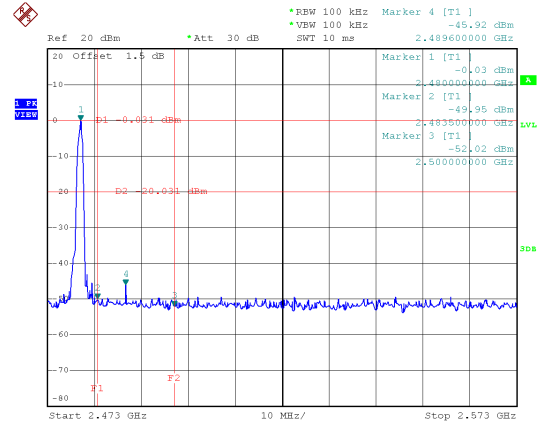


Date: 2.APR.2019 12:05:17

## Hopping on mode (Lower)

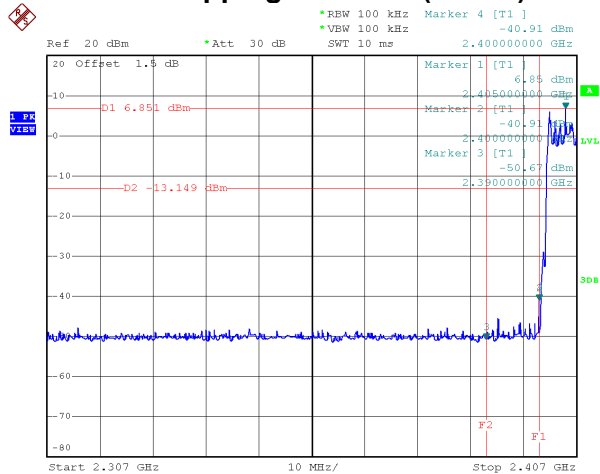


Date: 2.APR.2019 12:14:10

## Hopping on mode (Upper)

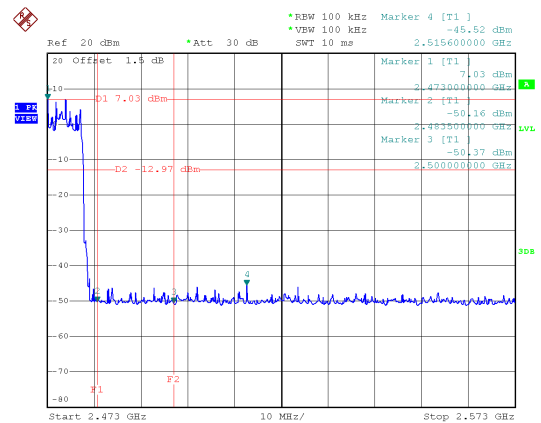


Date: 2.APR.2019 12:14:44


## CH00 – 10th Harmonic of the fundamental frequency

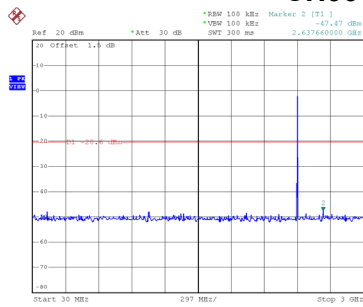

Date: 2.APR.2019 12:03:05

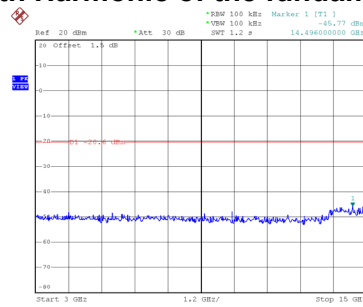


Date: 2.APR.2019 12:03:13

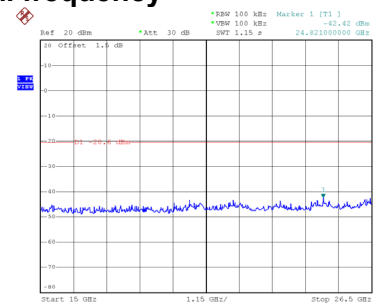


Date: 2.APR.2019 12:03:21


## CH39 – 10th Harmonic of the fundamental frequency

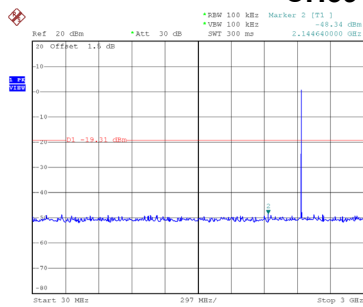

Date: 2.APR.2019 12:04:12

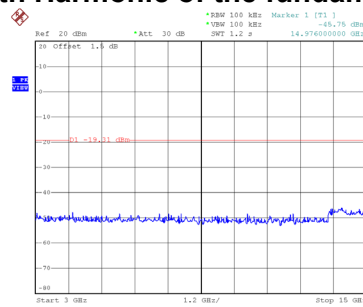


Date: 2.APR.2019 12:04:20

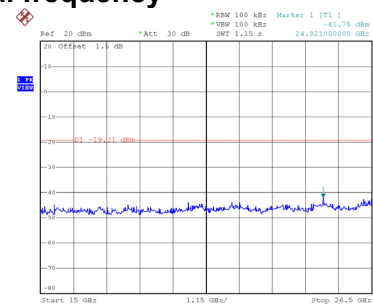


Date: 2.APR.2019 12:04:28


## CH78 – 10th Harmonic of the fundamental frequency

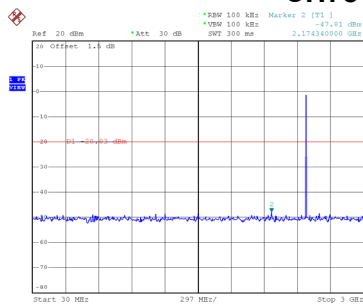

Date: 2.APR.2019 12:05:45

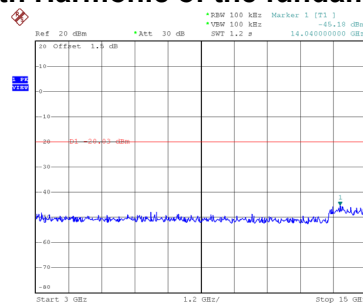

Date: 2.APR.2019 12:05:54

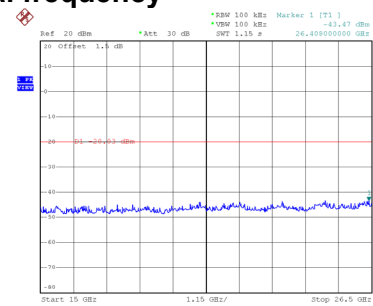

Date: 2.APR.2019 12:06:02

End of Test Report