

Test Laboratory: BTL Inc.

Date: 2020/3/17

T01_802.11b_CH6_Back of keyborad_0cm_ANT 1

DUT: Notebook;

Communication System: UID 0, IEEE 802.11b WiFi 2.4GHz (DSSS,1Mbps) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.34$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.1 °C; Liquid Temperature: 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.58, 7.58, 7.58) @ 2437 MHz; Calibrated: 2019/9/9
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/10/29
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.466 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.860 W/kg

SAR(1 g) = 0.448 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.495 W/kg

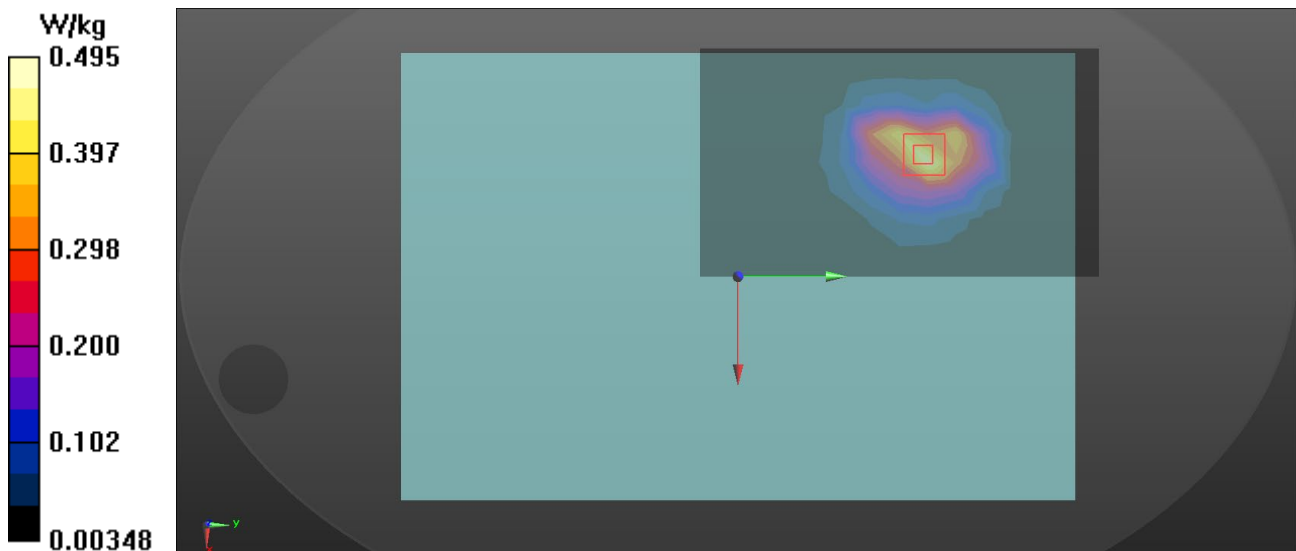

Test Laboratory: BTL Inc.

Date: 2020/3/17

T06_802.11b_CH6_Back of keyborad_0cm_ANT 2

DUT: Notebook;

Communication System: UID 0, IEEE 802.11b WiFi 2.4GHz (DSSS,1Mbps) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.34$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.1 °C; Liquid Temperature: 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.58, 7.58, 7.58) @ 2437 MHz; Calibrated: 2019/9/9
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/10/29
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.568 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.9490 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.587 W/kg; SAR(10 g) = 0.288 W/kg

Maximum value of SAR (measured) = 0.662 W/kg

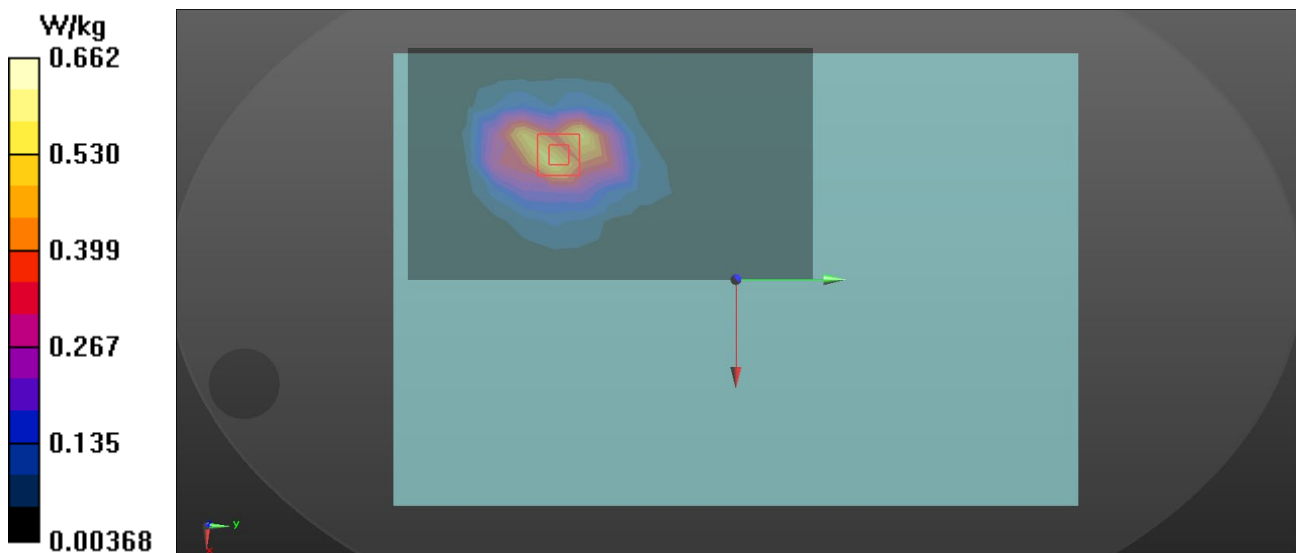

Test Laboratory: BTL Inc.

Date: 2020/3/19

T50_BT_DH5_CH78_Back of keyborad_0cm_ANT 1

DUT: Notebook;


Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2480 \text{ MHz}$; $\sigma = 1.903 \text{ S/m}$; $\epsilon_r = 38.153$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature: $23.2 \text{ }^\circ\text{C}$; Liquid Temperature: $22.3 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: ES3DV3 - SN3162; ConvF(4.5, 4.5, 4.5) @ 2480 MHz; Calibrated: 2019/4/12
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn420; Calibrated: 2019/6/21
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (9x25x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.0258 W/kg

Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 1.162 V/m ; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.0620 W/kg
SAR(1 g) = 0.030 W/kg ; SAR(10 g) = 0.016 W/kg
Maximum value of SAR (measured) = 0.0342 W/kg

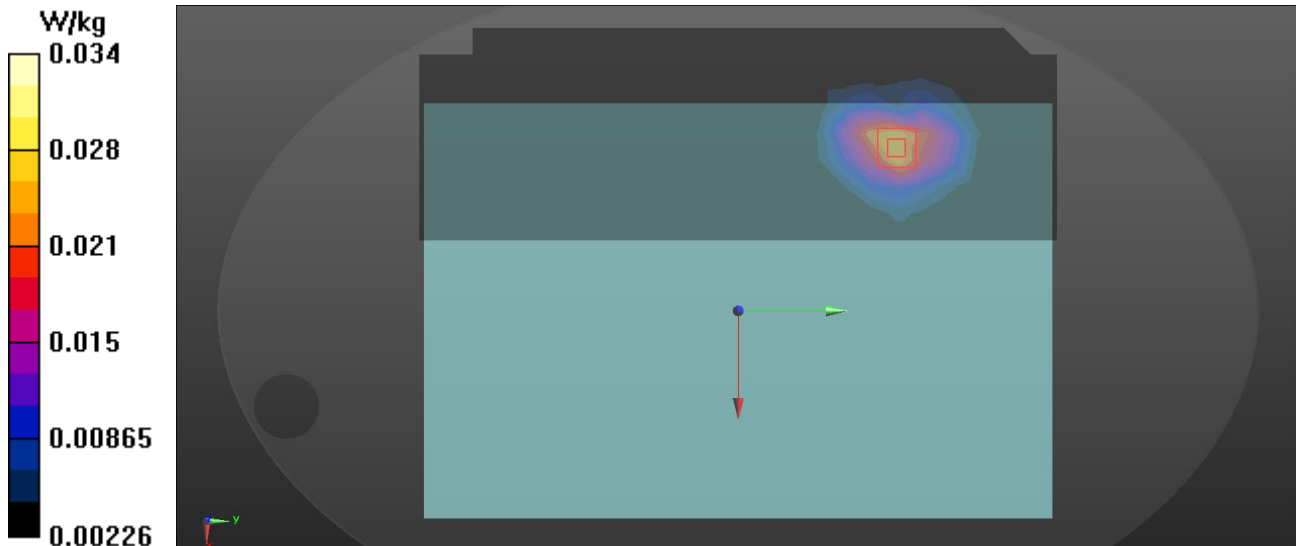

Test Laboratory: BTL Inc.

Date: 2020/3/16

T21_802.11a_CH52_Back of Keyboard_0cm_ANT 1

DUT: Notebook;


Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5260 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.748 \text{ S/m}$; $\epsilon_r = 37.372$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature: $23.3 \text{ }^\circ\text{C}$; Liquid Temperature: $22.2 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(5.21, 5.21, 5.21) @ 5260 MHz; Calibrated: 2019/9/9
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/10/29
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (13x22x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 1.36 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 0 V/m ; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 4.02 W/kg
SAR(1 g) = 0.962 W/kg ; SAR(10 g) = 0.348 W/kg
Maximum value of SAR (measured) = 1.90 W/kg

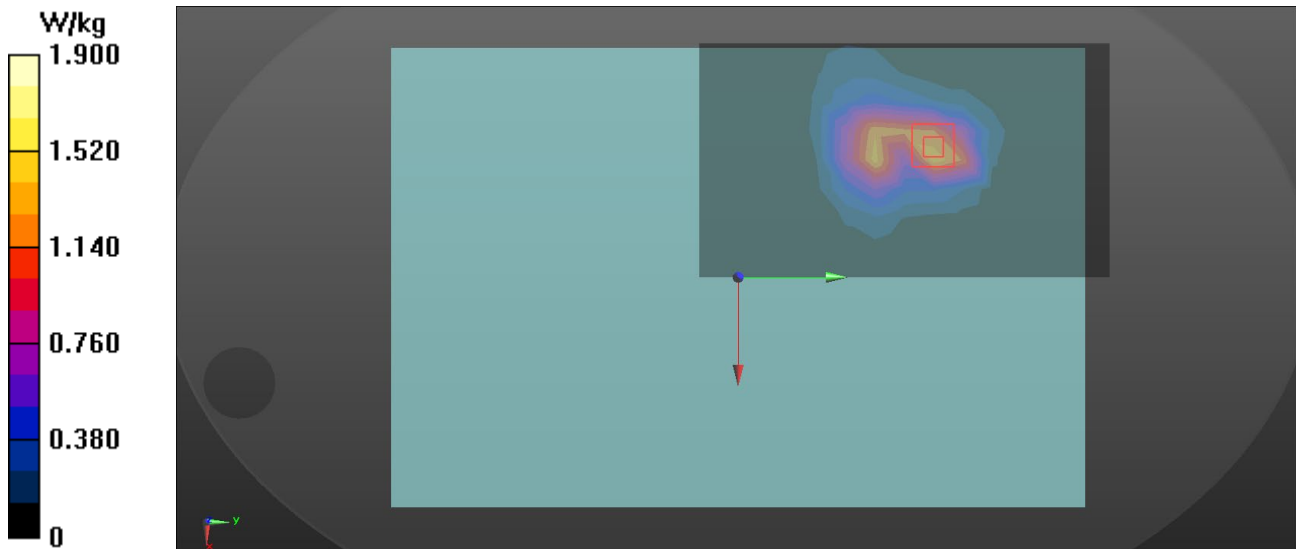

Test Laboratory: BTL Inc.

Date: 2020/3/16

T26_802.11a_CH56_Back of Keyboard_0cm_ANT 2

DUT: Notebook;


Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5280 \text{ MHz}$; $\sigma = 4.78 \text{ S/m}$; $\epsilon_r = 37.355$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature: $23.3 \text{ }^\circ\text{C}$; Liquid Temperature: $22.2 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(5.21, 5.21, 5.21) @ 5280 MHz; Calibrated: 2019/9/9
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/10/29
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (13x22x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 1.46 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 0 V/m ; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 4.01 W/kg
SAR(1 g) = 0.902 W/kg ; SAR(10 g) = 0.305 W/kg
Maximum value of SAR (measured) = 1.64 W/kg

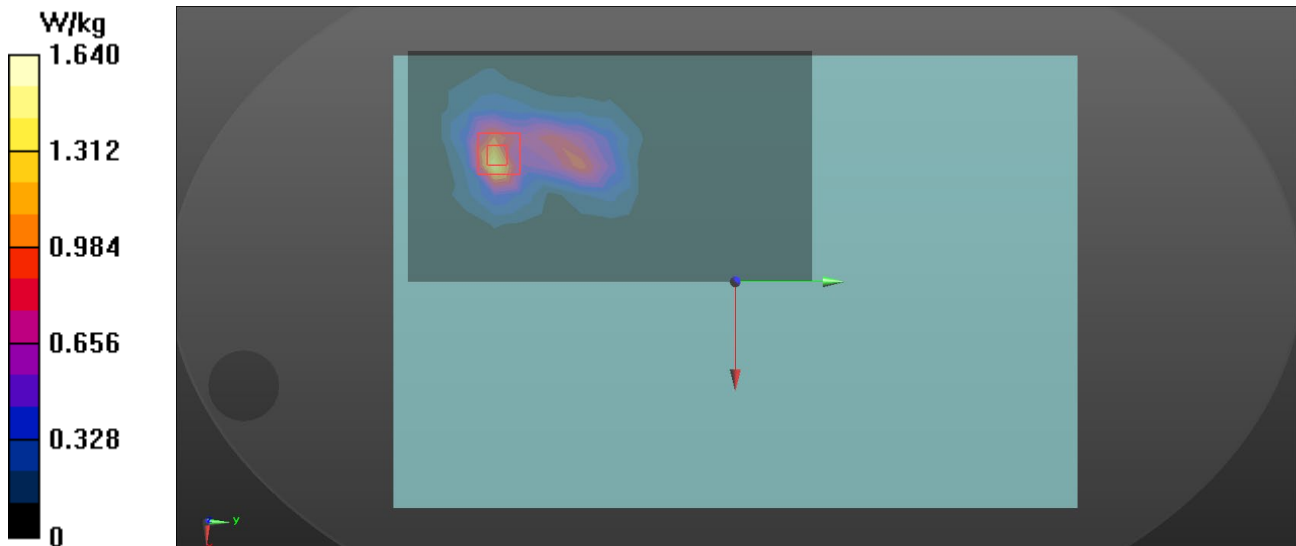

Test Laboratory: BTL Inc.

Date: 2020/3/16

T31_802.11a_CH116_Back of Keyboard_0cm_ANT 1

DUT: Notebook;


Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5580 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.142 \text{ S/m}$; $\epsilon_r = 36.69$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature: $23.3 \text{ }^\circ\text{C}$; Liquid Temperature: $22.2 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(4.81, 4.81, 4.81) @ 5580 MHz; Calibrated: 2019/9/9
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/10/29
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (13x22x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 1.43 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 0 V/m ; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 4.84 W/kg
SAR(1 g) = 1.03 W/kg ; SAR(10 g) = 0.360 W/kg
Maximum value of SAR (measured) = 1.87 W/kg

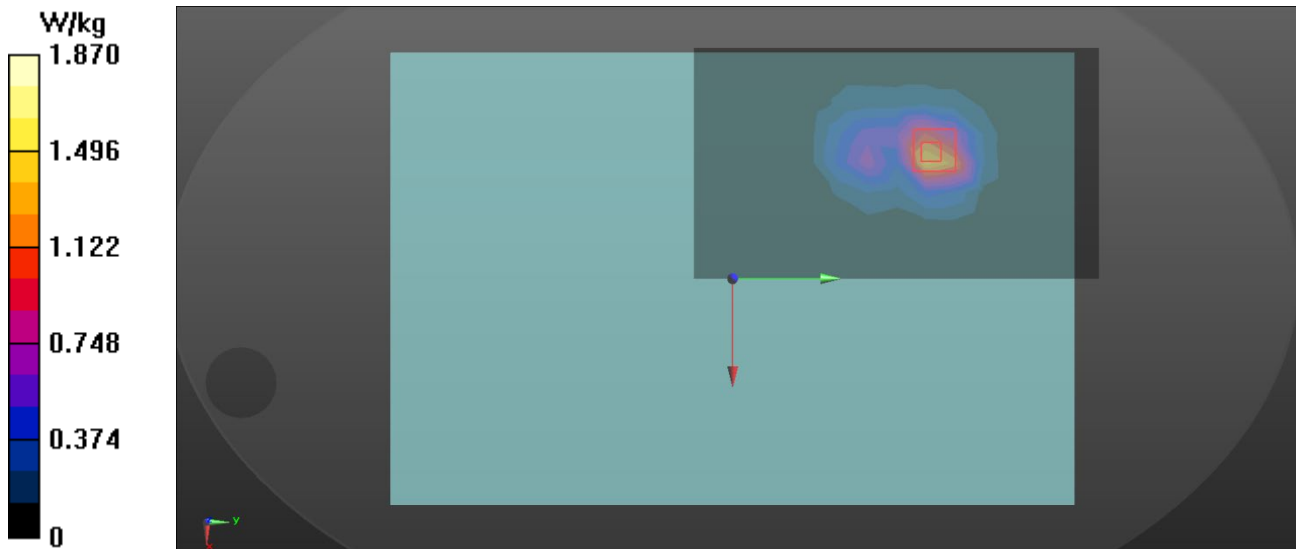

Test Laboratory: BTL Inc.

Date: 2020/3/16

T39_802.11a_CH116_Back of Keyboard_0cm_ANT 2

DUT: Notebook;


Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5580 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.142 \text{ S/m}$; $\epsilon_r = 36.69$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature: $23.3 \text{ }^\circ\text{C}$; Liquid Temperature: $22.2 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(4.81, 4.81, 4.81) @ 5580 MHz; Calibrated: 2019/9/9
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/10/29
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (13x22x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.986 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 0 V/m ; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 3.29 W/kg
SAR(1 g) = 0.726 W/kg ; SAR(10 g) = 0.256 W/kg
Maximum value of SAR (measured) = 1.40 W/kg

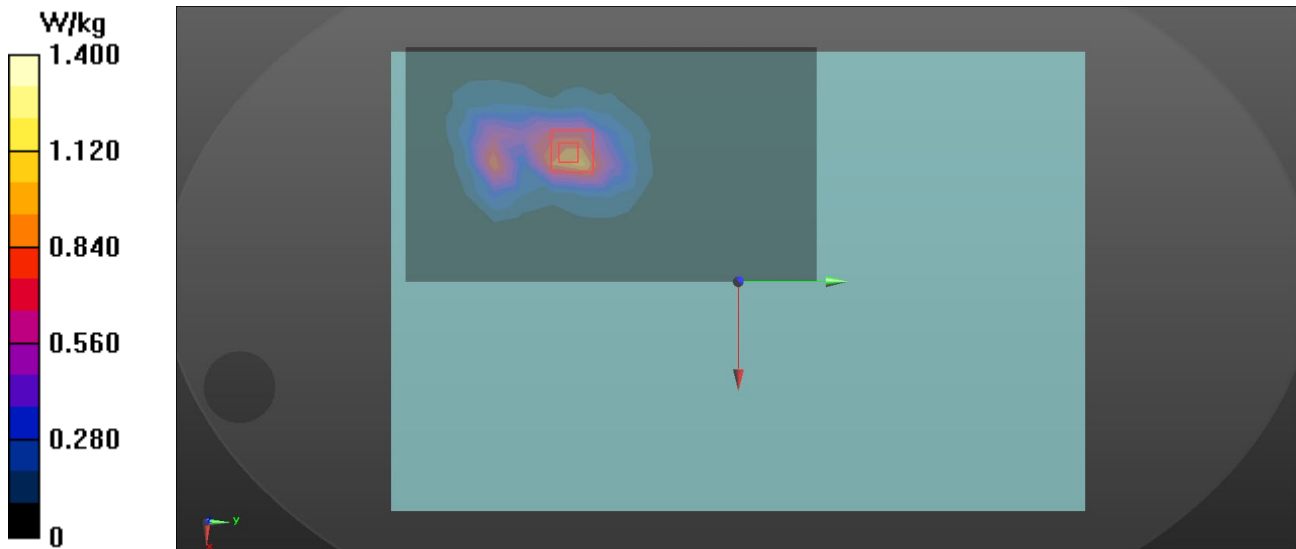

Test Laboratory: BTL Inc.

Date: 2020/3/16

T43_802.11a_CH161_Back of Keyboard_0cm_ANT 1

DUT: Notebook;


Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5805 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5805 \text{ MHz}$; $\sigma = 5.422 \text{ S/m}$; $\epsilon_r = 36.191$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature: $23.3 \text{ }^\circ\text{C}$; Liquid Temperature: $22.2 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(4.75, 4.75, 4.75) @ 5805 MHz; Calibrated: 2019/9/9
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/10/29
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (13x22x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 1.62 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 0 V/m ; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 5.40 W/kg
SAR(1 g) = 1.01 W/kg ; SAR(10 g) = 0.337 W/kg
Maximum value of SAR (measured) = 1.90 W/kg

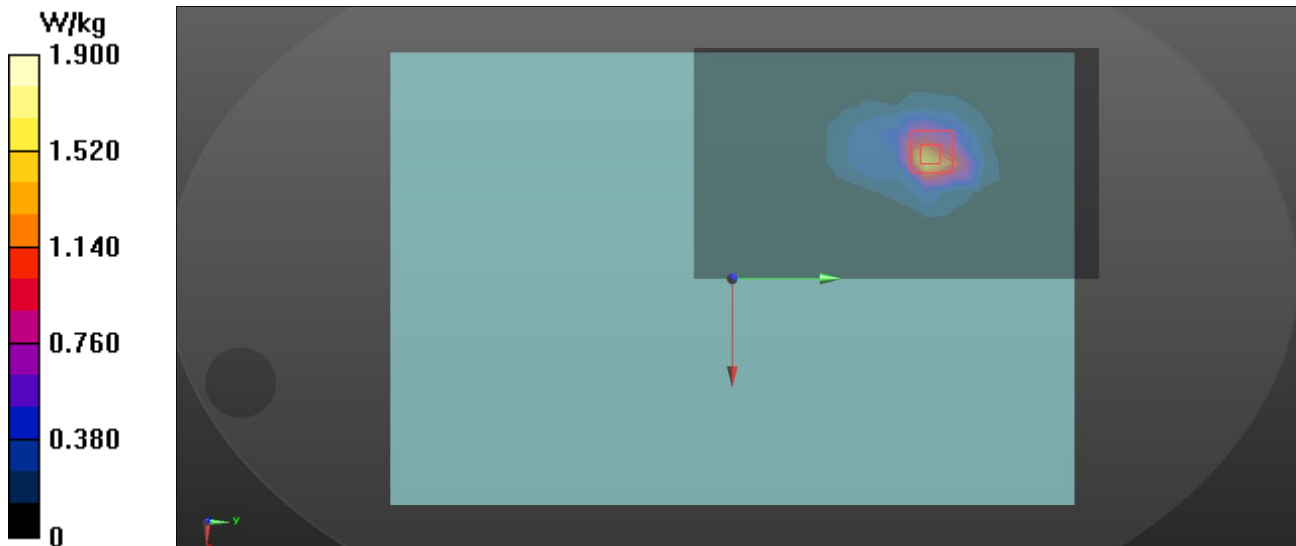

Test Laboratory: BTL Inc.

Date: 2020/3/16

T49_802.11a_CH165_Back of Keyboard_0cm_ANT 2

DUT: Notebook;

Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5825 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5825 \text{ MHz}$; $\sigma = 5.455 \text{ S/m}$; $\epsilon_r = 36.152$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature: $23.3 \text{ }^\circ\text{C}$; Liquid Temperature: $22.2 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(4.75, 4.75, 4.75) @ 5825 MHz; Calibrated: 2019/9/9
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/10/29
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (13x22x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 1.51 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 0 V/m ; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 5.59 W/kg
SAR(1 g) = 1.04 W/kg ; SAR(10 g) = 0.360 W/kg
Maximum value of SAR (measured) = 1.93 W/kg

