


|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AC(VHT80) Mode 6865 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

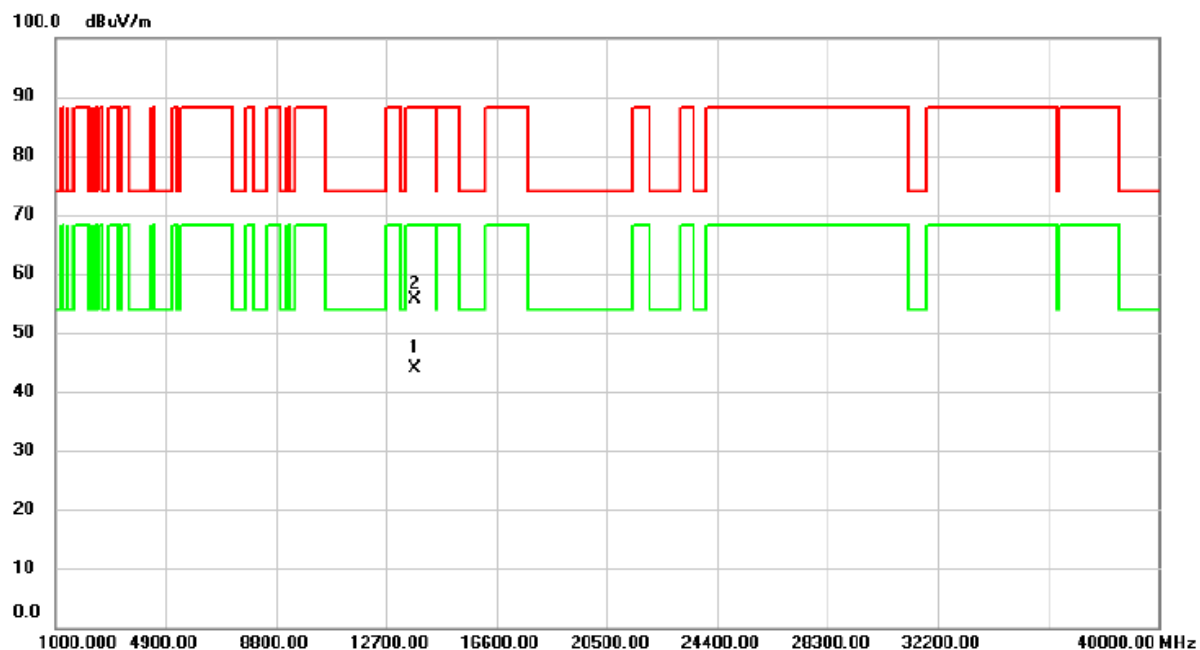


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 13729.13     | 25.87                    | 17.98                   | 43.85                      | 68.20           | -24.35       | AVG      |         |
| 2   |     | 13730.00     | 37.56                    | 17.98                   | 55.54                      | 88.20           | -32.66       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AC(VHT80) Mode 6865 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

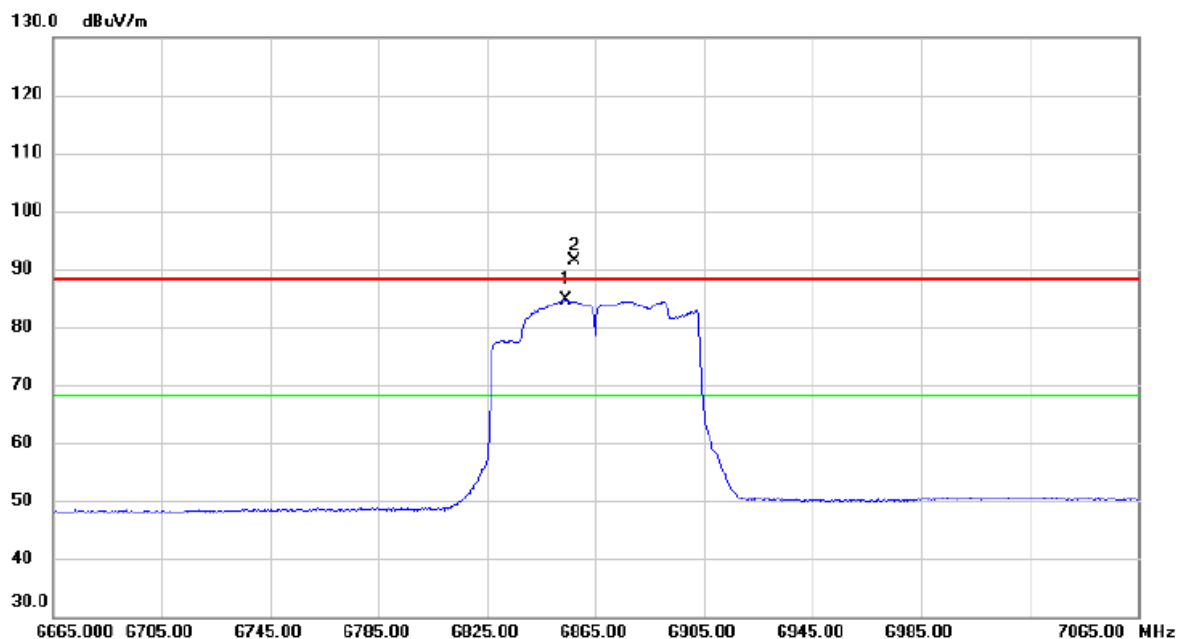


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6854.200     | 65.04                    | 19.60                   | 84.64                      | 68.20           | 16.44        | AVG      | No Limit |
| 2   | X   | 6857.400     | 71.65                    | 19.62                   | 91.27                      | 88.20           | 3.07         | peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AC(VHT80) Mode 6865 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

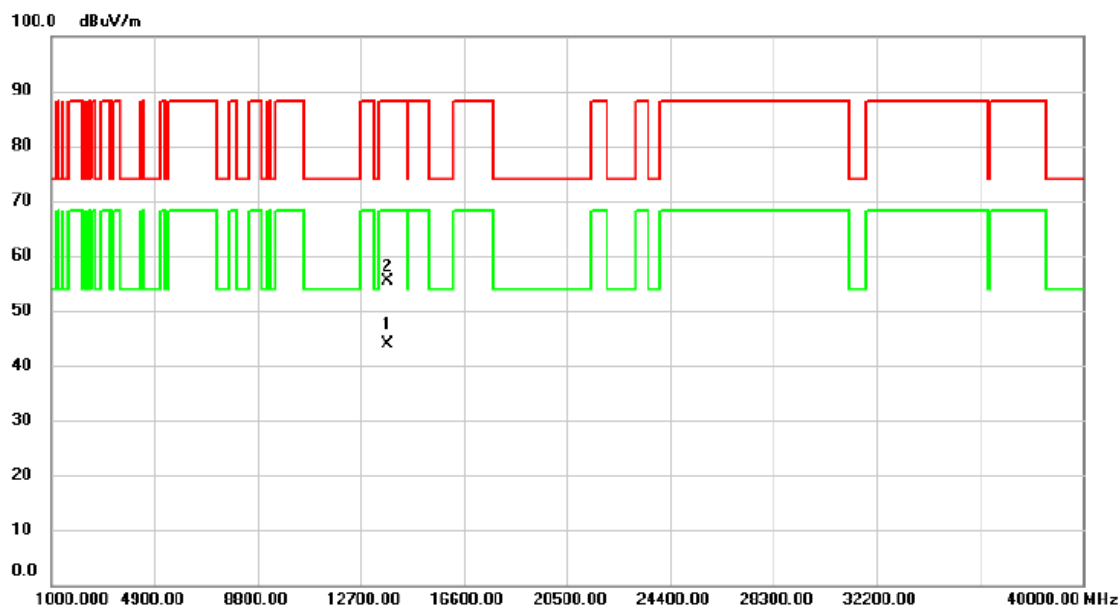


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 13729.85     | 25.99                    | 17.98                   | 43.97                      | 68.20           | -24.23       | AVG      |         |
| 2   |     | 13729.93     | 37.46                    | 17.98                   | 55.44                      | 88.20           | -32.76       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AC(VHT160) Mode 6665 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

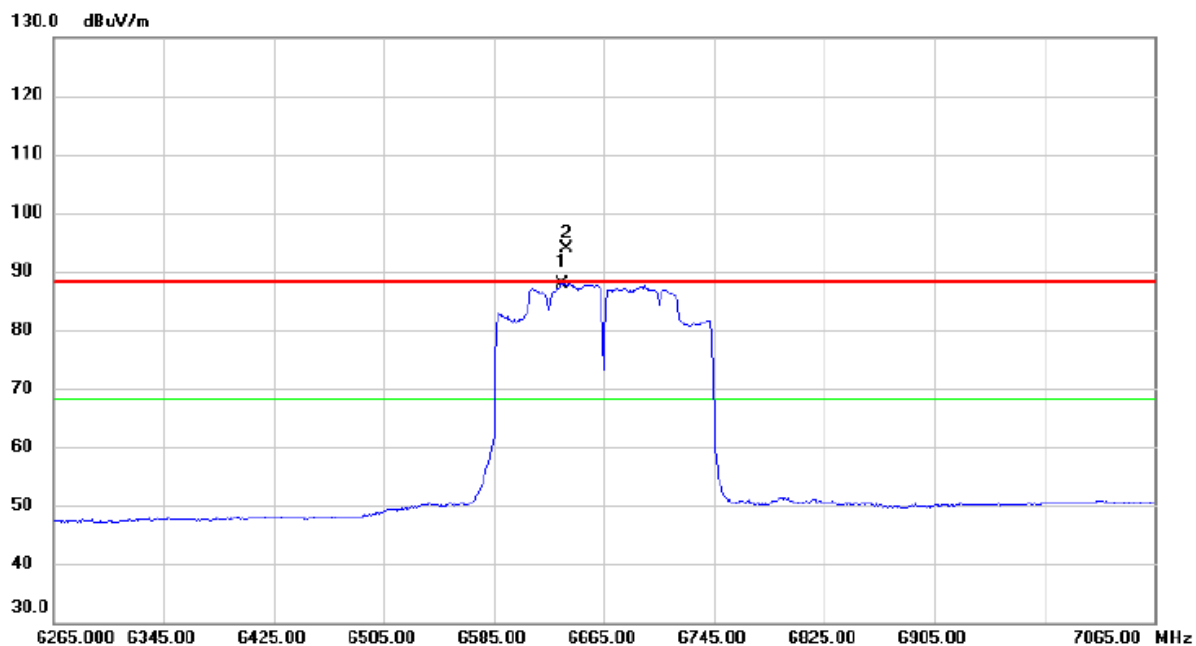


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6634.600     | 69.34                    | 18.54                   | 87.88                      | 68.20           | 19.68        | AVG      | No Limit |
| 2   | X   | 6637.800     | 75.42                    | 18.56                   | 93.98                      | 88.20           | 5.78         | peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AC(VHT160) Mode 6665 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

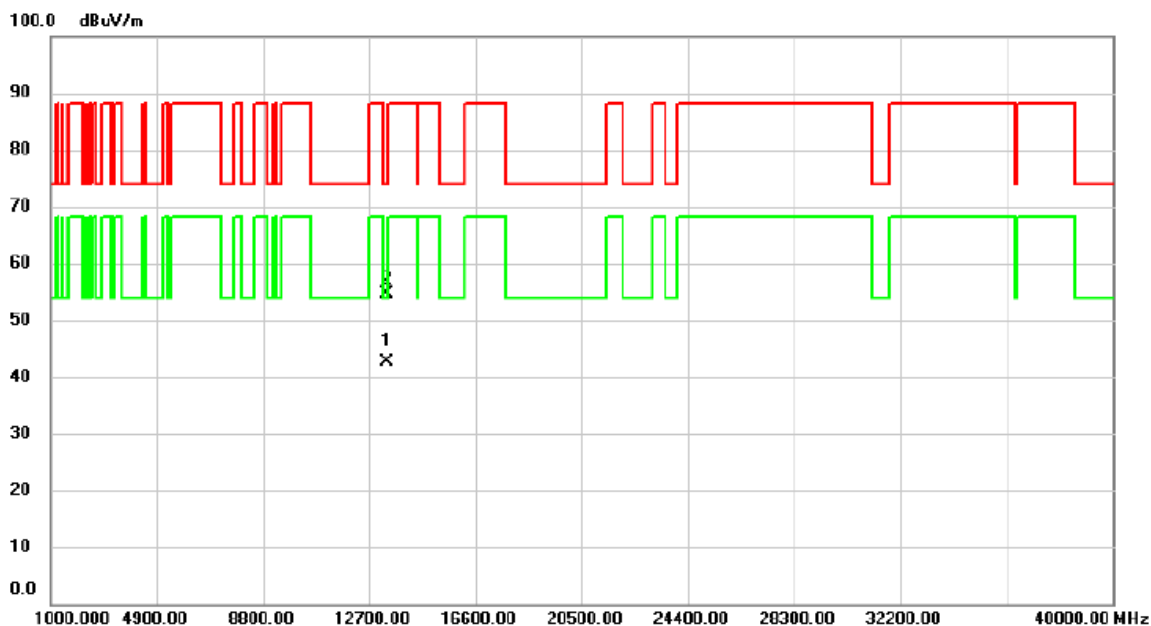


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 13329.14     | 25.56                    | 17.19                   | 42.75                      | 54.00           | -11.25       | AVG      |         |
| 2   |     | 13330.02     | 37.36                    | 17.19                   | 54.55                      | 74.00           | -19.45       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AC(VHT160) Mode 6665 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

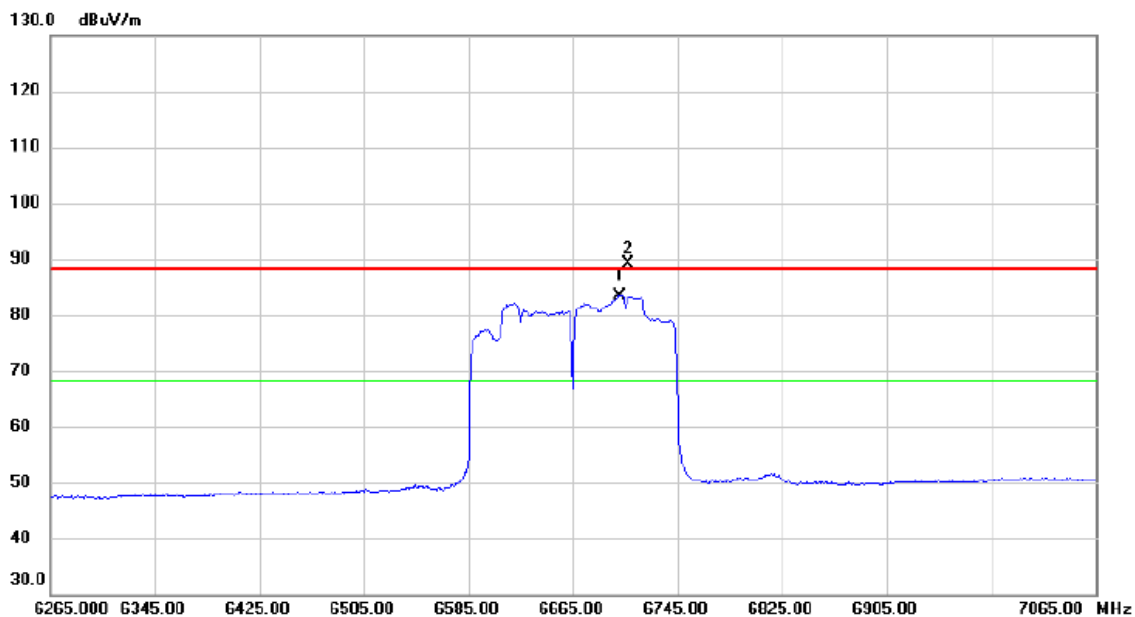


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6701.000     | 64.55                    | 18.86                   | 83.41                      | 68.20           | 15.21        | AVG      | No Limit |
| 2   | X   | 6706.600     | 70.26                    | 18.88                   | 89.14                      | 88.20           | 0.94         | peak     | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AC(VHT160) Mode 6665 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

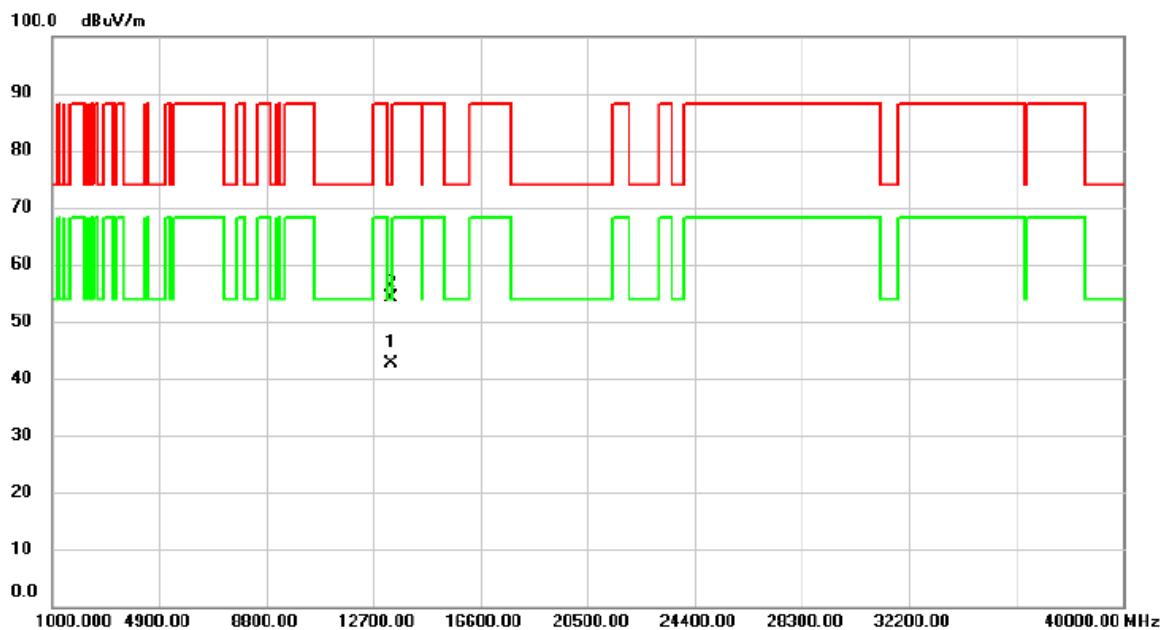


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 13329.57 | 25.48         | 17.19          | 42.67       | 54.00  | -11.33 | AVG      |         |
| 2   |     | 13329.95 | 36.99         | 17.19          | 54.18       | 74.00  | -19.82 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE20) Mode 6535 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

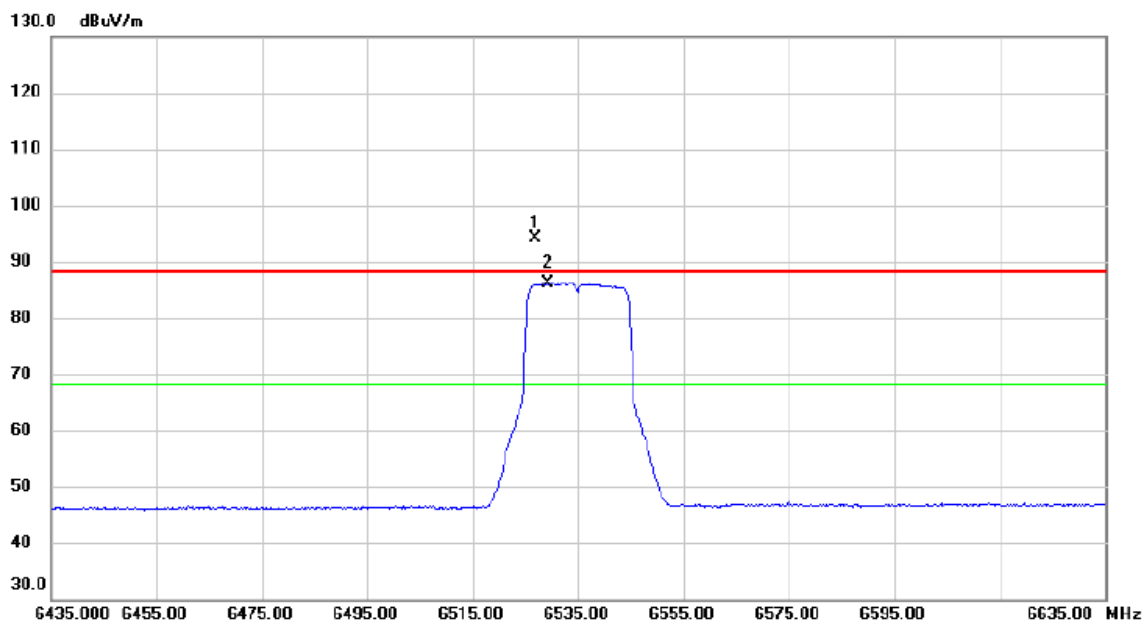


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6526.800     | 76.18                    | 18.03                   | 94.21                      | 88.20           | 6.01         | peak     | No Limit |
| 2   | *   | 6529.400     | 68.09                    | 18.04                   | 86.13                      | 68.20           | 17.93        | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE20) Mode 6535 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

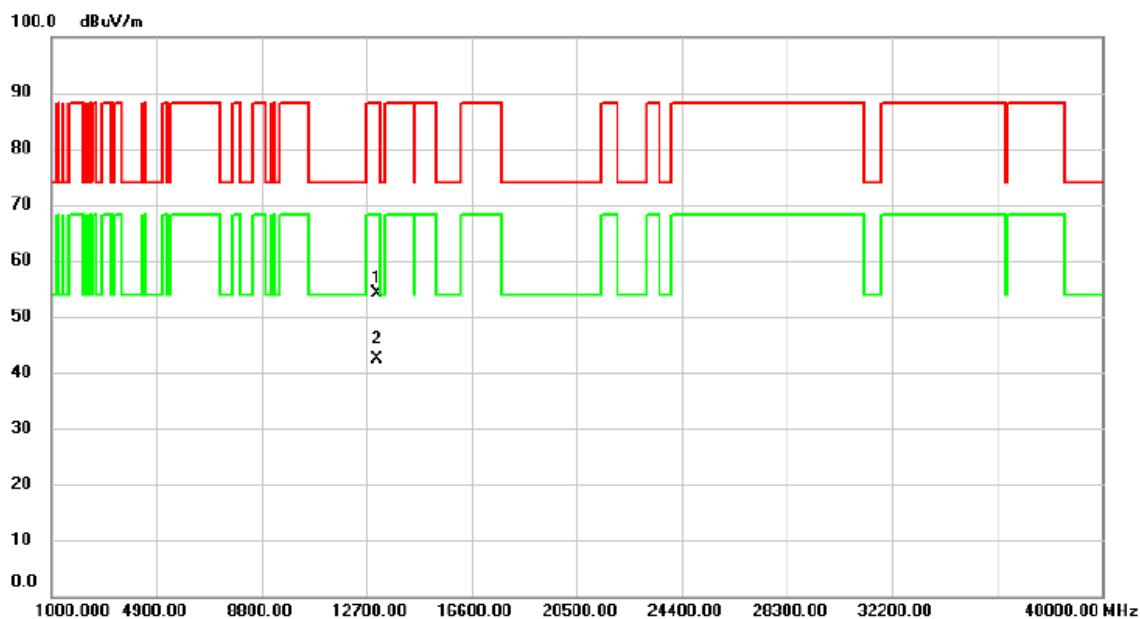


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13069.20     | 37.29                    | 16.76                   | 54.05                      | 88.20           | -34.15       | peak     |         |
| 2   | *   | 13069.82     | 25.59                    | 16.76                   | 42.35                      | 68.20           | -25.85       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE20) Mode 6535 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

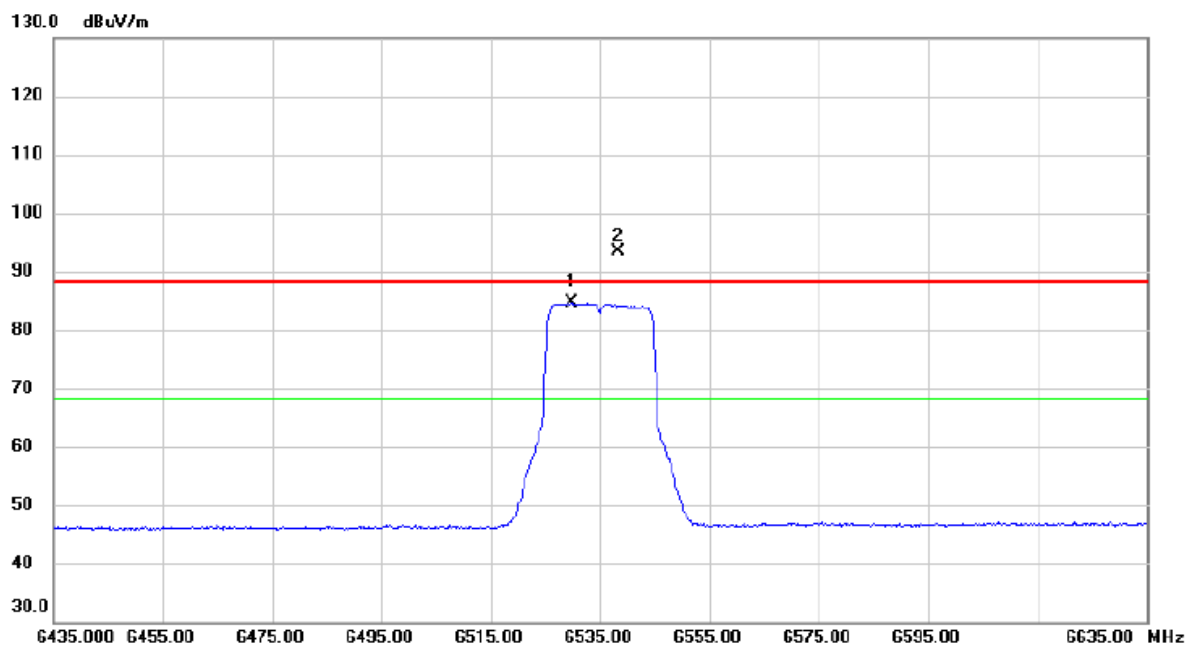


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6529.800     | 66.57                    | 18.04                   | 84.61                      | 68.20           | 16.41        | AVG      | No Limit |
| 2   | X   | 6538.400     | 75.33                    | 18.08                   | 93.41                      | 88.20           | 5.21         | peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE20) Mode 6535 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

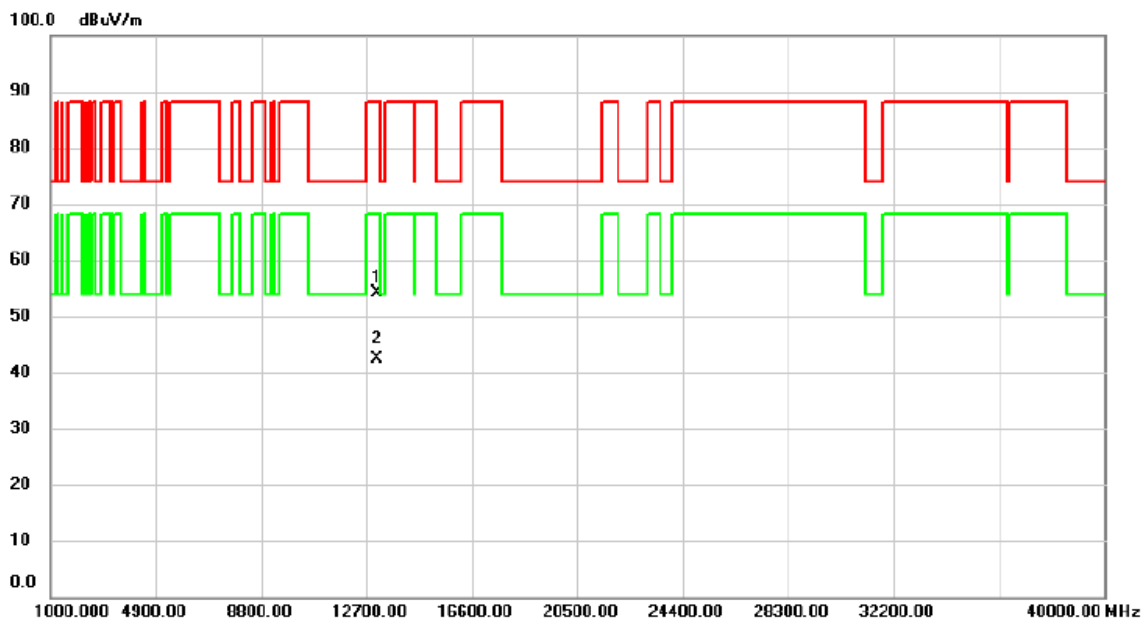


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13070.11     | 37.48                    | 16.76                   | 54.24                      | 88.20           | -33.96       | peak     |         |
| 2   | *   | 13070.46     | 25.69                    | 16.76                   | 42.45                      | 68.20           | -25.75       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE20) Mode 6695 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

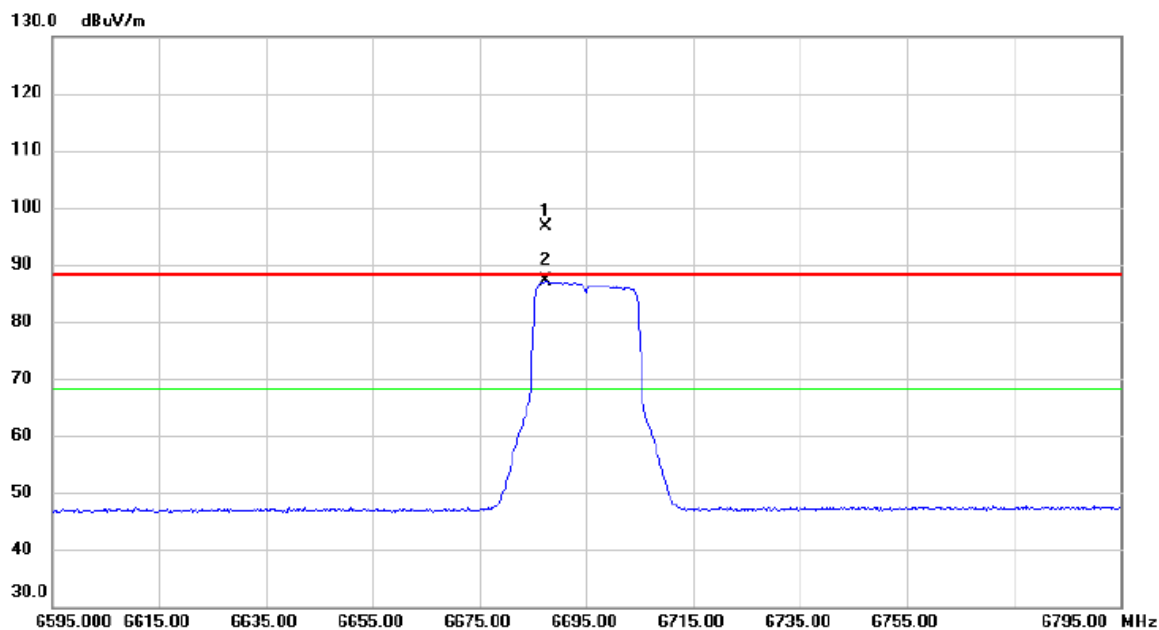


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6687.400     | 77.72                    | 18.79                   | 96.51                      | 88.20           | 8.31         | peak     | No Limit |
| 2   | *   | 6687.400     | 68.24                    | 18.79                   | 87.03                      | 68.20           | 18.83        | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE20) Mode 6695 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

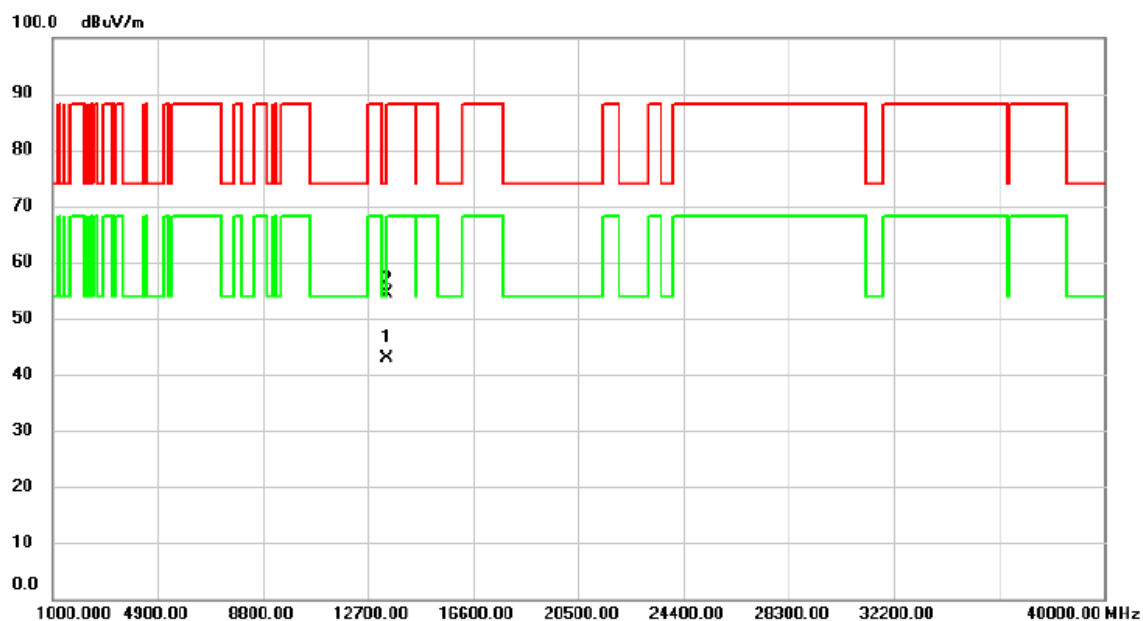


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 13389.51     | 25.53                    | 17.30                   | 42.83                      | 54.00           | -11.17       | AVG      |         |
| 2   |     | 13389.69     | 37.14                    | 17.30                   | 54.44                      | 74.00           | -19.56       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE20) Mode 6695 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

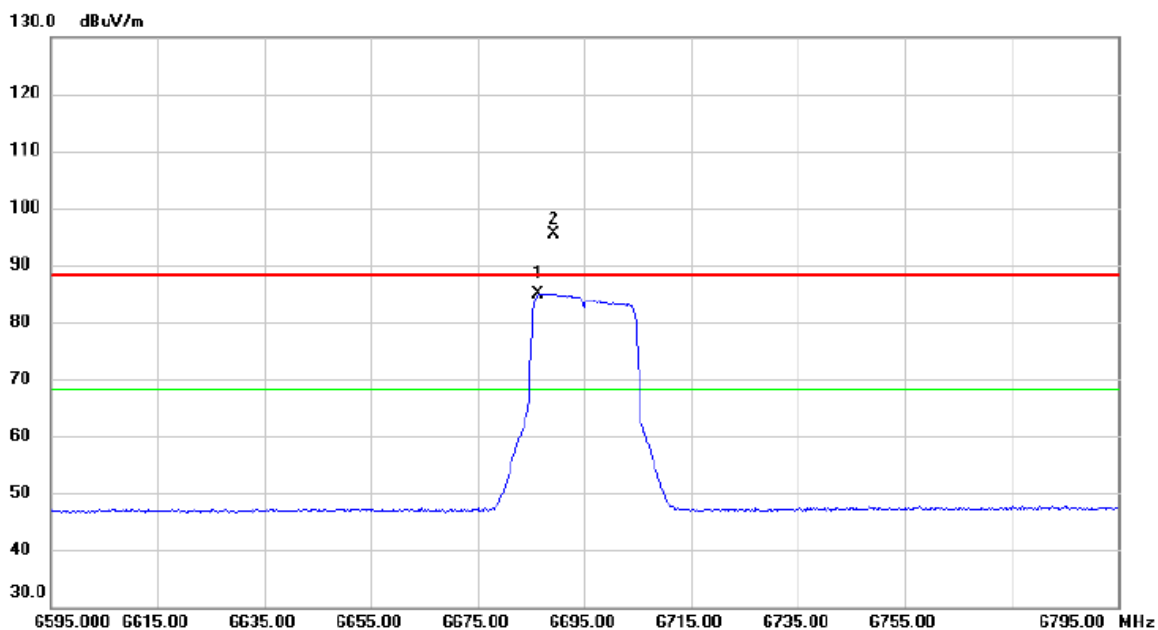


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6686.400     | 66.18                    | 18.79                   | 84.97                      | 68.20           | 16.77        | AVG      | No Limit |
| 2   | X   | 6689.200     | 76.65                    | 18.80                   | 95.45                      | 88.20           | 7.25         | peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE20) Mode 6695 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

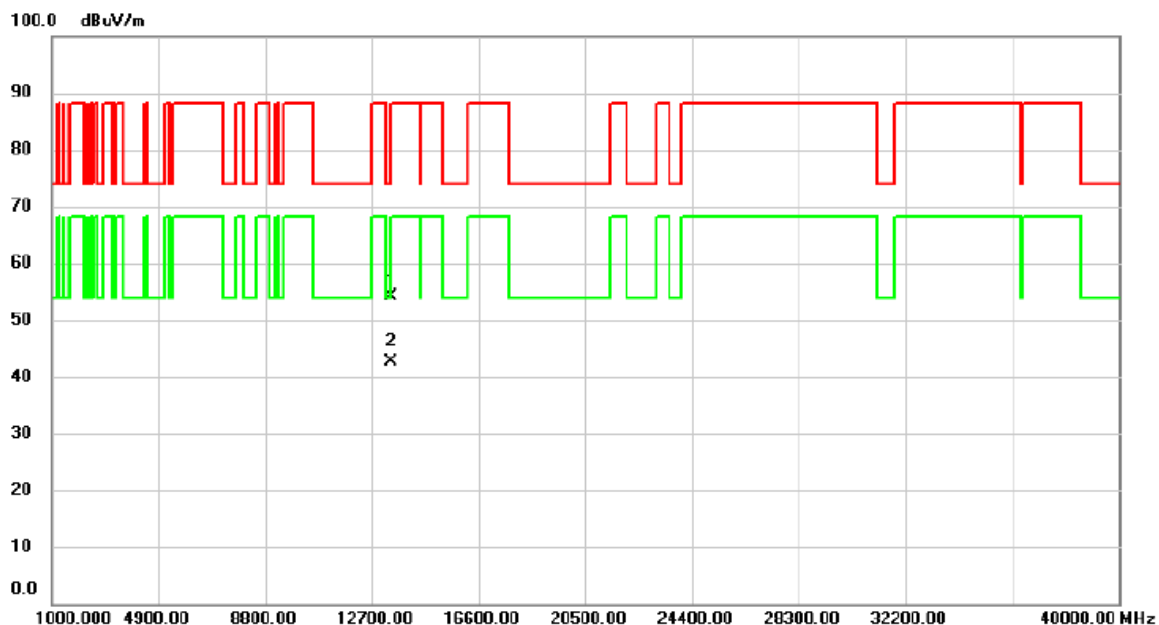


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13390.19     | 36.81                    | 17.30                   | 54.11                      | 74.00           | -19.89       | peak     |         |
| 2   | *   | 13390.30     | 25.43                    | 17.30                   | 42.73                      | 54.00           | -11.27       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE20) Mode 6855 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

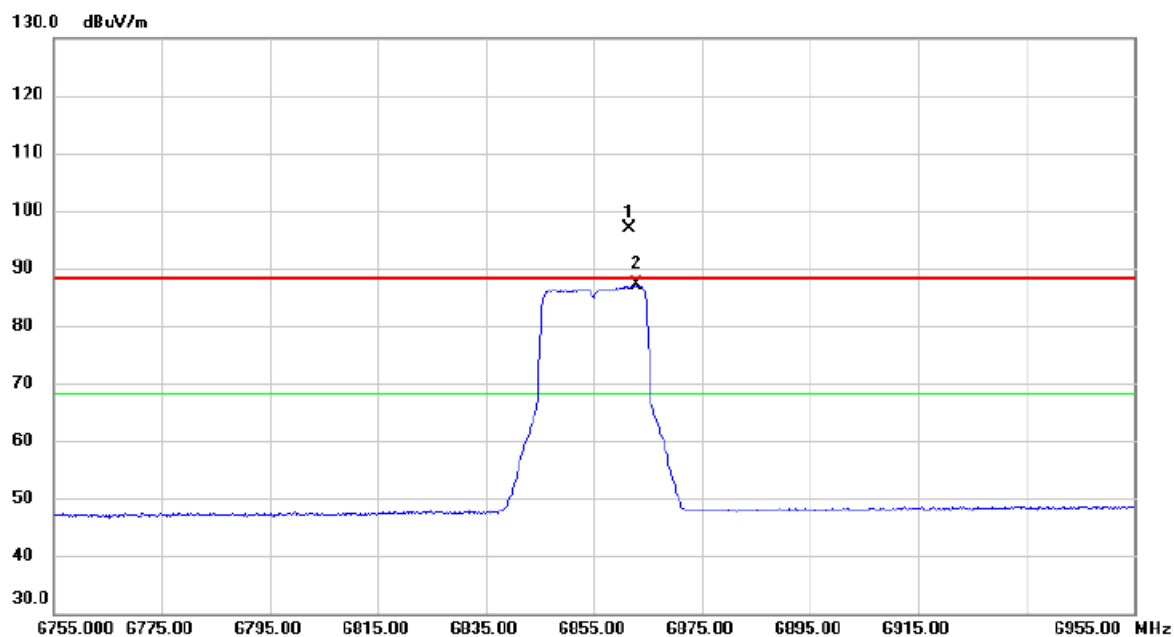


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6861.600     | 77.27                    | 19.63                   | 96.90                      | 88.20           | 8.70         | peak     | No Limit |
| 2   | *   | 6862.800     | 67.41                    | 19.64                   | 87.05                      | 68.20           | 18.85        | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE20) Mode 6855 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

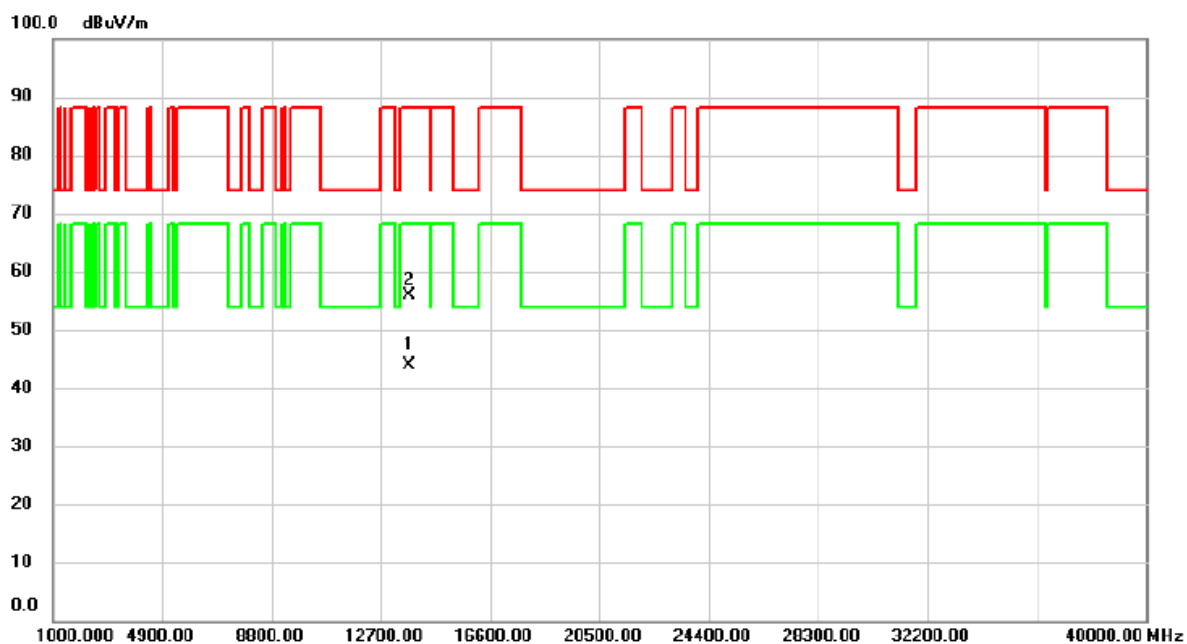


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 13709.45     | 25.97                    | 17.94                   | 43.91                      | 68.20           | -24.29       | AVG      |         |
| 2   |     | 13710.71     | 37.83                    | 17.94                   | 55.77                      | 88.20           | -32.43       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE20) Mode 6855 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

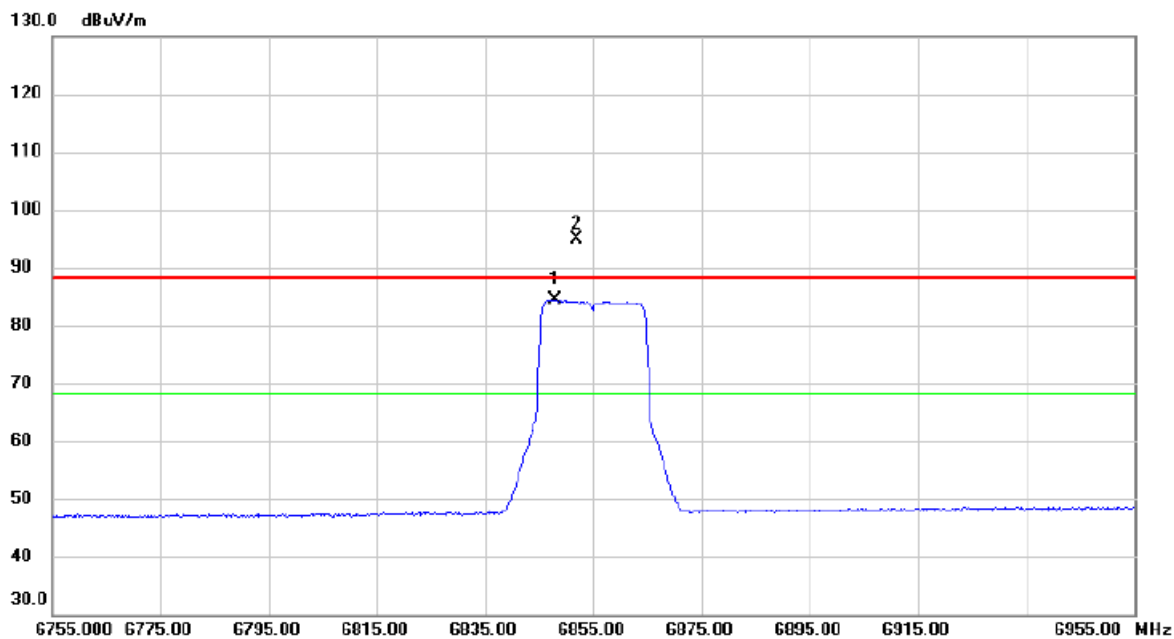


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6848.000     | 64.88                    | 19.56                   | 84.44                      | 68.20           | 16.24        | AVG      | No Limit |
| 2   | X   | 6851.800     | 75.36                    | 19.59                   | 94.95                      | 88.20           | 6.75         | peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE20) Mode 6855 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

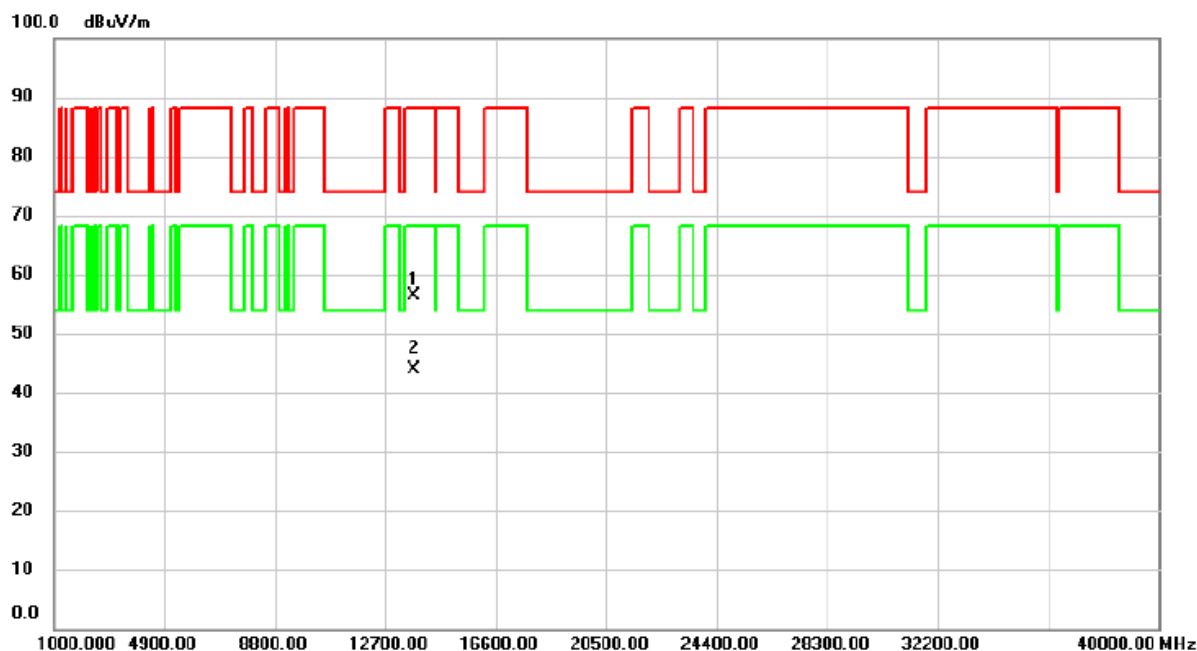


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13710.34     | 38.53                    | 17.94                   | 56.47                      | 88.20           | -31.73       | peak     |         |
| 2   | *   | 13710.55     | 26.04                    | 17.94                   | 43.98                      | 68.20           | -24.22       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE40) Mode 6685 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

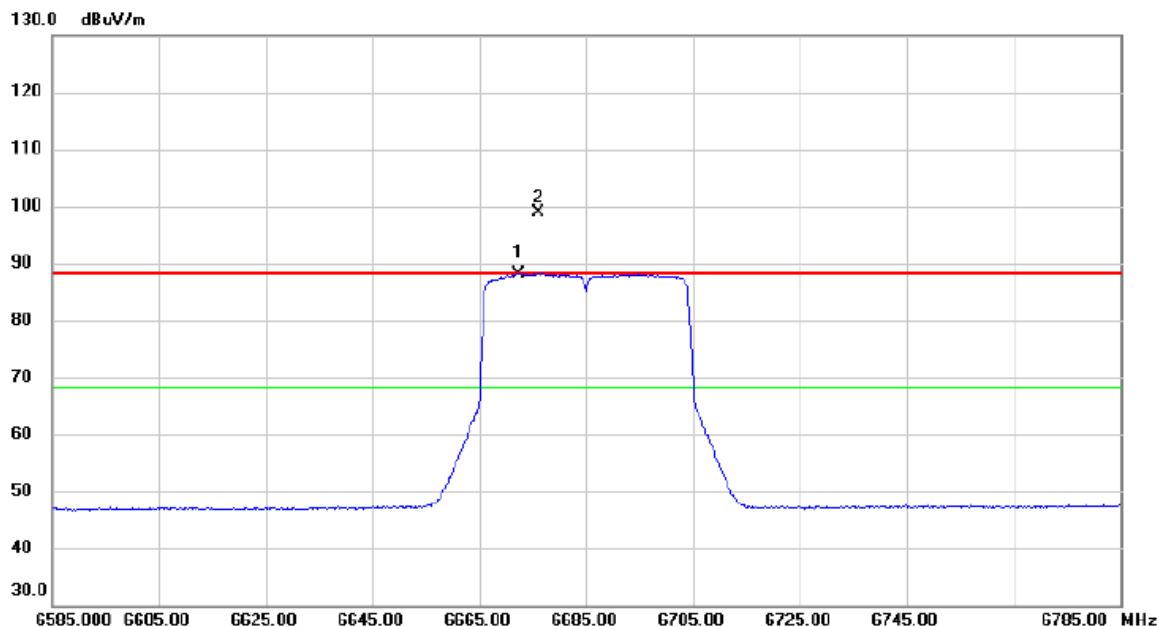


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6672.400     | 69.41                    | 18.73                   | 88.14                      | 68.20           | 19.94        | AVG      | No Limit |
| 2   | X   | 6676.200     | 80.11                    | 18.74                   | 98.85                      | 88.20           | 10.65        | peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE40) Mode 6685 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

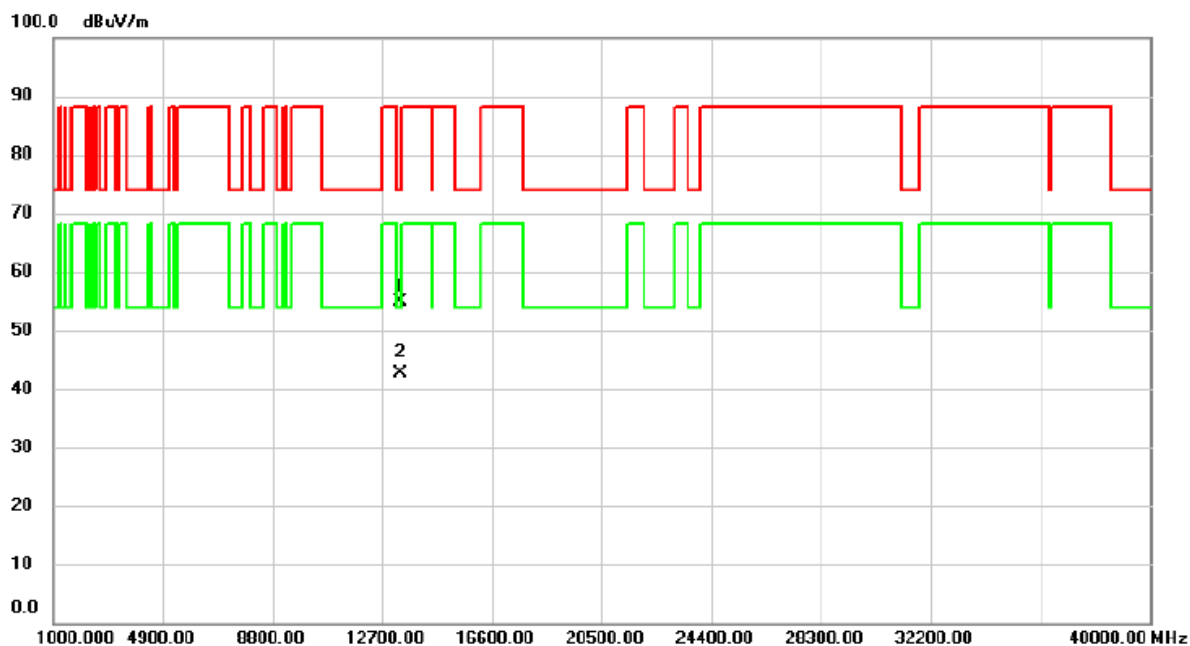


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13369.05     | 37.72                    | 17.27                   | 54.99                      | 74.00           | -19.01       | peak     |         |
| 2   | *   | 13369.26     | 25.42                    | 17.27                   | 42.69                      | 54.00           | -11.31       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE40) Mode 6685 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

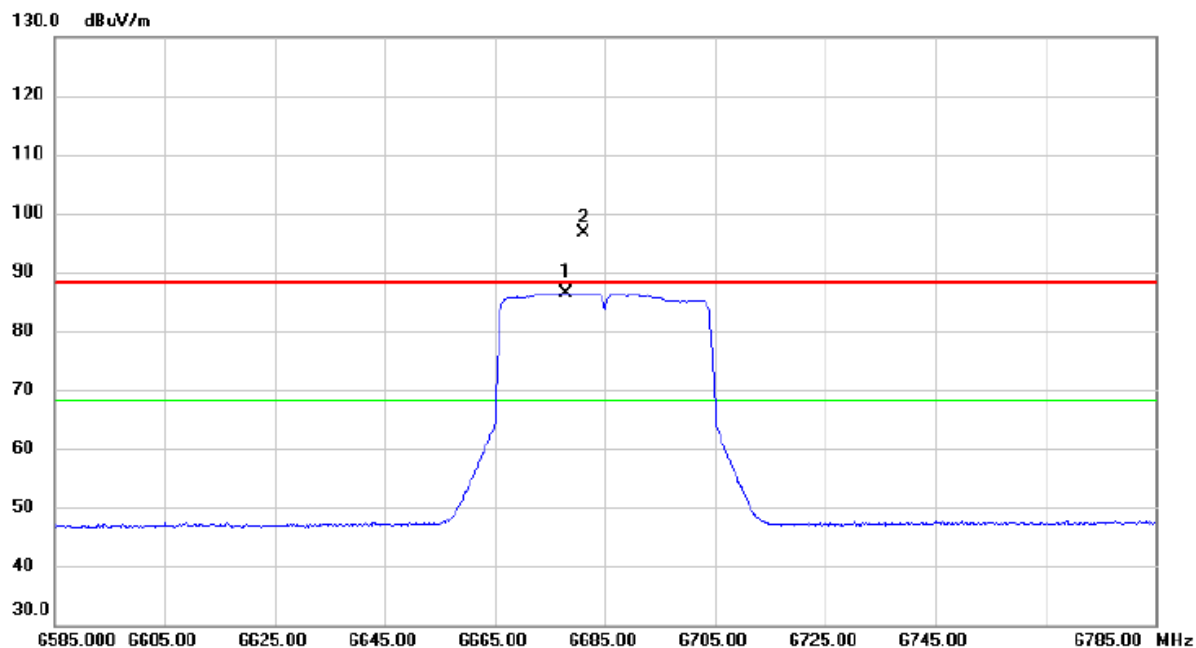


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6678.000     | 67.73                    | 18.75                   | 86.48                      | 68.20           | 18.28        | AVG      | No Limit |
| 2   | X   | 6681.000     | 77.95                    | 18.77                   | 96.72                      | 88.20           | 8.52         | peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE40) Mode 6685 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

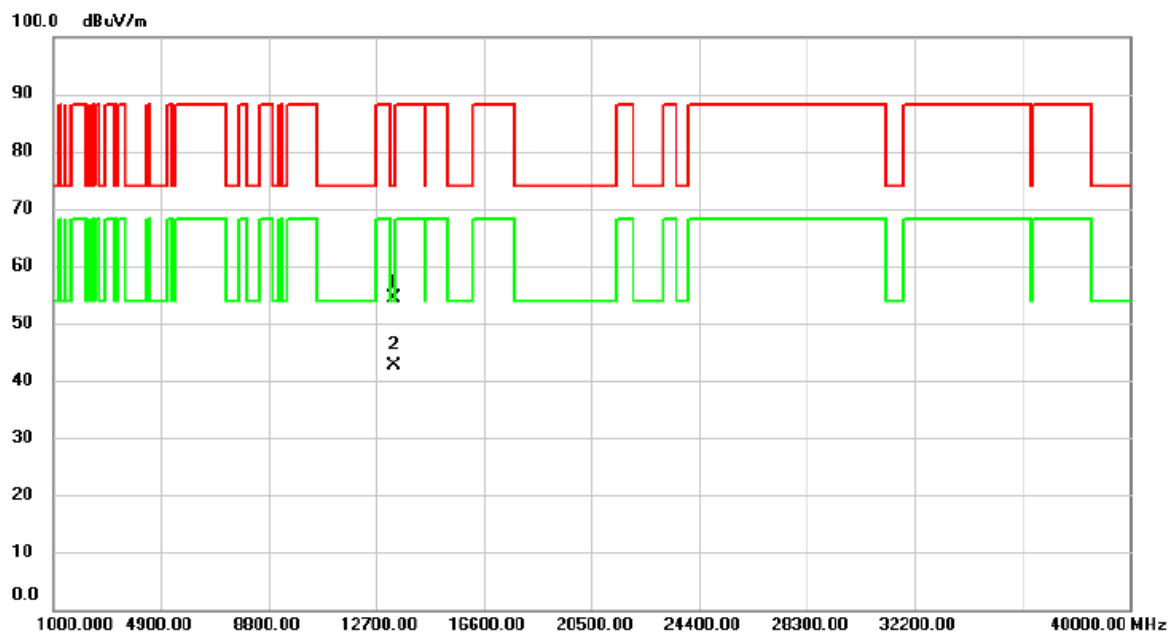


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13369.20     | 36.99                    | 17.27                   | 54.26                      | 74.00           | -19.74       | peak     |         |
| 2   | *   | 13370.51     | 25.36                    | 17.27                   | 42.63                      | 54.00           | -11.37       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE40) Mode 6845 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

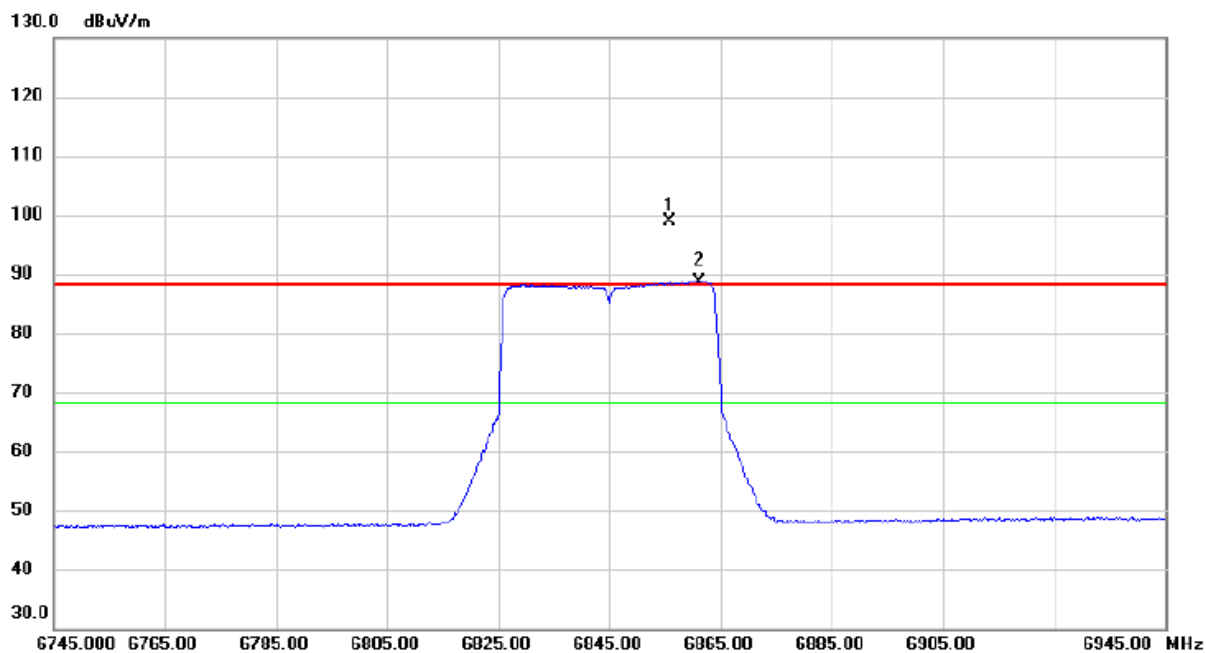


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6855.800     | 79.33                    | 19.60                   | 98.93                      | 88.20           | 10.73        | peak     | No Limit |
| 2   | *   | 6861.000     | 69.03                    | 19.63                   | 88.66                      | 68.20           | 20.46        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE40) Mode 6845 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

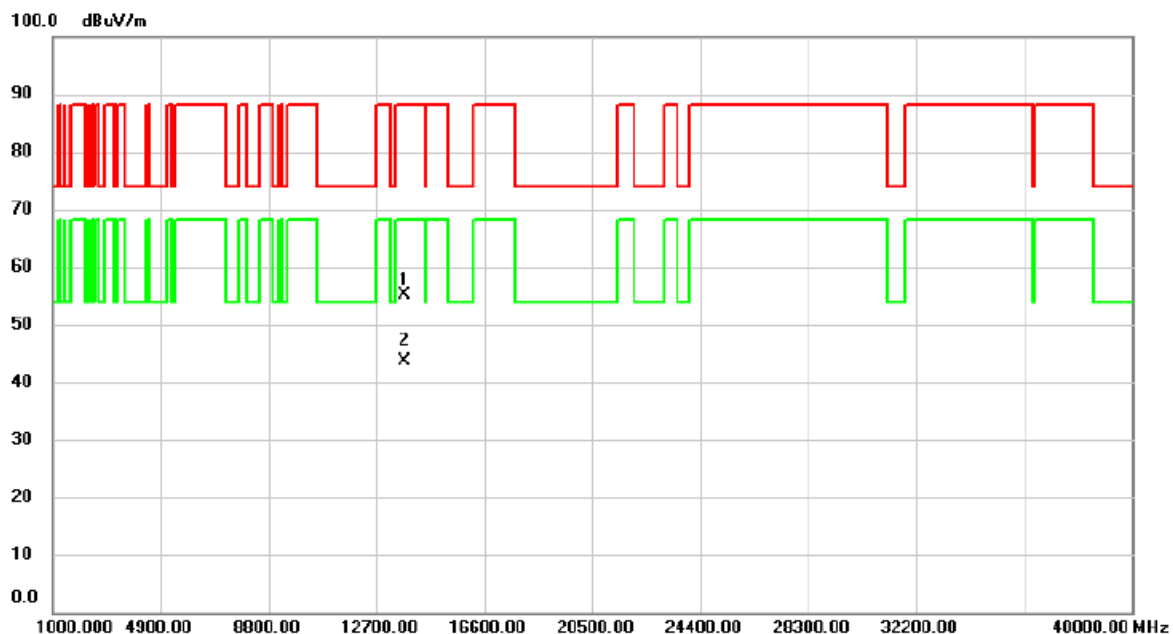


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13689.94     | 37.29                    | 17.90                   | 55.19                      | 88.20           | -33.01       | peak     |         |
| 2   | *   | 13690.01     | 25.85                    | 17.90                   | 43.75                      | 68.20           | -24.45       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE40) Mode 6845 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

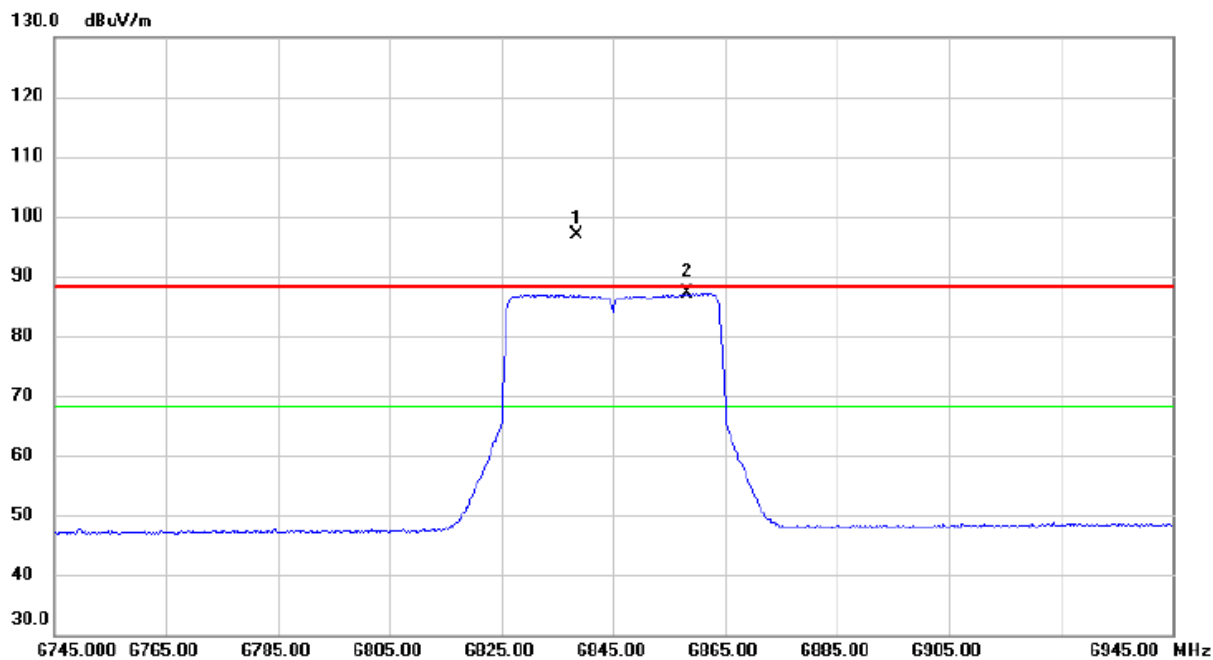


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6838.400     | 77.37                    | 19.52                   | 96.89                      | 88.20           | 8.69         | peak     | No Limit |
| 2   | *   | 6858.200     | 67.57                    | 19.62                   | 87.19                      | 68.20           | 18.99        | AVG      | No Limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE40) Mode 6845 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

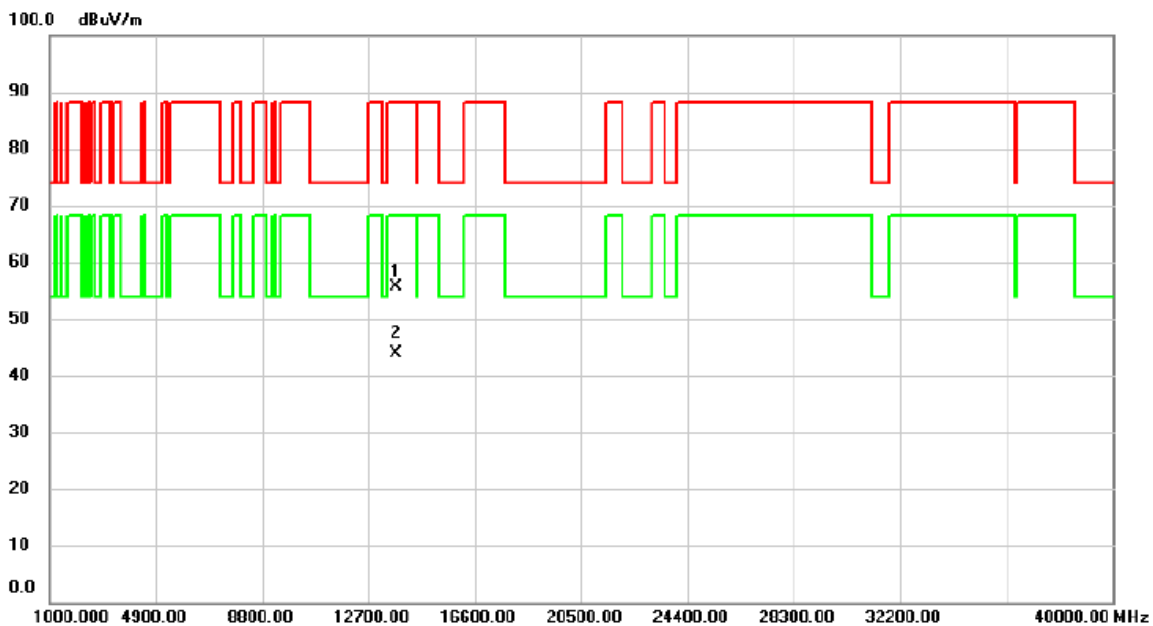


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13689.68     | 37.72                    | 17.90                   | 55.62                      | 88.20           | -32.58       | peak     |         |
| 2   | *   | 13690.97     | 25.98                    | 17.90                   | 43.88                      | 68.20           | -24.32       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE80) Mode 6545 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

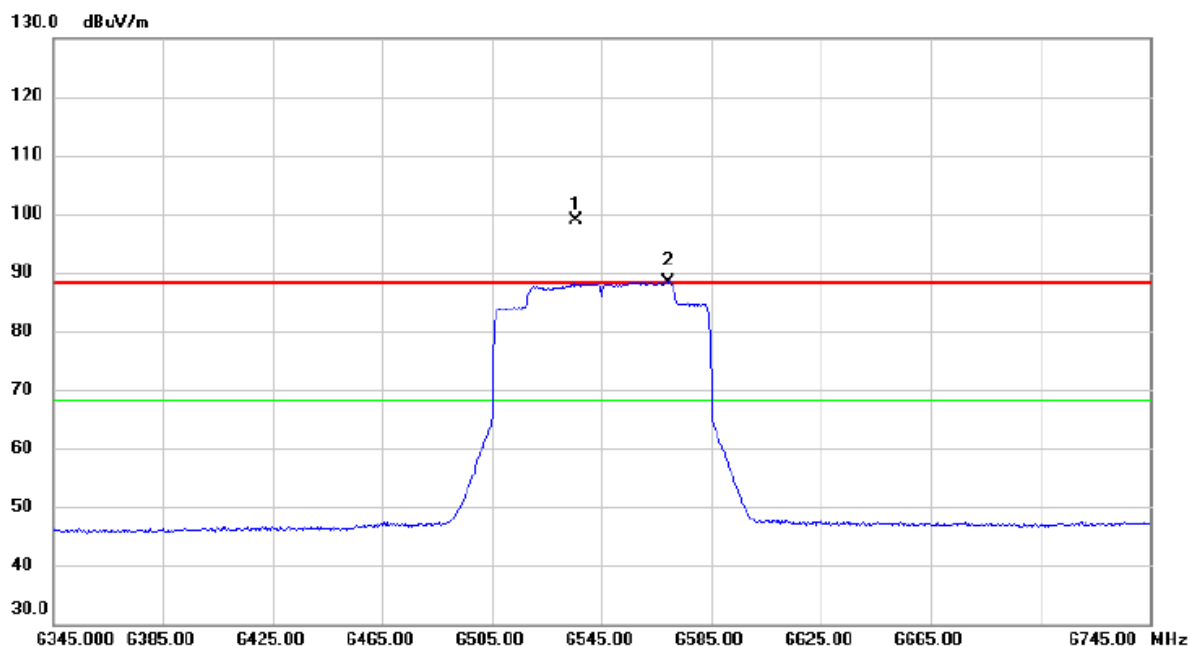


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6535.800     | 80.93                    | 18.07                   | 99.00                      | 88.20           | 10.80        | peak     | No Limit |
| 2   | *   | 6569.000     | 70.07                    | 18.23                   | 88.30                      | 68.20           | 20.10        | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE80) Mode 6545 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

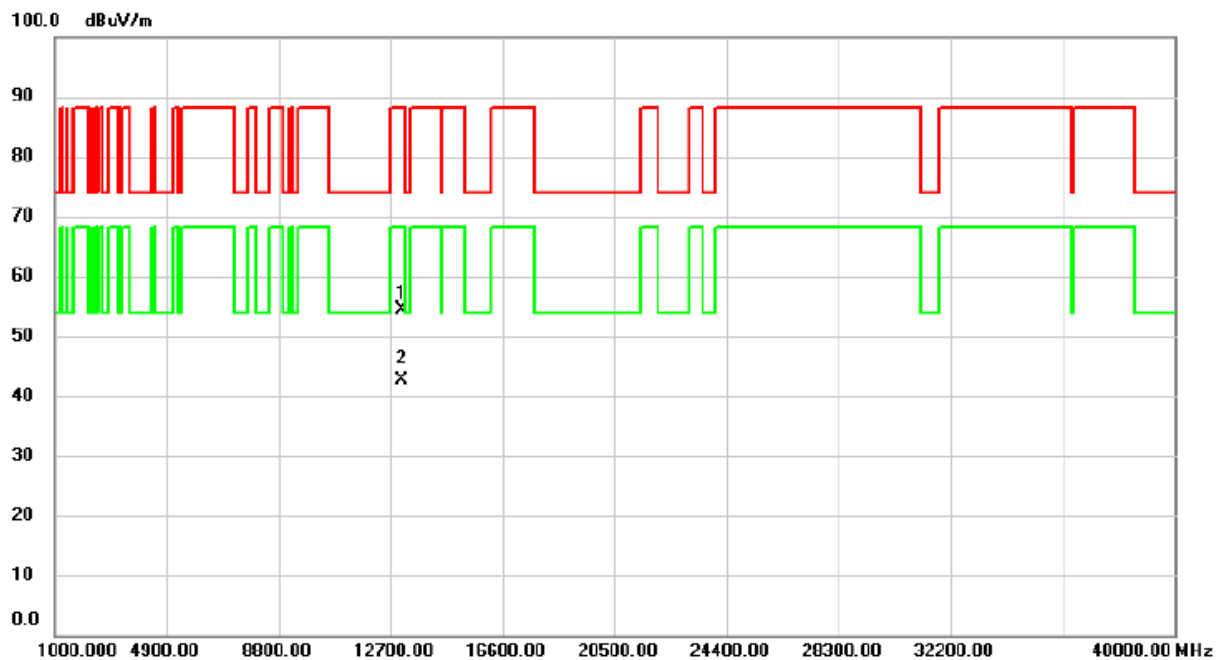


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13089.65     | 37.63                    | 16.78                   | 54.41                      | 88.20           | -33.79       | peak     |         |
| 2   | *   | 13090.44     | 25.82                    | 16.78                   | 42.60                      | 68.20           | -25.60       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE80) Mode 6545 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

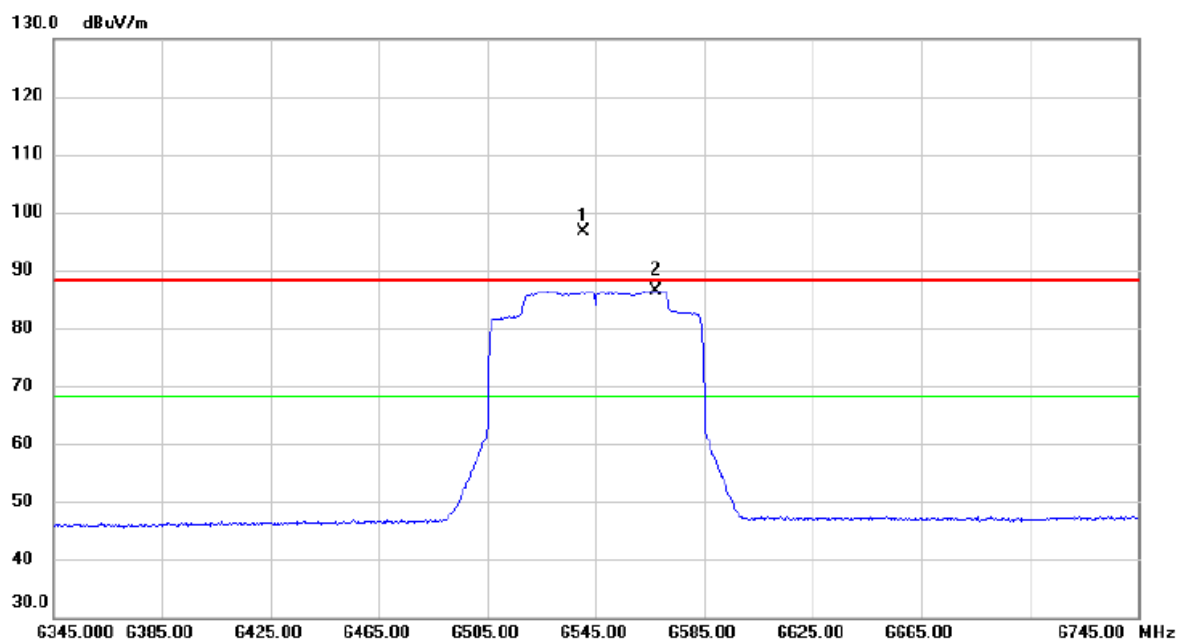


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6540.600     | 78.64                    | 18.09                   | 96.73                      | 88.20           | 8.53         | peak     | No Limit |
| 2   | *   | 6567.400     | 68.27                    | 18.22                   | 86.49                      | 68.20           | 18.29        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE80) Mode 6545 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

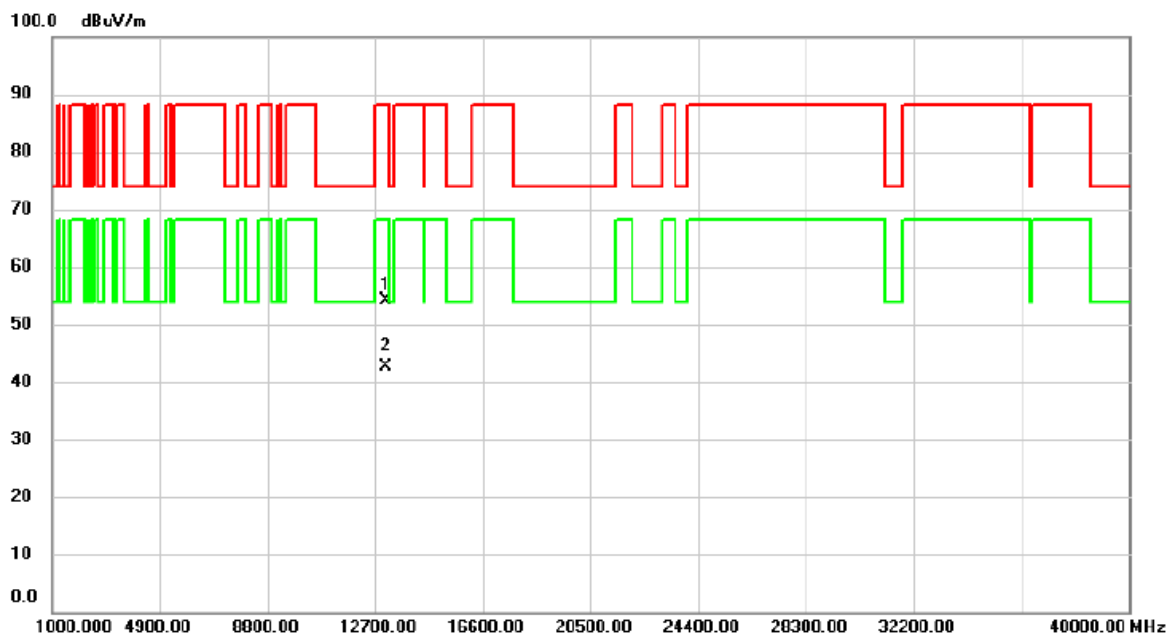


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13089.88     | 37.47                    | 16.78                   | 54.25                      | 88.20           | -33.95       | peak     |         |
| 2   | *   | 13090.35     | 25.84                    | 16.78                   | 42.62                      | 68.20           | -25.58       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE80) Mode 6625 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

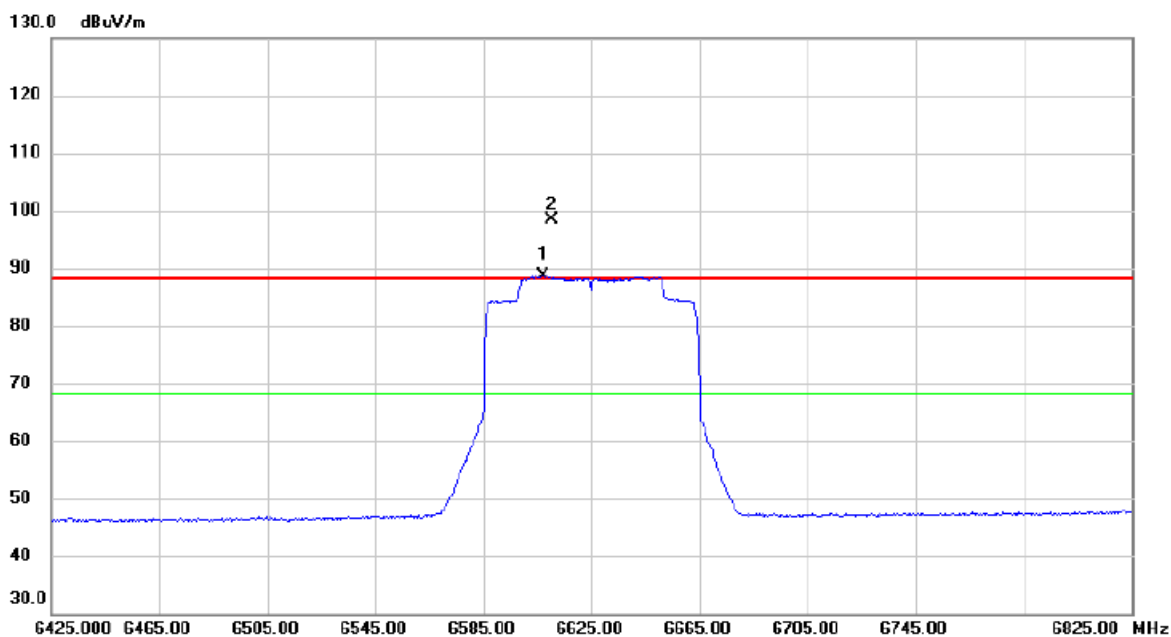


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6607.400     | 70.14                    | 18.42                   | 88.56                      | 68.20           | 20.36        | AVG      | No Limit |
| 2   | X   | 6610.200     | 79.85                    | 18.43                   | 98.28                      | 88.20           | 10.08        | peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE80) Mode 6625 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

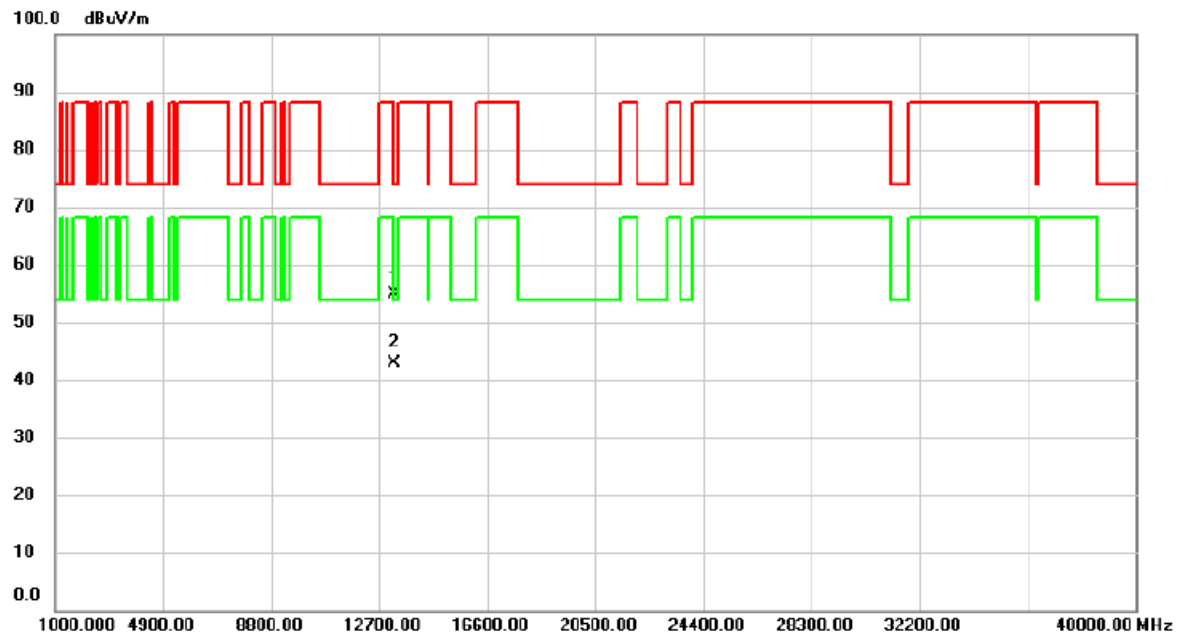


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13249.94     | 37.75                    | 17.05                   | 54.80                      | 88.20           | -33.40       | peak     |         |
| 2   | *   | 13250.98     | 25.73                    | 17.07                   | 42.80                      | 54.00           | -11.20       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE80) Mode 6625 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

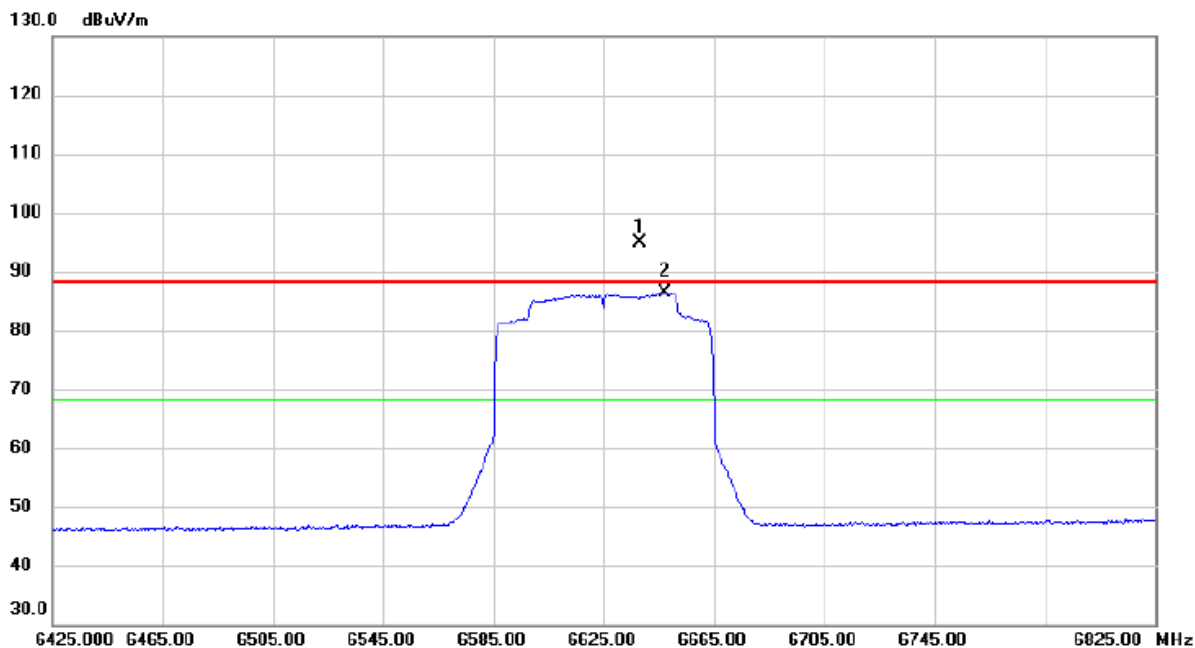


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6637.800     | 76.37                    | 18.56                   | 94.93                      | 88.20           | 6.73         | peak     | No Limit |
| 2   | *   | 6647.400     | 67.83                    | 18.60                   | 86.43                      | 68.20           | 18.23        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE80) Mode 6625 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

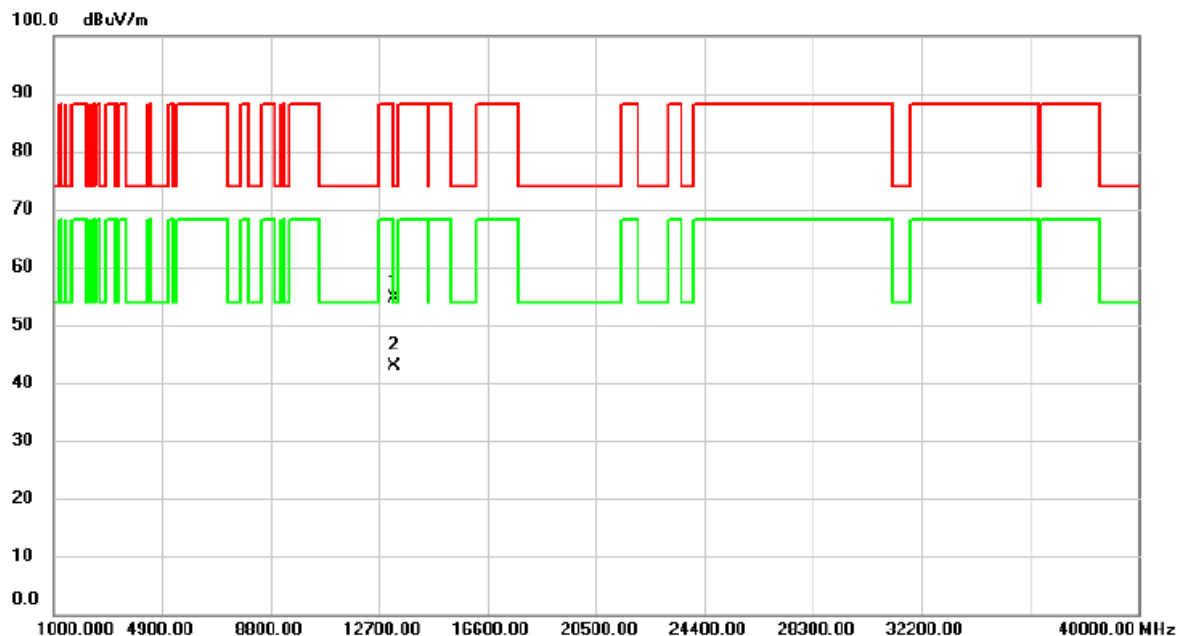


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13249.63     | 37.46                    | 17.05                   | 54.51                      | 88.20           | -33.69       | peak     |         |
| 2   | *   | 13250.91     | 25.87                    | 17.07                   | 42.94                      | 54.00           | -11.06       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE80) Mode 6785 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

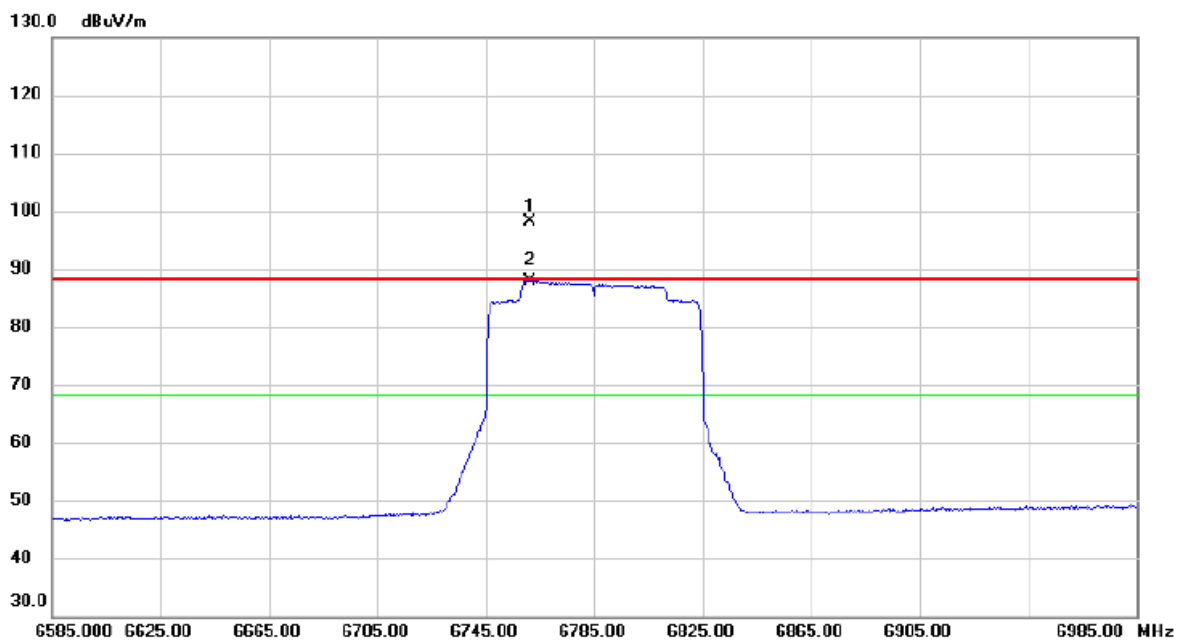


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6761.400     | 79.09                    | 19.15                   | 98.24                      | 88.20           | 10.04        | peak     | No Limit |
| 2   | *   | 6761.400     | 68.82                    | 19.15                   | 87.97                      | 68.20           | 19.77        | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE80) Mode 6785 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

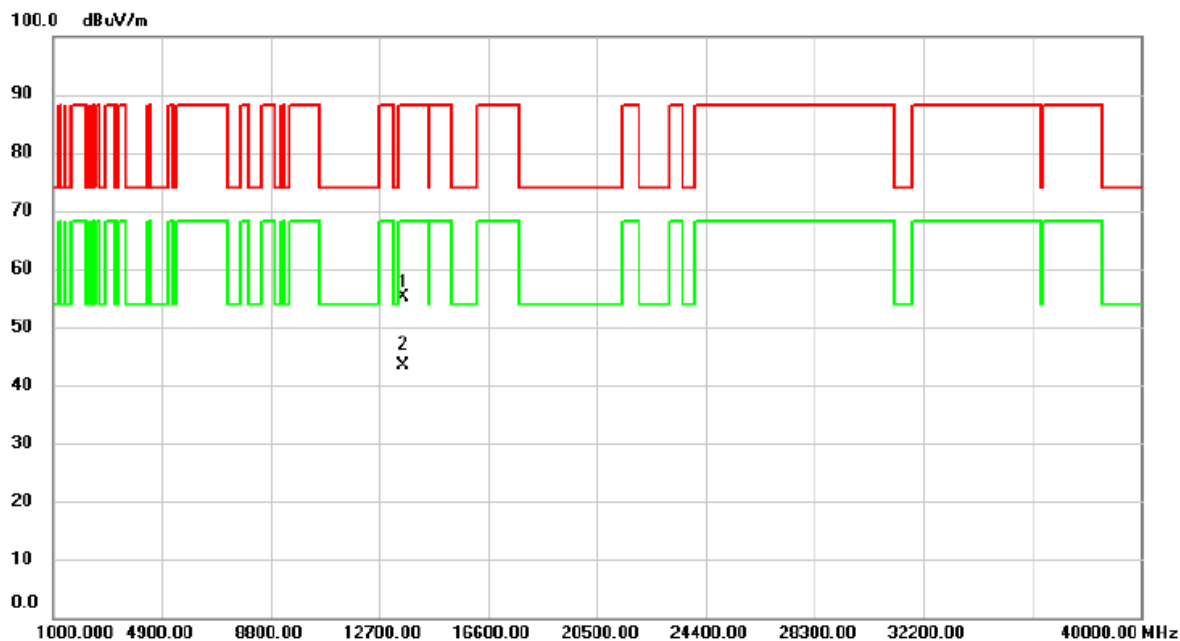


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13569.00     | 37.37                    | 17.64                   | 55.01                      | 88.20           | -33.19       | peak     |         |
| 2   | *   | 13570.49     | 25.85                    | 17.64                   | 43.49                      | 68.20           | -24.71       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE80) Mode 6785 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

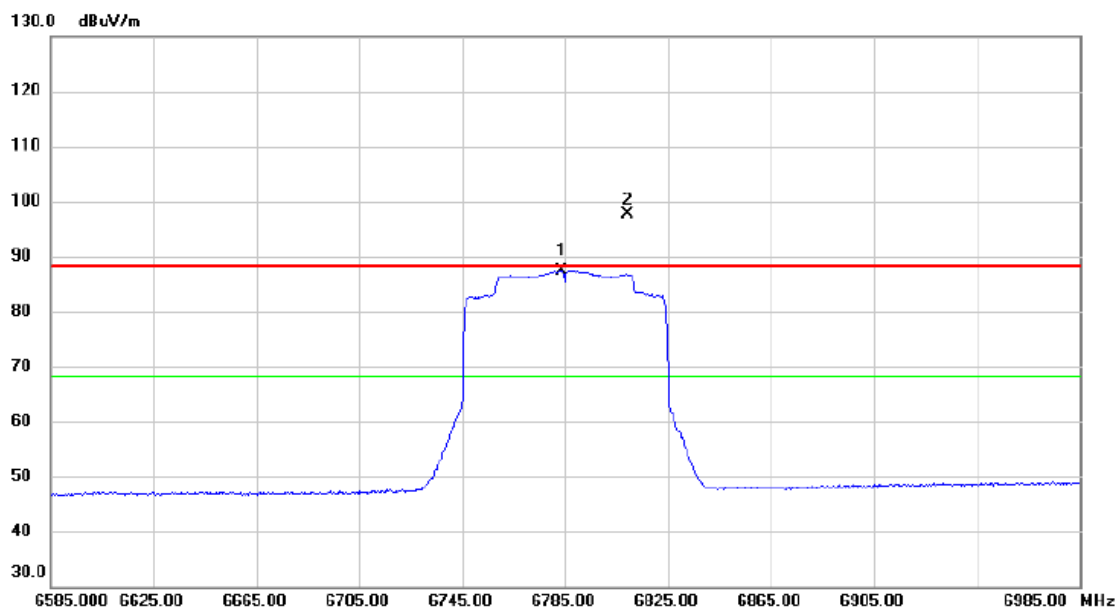


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6783.800     | 68.18                    | 19.26                   | 87.44                      | 68.20           | 19.24        | AVG      | No Limit |
| 2   | X   | 6809.400     | 78.24                    | 19.37                   | 97.61                      | 88.20           | 9.41         | peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE80) Mode 6785 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

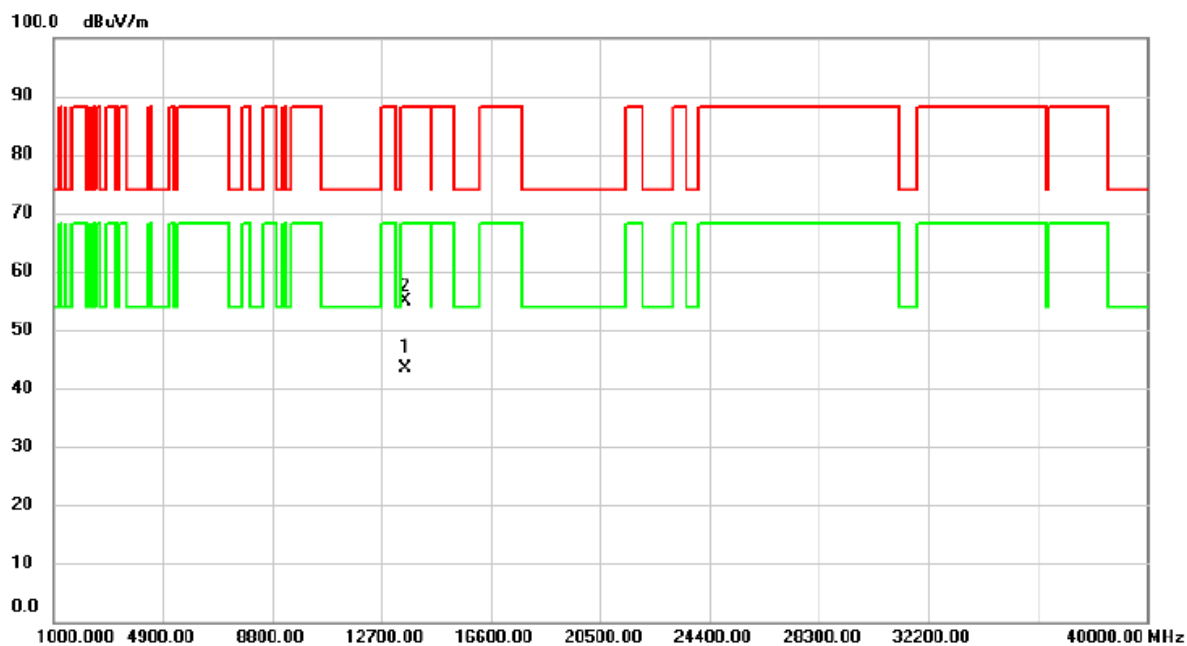


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 13569.18     | 25.64                    | 17.64                   | 43.28                      | 68.20           | -24.92       | AVG      |         |
| 2   |     | 13570.18     | 37.27                    | 17.64                   | 54.91                      | 88.20           | -33.29       | peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE80) Mode 6865 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

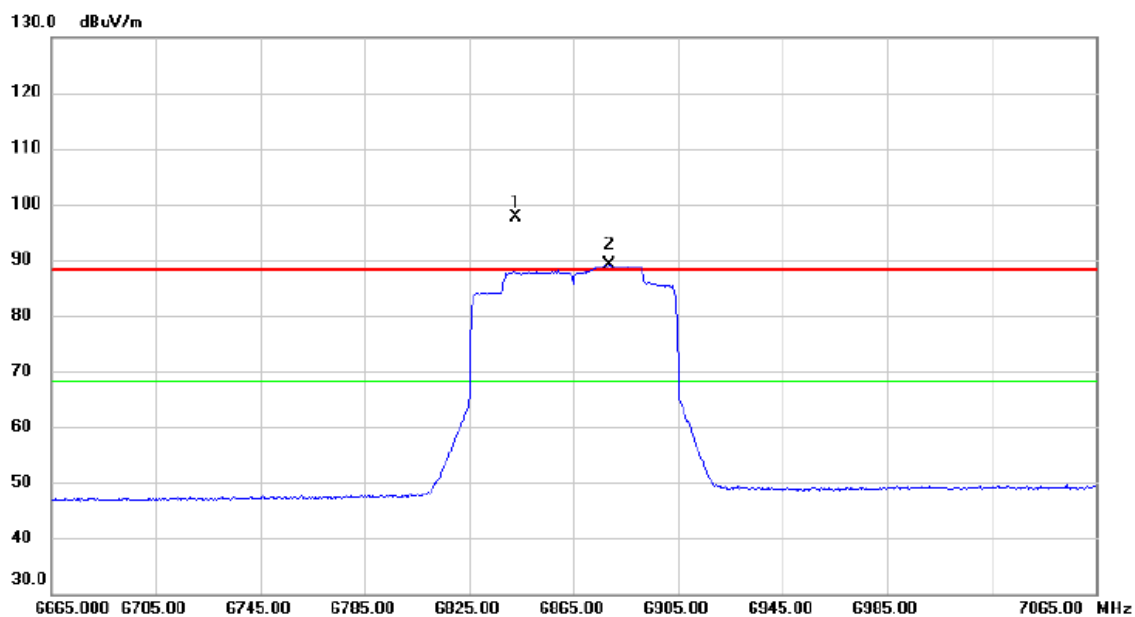


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6843.000     | 78.00                    | 19.53                   | 97.53                      | 88.20           | 9.33         | peak     | No Limit |
| 2   | *   | 6878.600     | 69.35                    | 19.71                   | 89.06                      | 68.20           | 20.86        | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE80) Mode 6865 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

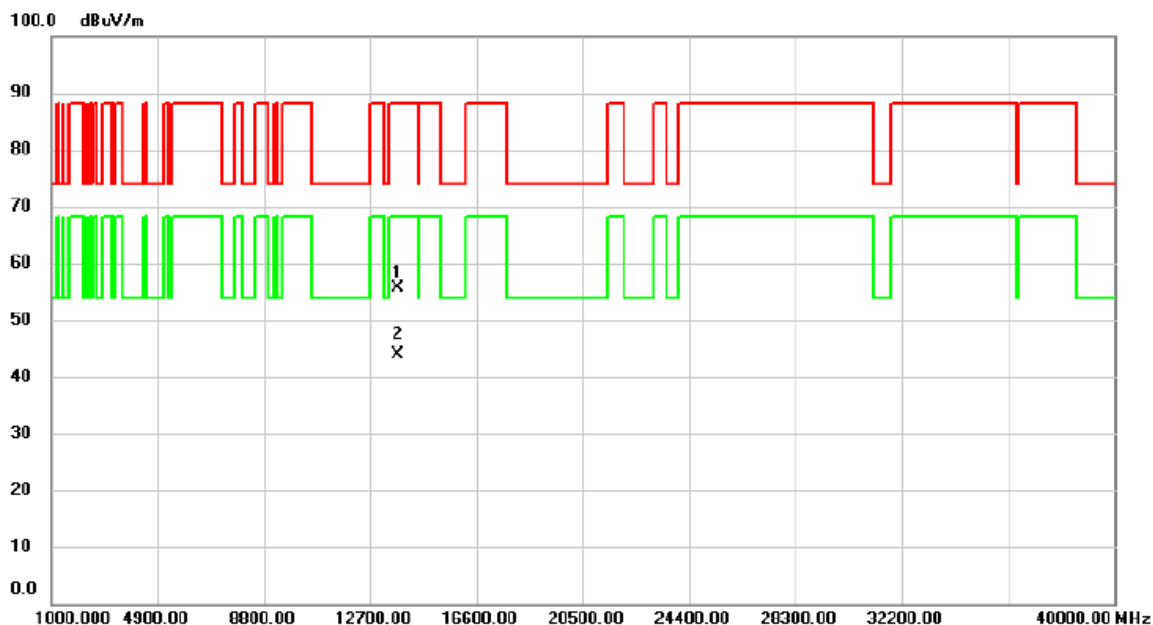


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13729.08     | 37.76                    | 17.98                   | 55.74                      | 88.20           | -32.46       | peak     |         |
| 2   | *   | 13730.65     | 25.88                    | 17.98                   | 43.86                      | 68.20           | -24.34       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE80) Mode 6865 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

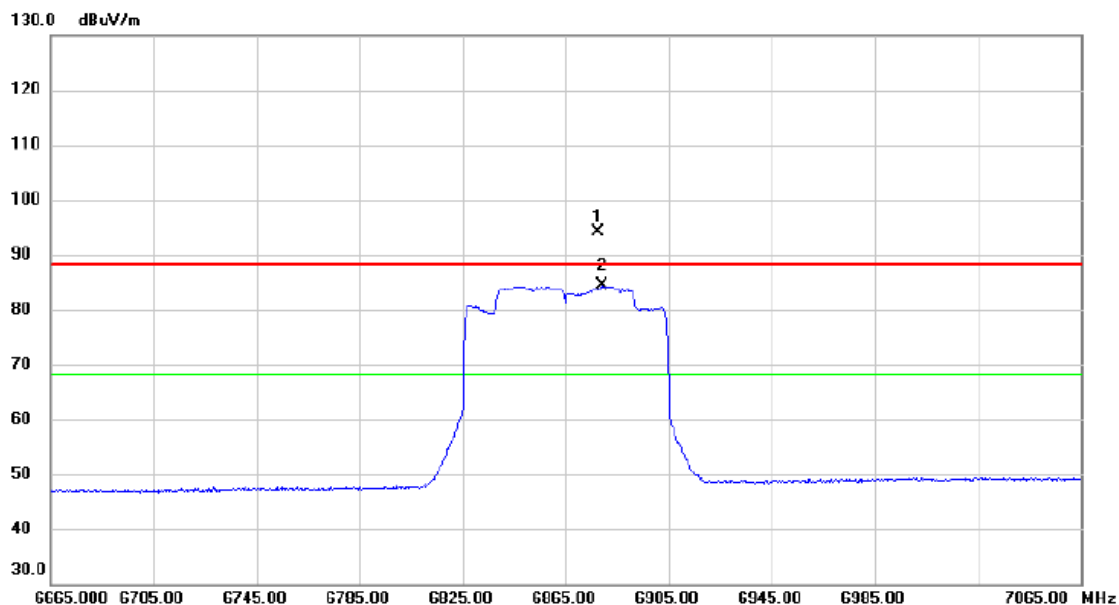


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6877.400     | 74.41                    | 19.71                   | 94.12                      | 88.20           | 5.92         | peak     | No Limit |
| 2   | *   | 6879.000     | 64.59                    | 19.71                   | 84.30                      | 68.20           | 16.10        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE80) Mode 6865 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

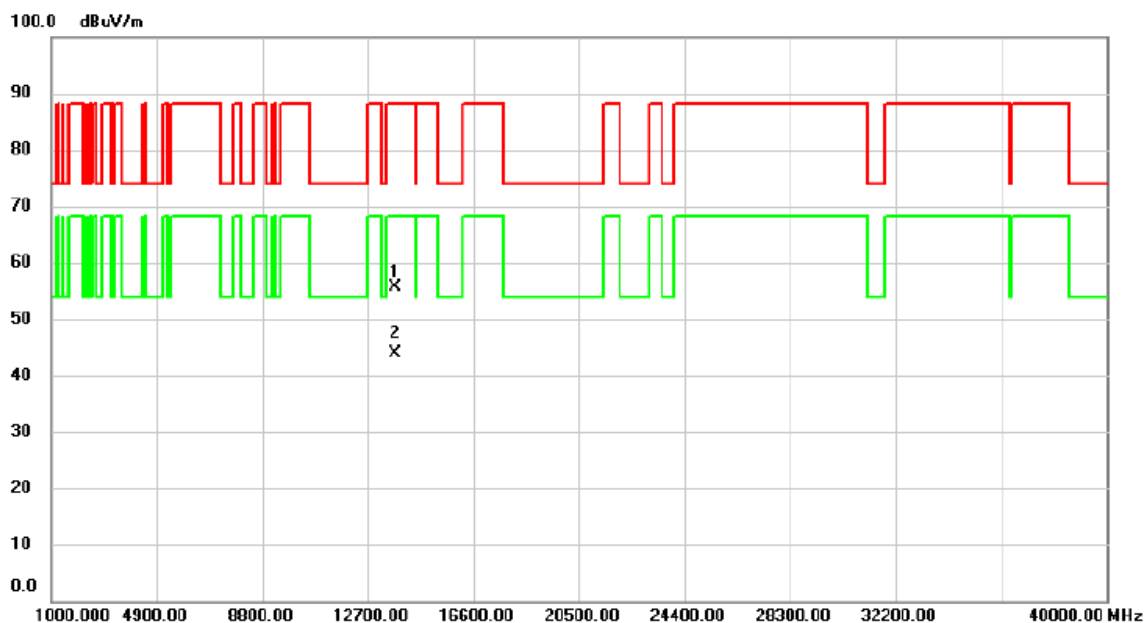


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13729.14     | 37.77                    | 17.98                   | 55.75                      | 88.20           | -32.45       | peak     |         |
| 2   | *   | 13729.69     | 25.89                    | 17.98                   | 43.87                      | 68.20           | -24.33       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE160) Mode 6665 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

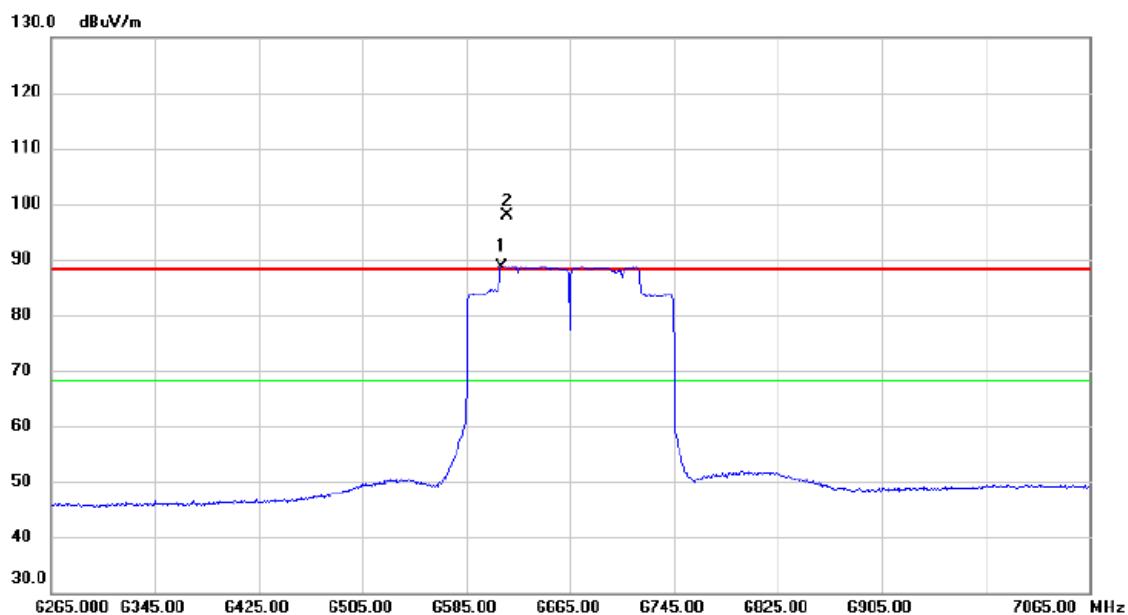


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6612.200     | 70.25                    | 18.43                   | 88.68                      | 68.20           | 20.48        | AVG      | No Limit |
| 2   | X   | 6616.200     | 79.40                    | 18.46                   | 97.86                      | 88.20           | 9.66         | peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-7_TX AX(HE160) Mode 6665 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

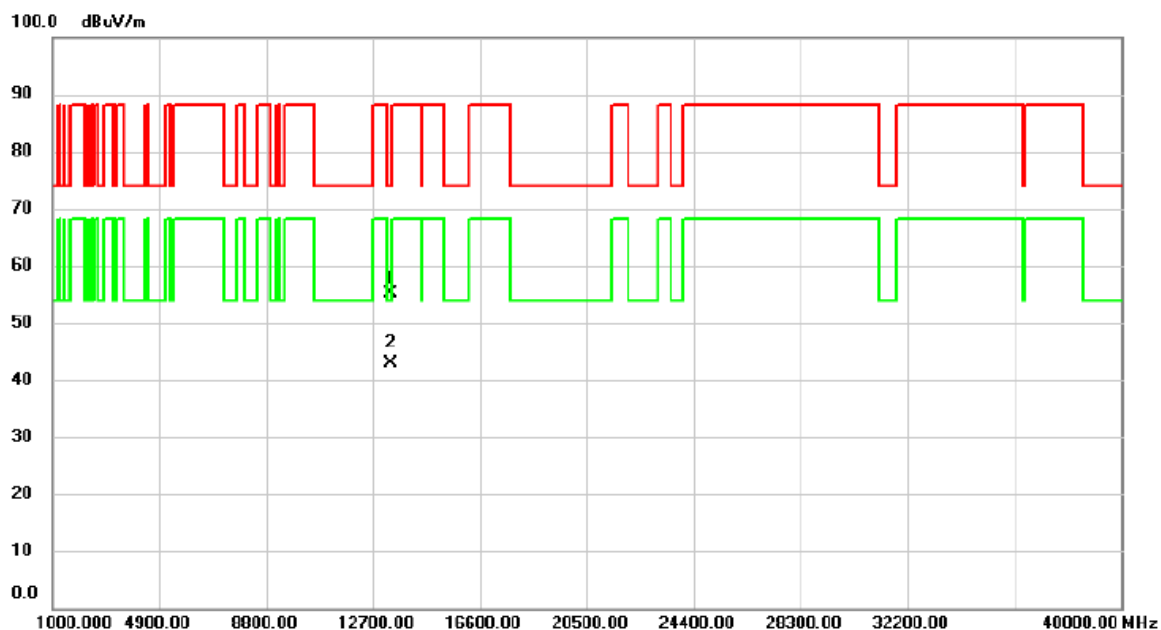


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 13330.15 | 37.99         | 17.19          | 55.18       | 74.00  | -18.82 | peak     |         |
| 2   | *   | 13330.89 | 25.58         | 17.19          | 42.77       | 54.00  | -11.23 | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE160) Mode 6665 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

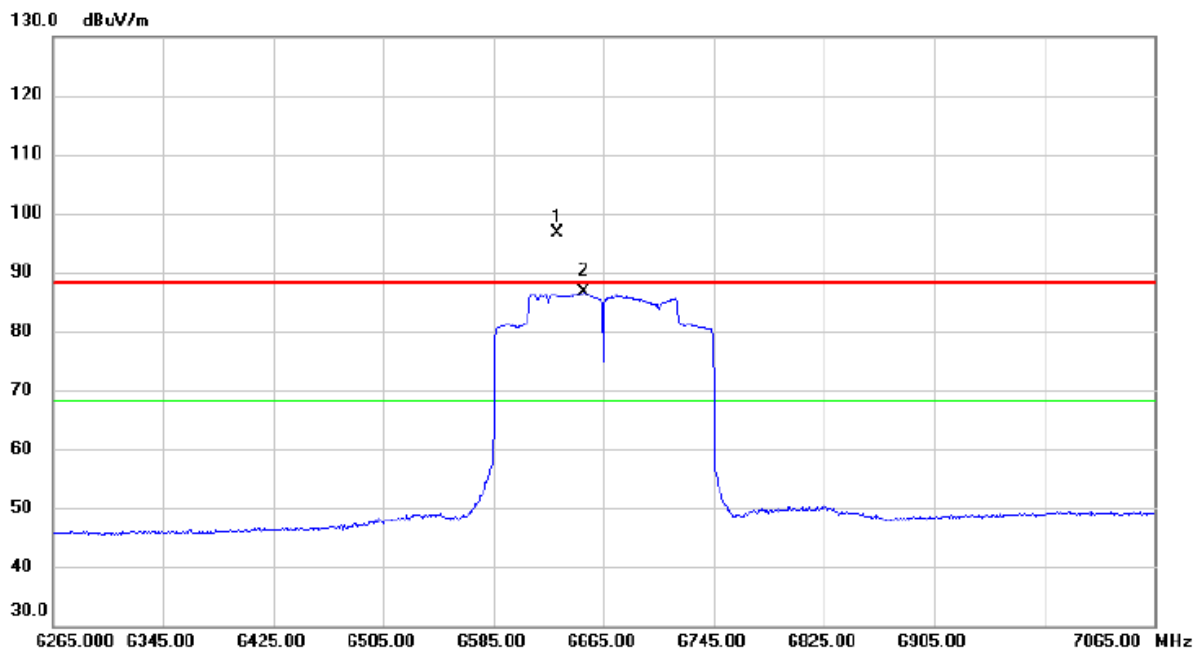


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6631.400     | 78.17                    | 18.52                   | 96.69                      | 88.20           | 8.49         | peak     | No Limit |
| 2   | *   | 6650.600     | 67.89                    | 18.62                   | 86.51                      | 68.20           | 18.31        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-7_TX AX(HE160) Mode 6665 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

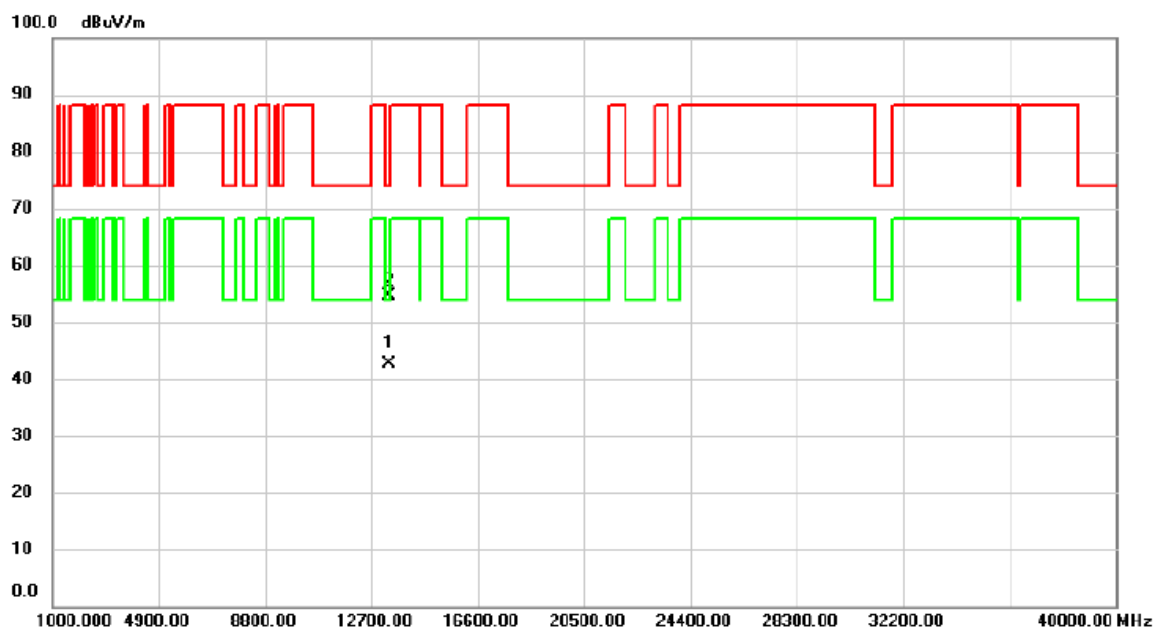


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 13329.63     | 25.54                    | 17.19                   | 42.73                      | 54.00           | -11.27       | AVG      |         |
| 2   |     | 13329.70     | 37.42                    | 17.19                   | 54.61                      | 74.00           | -19.39       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                         |              |          |
|-----------|-----------------------------------------|--------------|----------|
| Test Mode | UNII-6+UNII-7_TX AX(HE40) Mode 6525 MHz | Polarization | Vertical |
|-----------|-----------------------------------------|--------------|----------|

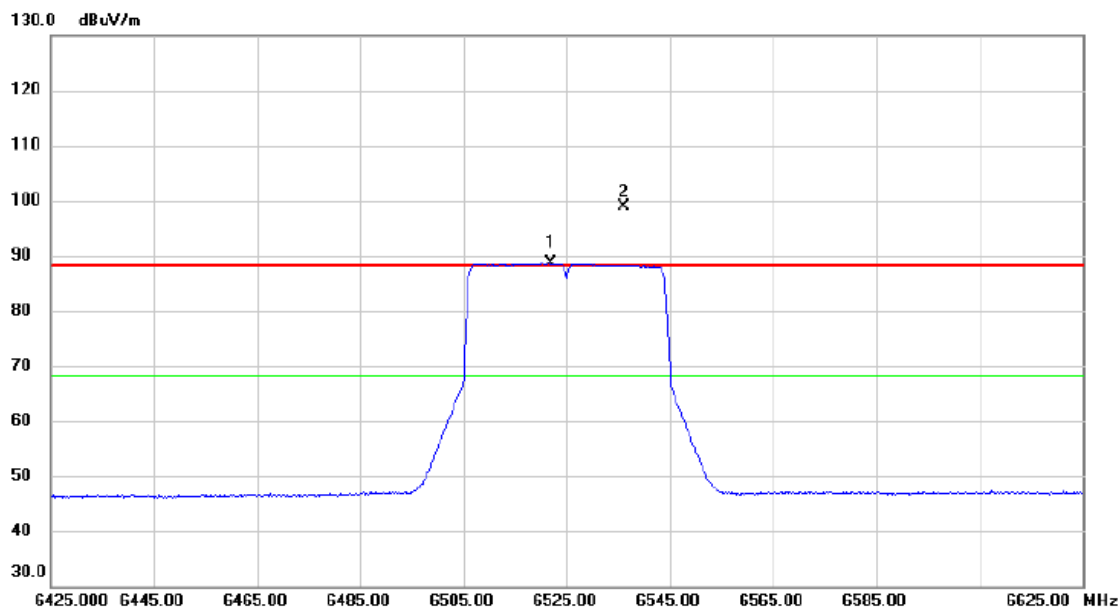


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6521.800     | 70.56                    | 18.00                   | 88.56                      | 68.20           | 20.36        | AVG      | No Limit |
| 2   | X   | 6536.000     | 80.76                    | 18.07                   | 98.83                      | 88.20           | 10.63        | peak     | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                         |              |          |
|-----------|-----------------------------------------|--------------|----------|
| Test Mode | UNII-6+UNII-7_TX AX(HE40) Mode 6525 MHz | Polarization | Vertical |
|-----------|-----------------------------------------|--------------|----------|

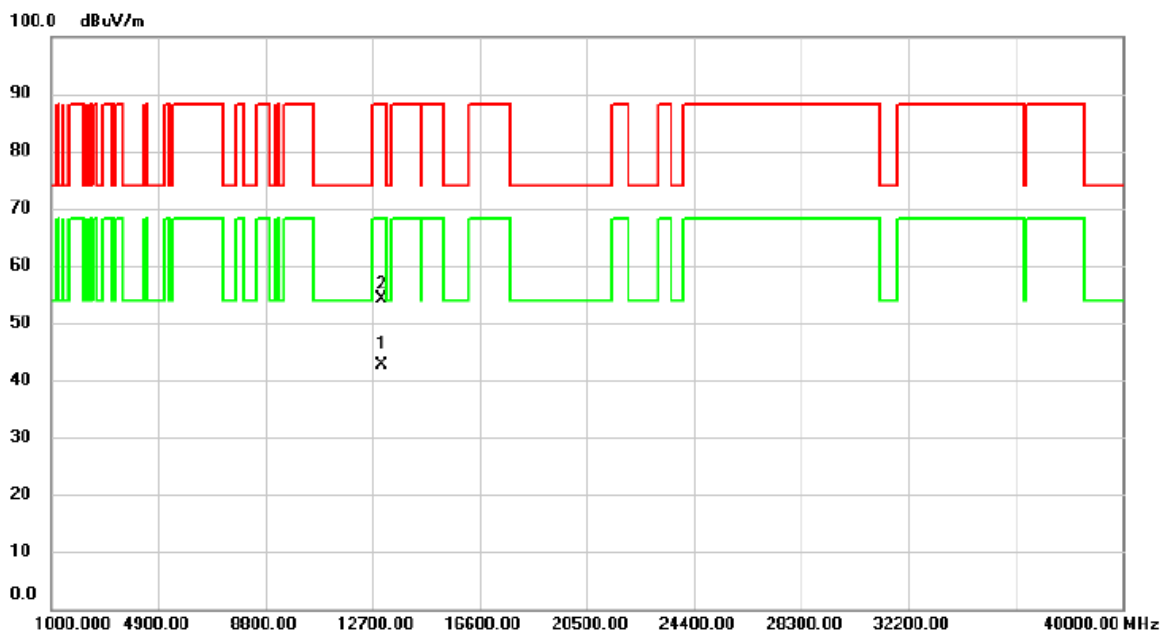


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 13050.38     | 25.90                    | 16.72                   | 42.62                      | 68.20           | -25.58       | AVG      |         |
| 2   |     | 13050.96     | 37.30                    | 16.72                   | 54.02                      | 88.20           | -34.18       | peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                         |              |            |
|-----------|-----------------------------------------|--------------|------------|
| Test Mode | UNII-6+UNII-7_TX AX(HE40) Mode 6525 MHz | Polarization | Horizontal |
|-----------|-----------------------------------------|--------------|------------|

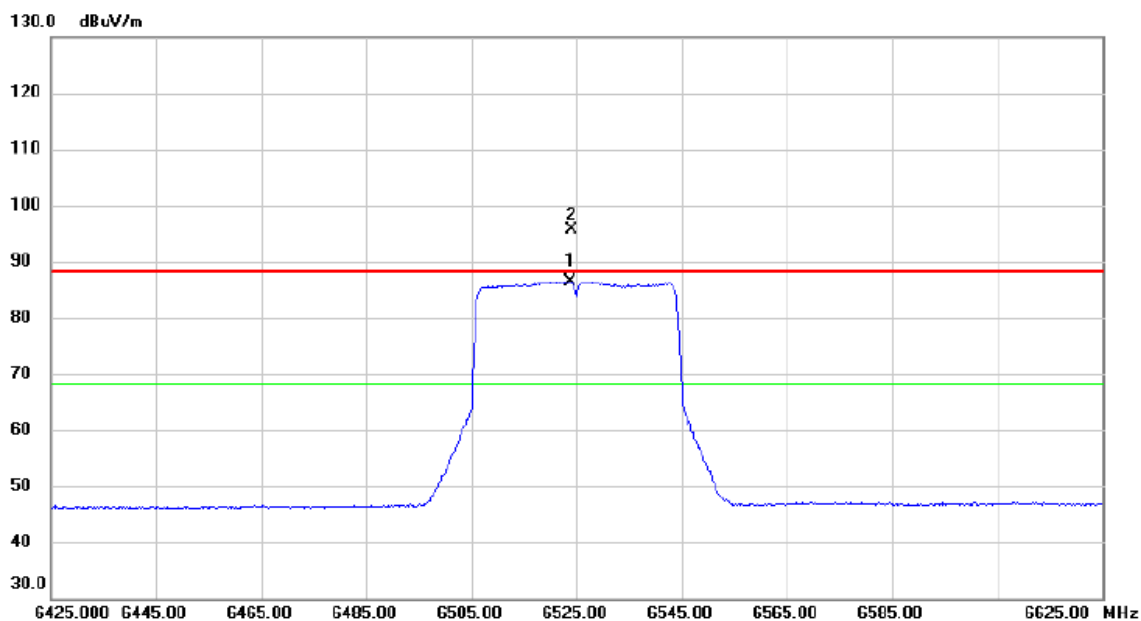


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6523.800     | 68.37                    | 18.02                   | 86.39                      | 68.20           | 18.19        | AVG      | No Limit |
| 2   | X   | 6524.200     | 77.51                    | 18.02                   | 95.53                      | 88.20           | 7.33         | peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                         |              |            |
|-----------|-----------------------------------------|--------------|------------|
| Test Mode | UNII-6+UNII-7_TX AX(HE40) Mode 6525 MHz | Polarization | Horizontal |
|-----------|-----------------------------------------|--------------|------------|

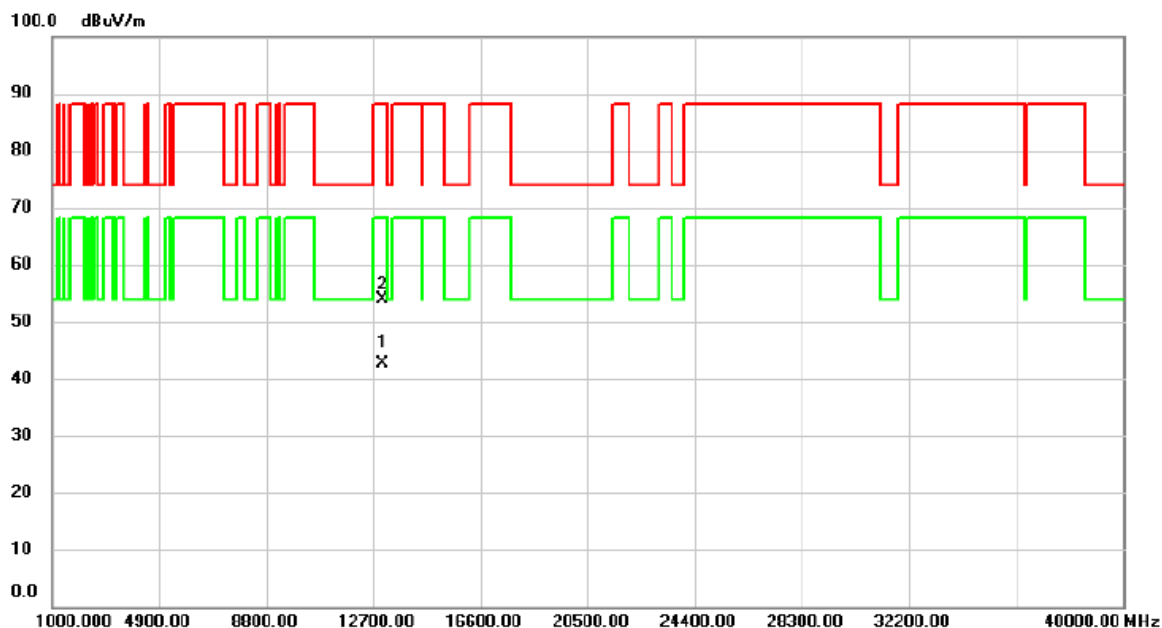


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 13049.84     | 25.85                    | 16.71                   | 42.56                      | 68.20           | -25.64       | AVG      |         |
| 2   |     | 13050.58     | 37.09                    | 16.72                   | 53.81                      | 88.20           | -34.39       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-8_TX A Mode 6995 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

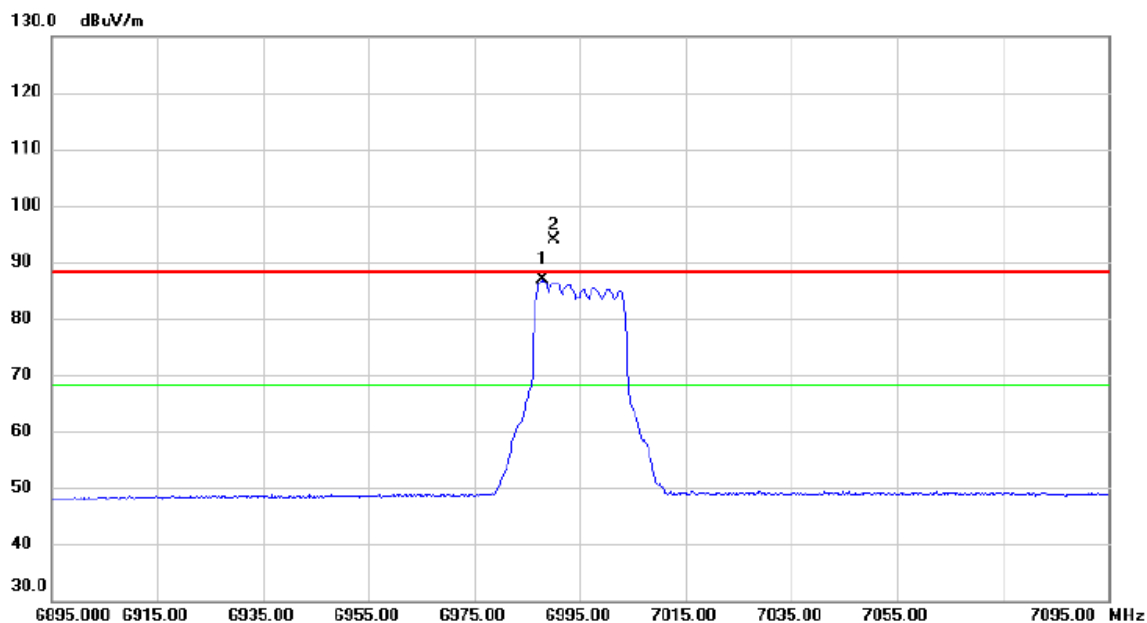


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6987.800     | 66.52                    | 20.24                   | 86.76                      | 68.20           | 18.56        | AVG      | No Limit |
| 2   | X   | 6990.200     | 73.64                    | 20.24                   | 93.88                      | 88.20           | 5.68         | peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-8_TX A Mode 6995 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

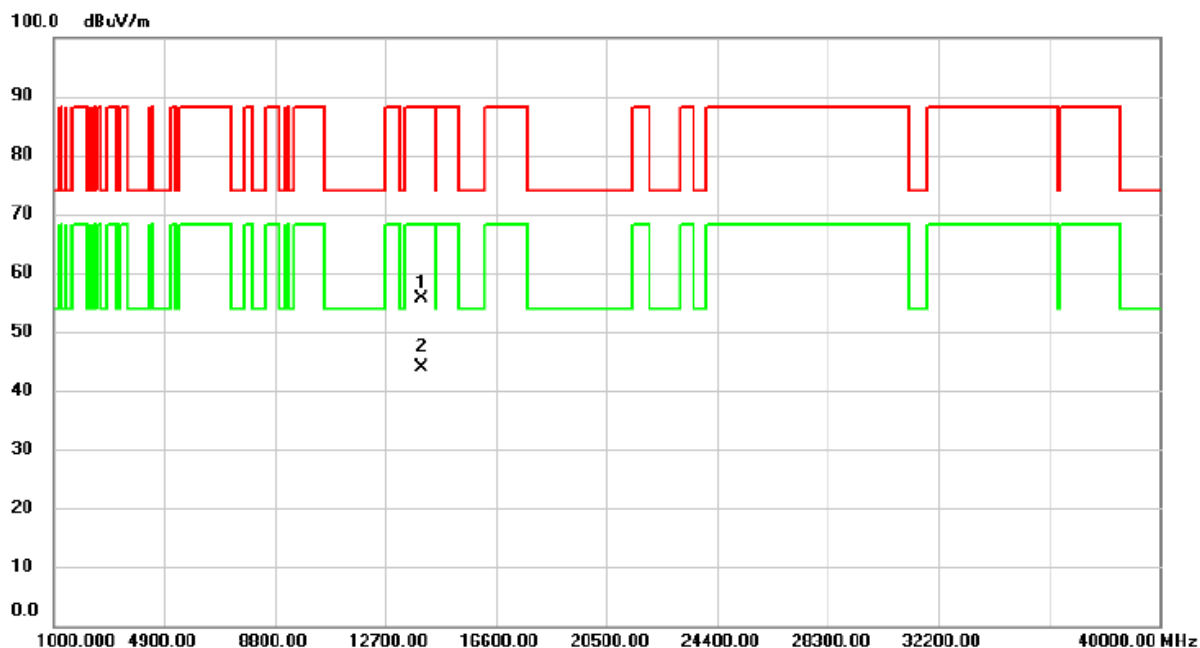


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13989.16     | 37.08                    | 18.55                   | 55.63                      | 88.20           | -32.57       | peak     |         |
| 2   | *   | 13989.59     | 25.28                    | 18.55                   | 43.83                      | 68.20           | -24.37       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |            |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-8_TX A Mode 6995 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

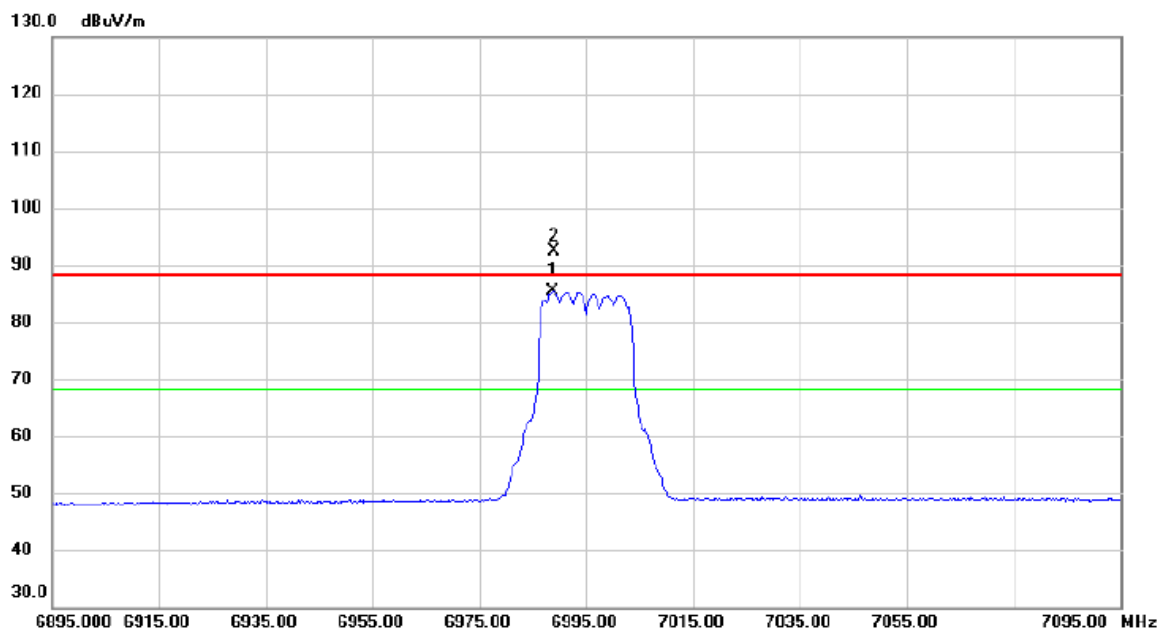


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6988.800     | 65.24                    | 20.24                   | 85.48                      | 68.20           | 17.28        | AVG      | No Limit |
| 2   | X   | 6989.000     | 72.10                    | 20.24                   | 92.34                      | 88.20           | 4.14         | peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |            |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-8_TX A Mode 6995 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

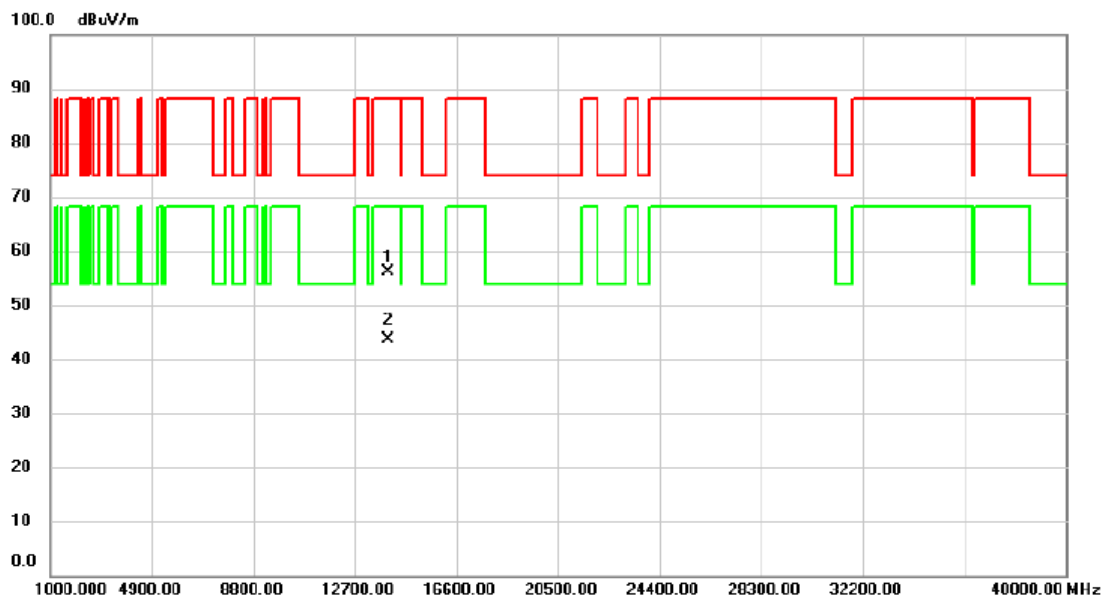


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13989.43     | 37.62                    | 18.55                   | 56.17                      | 88.20           | -32.03       | peak     |         |
| 2   | *   | 13990.45     | 25.17                    | 18.55                   | 43.72                      | 68.20           | -24.48       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-8_TX A Mode 7095 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

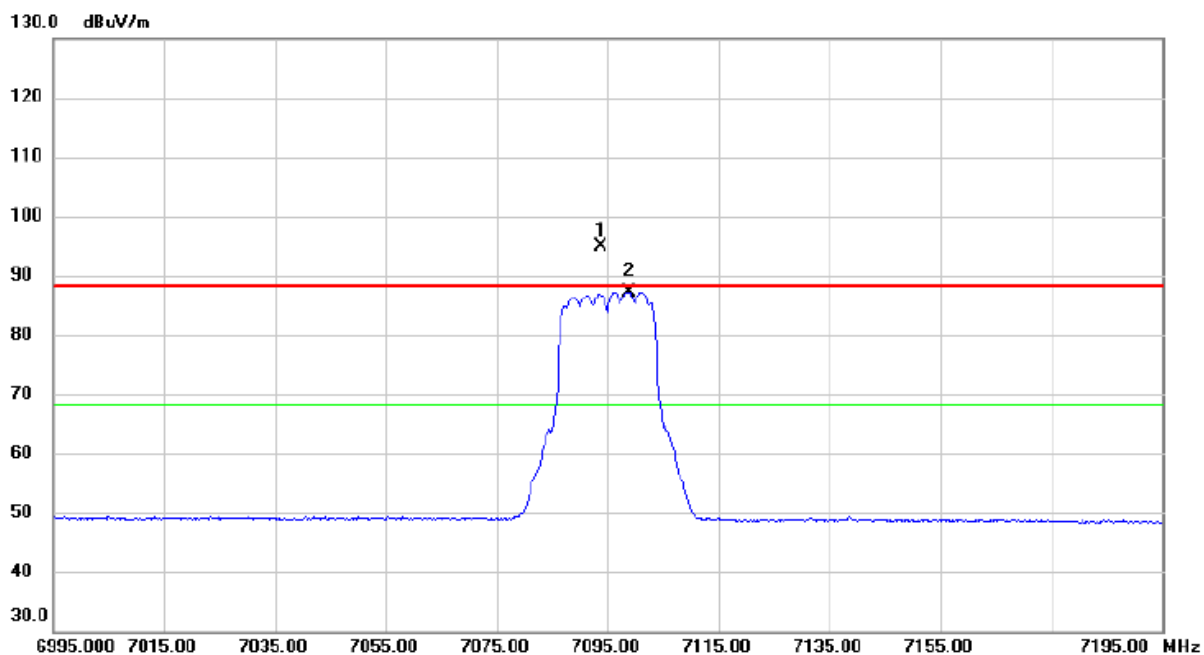


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 7093.800     | 74.48                    | 20.41                   | 94.89                      | 88.20           | 6.69         | peak     | No Limit |
| 2   | *   | 7098.800     | 66.79                    | 20.42                   | 87.21                      | 68.20           | 19.01        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-8_TX A Mode 7095 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

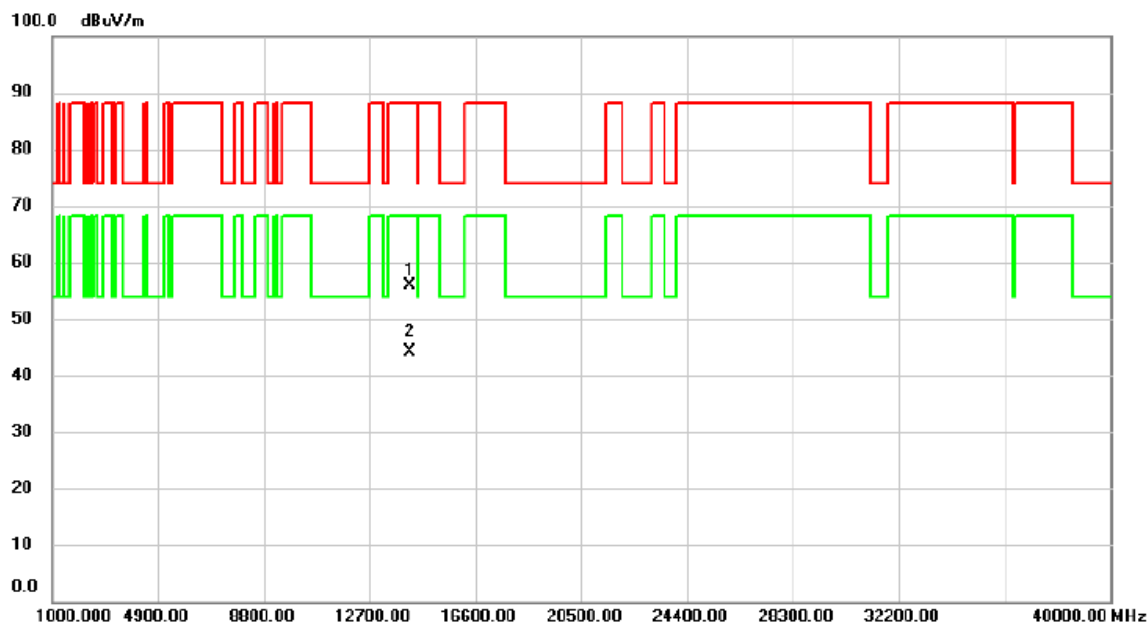


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 14189.17     | 36.99                    | 18.96                   | 55.95                      | 88.20           | -32.25       | peak     |         |
| 2   | *   | 14190.10     | 25.27                    | 18.97                   | 44.24                      | 68.20           | -23.96       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |            |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-8_TX A Mode 7095 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

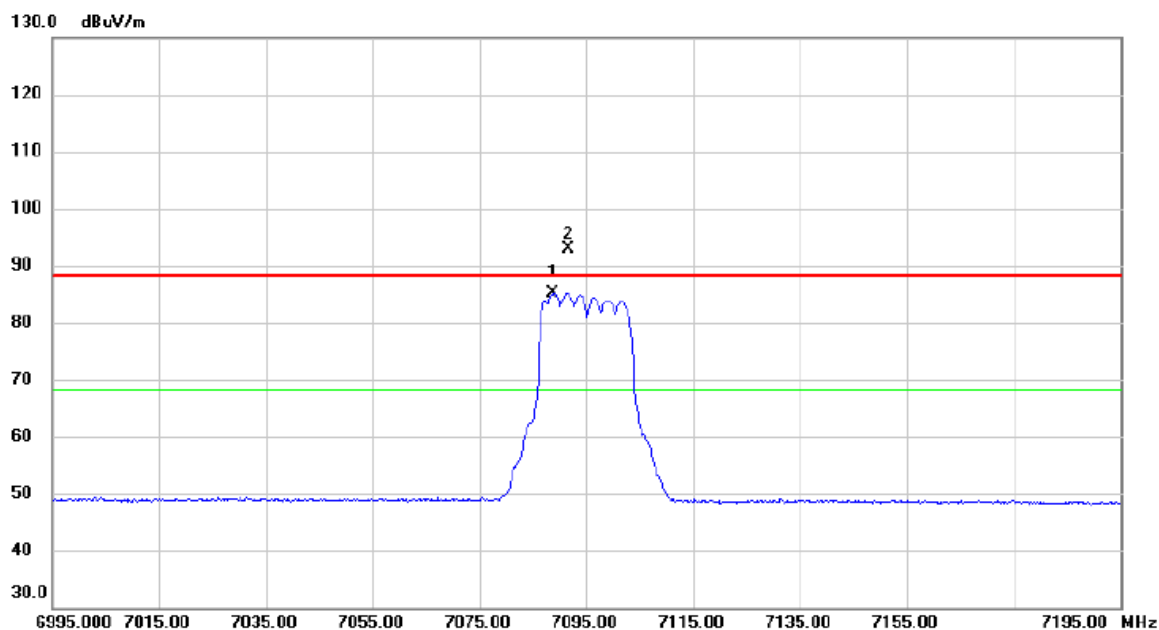


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 7088.800     | 64.78                    | 20.41                   | 85.19                      | 68.20           | 16.99        | AVG      | No Limit |
| 2   | X   | 7091.600     | 72.44                    | 20.41                   | 92.85                      | 88.20           | 4.65         | peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |            |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-8_TX A Mode 7095 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

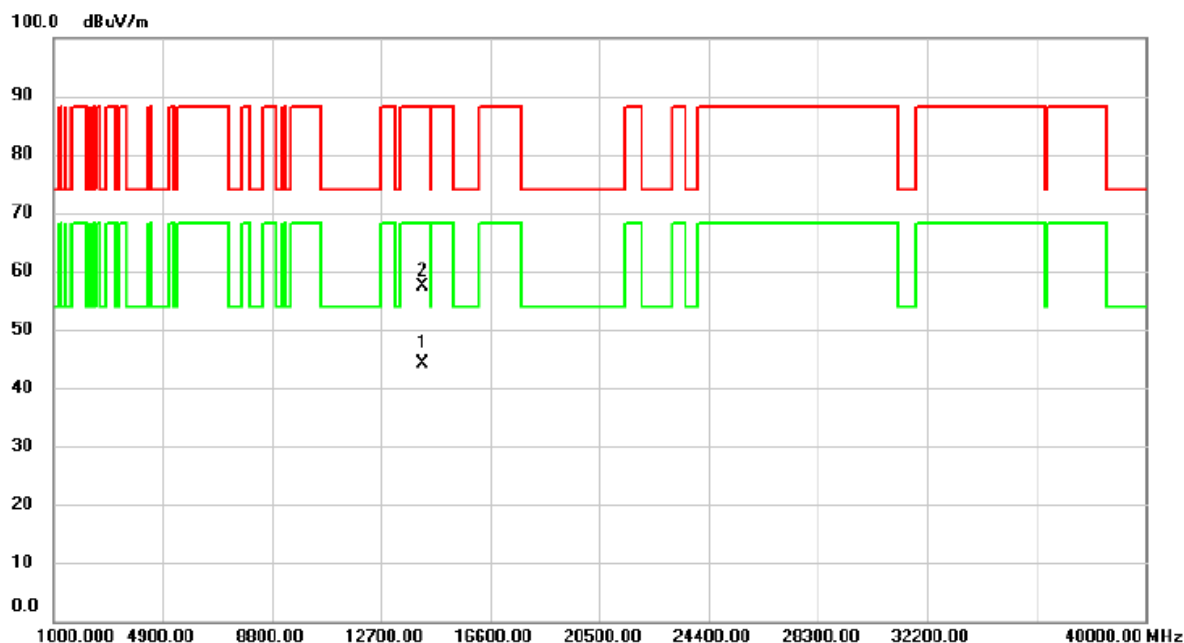


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 14189.20     | 25.20                    | 18.96                   | 44.16                      | 68.20           | -24.04       | AVG      |         |
| 2   |     | 14189.86     | 38.53                    | 18.97                   | 57.50                      | 88.20           | -30.70       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-8_TX A Mode 7115 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

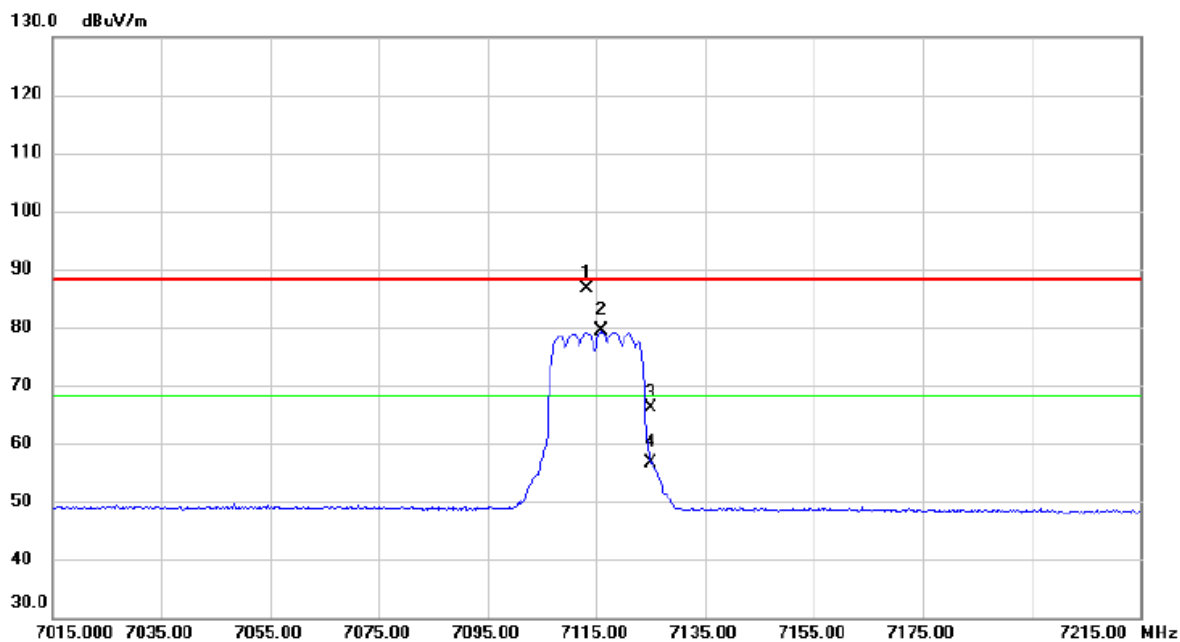


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 7113.200     | 66.24                    | 20.43                   | 86.67                      | 88.20           | -1.53        | peak     | No Limit |
| 2   | *   | 7116.000     | 58.83                    | 20.44                   | 79.27                      | 68.20           | 11.07        | AVG      | No Limit |
| 3   |     | 7125.000     | 45.74                    | 20.46                   | 66.20                      | 88.20           | -22.00       | peak     |          |
| 4   |     | 7125.000     | 36.27                    | 20.46                   | 56.73                      | 68.20           | -11.47       | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-8_TX A Mode 7115 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

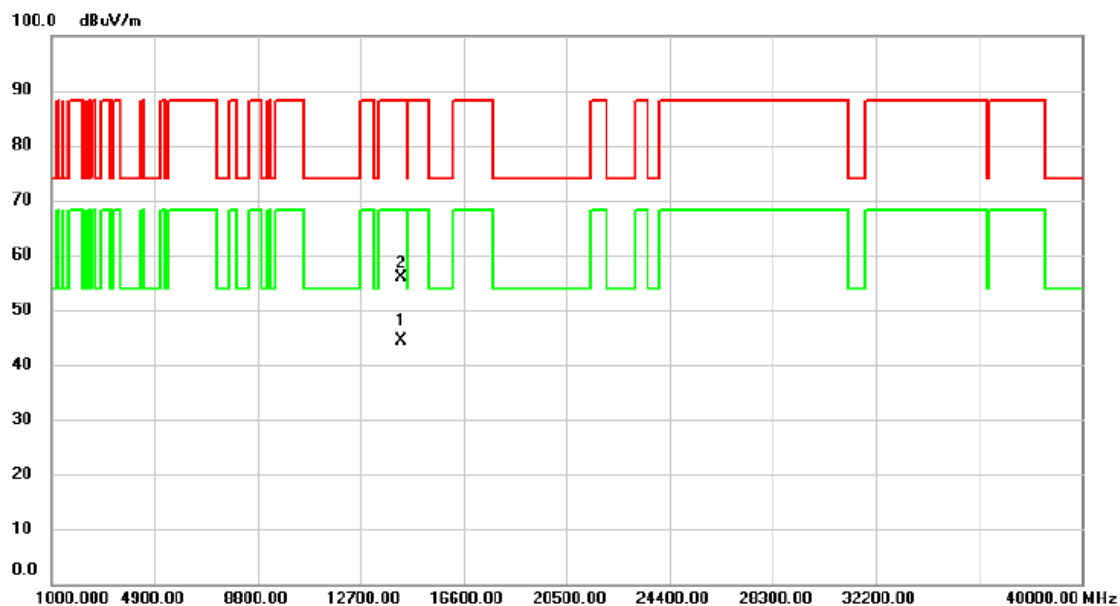


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 14229.31     | 25.41                    | 19.05                   | 44.46                      | 68.20           | -23.74       | AVG      |         |
| 2   |     | 14229.46     | 36.84                    | 19.05                   | 55.89                      | 88.20           | -32.31       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


|           |                           |              |            |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-8_TX A Mode 7115 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

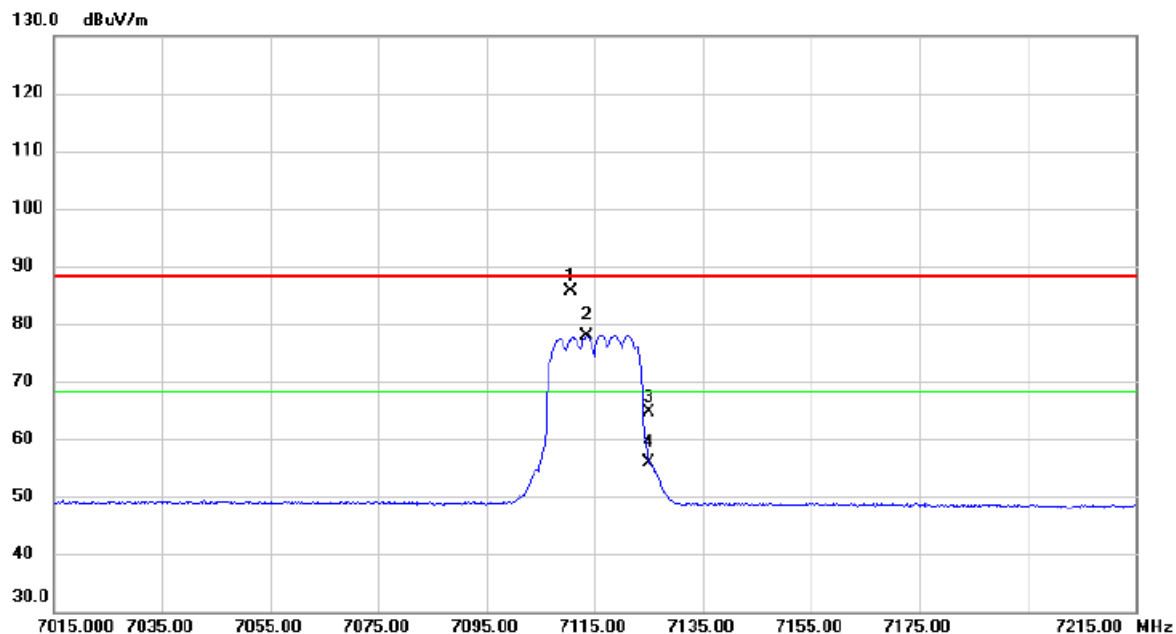

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |            |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-8_TX A Mode 7115 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

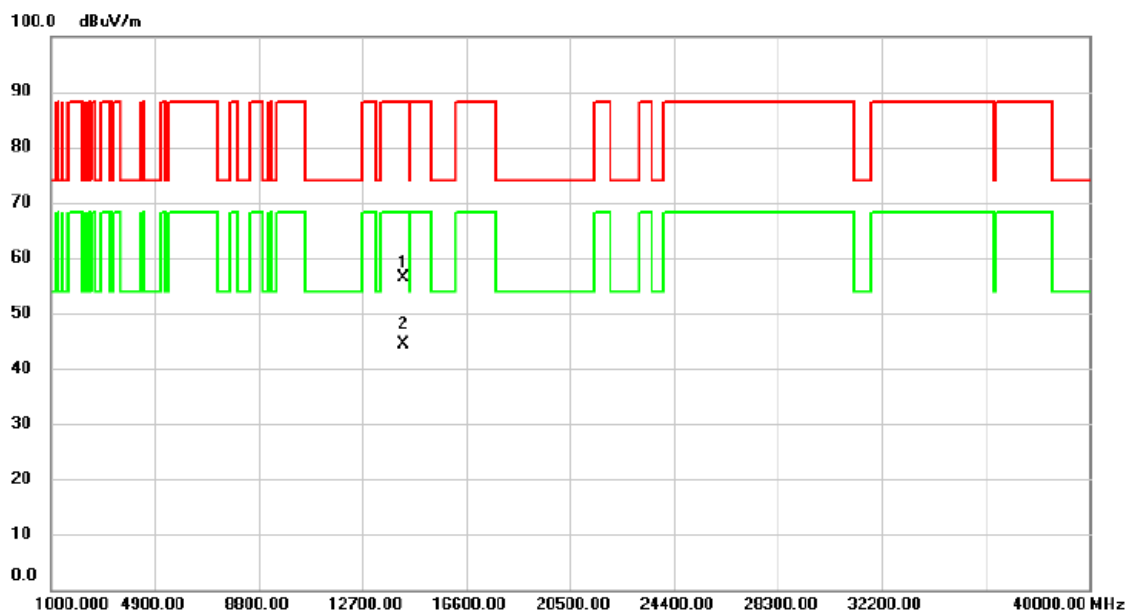


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 14229.34     | 37.33                    | 19.05                   | 56.38                      | 88.20           | -31.82       | peak     |         |
| 2   | *   | 14230.90     | 25.44                    | 19.05                   | 44.49                      | 68.20           | -23.71       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AC(VHT80) Mode 6945 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

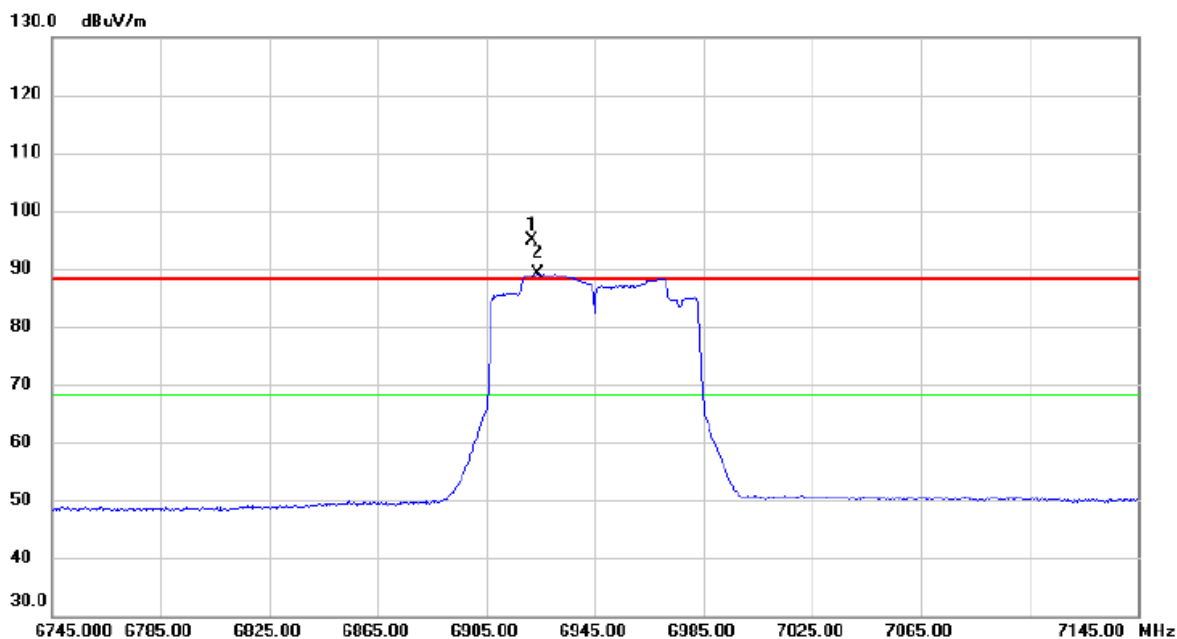


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6921.800     | 75.02                    | 19.92                   | 94.94                      | 88.20           | 6.74         | peak     | No Limit |
| 2   | *   | 6924.200     | 69.19                    | 19.93                   | 89.12                      | 68.20           | 20.92        | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AC(VHT80) Mode 6945 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

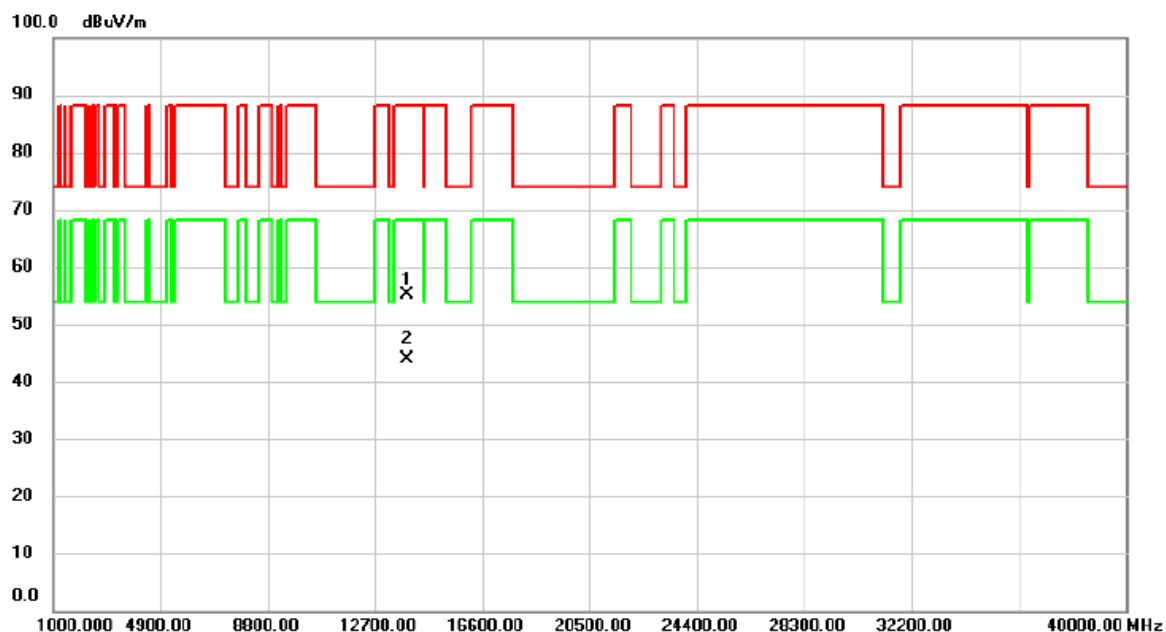


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13889.40     | 36.84                    | 18.33                   | 55.17                      | 88.20           | -33.03       | peak     |         |
| 2   | *   | 13889.65     | 25.66                    | 18.33                   | 43.99                      | 68.20           | -24.21       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AC(VHT80) Mode 6945 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

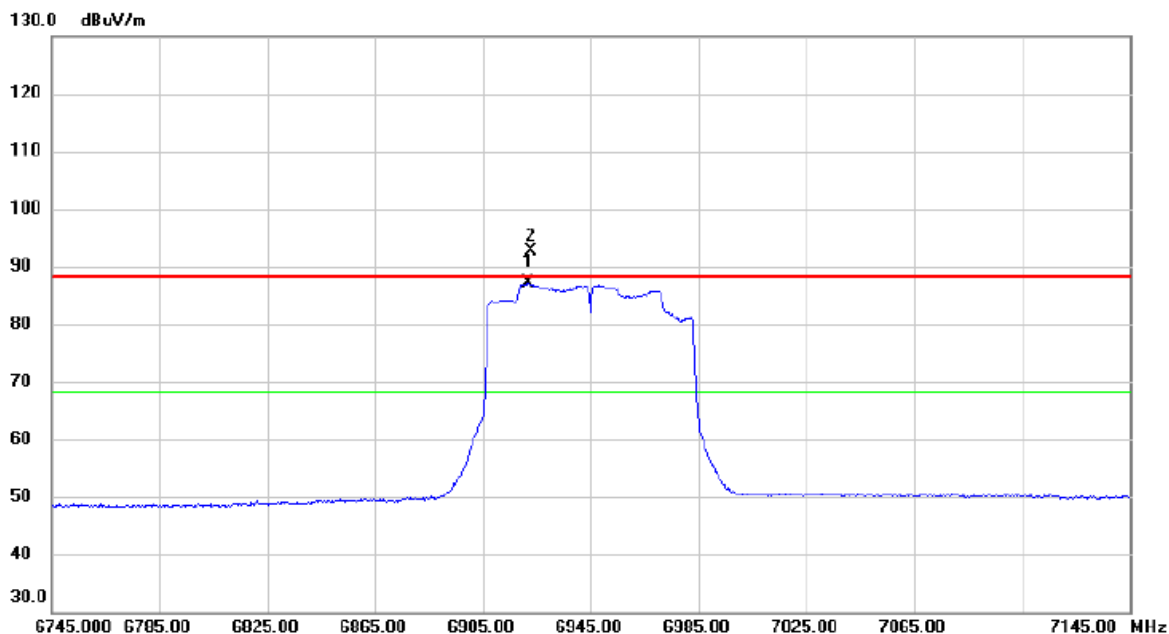


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6921.800     | 67.20                    | 19.92                   | 87.12                      | 68.20           | 18.92        | AVG      | No Limit |
| 2   | X   | 6922.600     | 72.77                    | 19.92                   | 92.69                      | 88.20           | 4.49         | peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AC(VHT80) Mode 6945 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

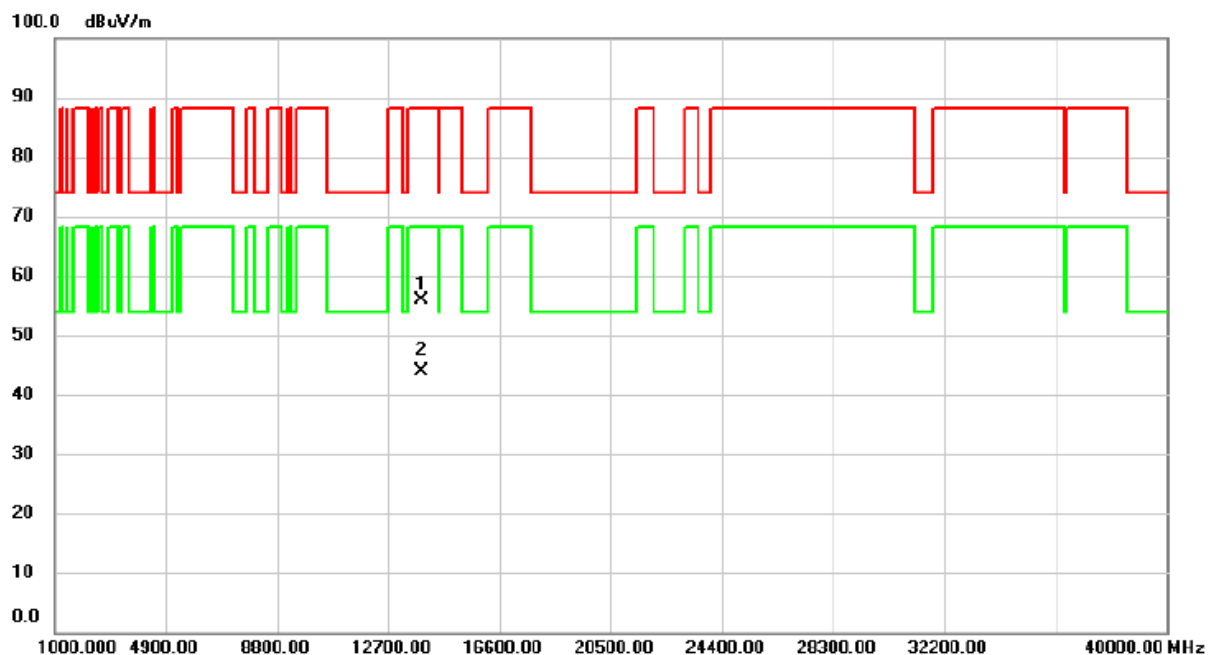


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13890.09     | 37.49                    | 18.33                   | 55.82                      | 88.20           | -32.38       | peak     |         |
| 2   | *   | 13890.49     | 25.61                    | 18.33                   | 43.94                      | 68.20           | -24.26       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AC(VHT80) Mode 7025 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

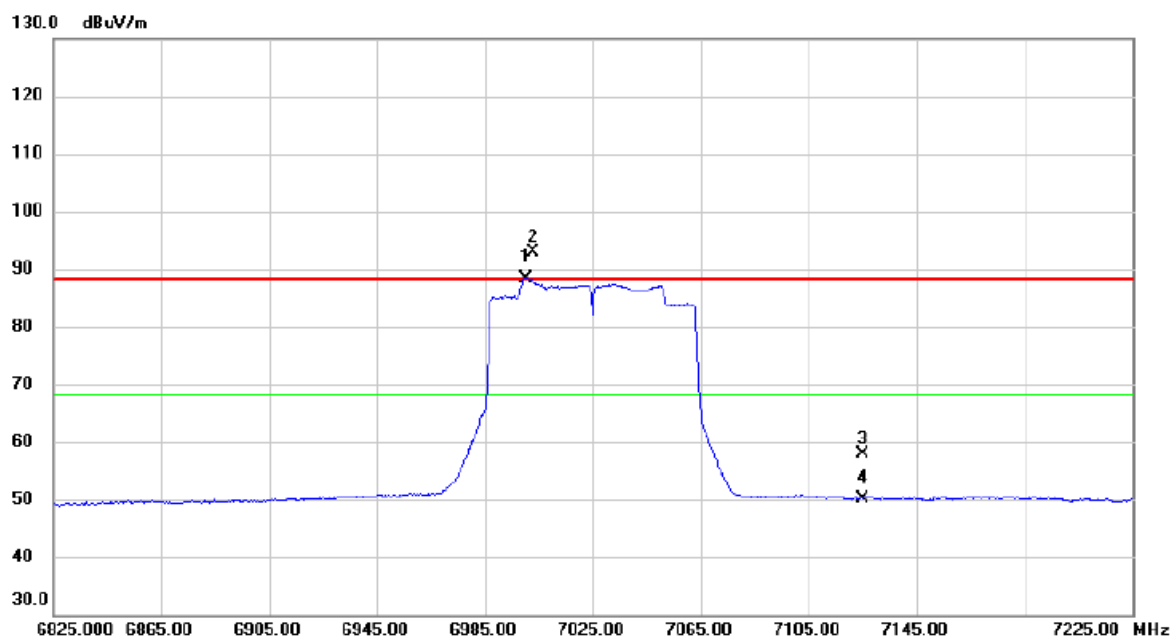


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 7000.200     | 68.13                    | 20.29                   | 88.42                      | 68.20           | 20.22        | AVG      | No Limit |
| 2   | X   | 7003.000     | 72.50                    | 20.29                   | 92.79                      | 88.20           | 4.59         | peak     | No Limit |
| 3   |     | 7125.000     | 37.32                    | 20.46                   | 57.78                      | 88.20           | -30.42       | peak     |          |
| 4   |     | 7125.000     | 29.74                    | 20.46                   | 50.20                      | 68.20           | -18.00       | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AC(VHT80) Mode 7025 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

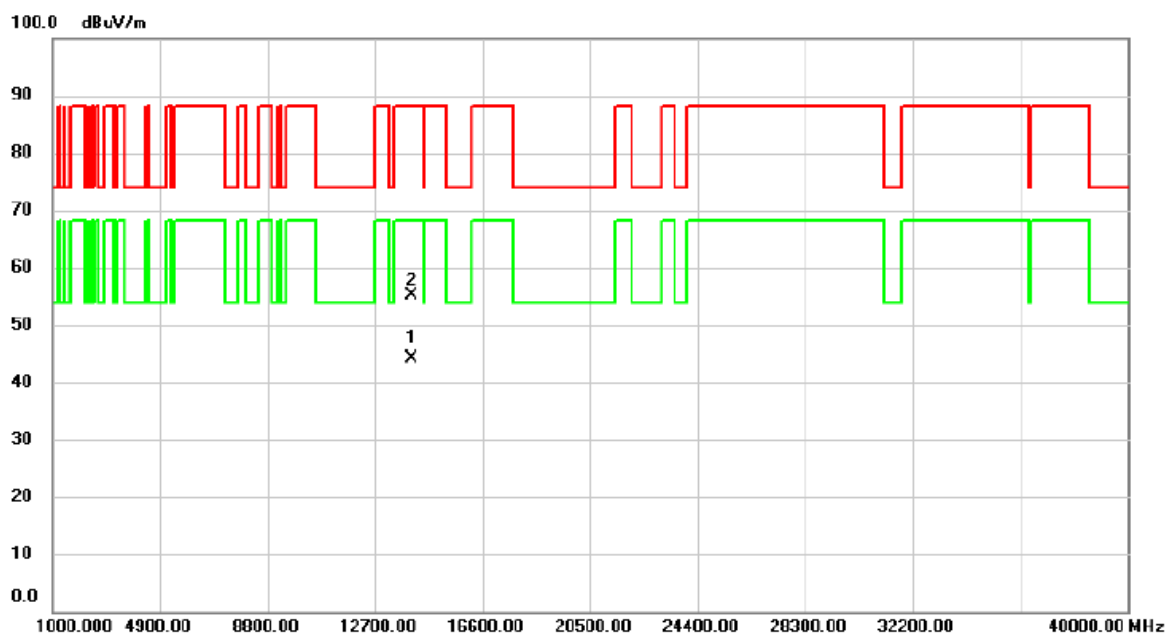


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 14050.12     | 25.37                    | 18.67                   | 44.04                      | 68.20           | -24.16       | AVG      |         |
| 2   |     | 14050.73     | 36.58                    | 18.67                   | 55.25                      | 88.20           | -32.95       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AC(VHT80) Mode 7025 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

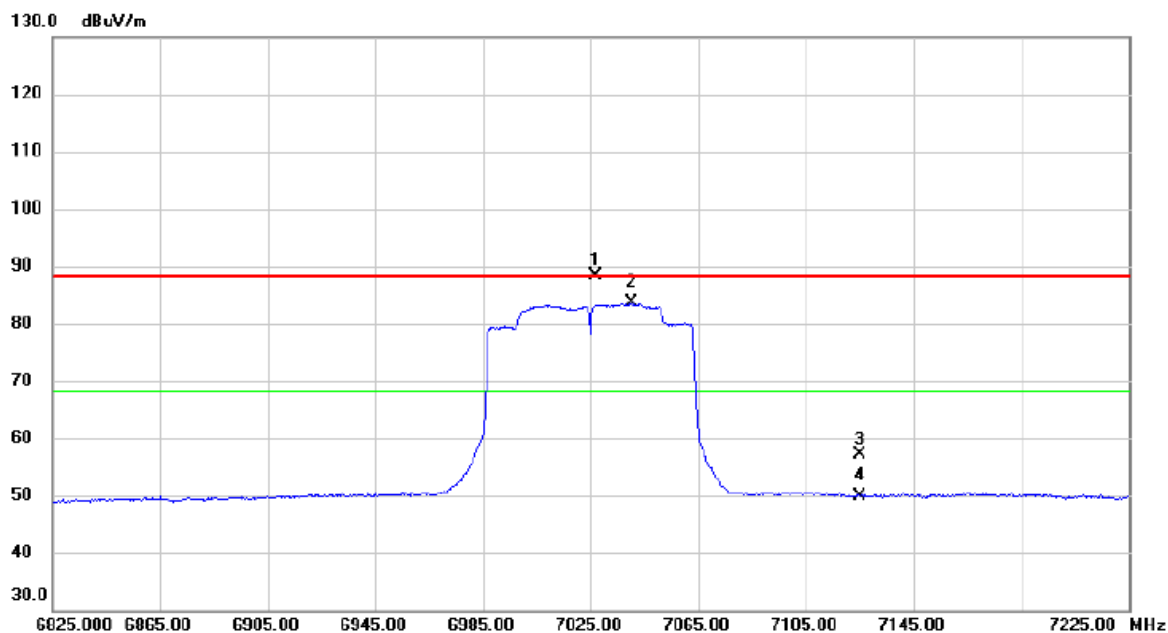


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 7026.600     | 68.02                    | 20.33                   | 88.35                      | 88.20           | 0.15         | peak     | No Limit |
| 2   | *   | 7040.200     | 63.21                    | 20.34                   | 83.55                      | 68.20           | 15.35        | AVG      | No Limit |
| 3   |     | 7125.000     | 36.60                    | 20.46                   | 57.06                      | 88.20           | -31.14       | peak     |          |
| 4   |     | 7125.000     | 29.48                    | 20.46                   | 49.94                      | 68.20           | -18.26       | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AC(VHT80) Mode 7025 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

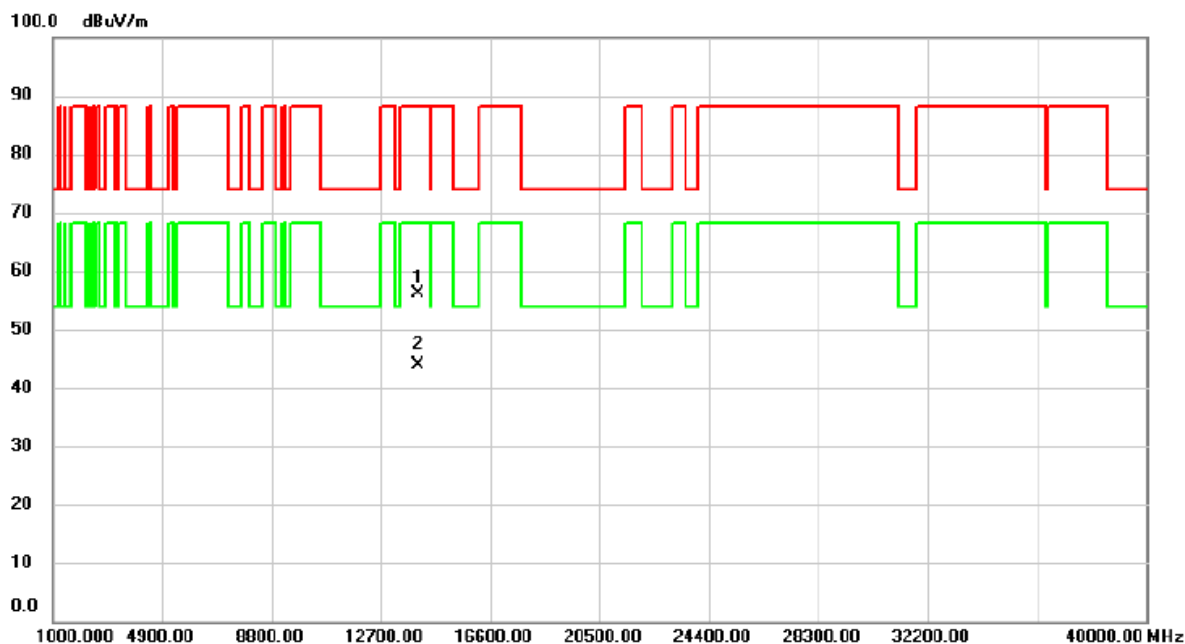


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 14050.03     | 37.34                    | 18.67                   | 56.01                      | 88.20           | -32.19       | peak     |         |
| 2   | *   | 14050.69     | 25.28                    | 18.67                   | 43.95                      | 68.20           | -24.25       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AC(VHT160) Mode 6985 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

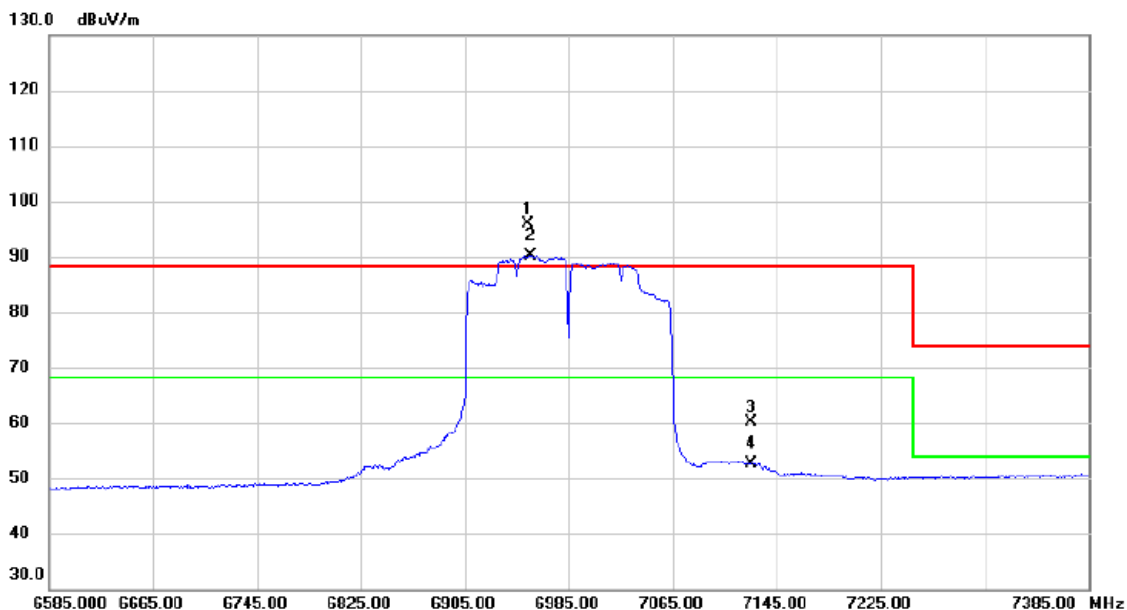


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6953.800     | 75.90                    | 20.07                   | 95.97                      | 88.20           | 7.77         | peak     | No Limit |
| 2   | *   | 6956.200     | 70.09                    | 20.08                   | 90.17                      | 68.20           | 21.97        | AVG      | No Limit |
| 3   |     | 7125.000     | 39.75                    | 20.46                   | 60.21                      | 88.20           | -27.99       | peak     |          |
| 4   |     | 7125.000     | 32.24                    | 20.46                   | 52.70                      | 68.20           | -15.50       | AVG      |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AC(VHT160) Mode 6985 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

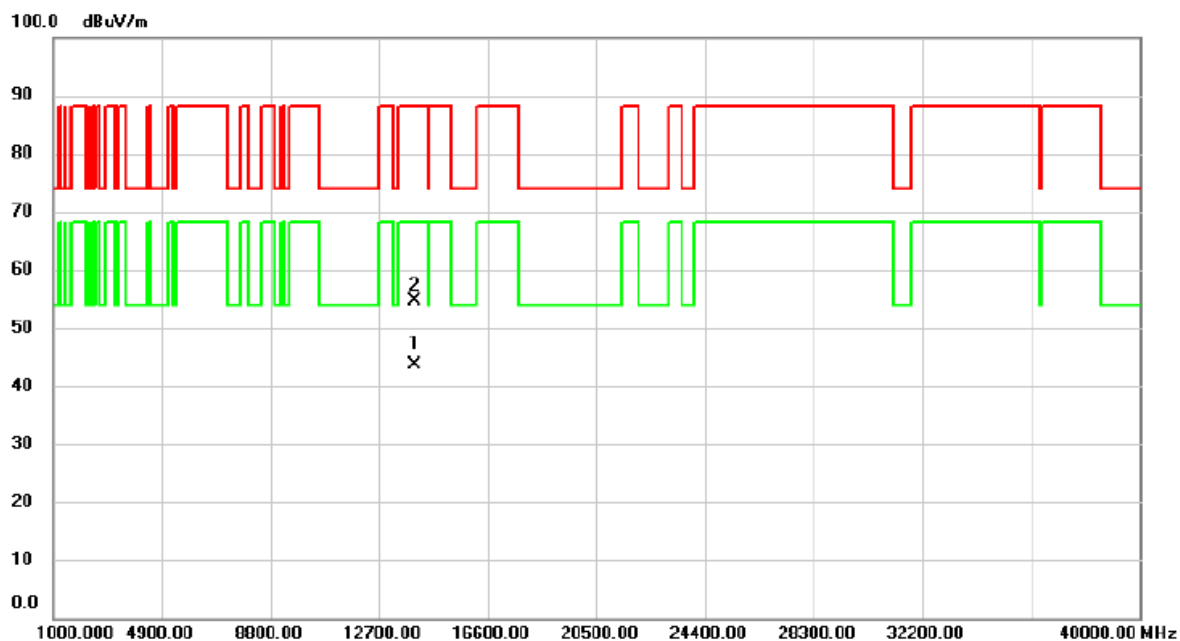


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 13969.89     | 25.18                    | 18.51                   | 43.69                      | 68.20           | -24.51       | AVG      |         |
| 2   |     | 13969.98     | 36.07                    | 18.51                   | 54.58                      | 88.20           | -33.62       | peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AC(VHT160) Mode 6985 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

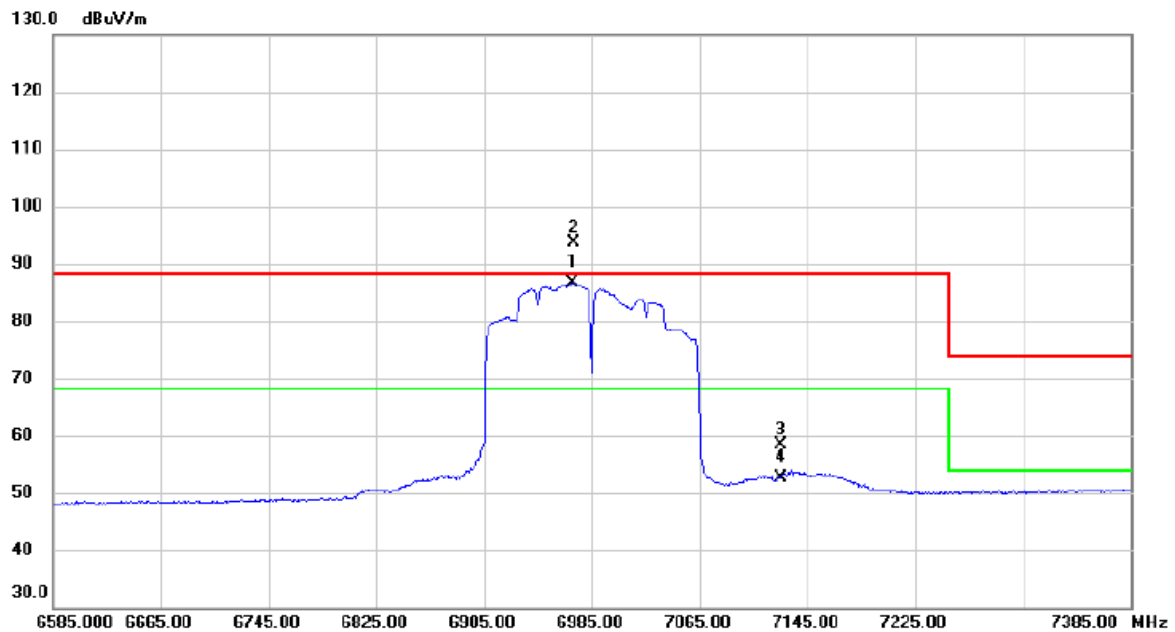


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6970.600     | 66.51                    | 20.15                   | 86.66                      | 68.20           | 18.46        | AVG      | No Limit |
| 2   | X   | 6972.200     | 73.52                    | 20.16                   | 93.68                      | 88.20           | 5.48         | peak     | No Limit |
| 3   |     | 7125.000     | 38.02                    | 20.46                   | 58.48                      | 88.20           | -29.72       | peak     |          |
| 4   |     | 7125.000     | 32.23                    | 20.46                   | 52.69                      | 68.20           | -15.51       | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AC(VHT160) Mode 6985 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

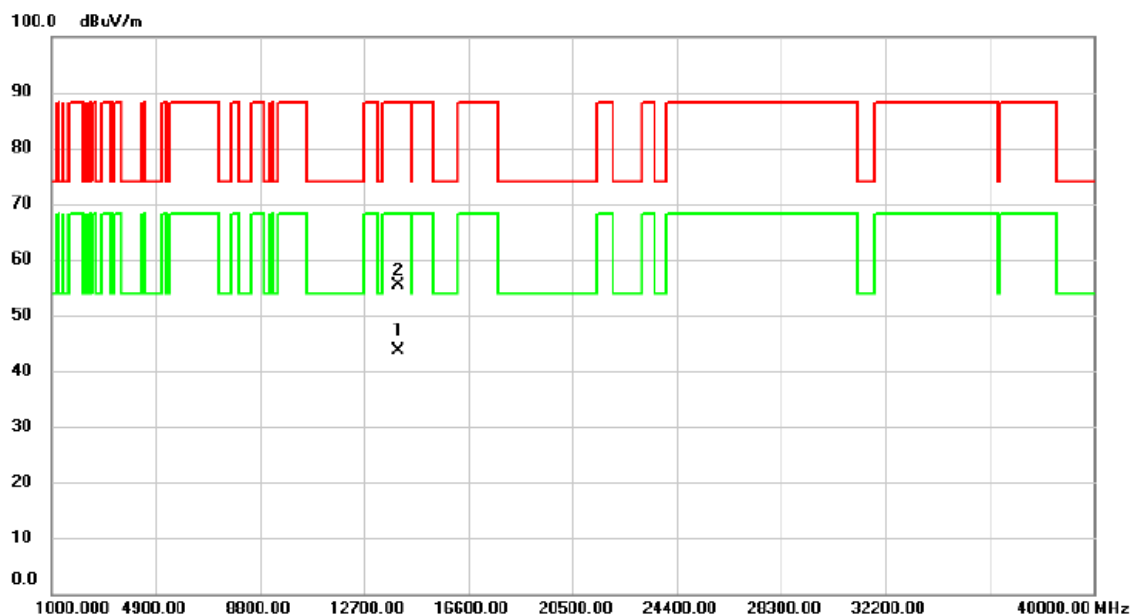


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 13969.64     | 25.19                    | 18.51                   | 43.70                      | 68.20           | -24.50       | AVG      |         |
| 2   |     | 13970.34     | 36.80                    | 18.51                   | 55.31                      | 88.20           | -32.89       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AX(HE20) Mode 6995 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

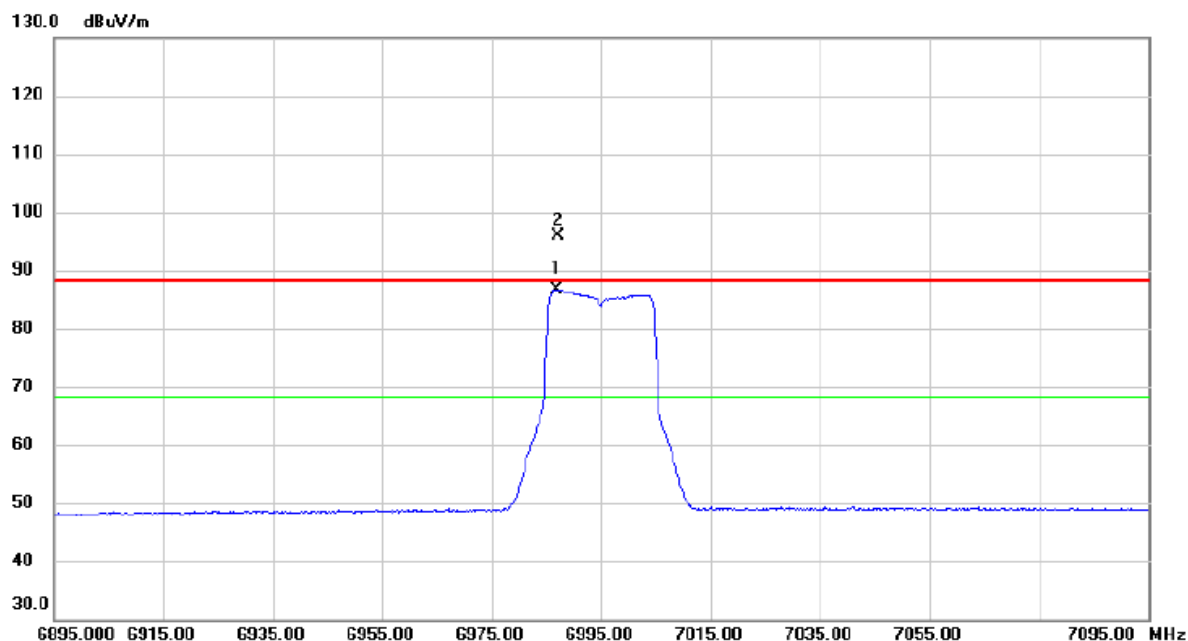


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6986.800     | 66.50                    | 20.23                   | 86.73                      | 68.20           | 18.53        | AVG      | No Limit |
| 2   | X   | 6987.000     | 75.67                    | 20.23                   | 95.90                      | 88.20           | 7.70         | peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AX(HE20) Mode 6995 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

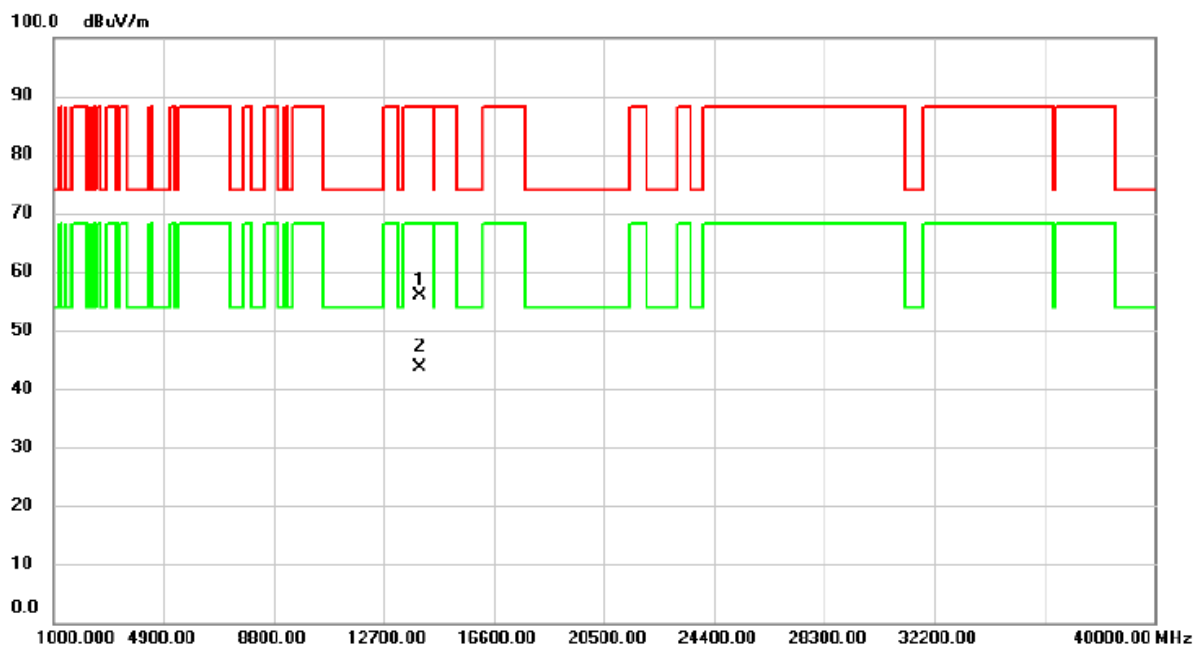


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13989.30     | 37.27                    | 18.55                   | 55.82                      | 88.20           | -32.38       | peak     |         |
| 2   | *   | 13989.64     | 25.07                    | 18.55                   | 43.62                      | 68.20           | -24.58       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AX(HE20) Mode 6995 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

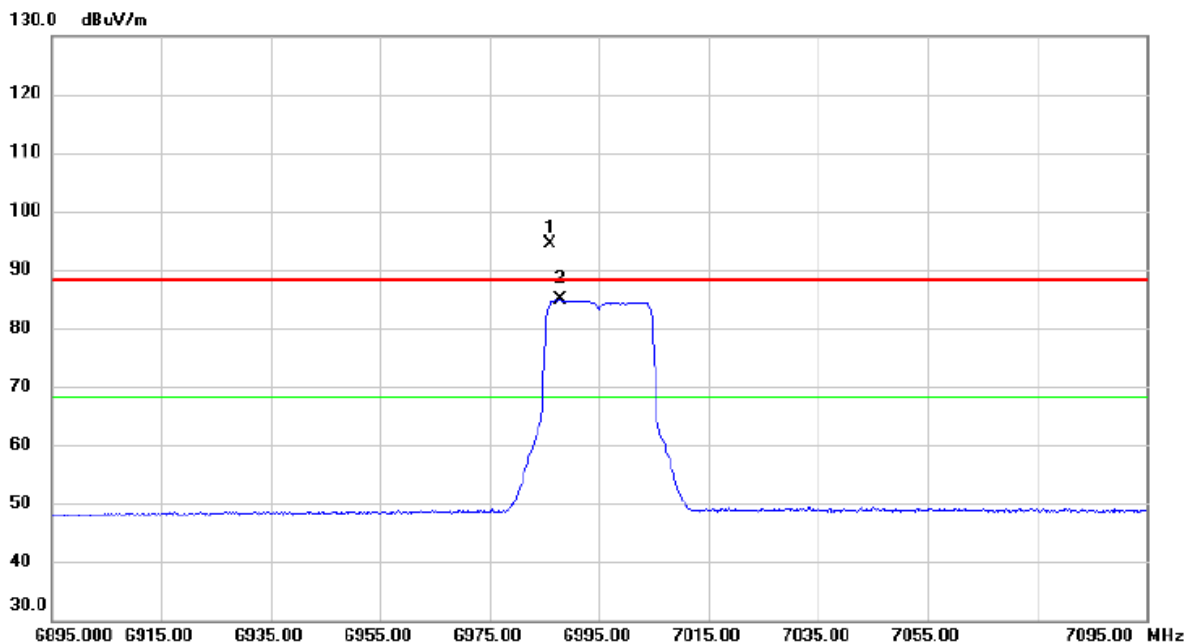


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6986.000     | 74.09                    | 20.22                   | 94.31                      | 88.20           | 6.11         | peak     | No Limit |
| 2   | *   | 6987.800     | 64.63                    | 20.24                   | 84.87                      | 68.20           | 16.67        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AX(HE20) Mode 6995 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

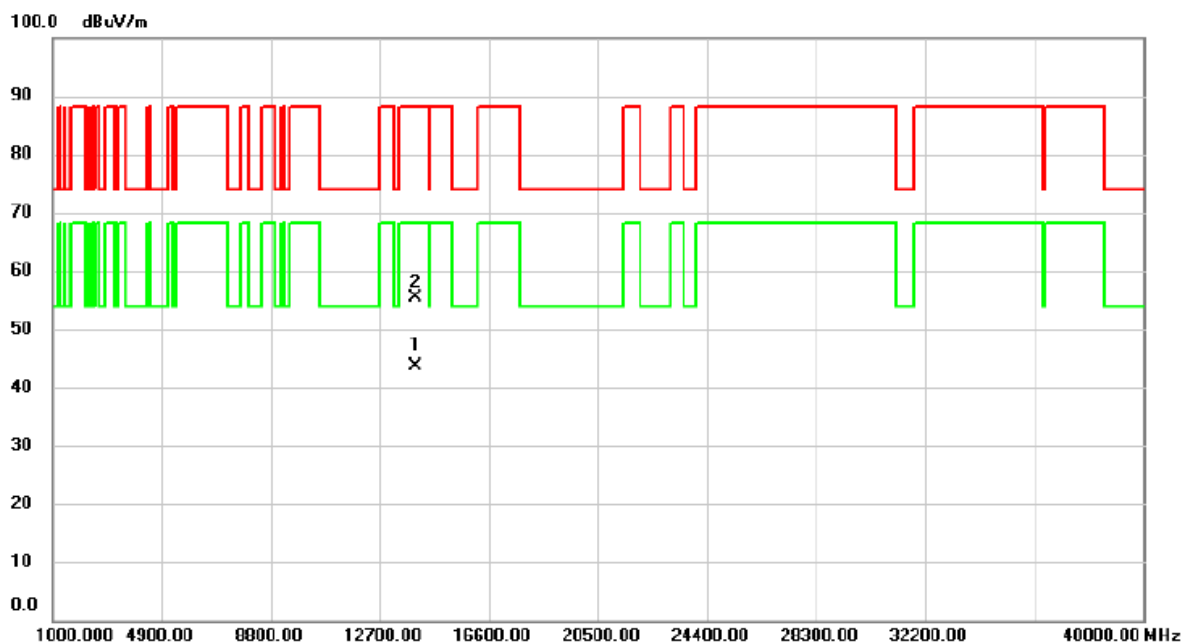


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 13990.02     | 25.11                    | 18.55                   | 43.66                      | 68.20           | -24.54       | AVG      |         |
| 2   |     | 13990.24     | 36.83                    | 18.55                   | 55.38                      | 88.20           | -32.82       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AX(HE20) Mode 7095 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

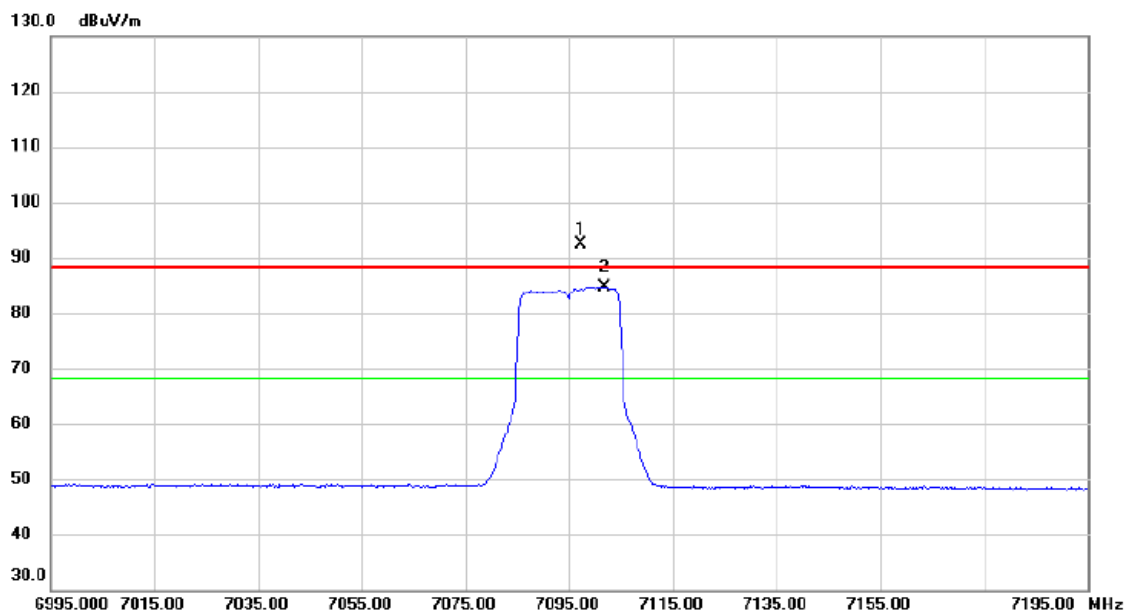


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 7097.200     | 72.07                    | 20.42                   | 92.49                      | 88.20           | 4.29         | peak     | No Limit |
| 2   | *   | 7101.800     | 64.27                    | 20.42                   | 84.69                      | 68.20           | 16.49        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AX(HE20) Mode 7095 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

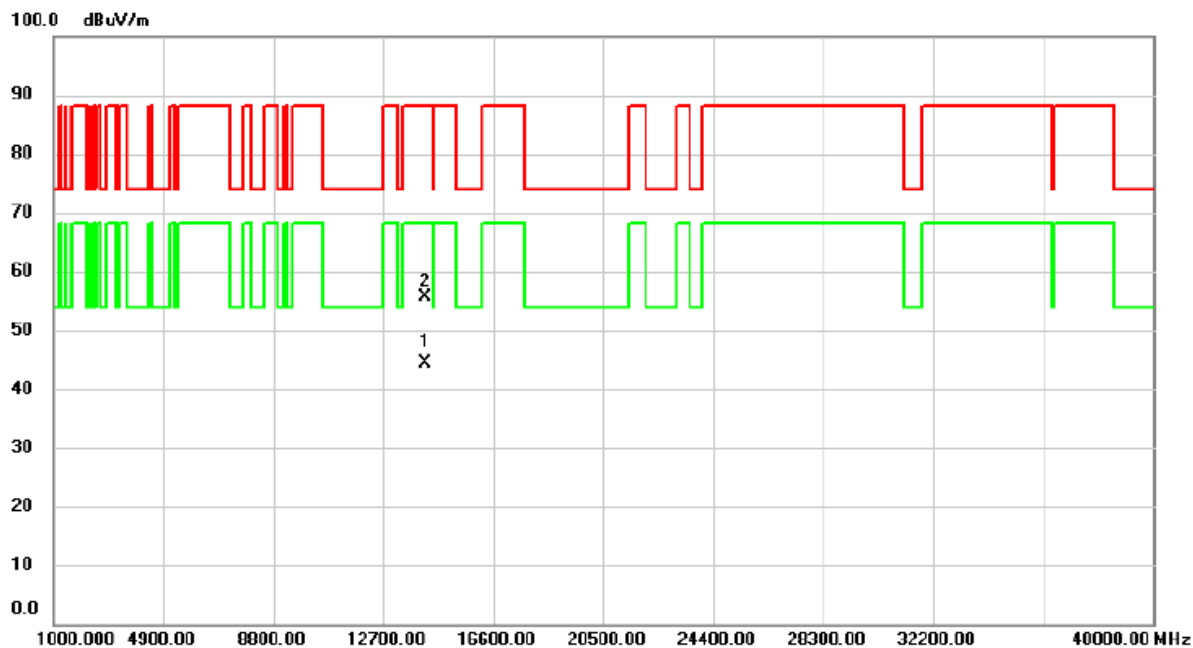


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 14189.07     | 25.30                    | 18.96                   | 44.26                      | 68.20           | -23.94       | AVG      |         |
| 2   |     | 14189.24     | 36.69                    | 18.96                   | 55.65                      | 88.20           | -32.55       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AX(HE20) Mode 7095 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

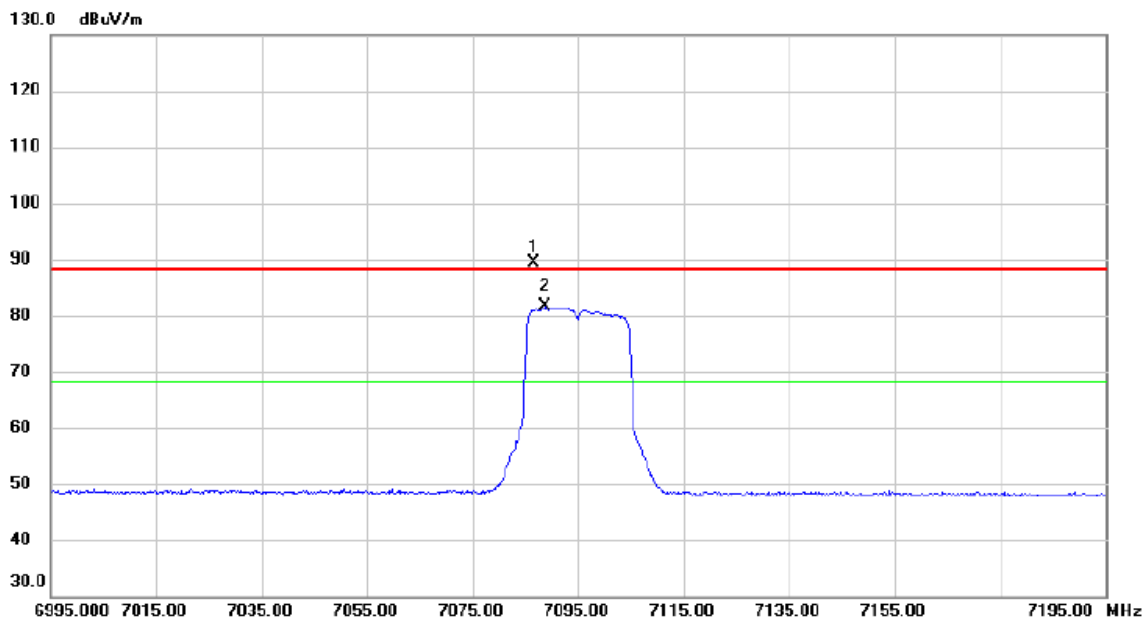


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 7086.600     | 69.03                    | 20.41                   | 89.44                      | 88.20           | 1.24         | peak     | No Limit |
| 2   | *   | 7088.600     | 61.15                    | 20.41                   | 81.56                      | 68.20           | 13.36        | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AX(HE20) Mode 7095 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

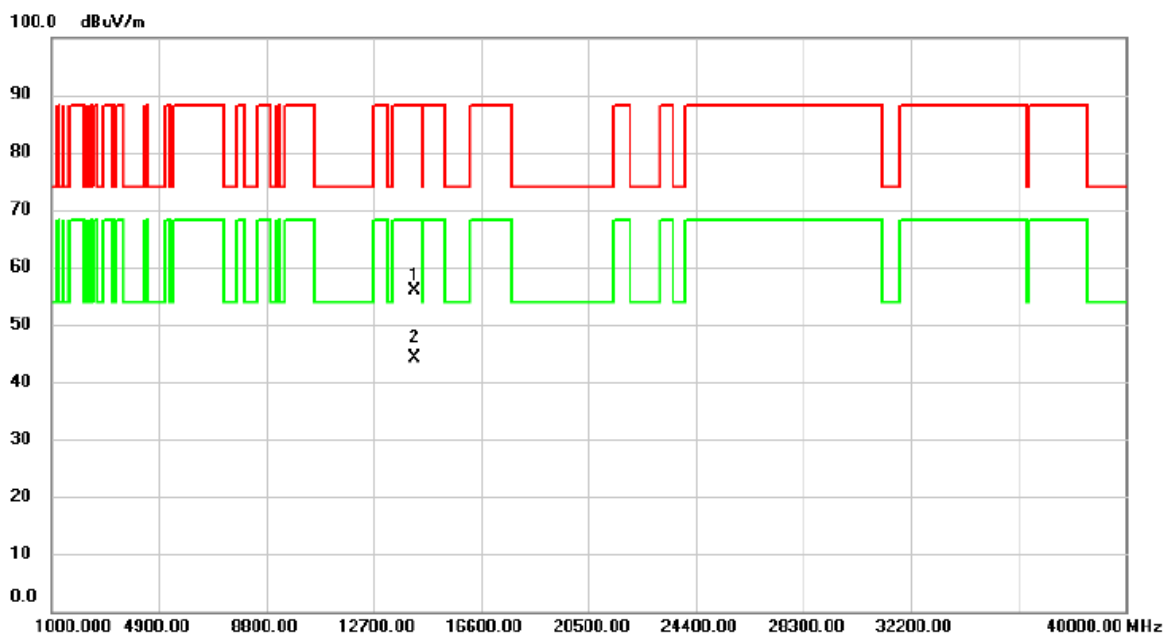


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 14189.06     | 36.81                    | 18.96                   | 55.77                      | 88.20           | -32.43       | peak     |         |
| 2   | *   | 14190.93     | 25.26                    | 18.97                   | 44.23                      | 68.20           | -23.97       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AX(HE20) Mode 7115 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

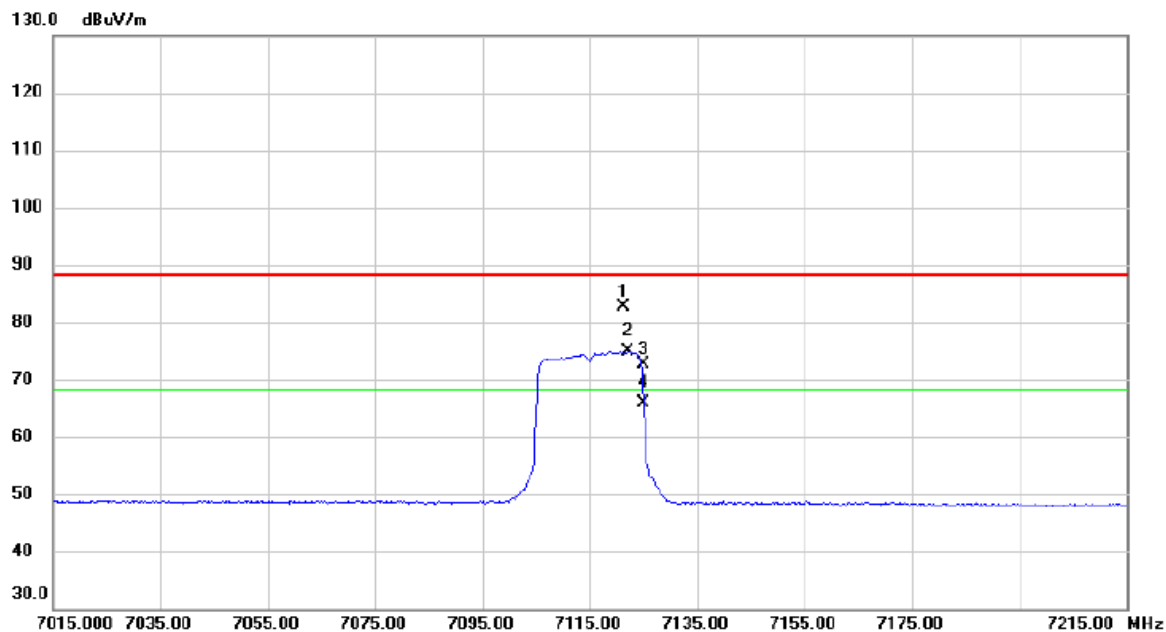


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 7121.400     | 62.11                    | 20.44                   | 82.55                      | 88.20           | -5.65        | peak     | No Limit |
| 2   | *   | 7122.200     | 54.44                    | 20.44                   | 74.88                      | 68.20           | 6.68         | AVG      | No Limit |
| 3   |     | 7125.000     | 52.15                    | 20.46                   | 72.61                      | 88.20           | -15.59       | peak     |          |
| 4   |     | 7125.000     | 45.33                    | 20.46                   | 65.79                      | 68.20           | -2.41        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AX(HE20) Mode 7115 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

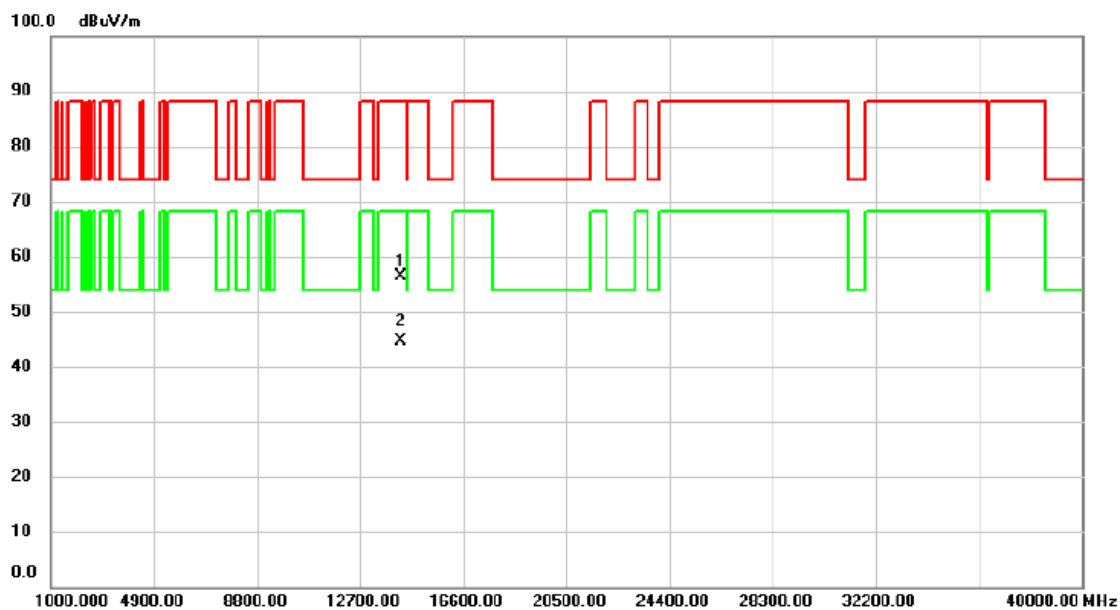


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 14229.15     | 37.40                    | 19.05                   | 56.45                      | 88.20           | -31.75       | peak     |         |
| 2   | *   | 14230.86     | 25.46                    | 19.05                   | 44.51                      | 68.20           | -23.69       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AX(HE20) Mode 7115 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

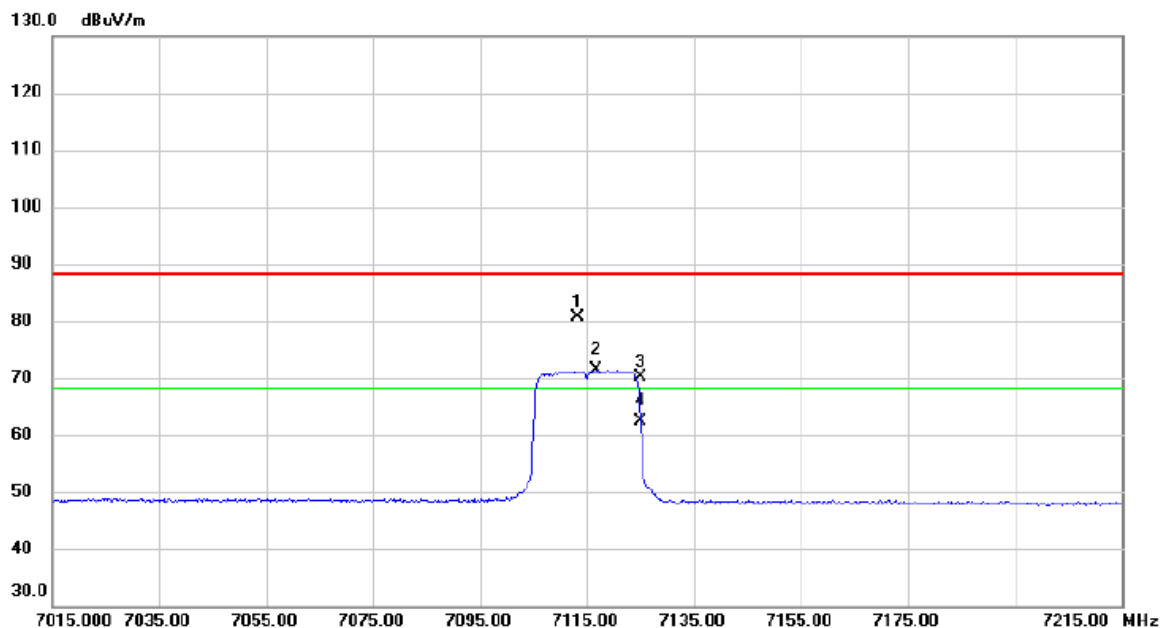


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 7113.400     | 60.15                    | 20.43                   | 80.58                      | 88.20           | -7.62        | peak     | No Limit |
| 2   | *   | 7116.800     | 51.00                    | 20.44                   | 71.44                      | 68.20           | 3.24         | AVG      | No Limit |
| 3   |     | 7125.000     | 49.63                    | 20.46                   | 70.09                      | 88.20           | -18.11       | peak     |          |
| 4   |     | 7125.000     | 41.84                    | 20.46                   | 62.30                      | 68.20           | -5.90        | AVG      |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AX(HE20) Mode 7115 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

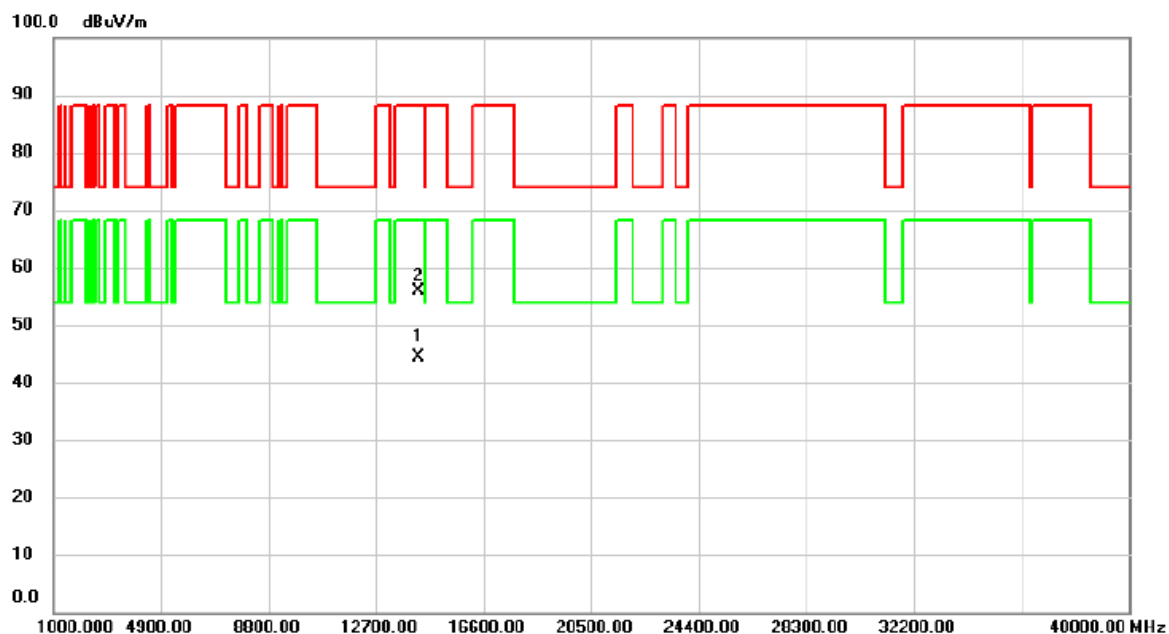


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 14229.22     | 25.39                    | 19.05                   | 44.44                      | 68.20           | -23.76       | AVG      |         |
| 2   |     | 14230.43     | 36.87                    | 19.05                   | 55.92                      | 88.20           | -32.28       | peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AX(HE40) Mode 6885 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

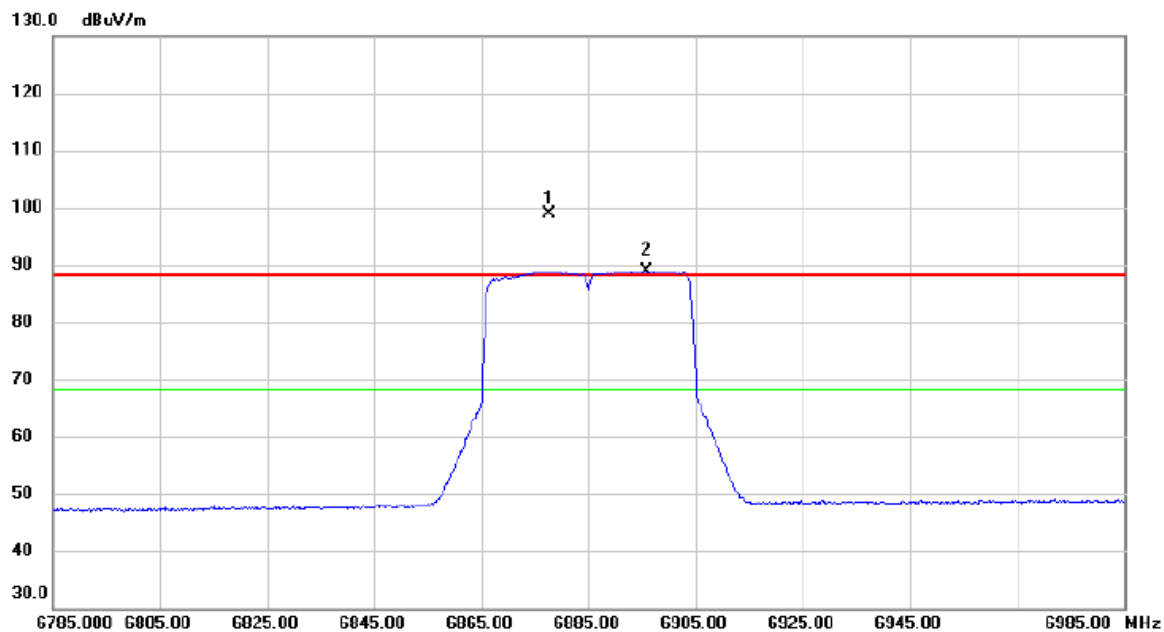


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6877.600     | 79.15                    | 19.71                   | 98.86                      | 88.20           | 10.66        | peak     | No Limit |
| 2   | *   | 6895.800     | 69.14                    | 19.79                   | 88.93                      | 68.20           | 20.73        | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AX(HE40) Mode 6885 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

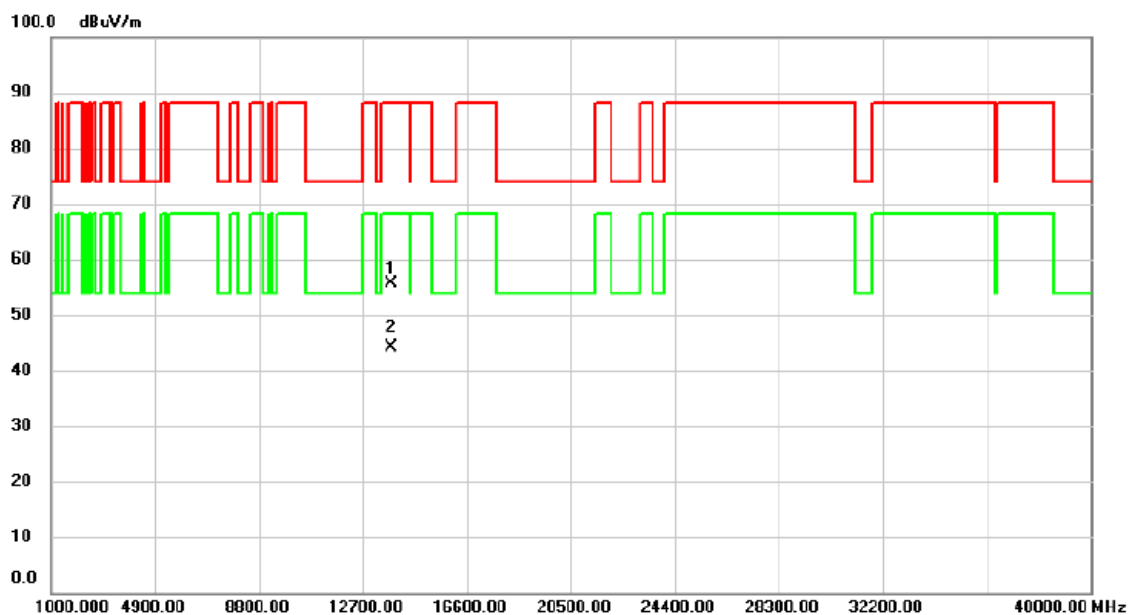


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13769.06     | 37.54                    | 18.08                   | 55.62                      | 88.20           | -32.58       | peak     |         |
| 2   | *   | 13770.66     | 25.94                    | 18.08                   | 44.02                      | 68.20           | -24.18       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AX(HE40) Mode 6885 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

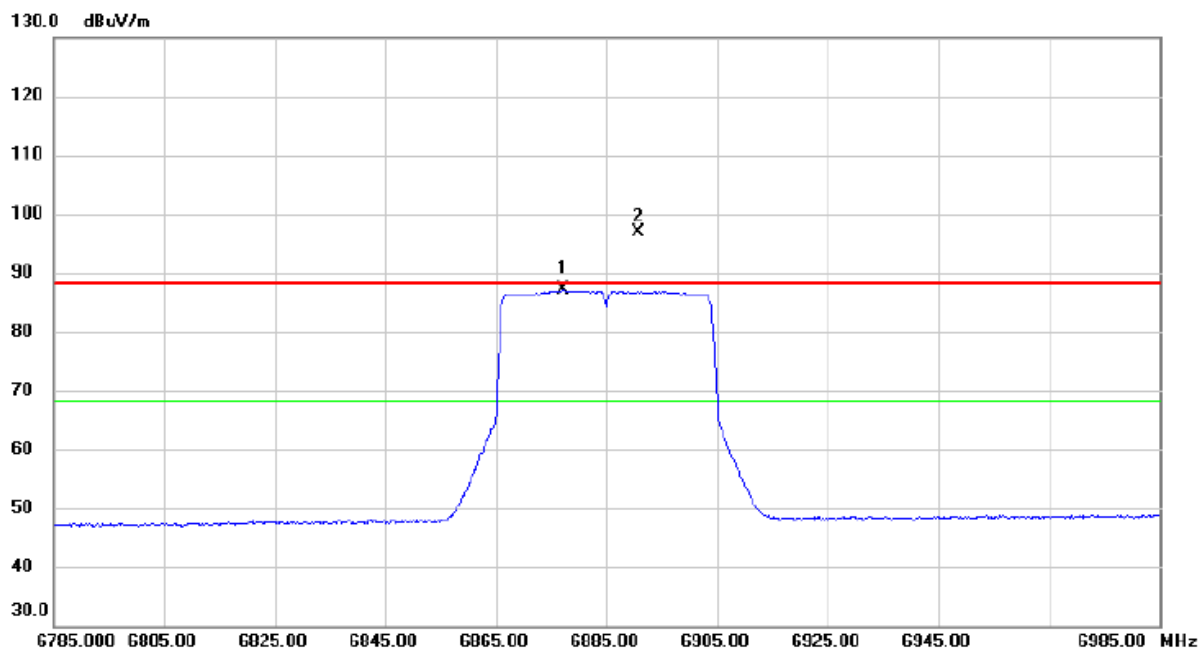


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6877.000     | 67.37                    | 19.71                   | 87.08                      | 68.20           | 18.88        | AVG      | No Limit |
| 2   | X   | 6890.600     | 77.11                    | 19.77                   | 96.88                      | 88.20           | 8.68         | peak     | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AX(HE40) Mode 6885 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

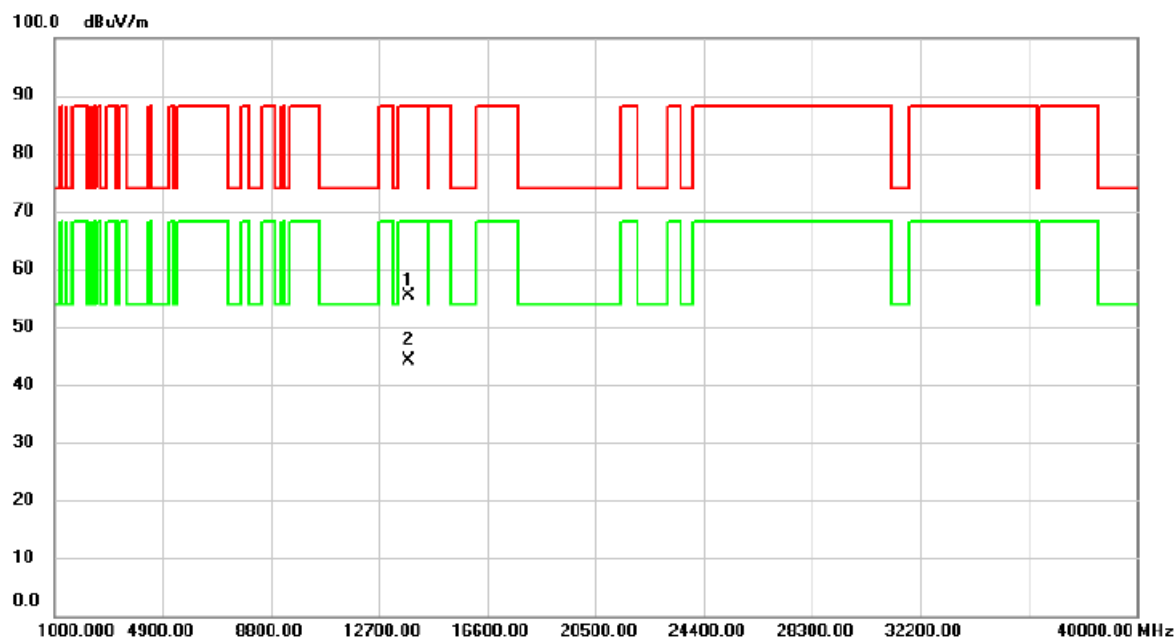


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13770.93     | 37.22                    | 18.08                   | 55.30                      | 88.20           | -32.90       | peak     |         |
| 2   | *   | 13770.93     | 26.15                    | 18.08                   | 44.23                      | 68.20           | -23.97       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AX(HE40) Mode 7085 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

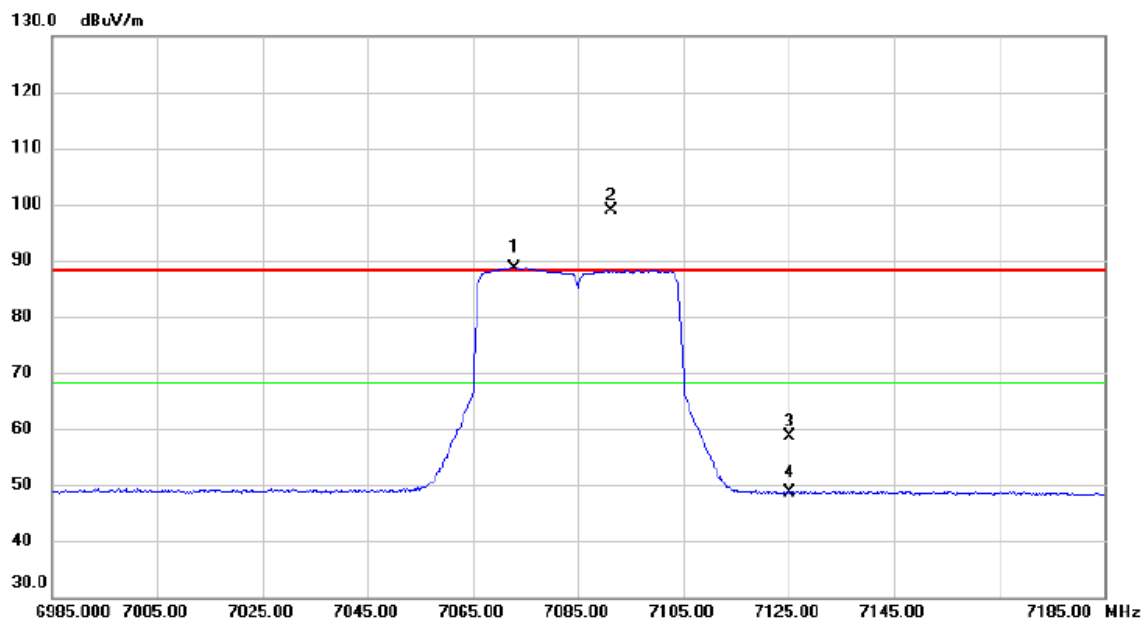


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 7072.800     | 68.19                    | 20.38                   | 88.57                      | 68.20           | 20.37        | AVG      | No Limit |
| 2   | X   | 7091.400     | 78.45                    | 20.41                   | 98.86                      | 88.20           | 10.66        | peak     | No Limit |
| 3   |     | 7125.000     | 38.07                    | 20.46                   | 58.53                      | 88.20           | -29.67       | peak     |          |
| 4   |     | 7125.000     | 28.23                    | 20.46                   | 48.69                      | 68.20           | -19.51       | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AX(HE40) Mode 7085 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

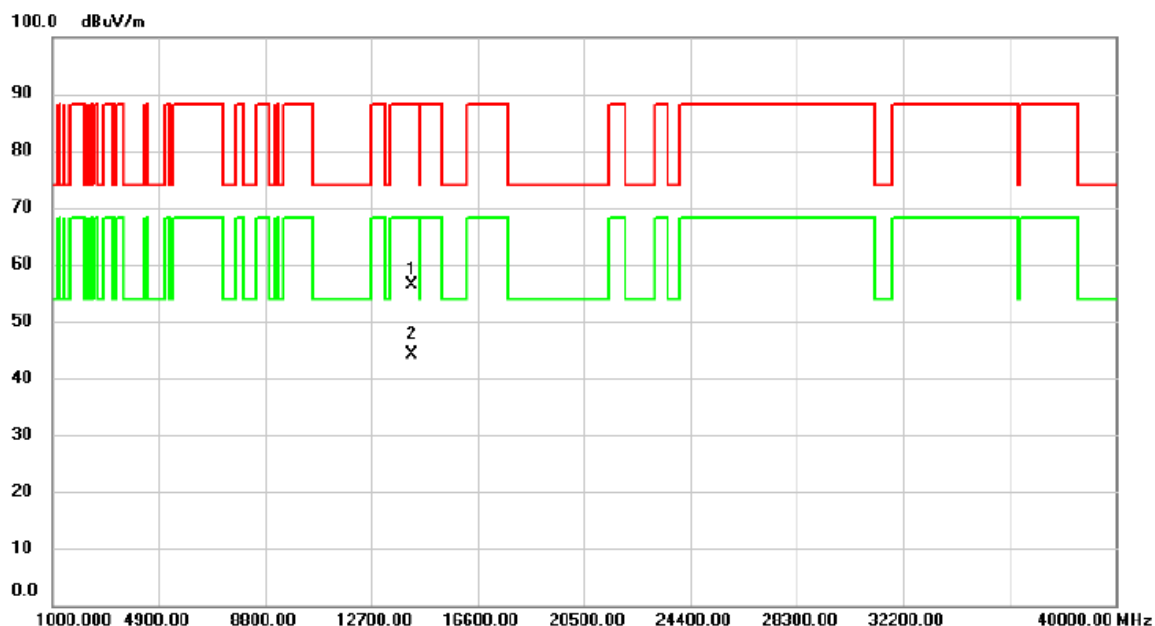


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 14169.91     | 37.36                    | 18.93                   | 56.29                      | 88.20           | -31.91       | peak     |         |
| 2   | *   | 14169.91     | 25.16                    | 18.93                   | 44.09                      | 68.20           | -24.11       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AX(HE40) Mode 7085 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

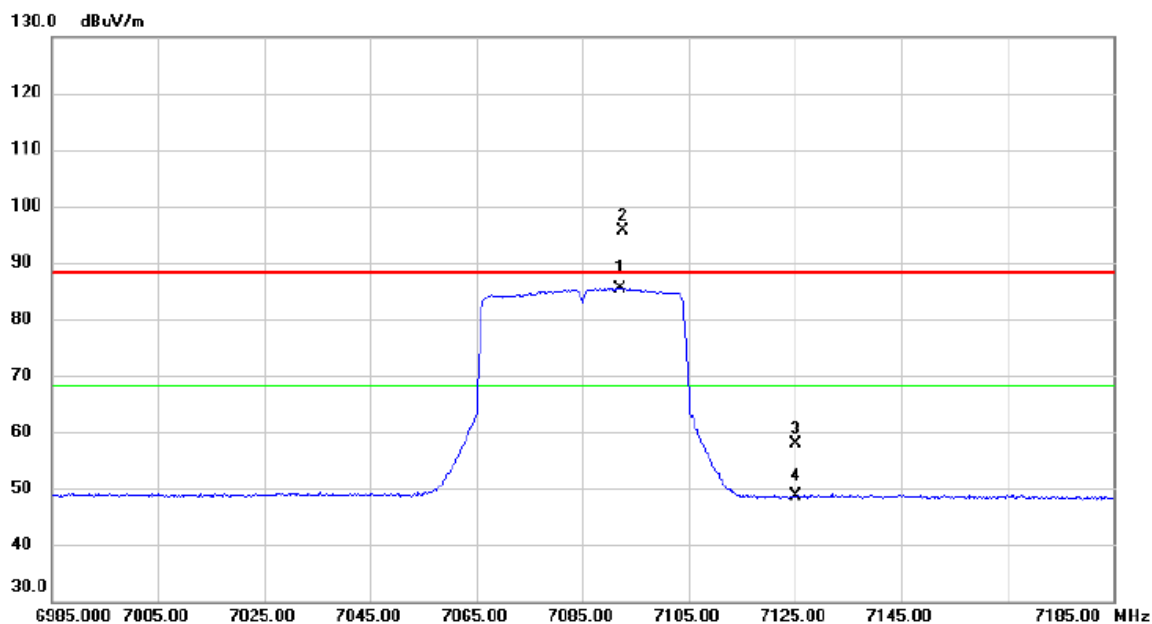


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 7092.200     | 64.99                    | 20.41                   | 85.40                      | 68.20           | 17.20        | AVG      | No Limit |
| 2   | X   | 7092.600     | 75.12                    | 20.41                   | 95.53                      | 88.20           | 7.33         | peak     | No Limit |
| 3   |     | 7125.000     | 37.52                    | 20.46                   | 57.98                      | 88.20           | -30.22       | peak     |          |
| 4   |     | 7125.000     | 28.06                    | 20.46                   | 48.52                      | 68.20           | -19.68       | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AX(HE40) Mode 7085 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

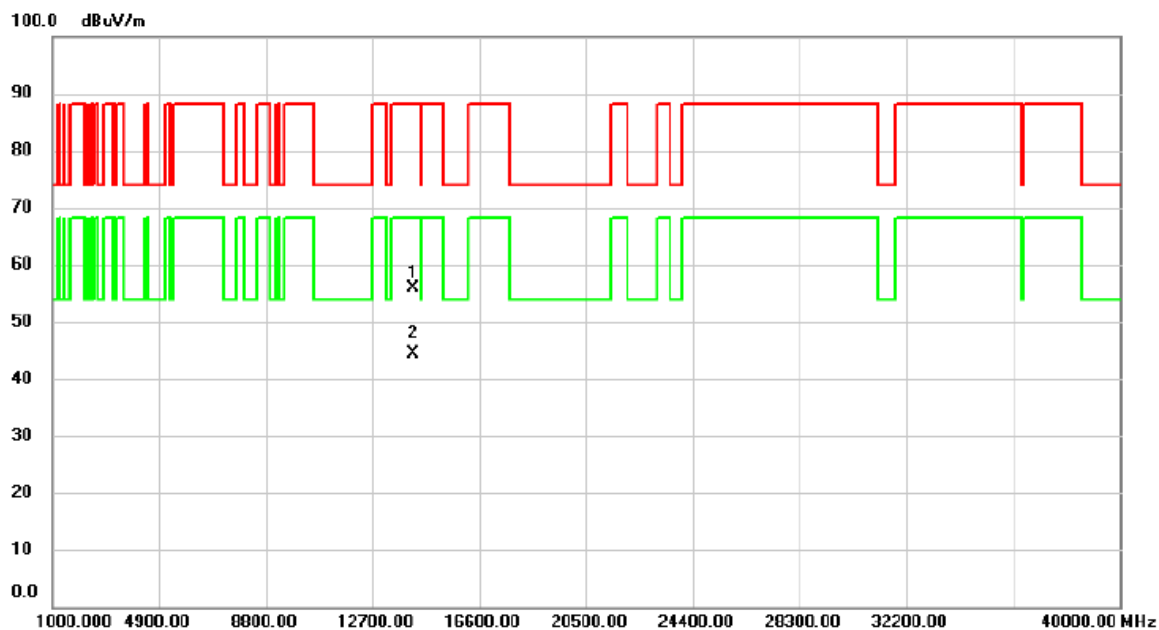


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 14169.69     | 37.00                    | 18.93                   | 55.93                      | 88.20           | -32.27       | peak     |         |
| 2   | *   | 14170.27     | 25.34                    | 18.93                   | 44.27                      | 68.20           | -23.93       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AX(HE80) Mode 6945 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

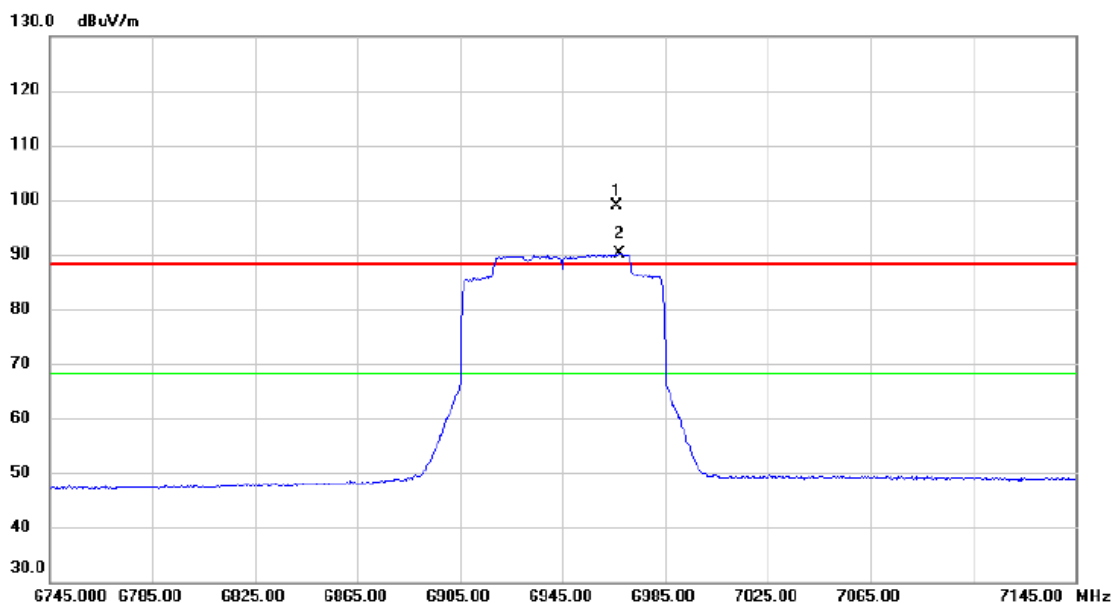


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6966.200     | 78.73                    | 20.13                   | 98.86                      | 88.20           | 10.66        | peak     | No Limit |
| 2   | *   | 6967.400     | 70.00                    | 20.13                   | 90.13                      | 68.20           | 21.93        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AX(HE80) Mode 6945 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

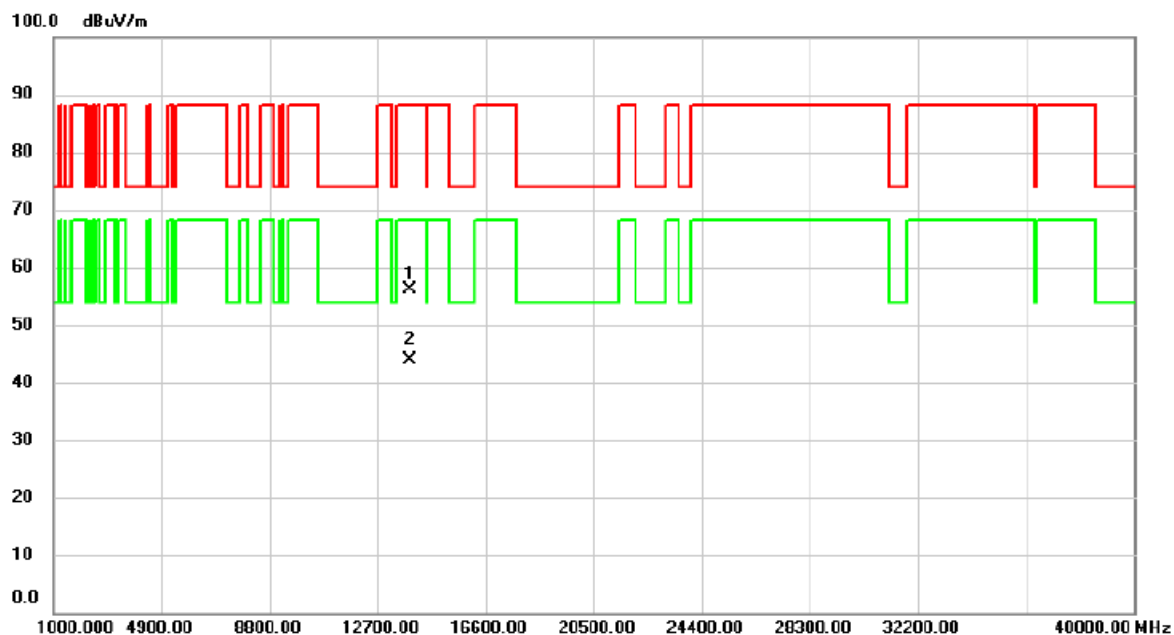


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13889.83     | 37.80                    | 18.33                   | 56.13                      | 88.20           | -32.07       | peak     |         |
| 2   | *   | 13890.49     | 25.56                    | 18.33                   | 43.89                      | 68.20           | -24.31       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AX(HE80) Mode 6945 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

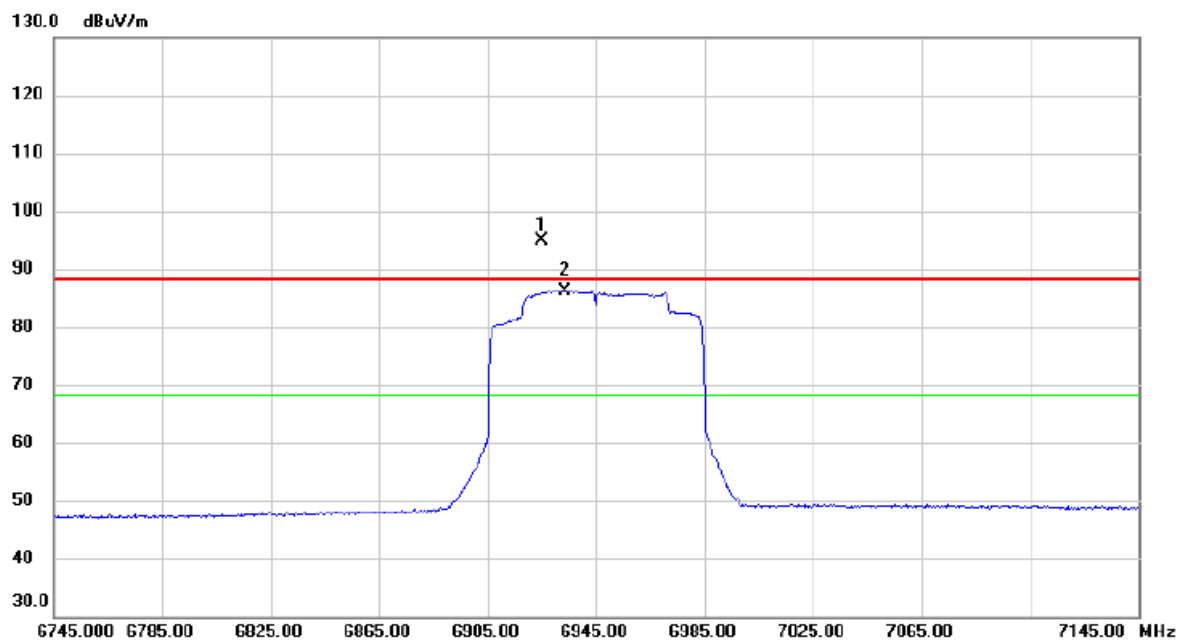


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6925.000     | 74.92                    | 19.93                   | 94.85                      | 88.20           | 6.65         | peak     | No Limit |
| 2   | *   | 6933.400     | 66.28                    | 19.97                   | 86.25                      | 68.20           | 18.05        | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AX(HE80) Mode 6945 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

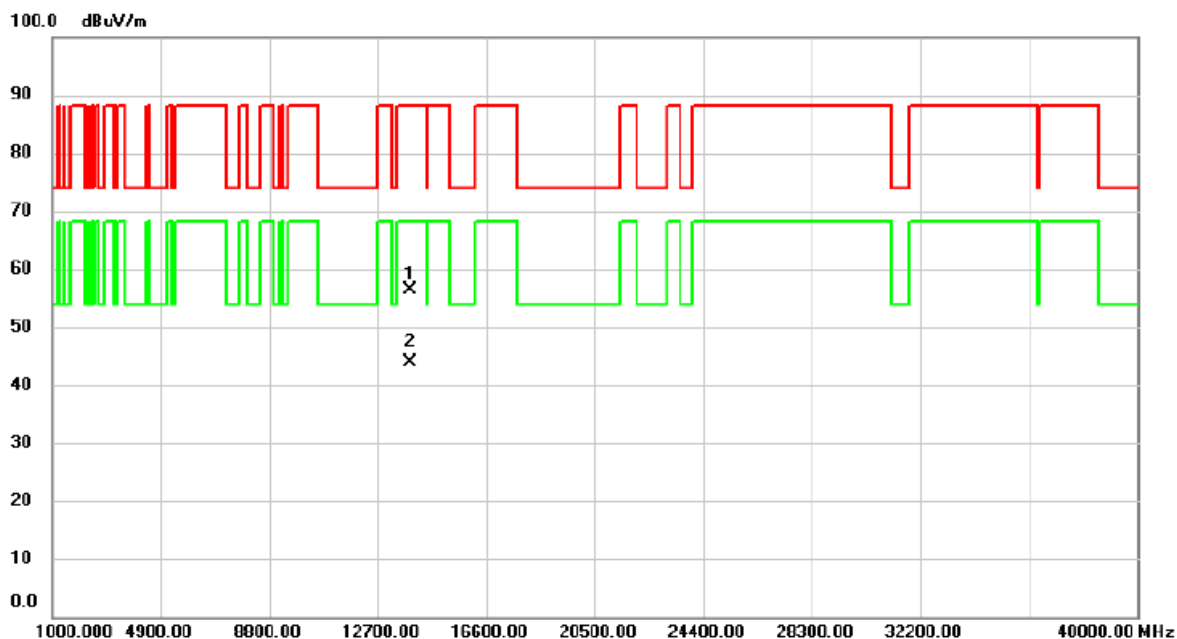


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13889.81     | 38.02                    | 18.33                   | 56.35                      | 88.20           | -31.85       | peak     |         |
| 2   | *   | 13890.81     | 25.55                    | 18.33                   | 43.88                      | 68.20           | -24.32       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AX(HE80) Mode 7025 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

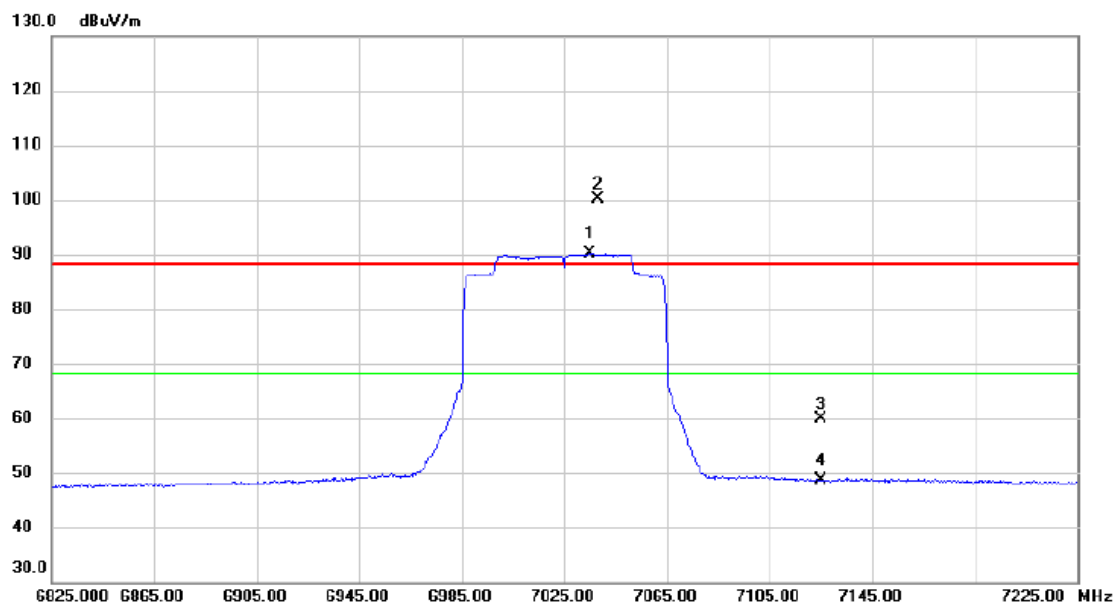


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 7035.000     | 69.72                    | 20.33                   | 90.05                      | 68.20           | 21.85        | AVG      | No Limit |
| 2   | X   | 7037.800     | 79.77                    | 20.34                   | 100.11                     | 88.20           | 11.91        | peak     | No Limit |
| 3   |     | 7125.000     | 39.42                    | 20.46                   | 59.88                      | 88.20           | -28.32       | peak     |          |
| 4   |     | 7125.000     | 28.11                    | 20.46                   | 48.57                      | 68.20           | -19.63       | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AX(HE80) Mode 7025 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

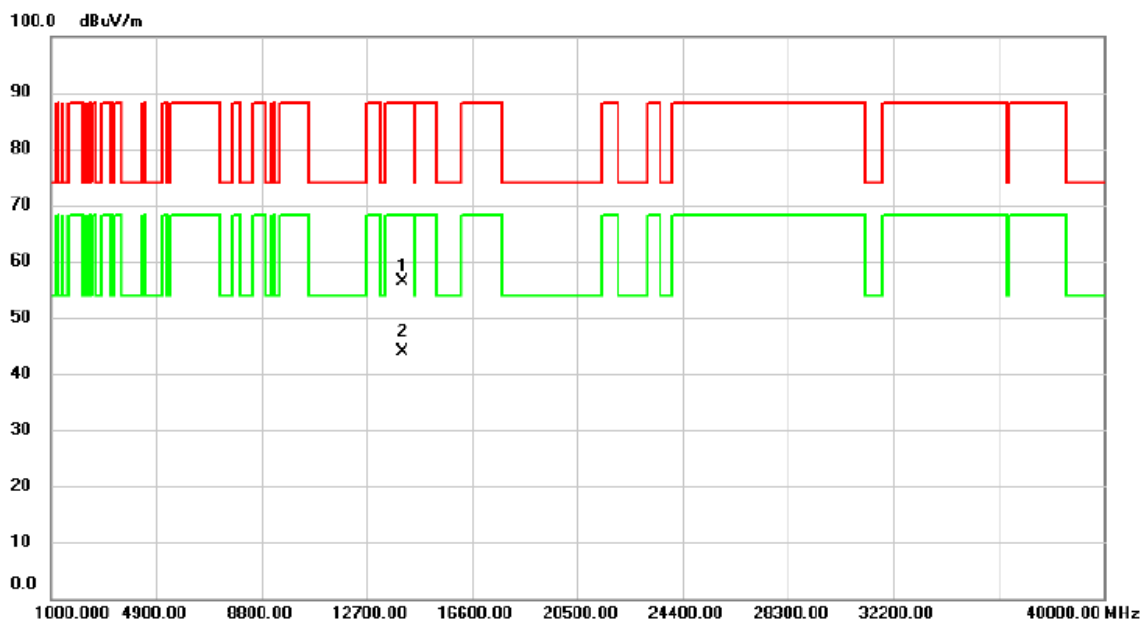


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 14050.11     | 37.62                    | 18.67                   | 56.29                      | 88.20           | -31.91       | peak     |         |
| 2   | *   | 14050.36     | 25.21                    | 18.67                   | 43.88                      | 68.20           | -24.32       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AX(HE80) Mode 7025 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

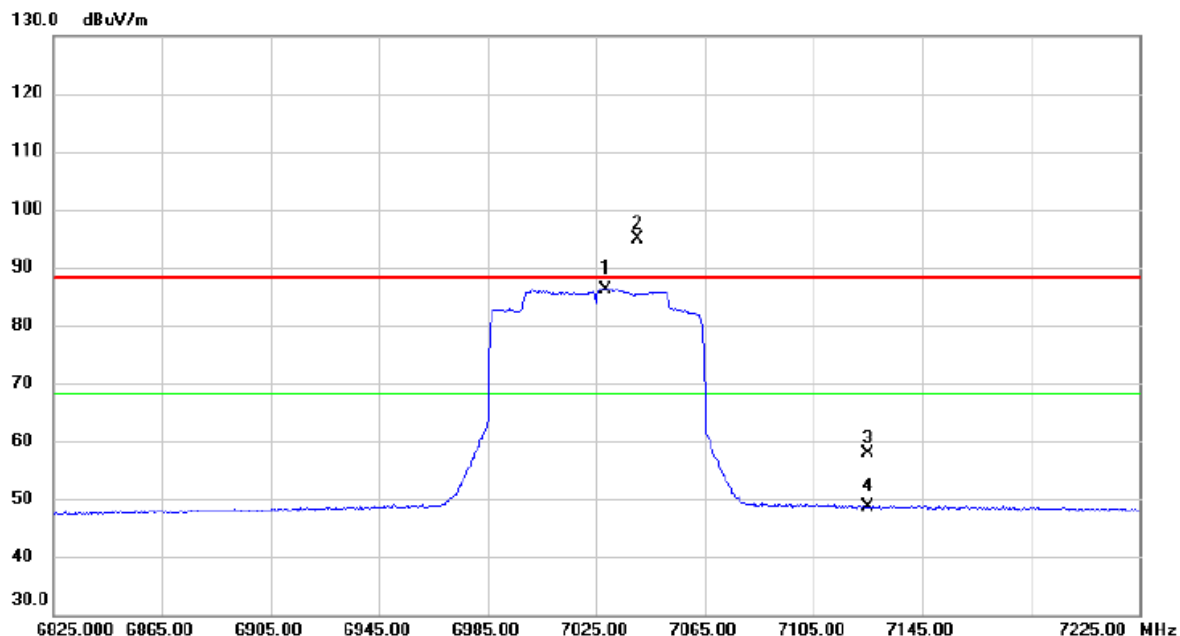


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 7028.600     | 65.90                    | 20.33                   | 86.23                      | 68.20           | 18.03        | AVG      | No Limit |
| 2   | X   | 7040.200     | 74.42                    | 20.34                   | 94.76                      | 88.20           | 6.56         | peak     | No Limit |
| 3   |     | 7125.000     | 37.34                    | 20.46                   | 57.80                      | 88.20           | -30.40       | peak     |          |
| 4   |     | 7125.000     | 28.22                    | 20.46                   | 48.68                      | 68.20           | -19.52       | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AX(HE80) Mode 7025 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

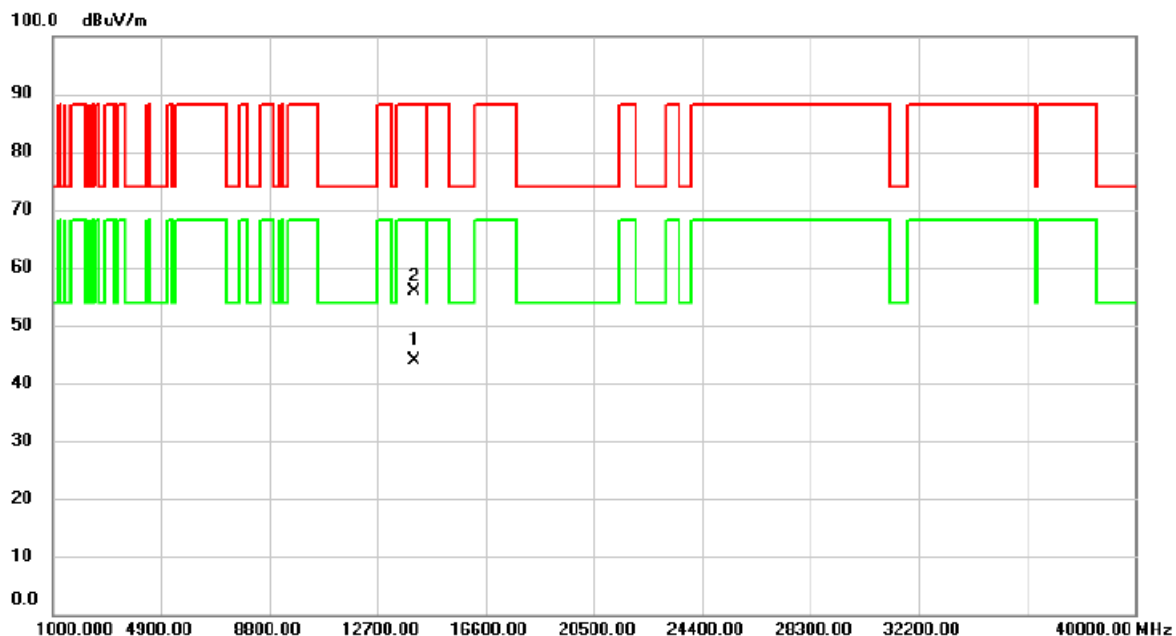


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 14049.57     | 25.29                    | 18.68                   | 43.97                      | 68.20           | -24.23       | AVG      |         |
| 2   |     | 14050.19     | 37.13                    | 18.67                   | 55.80                      | 88.20           | -32.40       | peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AX(HE160) Mode 6985 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

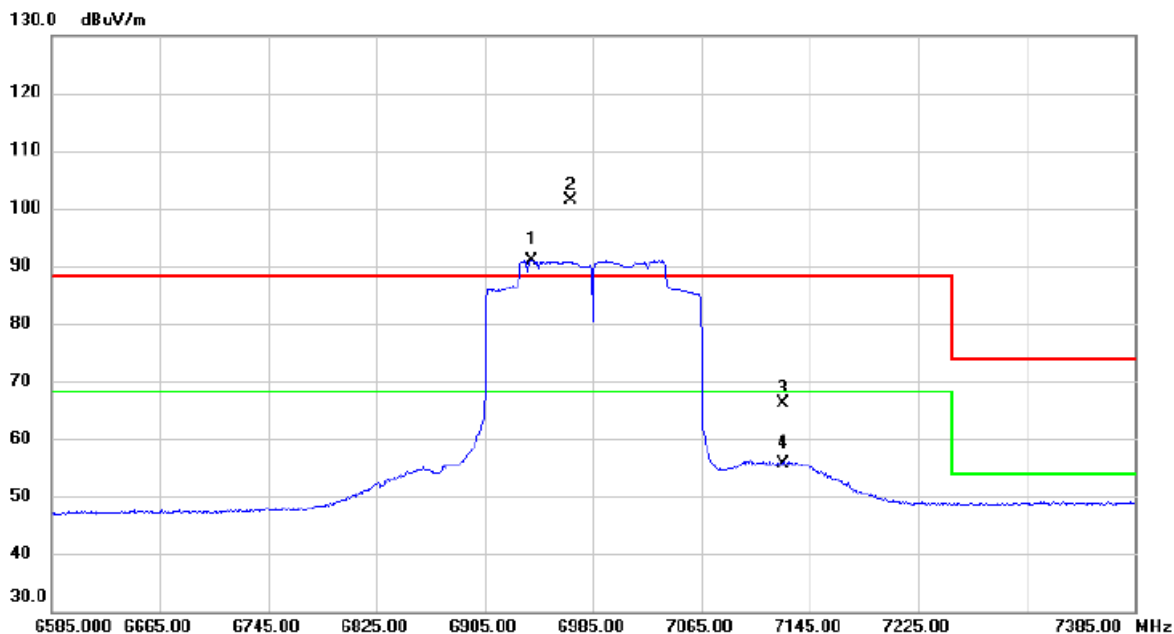


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6940.200     | 70.94                    | 20.00                   | 90.94                      | 68.20           | 22.74        | AVG      | No Limit |
| 2   | X   | 6968.200     | 81.32                    | 20.15                   | 101.47                     | 88.20           | 13.27        | peak     | No Limit |
| 3   |     | 7125.000     | 45.69                    | 20.46                   | 66.15                      | 88.20           | -22.05       | peak     |          |
| 4   |     | 7125.000     | 35.16                    | 20.46                   | 55.62                      | 68.20           | -12.58       | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-8_TX AX(HE160) Mode 6985 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

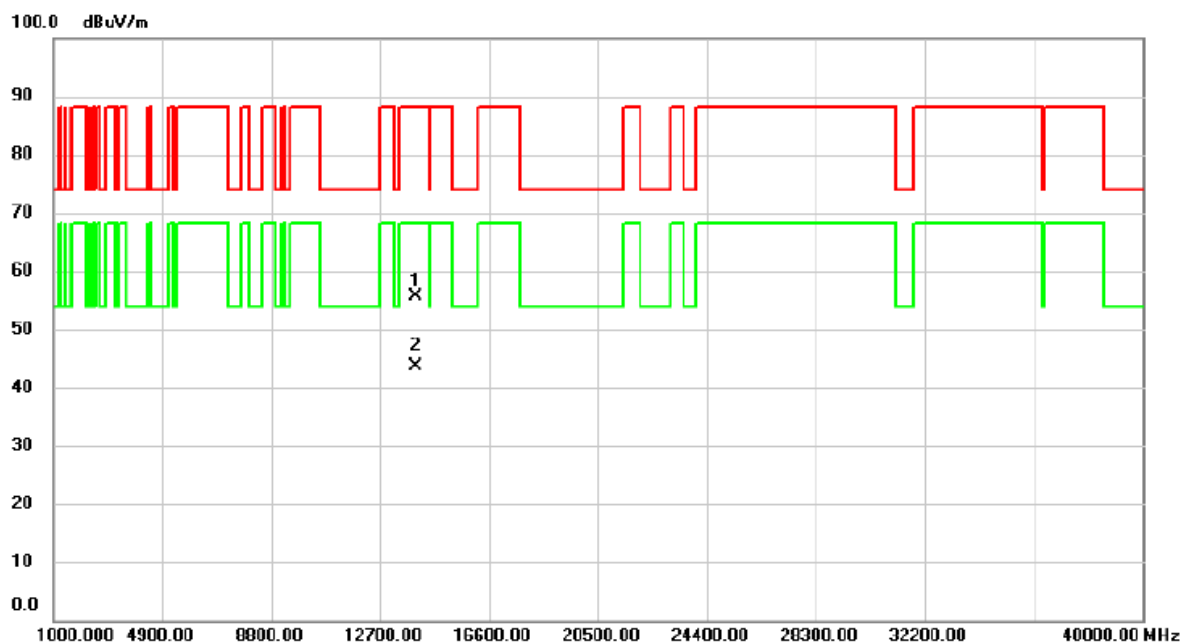


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13969.94     | 37.04                    | 18.51                   | 55.55                      | 88.20           | -32.65       | peak     |         |
| 2   | *   | 13970.12     | 25.19                    | 18.51                   | 43.70                      | 68.20           | -24.50       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AX(HE160) Mode 6985 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

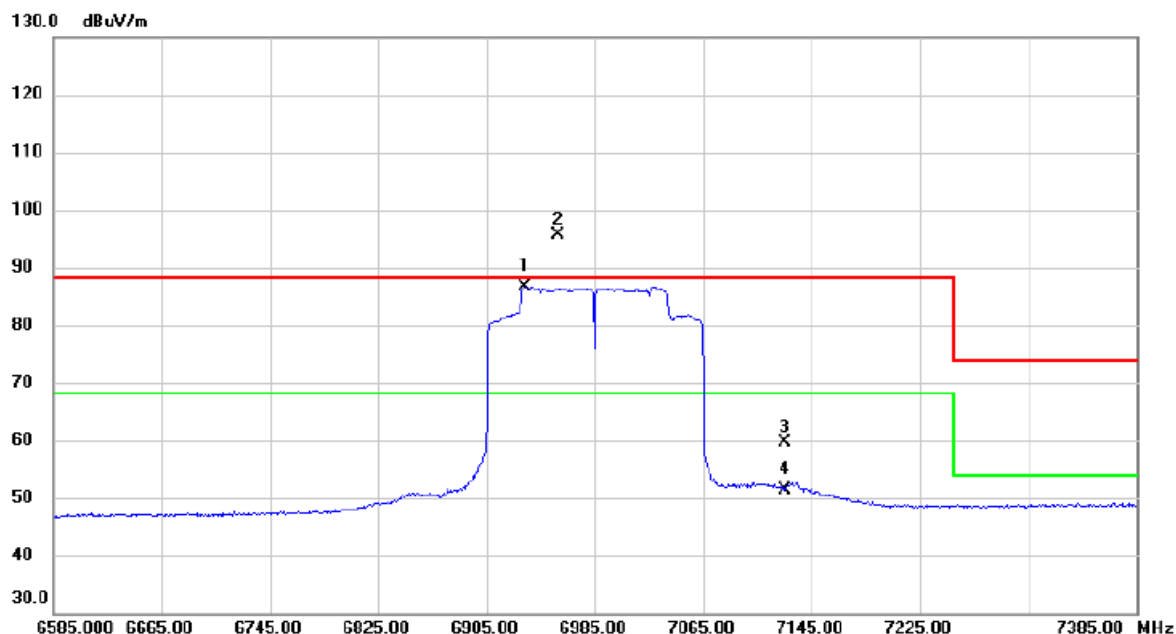


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 6933.000     | 66.58                    | 19.97                   | 86.55                      | 68.20           | 18.35        | AVG      | No Limit |
| 2   | X   | 6957.800     | 75.61                    | 20.09                   | 95.70                      | 88.20           | 7.50         | peak     | No Limit |
| 3   |     | 7125.000     | 39.15                    | 20.46                   | 59.61                      | 88.20           | -28.59       | peak     |          |
| 4   |     | 7125.000     | 30.98                    | 20.46                   | 51.44                      | 68.20           | -16.76       | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-8_TX AX(HE160) Mode 6985 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

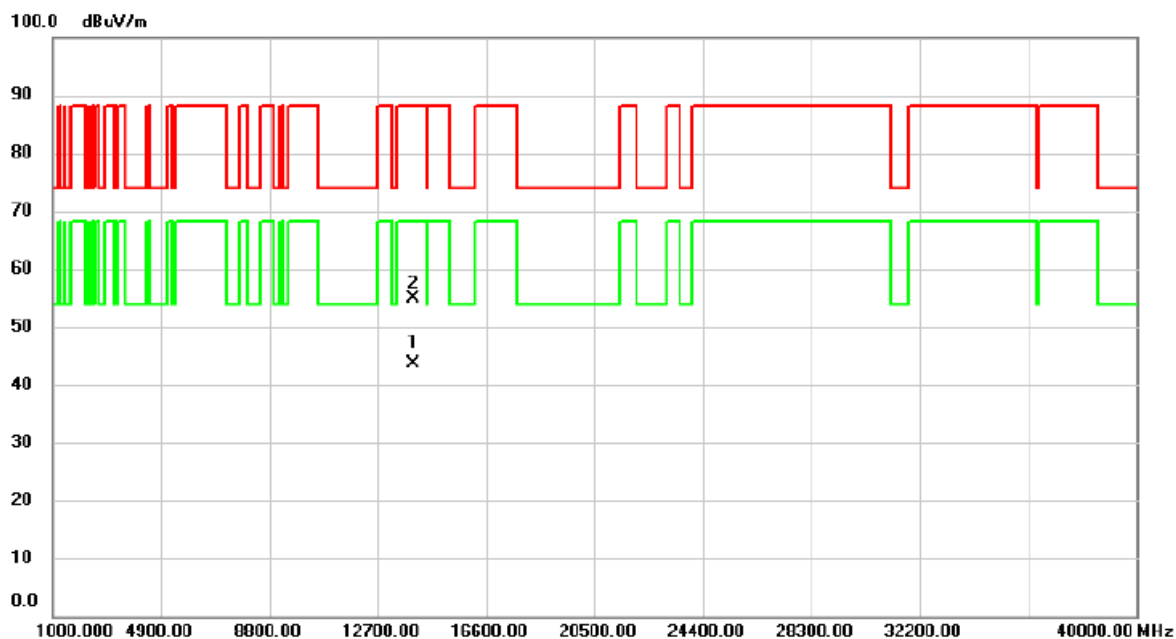


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 13969.53     | 25.22                    | 18.51                   | 43.73                      | 68.20           | -24.47       | AVG      |         |
| 2   |     | 13970.04     | 36.43                    | 18.51                   | 54.94                      | 88.20           | -33.26       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7+UNII-8_TX A Mode 6875 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

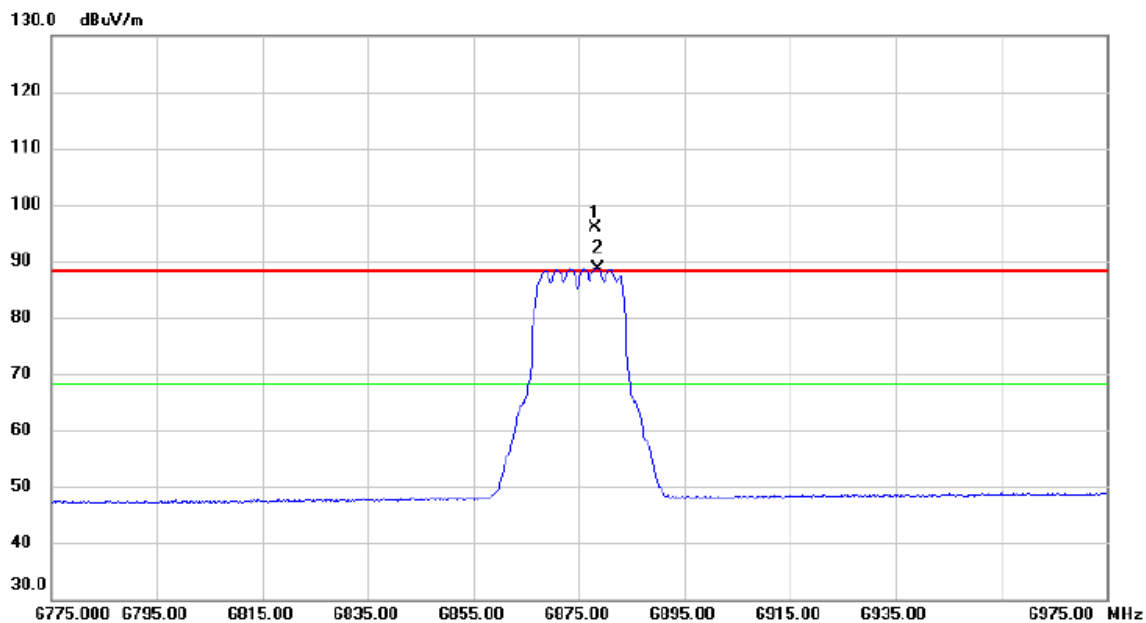


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6878.200     | 76.05                    | 19.71                   | 95.76                      | 88.20           | 7.56         | peak     | No Limit |
| 2   | *   | 6878.600     | 68.88                    | 19.71                   | 88.59                      | 68.20           | 20.39        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-7+UNII-8_TX A Mode 6875 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

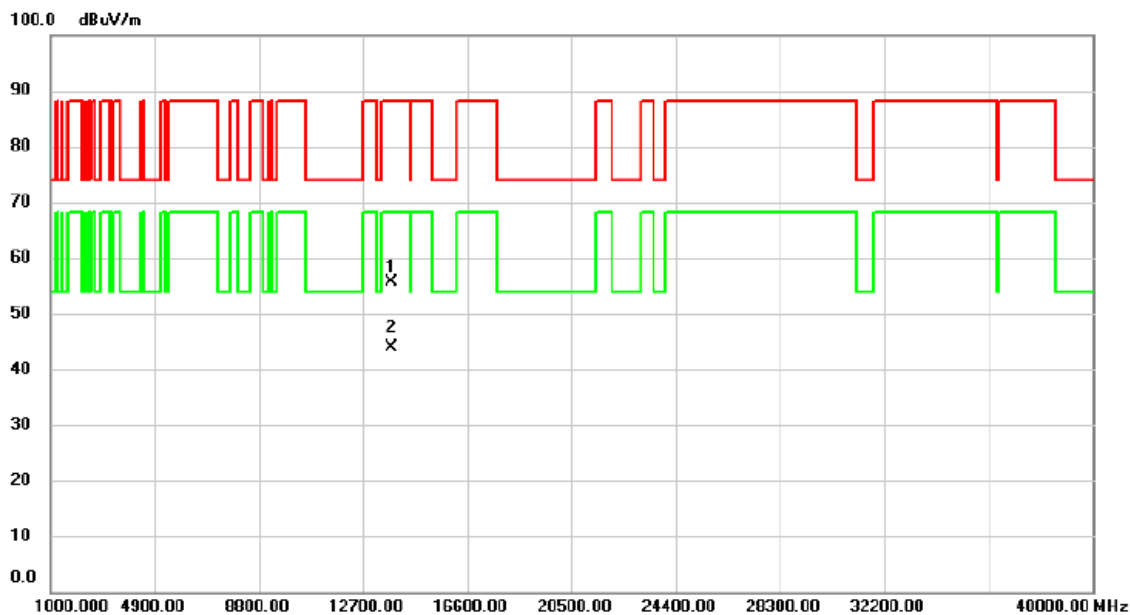


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 13750.38 | 37.56         | 18.04          | 55.60       | 88.20  | -32.60 | peak     |         |
| 2   | *   | 13750.91 | 25.90         | 18.04          | 43.94       | 68.20  | -24.26 | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7+UNII-8_TX A Mode 6875 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

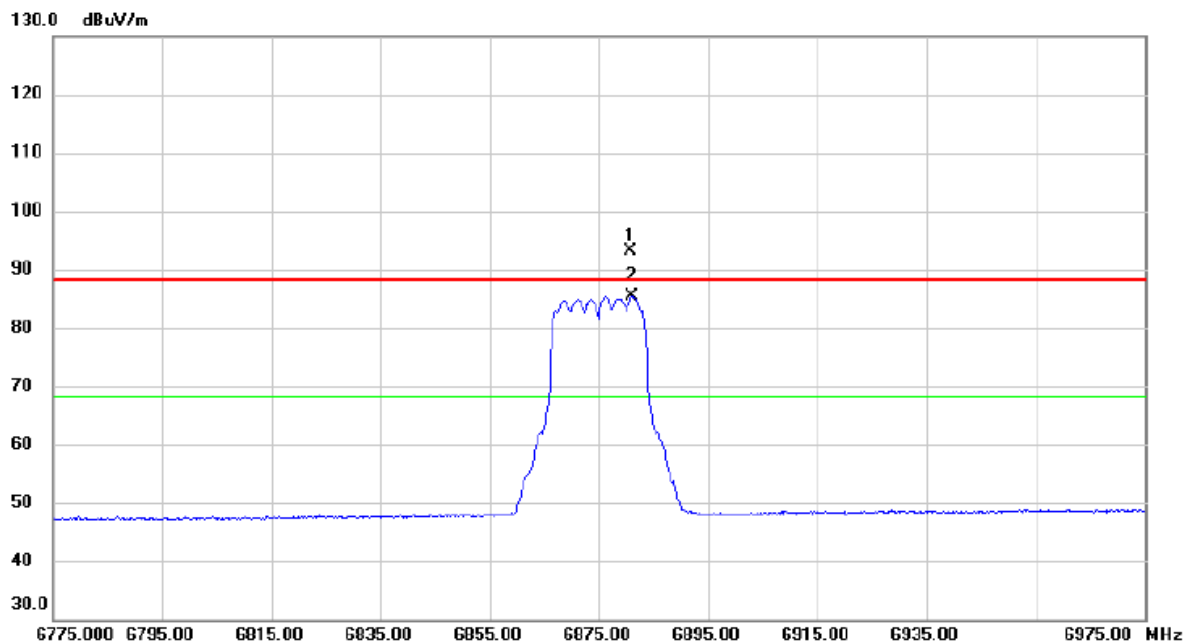


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6880.800     | 73.42                    | 19.72                   | 93.14                      | 88.20           | 4.94         | peak     | No Limit |
| 2   | *   | 6881.000     | 65.63                    | 19.72                   | 85.35                      | 68.20           | 17.15        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-7+UNII-8_TX A Mode 6875 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

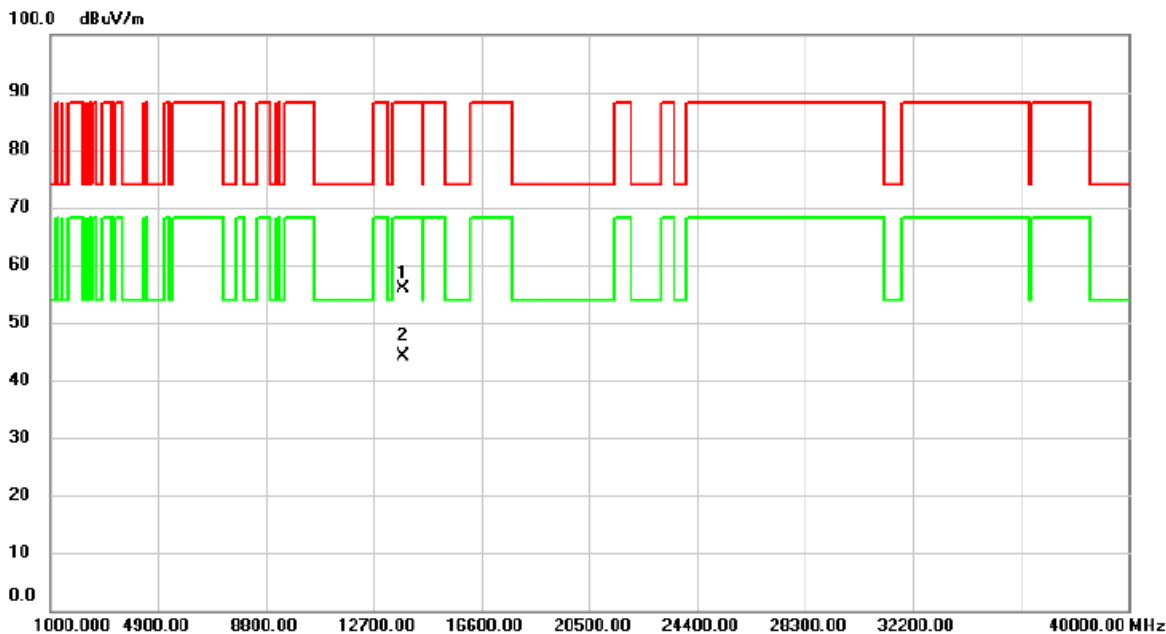


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13749.98     | 37.91                    | 18.02                   | 55.93                      | 88.20           | -32.27       | peak     |         |
| 2   | *   | 13750.70     | 26.04                    | 18.04                   | 44.08                      | 68.20           | -24.12       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                         |              |          |
|-----------|-----------------------------------------|--------------|----------|
| Test Mode | UNII-7+UNII-8_TX AX(HE20) Mode 6875 MHz | Polarization | Vertical |
|-----------|-----------------------------------------|--------------|----------|

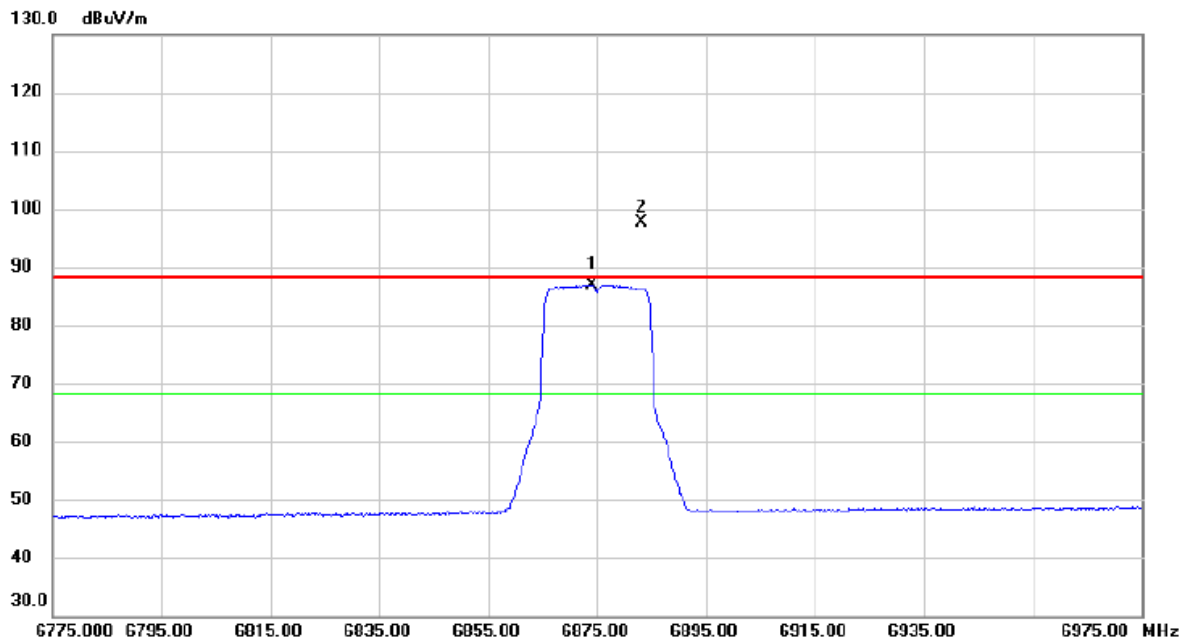


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment  |
| 1   | *   | 6874.200 | 67.24         | 19.69          | 86.93       | 68.20  | 18.73  | AVG      | No Limit |
| 2   | X   | 6883.200 | 77.83         | 19.73          | 97.56       | 88.20  | 9.36   | peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                         |              |          |
|-----------|-----------------------------------------|--------------|----------|
| Test Mode | UNII-7+UNII-8_TX AX(HE20) Mode 6875 MHz | Polarization | Vertical |
|-----------|-----------------------------------------|--------------|----------|

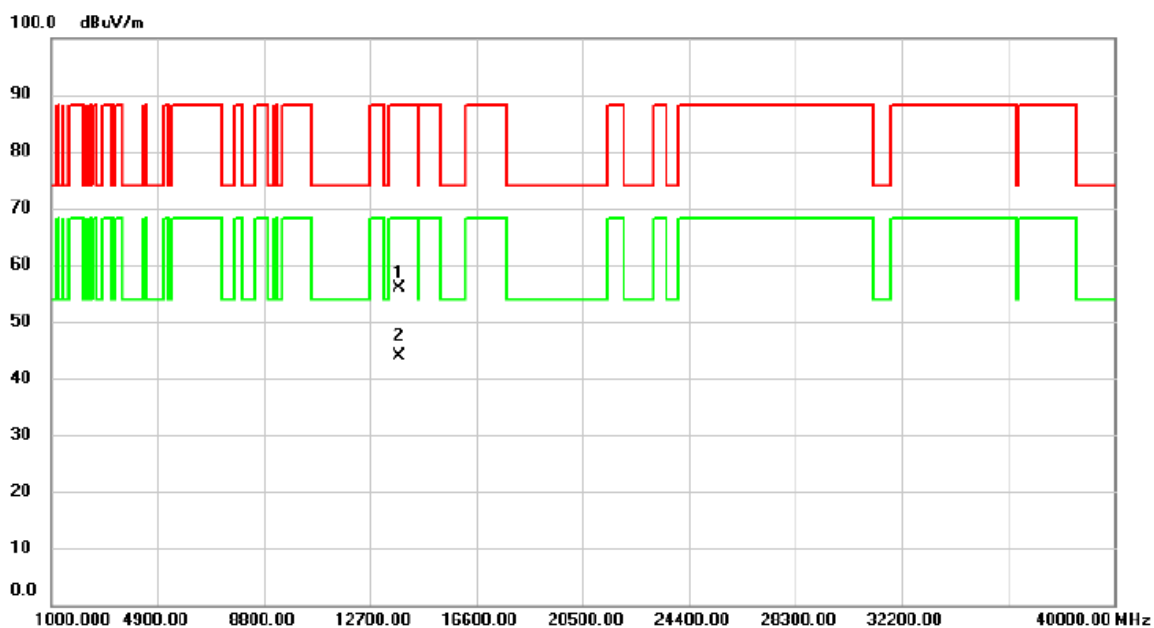


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 13749.38     | 37.89                    | 18.02                   | 55.91                      | 88.20           | -32.29       | peak     |         |
| 2   | *   | 13750.58     | 25.85                    | 18.04                   | 43.89                      | 68.20           | -24.31       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                         |              |            |
|-----------|-----------------------------------------|--------------|------------|
| Test Mode | UNII-7+UNII-8_TX AX(HE20) Mode 6875 MHz | Polarization | Horizontal |
|-----------|-----------------------------------------|--------------|------------|

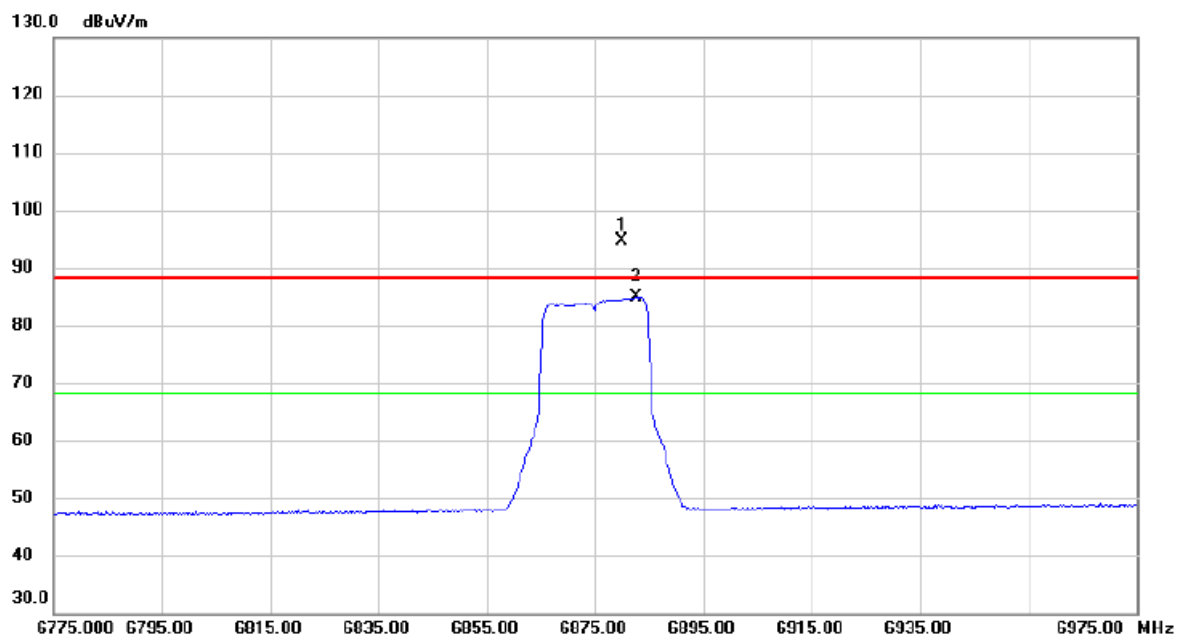


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 6880.000     | 74.98                    | 19.72                   | 94.70                      | 88.20           | 6.50         | peak     | No Limit |
| 2   | *   | 6882.600     | 65.10                    | 19.73                   | 84.83                      | 68.20           | 16.63        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                         |              |            |
|-----------|-----------------------------------------|--------------|------------|
| Test Mode | UNII-7+UNII-8_TX AX(HE20) Mode 6875 MHz | Polarization | Horizontal |
|-----------|-----------------------------------------|--------------|------------|

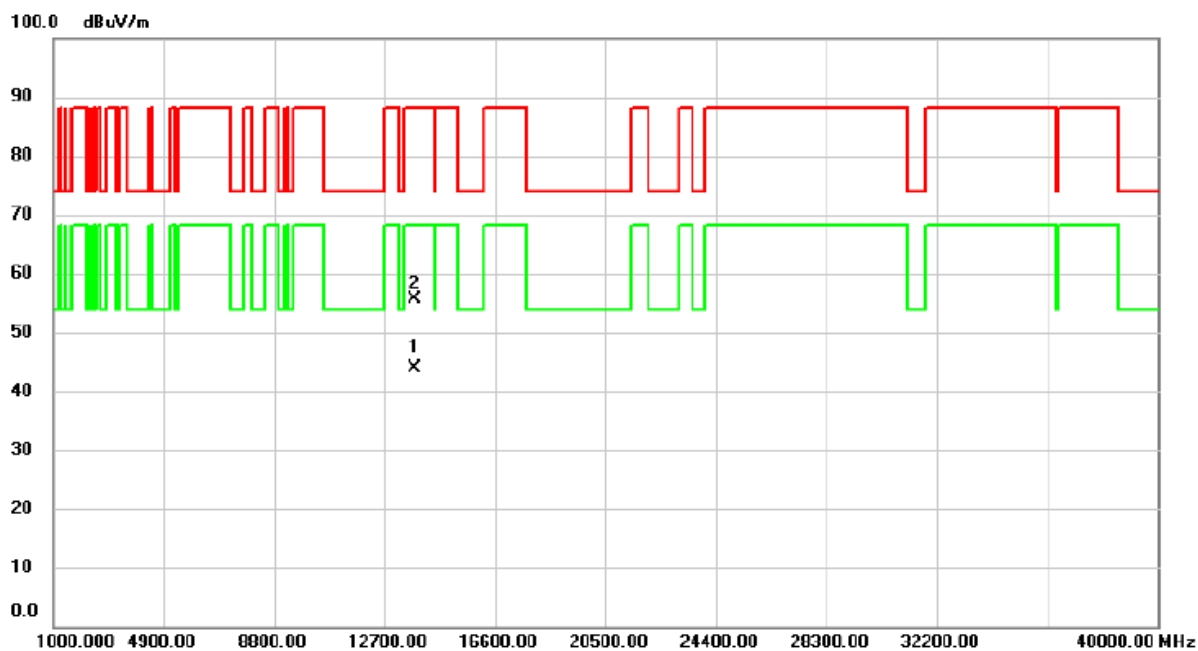

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 13749.02     | 25.89                    | 18.02                   | 43.91                      | 68.20           | -24.29       | AVG      |         |
| 2   |     | 13750.76     | 37.66                    | 18.04                   | 55.70                      | 88.20           | -32.50       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX C - MAXIMUM E.I.R.P.**

|           |                                |
|-----------|--------------------------------|
| Test Mode | UNII-8_TX AX(HE20) Mode_Ant. 1 |
|-----------|--------------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | e.i.r.p. (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------|------------------|----------------|----------|
| 233     | 7115            | -4.02              | 0.00        | 3.10           | 24               | 0.25           | Complies |

|           |                                |
|-----------|--------------------------------|
| Test Mode | UNII-8_TX AX(HE20) Mode_Ant. 2 |
|-----------|--------------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | e.i.r.p. (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|--------------------|-------------|----------------|------------------|----------------|----------|
| 233     | 7115            | -4.15              | 0.00        | 3.18           | 24               | 0.25           | Complies |

|           |                               |
|-----------|-------------------------------|
| Test Mode | UNII-8_TX AX(HE20) Mode_Total |
|-----------|-------------------------------|

| Channel | Frequency (MHz) | e.i.r.p. (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|---------|-----------------|----------------|------------------|----------------|----------|
| 233     | 7115            | 6.15           | 19.76            | 0.095          | Complies |

**End of Test Report**