

FCC Radio Test Report

FCC ID: RWO-RZ090484**This report concerns: Class II Permissive Changes**

Report No. : BTL-FCCP-5-2209C159
Equipment : Notebook PC
Model Name : RZ09-0483
Brand Name : RAZER
Applicant : Razer Inc.
Address : 9 Pasteur, Suite 100, Irvine, CA92618, USA.
Manufacturer : Razer Inc.
Address : 9 Pasteur, Suite 100, Irvine, CA92618, USA.

Equipment Class : 6XD - 15E 6 GHz Low Power Indoor Client

Radio Function : U-NII 6 GHz (U-NII 5, U-NII 6, U-NII 7, U-NII 8)

FCC Rule Part(s) : FCC CFR Title 47, Part15, Subpart E (15.407)
Measurement Procedure(s) : ANSI C63.10-2013

Date of Receipt : 2022/10/18
Date of Test : 2022/11/22~2023/1/17
Issued Date : 2023/1/17

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by :



Eric Lee, Engineer

Approved by :



Jerry Chuang, Supervisor



BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

1	SUMMARY OF TEST RESULTS	5
1.1	TEST FACILITY	6
1.2	MEASUREMENT UNCERTAINTY	6
1.3	TEST ENVIRONMENT CONDITIONS	6
1.4	TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	7
2	GENERAL INFORMATION	8
2.1	DESCRIPTION OF EUT	8
2.2	TEST MODES	12
2.3	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
2.4	SUPPORT UNITS	14
3	AC POWER LINE CONDUCTED EMISSIONS TEST	15
3.1	LIMIT	15
3.2	TEST PROCEDURE	15
3.3	DEVIATION FROM TEST STANDARD	15
3.4	TEST SETUP	16
3.5	TEST RESULT	16
4	UNDESIRABLE EMISSIONS TEST	17
4.1	LIMIT	17
4.2	TEST PROCEDURE	18
4.3	DEVIATION FROM TEST STANDARD	19
4.4	TEST SETUP	19
4.5	EUT OPERATING CONDITIONS	20
4.6	TEST RESULT – BELOW 30 MHZ	20
4.7	TEST RESULT – 30 MHZ TO 1 GHZ	20
4.8	TEST RESULT – ABOVE 1 GHZ	20
5	MAXIMUM E.I.R.P. TEST	21
5.1	LIMIT	21
5.2	TEST PROCEDURE	21
5.3	DEVIATION FROM TEST STANDARD	22
5.4	TEST SETUP	23
5.5	EUT OPERATING CONDITIONS	23
5.6	TEST RESULT	23
6	CONTENTION BASED PROTOCOL	24
6.1	LIMIT	24
6.2	TEST PROCEDURE	24
6.3	DEVIATION FROM TEST STANDARD	25
6.4	TEST SETUP	25
6.5	EUT OPERATING CONDITIONS	25
6.6	TEST RESULT	25
7	LIST OF MEASURING EQUIPMENTS	26
8	EUT TEST PHOTO	28
9	EUT PHOTOS	28
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	29
APPENDIX B	UNDESIRABLE EMISSIONS - 30 MHZ TO 1 GHZ	34
APPENDIX C	UNDESIRABLE EMISSIONS - ABOVE 1 GHZ	37
APPENDIX D	MAXIMUM E.I.R.P.	53
APPENDIX E	CONTENTION BASED PROTOCOL	58

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-5-2209C159	R00	Original Report.	2022/12/22	Invalid
BTL-FCCP-5-2209C159	R01	Revised report to address TAF Audit's comments.	2023/1/17	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
15.407(b)(9)	AC power line conducted emissions	APPENDIX A	Pass	-----
15.407(b)(6)(9)	Undesirable emissions	APPENDIX B APPENDIX C	Pass	-----
15.407(a)(4)(5)(6)(7)(8)	Maximum e.i.r.p.	APPENDIX D	Pass	-----
15.203 15.407(a)(9)	Antenna requirement	NOTE (3)	Pass	-----
15.407(a)(12)	Maximum power spectral density	NOTE (3)	Pass	-----
15.407(b)(7)	In-band emission (Mask)	NOTE (3)	Pass	-----
15.407(b)(10)	Restricted bands of operation	NOTE (3)	Pass	-----
15.407(c)	Automatically discontinue transmission	NOTE (3)	Pass	-----
15.407(d)	Operational restrictions for 6 GHz U-NII devices	NOTE (3)	Pass	-----
15.407(d)(6)	Contention-based protocol	APPENDIX D	Pass	-----
15.407(g) 2.1055	Frequency stability	NOTE (3)	Pass	-----

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) This item is demonstrated to full compliance referring to the test report number 200611-01.TR38 of the integrated module (model name: AX211NGW, FCC ID: PD9AX211NG).
- (4) The ac power lines conducted emissions and radiated emissions are tested to demonstrate full compliance of both module integrated into the host and host itself.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report:

No. 72, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

The test sites and facilities are covered under FCC RN: 674415 and DN: TW0659.

☐ C06 ☒ CB21 ☐ CB22

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

The test sites and facilities are covered under FCC RN: 674415 and DN: TW0659.

☒ C05 ☐ CB08 ☐ CB11 ☐ CB15 ☐ CB16
☒ SR10

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C05	CISPR	150 kHz ~ 30MHz	3.44

B. Radiated emissions test :

Test Site	Measurement Frequency Range	U,(dB)
CB21	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

C. Conducted test :

Test Item	U,(dB)
Maximum e.i.r.p.	0.3669
Contention-based protocol	-

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	23°C, 58%	AC 120V/60Hz	Jay Tien
Radiated emissions below 1 GHz	23°C, 59%	AC 120V/60Hz	Mark Wang
Radiated emissions above 1 GHz	23°C, 59%	AC 120V/60Hz	Mark Wang
Maximum e.i.r.p.	21.2°C, 52%	AC 120V/60Hz	Angela Wang
Contention-based protocol	23.4°C, 55%	AC 120V/60Hz	Tim Lee

1.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

Test Software	DRTU V02593.22.170.0			
UNII-5				
Mode	5955 MHz	6175 MHz	6415 MHz	Data Rate
IEEE 802.11ax (HE20)	1.625	1.625	1.625	HE0
Mode	5965 MHz	6165 MHz	6405 MHz	Data Rate
IEEE 802.11ax (HE40)	4.5	4	4.125	HE0
Mode	5985 MHz	6145 MHz	6385 MHz	Data Rate
IEEE 802.11ax (HE80)	7.25	7.125	7.125	HE0
Mode	6025 MHz	6345 MHz		Data Rate
IEEE 802.11ax (HE160)	9.875	9.875		HE0

UNII-6				
Mode	6435 MHz	6475 MHz	6515 MHz	Data Rate
IEEE 802.11ax (HE20)	2.25	2.25	2.25	HE0
Mode	6445 MHz	6485 MHz		Data Rate
IEEE 802.11ax (HE40)	4.75	5.125		HE0
Mode	6465 MHz			Data Rate
IEEE 802.11ax (HE80)	7.5			HE0
Mode	6505 MHz			Data Rate
IEEE 802.11ax (HE160)	10.25			HE0

UNII-6+ UNII-7		
Mode	6525 MHz	Data Rate
IEEE 802.11ax (HE40)	5.25	HE0

UNII-7				
Mode	6535 MHz	6695 MHz	6855 MHz	Data Rate
IEEE 802.11ax (HE20)	1.875	1.875	1.875	HE0
Mode	6685 MHz	6845 MHz		Data Rate
IEEE 802.11ax (HE40)	4.25	4.25		HE0
Mode	6545 MHz	6625 MHz	6785 MHz	Data Rate
IEEE 802.11ax (HE80)	7.625	7.375	7.375	HE0
Mode	6665 MHz			Data Rate
IEEE 802.11ax (HE160)	10			HE0

UNII-8					
Mode	6875 MHz	6995 MHz	7095 MHz	7115 MHz	Data Rate
IEEE 802.11ax (HE20)	1.875	1.875	1.875	-9.5	HE0
Mode	6885 MHz	7085 MHz			Data Rate
IEEE 802.11ax (HE40)	5.25	5.25			HE0
Mode	6865 MHz	6945 MHz	7025 MHz		Data Rate
IEEE 802.11ax (HE80)	7.375	8	8		HE0
Mode	6985 MHz				Data Rate
IEEE 802.11ax (HE160)	10				HE0

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	Notebook PC
Model Name	RZ09-0483
Brand Name	RAZER
Model Difference	N/A
Power Source	1# DC voltage supplied from AC adapter. Model 1: RC30-042 Model 2: RC30-0484 2# Supplied from battery. Model : RC30-0483
Power Rating	1# Model 1: I/P: 100-240V~ 4A MAX,50/60Hz O/P: 19.5V===14.36A Model 2: I/P: 100-240V~ 4.5A,50/60Hz O/P: 19.5V===16.92A 2# DC 15.4V, 6182mAh, 95.2Wh
Products Covered	2* POWER Adapter 1* AC Cable
Operation Band	UNII-5: 5925 MHz ~ 6425 MHz UNII-6: 6425 MHz ~ 6525 MHz UNII-7: 6525 MHz ~ 6875 MHz UNII-8: 6875 MHz ~ 7125 MHz
Modulation Technology	OFDMA
Transfer Rate	IEEE 802.11ax: up to 2402 Mbps
Maximum E.I.R.P. for UNII-5	IEEE 802.11ax (HE20): 5.13 dBm (0.0033 W) IEEE 802.11ax (HE40): 8.03 dBm (0.0064 W) IEEE 802.11ax (HE80): 10.79 dBm (0.0120 W) IEEE 802.11ax (HE160): 13.64 dBm (0.0231 W)
Maximum E.I.R.P. for UNII-6	IEEE 802.11ax (HE20): 5.85 dBm (0.0038 W) IEEE 802.11ax (HE40): 8.72 dBm (0.0072 W) IEEE 802.11ax (HE80): 11.10 dBm (0.0129 W) IEEE 802.11ax (HE160): 13.89 dBm (0.0245 W)
Maximum E.I.R.P. for UNII-7	IEEE 802.11ax (HE20): 5.03 dBm (0.0032 W) IEEE 802.11ax (HE40): 7.73 dBm (0.0059 W) IEEE 802.11ax (HE80): 11.12 dBm (0.0129 W) IEEE 802.11ax (HE160): 13.76 dBm (0.0238 W)
Maximum E.I.R.P. for UNII-6+ UNII-7	IEEE 802.11ax (HE40): 8.86 dBm (0.0077 W)
Maximum E.I.R.P. for UNII-8	IEEE 802.11ax (HE20): 5.21 dBm (0.0033 W) IEEE 802.11ax (HE40): 8.61 dBm (0.0073 W) IEEE 802.11ax (HE80): 11.21 dBm (0.0132 W) IEEE 802.11ax (HE160): 13.57 dBm (0.0228 W)
Test Model	RZ09-0483
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

(2) Channel List:

UNII-5							
IEEE 802.11ax (HE20)		IEEE 802.11ax (HE40)		IEEE 802.11ax (HE80)		IEEE 802.11ax (HE160)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5955	3	5965	7	5985	15	6025
5	5975	11	6005	23	6065	47	6185
9	5995	19	6045	39	6145	79	6345
13	6015	27	6085	55	6225		
17	6035	35	6125	71	6305		
21	6055	43	6165	87	6385		
25	6075	51	6205				
29	6095	59	6245				
33	6115	67	6285				
37	6135	75	6325				
41	6155	83	6365				
45	6175	91	6405				
49	6195						
53	6215						
57	6235						
61	6255						
65	6275						
69	6295						
73	6315						
77	6335						
81	6355						
85	6375						
89	6395						
93	6415						

UNII-6							
IEEE 802.11ax (HE20)		IEEE 802.11ax (HE40)		IEEE 802.11ax (HE80)		IEEE 802.11ax (HE160)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
97	6435	99	6445	103	6465	111	6505
101	6455	107	6485				
105	6475	115	6525				
109	6495						
113	6515						

UNII-7							
IEEE 802.11ax (HE20)		IEEE 802.11ax (HE40)		IEEE 802.11ax (HE80)		IEEE 802.11ax (HE160)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
117	6535	123	6565	119	6545	143	6665
121	6555	131	6605	135	6625	175	6825
125	6575	139	6645	151	6705		
129	6595	147	6685	167	6785		
133	6615	155	6725				
137	6635	163	6765				
141	6655	171	6805				
145	6675	179	6845				
149	6695						
153	6715						
157	6735						
161	6755						
165	6775						
169	6795						
173	6815						
177	6835						
181	6855						

UNII-8							
IEEE 802.11ax (HE20)		IEEE 802.11ax (HE40)		IEEE 802.11ax (HE80)		IEEE 802.11ax (HE160)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
185	6875	187	6885	183	6865	207	6985
189	6895	195	6925	199	6945		
193	6915	203	6965	215	7025		
197	6935	211	7005				
201	6955	219	7045				
205	6975	227	7085				
209	6995						
213	7015						
217	7035						
221	7055						
225	7075						
229	7095						
233	7115						

(3) Table for Filed Antenna:

Ant.	Manufacturer	P/N	Type	Connector	Gain (dBi)
1	Amphenol Taiwan Corporation	BY5962-15-001-C	PIFA	N/A	4.27
2	Amphenol Taiwan Corporation	BY5962-15-001-C	PIFA	N/A	4.71

Note:

- 1) The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and receivers (2T2R).
 - 2) Ant.1 refers to main antenna, Ant.2 refers to aux antenna.
 - 3) The AUX antenna connector of the module connected to the MAIN antenna of the EUT and the MAIN antenna connector of the module connected to the AUX antenna of the EUT.
- (4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	IEEE 802.11ax (HE20)	233	-
Transmitter Radiated Emissions (above 1GHz)	IEEE 802.11ax (HE20)	233	Bandedge
	IEEE 802.11ax (HE160)	79,111,143,207	
	IEEE 802.11ax (HE20)	233	Harmonic
	IEEE 802.11ax (HE160)	79,111,143,207	
Maximum e.i.r.p.	IEEE 802.11ax (HE20)	1/45/93 97/105/113 117/149/181 185/209/229/233	-
	IEEE 802.11ax (HE160)	15/79 111,143,207	
Contention Based Protocol	IEEE 802.11ax (HE20)	45,105,149,213	
	IEEE 802.11ax (HE160)	47,111,143,207	


NOTE:

- (1) The Radiated emissions test was verified based on the worst conducted power and Bandwidth test results reported in the original report.
- (2) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.
- (3) This Notebook PC has two mainboards with two adapters. Both mainboard MB1 (with adapter RC30-0484) and mainboard MB2 (with adapter RC30-042) had been pre-tested and in this report only recorded the worst case.


2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 0.

AC Power Line Conducted Emissions Test

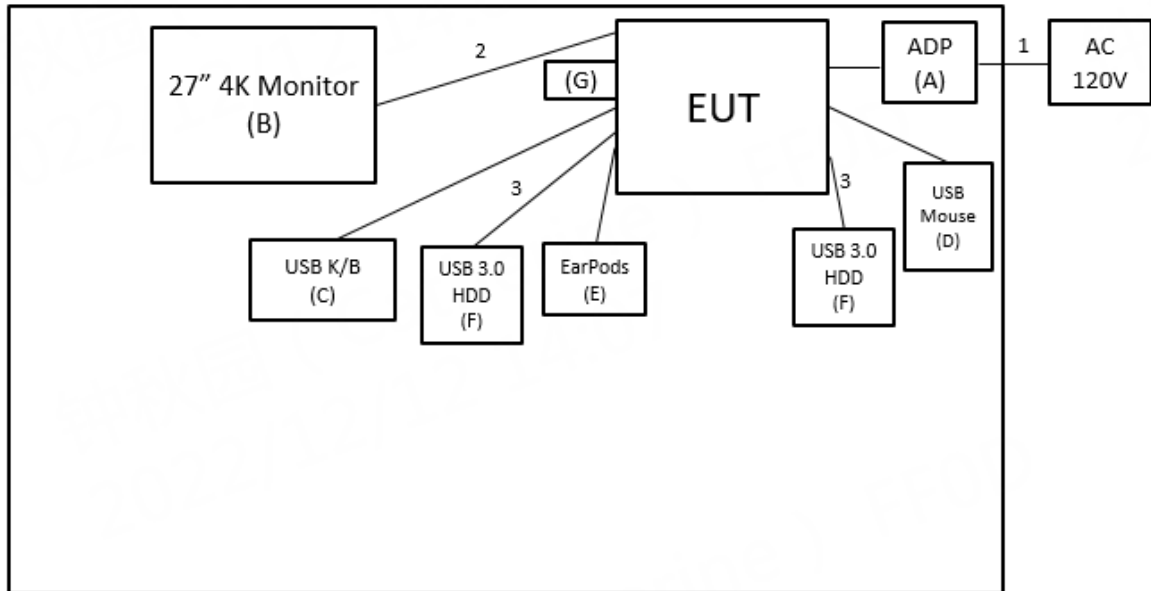

Radiated Emissions Test

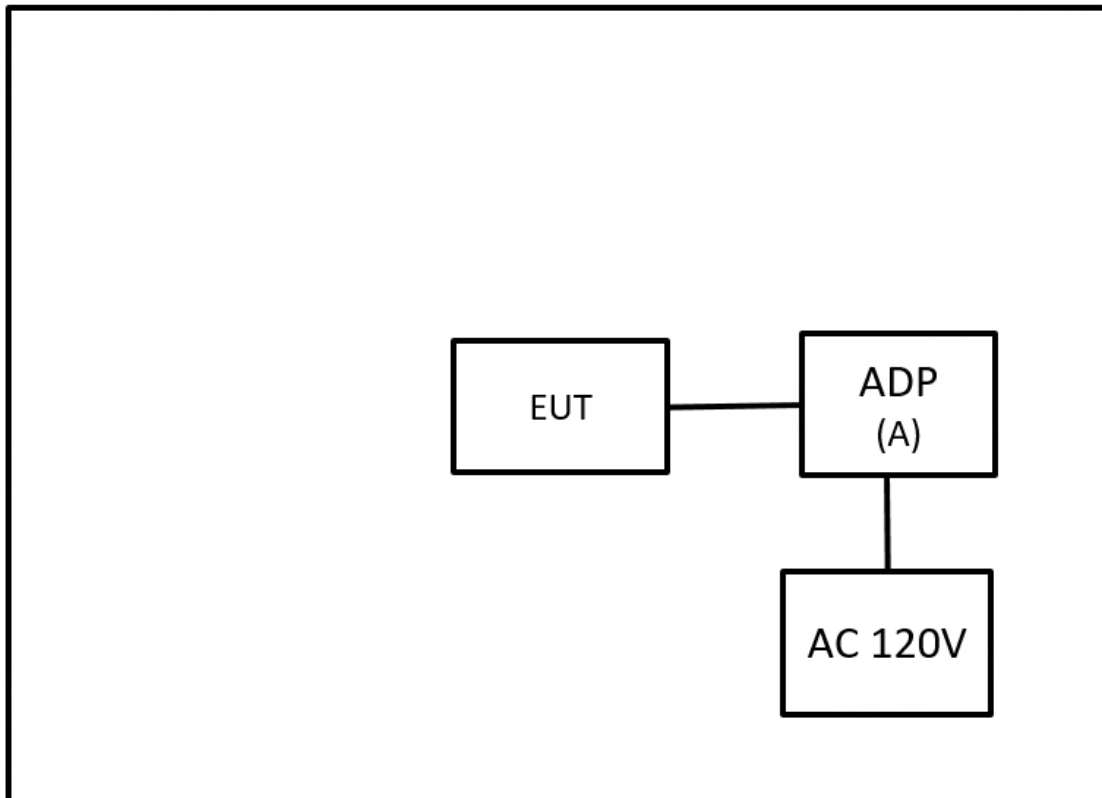

2.4 SUPPORT UNITS

AC power line conducted emissions

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	ADP	Razer	RC30-042	952226U26100653	Supplied by test requester.
B	27" 4K Monitor	DELL	U2720Q	CN-083VF-WSL00-0B7-332L	Furnished by test lab.
C	USB K/B	DELL	KB216t	CN-0W33XP-L0300-797-05TY-A03	Furnished by test lab.
D	USB Mouse	DELL	MOCZUL	CN-049TWY-PRC00-79E-01HA	Furnished by test lab.
E	EarPods	Apple	A1472	N/A	Furnished by test lab.
F	USB 3.0 HDD	WD	WDBC3C0010BSL-0B	WX81A88ALJUC	Furnished by test lab.
G	USB Dongle	Kingston	DataTraveler Exodia	N/A	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	No	No	1.2m	Power Cable	Supplied by test requester.
2	No	No	1.7m	HDMI Cable	Furnished by test lab.
3	No	No	18cm	TypeC to TypeC Cable	Furnished by test lab.

Radiated Emissions

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	ADP	Razer	RC30-042	952226U26100653	Supplied by test requester.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	1m	PowerCode	Supplied by test requester.

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value

Calculation example:

Reading Level		Correct Factor		Measurement Value
38.22	+	3.45	=	41.67

Measurement Value		Limit Value		Margin Level
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

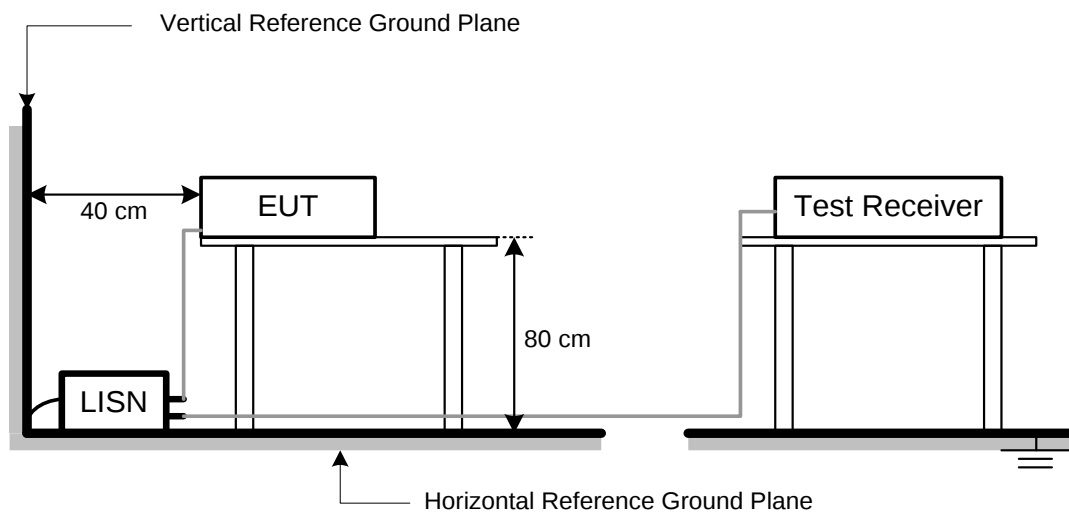

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 UNDESIRABLE EMISSIONS TEST

4.1 LIMIT

According to 15.407(b)(6) the limits are as follows:

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

According to FCC KDB 987594 D02, clause G. Unwanted Emission Measurement:

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

Item	Maximum e.i.r.p. Limit	Maximum field strength Limit @ 3m
Any emissions outside of the 5.925-7.125 GHz band	Peak: -7 dBm/MHz	88.2 dBuV/m
	Average: -27 dBm/MHz	68.2 dBuV/m

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

According to 15.407(b)(9) the limits are as follows:

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

NOTE:

(1) e.i.r.p. Limit (dBuV/m at 3m) = Power Limit(dBm) + 95.2. (Referring to FCC KDB 987594 D02, clause G.2.d)(iii))

(2) Emission level (dBuV/m) = 20log Emission level (uV/m).
3 m Emission level = 10 m Emission level + 20log(10 m/3 m).

(3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain (if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level		Correct Factor		Measurement Value
19.11	+	2.11	=	21.22

Measurement Value		Limit Value		Margin Level
21.22	-	68.2	=	-46.98

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2 TEST PROCEDURE

Referring to FCC KDB 987594 D02, clause G. and FCC KDB 789033 D02, clause G. Unwanted Emission Measurement:

For measurements below 30 MHz:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

For measurements 30 MHz to 40 GHz:


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. (between 30 MHz to 1 GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. (between 1 GHz to 40 GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (between 30 MHz to 1 GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (between 30 MHz to 1 GHz)

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

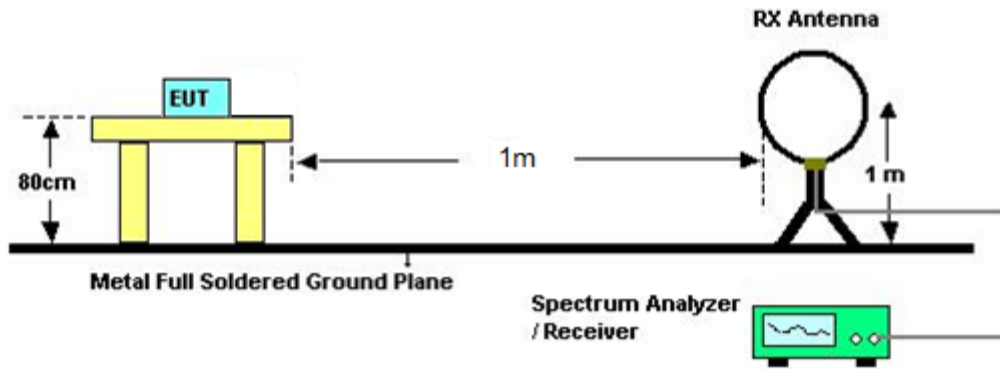

30 MHz to 1 GHz

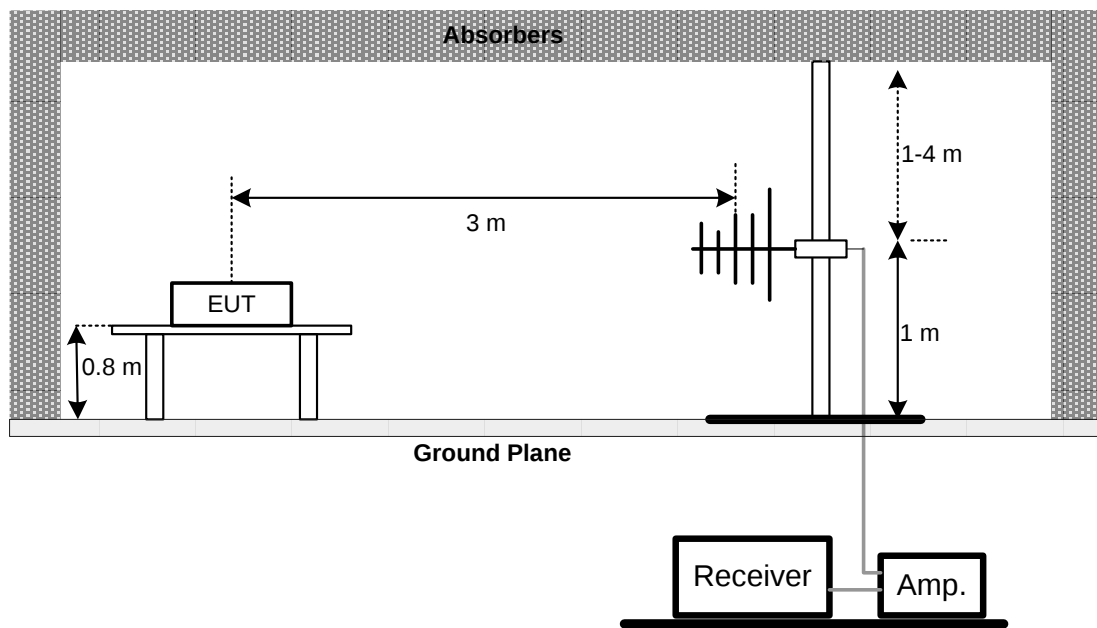

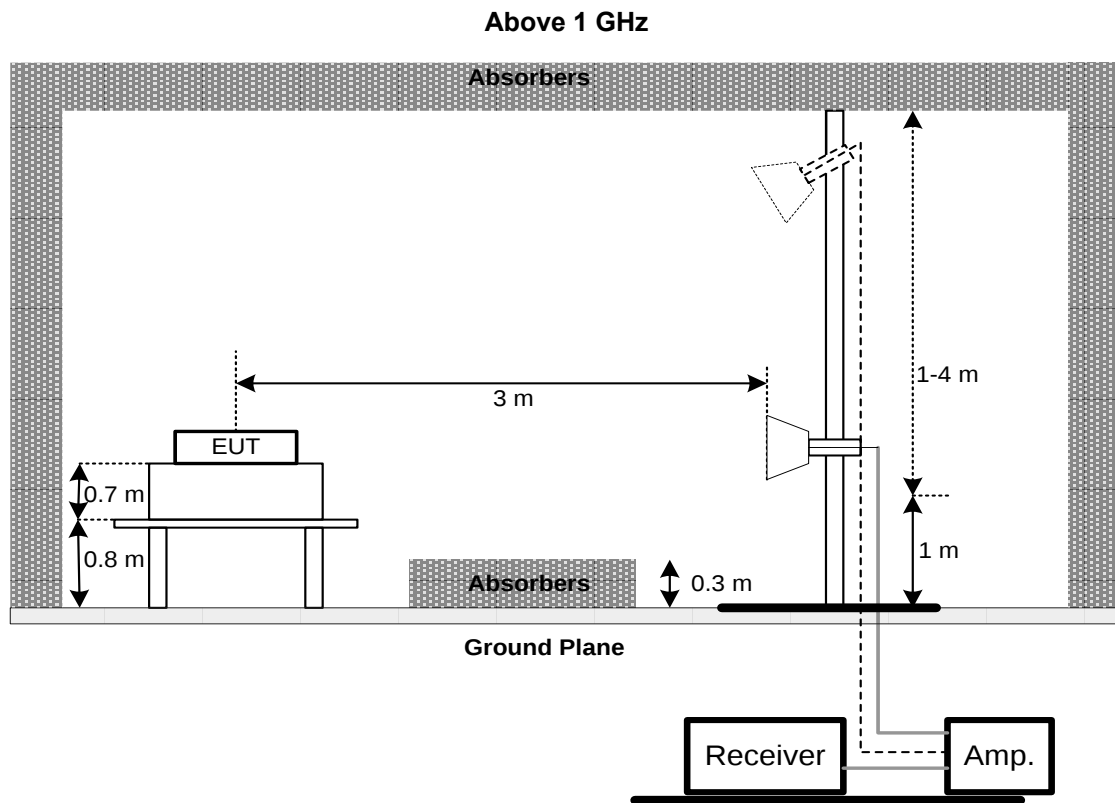

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

NOTE:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6 TEST RESULT – BELOW 30 MHZ

There were no emissions found below 30 MHz within 20 dB of the limit.

4.7 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

4.8 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX C.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 MAXIMUM E.I.R.P. TEST

5.1 LIMIT

Equipment Category	Band	Maximum e.i.r.p. Limit
Indoor access point client devices	U-NII 5 (5.925-6.425 GHz)	24 dBm
	U-NII 6 (6.425-6.525 GHz)	
	U-NII 7 (6.525-6.875 GHz)	
	U-NII 8 (6.875-7.125 GHz)	

* For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

According to 15.407(a)(11):

The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

5.2 TEST PROCEDURE

Referring to FCC KDB 987594 D02, clause E. and FCC KDB 789033 D02, clause E. 3 Measurement using a Power Meter (PM):

- a. The maximum peak conducted output power was performed in accordance with method of clause E. 3.
- b) Method PM-G (Measurement using a gated RF average power meter):
Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Referring to FCC KDB 987594 D02, clause H. Measurement of emission at elevation angles higher than 30° from horizon:

Note: Elevation angle is defined as 0° is horizontal and 90° is straight-up.

For fixed infrastructure, not electrically or mechanically steerable beam antenna

- a. If elevation plane radiation pattern is available:
 - (i) Determine the device intended mounting elevation angle and define 0° reference angle on the elevation plane radiation pattern.
 - (ii) Indicate any radiation pattern between 30° and 90° which has the highest gain.
 - (iii) Calculate the EIRP based on this highest gain and conducted output power.
 - (iv) Compare to the 125 mW limit to establish compliance.
 - (v) Include the elevation pattern data in the application filing with the test report to show how the calculations are made.

Note: For MIMO devices, take the maximum gain of each antenna and apply the guidance in KDB Publication 662911 for calculating the overall gain including directional gain for the maximum EIRP calculation.

- b. If the elevation plane radiation pattern is not available, but the antenna type (such as dipole omnidirectional, Yagi, parabolic, or sector antenna) has a symmetrical elevation plane pattern referenced at the main beam and all lobes on the main beam elevation plane have highest gains, then the following measurement method is acceptable to determine compliance:
 - (i) Determine the device's intended mounting elevation angle referenced to the horizon.
 - (ii) Rotate the EUT antenna by 90° around the main beam axis in a horizontal position to transform the measurement in elevation angle into an azimuth angle and define a 0° reference angle based on the device's intended mounting elevation angle.
 - (iii) Move the test antenna along the horizontal arc, or rotate the turntable with the EUT antenna placed at the center, between 30° and 90° relative to the 0° reference angle, and then continuing down from 90° to 30° on the other side of the pattern, while maintaining the test antenna pointing with constant distance to the EUT antenna. Search for the spot which has the highest measured emission. Both horizontal and vertical polarization shall be investigated to determine the maximum radiated emission level.

Note: Moving the test antenna along the horizontal arc, or rotating the turntable, shall be performed in an angular step size as small as possible, but not larger than 3°.

 - (iv) Calculate the EIRP based on the highest measured emission. Compare to the limit of 125 mW to determine compliance.
 - (v) The antenna pattern measurements must be included in the filing.

For All Other Antenna Types

For all other antenna types (such as patch antennas, array antennas, antennas with irregular radiator shapes, etc.) which have any combination of following characteristics:

- Asymmetrical, complex radiation patterns
- 2-D or 3-D steerable beam
- Portable/mobile, not fixed infrastructure device

Provide the following information in the report:

- a. Describe what type of antenna is used.
- b. Determine by calculation, measurement or simulation, all radiation lobes/beams, which have EIRP higher than 125 mW within a 3-dB elevation beamwidth.
Provide an explanation of how these antenna beams are controlled to be kept below the 30° elevation angle. The explanation should include device installation instructions, mechanical control, electro-mechanical control or software algorithms, if the beams are electrically controlled by software.

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 TEST SETUP**5.5 EUT OPERATING CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT

Please refer to the APPENDIX D.

6 CONTENTION BASED PROTOCOL

6.1 LIMIT

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. (See note) To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Note: The EUT with a lowest gain is 4.27dBi. All power injected into EUT should be $-62+4.27=-57.73$ dBm.

6.2 TEST PROCEDURE

a. Number of times detection threshold:

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1}=f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel

Where:

BW_{EUT} : Transmission bandwidth of EUT signal.

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal).

f_{c1} : Center frequency of EUT transmission.

f_{c2} : Center frequency of simulated incumbent signal.


- Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use step b table to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
- Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer and the EUT as show in the block diagram below.
- Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer.
- Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.

- f. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
- g. Refer to step b table to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step c, choose a different center frequency for the AWGN signal and repeat the process.

6.3 DEVIATION FROM TEST STANDARD

No deviation.

6.4 TEST SETUP

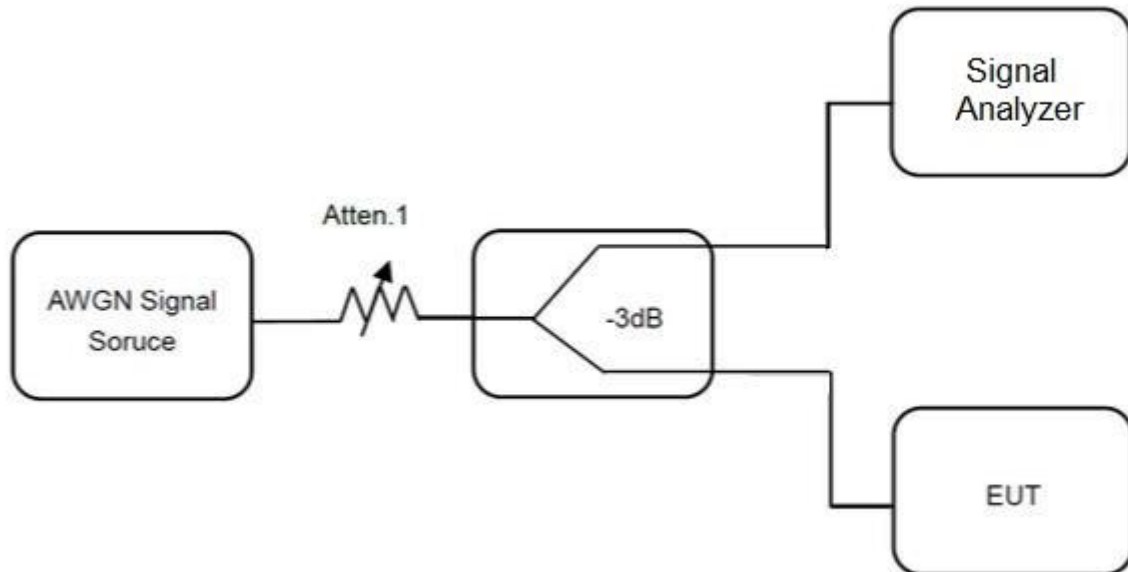

6.5 EUT OPERATING CONDITIONS

The EUT was Configured to be in normally transmitting mode with a constant duty cycle.

6.6 TEST RESULT

Please refer to the APPENDIX D.

7 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	TWO-LINE V-NETWORK	R&S	ENV216	101051	2022/6/15	2023/6/14
2	Test Cable	EMCI	EMCRG58-BM-BM-9000	210501	2022/5/2	2023/5/1
3	EMI Test Receiver	R&S	ESR 7	101433	2022/11/16	2023/11/15
4	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC330N	980850	2022/9/19	2023/9/18
2	Preamplifier	EMCI	EMC118A45SE	980819	2022/3/8	2023/3/7
3	Preamplifier	EMCI	EMC184045SE	980882	2022/2/9	2023/2/8
4	Preamplifier	EMCI	EMC001340	980579	2022/9/30	2023/9/29
5	Test Cable	EMCI	EMC104-SM-SM-1000	220319	2022/3/15	2023/3/14
6	Test Cable	EMCI	EMC104-SM-SM-3000	220322	2022/3/15	2023/3/14
7	Test Cable	EMCI	EMC104-SM-SM-7000	220324	2022/3/15	2023/3/14
8	EXA Signal Analyzer	keysight	N9020B	MY57120120	2022/3/7	2023/3/6
9	Loop Ant	Electro-Metrics	EMCI-LPA600	291	2022/9/19	2023/9/18
10	Horn Antenna	RFSPIN	DRH18-E	211202A18EN	2022/5/18	2023/5/17
11	Horn Ant	Schwarzbeck	BBHA 9170D	1136	2022/5/18	2023/5/17
12	Log-bicon Antenna	Schwarzbeck	VULB9168	1369	2022/5/20	2023/5/19
13	6dB Attenuator	EMCI	EMCI-N-6-06	AT-N0625	2022/5/20	2023/5/19
14	Test Cable	EMCI	EMC101G-KM-KM-3000	220329	2022/3/15	2023/3/14
15	Test Cable	EMCI	EMC102-KM-KM-1000	220327	2022/3/15	2023/3/14
16	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A

Maximum e.i.r.p.						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Power Meter	Anritsu	ML2495A	1128008	2022/6/1	2023/5/31
2	Power Sensor	Anritsu	MA2411B	1126001	2022/6/1	2023/5/31

Contention Based Protocol						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	Keysight	N9010A	MY54200240	2022/6/9	2023/6/8
2	MXG Vector Signal Generator	Agilent	N5182B	MY51350711	2022/4/14	2023/4/13
3	POWER SPLITTER	Mini-Circuits	ZFRSC-183-S+	N/A	2022/5/12	2023/5/11
4	POWER SPLITTER	Mini-Cicuits	ZFRSC-123-S+	N/A	2022/5/12	2023/5/11

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

8 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2209C159-1 (APPENDIX-TEST PHOTOS).

9 EUT PHOTOS

Please refer to document Appendix No.: EP-2209C159-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2022/11/23
Test Frequency	-	Phase	Line

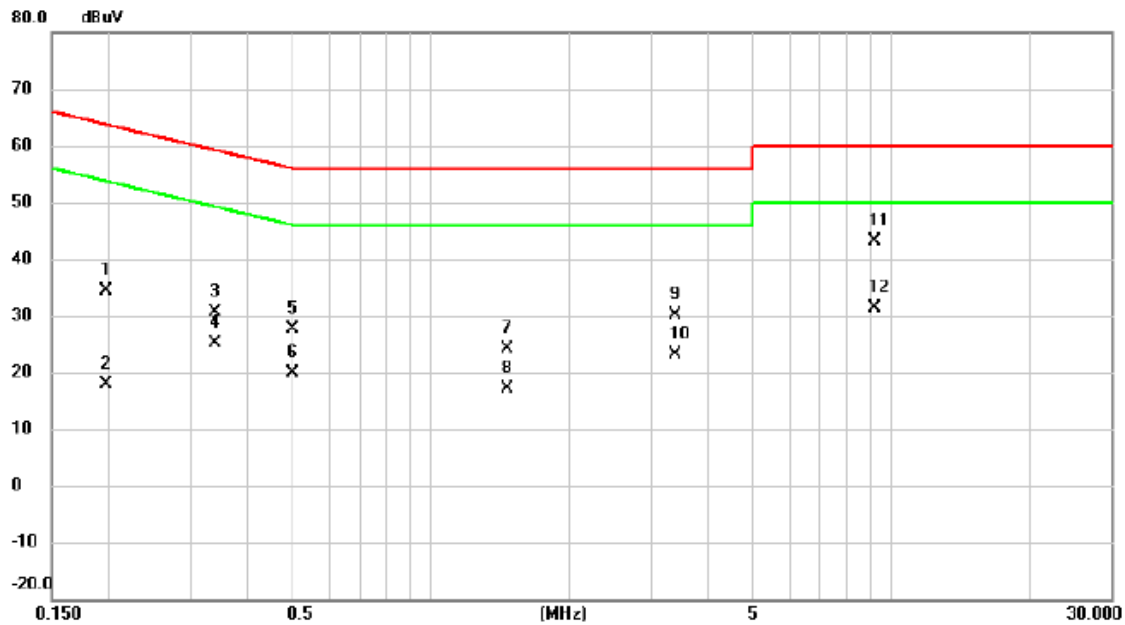


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1973	34.42	0.02	34.44	63.72	-29.28	QP	
2		0.1973	17.97	0.02	17.99	53.72	-35.73	AVG	
3		0.3390	30.54	0.02	30.56	59.23	-28.67	QP	
4		0.3390	25.09	0.02	25.11	49.23	-24.12	AVG	
5		0.4987	27.66	0.02	27.68	56.02	-28.34	QP	
6		0.4987	19.84	0.02	19.86	46.02	-26.16	AVG	
7		1.4663	24.08	0.06	24.14	56.00	-31.86	QP	
8		1.4663	17.15	0.06	17.21	46.00	-28.79	AVG	
9		3.3990	30.14	0.10	30.24	56.00	-25.76	QP	
10		3.3990	23.12	0.10	23.22	46.00	-22.78	AVG	
11	*	9.2108	42.83	0.18	43.01	60.00	-16.99	QP	
12		9.2108	31.15	0.18	31.33	50.00	-18.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2022/11/23
Test Frequency	-	Phase	Neutral

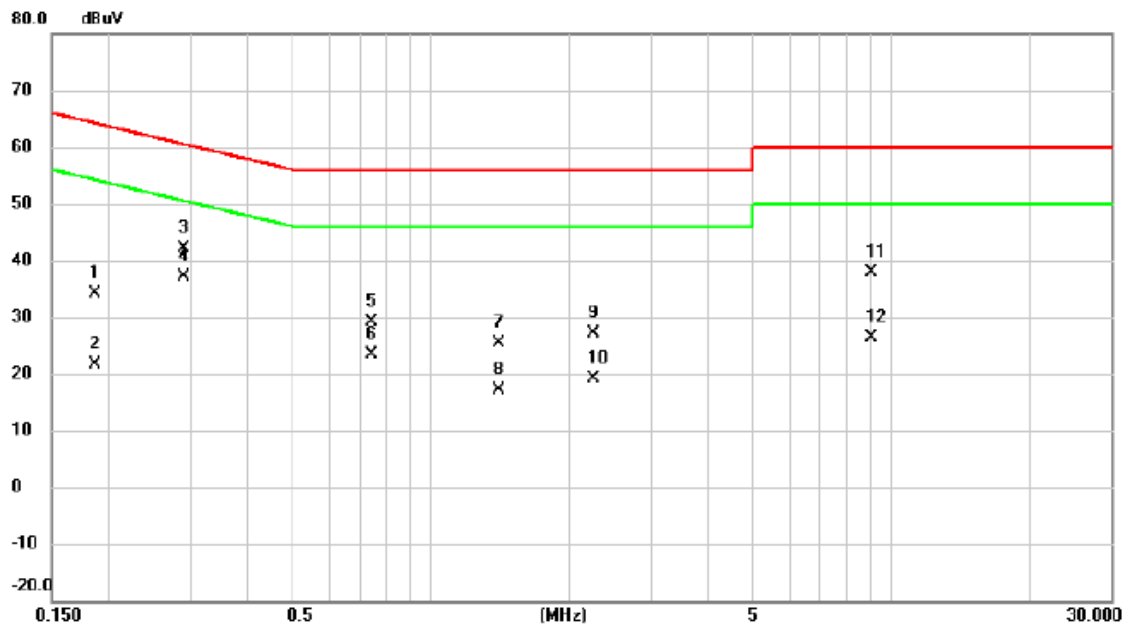


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1860	34.23	0.02	34.25	64.21	-29.96	QP	
2		0.1860	21.49	0.02	21.51	54.21	-32.70	AVG	
3		0.2895	42.21	0.02	42.23	60.54	-18.31	QP	
4	*	0.2895	37.00	0.02	37.02	50.54	-13.52	AVG	
5		0.7440	29.20	0.03	29.23	56.00	-26.77	QP	
6		0.7440	23.37	0.03	23.40	46.00	-22.60	AVG	
7		1.4078	25.20	0.06	25.26	56.00	-30.74	QP	
8		1.4078	17.01	0.06	17.07	46.00	-28.93	AVG	
9		2.2605	27.01	0.08	27.09	56.00	-28.91	QP	
10		2.2605	19.03	0.08	19.11	46.00	-26.89	AVG	
11		9.0375	37.60	0.18	37.78	60.00	-22.22	QP	
12		9.0375	26.27	0.18	26.45	50.00	-23.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2022/11/23
Test Frequency	-	Phase	Line

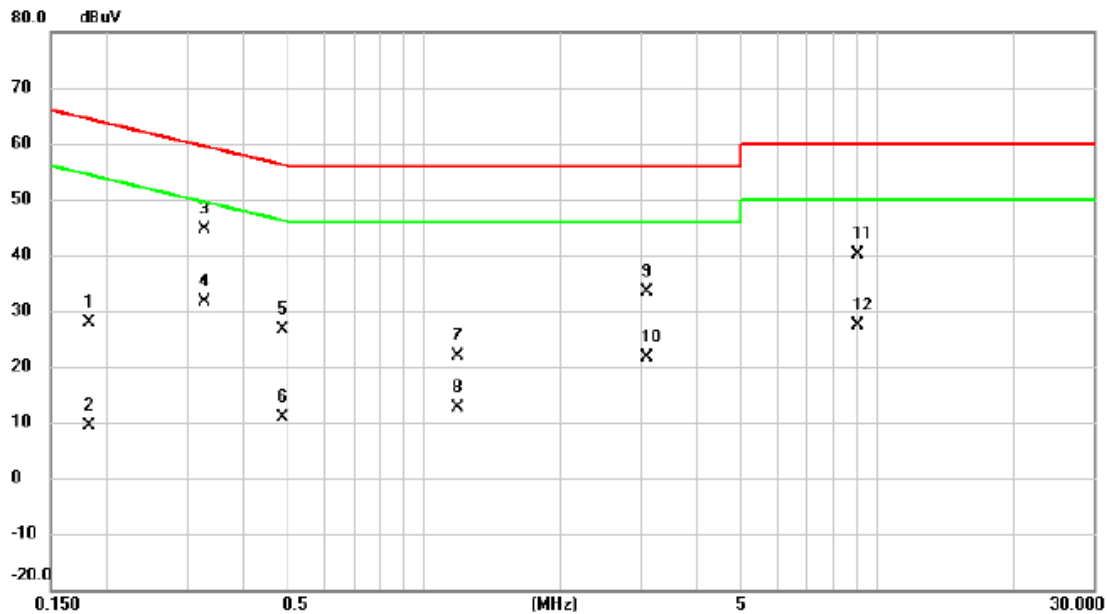


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1824	27.92	0.02	27.94	64.38	-36.44	QP	
2	0.1824	9.42	0.02	9.44	54.38	-44.94	AVG	
3 *	0.3277	44.71	0.02	44.73	59.51	-14.78	QP	
4	0.3277	31.71	0.02	31.73	49.51	-17.78	AVG	
5	0.4852	26.63	0.02	26.65	56.25	-29.60	QP	
6	0.4852	10.85	0.02	10.87	46.25	-35.38	AVG	
7	1.1850	21.71	0.05	21.76	56.00	-34.24	QP	
8	1.1850	12.67	0.05	12.72	46.00	-33.28	AVG	
9	3.1042	33.19	0.10	33.29	56.00	-22.71	QP	
10	3.1042	21.48	0.10	21.58	46.00	-24.42	AVG	
11	9.0555	39.92	0.18	40.10	60.00	-19.90	QP	
12	9.0555	27.16	0.18	27.34	50.00	-22.66	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.


Test Mode	Idle	Tested Date	2022/11/23
Test Frequency	-	Phase	Neutral

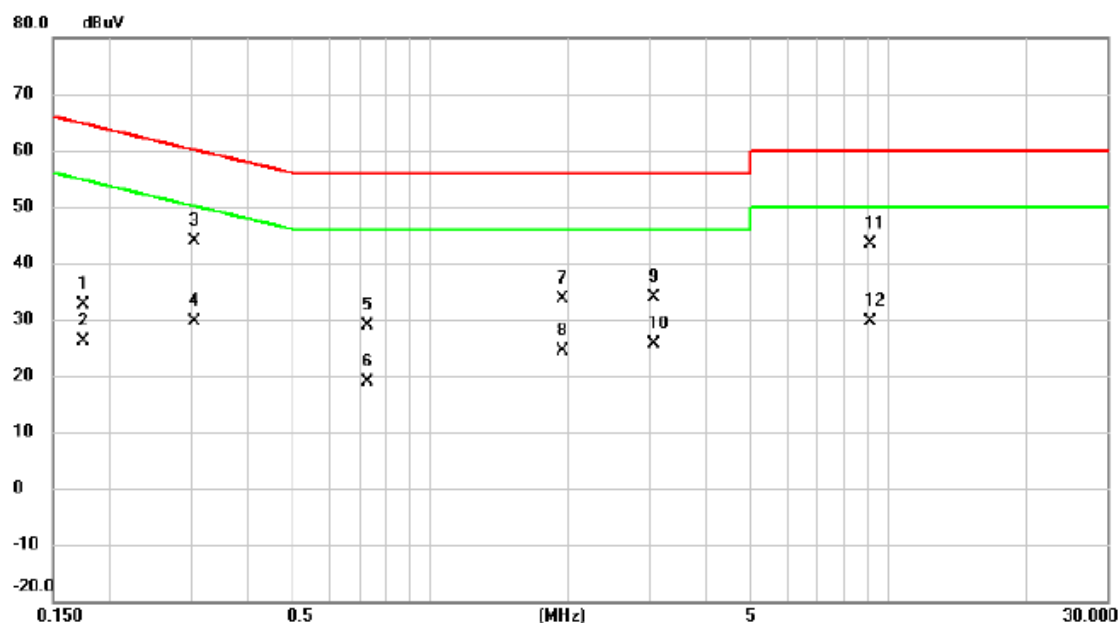

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1747	32.53	0.02	32.55	64.73	-32.18	QP	
2		0.1747	26.19	0.02	26.21	54.73	-28.52	AVG	
3	*	0.3052	43.93	0.02	43.95	60.10	-16.15	QP	
4		0.3052	29.65	0.02	29.67	50.10	-20.43	AVG	
5		0.7282	28.91	0.03	28.94	56.00	-27.06	QP	
6		0.7282	18.92	0.03	18.95	46.00	-27.05	AVG	
7		1.9387	33.60	0.07	33.67	56.00	-22.33	QP	
8		1.9387	24.34	0.07	24.41	46.00	-21.59	AVG	
9		3.0750	33.88	0.10	33.98	56.00	-22.02	QP	
10		3.0750	25.45	0.10	25.55	46.00	-20.45	AVG	
11		9.1072	43.30	0.18	43.48	60.00	-16.52	QP	
12		9.1072	29.50	0.18	29.68	50.00	-20.32	AVG	

APPENDIX B UNDESIRABLE EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/1/17
Test Frequency	7115MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

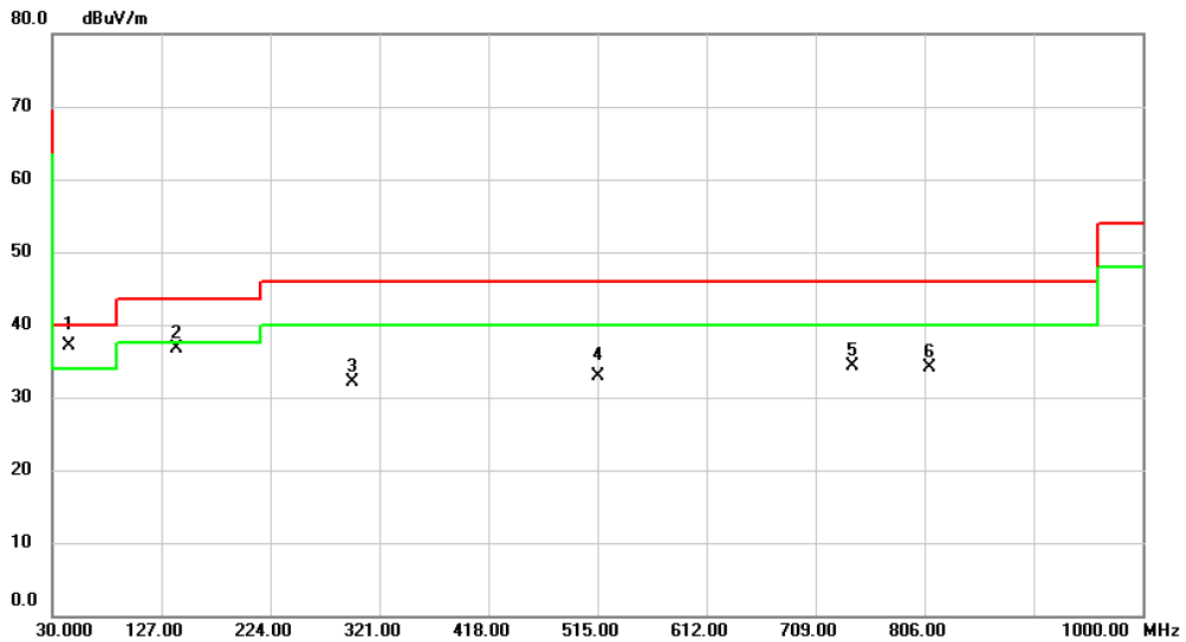


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	45.3260	48.45	-11.28	37.17	40.00	-2.83	QP	
2		141.1620	49.12	-12.42	36.70	43.50	-6.80	peak	
3		296.9763	43.61	-11.51	32.10	46.00	-13.90	peak	
4		515.3232	39.06	-6.23	32.83	46.00	-13.17	QP	
5		742.5297	36.00	-1.74	34.26	46.00	-11.74	peak	
6		809.9770	35.00	-0.95	34.05	46.00	-11.95	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/1/17
Test Frequency	7115MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

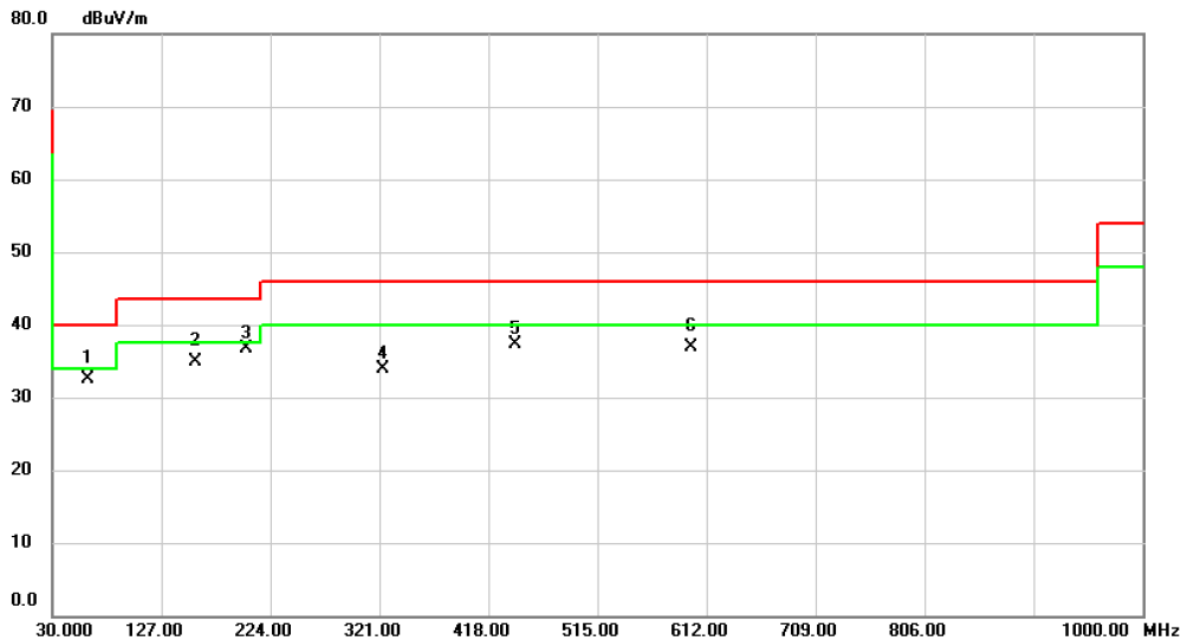


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		61.4280	44.87	-12.30	32.57	40.00	-7.43	QP	
2		157.0377	46.71	-11.77	34.94	43.50	-8.56	QP	
3	*	202.4660	51.86	-15.23	36.63	43.50	-6.87	peak	
4		324.0070	44.90	-10.94	33.96	46.00	-12.04	peak	
5		441.9590	44.94	-7.62	37.32	46.00	-8.68	peak	
6		598.7433	41.05	-4.20	36.85	46.00	-9.15	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C UNDESIRABLE EMISSIONS - ABOVE 1 GHZ

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/11/29
Test Frequency	7115MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

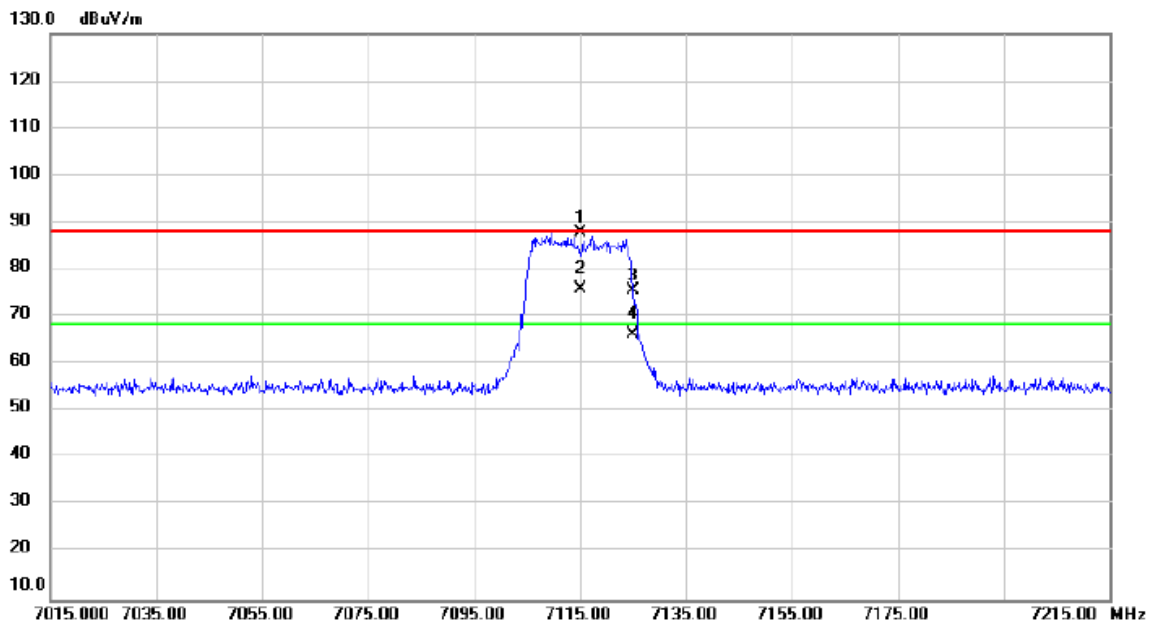


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		7115.000	82.34	5.51	87.85	88.20	-0.35	peak	No Limit
2	*	7115.000	70.42	5.51	75.93	68.20	7.73	AVG	No Limit
3		7125.000	69.90	5.52	75.42	88.20	-12.78	peak	
4		7125.000	60.66	5.52	66.18	68.20	-2.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2022/11/29
Test Frequency	6345MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

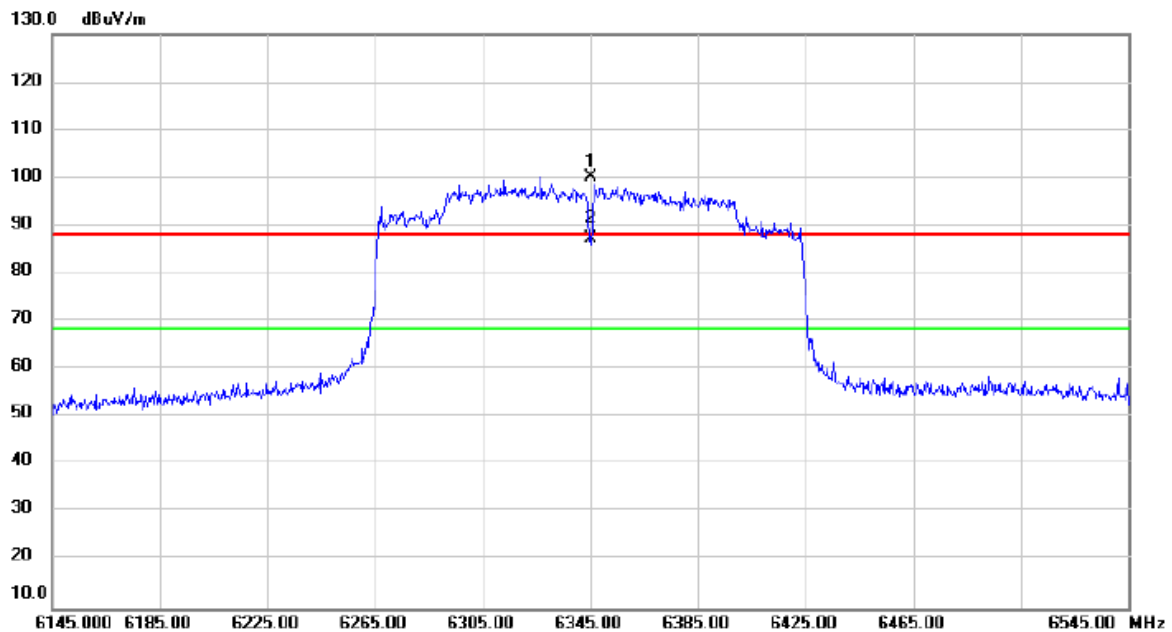


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6345.000	95.91	4.26	100.17	88.20	11.97	peak	No Limit
2	*	6345.000	82.88	4.26	87.14	68.20	18.94	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2022/11/29
Test Frequency	6505MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

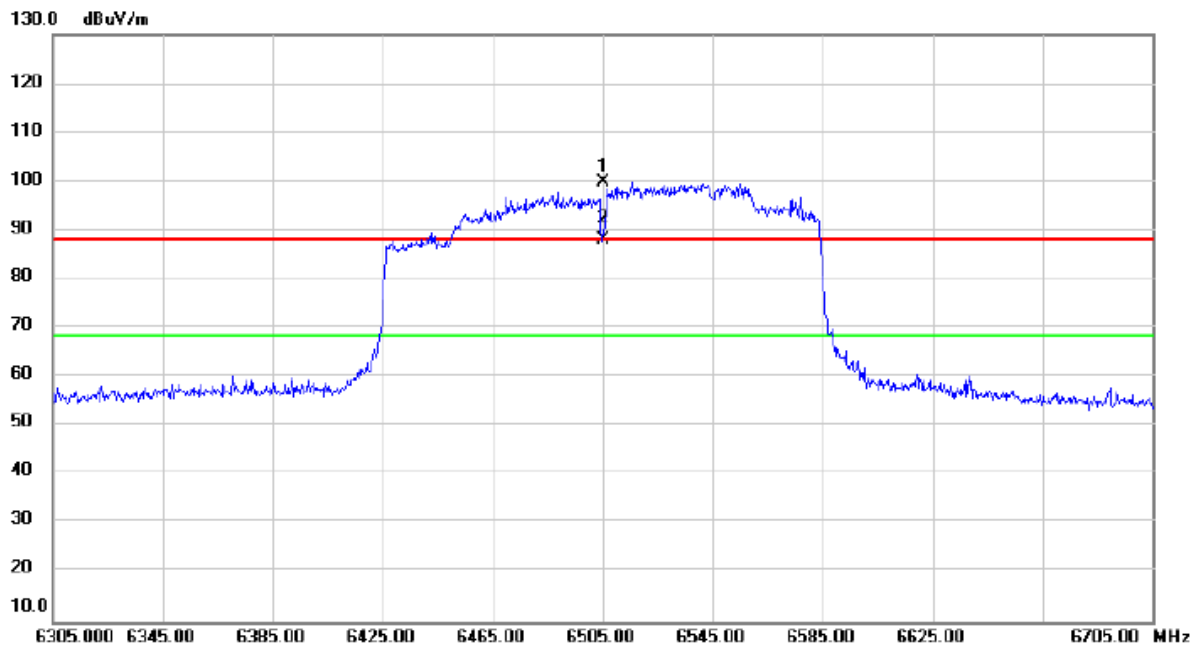


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6505.000	94.77	5.05	99.82	88.20	11.62	peak	No Limit
2	*	6505.000	83.25	5.05	88.30	68.20	20.10	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2022/11/29
Test Frequency	6665MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

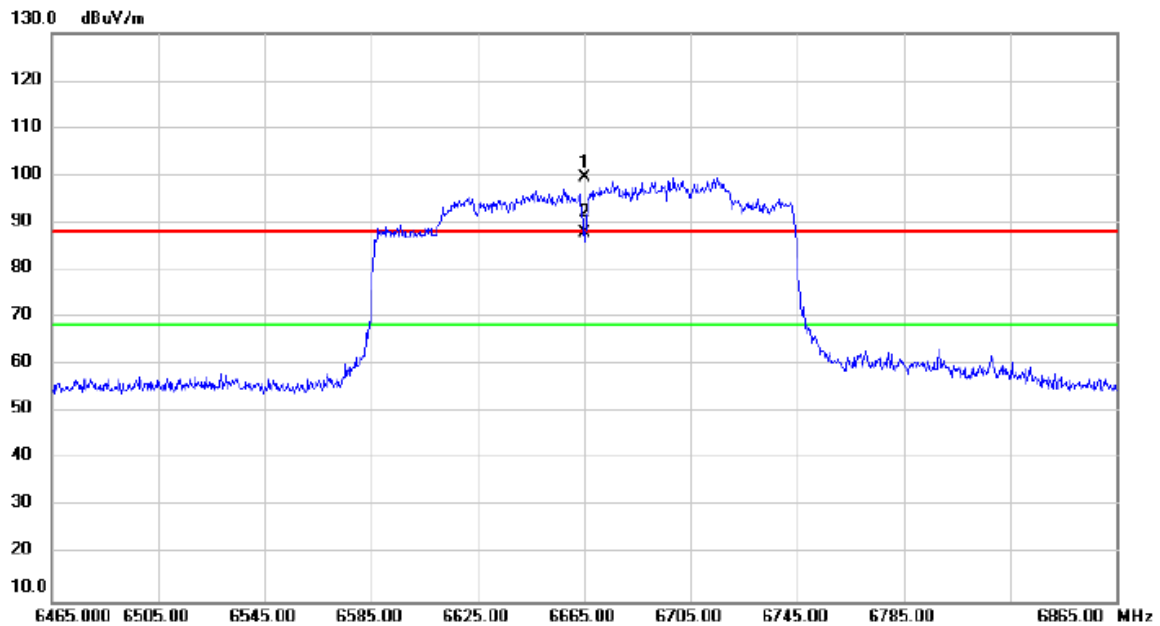


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6665.000	94.50	5.19	99.69	88.20	11.49	peak	No Limit
2	*	6665.000	82.69	5.19	87.88	68.20	19.68	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2022/11/29
Test Frequency	6985MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

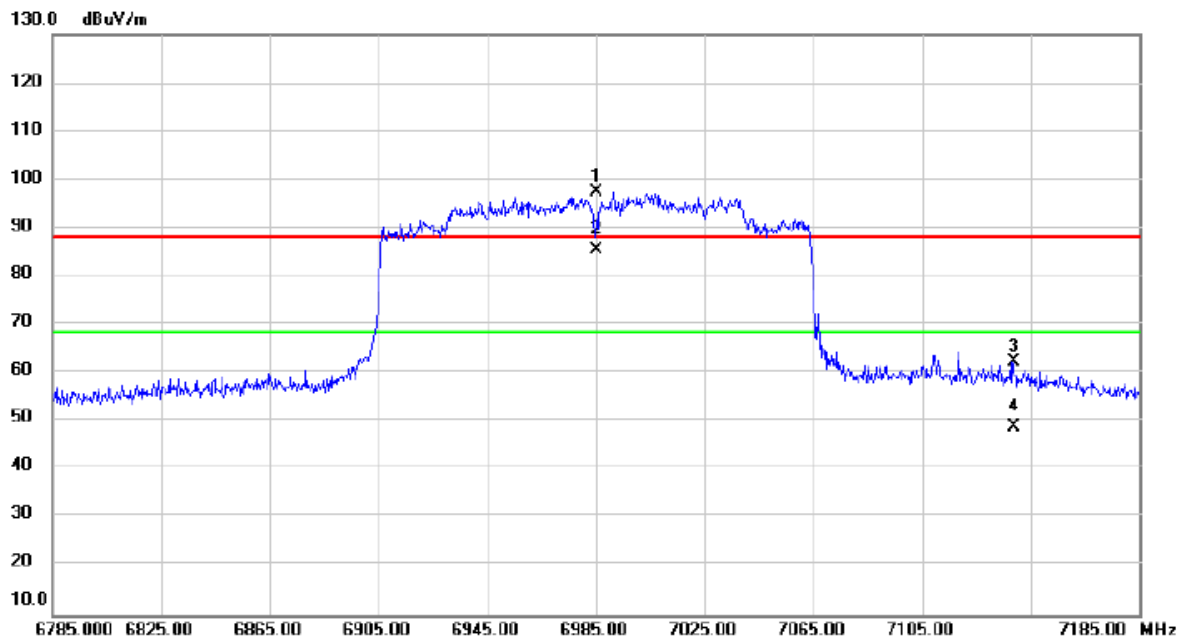


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6985.000	91.95	5.47	97.42	88.20	9.22	peak	No Limit
2	*	6985.000	80.07	5.47	85.54	68.20	17.34	AVG	No Limit
3		7138.760	56.99	5.51	62.50	88.20	-25.70	peak	
4		7138.760	43.49	5.51	49.00	68.20	-19.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/11/29
Test Frequency	7115MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

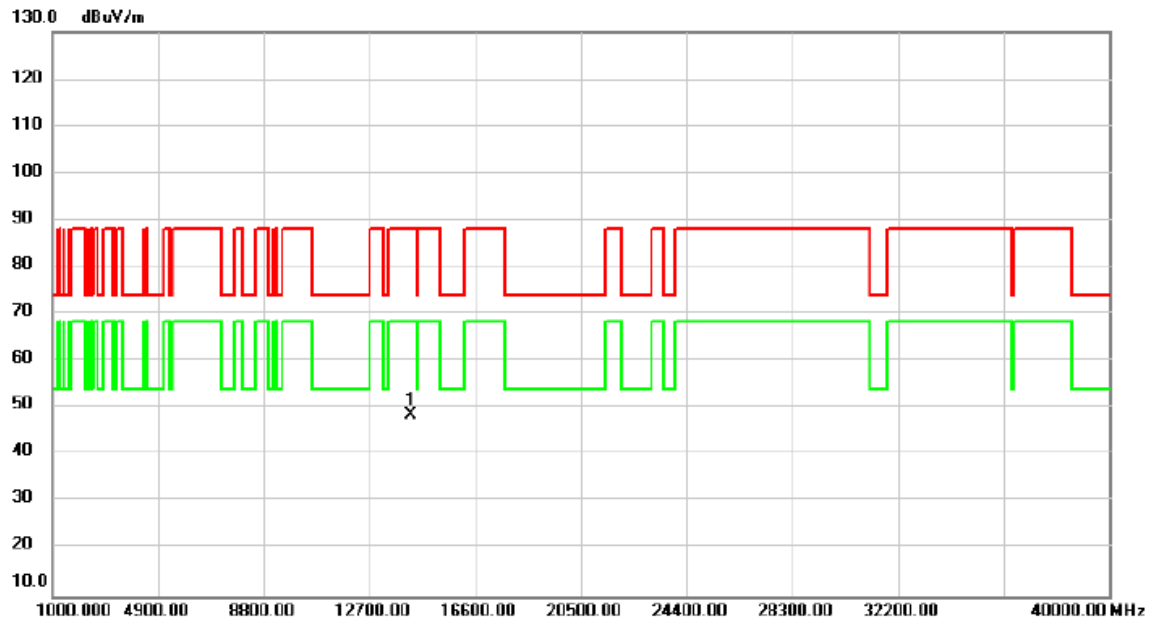


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	14230.00	41.29	7.24	48.53	88.20	-39.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/11/29
Test Frequency	7115MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

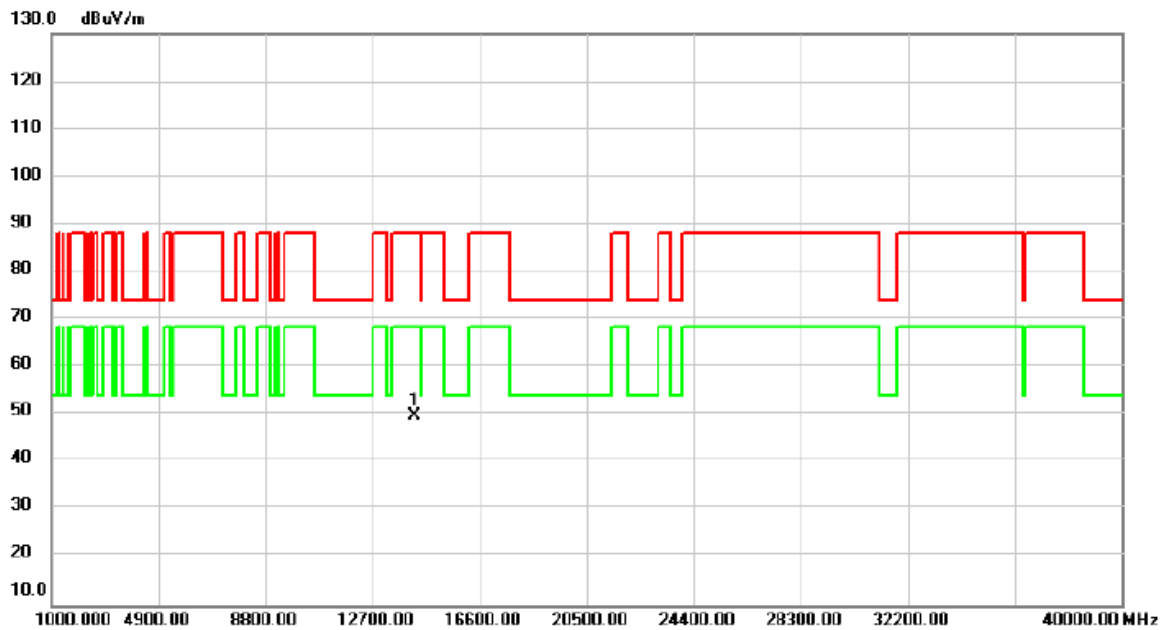


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	14230.00	42.53	7.24	49.77	88.20	-38.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2022/11/29
Test Frequency	6345MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

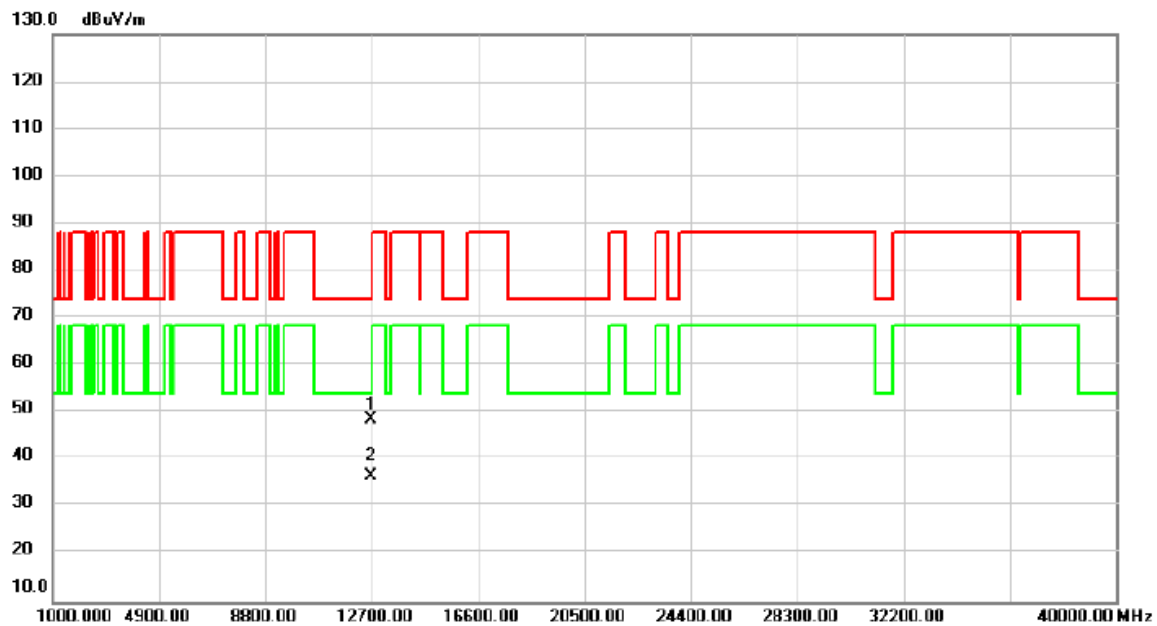


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		12690.00	41.19	7.44	48.63	74.00	-25.37	peak	
2	*	12690.00	29.08	7.44	36.52	54.00	-17.48	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2022/11/29
Test Frequency	6345MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

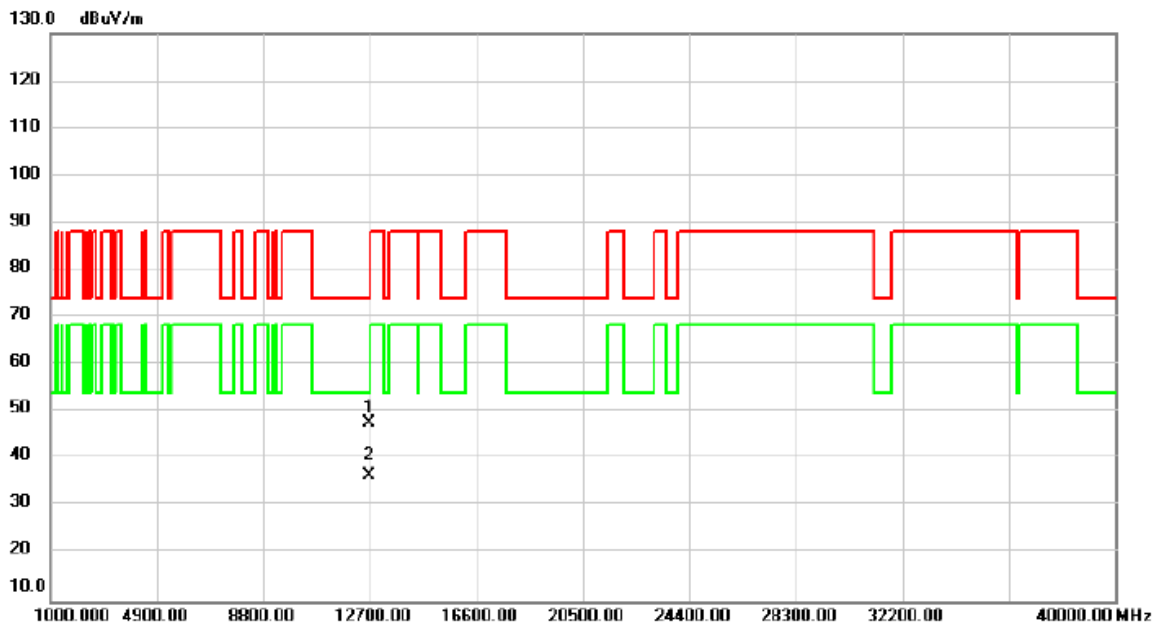


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		12690.00	40.28	7.44	47.72	74.00	-26.28	peak	
2	*	12690.00	28.99	7.44	36.43	54.00	-17.57	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2022/11/29
Test Frequency	6505MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

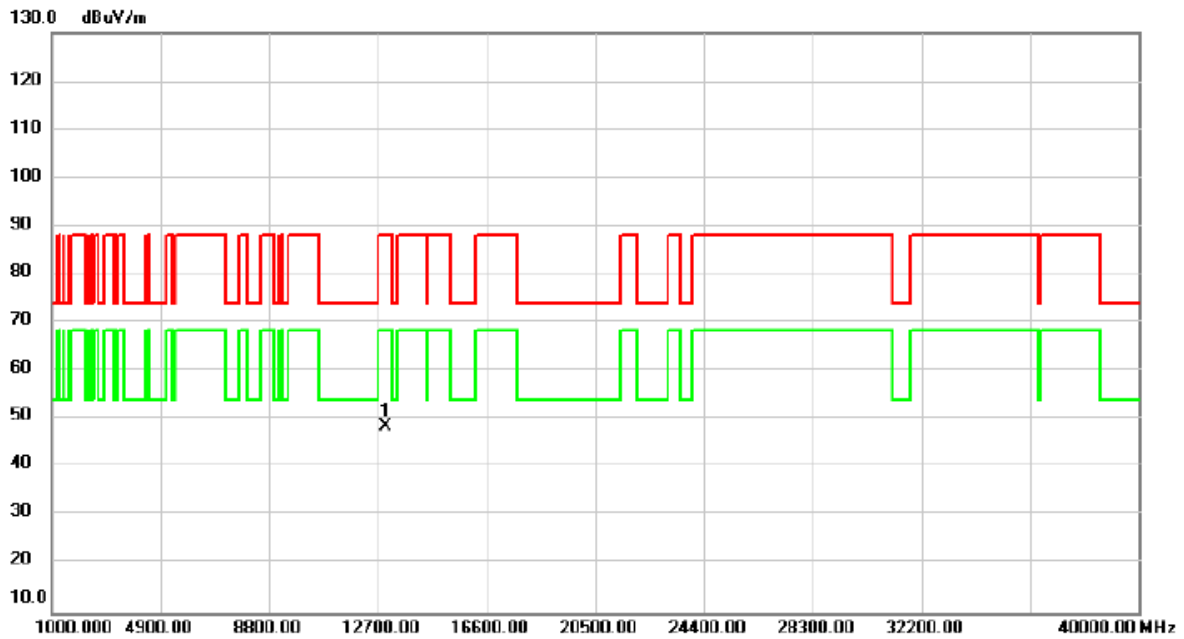


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13010.00	41.00	7.66	48.66	88.20	-39.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2022/11/29
Test Frequency	6505MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

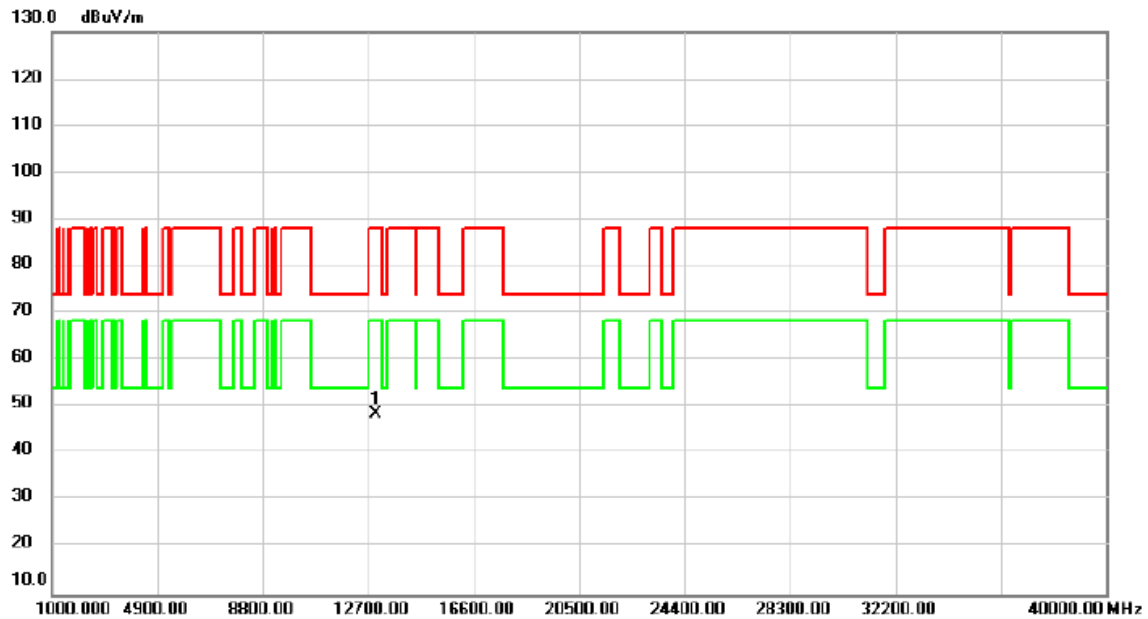


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13010.00	41.03	7.66	48.69	88.20	-39.51	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2022/11/29
Test Frequency	6665MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

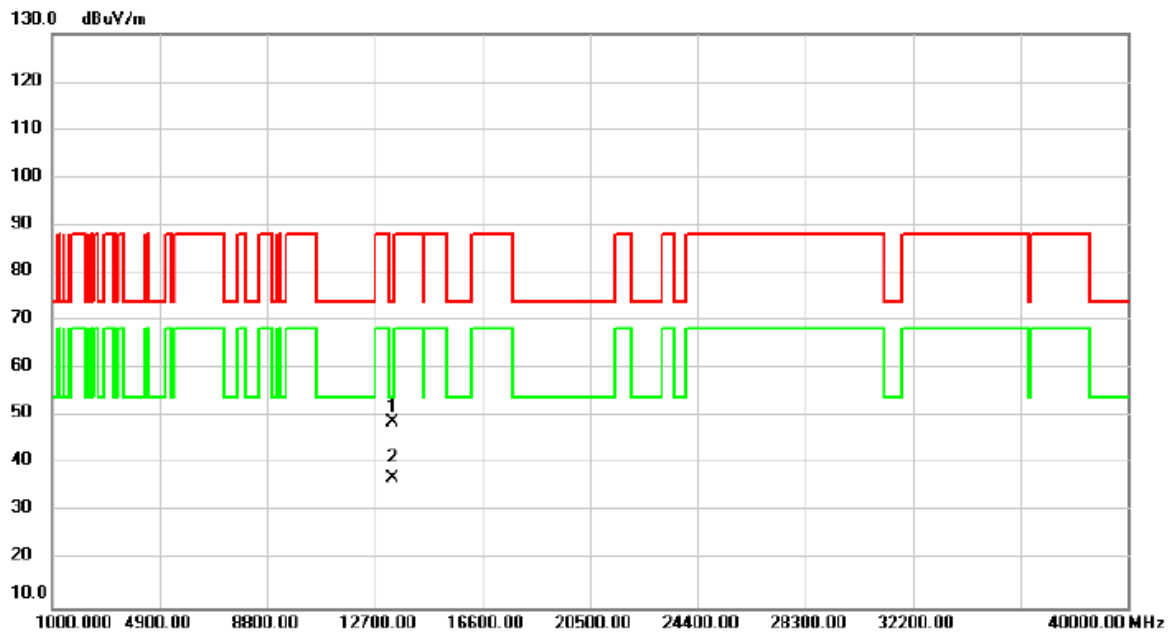


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		13330.00	41.58	7.23	48.81	74.00	-25.19	peak	
2	*	13330.00	29.84	7.23	37.07	54.00	-16.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2022/11/29
Test Frequency	6665MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

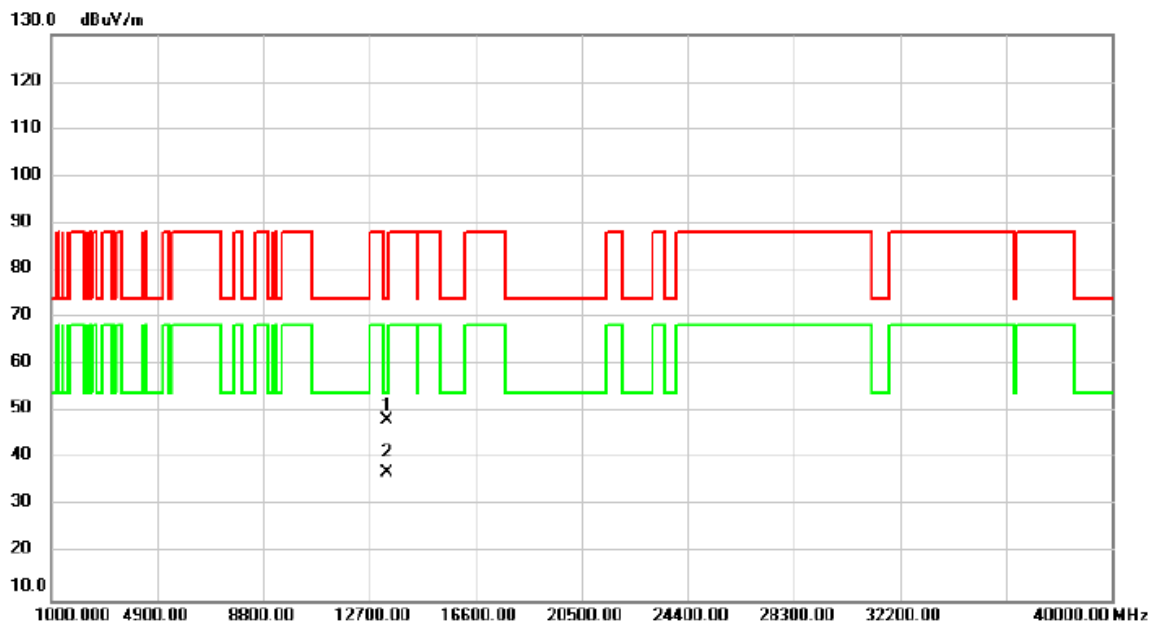


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		13330.00	40.87	7.23	48.10	74.00	-25.90	peak	
2	*	13330.00	29.94	7.23	37.17	54.00	-16.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2022/11/29
Test Frequency	6985MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

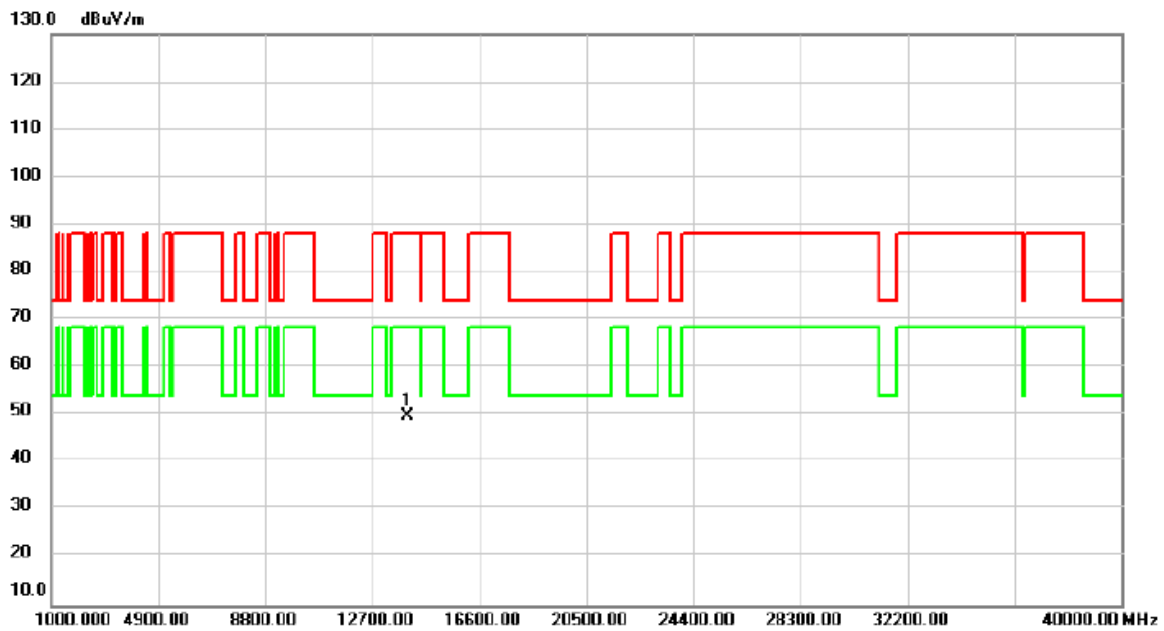


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13970.00	42.44	7.22	49.66	88.20	-38.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2022/11/29
Test Frequency	6985MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

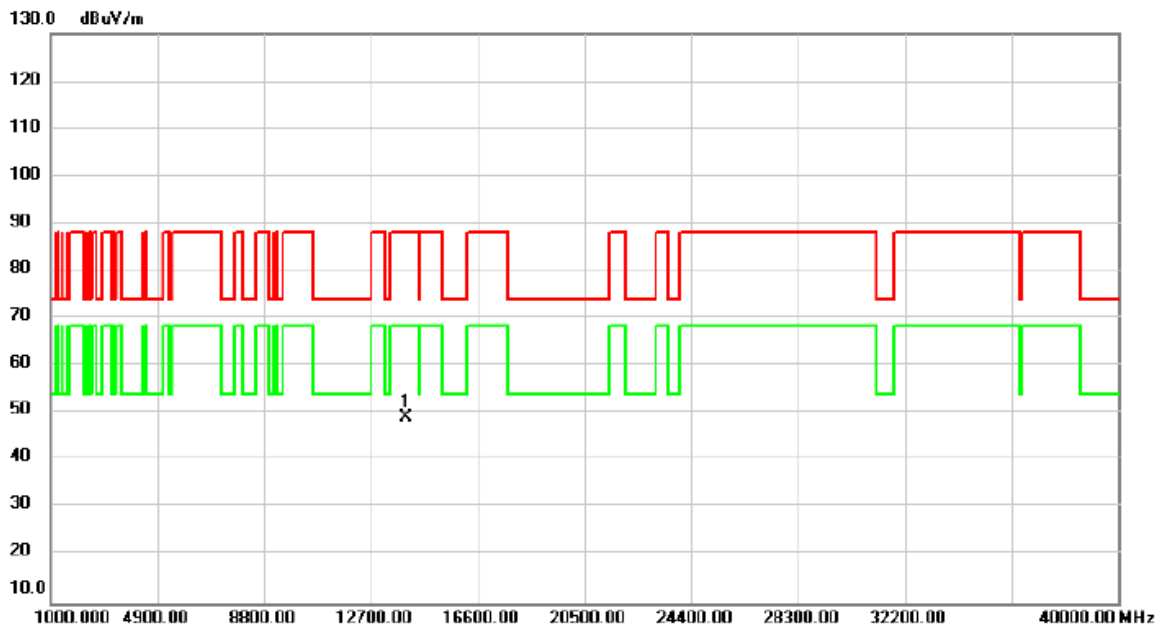

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13970.00	42.04	7.22	49.26	88.20	-38.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D MAXIMUM E.I.R.P.

Test Mode	IEEE 802.11ax (HE20)_Aux Ant.	Tested Date	2022/11/30
-----------	-------------------------------	-------------	------------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
5955	1.52	0.0014	6.23	0.0042	24.00	0.2512	Pass
6175	1.72	0.0015	6.43	0.0044	24.00	0.2512	Pass
6415	1.49	0.0014	6.20	0.0042	24.00	0.2512	Pass
6435	2.24	0.0017	6.95	0.0050	24.00	0.2512	Pass
6475	2.12	0.0016	6.83	0.0048	24.00	0.2512	Pass
6515	2.37	0.0017	7.08	0.0051	24.00	0.2512	Pass
6535	1.65	0.0015	6.36	0.0043	24.00	0.2512	Pass
6695	1.35	0.0014	6.06	0.0040	24.00	0.2512	Pass
6855	1.63	0.0015	6.34	0.0043	24.00	0.2512	Pass
6875	1.59	0.0014	6.30	0.0043	24.00	0.2512	Pass
6995	2.03	0.0016	6.74	0.0047	24.00	0.2512	Pass
7095	1.75	0.0015	6.46	0.0044	24.00	0.2512	Pass
7115	-10.49	0.0001	-5.78	0.0003	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax (HE20)_Main Ant.	Tested Date	2022/11/30
-----------	--------------------------------	-------------	------------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
5955	2.46	0.0018	7.17	0.0052	24.00	0.2512	Pass
6175	2.49	0.0018	7.20	0.0052	24.00	0.2512	Pass
6415	2.50	0.0018	7.21	0.0053	24.00	0.2512	Pass
6435	3.37	0.0022	8.08	0.0064	24.00	0.2512	Pass
6475	3.09	0.0020	7.80	0.0060	24.00	0.2512	Pass
6515	2.83	0.0019	7.54	0.0057	24.00	0.2512	Pass
6535	2.36	0.0017	7.07	0.0051	24.00	0.2512	Pass
6695	2.27	0.0017	6.98	0.0050	24.00	0.2512	Pass
6855	2.33	0.0017	7.04	0.0051	24.00	0.2512	Pass
6875	2.36	0.0017	7.07	0.0051	24.00	0.2512	Pass
6995	2.36	0.0017	7.07	0.0051	24.00	0.2512	Pass
7095	2.10	0.0016	6.81	0.0048	24.00	0.2512	Pass
7115	-11.67	0.0001	-6.96	0.0002	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax (HE20)_Total	Tested Date	2022/11/30
-----------	----------------------------	-------------	------------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
5955	5.03	0.0032	9.74	0.0094	24.00	0.2512	Pass
6175	5.13	0.0033	9.84	0.0096	24.00	0.2512	Pass
6415	5.03	0.0032	9.74	0.0094	24.00	0.2512	Pass
6435	5.85	0.0038	10.56	0.0114	24.00	0.2512	Pass
6475	5.64	0.0037	10.35	0.0108	24.00	0.2512	Pass
6515	5.62	0.0036	10.33	0.0108	24.00	0.2512	Pass
6535	5.03	0.0032	9.74	0.0094	24.00	0.2512	Pass
6695	4.84	0.0031	9.55	0.0090	24.00	0.2512	Pass
6855	5.00	0.0032	9.71	0.0094	24.00	0.2512	Pass
6875	5.00	0.0032	9.71	0.0094	24.00	0.2512	Pass
6995	5.21	0.0033	9.92	0.0098	24.00	0.2512	Pass
7095	4.94	0.0031	9.65	0.0092	24.00	0.2512	Pass
7115	-8.03	0.0002	-3.32	0.0005	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax (HE40)_Aux Ant.	Tested Date	2022/11/30
-----------	-------------------------------	-------------	------------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
5965	4.81	0.0030	9.52	0.0090	24.00	0.2512	Pass
6165	4.51	0.0028	9.22	0.0084	24.00	0.2512	Pass
6405	4.57	0.0029	9.28	0.0085	24.00	0.2512	Pass
6445	5.17	0.0033	9.88	0.0097	24.00	0.2512	Pass
6485	5.47	0.0035	10.18	0.0104	24.00	0.2512	Pass
6525	5.68	0.0037	10.39	0.0109	24.00	0.2512	Pass
6685	4.37	0.0027	9.08	0.0081	24.00	0.2512	Pass
6845	4.52	0.0028	9.23	0.0084	24.00	0.2512	Pass
6885	5.24	0.0033	9.95	0.0099	24.00	0.2512	Pass
7085	5.48	0.0035	10.19	0.0104	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax (HE40)_Main Ant.	Tested Date	2022/11/30
-----------	--------------------------------	-------------	------------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
5965	5.22	0.0033	9.93	0.0098	24.00	0.2512	Pass
6165	5.02	0.0032	9.73	0.0094	24.00	0.2512	Pass
6405	5.24	0.0033	9.95	0.0099	24.00	0.2512	Pass
6445	5.81	0.0038	10.52	0.0113	24.00	0.2512	Pass
6485	5.94	0.0039	10.65	0.0116	24.00	0.2512	Pass
6525	6.01	0.0040	10.72	0.0118	24.00	0.2512	Pass
6685	4.87	0.0031	9.58	0.0091	24.00	0.2512	Pass
6845	4.92	0.0031	9.63	0.0092	24.00	0.2512	Pass
6885	5.76	0.0038	10.47	0.0111	24.00	0.2512	Pass
7085	5.72	0.0037	10.43	0.0110	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax (HE40)_Total	Tested Date	2022/11/30
-----------	----------------------------	-------------	------------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
5965	8.03	0.0064	12.74	0.0188	24.00	0.2512	Pass
6165	7.78	0.0060	12.49	0.0177	24.00	0.2512	Pass
6405	7.93	0.0062	12.64	0.0184	24.00	0.2512	Pass
6445	8.51	0.0071	13.22	0.0210	24.00	0.2512	Pass
6485	8.72	0.0075	13.43	0.0220	24.00	0.2512	Pass
6525	8.86	0.0077	13.57	0.0228	24.00	0.2512	Pass
6685	7.64	0.0058	12.35	0.0172	24.00	0.2512	Pass
6845	7.73	0.0059	12.44	0.0175	24.00	0.2512	Pass
6885	8.52	0.0071	13.23	0.0210	24.00	0.2512	Pass
7085	8.61	0.0073	13.32	0.0215	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax (HE80) _Aux Ant.	Tested Date	2022/11/30
-----------	--------------------------------	-------------	------------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
5985	7.58	0.0057	12.29	0.0169	24.00	0.2512	Pass
6145	7.63	0.0058	12.34	0.0171	24.00	0.2512	Pass
6385	7.40	0.0055	12.11	0.0163	24.00	0.2512	Pass
6465	7.77	0.0060	12.48	0.0177	24.00	0.2512	Pass
6545	7.88	0.0061	12.59	0.0182	24.00	0.2512	Pass
6625	7.64	0.0058	12.35	0.0172	24.00	0.2512	Pass
6785	7.59	0.0057	12.30	0.0170	24.00	0.2512	Pass
6865	7.46	0.0056	12.17	0.0165	24.00	0.2512	Pass
6945	8.17	0.0066	12.88	0.0194	24.00	0.2512	Pass
7025	7.86	0.0061	12.57	0.0181	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax (HE80) _Main Ant.	Tested Date	2022/11/30
-----------	---------------------------------	-------------	------------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
5985	7.82	0.0061	12.53	0.0179	24.00	0.2512	Pass
6145	7.92	0.0062	12.63	0.0183	24.00	0.2512	Pass
6385	7.96	0.0063	12.67	0.0185	24.00	0.2512	Pass
6465	8.39	0.0069	13.10	0.0204	24.00	0.2512	Pass
6545	8.32	0.0068	13.03	0.0201	24.00	0.2512	Pass
6625	7.87	0.0061	12.58	0.0181	24.00	0.2512	Pass
6785	7.77	0.0060	12.48	0.0177	24.00	0.2512	Pass
6865	7.86	0.0061	12.57	0.0181	24.00	0.2512	Pass
6945	8.23	0.0067	12.94	0.0197	24.00	0.2512	Pass
7025	8.25	0.0067	12.96	0.0198	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax (HE80) _Total	Tested Date	2022/11/30
-----------	-----------------------------	-------------	------------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
5985	10.71	0.0118	15.42	0.0348	24.00	0.2512	Pass
6145	10.79	0.0120	15.50	0.0355	24.00	0.2512	Pass
6385	10.70	0.0117	15.41	0.0348	24.00	0.2512	Pass
6465	11.10	0.0129	15.81	0.0381	24.00	0.2512	Pass
6545	11.12	0.0129	15.83	0.0383	24.00	0.2512	Pass
6625	10.77	0.0119	15.48	0.0353	24.00	0.2512	Pass
6785	10.69	0.0117	15.40	0.0347	24.00	0.2512	Pass
6865	10.67	0.0117	15.38	0.0345	24.00	0.2512	Pass
6945	11.21	0.0132	15.92	0.0391	24.00	0.2512	Pass
7025	11.07	0.0128	15.78	0.0378	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax (HE160)_Aux Ant.	Tested Date	2022/11/30
-----------	--------------------------------	-------------	------------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
6025	10.46	0.0111	15.17	0.0329	24.00	0.2512	Pass
6345	10.37	0.0109	15.08	0.0322	24.00	0.2512	Pass
6505	10.70	0.0117	15.41	0.0348	24.00	0.2512	Pass
6665	10.56	0.0114	15.27	0.0337	24.00	0.2512	Pass
6985	10.29	0.0107	15.00	0.0316	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax (HE160)_Main Ant.	Tested Date	2022/11/30
-----------	---------------------------------	-------------	------------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
6025	10.66	0.0116	15.37	0.0344	24.00	0.2512	Pass
6345	10.87	0.0122	15.58	0.0361	24.00	0.2512	Pass
6505	11.05	0.0127	15.76	0.0377	24.00	0.2512	Pass
6665	10.94	0.0124	15.65	0.0367	24.00	0.2512	Pass
6985	10.82	0.0121	15.53	0.0357	24.00	0.2512	Pass


Test Mode	IEEE 802.11ax (HE160)_Total	Tested Date	2022/11/30
-----------	-----------------------------	-------------	------------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
6025	13.57	0.0228	18.28	0.0673	24.00	0.2512	Pass
6345	13.64	0.0231	18.35	0.0684	24.00	0.2512	Pass
6505	13.89	0.0245	18.60	0.0724	24.00	0.2512	Pass
6665	13.76	0.0238	18.47	0.0703	24.00	0.2512	Pass
6985	13.57	0.0228	18.28	0.0673	24.00	0.2512	Pass


APPENDIX E CONTENTION BASED PROTOCOL

Test Mode UNII-5, UNII-6, UNII-7, UNII-8


Incumbent Signal (AWGN) Frequency: 6175 MHz

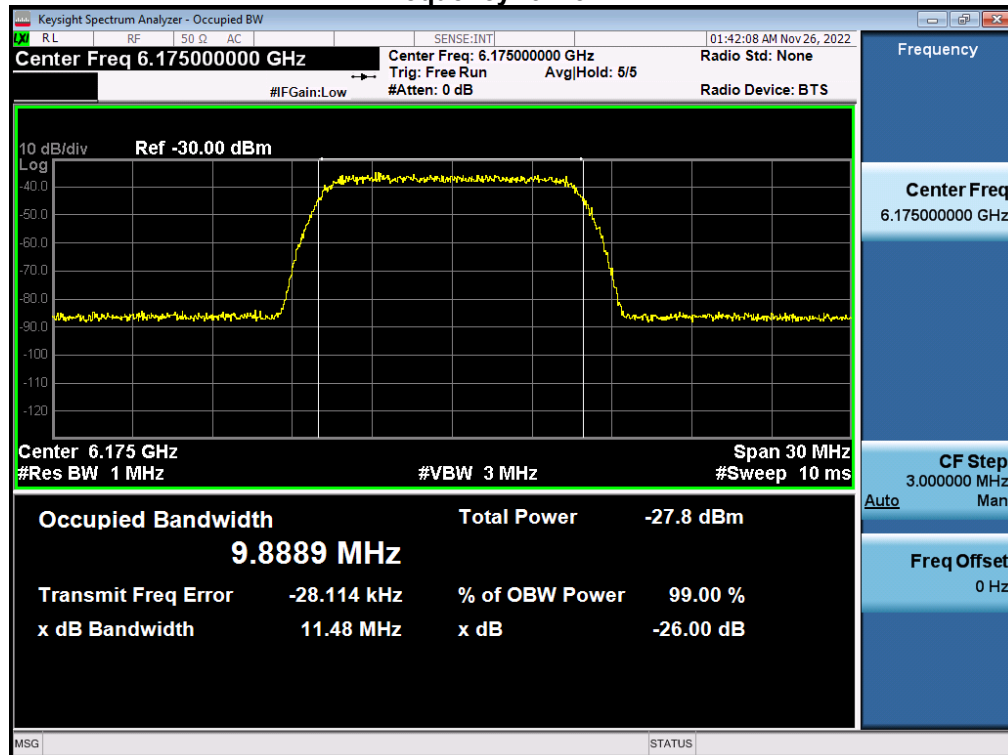


Frequency: 6175 MHz

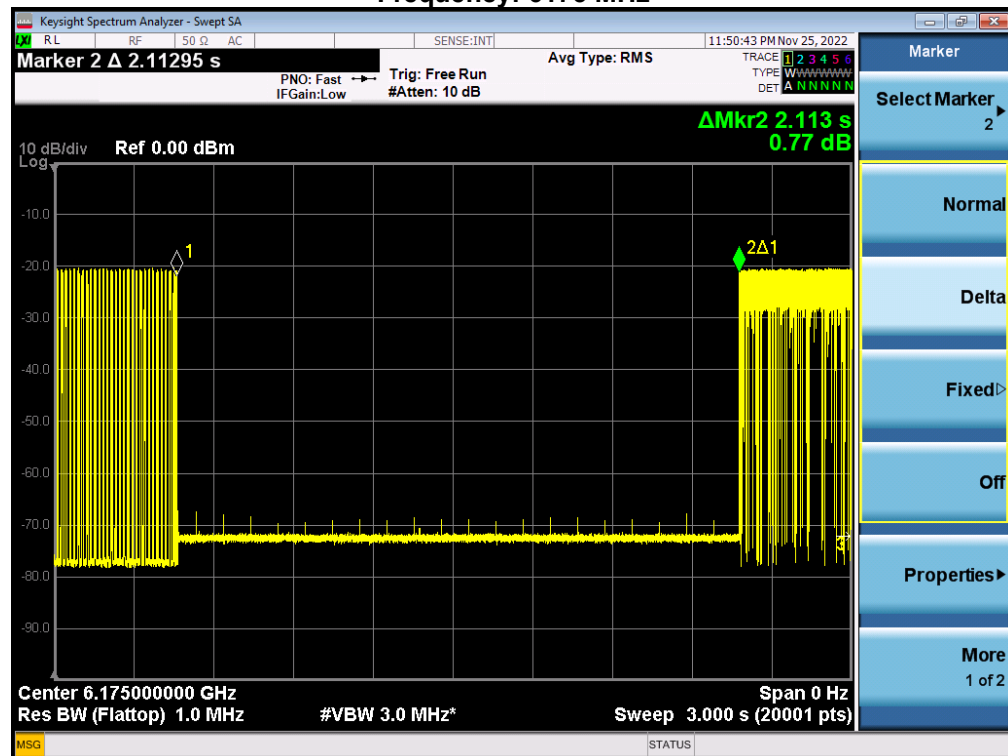


Frequency: 6475 MHz

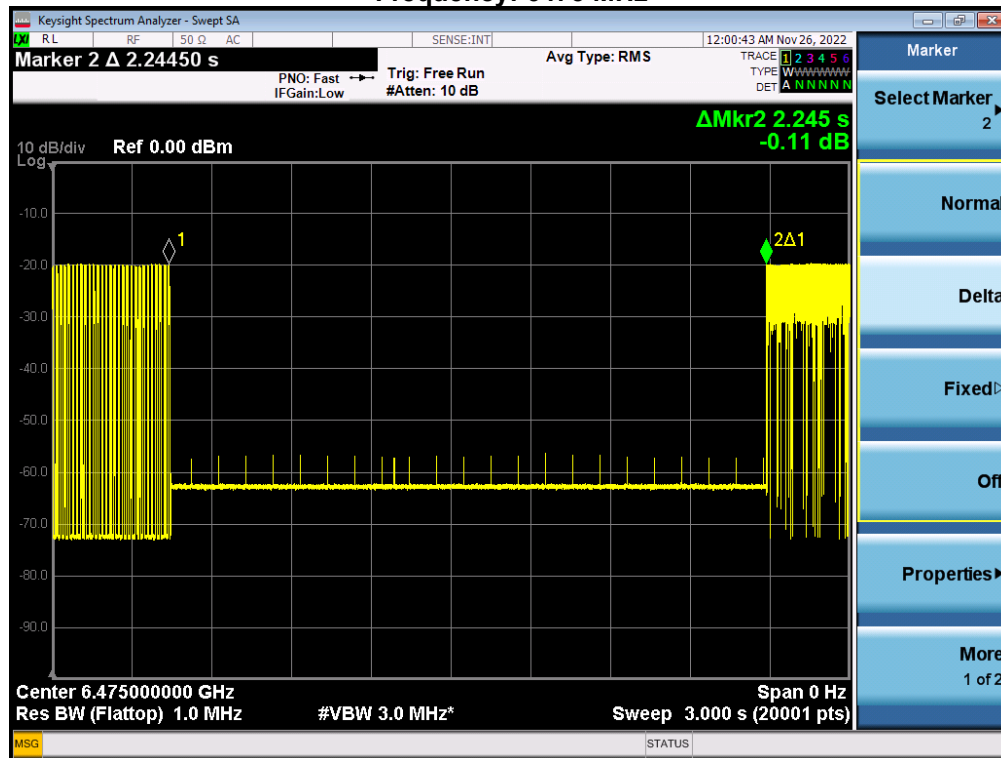


Frequency: 6695 MHz

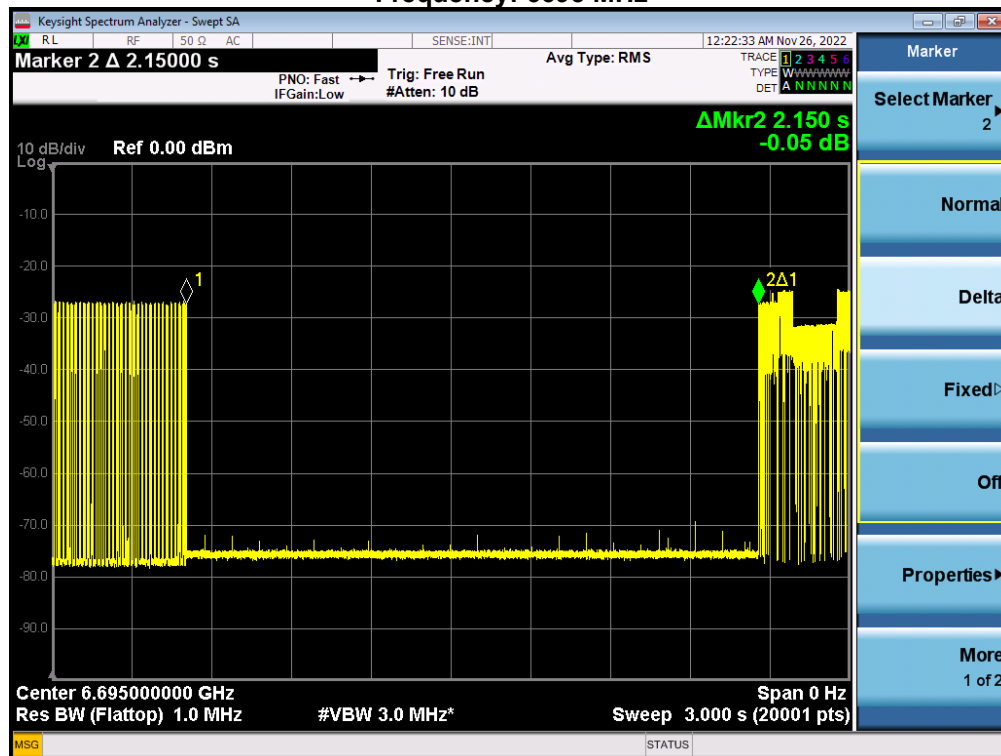


Frequency: 7015 MHz

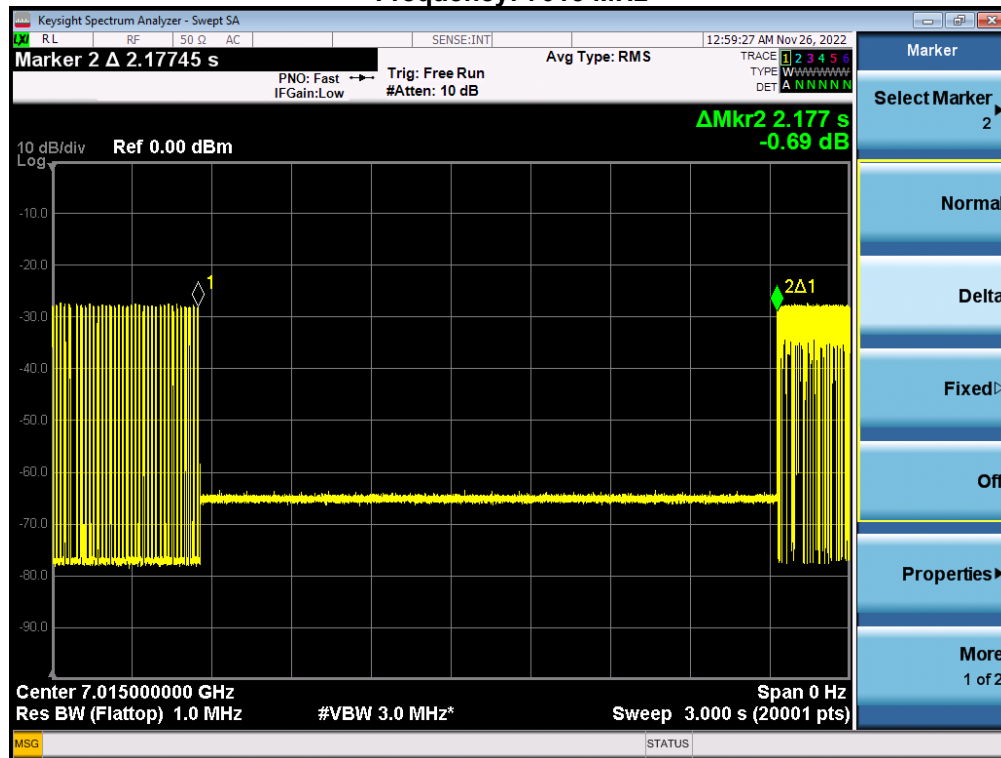


Frequency: 6110 MHz

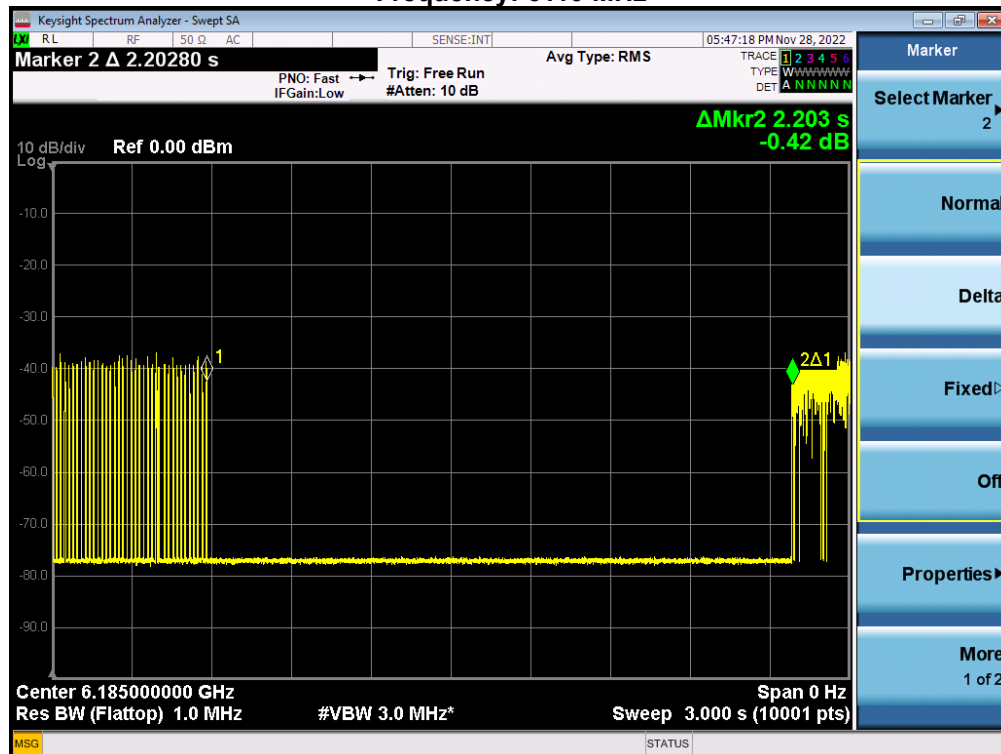


Frequency: 6185 MHz

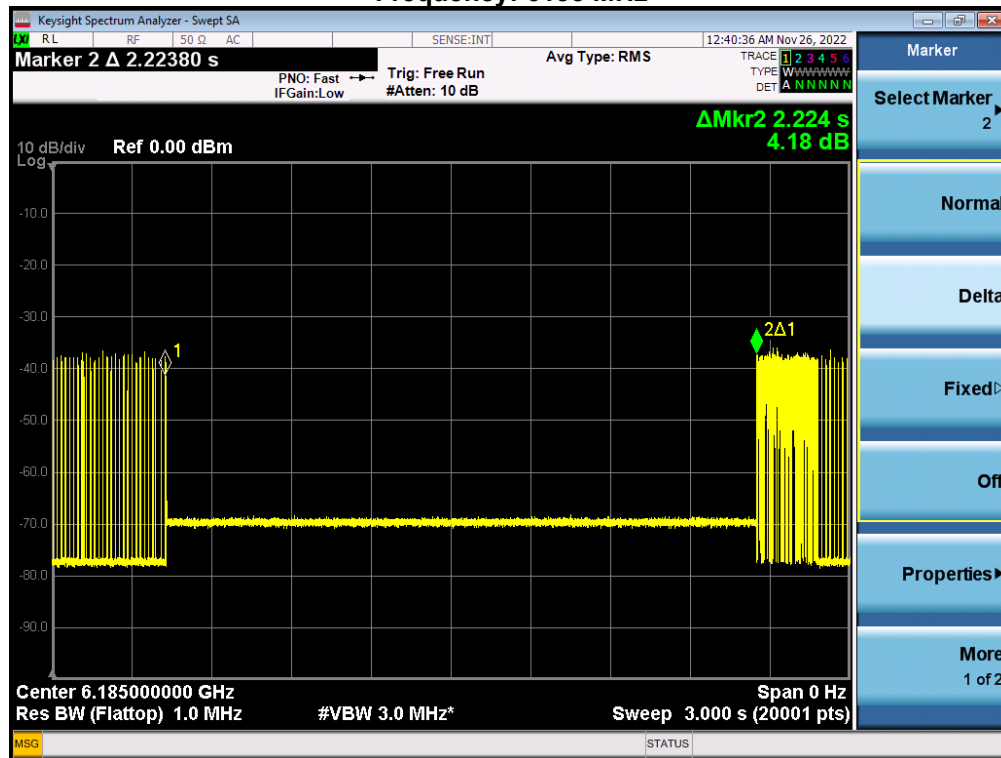


Frequency: 6260 MHz

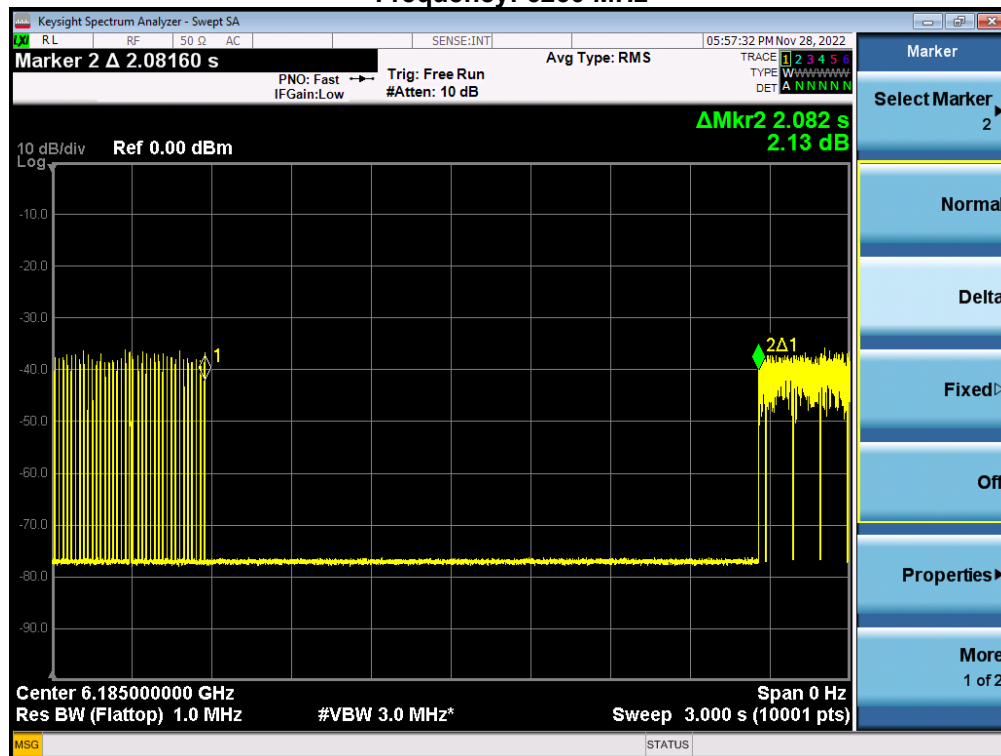


Frequency: 6430 MHz

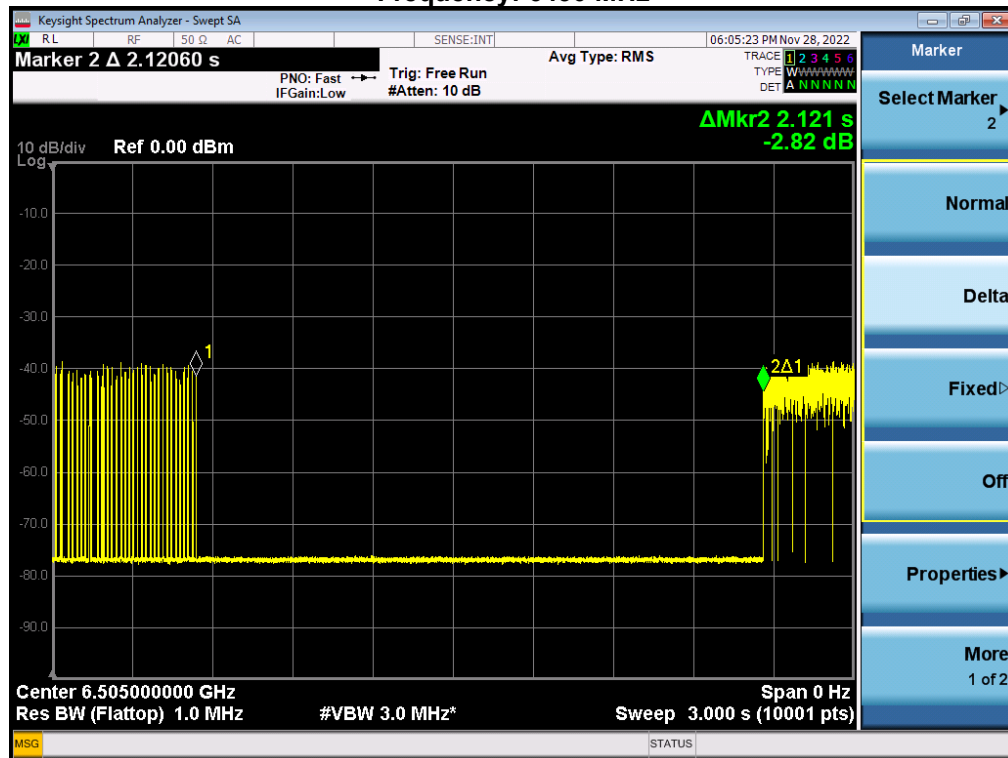


Frequency: 6505 MHz

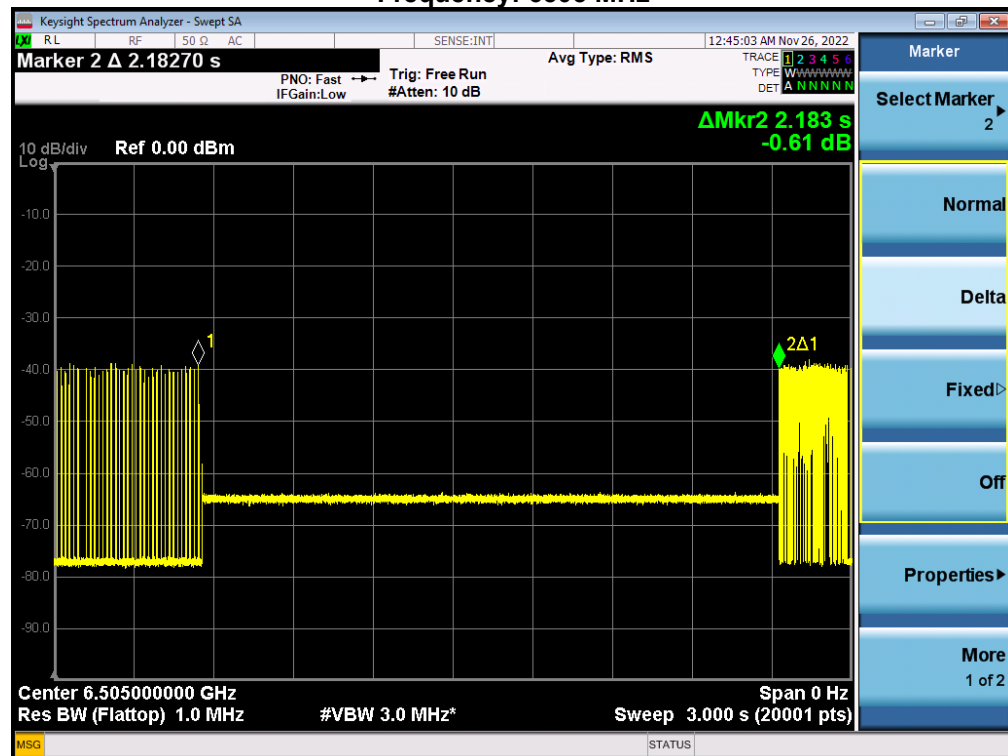


Frequency: 6580 MHz

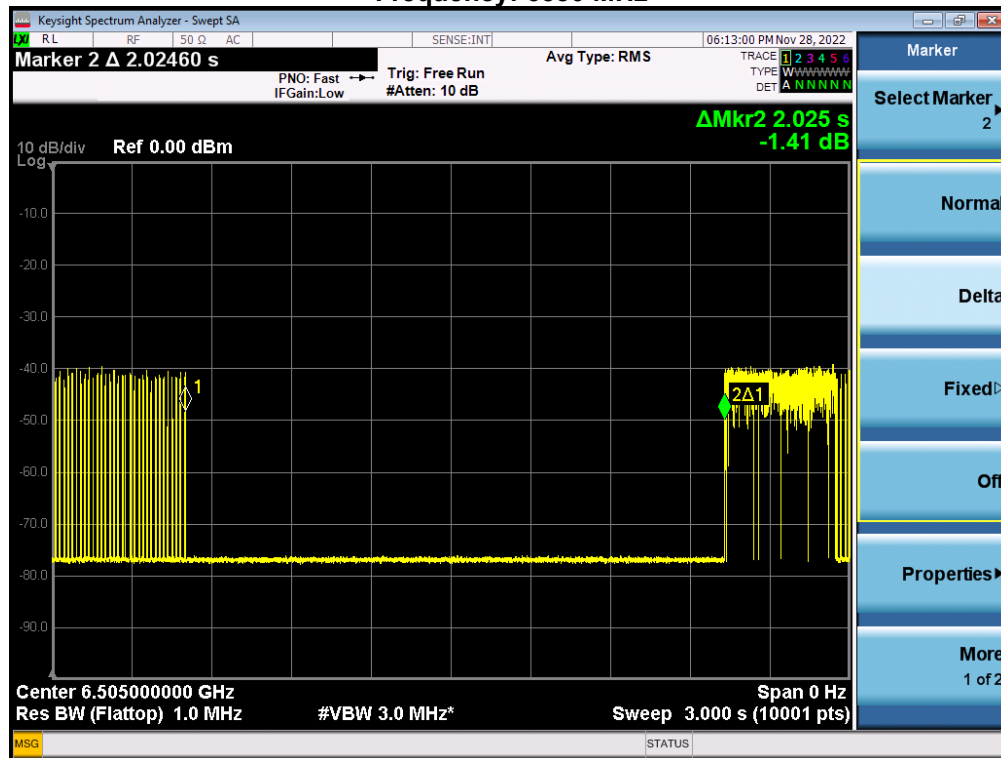


Frequency: 6590 MHz

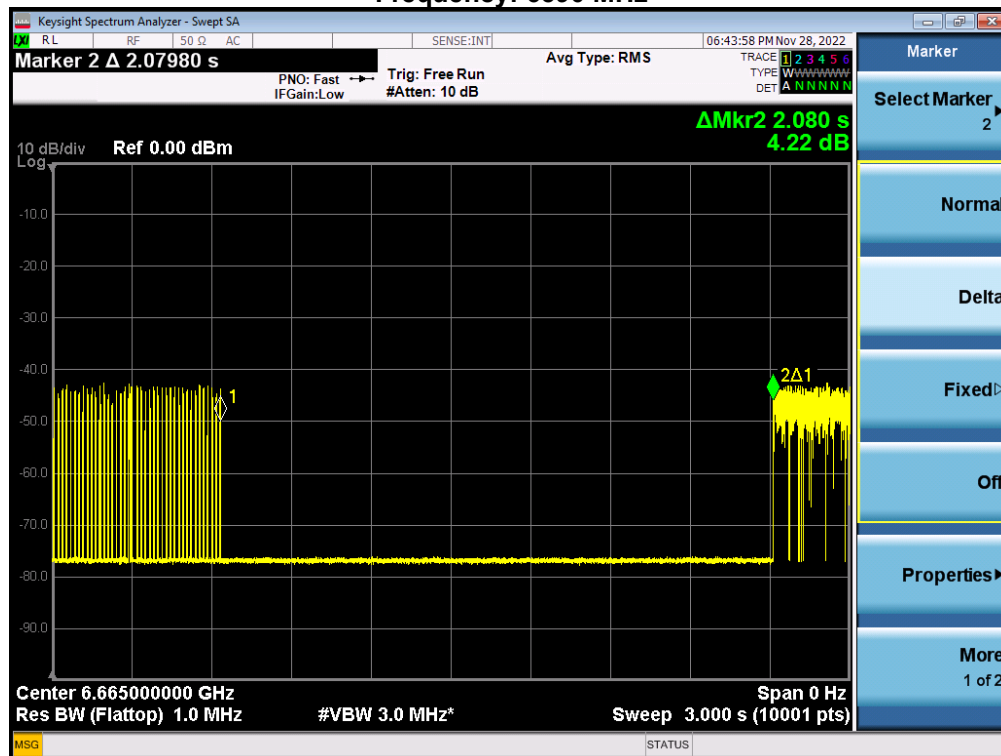


Frequency: 6665 MHz

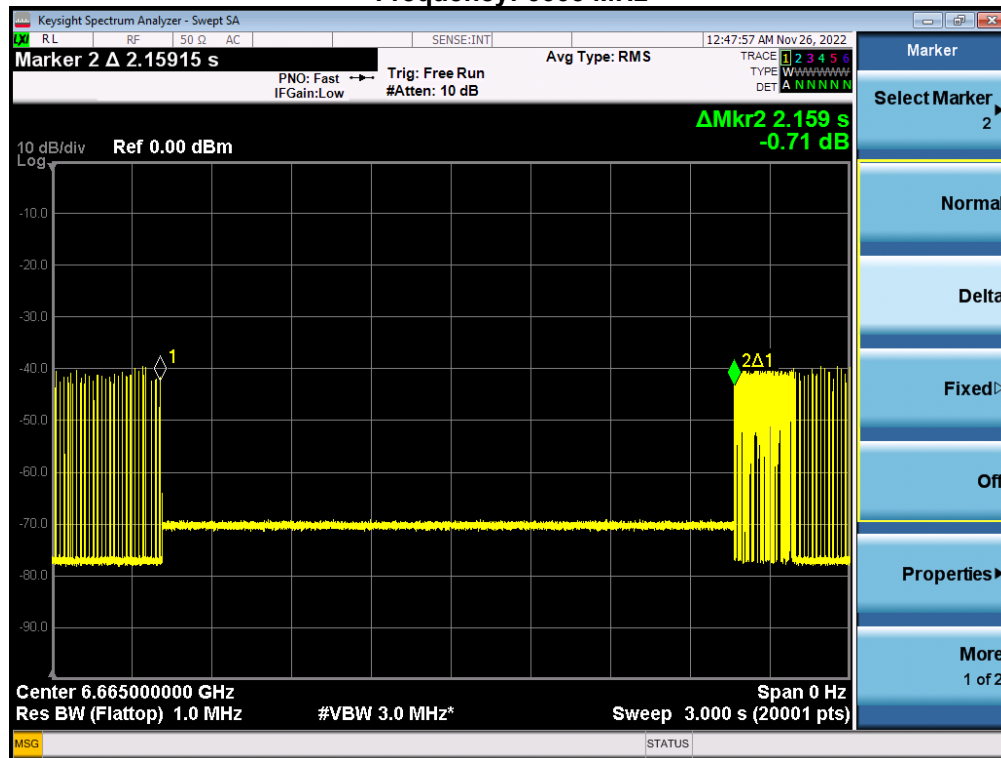


Frequency: 6740 MHz

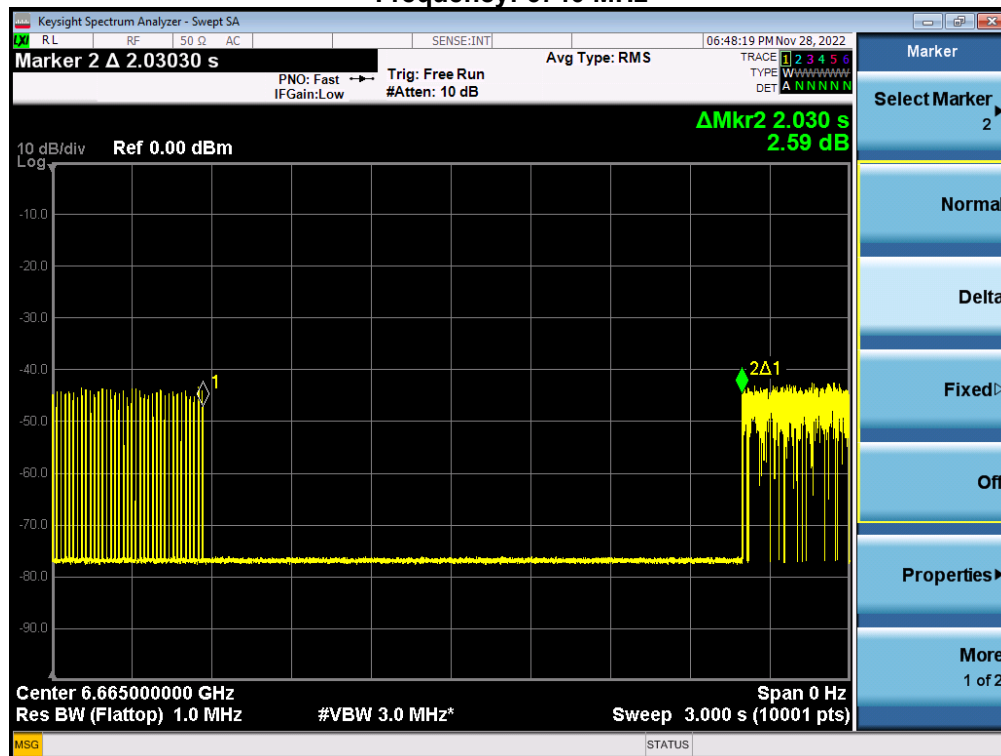


Frequency: 6910 MHz

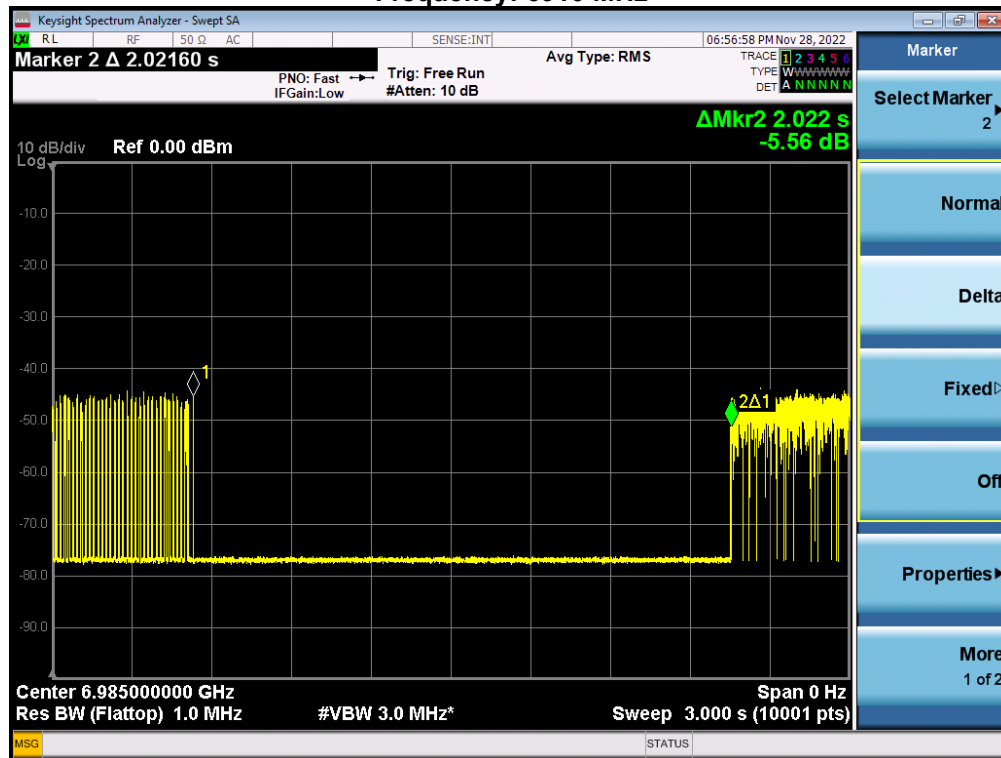

Frequency: 6985 MHz

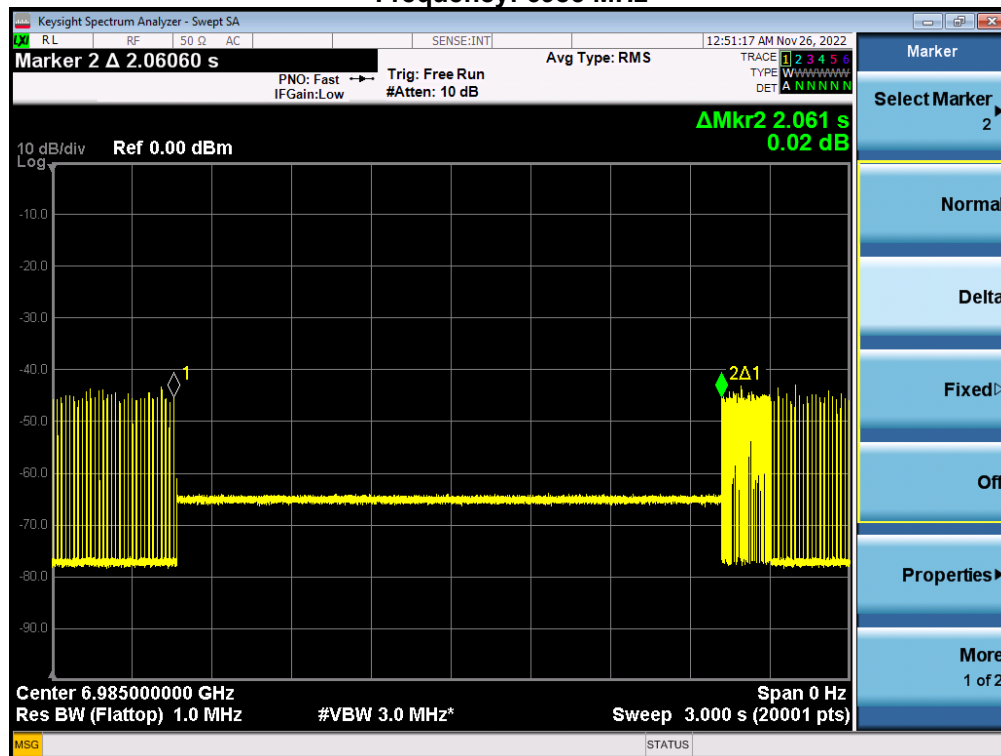


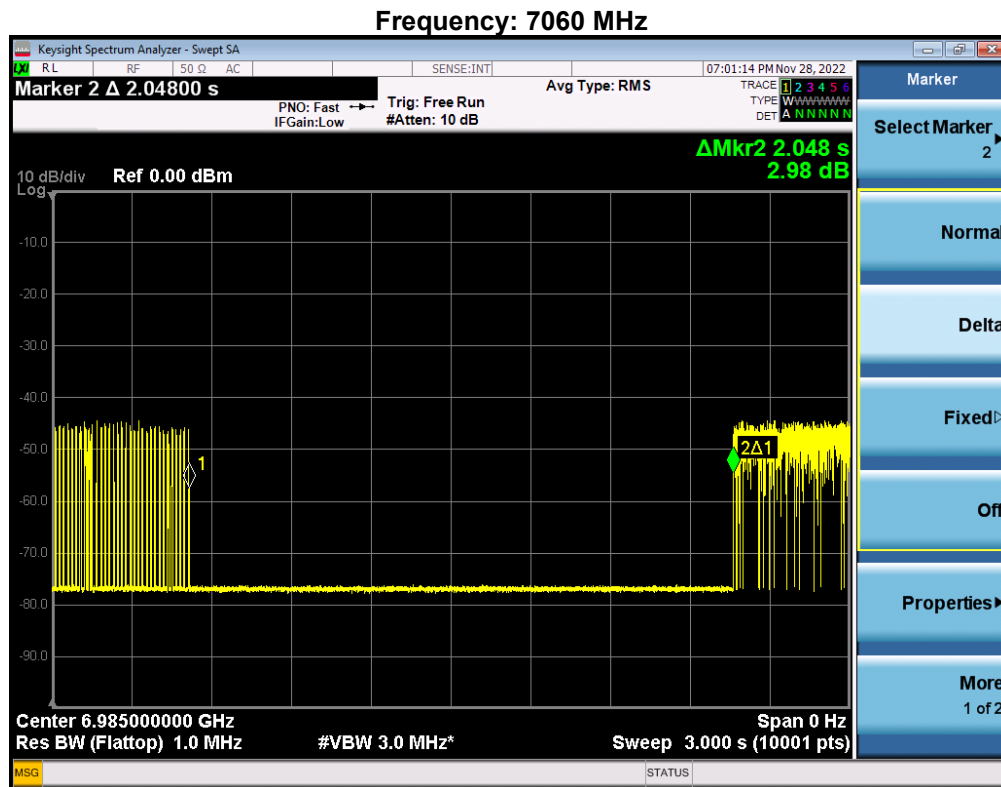


Detection power level and detection probability

Bands	Test Mode	Bandwidth (MHz)	Channel	Frequency (MHz)	interference Frequency (MHz)	Detection power level (dBm)	Detection Power Limit (dBm)	Number of Times	Number of Detected	Detection Probability	Detection Probability Limit	Test Result
UNII-5	802.11a	20	45	6175	6175	-65.03	-57.29	10	9	90%	90%	Pass
	802.11ax	160	47	6185	6110	-66.20	-57.29	10	10	100%	90%	Pass
					6185	-66.31	-57.29	10	10	100%	90%	Pass
					6260	-65.98	-57.29	10	9	90%	90%	Pass
UNII-6	802.11a	20	105	6475	6475	-71.50	-57.29	10	10	100%	90%	Pass
	802.11ax	160	111	6505	6430	-70.62	-57.29	10	9	90%	90%	Pass
					6505	-69.85	-57.29	10	9	90%	90%	Pass
					6580	-70.44	-57.29	10	10	100%	90%	Pass
UNII-7	802.11a	20	149	6695	6695	-66.95	-57.29	10	10	100%	90%	Pass
	802.11ax	160	143	6665	6590	-67.02	-57.29	10	9	90%	90%	Pass
					6665	-67.53	-57.29	10	10	100%	90%	Pass
					6740	-65.11	-57.29	10	10	100%	90%	Pass
UNII-8	802.11a	20	213	7015	7015	-67.30	-57.29	10	10	100%	90%	Pass
	802.11ax	160	207	6985	6910	-65.52	-57.29	10	9	90%	90%	Pass
					6985	-68.53	-57.29	10	9	90%	90%	Pass
					7060	-68.25	-57.29	10	10	100%	90%	Pass


Contention-Based Protocol EUT Channel: CH45 Incumbent Signal Frequency: 6175 MHz

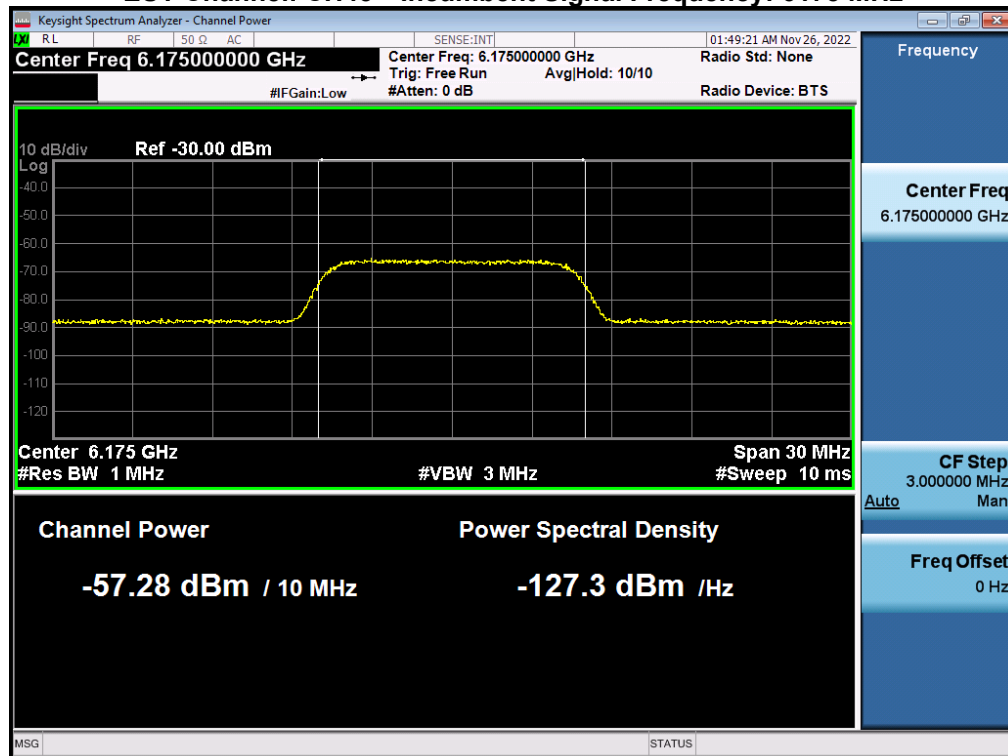


EUT Channel: CH105 Incumbent Signal Frequency: 6475 MHz

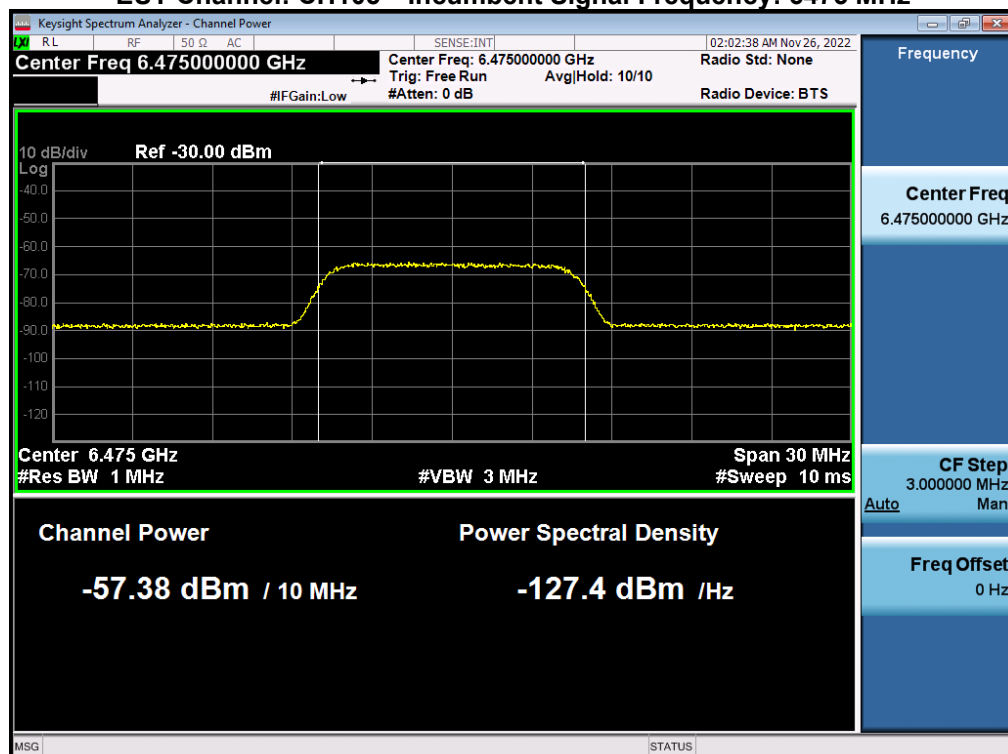


EUT Channel: CH149 Incumbent Signal Frequency: 6695 MHz

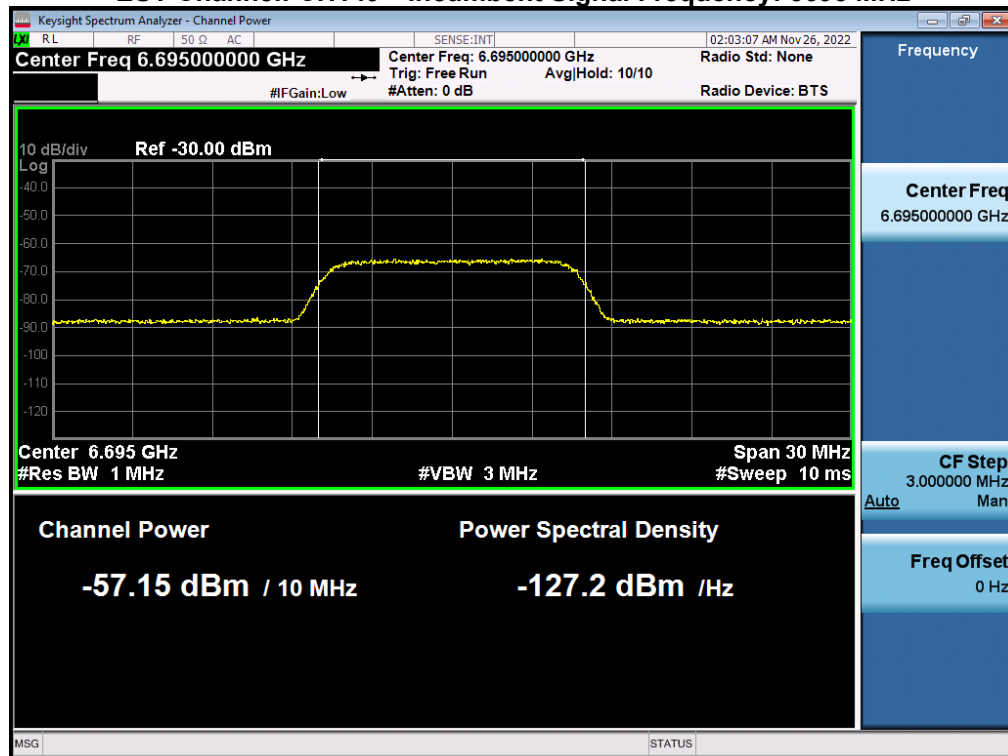


EUT Channel: CH213 Incumbent Signal Frequency: 7015 MHz

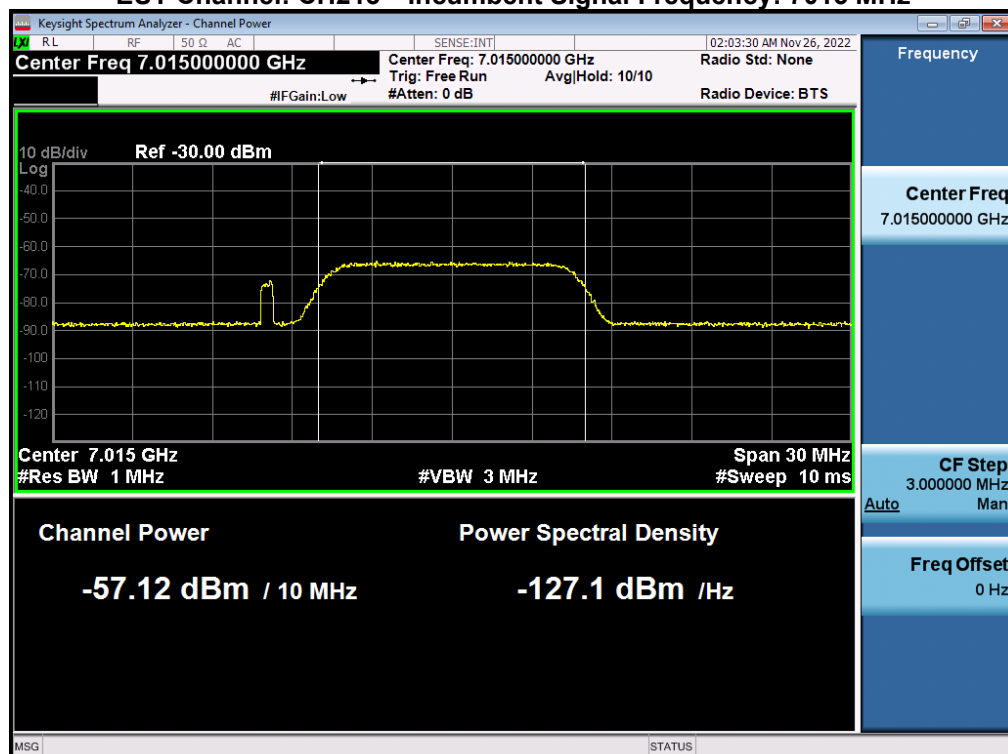


EUT Channel: CH47 Incumbent Signal Frequency: 6110 MHz

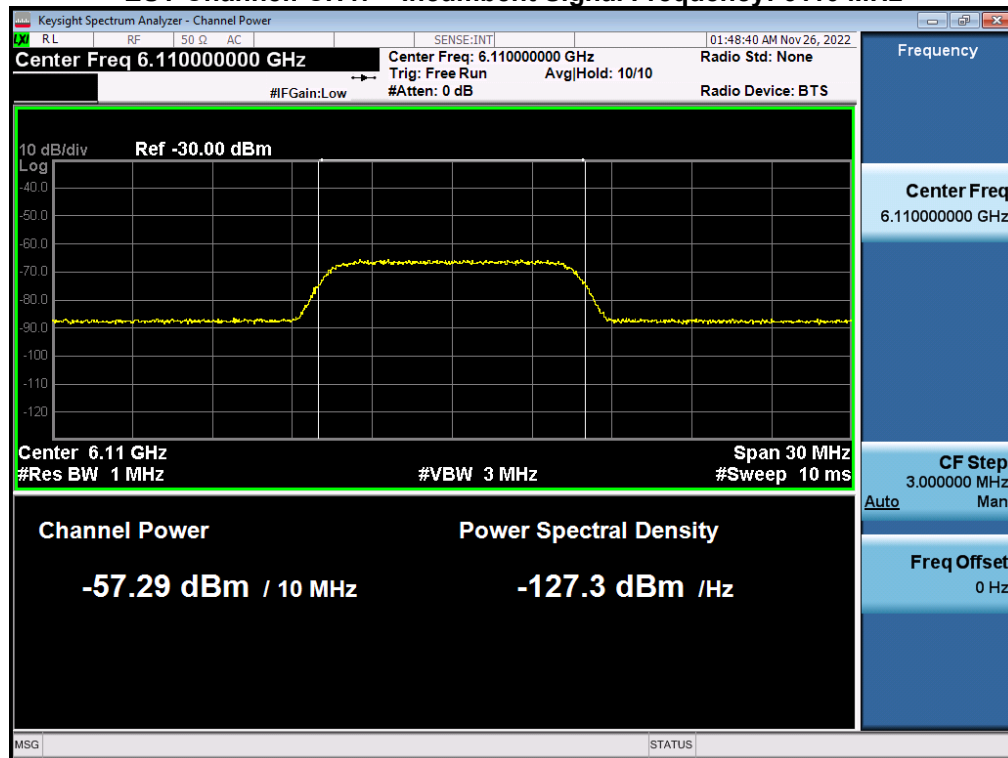


EUT Channel: CH47 Incumbent Signal Frequency: 6185 MHz

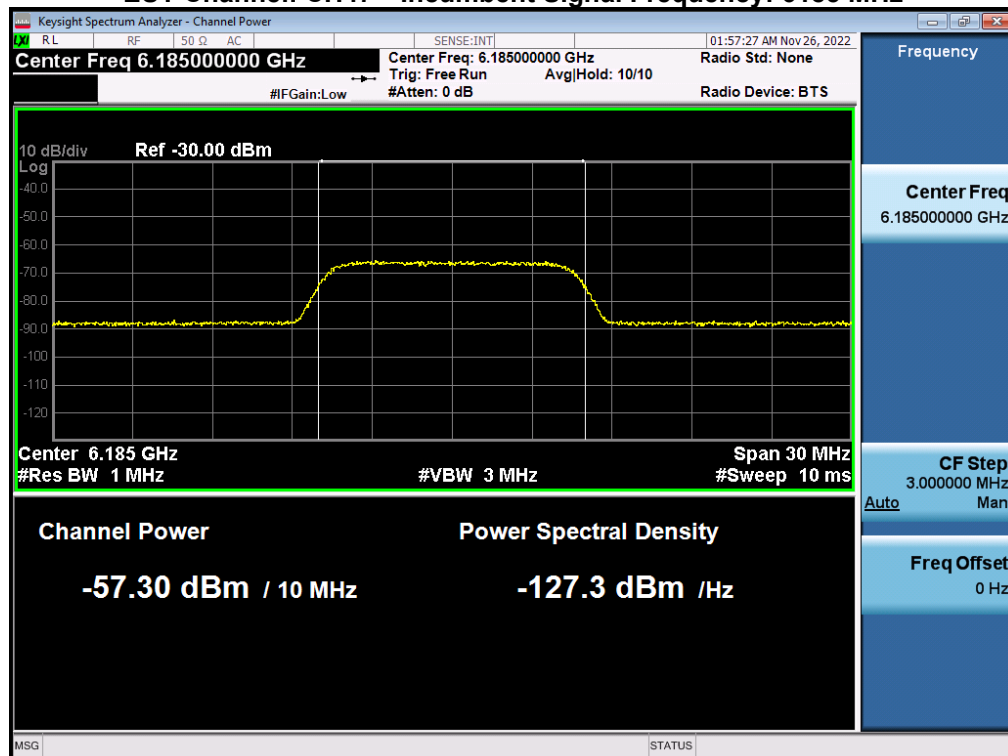


EUT Channel: CH47 Incumbent Signal Frequency: 6260 MHz

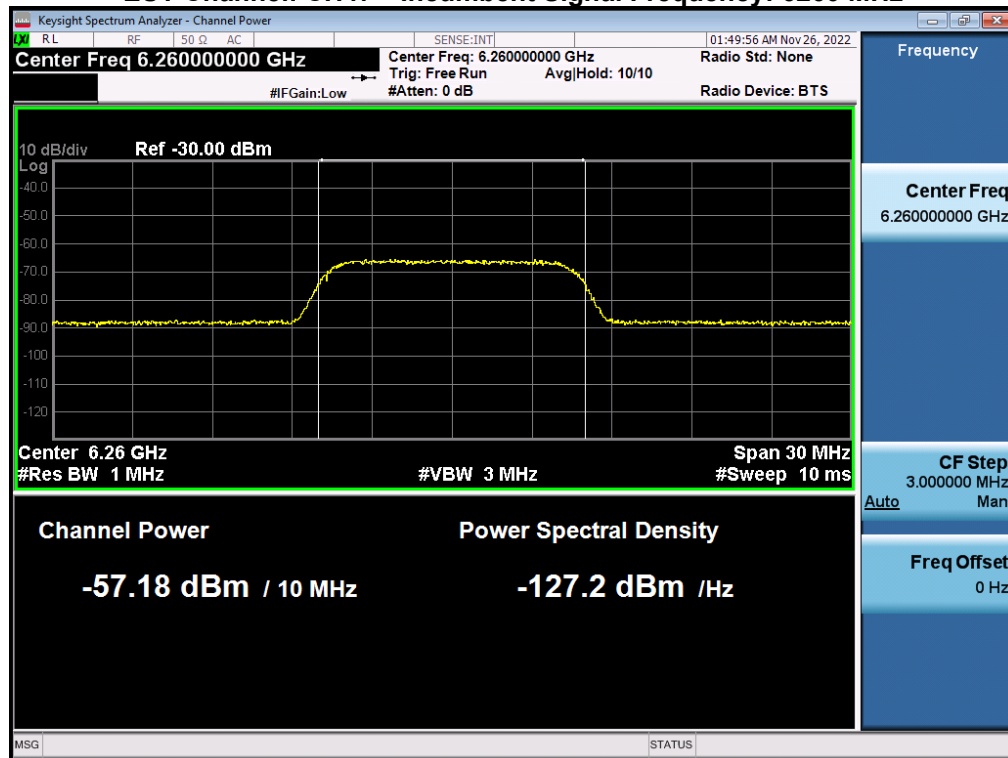


EUT Channel: CH111 Incumbent Signal Frequency: 6430 MHz

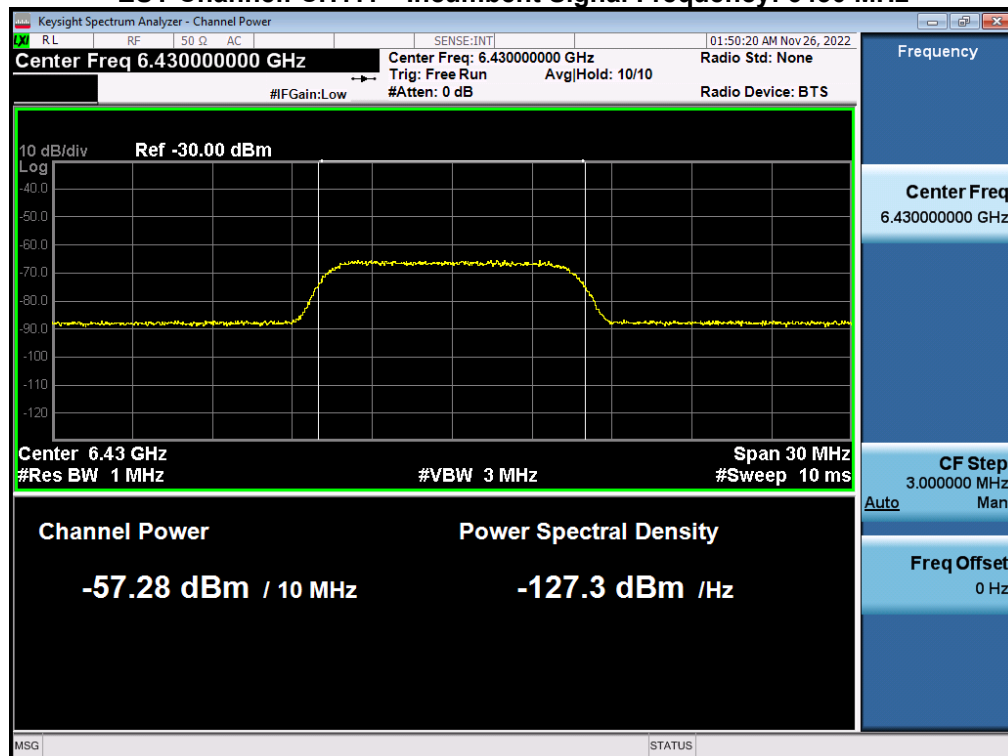


EUT Channel: CH111 Incumbent Signal Frequency: 6505 MHz

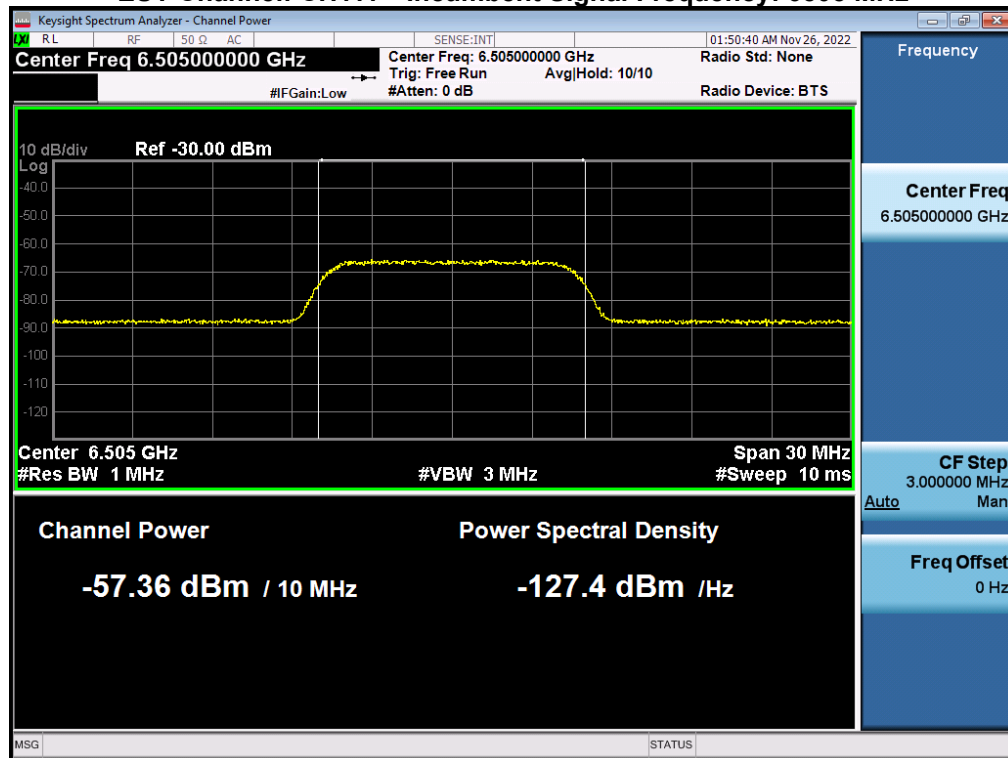


EUT Channel: CH111 Incumbent Signal Frequency: 6580 MHz

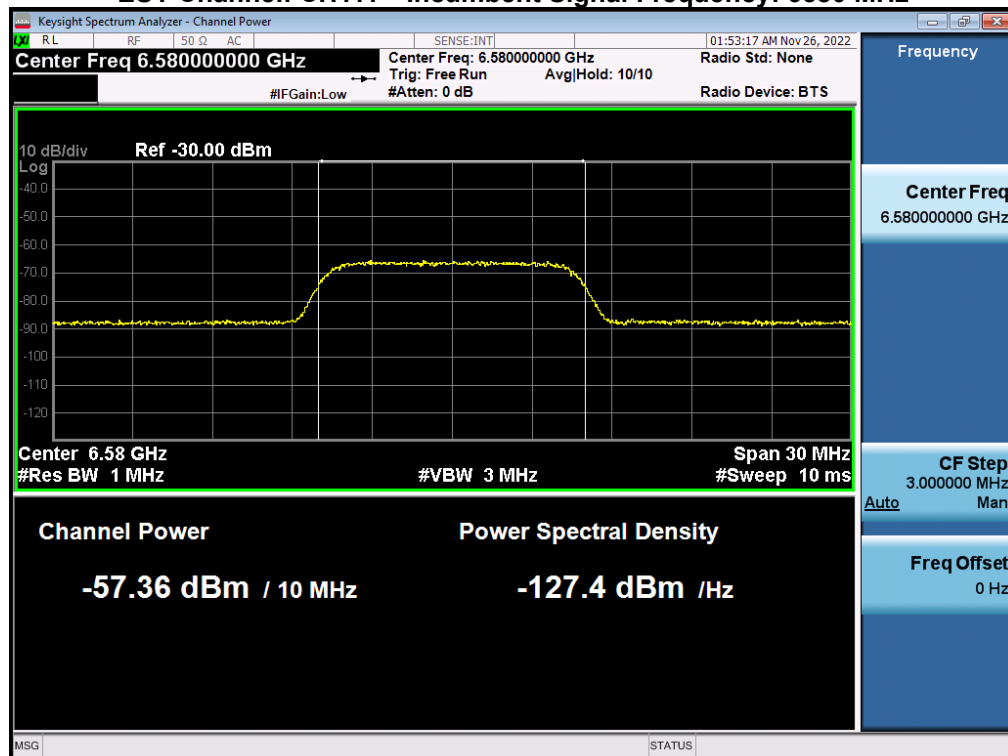


EUT Channel: CH143 Incumbent Signal Frequency: 6590 MHz

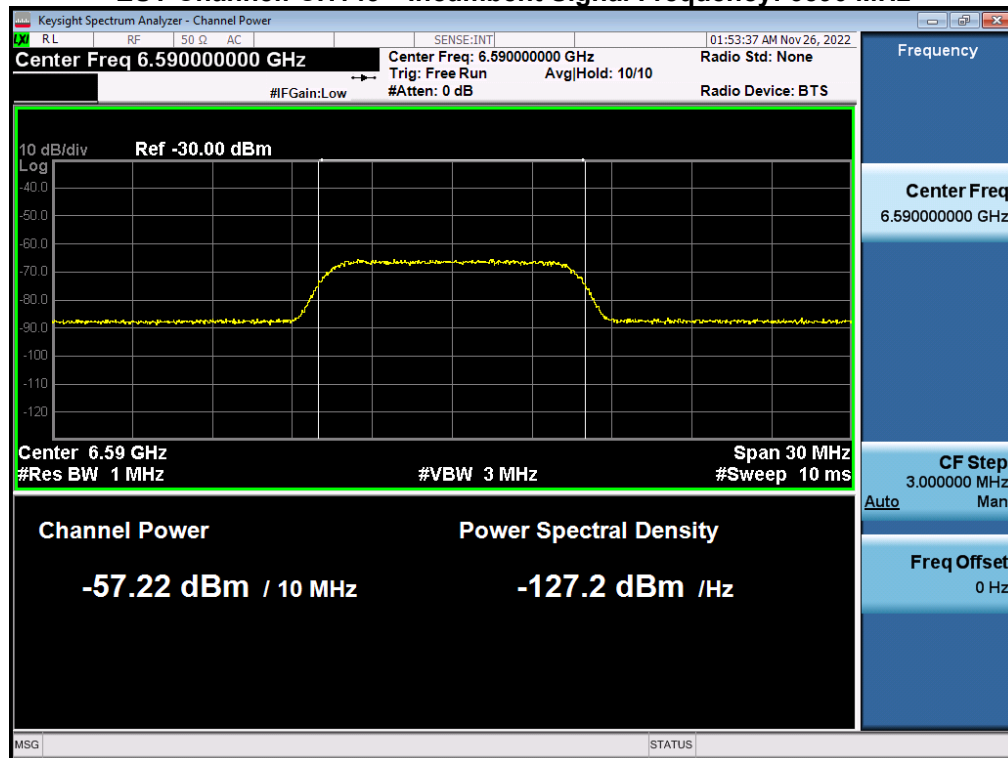


EUT Channel: CH143 Incumbent Signal Frequency: 6665 MHz

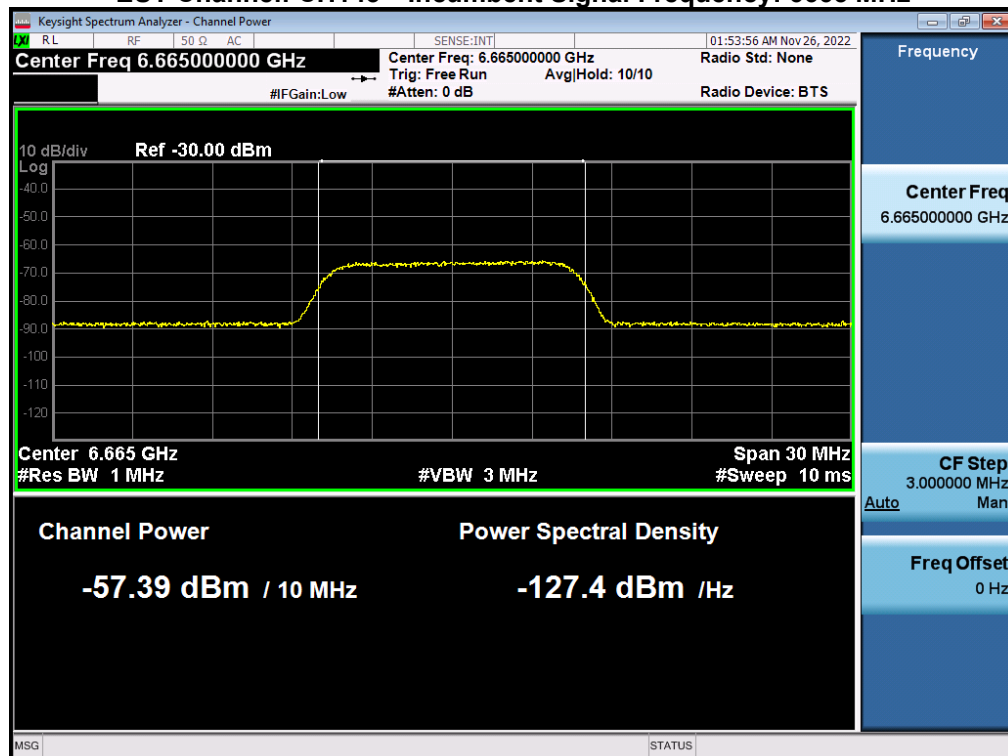


EUT Channel: CH143 Incumbent Signal Frequency: 6740 MHz

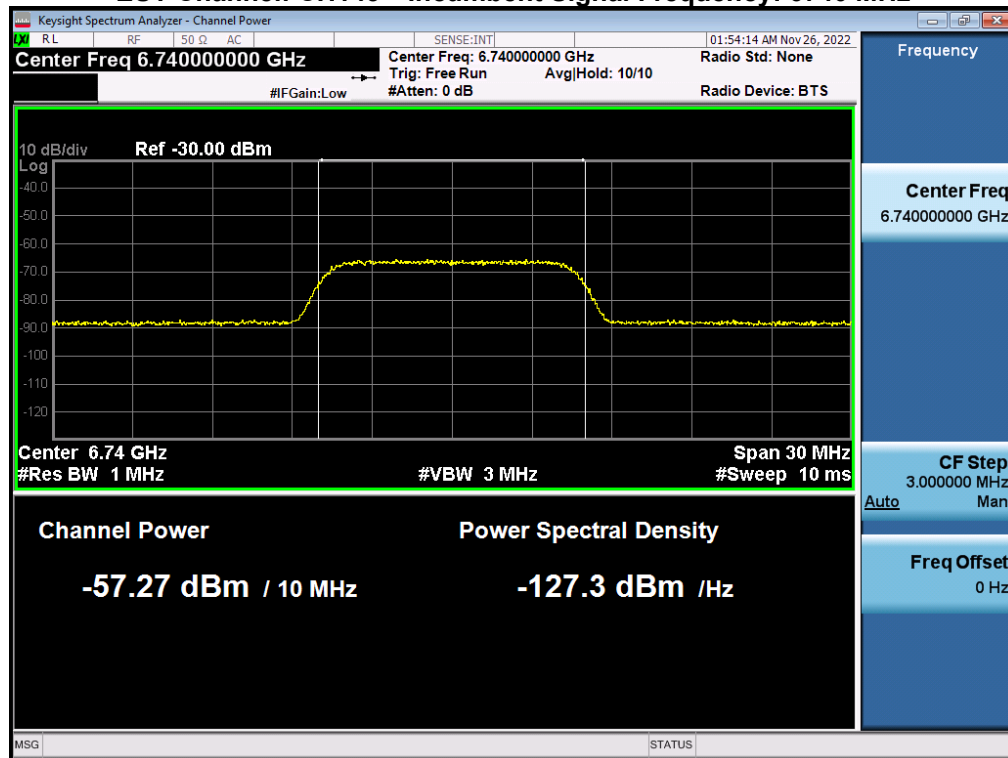


EUT Channel: CH207 Incumbent Signal Frequency: 6910 MHz

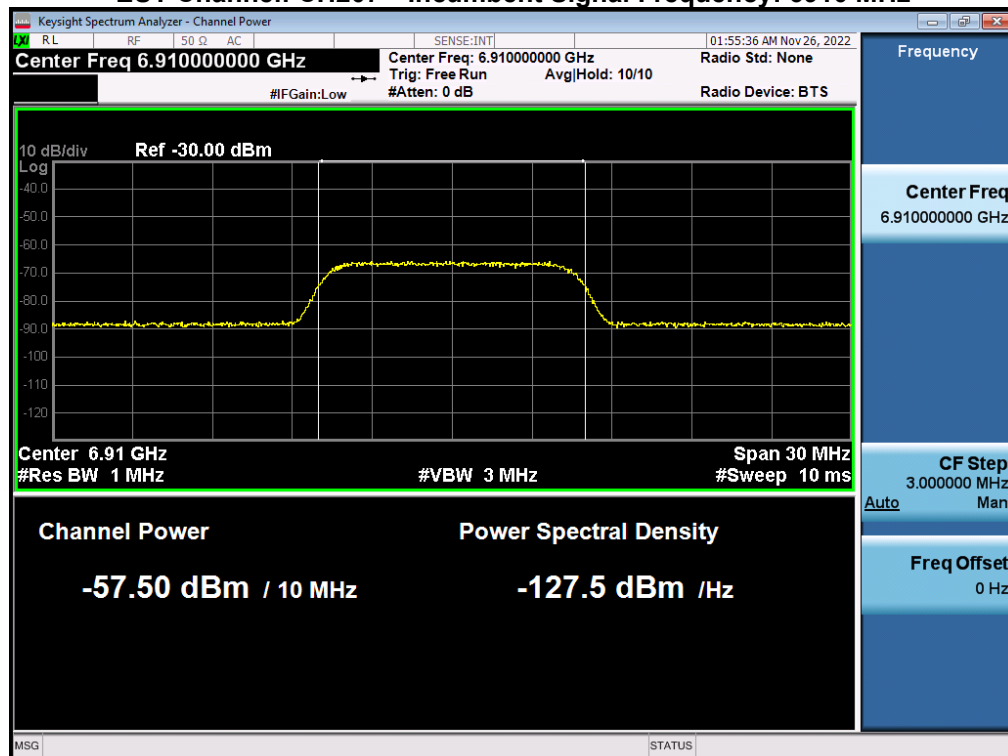

EUT Channel: CH207 Incumbent Signal Frequency: 6985 MHz

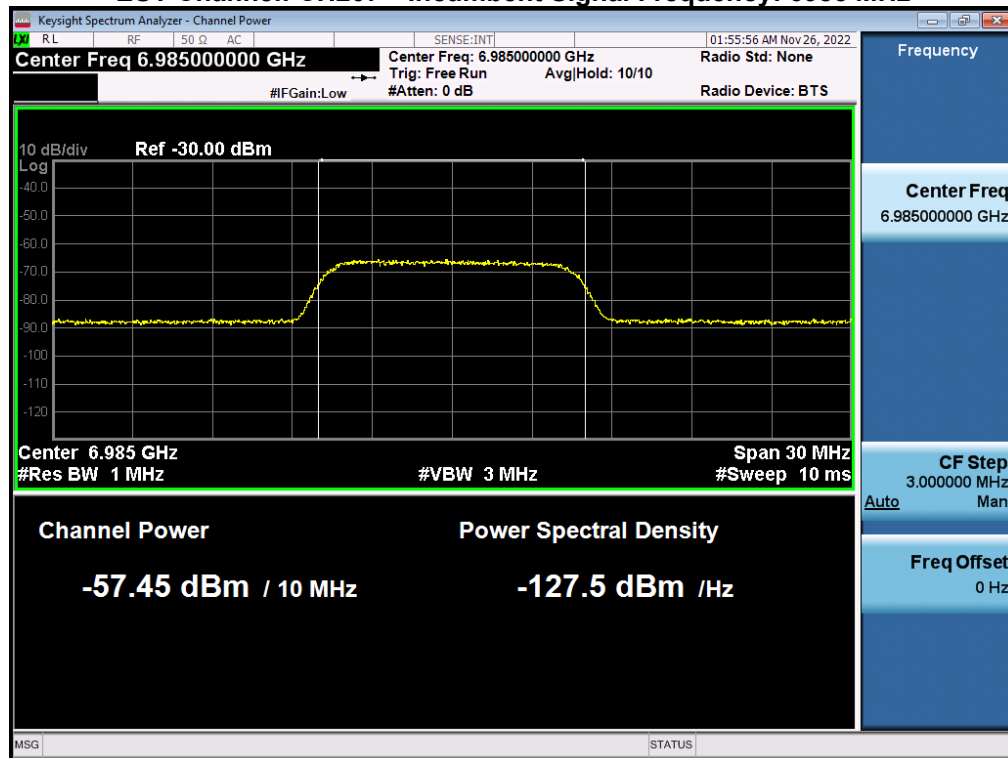

EUT Channel: CH207 Incumbent Signal Frequency: 7060 MHz

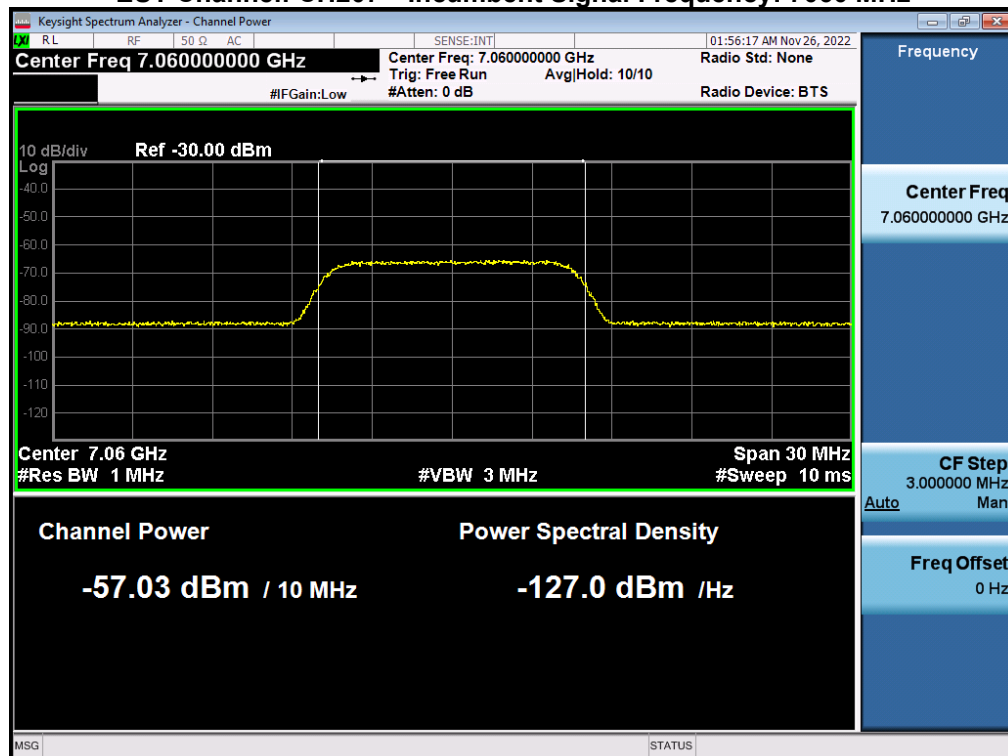

End of Test Report