



FCC Radio Test Report

FCC ID: RWO-RZ090510


This report concerns: Class II Permissive Changes

Project No. : 2411C327C
Equipment : Notebook PC
Brand Name :  or  or RAZER
Model Name : RZ09-0582
Applicant : Razer Inc.
Address : 9 Pasteur, Irvine, CA92618, USA.
Manufacturer : Razer Inc.
Address : 9 Pasteur, Irvine, CA92618, USA.
Date of Receipt : Dec. 26, 2024
Jan. 20, 2026
Date of Test : Dec. 27, 2024 ~ Jan. 22, 2025
Jan. 22, 2026 ~ Feb. 02, 2026
Issued Date : Mar. 17, 2026
Test Sample : Sample No.: DG20241226111 for above 18GHz, DG920260120334 for others.
Standard(s) : FCC CFR Title 47, Part 15, Subpart E

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by


:



Evan Yang

Approved by

:



Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	4
1 . APPLICABLE STANDARDS	5
2 . SUMMARY OF TEST RESULTS	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
2.3 TEST ENVIRONMENT CONDITIONS	6
3 . GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 TEST MODES	13
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
3.4 SUPPORT UNITS	14
4 . AC POWER LINE CONDUCTED EMISSIONS	15
4.1 LIMIT	15
4.2 TEST PROCEDURE	15
4.3 DEVIATION FROM TEST STANDARD	15
4.4 TEST SETUP	16
4.5 EUT OPERATION CONDITIONS	16
4.6 TEST RESULTS	16
5 . RADIATED EMISSIONS	17
5.1 LIMIT	17
5.2 TEST PROCEDURE	18
5.3 DEVIATION FROM TEST STANDARD	19
5.4 TEST SETUP	19
5.5 EUT OPERATION CONDITIONS	20
5.6 TEST RESULTS - 30 MHZ TO 1000 MHZ	20
5.7 TEST RESULTS - ABOVE 1000 MHZ	20
6 . MEASUREMENT INSTRUMENTS LIST	21
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	23
APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	26
APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ	29

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-6-2411C327C	R00	This is a supplementary report to the original test report (BTL-FCCP-1-2411C327A). 1. Change the model. The differences from the original model are as follows: 1) The motherboard model has been changed. Three components related to TBT5 have been removed, along with some small resistors and capacitors around them. 2) The fan and cooling module have been changed, but the safety certification of the fan remains the same. 3) The CPU has been upgraded. 4) Updated the PN number of the antenna. 5) Updated the address of the applicant manufacturer. 6) Updated the appearance. 7) Updated the software and hardware versions. Based on above described changes, the AC power line conducted emissions and radiated emission (the worst case of 30MHz to 18GHz) was re-evaluated and recorded. The rest are kept the same.	Mar. 17, 2026	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2020

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C	PASS	-----
15.407(a)	Bandwidth	-----	PASS	NOTE (5)
15.407(a)	Maximum e.i.r.p.	-----	PASS	NOTE (5)
15.407(a)	Maximum Power Spectral Density (e.i.r.p.)	-----	PASS	NOTE (5)
15.407(b)	In-Band Emission (Mask)	-----	PASS	NOTE (5)
15.407(d)	Contention Based Protocol	-----	PASS	NOTE (6)
15.407(g)	Frequency Stability	-----	PASS	NOTE (5)
15.203 15.407(a)	Antenna Requirements	-----	PASS	NOTE (2) NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) The device employ a permanently attached integrated antenna.
- (4) Device Type:
 - ☐ 6ID: Indoor access point
 - ☐ 6PP: Subordinate device (operating under control of a low-power indoor access point)
 - ☒ 6XD: Indoor client (operating under control of a low-power indoor access point)
 - ☐ 6CD: Dual client (operating under control of either a low-power indoor access point or standard power access point)
 - ☐ 6SD: Standard power access point
 - ☐ 6FX: Standard client (operating under control of a Standard power access point)
 - ☐ 6FC: Fixed client (operating under control of a Standard power access point)
- (5) The antenna gain of EUT is smaller than that of the module. So in this report the worst cases of radiated spurious emissions Above 30 MHz and AC Power Line Conducted Emissions were evaluated and recorded. For the test results of all other test items please refer to module test reports.
- (6) The minimum antenna gain of the EUT is larger than the antenna gain when the module tests Contention Based Protocol, so Contention Based Protocol does not need to re-evaluate the test.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLC02	CISPR	150kHz ~ 30MHz	2.66

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DGDLCB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLCB03 (3m)	CISPR	1GHz ~ 6GHz	4.16
		6GHz ~ 18GHz	4.74

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (1m)	CISPR	18 ~ 26.5 GHz	3.36
		26.5 ~ 40 GHz	3.58

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	23°C	52%	AC 120V/60Hz	Hayden Chen	Jan. 27, 2026
Radiated Emissions-30 MHz to 1000 MHz	21°C	37%	AC 120V/60Hz	Torin Long	Jan. 24, 2026
Radiated Emissions-Above 1000 MHz	21°C	37%	AC 120V/60Hz	Torin Long	Jan. 28, 2026
	23°C	42%	AC 120V/60Hz	Calvin Wen	Jan. 17, 2025

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Notebook PC
Brand Name	 or  or RAZER
Test Model	RZ09-0582
Model Name	RZ09-0582
Model Difference(s)	N/A
Software Version	Windows 11
Hardware Version	APF25003_MB
Power Source	1# DC voltage supplied from AC adapter. Model: ADP-400CB B 2# Supplied from battery. Model: RC30-0529
Power Rating	1# I/P: 100-240V~ 6.3A 50-60Hz O/P: 20.0V===20.0A TOTAL 400.0W 2# DC 15.56V, 6240mAh, 97.1Wh
Operation Frequency Band(s)	UNII-5: 5925 MHz ~ 6425 MHz UNII-6: 6425 MHz ~ 6525 MHz UNII-7: 6525 MHz ~ 6875 MHz UNII-8: 6875 MHz ~ 7125 MHz
Modulation Type	IEEE 802.11ax/be: OFDMA
Bit Rate of Transmitter	IEEE 802.11ax: up to 2402 Mbps IEEE 802.11be: up to 5764 Mbps

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2. Channel List:

UNII-5					
IEEE 802.11ax(HE20), IEEE 802.11be(EHT20)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5955	33	6115	65	6275
5	5975	37	6135	69	6295
9	5995	41	6155	73	6315
13	6015	45	6175	77	6335
17	6035	49	6195	81	6355
21	6055	53	6215	85	6375
25	6075	57	6235	89	6395
29	6095	61	6255	93	6415

UNII-5					
IEEE 802.11ax(HE40), IEEE 802.11be(EHT40)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	5965	35	6125	67	6285
11	6005	43	6165	75	6325
19	6045	51	6205	83	6365
27	6085	59	6245	91	6405

UNII-5					
IEEE 802.11ax(HE80), IEEE 802.11be(EHT80)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
7	5985	39	6145	71	6305
23	6065	55	6225	87	6385

UNII-5					
IEEE 802.11ax(HE160), IEEE 802.11be(EHT160)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
15	6025	47	6185	79	6345

UNII-6					
IEEE 802.11ax(HE20), IEEE 802.11be(EHT20)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
97	6435	105	6475	113	6515
101	6455	109	6495		

UNII-6					
IEEE 802.11ax(HE40), IEEE 802.11be(EHT40)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
99	6445	107	6485	115	6525

UNII-6					
IEEE 802.11ax(HE80), IEEE 802.11be(EHT80)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
103	6465				

UNII-6					
IEEE 802.11ax(HE160), IEEE 802.11be(EHT160)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
111	6505				

UNII-7					
IEEE 802.11ax(HE20), IEEE 802.11be(EHT20)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
117	6535	141	6655	165	6775
121	6555	145	6675	169	6795
125	6575	149	6695	173	6815
129	6595	153	6715	177	6835
133	6615	157	6735	181	6855
137	6635	161	6755	185	6875

UNII-7					
IEEE 802.11ax(HE40), IEEE 802.11be(EHT40)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
123	6565	147	6685	171	6805
131	6605	155	6725	179	6845
139	6645	163	6765		

UNII-7					
IEEE 802.11ax(HE80), IEEE 802.11be(EHT80)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
119	6545	151	6705	183	6865
135	6625	167	6785		

UNII-7					
IEEE 802.11ax(HE160), IEEE 802.11be(EHT160)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
143	6665	175	6825		

UNII-8					
IEEE 802.11ax(HE20), IEEE 802.11be(EHT20)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
189	6895	205	6975	221	7055
193	6915	209	6995	225	7075
197	6935	213	7015	229	7095
201	6955	217	7035	233	7115

UNII-8					
IEEE 802.11ax(HE40), IEEE 802.11be(EHT40)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
187	6885	203	6965	219	7045
195	6925	211	7005	227	7085

UNII-8					
IEEE 802.11ax(HE80), IEEE 802.11be(EHT80)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
199	6945	215	7025		

UNII-8					
IEEE 802.11ax(HE160), IEEE 802.11be(EHT160)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
207	6985				

3. Table for Filed Antenna:

Ant.	Manufacturer	P/N	Antenna Type	Connector	Gain (dBi)
1	Amphenol Taiwan Corporation	BY515A-16-011-C	PIFA	IPEX	3.92
2	Amphenol Taiwan Corporation	BY515A-16-012-C	PIFA	IPEX	3.71

Note:

- (1) The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and receivers (2T2R).
- (2) Note: Ant.1 refers to Main Antenna. Ant.2 refers to Aux Antenna.
- (3) The antenna gain is provided by the manufacturer.


4. Table for Antenna Configuration:

Operating Mode	TX Mode	2TX
IEEE 802.11ax(HE20)		V (Ant. 1+Ant. 2)
IEEE 802.11ax(HE40)		V (Ant. 1+Ant. 2)
IEEE 802.11ax(HE80)		V (Ant. 1+Ant. 2)
IEEE 802.11ax(HE160)		V (Ant. 1+Ant. 2)
IEEE 802.11be(EHT20)		V (Ant. 1+Ant. 2)
IEEE 802.11be(EHT40)		V (Ant. 1+Ant. 2)
IEEE 802.11be(EHT80)		V (Ant. 1+Ant. 2)
IEEE 802.11be(EHT160)		V (Ant. 1+Ant. 2)
IEEE 802.11be(EHT320)		V (Ant. 1+Ant. 2)

3.2 TEST MODES

Test Items	Test Mode	Channel	Note
AC Power Line Conducted Emissions	IEEE 802.11be(EHT160)	207	-
Radiated Emissions-30MHz to 1000MHz	IEEE 802.11be(EHT160)	207	-
Radiated Emissions-Above 1000 MHz	IEEE 802.11be(EHT160)	207	Bandedge
	IEEE 802.11be(EHT160)	207	Harmonic

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

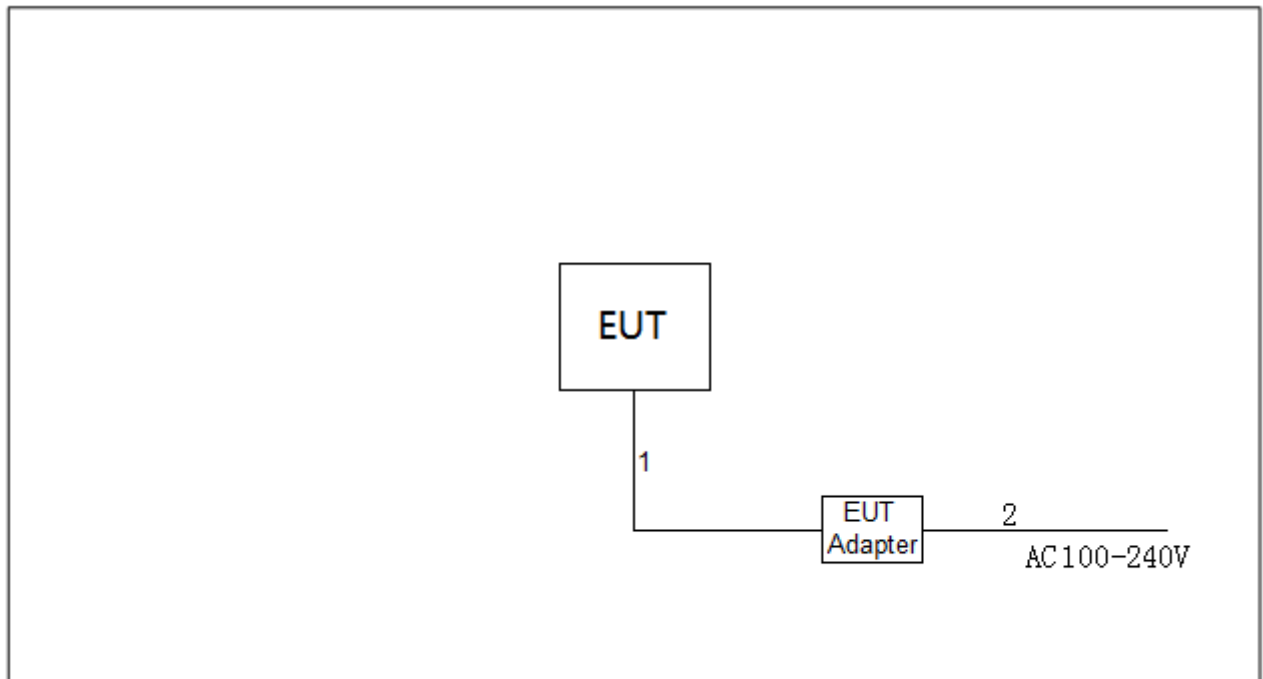

3.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
-	-	-	-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.2m
2	AC Cable	NO	NO	1.5m

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
Margin Level = Measurement Value – Limit Value

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

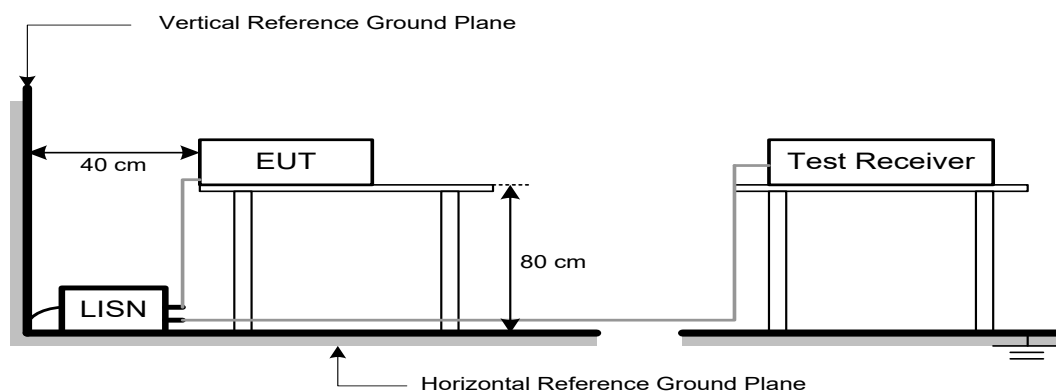

4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

According to 15.407(b)(6) the limits are as follows:

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (30 MHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Maximum field strength Limit at 3m (dBμV/m)	Maximum field strength Limit at 1m (dBμV/m)
5925-7125	Average: -27	68.2	77.7 (Note 2)

NOTE:

(1) e.i.r.p. Limit (dBuV/m at 3m) = Power Limit(dBm) + 95.2. (Referring to FCC KDB 987594 D02, clause G.2.d)(iii))

(2)

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

$20 \log (d_{\text{limit}}/d_{\text{measure}}) = 20 \log (3/1) = 9.5 \text{ dB}$.

FS_{limit} : Harmonic at 3m Peak and Average limit.

FS_{max} : Harmonic at 1m Peak and Average Maximum value.

d_{limit} : Harmonic at 3m test distance.

d_{measure} : Harmonic Actual test distance.

(3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain (if use)

Margin Level = Measurement Value - Limit Value

5.2 TEST PROCEDURE

For measurements 30 MHz to 40 GHz:

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(30MHz to 1GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (30MHz to 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz



Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value

Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector


5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 TEST SETUP

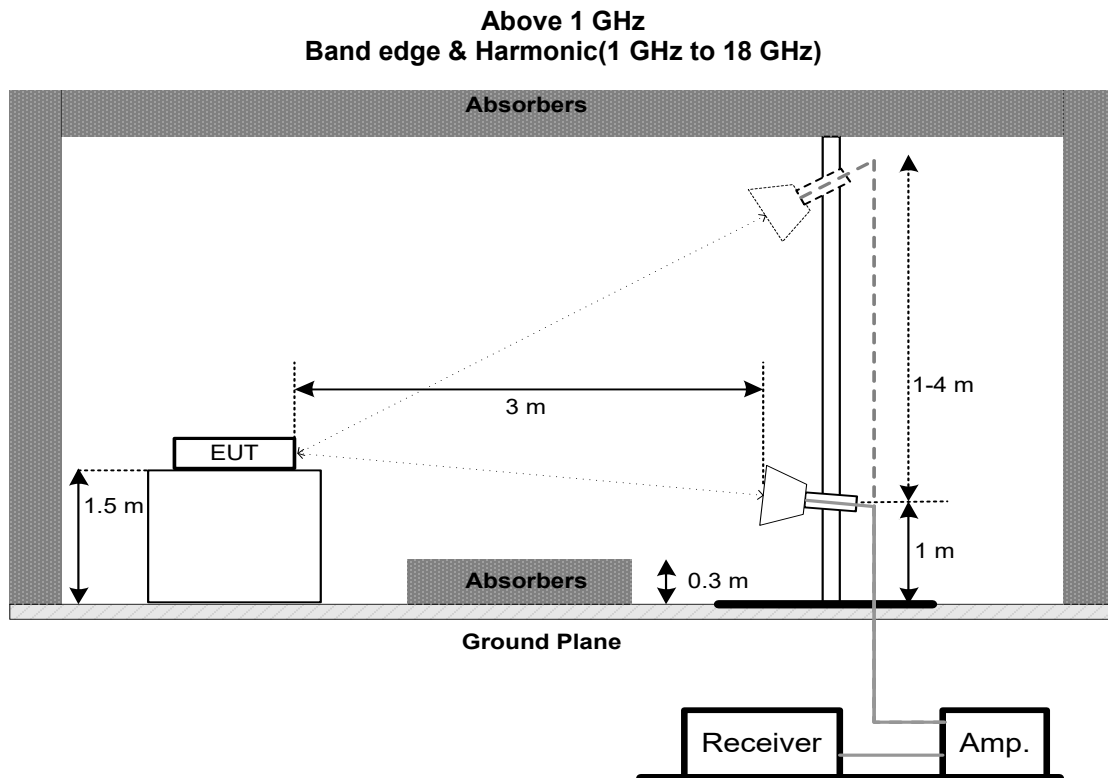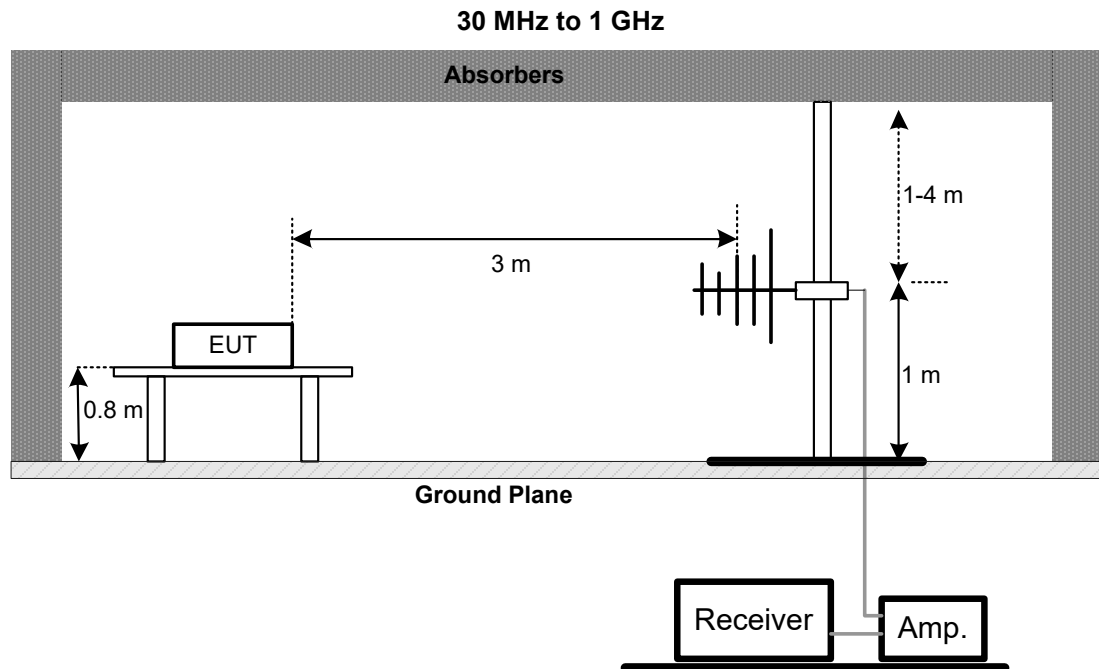

Harmonic(18 GHz to 40 GHz)

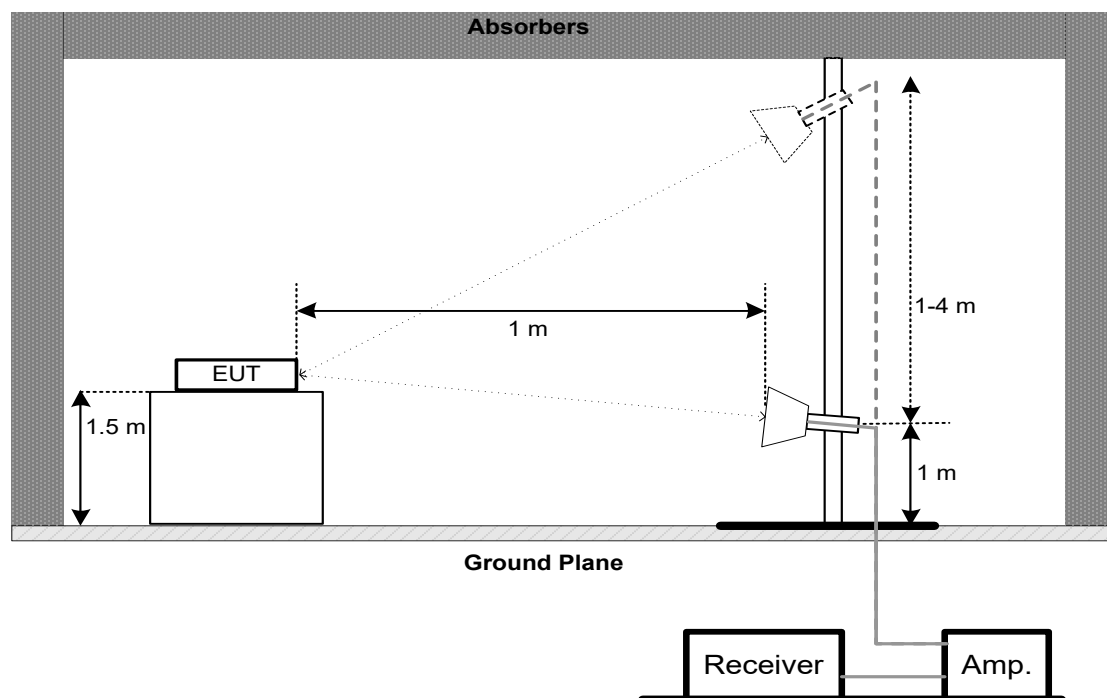

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX B.

5.7 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX C.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Nov. 21, 2026
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Nov. 21, 2026
3	BTL RE System	BTL	BTL RE System	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Jul. 08, 2026
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec. 07, 2026
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec.07,2026
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 17, 2026
4	Cable	RegalWay	LMR400-NMNM-12.5 m	N/A	Jun. 04, 2026
5	Cable	RegalWay	LMR400-NMNM-3m	N/A	Jun. 04, 2026
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	Jun. 04, 2026
7	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2026
8	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
9	Positioning Controller	MF	MF-7802	N/A	N/A
10	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
11	966 Chamber room	CM	9*6*6	N/A	May 15, 2026


Radiated Emissions - 1 GHz-18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2026
2	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980888	Oct. 17, 2026
3	Double Ridged Guide Antenna	ETS	3115	75846	Mar. 02,2026
4	Cable	RegalWay	RWLP50-4.0A-SMSM-12.5M	N/A	Jun. 29, 2026
5	Cable	RegalWay	RWLP50-4.0A-NMRASM-2.5M	N/A	Jun. 29, 2026
6	Cable	RegalWay	RWLP50-4.0A-NMRASM RA-0.8M	N/A	Jun. 29, 2026
7	966 Chamber room	CM	9*6*6	N/A	May 18, 2026
8	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
9	Filter	COM-MW	ZHPF6-M8000 18000-1331	N/A	Oct. 17, 2026
10	Positioning Controller	MF	MF-7802	N/A	N/A
11	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Oct. 29, 2025
2	Cable	RegalWay	RWLP50-2.6A-2.92M2.9 2M-1.1M	N/A	Jul. 25, 2025
3	Cable	Tonscend	HF160-KMKM-3M	N/A	Jul. 25, 2025
4	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170(3m)	9170-319	Jun. 16, 2025
5	966 Chamber room	CM	9*6*6	N/A	May 19, 2025
6	Positioning Controller	MF	MF-7802	N/A	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63380204	Oct. 29, 2025

Remark "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	UNII-8_TX BE(EHT160) Mode Channel 207	Phase	Line
-----------	---------------------------------------	-------	------

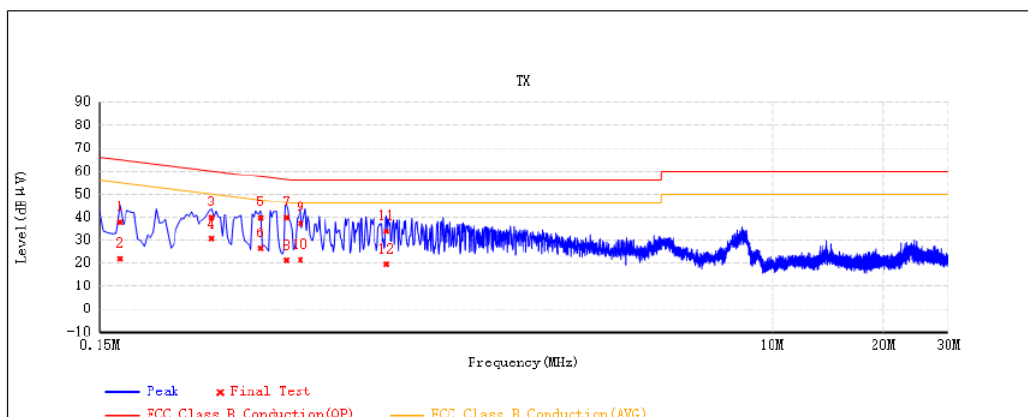


Suspected Note List									
	NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content
	1	0.17	27.62	10.38	38	64.96	-26.96	QP	
	2	0.17	11.42	10.38	21.79	54.96	-33.17	AVG	
	3	0.3016	29.48	10.45	39.93	60.19	-20.26	QP	
	4	0.3016	20.25	10.45	30.7	50.19	-19.49	AVG	
	5	0.4101	29.34	10.46	39.81	57.65	-17.84	QP	
	6	0.4101	16.19	10.46	26.66	47.65	-20.99	AVG	
*	7	0.4819	29.44	10.48	39.91	56.3	-16.39	QP	
	8	0.4819	10.68	10.48	21.15	46.3	-25.15	AVG	
	9	0.5255	26.99	10.49	37.47	56	-18.53	QP	
	10	0.5255	10.84	10.49	21.33	46	-24.67	AVG	
	11	0.8983	23.3	10.56	33.85	56	-22.15	QP	
	12	0.8983	8.94	10.56	19.5	46	-26.5	AVG	

REMARKS:

- (1) Level = Reading + Factor.
- (2) Margin = Level - Limit.

Test Mode	UNII-8_TX BE(EHT160) Mode Channel 207	Phase	Neutral
-----------	---------------------------------------	-------	---------

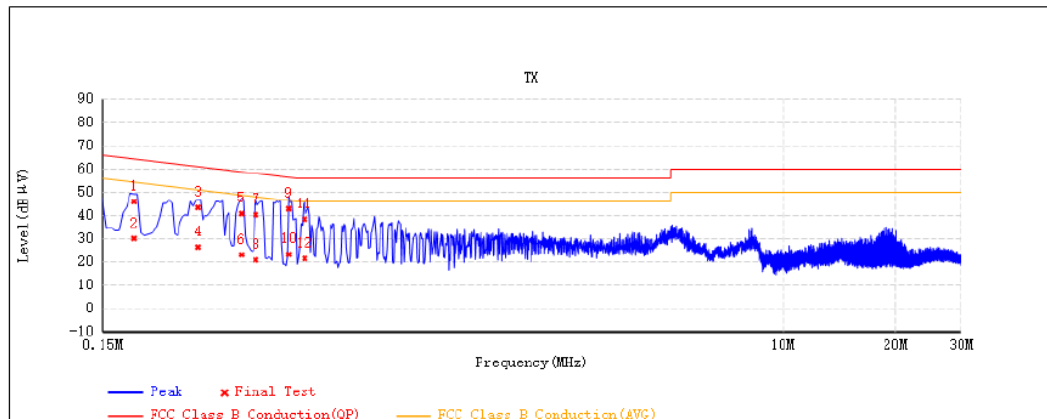


Suspected Note List									
	NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content
	1	0.1825	35.65	10.43	46.08	64.39	-18.31	QP	
	2	0.1825	19.77	10.43	30.21	54.39	-24.19	AVG	
	3	0.2698	33.06	10.46	43.52	61.12	-17.6	QP	
	4	0.2698	16.07	10.46	26.53	51.12	-24.59	AVG	
	5	0.354	30.42	10.49	40.91	58.87	-17.96	QP	
	6	0.354	12.69	10.49	23.18	48.87	-25.69	AVG	
	7	0.386	29.94	10.49	40.43	58.15	-17.72	QP	
	8	0.386	10.4	10.49	20.89	48.15	-27.26	AVG	
*	9	0.4737	32.46	10.5	42.96	56.44	-13.48	QP	
	10	0.4737	12.82	10.5	23.33	46.44	-23.12	AVG	
	11	0.5223	28.02	10.51	38.53	56	-17.47	QP	
	12	0.5223	10.99	10.51	21.51	46	-24.49	AVG	

REMARKS:

- (1) Level = Reading + Factor.
- (2) Margin = Level - Limit.

APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	UNII-8_TX BE(EHT160) Mode Channel 207	Polarization	Vertical
-----------	---------------------------------------	--------------	----------

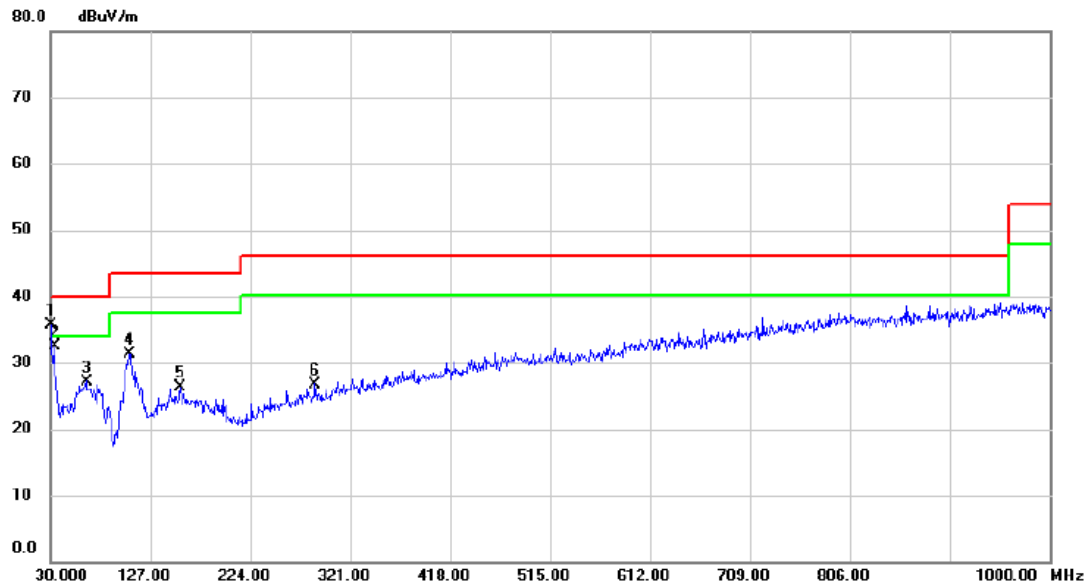


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.000	47.18	-11.44	35.74	40.00	-4.26	peak	
2	33.880	44.97	-12.43	32.54	40.00	-7.46	peak	
3	64.920	39.39	-12.19	27.20	40.00	-12.80	peak	
4	106.630	45.84	-14.54	31.30	43.52	-12.22	peak	
5	156.100	36.92	-10.65	26.27	43.52	-17.25	peak	
6	287.050	36.87	-10.07	26.80	46.02	-19.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE(EHT160) Mode Channel 207	Polarization	Horizontal
-----------	---------------------------------------	--------------	------------

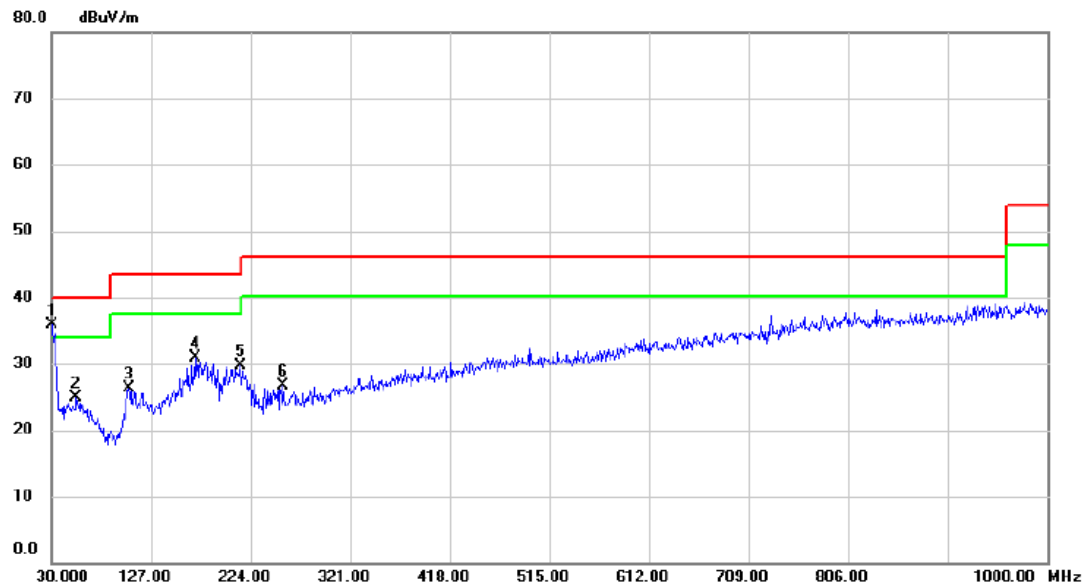


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.000	47.33	-11.44	35.89	40.00	-4.11	peak	
2		54.250	36.17	-11.24	24.93	40.00	-15.07	peak	
3		105.660	40.92	-14.66	26.26	43.52	-17.26	peak	
4		169.680	41.78	-10.87	30.91	43.52	-12.61	peak	
5		214.300	43.42	-13.81	29.61	43.52	-13.91	peak	
6		256.010	38.05	-11.27	26.78	46.02	-19.24	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	UNII-8_TX BE(EHT160) Mode Channel 207	Polarization	Vertical
-----------	---------------------------------------	--------------	----------

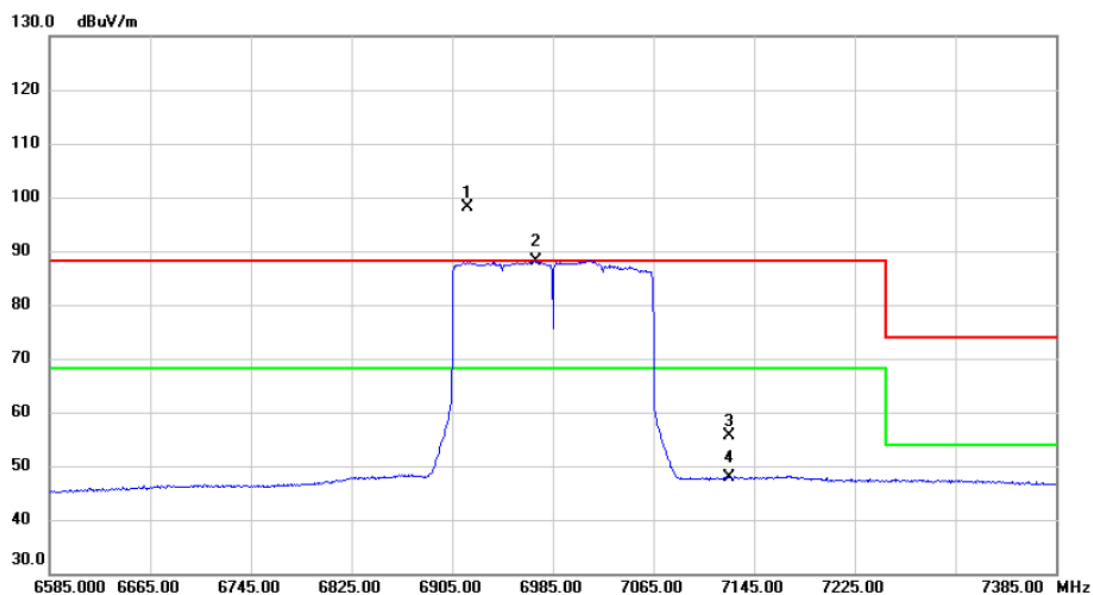


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6917.000	80.55	17.48	98.03	88.20	9.83	peak	No Limit
2	*	6971.400	70.67	17.55	88.22	68.20	20.02	AVG	No Limit
3		7125.000	37.84	17.76	55.60	88.20	-32.60	peak	
4		7125.000	30.08	17.76	47.84	68.20	-20.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE(EHT160) Mode Channel 207	Polarization	Horizontal
-----------	---------------------------------------	--------------	------------

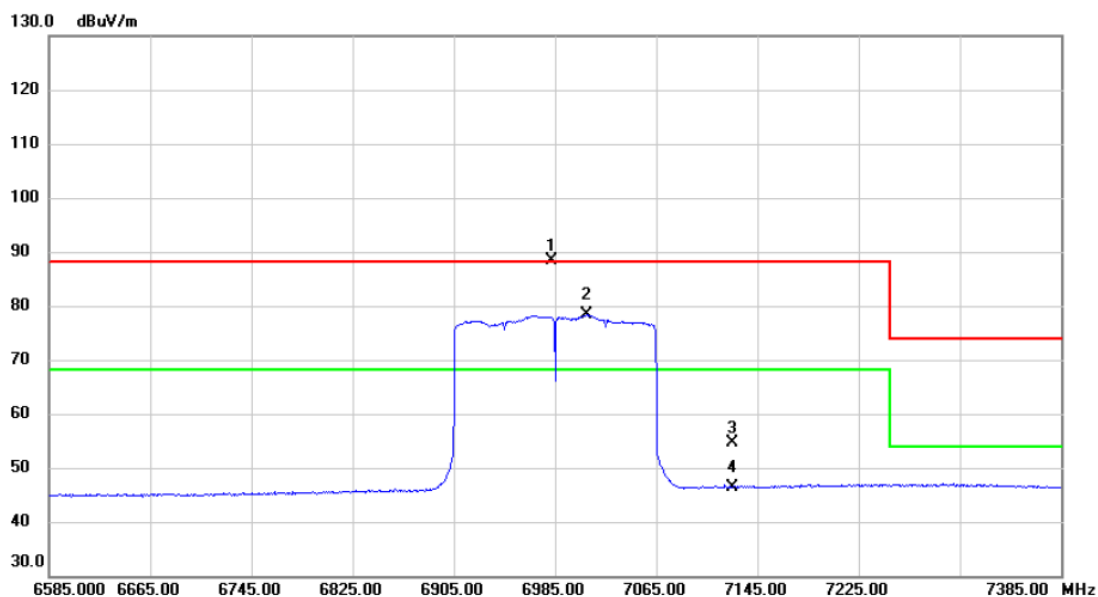


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6982.600	70.83	17.56	88.39	88.20	0.19	peak	No Limit
2	*	7009.800	60.67	17.59	78.26	68.20	10.06	AVG	No Limit
3		7125.000	36.81	17.76	54.57	88.20	-33.63	peak	
4		7125.000	28.61	17.76	46.37	68.20	-21.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE(EHT160) Mode Channel 207	Polarization	Vertical
-----------	---------------------------------------	--------------	----------

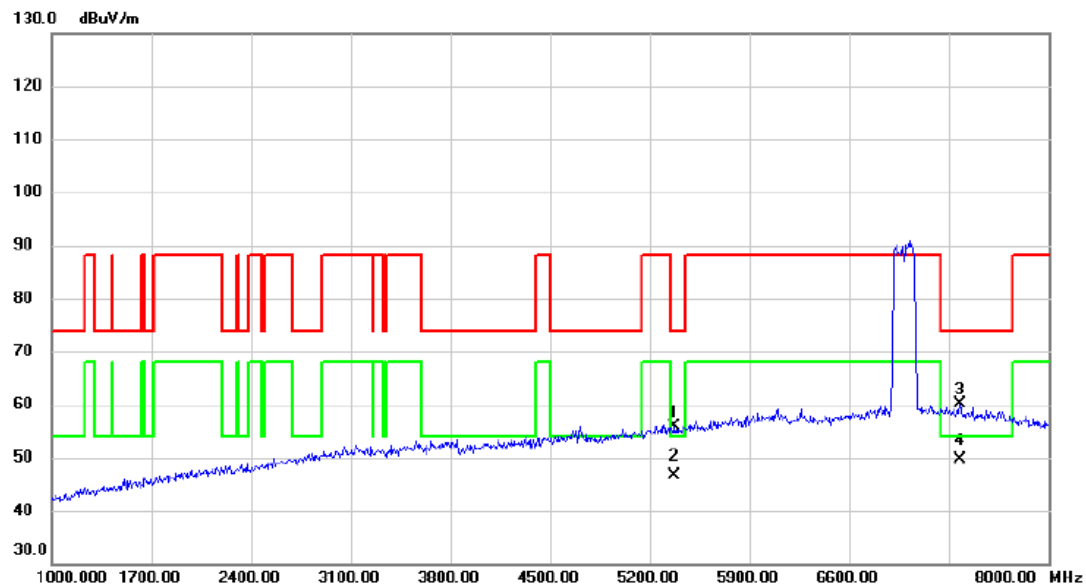


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5375.000	40.28	15.57	55.85	74.00	-18.15	peak	
2		5375.000	30.94	15.57	46.51	54.00	-7.49	AVG	
3		7377.000	40.54	19.50	60.04	74.00	-13.96	peak	
4	*	7377.000	30.18	19.50	49.68	54.00	-4.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE(EHT160) Mode Channel 207	Polarization	Horizontal
-----------	---------------------------------------	--------------	------------

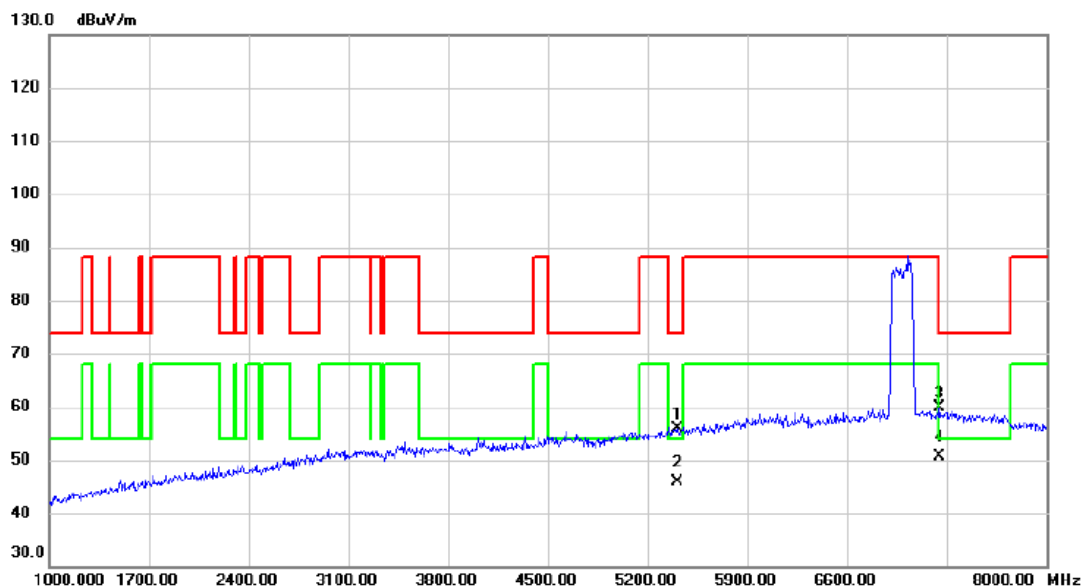


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5410.000	40.29	15.66	55.95	74.00	-18.05	peak	
2		5410.000	30.25	15.66	45.91	54.00	-8.09	AVG	
3		7251.000	40.28	19.59	59.87	74.00	-14.13	peak	
4	*	7251.000	30.94	19.59	50.53	54.00	-3.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE(EHT160) Mode Channel 207	Polarization	Vertical
-----------	---------------------------------------	--------------	----------

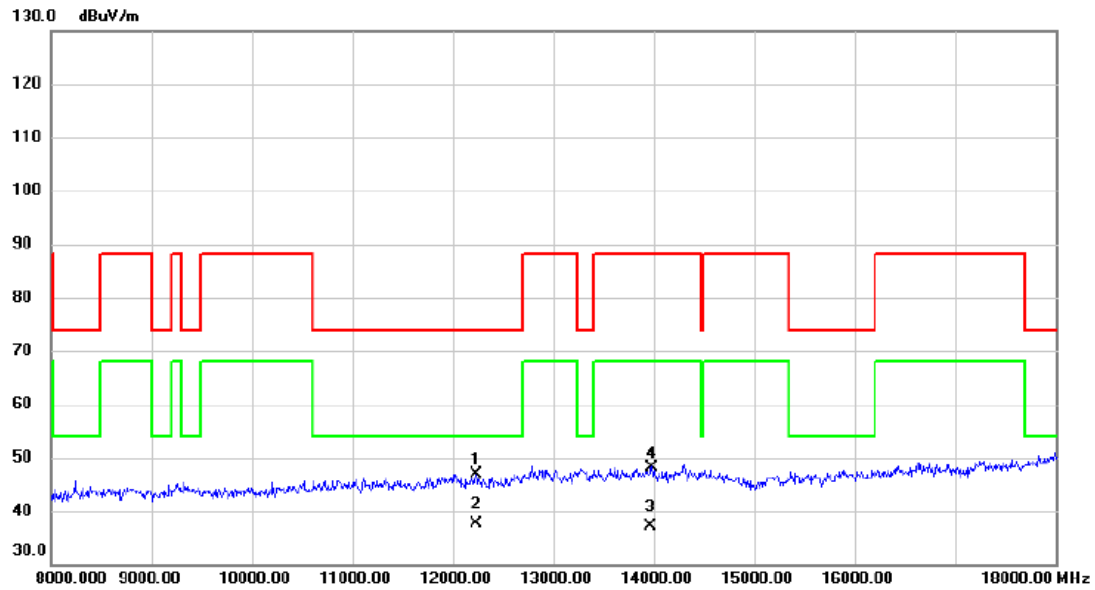


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12230.000	36.94	10.00	46.94	74.00	-27.06	peak	
2	*	12230.000	27.61	10.00	37.61	54.00	-16.39	AVG	
3		13971.920	26.57	10.45	37.02	68.20	-31.18	AVG	
4		13976.880	37.65	10.44	48.09	88.20	-40.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE(EHT160) Mode Channel 207	Polarization	Horizontal
-----------	---------------------------------------	--------------	------------

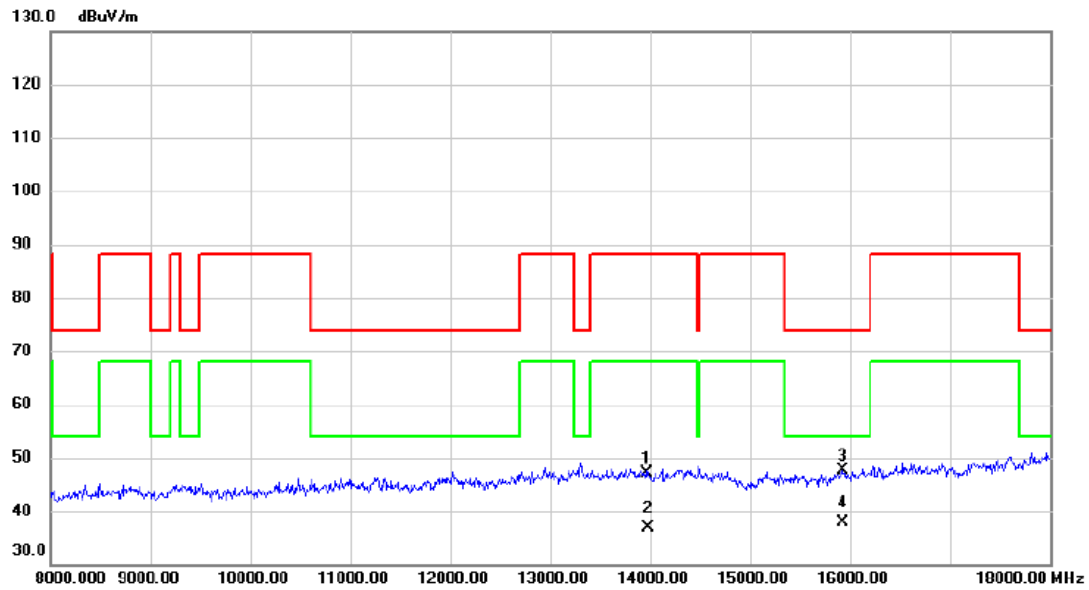

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13973.060	36.64	10.45	47.09	88.20	-41.11	peak	
2		13977.340	26.48	10.44	36.92	68.20	-31.28	AVG	
3		15920.000	37.98	9.53	47.51	74.00	-26.49	peak	
4	*	15920.000	28.42	9.53	37.95	54.00	-16.05	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		31365.000	47.18	5.19	52.37	83.50	-31.13	peak
2		31365.000	41.75	5.19	46.94	63.50	-16.56	AVG
3		39582.000	46.51	10.87	57.38	83.50	-26.12	peak
4	*	39582.000	40.84	10.87	51.71	63.50	-11.79	AVG

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE(EHT160) Mode Channel 207	Polarization	Horizontal
-----------	---------------------------------------	--------------	------------

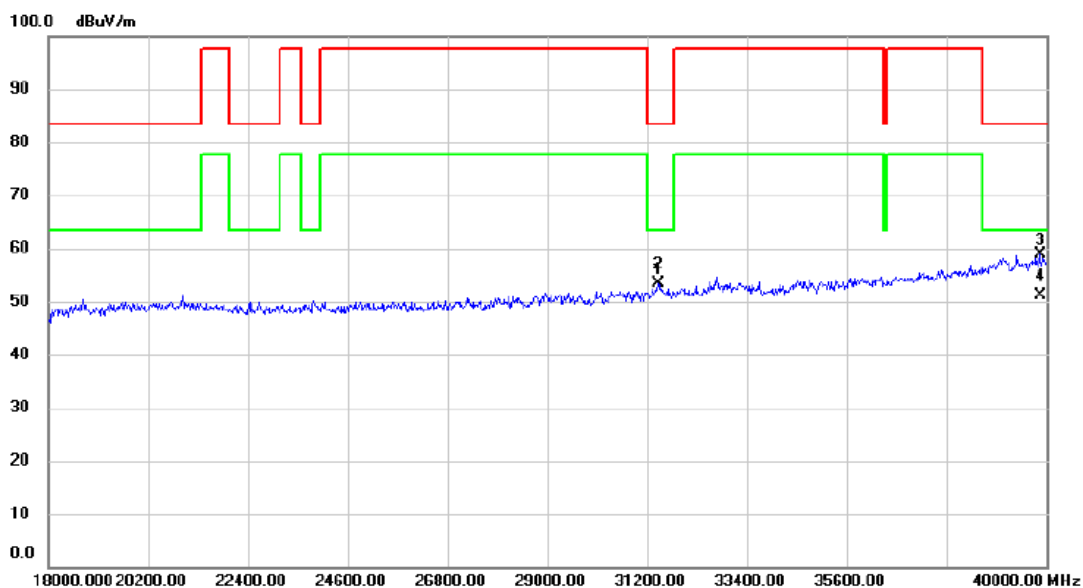

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31442.000	48.24	5.20	53.44	83.50	-30.06	peak	
2	*	31442.000	48.24	5.20	53.44	63.50	-10.06	AVG	
3		39857.000	47.87	10.89	58.76	83.50	-24.74	peak	
4		39857.000	40.21	10.89	51.10	63.50	-12.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

End of Test Report