



FCC SAR Test Report

FCC ID: RWO-RZ090581

Project No. : 2512C098A
Equipment : Notebook PC
Brand Name : RAZER
Model Name : RZ09-0581
Date of Receipt : Dec. 08, 2025
Date of Test : Dec. 08, 2025 ~ Dec. 28, 2025
Issued Date : Jan. 29, 2026
Test Sample : Sample No.: DG920251208454
Standard(s) : Please refer to page 2.
Applicant : Razer Inc.
Address : 9 Pasteur, Irvine, CA92618, USA.
Manufacturer : Razer Inc.
Address : 9 Pasteur, Irvine, CA92618, USA.

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by :

Dana Chen

Dana Chen

Approved by :

Herbert Liu

Herbert Liu

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Service mail: btl_qa@newbtl.com

Standard(s)	: IEEE Std C95.1:2019 IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 kHz to 300 GHz IEEE Std 1528™-2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques IEC/IEEE 62209-1528:2020 Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz). IEC TR 63170-2018 Measurement procedure for the evaluation of power density related to human exposure to radio frequency fields from wireless communication devices operating between 6 GHz and 100 GHz. IEC/IEEE 63195-1-2022 Assessment of power density of human exposure to radio frequency fields from wireless devices in close proximity to the head and body (frequency range of 6 GHz to 300 GHz) –Part 1: Measurement procedure. KDB447498 D04 Interim General RF Exposure Guidance v01 KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
Test Method	: KDB616217 D04 SAR for laptop and tablets v01r02 KDB248227 D01 802.11 Wi-Fi SAR v02r02 KDB865664 D02 SAR Reporting v01r02 KDB690783 D01 SAR Listings on Grants v01r03

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	6
1 . GENERAL INFORMATION	7
1.1 STATEMENT OF COMPLIANCE	7
1.2 LABORATORY ENVIRONMENT	7
1.3 GENERAL DESCRIPTION OF EUT	8
1.4 MAIN TEST INSTRUMENTS	10
2 . RF EMISSIONS MEASUREMENT	11
2.1 TEST FACILITY	11
2.2 MEASUREMENT UNCERTAINTY	11
3 . SAR MEASUREMENTS SYSTEM CONFIGURATION	15
3.1 SAR MEASUREMENT SET-UP	15
3.1.1 TEST SETUP LAYOUT	15
3.2 DASY E-FIELD PROBE SYSTEM	16
3.2.1 PROBE SPECIFICATION	16
3.2.2 E-FIELD PROBE CALIBRATION	17
3.2.3 OTHER TEST EQUIPMENT	18
3.2.4 SCANNING PROCEDURE	19
3.2.5 DATA STORAGE AND EVALUATION	20
3.2.6 SPATIAL PEAK SAR EVALUATION	21
3.2.7 DATA EVALUATION BY SEMCAD	22
4 . SYSTEM VERIFICATION PROCEDURE	24
4.1 TISSUE VERIFICATION	24
4.2 SYSTEM CHECK	24
4.2.1 POWER DENSITY SYSTEM CHECK	25
4.3 SYSTEM CHECK PROCEDURE	26
5 . SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	27
5.1 SAR MEASUREMENT VARIABILITY	27
6 . OPERATIONAL CONDITIONS DURING TEST	28
6.1 SAR TEST CONFIGURATION	28
6.1.1 WIFI TEST CONFIGURATION	28
6.2 TEST POSITION	31
6.2.1 NOTEBOOK MODE	31
7 . TEST RESULT	33
7.1 CONDUCTED POWER RESULTS	33

Table of Contents	Page
7.2 SAR TEST RESULTS	68
7.2.1 SAR MEASUREMENT RESULT	69
7.3 MULTIPLE TRANSMITTER EVALUATION	76
7.3.1 SIMULTANEOUS TRANSMISSION CONDITIONS	77
7.3.2 SAR UMMATION SCENARIO	78
APPENDIX	79
1. TEST LAYOUT	79
Appendix A. SAR Plots of System Verification	
Appendix B. SAR Plots of SAR Measurement	
Appendix C. Calibration Certificate	
Appendix D. Photographs of the Test Set-Up	

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCC SAR-1-2512C098A	R00	Original Report.	Jan. 29, 2026	Valid

1. GENERAL INFORMATION

1.1 STATEMENT OF COMPLIANCE

Mode	Highest Reported Body SAR-1g (W/kg)
WLAN 2.4G	1.151
WLAN 5.2G	1.151
WLAN 5.3G	1.263
WLAN 5.6G	1.302
WLAN 5.8G	1.343
WLAN 5.9G	1.220
WLAN 6.2G	0.572
WLAN 6.5G	0.511
WLAN 6.7G	0.500
WLAN 7.0G	0.524
Bluetooth	0.205

Note:

1) The device is in compliance with Specific Absorption Rate (SAR) for general population uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI/IEEE C95.1, the NCRP Report Number 86 for uncontrolled environment, and had been tested in accordance with the measurement methods and procedures specified in IEC/IEEE 62209-1528.

2) According to 47 CFR part 2.1093, the MPE limits specified in part 1.1310 apply to portable devices that transmit at frequencies above 6 GHz. The localized power density limit for general population exposure is 1.0 mW/cm² (equal to 10 W/m²) for frequency up to 100 GHz.

1.2 LABORATORY ENVIRONMENT

Temperature	Min. = 18°C, Max. = 25°C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

1.3 GENERAL DESCRIPTION OF EUT

Equipment	Notebook PC											
Brand Name	RAZER											
Test Model	RZ09-0581											
Model Name	RZ09-0581											
Model Difference(s)	N/A											
Hardware Version	APF25002_MB											
Firmware Version	Windows 11											
Modulation	WiFi(DSSS/OFDM/OFDMA), BT(GFSK/π/4-DQPSK/8-DPSK)											
Operation Frequency Range(s)	Band				TX (MHz)			RX (MHz)				
	Bluetooth				2400~2483.5							
	WiFi	2.4G			2400~2483.5							
		5G	UNII 1			5150~5250						
			UNII 2a			5250~5350						
			UNII 2c			5470~5725						
			UNII 3			5725~5850						
			UNII 4			5850~5895						
		6E	UNII 5			5925~6425						
			UNII 6			6425~6525						
			UNII 7			6525~6875						
UNII 8			6875~7125									
Test Channels (low-mid-high)	0-39-78 (BT)											
	0-19-39 (BLE)											
	1-6-11-12-13 (2.4G WIFI 802.11b/g/n HT20/ax HE20/be EHT20)											
	3-6-9-10-11 (2.4G WIFI 802.11n HT40/ax HE40/be EHT40)											
	Band		5.2G	5.3G	5.6G	5.8G	5.9G	6.2G	6.5G	6.7G	7.0G	
	a		36-40-48	52-60-64	100-120-140	149-157-165	169-173-177	/	/	/	/	
	n HT20				100-120-140-144	144-149-157-165		/	/	/	/	
	ax HE20							1-45-93	97-105-113	117-149-181	185-209-229-233	
	be EHT20											
	n HT40		38-46	54-62	102-118-134-142	142-151-159	167-175	/	/	/	/	
	ax HE40							3-43-91	99-107-115	123-147-179	187-211-227	
	be EHT40											
	ac VHT80		42	58	106-122-138	138-155	171	/	/	/	/	
	ax HE80							7-39-87	103-119	135-151-167	183-199-215	
	be EHT80											
	ac VHT160		/	50	114	/	163	/	/	/	/	
	ax HE160		/			/		15-79	111	143	207	
	be EHT160		/			/						
	be EHT320		/	/	/	/	/	31-63	/	/	/	

Antenna Information	Ant.	Manufacturer	Ant. Part number	Type	Band	Gain (dBi)
	Main Ant	Quectel	Y4RRW0MA4CA	PIFA	2400-2483.5	2.58
					5150-5350	3.55
					5470-5725	3.45
					5725-5850	3.70
					5850-5895	2.93
					5925-6425	3.31
					6425-6525	2.63
					6525-6875	2.57
					6875-7125	2.27
	Aux Ant	Quectel	Y4RRW0MA4BA	PIFA	2400-2483.5	2.58
					5150-5350	2.46
					5470-5725	2.77
					5725-5850	3.59
					5850-5895	3.54
					5925-6425	3.48
					6425-6525	3.64
					6525-6875	3.80
	6875-7125	2.87				
Other Information						
Battery Information	Model Name	RC30-0528				
	Power Rating	15.56V 5494mAh 85.5Wh				

Note: The antenna gain is provided by the manufacturer.

1.4 MAIN TEST INSTRUMENTS

Item	Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Interval
1	Data Acquisition Electronics	Speag	DAE4	420	Apr. 08, 2025	1 Year
2	Data Acquisition Electronics	Speag	DAE4	1717	Jun. 19, 2025	1 Year
3	E-field Probe	Speag	EX3DV4	7693	Nov. 26, 2025	1 Year
4	E-field Probe	Speag	EX3DV4	7544	Jun. 19, 2025	1 Year
5	E-field Probe	Speag	EX3DV4	3809	Jan. 24, 2025	1 Year
6	EUmmWV4 Probe	Speag	EUmmWV4	9561	Jun. 18, 2025	1 Year
7	System Validation Dipole	Speag	D2450V2	919	Apr. 22, 2024	3 Years
8	System Validation Dipole	Speag	D5GHzV2	1160	Apr. 25, 2024	3 Years
9	System Validation Dipole	Speag	D6.5GHzV2	1052	Nov. 13, 2024	3 Years
10	System Validation Source	Speag	5G Verification Source 10GHz	1041	May 27, 2025	1 Years
11	ELI Phantom	Speag	ELI Phantom V5.0	1222	N/A	N/A
12	ELI Phantom	Speag	ELI Phantom V5.0	1128	N/A	N/A
13	Power Amplifier	Mini-Circuits	ZVE-8G+	520701341	Jan. 12, 2025	1 Year
14	Power Amplifier	Talent Microwave	TLPA1G18G-40-3 3-HS	220330003	Sep. 18, 2025	1 Year
15	DC Source meter	Iteck	IT6154	0061041267682 01001	May 29, 2025	1 Year
16	Vector Network Analyzer	Agilent	E5071C	MY46102965	Jan. 11, 2025	1 Year
17	Signal Generator	Keysight	N5173B	MY59101420	Jan. 11, 2025	1 Year
18	Smart Power Sensor	R&S	NRP18S	101333	May 29, 2025	1 Year
19	3.5mm Economy Calibration Kit	Agilent	85052D	MY43252246	Nov. 20, 2025	1 Year
20	Dielectric Assessment Kit	Speag	DAK-3.5	1226	Jan. 20, 2025	3 Years
21	Directional Coupler	Talent Microwave	TC-05180-20S	210628013	Jan. 11, 2025	1 Year
22	Liquid Thermometer	Nscing Es	YZ6021S	/	Nov. 13, 2025	1 Year

Note:

1. "N/A" denotes no model name, serial No. or calibration specified.

2.

1) Per KDB865664 D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

a) There is no physical damage on the dipole;

b) System check with specific dipole is within 10% of calibrated value;

c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement;

d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a short block performed before measuring liquid parameters.

2. RF EMISSIONS MEASUREMENT

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is SAR room at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

Note: The test uses more than one Probe, and only the worst uncertainty result is presented.

Uncertainty Budget for Frequency range of 300 MHz to 3 GHz

Symbol	Input quantity X_i (source of uncertainty)	Unc. Value	Prob. Dist.	Div.	ci (1g)	ci (10g)	Std.Unc. (1g) (±%)	Std.Unc. (10g) (±%)
Measurement system errors								
CF	Probe calibration(±%)	13.0	N	2	1	1	6.5	6.5
CF_{drift}	Probe calibration drift(±%)	1.7	R	$\sqrt{3}$	1	1	1.0	1.0
LIN	Probe linearity and detection limit(±%)	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
BBS	Broadband signal(±%)	3.0	R	$\sqrt{3}$	1	1	1.7	1.7
ISO	Probe isotropy(±%)	7.6	R	$\sqrt{3}$	1	1	4.4	4.4
DAE	Other probe and data acquisition errors(±%)	0.7	N	1	1	1	0.7	0.7
AMB	RF ambient and noise(±%)	1.8	N	1	1	1	1.8	1.8
Δ_{xyz}	Probe positioning errors(±mm)	0.006	N	1	0.14	0.14	0.08	0.08
DAT	Data processing errors(±%)	1.2	N	1	1	1	1.2	1.2
Phantom and device (DUT or validation antenna) errors								
LIQ(σ)	Conductivity (meas.)(±%)	0.8	N	1	0.78	0.71	0.7	0.6
LIQ(T_c)	Conductivity (temp.)(±%)	4.16	R	$\sqrt{3}$	0.78	0.71	1.9	1.7
EPS	Phantom Permittivity(±%)	14	R	$\sqrt{3}$	0	0	0.0	0.0
DIS	Distance DUT - TSL(±%)	2	N	1	2	2	4.0	4.0
D_{xyz}	Device Positioning(±%)	0.1	N	1	1	1	0.1	0.1
H	Device Holder(±%)	2.1	N	1	1	1	2.1	2.1
MOD	DUT Modulationm(±%)	2.4	R	$\sqrt{3}$	1	1	1.4	1.4
TAS	Time-average SAR(±%)	1.7	R	$\sqrt{3}$	1	1	1.0	1.0
RF_{drift}	DUT drift(±%)	1.3	N	1	1	1	1.3	1.3
VAL	Val Antenna Unc.(±%)	0	N	1	1	1	0.0	0.0
P_{in}	Unc. Input Power(±%)	0	N	1	1	1	0.0	0.0
Corrections to the SAR result								
C(ϵ',σ)	Deviation to Target(±%)	1.9	N	1	1	0.84	1.9	1.6
C(R)	SAR scaling(±%)	0	R	$\sqrt{3}$	1	1	0.0	0.0
u(ΔSAR)	Combined uncertainty						10.5	10.4
	Coverage Factor for 95%						k=2	k=2
U	Expanded uncertainty					U =	21.0	20.9
a Other probability distributions and divisors may be used if they better represent available knowledge of the quantities concerned.								

Uncertainty Budget for Frequency range of 3 GHz to 6 GHz

Symbol	Input quantity X_i (source of uncertainty)	Unc. Value	Prob. Dist.	Div.	ci (1g)	ci (10g)	Std.Unc. (1g) (±%)	Std.Unc. (10g) (±%)
Measurement system errors								
CF	Probe calibration(±%)	14.0	N	2	1	1	7.0	7.0
CF_{drift}	Probe calibration drift(±%)	1.7	R	$\sqrt{3}$	1	1	1.0	1.0
LIN	Probe linearity and detection limit(±%)	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
BBS	Broadband signal(±%)	2.6	R	$\sqrt{3}$	1	1	1.5	1.5
ISO	Probe isotropy(±%)	7.6	R	$\sqrt{3}$	1	1	4.4	4.4
DAE	Other probe and data acquisition errors(±%)	1.2	N	1	1	1	1.2	1.2
AMB	RF ambient and noise(±%)	1.8	N	1	1	1	1.8	1.8
Δ_{xyz}	Probe positioning errors(±mm)	0.005	N	1	0.29	0.29	0.15	0.15
DAT	Data processing errors(±%)	2.3	N	1	1	1	2.3	2.3
Phantom and device (DUT or validation antenna) errors								
LIQ(σ)	Conductivity (meas.)(±%)	0.7	N	1	0.78	0.71	0.6	0.5
LIQ(T_c)	Conductivity (temp.)(±%)	2.45	R	$\sqrt{3}$	0.78	0.71	1.1	1.0
EPS	Phantom Permittivity(±%)	14	R	$\sqrt{3}$	0.25	0.25	2.0	2.0
DIS	Distance DUT - TSL(±%)	2	N	1	2	2	4.0	4.0
D_{xyz}	Device Positioning(±%)	0.5	N	1	1	1	0.5	0.5
H	Device Holder(±%)	1.9	N	1	1	1	1.9	1.9
MOD	DUT Modulationm(±%)	2.4	R	$\sqrt{3}$	1	1	1.4	1.4
TAS	Time-average SAR(±%)	1.7	R	$\sqrt{3}$	1	1	1.0	1.0
RF_{drift}	DUT drift(±%)	1.1	N	1	1	1	1.1	1.1
VAL	Val Antenna Unc.(±%)	0	N	1	1	1	0.0	0.0
P_{in}	Unc. Input Power(±%)	0	N	1	1	1	0.0	0.0
Corrections to the SAR result								
C(ϵ', σ)	Deviation to Target(±%)	1.9	N	1	1	0.84	1.9	1.6
C(R)	SAR scaling(±%)	0	R	$\sqrt{3}$	1	1	0.0	0.0
u(ΔSAR)	Combined uncertainty						11.0	11.0
	Coverage Factor for 95%						k=2	k=2
U	Expanded uncertainty					U =	22.1	22.0
a Other probability distributions and divisors may be used if they better represent available knowledge of the quantities concerned.								

Uncertainty Budget for Frequency range of above 6 GHz

Symbol	Input quantity X_i (source of uncertainty)	Unc. Value	Prob. Dist.	Div.	ci (1g)	ci (10g)	Std.Unc. (1g) (±%)	Std.Unc. (10g) (±%)
Measurement system errors								
CF	Probe calibration(±%)	18.6	N	2	1	1	9.3	9.3
CF_{drift}	Probe calibration drift(±%)	1.7	N	1	1	1	1.0	1.0
LIN	Probe linearity and detection limit(±%)	4.7	R	1.732	1	1	2.7	2.7
BBS	Broadband signal(±%)	2.8	N	1	1	1	1.6	1.6
ISO	Probe isotropy(±%)	7.6	R	2	1	1	4.4	4.4
DAE	Other probe and data acquisition errors(±%)	2.4	N	1.732	1	1	1.4	1.4
AMB	RF ambient and noise(±%)	1.8	N	1	1	1	1.8	1.8
Δ_{xyz}	Probe positioning errors(±mm)	0.01	N	1	0.33	0.33	0.00	0.00
DAT	Data processing errors(±%)	3.5	N	1	1	1	3.5	3.5
Phantom and device (DUT or validation antenna) errors								
LIQ(σ)	Conductivity (meas.) DAK (±%)	2.0	N	1	0.78	0.71	1.6	1.4
LIQ(T_c)	Conductivity (temp.)(±%)	2.43	R	1.732	0.78	0.71	1.1	1.0
EPS	Phantom Permittivity(±%)	14	R	1.732	0.5	0.5	4.0	4.0
DIS	Distance DUT - TSL(±%)	2	N	1	2	2	4.0	4.0
D_{xyz}	Device Positioning(±%)	1	N	1	1	1	1.0	1.0
H	Device Holder(±%)	2	N	1	1	1	2.0	2.0
MOD	DUT Modulationm(±%)	2.4	R	1.732	1	1	1.4	1.4
TAS	Time-average SAR(±%)	1.7	R	1.732	1	1	1.0	1.0
RF_{drift}	DUT drift(±%)	2	N	1	1	1	2.0	2.0
VAL	Val Antenna Unc.(±%)	0	N	1	1	1	0.0	0.0
P_{in}	Unc. Input Power(±%)	0	N	1	1	1	0.0	0.0
Corrections to the SAR result								
C(ϵ',σ)	Deviation to Target(±%)	1.9	N	1	1	0.84	1.9	1.6
C(R)	SAR scaling(±%)	0	R	$\sqrt{3}$	1	1	0.0	0.0
u(ΔSAR)	Combined uncertainty						13.6	13.6
	Coverage Factor for 95%						k=2	k=2
U	Expanded uncertainty					U =	27.2	27.1
a Other probability distributions and divisors may be used if they better represent available knowledge of the quantities concerned.								

Uncertainty Budget of power density

Error Description	Uncertainty Value (±dB)	Probability	Divisor	(Ci)	(Ci) 10g	Standard Uncertainty (±dB)	Standard Uncertainty (10g) (±%)
Uncertainty terms dependent on the measurement system							
Probe Calibration	0.98	N	1	1	1	0.98	1.0
Probe correction	0.00	R	1.732	1	0.7	0.00	0.0
Frequency response (BW ≤ 1 GHz)	0.20	R	1.732	1	0.7	0.12	0.1
Sensor cross coupling	0.00	R	1.732	1	1	0.00	0.0
Isotropy	0.50	R	1.732	1	1	0.29	0.3
Linearity	0.20	R	1.732	1	1	0.12	0.1
Probe scattering	0.00	R	1.732	1	1	0.00	0.0
Probe positioning offset	0.30	R	1.732	1	1	0.17	0.2
Probe positioning repeatability	0.04	R	1.732	1	1	0.02	0.0
Sensor mechanical offset	0.00	R	1.732	1	1	0.00	0.0
Probe spatial resolution	0.00	R	1.732	1	1	0.00	0.0
Field impedance dependance	0.00	R	1.732	1	1	0.00	0.0
Amplitude and phase drift	0.00	R	1.732	1	1	0.00	0.0
Amplitude and phase noise	0.04	R	1.732	1	1	0.02	0.0
Measurement area truncation	0.00	R	1.732	1	1	0.00	0.0
Data acquisition	0.03	N	1	1	1	0.03	0.0
Sampling	0.00	R	1.732	1	1	0.00	0.0
Field reconstruction	2.00	R	1.732	1	1	1.15	1.2
Forward transformation	0.00	R	1.732	1	1	0.00	0.0
Power density scaling	0.00	R	1.732	1	1	0.00	0.0
Spatial averaging	0.10	R	1.732	1	1	0.06	0.1
System detection limit	0.04	R	1.732	1	1	0.02	0.0
Uncertainty terms dependent on the DUT and environmental factors							
Probe coupling with DUT	0.00	R	1.732	1	1	0.0	0.0
Modulation response	0.40	R	1.732	1	0.84	0.2	0.2
Integration time	0.00	R	1.732	1	0.71	0.0	0.0
Response time	0.00	R	1.732	1	0.71	0.0	0.0
Device holder influence	0.10	R	1.732	1	0.71	0.1	0.0
DUT alignment	0.00	R	1.732	1	0.71	0.0	0.0
RF ambient conditions	0.04	R	1.732	1	0.26	0.0	0.0
Ambient reflections	0.04	R	1.732	1	0.26	0.0	0.0
Immunity / secondary reception	0.00	R	1.732	1	0.26	0.0	0.0
Drift of the DUT	0.00	R	1.732	1	0.26	0.0	0.0
Combined Std. Uncertainty						1.59	1.6%
Coverage Factor for 95 %						k=2	k=2
Expanded STD Uncertainty (95%)						3.18	3.1%


3. SAR MEASUREMENTS SYSTEM CONFIGURATION

3.1 SAR MEASUREMENT SET-UP

The DASY system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY measurement server.
6. The DASY measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows.
7. DASY software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

3.1.1 TEST SETUP LAYOUT

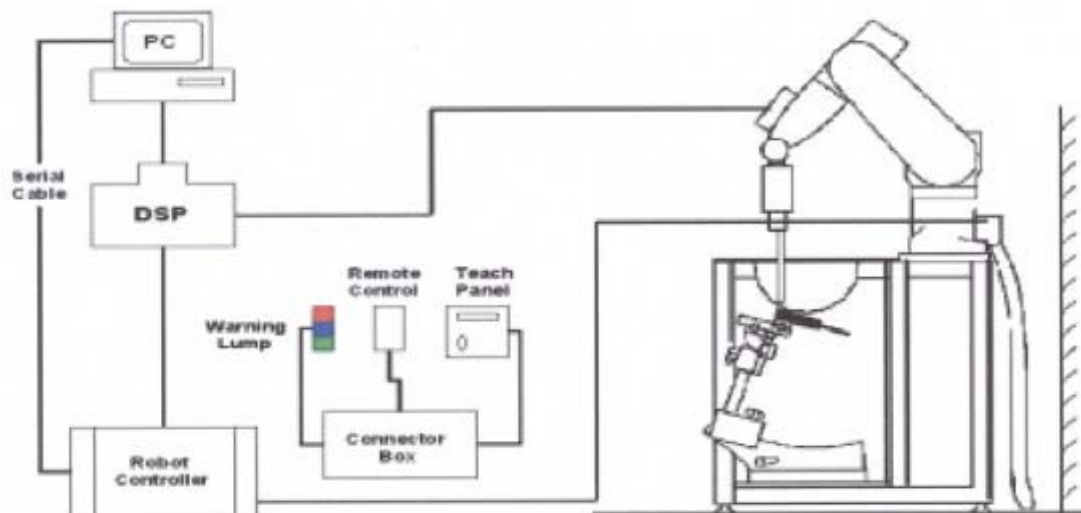

3.2 DASY E-FIELD PROBE SYSTEM

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

3.2.1 PROBE SPECIFICATION

EX3DV4

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm



E-field Probe

3.2.2 E-FIELD PROBE CALIBRATION

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermostat-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt =Exposure time (30 seconds),

C =Heat capacity of tissue (brain or muscle),

ΔT =Temperature increase due to RF exposure.

Or
$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where: σ = Simulated Tissue Conductivity,

ρ =Tissue density (kg/m³).

3.2.3 OTHER TEST EQUIPMENT

3.2.3.1. Device Holder for Transmitters

Construction: Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices (e.g., laptops, cameras, etc.) It is light weight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI and SAM v6.0 Phantoms.

Material: POM, Acrylic glass, Foam

3.2.3.2 Phantom

Model	ELI Phantom	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Shell Thickness	2±0.1 mm	
Filling Volume	Approx. 30 liters	
Dimensions	Length: 600 mm; Width: 190mm Height: adjustable feet	
Available	Special	

3.2.4 SCANNING PROCEDURE

The DASY installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. $\pm 5\%$.

The “surface check” measurement tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)

● Area Scan

The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ($\leq 2\text{GHz}$), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.

● Zoom Scan

A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} \rightarrow 8\text{mm}$, 2-4GHz $\rightarrow 5\text{ mm}$ and 4-6 GHz $\rightarrow 4\text{mm}$; $\Delta z_{\text{zoom}} \leq 3\text{GHz} \rightarrow 5\text{ mm}$, 3-4 GHz $\rightarrow 4\text{mm}$ and 4-6GHz $\rightarrow 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximun Zoom Scan spatial resolution ($\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$)	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{\text{Zoom}}(n)$	$\Delta z_{\text{Zoom}}(1)^*$	$\Delta z_{\text{Zoom}}(n>1)^*$	
$\leq 2\text{GHz}$	$\leq 15\text{mm}$	$\leq 8\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	$\geq 30\text{mm}$
2-3GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	$\geq 30\text{mm}$
3-4GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	$\geq 28\text{mm}$
4-5GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 2.5\text{mm}$	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	$\geq 25\text{mm}$
5-6GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 2\text{mm}$	$\leq 2\text{mm}$	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	$\geq 22\text{mm}$

3.2.5 DATA STORAGE AND EVALUATION

3.2.6.1 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.2.6 SPATIAL PEAK SAR EVALUATION

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points (with 8mm horizontal resolution) or 7 x 7 x 7 points (with 5mm horizontal resolution) or 8 x 8 x 7 points (with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting "Graph Evaluated".
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computer mathematic, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computer mathematic, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

3.2.7 DATA EVALUATION BY SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity	Normi, ai0, ai1, ai2
	Conversion factor	ConvFi
	Diode compression point	Dcpj
Device parameters:	Frequency	f
	Crest factor	cf
Media parameters:	Conductivity	
	Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With	V_i = compensated signal of channel i	(i = x, y, z)
	U_i = input signal of channel i	(i = x, y, z)
	cf = crest factor of exciting field	(DASY parameter)
	dcp _i = diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$$

$$\text{H-field probes: } H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$$

With V_i = compensated signal of channel i (i = x, y, z)

Norm_i = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_X^2 + E_Y^2 + E_Z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}})^2 \cdot \sigma / (\rho \cdot 1000)$$

With SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m
= conductivity in [mho/m] or [Siemens/m]
= equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \text{ or } P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

With P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total field strength in V/m

H_{tot} = total magnetic field strength in A/m

4. SYSTEM VERIFICATION PROCEDURE

4.1 TISSUE VERIFICATION

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
Head 2450	-	45.0	-	0.1	-	-	54.9	-
Head 5G	-	-	-	-	-	17.2	65.5	17.3

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M + resistivity
HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue Verification									
Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Targeted Conductivity (σ)	Targeted Permittivity (ϵ_r)	Deviation Conductivity (σ) (%)	Deviation Permittivity (ϵ_r) (%)	Date
Head	2450	22.5	1.850	38.900	1.80	39.2	2.78	-0.77	Dec. 13, 2025
Head	5250	22.3	4.713	35.523	4.71	36.0	0.06	-1.19	Dec. 15, 2025
Head	5600	22.3	5.122	34.702	5.07	35.5	1.03	-2.25	Dec. 15, 2025
Head	5750	22.6	5.264	34.740	5.22	35.4	0.84	-1.73	Dec. 16, 2025
Head	5850	22.6	5.381	34.525	5.22	35.4	3.08	-2.33	Dec. 16, 2025
Head	6500	22.5	6.100	34.600	6.07	34.5	0.49	0.29	Dec. 22, 2025

Note:

- 1)The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.
- 2)KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3)The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

4.2 SYSTEM CHECK

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEC/IEEE 62209-1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests.

System Check	Date	Frequency (MHz)	Targeted SAR 1g (W/kg)	Measured SAR 1g (W/kg)	normalized SAR 1g (W/kg)	Deviation 1g (%)	Dipole S/N
Head	Dec. 13, 2025	2450	53.10	5.55	55.50	4.52	919
Head	Dec. 15, 2025	5250	78.70	7.58	75.80	-3.68	1160
Head	Dec. 15, 2025	5600	81.80	8.23	82.30	0.61	1160
Head	Dec. 16, 2025	5750	78.70	8.01	80.10	1.78	1160
Head	Dec. 16, 2025	5850	80.60	7.74	77.40	-3.97	1160
Head	Dec. 22, 2025	6500	291.00	28.80	288.00	-1.03	1052

4.2.1 POWER DENSITY SYSTEM CHECK

System check provides a fast and reliable method to routinely verify that the measurement system is operational with no system component failures, including probe defects, drifts or deviation from target performance requirements. A system check also verifies the repeatability of the measurement system before compliance testing.

The measurement of a verification source is started from 5G probe installed and the phantom taught. The verification source is placed on the 5G phantom. Due to the internal distance from the horn to the outer surface of the verification source, the measurement distance set in the software should be offset by -4.45 mm; e.g, for measurement of the verification source at 10 mm, the measurement distance set in the software should be 5.55mm (10mm -4.45 mm).

The system check is a complete measurement using simple well-defined reference sources. According to the description of "Relative system check" in Section A.3 of Annex A to the IEC IEEE 63195-1 test standard, the uncertainty tolerance range of the system performance check can be converted to a percentage by referring to the uncertainty K=1 of the source calibration certificate. Here are some examples of A.5 and A.6 formulas! The uncertainty tolerance range of this calibration certificate is $\pm 15.88\%$. According to the measured $psPD_{4cm^2}$ result, within the tolerance of the calibration certificate standard uncertainty, the system verification is successful. The instruments and procedures used for system inspection shall ensure that the system is ready to perform compliance tests.

Before starting DUT PD testing in any configuration, the acceptance criteria shall be met. The relative system check is successful if a) or b) is met:

- a) All absolute differences between the measured values, $psPD_{meas}$ and target values $psPD_{tgt}$, with $psPD$ values averaged over 1 cm^2 and/or 4 cm^2 , shall be within the combined uncertainty u_c of the measurement system and the source antenna, according to Formula (A.4) if the uncertainty is expressed in decibel, or according to Formula (A.5) if the uncertainty is expressed in percent, along with Formula (A.6).

$$\Delta psPD_{tgt} = \left| 10 \times \lg \left(\frac{psPD_{meas}}{psPD_{tgt}} \right) \right| < \min(2 \times |u_c|, 2 \text{ dB}) \quad (\text{A.4})$$

or

$$\Delta psPD_{tgt} = \left| \frac{psPD_{meas} - psPD_{tgt}}{psPD_{tgt}} \right| < \min(2 \times |u_c|, 58\%) \quad (\text{A.5})$$

$$u_c = \sqrt{u_{\text{antenna_cal}}^2 + u_{\text{power}}^2 + u_{\text{meas}}^2} \quad (\text{A.6})$$

where

- $psPD_{tgt}$ is the target value, derived from repeated measurement of source antenna, normalized to 0 dBm TRP;
- $u_{\text{antenna_cal}}$ is the standard uncertainty ($k = 1$) of the $psPD$ of the antenna model;
- u_{power} is the standard uncertainty ($k = 1$) of the measured TRP (see Clause A.2);
- u_{meas} is the standard uncertainty ($k = 1$) of the $psPD$ measurement (probe calibration, electronics, and positioning).


System Check	Date	Frequency (GHz)	Distance (mm)	Targeted 4cm^2 (W/m^2)	Measured 4cm^2 (W/m^2)	Deviation For 4cm^2 (%)	Dipole S/N
Power Density	Dec. 20, 2025	10	10	57.5	60.9	5.91	1041

4.3 SYSTEM CHECK PROCEDURE

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250mW (below 3GHz) or 100mW (3-6GHz). To adjust this power a power meter is used.

The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test.

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system ($\pm 10\%$).

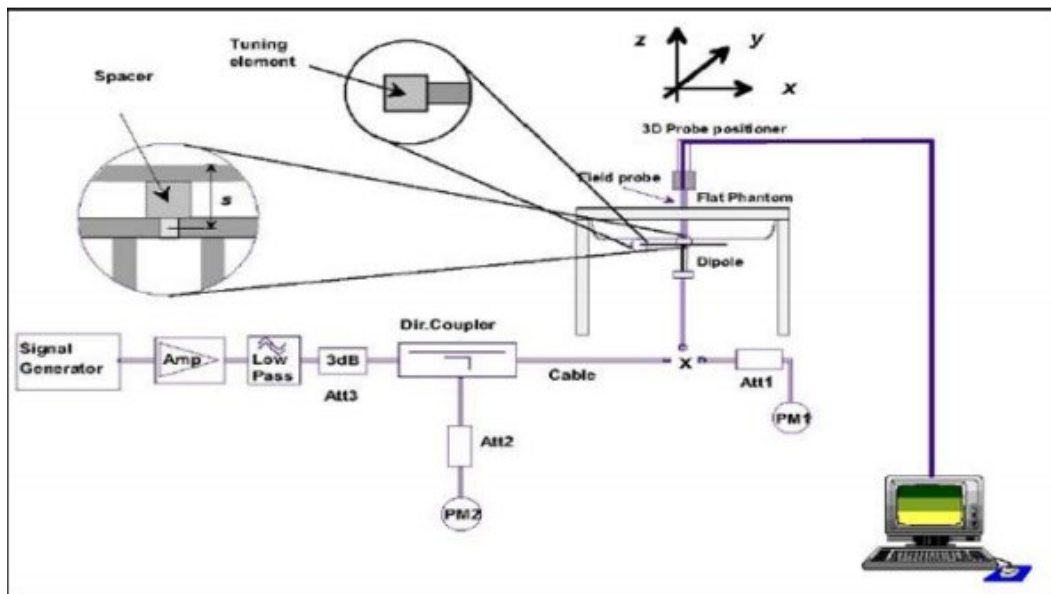

5. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY

5.1 SAR MEASUREMENT VARIABILITY

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 7.2.


6. OPERATIONAL CONDITIONS DURING TEST

6.1 SAR TEST CONFIGURATION

6.1.1 WIFI TEST CONFIGURATION

For WLAN / BT SAR testing, WLAN / BT engineering testing software installed on the DUT can provide continuous transmitting RF signal.

For WiFi SAR testing, a communication link is set up with the test mode software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The test procedures in KDB 248227 D01 are applied.

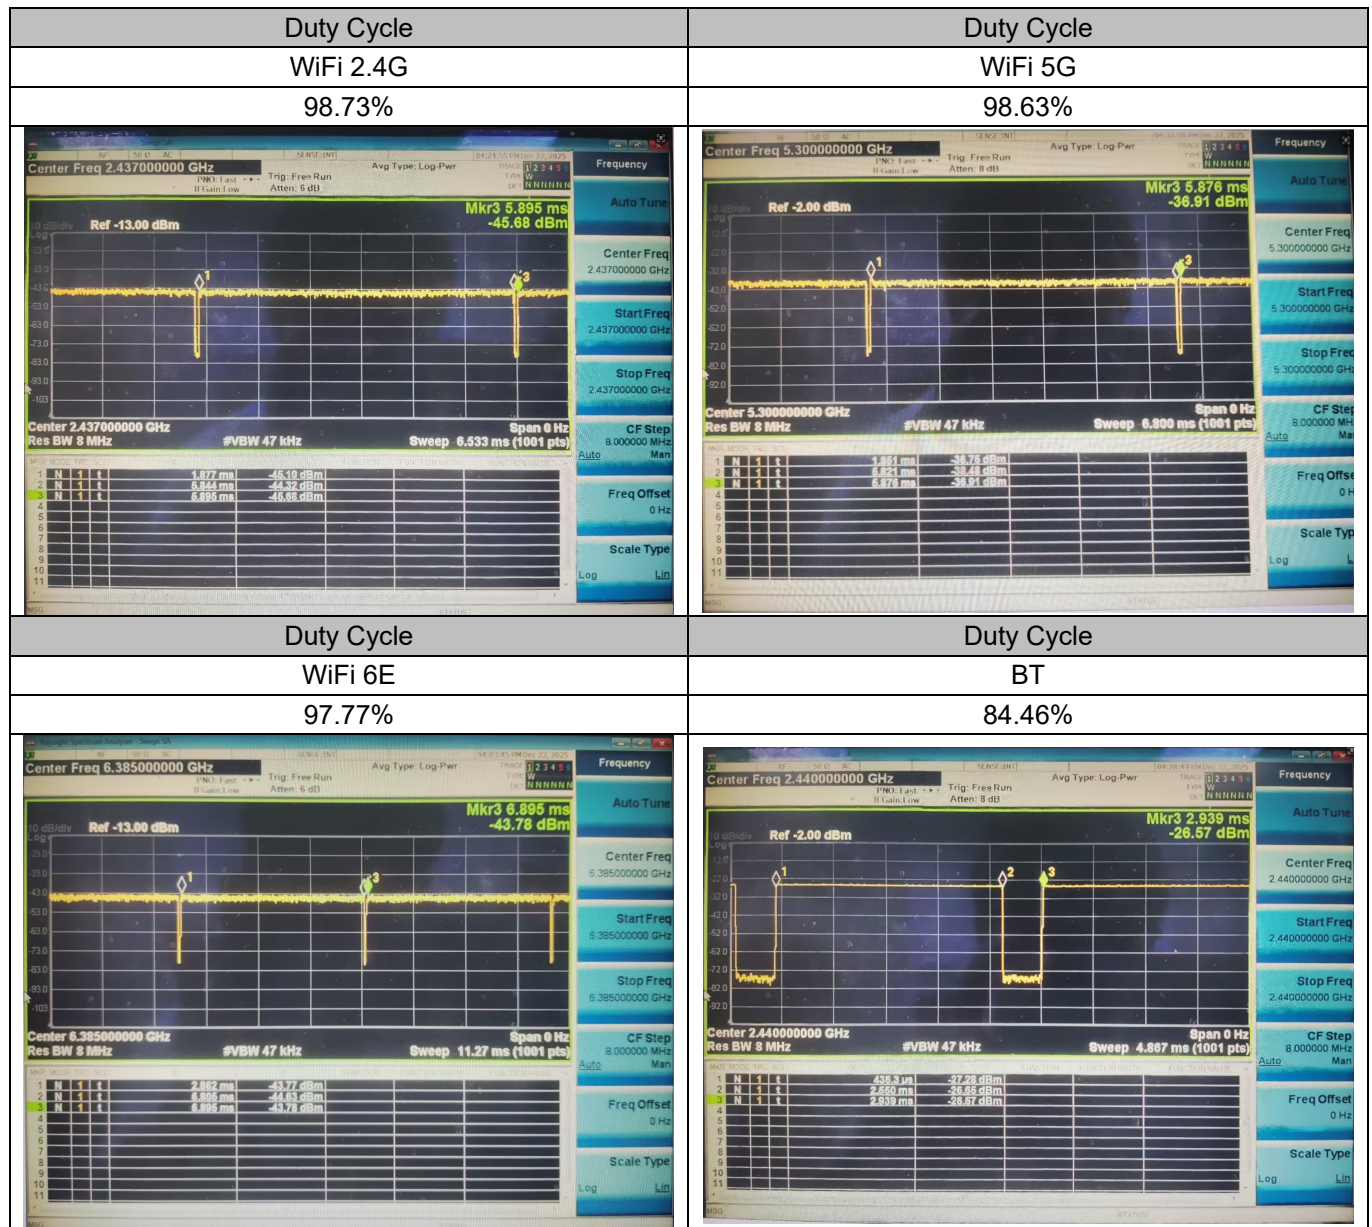

6.1.1.1 2.4G SAR Test Requirements

802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

SAR Test Requirements for OFDM configurations

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, each stand alone. And frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

6.1.1.2 5G SAR Test Requirements

✧ U-NII-1 and U-NII-2A Band

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.

✧ U-NII-2C, U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, they must be considered for SAR testing. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels.¹¹ When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

6.1.1.3 OFDM transmission mode and SAR test channel selection

For the 2.4GHz and 5GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations (for example 802.11a, 802.11n and 802.11ac, or 802.11g and 802.11n, with the same channel bandwidth, modulation, and data rate, etc.), the lower order 802.11 mode (i.e. 802.11a then 802.11n and 802.11ac, or 802.11g then 802.11n) is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

6.1.1.4 Initial test configuration procedure


For OFDM, in both 2.4G and 5GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output powers is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurement.

6.2 TEST POSITION

6.2.1 NOTEBOOK MODE

This DUT was tested in 2 different positions. They are back of keyboard and back of screen as illustrated below:

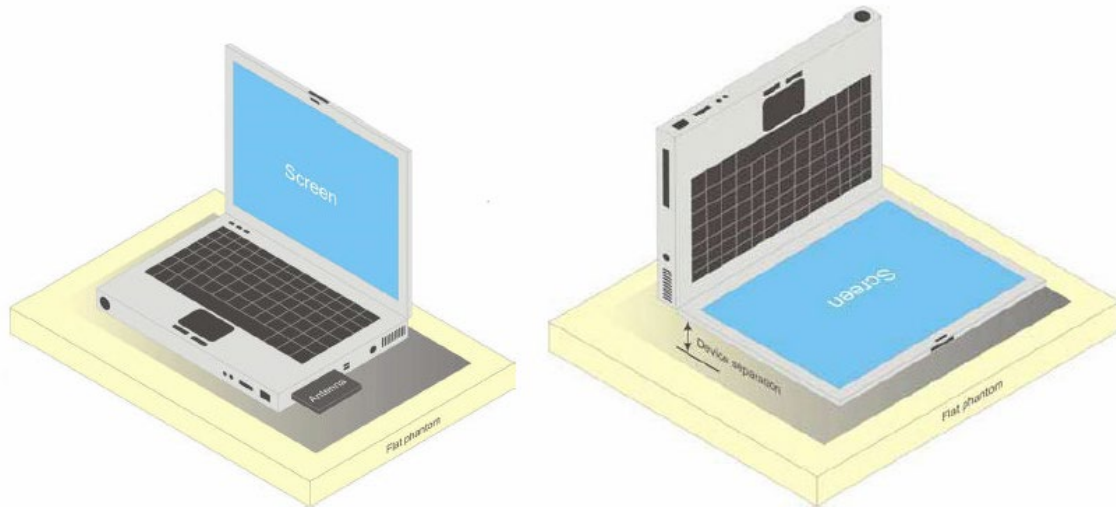

a) Portable computer with back of keyboard and back of screen.

When antennas are incorporated in the keyboard section of a laptop computer, SAR is required for the bottom surface of the keyboard. Provided tablet use conditions are not supported by the laptop computer, SAR tests for bystander exposure from the edges of the keyboard and display screen of laptop computers are generally not required. However, when edge testing is necessary, the similar concerns for simultaneous transmission on adjacent or multiple edges described for tablets near the end of 4.3 also apply.

When the modular approach is applied, transmitters and modules must be tested initially without using a representative host for incorporation in the display and/or keyboard of qualified laptop computers for standalone use according to the following minimum test separation distance and antenna installation requirements. The separation distance required for incorporation in qualified hosts is described in KDB Publication 447498 D04; item e) of 4.1 and item a) of 5.2.2 etc.

a) ≤ 25 mm between the antenna and user for incorporation in laptop display screens¹⁵


b) ≤ 5 mm between the antenna and user; only when incorporation in the keyboard compartment is required by the hosts, for bottom surface and edge exposure conditions

c) the antennas used by the host must have been tested for equipment approval or qualify for SAR test exclusion

d) the antenna polarization, physical orientation, rotation and installation configurations used by the host must have been tested for compliance for the required display and/or keyboard installation conditions and test separation distance(s) or qualify for SAR test exclusion

e) when the SAR Test Exclusion Threshold in KDB Publication 447498 D04 applies, a minimum test separation distance of 25 mm is required to determine test exclusion for the display, and 5 mm for the keyboard compartment.

The location of the antenna for notebook mode is as below:

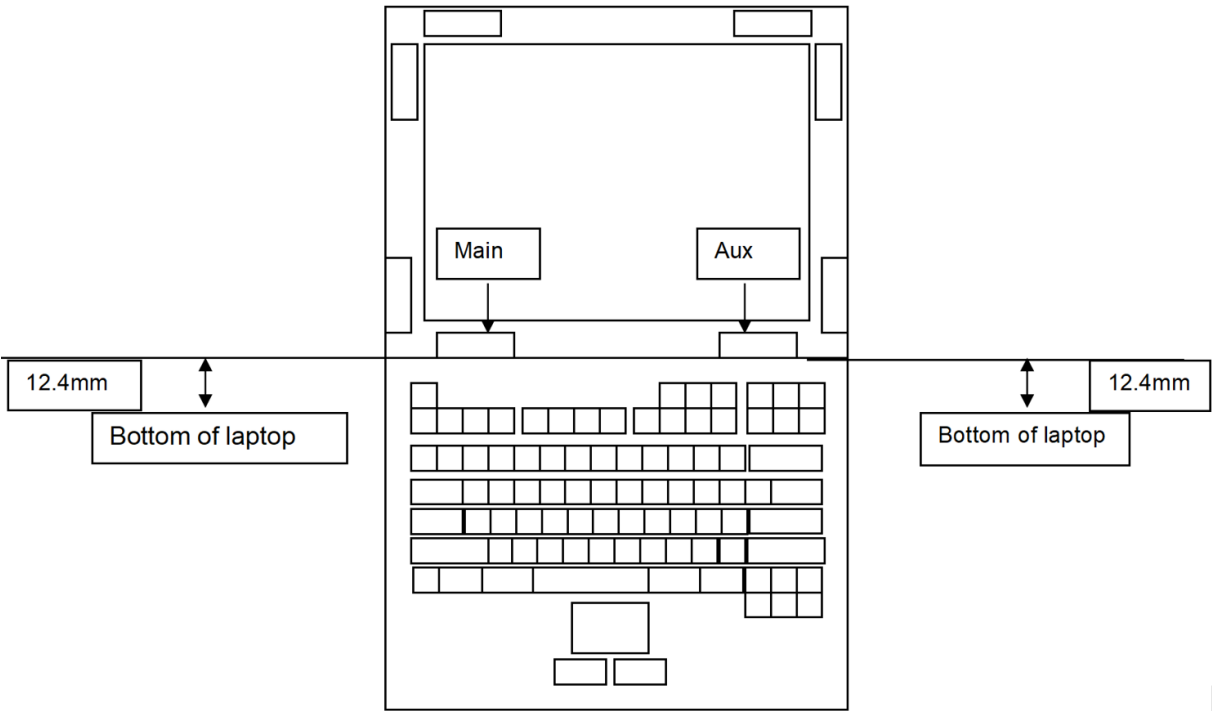

The SAR measurement positions of each band are as below:

Antenna	Back of Keyboard	Back of Screen
Main Ant	Yes	Yes
Aux Ant	Yes	Yes

Note: According to the antenna location shown as above, particular DUT edges were not required to be evaluated for SAR if the antenna-to-edge distance is greater than 50mm.

7. TEST RESULT

7.1 CONDUCTED POWER RESULTS

1. Conducted power measurements of BT

BT	Average Conducted Power(dBm)			
	Max.	CH0	CH39	CH78
	Tune up	2402MHz	2441MHz	2480MHz
DH5	15.50	13.97	14.12	14.24
2DH5	13.00	11.58	11.73	11.94
3DH5	13.00	11.43	11.62	11.71

BT	Average Conducted Power(dBm)			
	Max.	CH0	CH19	CH39
	Tune up	2402	2440	2480MHz
BLE(1M)	15.50	14.36	14.41	14.66
BLE(2M)	14.50	12.61	12.68	12.93
BLE(125K)	14.00	12.92	12.01	12.95
BLE(500K)	13.00	10.56	10.48	12.64

Note:

- 1) The Average conducted power of Bluetooth is measured with RMS detector.
- 2) The tested channel results are marks in bold.

2. Conducted power measurements of WiFi 2.4G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	Max. Tune up	Average Power(dBm)
2.4G WIFI _1TX _Main Ant	802.11b	1	2412	1	-	20.00	19.03
		6	2437		-	20.00	19.13
		11	2462		-	20.00	19.16
		12	2467		-	21.00	20.16
		13	2472		-	19.00	18.38
	802.11g	1	2412	6	-	20.50	20.04
		6	2437		-	21.50	21.06
		11	2462		-	21.50	21.15
		12	2467		-	17.00	16.60
		13	2472		-	14.00	13.32
	802.11n HT20	1	2412	HT0	-	20.50	No Require
		6	2437		-	21.00	
		11	2462		-	21.00	
		12	2467		-	17.00	
		13	2472		-	14.00	
	802.11ax HE20	1	2412	HE0	FULL	20.00	
					26/0	21.00	
					52/37	21.00	
					106/53	21.00	
		6	2437		FULL	21.00	
					FULL	21.00	
					FULL	17.00	
					FULL	14.00	
		13	2472		26/8	12.50	
					52/40	13.00	
					106/54	13.00	
	802.11be EHT20	1	2412	EHT0	FULL	20.00	
					26/0	21.00	
					52/37	21.00	
					106/53	21.00	
		6	2437		FULL	21.00	
					FULL	21.00	
					FULL	17.00	
					FULL	14.00	
		13	2472		26/8	12.50	
					52/40	13.00	
					106/54	13.00	

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	Max. Tune up	Average Power(dBm)
2.4G WIFI _1TX _Main Ant	802.11n HT40	3	2422	HT0	-	20.50	No Require
		6	2437		-	21.00	
		9	2452		-	20.00	
		10	2457		-	15.50	
		11	2462		-	14.50	
	802.11ax HE40	3	2422	HE0	FULL	19.50	
					242/61	20.00	
		6	2437		FULL	21.00	
		9	2452		FULL	20.00	
		10	2457		FULL	15.50	
		11	2462		FULL	14.50	
	802.11be EHT40			EHT0	242/62	12.50	
		3	2422		FULL	19.50	
					242/61	20.00	
		6	2437		FULL	21.00	
		9	2452		FULL	20.00	
		10	2457		FULL	15.50	
		11	2462		FULL	14.50	
					242/62	12.50	

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	Max. Tune up	Average Power(dBm)
2.4G WIFI _1TX _Aux Ant	802.11b	1	2412	1	-	19.50	18.71
		6	2437		-	19.50	18.69
		11	2462		-	21.50	20.66
		12	2467		-	21.00	20.18
		13	2472		-	19.00	18.02
	802.11g	1	2412	6	-	21.50	No Require
		6	2437		-	21.50	
		11	2462		-	21.50	
		12	2467		-	17.00	
		13	2472		-	14.00	
	802.11n HT20	1	2412	HT0	-	20.50	
		6	2437		-	21.50	
		11	2462		-	21.00	
		12	2467		-	17.00	
		13	2472		-	14.00	
	802.11ax HE20	1	2412	HE0	FULL	21.00	
					26/0	20.50	
					52/37	21.50	
					106/53	21.50	
		6	2437		FULL	21.50	
					FULL	21.00	
					FULL	16.50	
					FULL	14.00	
		13	2472		26/8	13.00	
					52/40	13.00	
					106/54	13.50	
	802.11be EHT20	1	2412	EHT0	FULL	21.00	
					26/0	20.50	
					52/37	21.50	
					106/53	21.50	
		6	2437		FULL	21.50	
					FULL	21.00	
					FULL	16.50	
					FULL	14.00	
		13	2472		26/8	13.00	
					52/40	13.00	
					106/54	13.50	

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	Max. Tune up	Average Power(dBm)	
2.4G WIFI _1TX _Aux Ant	802.11n HT40	3	2422	HT0	-	19.50	19.11	
		6	2437		-	22.00	21.53	
		9	2452		-	20.00	19.65	
		10	2457		-	15.00	14.44	
		11	2462		-	15.00	14.53	
	802.11ax HE40	3	2422	HE0	FULL	19.50	No Require	
					242/61	21.00		
		6	2437		FULL	22.00	20.11	
		9	2452		FULL	19.50	No Require	
		10	2457		FULL	15.00		
		11	2462		FULL	15.00		
					242/62	13.50		
	802.11be EHT40	3	2422	EHT0	FULL	19.50	20.14	
					242/61	21.00		
		6	2437		FULL	22.00	No Require	
		9	2452		FULL	19.50		
		10	2457		FULL	15.00		
		11	2462		FULL	15.00		
					242/62	13.50		

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	ANT Main Average Power (dBm)	ANT Aux Average Power (dBm)	Max. Tune up	Total Average Power (dBm)
2.4G WIFI _2TX _Main Ant + Aux Ant	802.11n HT20	1	2412	HT8	-	17.96	17.96	21.50	20.97
		6	2437		-	20.47	20.49	24.00	23.49
		11	2462		-	19.99	20.07	23.50	23.04
		12	2467		-	14.47	14.60	18.00	17.55
		13	2472		-	11.80	11.97	15.50	14.90
	802.11ax HE20	1	2412	HE0	FULL	-	-	21.50	No Require
					26/0	-	-	23.50	
					52/37	-	-	23.50	
					106/53	-	-	23.50	
		6	2437		FULL	-	-	23.50	
		11	2462		FULL	-	-	23.50	
		12	2467		FULL	-	-	17.50	
		13	2472		FULL	-	-	15.50	
					26/8	-	-	15.00	
					52/40	-	-	14.50	
					106/54	-	-	14.50	
	802.11be EHT20	1	2412	EHT0	FULL	-	-	21.50	
					26/0	-	-	23.50	
					52/37	-	-	23.50	
					106/53	-	-	23.50	
		6	2437		FULL	-	-	23.50	
		11	2462		FULL	-	-	23.50	
		12	2467		FULL	-	-	17.50	
		13	2472		FULL	-	-	15.50	
					26/8	-	-	15.00	
					52/40	-	-	14.50	
					106/54	-	-	14.50	
	802.11n HT40	3	2422	HT8	-	-	-	21.50	
		6	2437		-	-	-	21.50	
		9	2452		-	-	-	21.00	
		10	2457		-	-	-	15.50	
		11	2462		-	-	-	16.00	
	802.11ax HE40	3	2422	HE0	FULL	-	-	21.50	
					242/61	-	-	21.50	
		6	2437		FULL	-	-	21.50	
		9	2452		FULL	-	-	21.00	
		10	2457		FULL	-	-	15.50	
					FULL	-	-	16.00	
		11	2462		242/62	-	-	16.00	

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	ANT Main Average Power (dBm)	ANT Aux Average Power (dBm)	Max. Tune up	Total Average Power (dBm)
2.4G WIFI _2TX _Main Ant + Aux Ant	802.11be EHT40	3	2422	EHT0	FULL	-	-	21.50	No Require
					242/61	-	-	21.50	
		6	2437		FULL	-	-	21.50	
		9	2452		FULL	-	-	21.00	
		10	2457		FULL	-	-	15.50	
					FULL	-	-	16.00	
		11	2462		242/62	-	-	16.00	

Note:

- 1) The Average conducted power of WiFi 2.4G is measured with RMS detector.
- 2) The tested channel results are marks in bold.

3. Conducted power measurements of WiFi 5.2G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	Max. Tune up	Average Power(dBm)
5.2G WIFI _1TX _Main _Ant	802.11a	36	5180	6	-	21.00	No Require
		40	5200		-	21.00	
		48	5240		-	21.00	
	802.11n HT20	36	5180	HT0	-	21.50	20.77
		40	5200		-	21.50	20.79
		48	5240		-	21.50	20.90
	802.11ax HE20	36	5180	HE0	FULL	20.50	No Require
					26/0	11.50	
					52/37	15.00	
					106/53	18.00	
		40	5200		-	21.50	20.30
		48	5240		-	21.50	20.36
	802.11be EHT20	36	5180	EHT0	FULL	20.50	No Require
					26/0	11.50	
					52/37	15.00	
					106/53	18.00	
		40	5200		-	21.50	20.25
		48	5240		-	21.50	20.37
	802.11n HT40	38	5190	HT0	-	18.50	No Require
		46	5230		-	19.50	
	802.11ax HE40	38	5190	HE0	FULL	19.50	
					242/61	20.50	
		46	5230		-	19.50	
	802.11be EHT40	38	5190	HE0	FULL	19.50	
					242/61	20.50	
		46	5230		-	19.50	
	802.11ac VHT80	42	5210	VHT0	-	18.50	
	802.11ax HE80	42	5210	EHT0	-	18.00	
					484/65	20.00	
	802.11be EHT80	42	5210	EHT0	-	18.00	
					484/65	20.00	

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	Max. Tune up	Average Power(dBm)
5.2G WIFI _1TX _Aux _Ant	802.11a	36	5180	6	-	21.00	No Require
		40	5200		-	21.00	
		48	5240		-	21.00	
	802.11n HT20	36	5180	VHT0	-	21.00	20.34
		40	5200		-	21.50	20.76
		48	5240		-	21.50	20.97
	802.11ax HE20	36	5180	HE0	FULL	20.50	No Require
					26/0	12.50	
					52/37	15.50	
					106/53	18.00	
		40	5200		-	21.50	20.16
		48	5240		-	21.50	20.01
	802.11be EHT20	36	5180	EHT0	FULL	20.50	No Require
					26/0	11.50	
					52/37	15.00	
					106/53	18.00	
		40	5200		-	21.50	20.20
	802.11n HT40	38	5190	VHT0	-	19.50	No Require
		46	5230		-	20.00	
	802.11ax HE40	38	5190	HE0	FULL	19.00	
		46	5230		242/61	21.00	
	802.11be EHT40	38	5190	HE0	-	20.00	
					FULL	19.50	
		46	5230		242/61	20.50	
	802.11ac VHT80	42	5210	VHT0	-	19.50	
		42	5210	VHT0	-	18.50	
	802.11ax HE80	42	5210	EHT0	-	19.00	
		42	5210		484/65	19.00	
	802.11be EHT80	42	5210	EHT0	-	19.00	
					484/65	19.00	

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	ANT Main Average Power (dBm)	ANT Aux Average Power (dBm)	Max. Tune up	Total Average Power (dBm)	
5.2G WIFI _2TX _Main Ant + Aux Ant	802.11n HT20	36	5180	HT0	-	-	-	20.50	No Require	
		40	5200		-	-	-	21.50		
		48	5240		-	-	-	21.50		
	802.11ax HE20	36	5180	HE0	FULL	-	-	21.00		
					26/0	-	-	13.00		
					52/37	-	-	16.50		
					106/53	-	-	19.50		
		40	5200		-	-	-	21.50		
					48	5240	-	-		-
	802.11be EHT20	36	5180	EHT0	FULL	-	-	21.00		
					26/0	-	-	13.00		
					52/37	-	-	16.50		
					106/53	-	-	19.50		
		40	5200		-	-	-	21.50		
					48	5240	-	-		-
	802.11n HT40	38	5190	HT8	-	-	-	20.50		
		46	5230		-	-	-	21.50		
	802.11ax HE40	38	5190	HE0	FULL	-	-	20.50		
					242/61	-	-	20.50		
		46	5230		-	-	-	21.00		
	802.11be EHT40	38	5190	HE0	FULL	-	-	20.50		
					242/61	-	-	20.50		
		46	5230		-	-	-	21.00		
	802.11ac VHT80	42	5210	VHT0	-	-	-	20.50		
	802.11ax HE80	42	5210	HE0	-	17.51	17.69	21.00		20.61
					484/65	18.45	18.84	22.00		21.66
802.11be EHT80	42	5210	EHT0	-	16.70	16.70	21.00	19.71		
				484/65	17.59	17.14	22.00	20.38		

Note:

- 1) The Average conducted power of WiFi 5.2G is measured with RMS detector.
- 2) The tested channel results are marks in bold.

4. Conducted power measurements of WiFi 5.3G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	Max. Tune up	Average Power(dBm)
5.3G WIFI _1TX _Main _Ant	802.11a	52	5260	6	-	20.00	No Require
		60	5300		-	20.00	
		64	5320		-	20.00	
	802.11n HT20	52	5260	HT0	-	20.50	20.40
		60	5300		-	20.50	20.34
		64	5320		-	20.50	19.80
	802.11ax HE20	52	5260	HE0	-	20.00	No Require
		56	5280		-	20.00	
		64	5320		FULL	20.00	
					26/8	12.50	
					52/40	15.00	
					106/54	18.00	
		802.11be EHT20	52		5260	EHT0	
	56		5280	-	20.00		
	64		5320	FULL	20.00		
				26/8	12.50		
				52/40	15.00		
				106/54	18.00		
	802.11n HT40	54	5270	HT0	-	20.00	
		62	5310		-	19.50	
	802.11ax HE40	54	5270	HE0	-	20.00	
		62	5310		FULL	20.00	
					242/62	20.00	
	802.11be EHT40	54	5270	EHT0	-	20.00	
		62	5310		FULL	20.00	
					242/62	20.00	
	802.11ac VHT80	58	5290	VHT0	-	19.00	
	802.11ax HE80	58	5290	HE0	FULL	18.50	
					484/66	19.50	
	802.11be EHT80	58	5290	EHT0	FULL	18.50	
					484/66	19.50	
	802.11ac VHT160	50	5250	VHT0	-	17.50	
	802.11ax HE160	50	5250	HE0	FULL	17.50	
					80m/67	19.50	
					80m/S67	19.50	
	802.11be EHT160	50	5250	HE0	FULL	17.50	
					80m/67	19.50	
					80m/S67	19.50	

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	Max. Tune up	Average Power(dBm)
5.3G WIFI _1TX _Aux _Ant	802.11a	52	5260	6	-	20.50	No Require
		60	5300		-	20.50	
		64	5320		-	20.50	
	802.11n HT20	52	5260	HT0	-	21.00	20.82
		60	5300		-	21.00	20.76
		64	5320		-	21.00	20.89
	802.11ax HE20	52	5260	HE0	-	20.50	No Require
		56	5280		-	20.50	
		64	5320		FULL	20.50	
					26/8	12.50	
					52/40	16.00	
					106/54	18.50	
		802.11be EHT20	52		5260	EHT0	
	56		5280	-	20.50		
	64		5320	FULL	20.50		
				26/8	12.50		
				52/40	16.00		
				106/54	18.50		
	802.11n HT40	54	5270	HT0	-	19.50	
		62	5310		-	19.50	
	802.11ax HE40	54	5270	HE0	-	19.50	
		62	5310		FULL	19.00	
					242/62	19.50	
	802.11be EHT40	54	5270	EHT0	-	19.50	
		62	5310		FULL	19.00	
					242/62	19.50	
	802.11ac VHT80	58	5290	VHT0	-	18.50	
	802.11ax HE80	58	5290	HE0	FULL	18.50	
					484/66	19.00	
	802.11be EHT80	58	5290	EHT0	FULL	18.50	
					484/66	19.00	
	802.11ac VHT160	50	5250	VHT0	-	17.50	
802.11ax HE160	50	5250	HE0	FULL	17.50		
				80m/67	19.50		
				80m/S67	17.00		
802.11be EHT160	50	5250	HE0	FULL	17.50		
				80m/67	19.50		
				80m/S67	17.00		

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	ANT Main Average Power (dBm)	ANT Aux Average Power (dBm)	Max. Tune up	Total Average Power (dBm)
5.3G WIFI _2TX _Main _Ant + Aux _Ant	802.11n HT20	52	5260	HT8	-	17.01	17.31	21.50	20.17
		60	5300		-	16.90	17.33	21.50	20.13
		64	5320		-	16.65	16.70	21.00	19.69
	802.11ax HE20	52	5260	HE0	-	16.87	17.11	21.50	20.00
		56	5280		-	17.03	17.21	21.50	20.13
		64	5320		FULL	16.99	17.18	21.50	20.10
					26/8	-	-	13.00	No Require
					52/40	-	-	16.00	
					106/54	-	-	19.00	
					802.11be EHT20	52	5260	EHT0	
	56	5280	-	16.59		16.67	21.50		19.64
	64	5320	FULL	16.76		16.68	21.50		19.73
			26/8	-		-	13.00		No Require
			52/40	-		-	16.00		
			106/54	-		-	19.00		
	802.11n HT40	54	5270	HT8	-	18.07	18.12	21.50	21.11
		62	5310		-	16.87	17.17	20.50	20.03
	802.11ax HE40	54	5270	HE0	-	-	-	21.00	No Require
		62	5310		FULL	-	-	20.50	
	242/62				-	-	18.50		
	802.11be EHT40	54	5270	EHT0	-	-	-	21.00	
		62	5310		FULL	-	-	20.50	
					242/62	-	-	18.50	
	802.11ac VHT80	58	5290	VHT0	-	-	-	20.50	
	802.11ax HE80	58	5290	HE0	FULL	-	-	20.00	
					484/66	-	-	19.50	
	802.11be EHT80	58	5290	EHT0	FULL	-	-	20.00	
					484/66	-	-	19.50	
	802.11ac VHT160	50	5250	VHT0	-	-	-	20.00	
	802.11ax HE160	50	5250	HE0	FULL	-	-	20.00	
					80m/67	-	-	20.50	
					80m/S67	-	-	20.50	
	802.11be EHT160	50	5250	EHT0	FULL	-	-	20.00	
					80m/67	-	-	20.50	
					80m/S67	-	-	20.50	

Note:

- 1) The Average conducted power of WiFi 5.3G is measured with RMS detector.
- 2) The tested channel results are marks in bold.

5. Conducted power measurements of WiFi 5.6G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	Max. Tune up	Average Power(dBm)	
5.6G WIFI _1TX _Main Ant	802.11a	100	5500	6	-	19.00	No Require	
		120	5600		-	19.00		
		140	5700		-	19.00		
	802.11n HT20	100	5500	HT0	-	19.00		
		120	5600		-	19.00		
		140	5700		-	19.00		
		144	5720		-	19.00		
	802.11ax HE20	100	5500	HE0	FULL	19.00		
					26/0	13.50		
					52/37	16.00		
					106/53	19.00		
		120	5600		FULL	19.00		
					FULL	19.00		
		140	5700		26/0	13.50		
					52/37	16.50		
					106/53	19.00		
					FULL	19.00		
	144	5720	FULL	19.00				
	802.11be EHT20	100	5500	EHT0	FULL	19.00		
					26/0	13.50		
					52/37	16.00		
					106/53	19.00		
		120	5600		FULL	19.00		
					FULL	19.00		
		140	5700		26/0	13.50		
					52/37	16.50		
					106/53	19.00		
					FULL	19.00		
	144	5720	FULL	19.00				
	802.11n HT40	102	5510	HT0	-	19.50	19.03	
		118	5590		-	19.50	18.91	
		134	5670		-	19.50	19.02	
		142	5710		-	19.50	19.05	
	802.11ax HE40	102	5510	HE0	FULL	19.00	No Require	
					242/62	19.00		
		118	5590		FULL	19.00		
					FULL	19.00		
		134	5670		242/62	19.00		
	142	5710	FULL	19.00				
	802.11be EHT40	102	5510	EHT0	FULL	19.00		
					242/62	19.00		
		118	5590		FULL	19.00		
					FULL	19.00		
134		5670			242/62	19.00		
					FULL	19.00		
142	5710	FULL	19.00					

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	Max. Tune up	Average Power(dBm)
5.6G WIFI _1TX _Main _Ant	802.11ac VHT80	106	5530	VHT0	-	19.00	No Require
		122	5610		-	19.00	
		138	5690		-	19.00	
	802.11ax HE80	106	5530	HE0	FULL	19.00	
					484/65	19.00	
		122	5610		-	19.00	
		138	5690		-	19.00	
	802.11be EHT80	106	5530	EHT0	FULL	19.00	
					484/65	19.00	
		122	5610		-	19.00	
		138	5690		-	19.00	
	802.11ac VHT160	114	5570	VHT0	-	17.50	
	802.11ax HE160	114	5570	HE0	FULL	17.50	
					996/67	18.50	
					996/S67	19.00	
	802.11be EHT160	114	5570	EHT0	FULL	17.50	
					996/67	18.50	
					996/S67	19.00	

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	Max. Tune up	Average Power(dBm)	
5.6G WIFI _1TX _Aux Ant	802.11a	100	5500	6	-	19.50	No Require	
		120	5600		-	19.50		
		140	5700		-	19.50		
	802.11n HT20	100	5500	HT0	-	19.50		
		120	5600		-	19.50		
		140	5700		-	19.50		
		144	5720		-	19.50		
	802.11ax HE20	100	5500	HE0	FULL	19.50		
					26/0	13.50		
					52/37	16.00		
					106/53	19.50		
		120	5600		FULL	19.50		
					FULL	19.50		
		140	5700		26/0	13.50		
					52/37	16.50		
					106/53	19.50		
					FULL	19.50		
	144	5720	FULL	19.50				
	802.11be EHT20	100	5500	EHT0	FULL	19.50		
					26/0	13.50		
					52/37	16.00		
					106/53	19.50		
		120	5600		FULL	19.50		
					FULL	19.50		
		140	5700		26/0	13.50		
					52/37	16.50		
					106/53	19.50		
					FULL	19.50		
	144	5720	FULL	19.50				
	802.11n HT40	102	5510	HT0	-	20.00	19.89	
		118	5590		-	20.00	19.86	
		134	5670		-	20.00	19.81	
		142	5710		-	20.00	19.93	
	802.11ax HE40	102	5510	HE0	FULL	19.50	No Require	
					242/62	19.50		
		118	5590		FULL	19.50		
		134	5670		FULL	19.50		
					242/62	19.50		
	142	5710	FULL	19.50				
	802.11be EHT40	102	5510	EHT0	FULL	19.50		
					242/62	19.50		
		118	5590		FULL	19.50		
		134	5670		FULL	19.50		
			242/62		19.50			
142		5710	FULL		19.50			

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	Max. Tune up	Average Power(dBm)
5.6G WIFI _1TX _Aux _Ant	802.11ac VHT80	106	5530	VHT0	-	19.00	No Require
		122	5610		-	19.50	
		138	5690		-	19.50	
	802.11ax HE80	106	5530	HE0	FULL	19.00	
					484/65	19.50	
		122	5610		-	19.50	
		138	5690		-	19.50	
	802.11be EHT80	106	5530	EHT0	FULL	19.00	
					484/65	19.50	
		122	5610		-	19.50	
		138	5690		-	19.50	
	802.11ac VHT160	114	5570	VHT0	-	18.00	
	802.11ax HE160	114	5570	HE0	FULL	18.00	
					996/67	19.00	
					996/S67	19.50	
	802.11be EHT160	114	5570	EHT0	FULL	18.00	
					996/67	19.00	
					996/S67	19.50	

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	ANT Main Average Power (dBm)	ANT Aux Average Power (dBm)	Max. Tune up	Total Average Power (dBm)
5.6G WIFI _2TX _Main Ant + Aux Ant	802.11n HT20	100	5500	HT8	-	-	-	21.00	No Require
		120	5600		-	-	-	21.00	
		140	5700		-	-	-	21.00	
		144	5720		-	-	-	21.00	
	802.11ax HE20	100	5500	HE0	FULL	-	-	21.00	
					26/0	-	-	13.50	
					52/37	-	-	16.50	
					106/53	-	-	19.50	
		120	5600		FULL	-	-	21.50	
					FULL	-	-	21.00	
		140	5700		26/0	-	-	13.50	
					52/37	-	-	16.50	
					106/53	-	-	19.50	
					FULL	-	-	21.00	
	144	5720	FULL	-	-	21.00			
	802.11be EHT20	100	5500	EHT0	FULL	-	-	21.00	
					26/0	-	-	13.50	
					52/37	-	-	16.50	
					106/53	-	-	19.50	
		120	5600		FULL	-	-	21.50	
					FULL	-	-	21.00	
		140	5700		26/0	-	-	13.50	
					52/37	-	-	16.50	
					106/53	-	-	19.50	
					FULL	-	-	21.00	
	144	5720	FULL	-	-	21.00			
	802.11n HT40	102	5510	HT8	-	-	-	22.00	
		118	5590		-	-	-	22.00	
		134	5670		-	-	-	22.00	
		142	5710		-	-	-	22.00	
	802.11ax HE40	102	5510	HE0	FULL	-	-	21.50	
					242/62	-	-	21.50	
		118	5590		FULL	-	-	22.00	
					FULL	-	-	22.00	
		134	5670		242/62	-	-	21.50	
					FULL	-	-	22.00	
	142	5710	FULL	-	-	22.00			
	802.11be EHT40	102	5510	EHT0	FULL	-	-	21.50	
					242/62	-	-	21.50	
		118	5590		FULL	-	-	22.00	
					FULL	-	-	22.00	
		134	5670		242/62	-	-	21.50	
					FULL	-	-	22.00	
	142	5710	FULL	-	-	22.00			

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	ANT Main Average Power (dBm)	ANT Aux Average Power (dBm)	Max. Tune up	Total Average Power (dBm)
5.6G WIFI _2TX _Main _Ant + Aux _Ant	802.11ac VHT80	106	5530	VHT0	-	-	-	20.50	No Require
		122	5610		-	-	-	22.00	
		138	5690		-	-	-	22.00	
	802.11ax HE80	106	5530	HE0	FULL	16.82	16.11	20.50	19.49
					484/65	18.32	17.78	21.50	21.07
		122	5610		-	19.24	19.27	22.50	22.27
		138	5690		-	19.24	19.18	22.50	22.22
	802.11be EHT80	106	5530	EHT0	FULL	-	-	20.50	No Require
					484/65	-	-	22.00	
		122	5610		-	-	-	22.00	
		138	5690		-	-	-	22.00	
	802.11ac VHT160	114	5570	VHT0	-	-	-	20.00	
	802.11ax HE160	114	5570	HE0	FULL	-	-	20.00	
					996/67	-	-	19.00	
					996/S67	-	-	22.00	
	802.11be EHT160	114	5570	EHT0	FULL	-	-	20.00	
					996/67	-	-	19.00	
					996/S67	-	-	22.00	

Note:

- 1) The Average conducted power of WiFi 5.6G is measured with RMS detector.
- 2) The tested channel results are marks in bold.

6. Conducted power measurements of WiFi 5.8G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	Max. Tune up	Average Power(dBm)
5.8G WIFI _1TX _Main _Ant	802.11a	149	5745	6	-	17.50	No Require
		157	5785		-	17.50	
		165	5825		-	17.50	
	802.11n HT20	144	5720	HT0	-	13.50	13.08
		149	5745		-	18.00	17.41
		157	5785		-	18.00	17.42
		165	5825		-	18.00	17.31
	802.11ax HE20	144	5720	HE0	-	14.00	No Require
		149	5745		FULL	17.50	
					26/0	17.50	
					52/37	17.50	
					106/53	17.50	
		157	5785		-	17.50	
		165	5825		-	17.50	
	802.11be EHT20	144	5720	EHT0	-	14.00	
		149	5745		FULL	17.50	
					26/0	17.50	
					52/37	17.50	
					106/53	17.50	
		157	5785		-	17.50	
		165	5825		-	17.50	
	802.11n HT40	142	5710	VHT0	-	11.00	
		151	5755		-	17.50	
		159	5795		-	17.50	
	802.11ax HE40	142	5710	HE0	-	11.50	
		151	5755		FULL	17.50	
					242/61	17.50	
		159	5795		-	17.50	
	802.11be EHT40	142	5710	EHT0	-	11.50	
		151	5755		FULL	17.50	
					242/61	17.50	
		159	5795		-	17.50	
	802.11ac VHT80	138	5690	VHT0	-	7.50	
		155	5775		-	17.50	
	802.11ax HE80	138	5690	HE0	-	8.00	
		155	5775		FULL	17.50	
					484/65	17.50	
	802.11be EHT80	138	5690	EHT0	-	8.00	
		155	5775		FULL	17.50	
					484/65	17.50	

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	Max. Tune up	Average Power(dBm)
5.8G WIFI _1TX _Aux _Ant	802.11a	149	5745	6	-	19.50	No Require
		157	5785		-	19.50	
		165	5825		-	19.50	
	802.11n HT20	144	5720	HT0	-	13.50	12.93
		149	5745		-	20.00	19.83
		157	5785		-	20.00	19.69
		165	5825		-	20.00	19.59
	802.11ax HE20	144	5720	HE0	-	14.00	No Require
		149	5745		FULL	19.50	
					26/0	19.50	
					52/37	19.50	
					106/53	19.50	
		157	5785		-	19.50	
		165	5825		-	19.50	
	802.11be EHT20	144	5720	EHT0	-	14.00	
		149	5745		FULL	19.50	
					26/0	19.50	
					52/37	19.50	
					106/53	19.50	
		157	5785		-	19.50	
	165	5825	-	19.50			
	802.11n HT40	142	5710	VHT0	-	11.00	
		151	5755		-	19.50	
		159	5795		-	19.50	
	802.11ax HE40	142	5710	HE0	-	11.50	
		151	5755		FULL	19.50	
					242/61	19.50	
					-	19.50	
	802.11be EHT40	142	5710	EHT0	-	11.50	
		151	5755		FULL	19.50	
					242/61	19.50	
					-	19.50	
	802.11ac VHT80	138	5690	VHT0	-	7.50	
		155	5775		-	19.50	
		802.11ax HE80	138	5690	HE0	-	
	155		5775	FULL		19.50	
				484/65		19.50	
	802.11be EHT80	138	5690	EHT0	-	8.00	
		155	5775		FULL	19.50	
484/65					19.50		

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	ANT Main Average Power (dBm)	ANT Aux Average Power (dBm)	Max. Tune up	Total Average Power (dBm)	
5.8G WIFI _2TX _Main _Ant + Aux _Ant	802.11n HT20	144	5720	HT8	-	-	-	13.50	No Require	
		149	5745		-	-	-	21.00		
		157	5785		-	-	-	21.00		
		165	5825		-	-	-	21.00		
	802.11ax HE20	144	5720	HE0	-	-	-	14.00	No Require	
		149	5745		FULL	18.17	17.95	21.50		21.07
					26/0	-	-	21.00		
					52/37	-	-	21.00		
					106/53	-	-	21.00		
		157	5785		-	18.18	18.01	21.50		21.11
		165	5825		-	18.15	17.84	21.50		21.01
	802.11be EHT20	144	5720	EHT0	-	-	-	14.00	No Require	
		149	5745		FULL	-	-	21.00		
					26/0	-	-	21.00		
					52/37	-	-	21.00		
					106/53	-	-	21.00		
		157	5785		-	-	-	21.00		
	165	5825	-	-	-	21.00				
	802.11n HT40	142	5710	HT8	-	-	-	11.50		
		151	5755		-	-	-	21.00		
		159	5795		-	-	-	21.00		
	802.11ax HE40	142	5710	HE0	-	-	-	12.00		
		151	5755		FULL	-	-	21.00		
					242/61	-	-	21.00		
					-	-	-	21.00		
	159	5795	-	-	-	21.00				
	802.11be EHT40	142	5710	EHT0	-	-	-	12.00		
		151	5755		FULL	-	-	21.00		
					242/61	-	-	21.00		
					-	-	-	21.00		
	159	5795	-	-	-	21.00				
	802.11ac VHT80	138	5690	VHT0	-	-	-	7.50		
		155	5775		-	-	-	21.00		
	802.11ax HE80	138	5690	HE0	-	-	-	8.50		
		155	5775	HE0	FULL	-	-	21.00		
				484/65	-	-	21.00			
	802.11be EHT80	138	5690	HE0	-	-	-	8.50		
		155	5775	EHT0	FULL	-	-	21.00		
				484/65	-	-	21.00			

Note:

- 1) The Average conducted power of WiFi 5.8G is measured with RMS detector.
- 2) The tested channel results are marks in bold.

7. Conducted power measurements of WiFi 5.9G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	Max. Tune up	Average Power(dBm)
5.9G WIFI _1TX _Main Ant	802.11a	169	5845	6	-	18.00	No Require
		173	5865		-	18.00	
		177	5885		-	18.00	
	802.11n HT20	169	5845	HT0	-	18.00	
		173	5865		-	18.00	
		177	5885		-	18.00	
	802.11ax HE20	169	5845	HE0	-	18.00	
		173	5865		-	18.00	
		177	5885		-	18.00	
	802.11be EHT20	169	5845	EHT0	-	18.00	
		173	5865		-	18.00	
		177	5885		-	18.00	
	802.11n HT40	167	5835	HT0	-	18.50	18.45
		175	5875		-	18.50	18.25
	802.11ax HE40	167	5835	HE0	-	18.00	No Require
		175	5875		-	18.00	
	802.11be EHT40	167	5835	EHT0	-	18.00	
		175	5875		-	18.00	
	802.11ac VHT80	171	5855	VHT0	-	18.00	
	802.11ax HE80			HE0	-	18.00	
	802.11be EHT80			EHT0	-	18.00	
	802.11ac VHT160	163	5815	VHT0	-	18.00	
	802.11ax HE160			HE0	-	18.00	
	802.11be EHT160			HE0	-	18.00	

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	Max. Tune up	Average Power(dBm)
5.9G WIFI _1TX _Aux Ant	802.11a	169	5845	6	-	19.00	No Require
		173	5865		-	19.00	
		177	5885		-	19.00	
	802.11n HT20	169	5845	HT0	-	19.00	
		173	5865		-	19.00	
		177	5885		-	19.00	
	802.11ax HE20	169	5845	HE0	-	19.00	
		173	5865		-	19.00	
		177	5885		-	19.00	
	802.11ax HE20	169	5845	HE0	-	19.00	
		173	5865		-	19.00	
		177	5885		-	19.00	
	802.11n HT40	167	5835	HT0	-	19.50	19.17
		175	5875		-	19.50	19.16
	802.11ax HE40	167	5835	HE0	-	19.00	No Require
		175	5875		-	19.00	
	802.11be EHT40	167	5835	EHT0	-	19.00	
		175	5875		-	19.00	
	802.11ac VHT80	171	5855	VHT0	-	19.00	
	802.11ax HE80			HE0	-	19.00	
	802.11be EHT80			EHT0	-	19.00	
	802.11ac VHT160	163	5815	VHT0	-	18.50	
	802.11ax HE160			HE0	-	18.50	
	802.11ax HE160			HE0	-	18.50	

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	RU Setting	ANT Main Average Power (dBm)	ANT Aux Average Power (dBm)	Max. Tune up	Total Average Power (dBm)
5.9G WIFI _2TX _Main Ant + Aux Ant	802.11n HT20	169	5845	HT8	-	-	-	19.50	No Require
		173	5865		-	-	-	19.50	
		177	5885		-	-	-	19.50	
	802.11ax HE20	169	5845	HE0	-	-	-	19.50	
		173	5865		-	-	-	19.50	
		177	5885		-	-	-	19.50	
	802.11be EHT20	169	5845	EHT0	-	-	-	19.50	
		173	5865		-	-	-	19.50	
		177	5885		-	-	-	19.50	
	802.11n HT40	167	5835	HT8	-	-	-	21.00	
		175	5875		-	-	-	21.00	
	802.11ax HE40	167	5835	HE0	-	-	-	21.00	
		175	5875		-	-	-	21.00	
	802.11be EHT40	167	5835	EHT0	-	-	-	21.00	
		175	5875		-	-	-	21.00	
	802.11ac VHT80	171	5855	VHT0	-	18.24	18.08	21.50	21.17
	802.11ax HE80			HE0	-	-	-	21.00	No Require
	802.11be EHT80			EHT0	-	-	-	21.00	
	802.11ac VHT160	163	5815	VHT0	-	-	-	20.00	
	802.11ax HE160			HE0	-	-	-	20.00	
	802.11be EHT160			EHT0	-	-	-	20.00	

Note:

- 1) The Average conducted power of WiFi 5.9G is measured with RMS detector.
- 2) The tested channel results are marks in bold.

8. Conducted power measurements of WiFi 6.2G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
6.2G WIFI _1TX _Main Ant	802.11ax HE20	1	5955	HE0	14.00	No Require
		45	6175		14.00	
		93	6415		14.00	
	802.11be EHT20	1	5955	EHT0	14.00	
		45	6175		14.00	
		93	6415		14.00	
	802.11ax HE40	3	5965	HE0	14.00	
		43	6165		14.00	
		91	6405		14.00	
	802.11be EHT40	3	5965	EHT0	14.00	
		43	6165		14.00	
		91	6405		14.00	
	802.11ax HE80	7	5985	HE0	14.50	13.66
		39	6145		14.50	13.85
		87	6385		14.50	13.98
	802.11be EHT80	7	5985	EHT0	14.00	No Require
		39	6145		14.00	
		87	6385		14.00	
	802.11ax HE160	15	6025	HE0	14.00	
		79	6345		14.00	
	802.11be EHT160	15	6025	EHT0	14.00	
		79	6345		14.00	
	802.11be EHT320	31	6105	EHT0	14.00	
		63	6265		14.00	

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
6.2G WIFI _1TX _Aux Ant	802.11ax HE20	1	5955	HE0	14.50	No Require
		45	6175		14.50	
		93	6415		14.50	
	802.11be EHT20	1	5955	EHT0	14.50	
		45	6175		14.50	
		93	6415		14.50	
	802.11ax HE40	3	5965	HE0	14.50	
		43	6165		14.50	
		91	6405		14.50	
	802.11be EHT40	3	5965	EHT0	14.50	
		43	6165		14.50	
		91	6405		14.50	
	802.11ax HE80	7	5985	HE0	15.00	14.46
		39	6145		15.00	14.40
		87	6385		14.50	13.93
	802.11be EHT80	7	5985	EHT0	14.50	No Require
		39	6145		14.50	
		87	6385		14.50	
	802.11ax HE160	15	6025	HE0	14.50	
		79	6345		14.50	
	802.11be EHT160	15	6025	EHT0	14.50	
		79	6345		14.50	
	802.11be EHT320	31	6105	EHT0	14.50	
		63	6265		14.50	

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT Main Average Power (dBm)	ANT Aux Average Power (dBm)	Max. Tune up	Total Average Power (dBm)
6.2G WIFI _2TX _Main _Ant + Aux _Ant	802.11ax HE20	1	5955	HE0	-	-	16.50	No Require
		45	6175		-	-	16.50	
		93	6415		-	-	16.50	
	802.11be EHT20	1	5955	EHT0	-	-	16.50	
		45	6175		-	-	16.50	
		93	6415		-	-	16.50	
	802.11ax HE40	3	5965	HE0	13.55	13.76	17.00	16.67
		43	6165		13.58	13.96	17.00	16.78
		91	6405		13.74	14.03	17.00	16.90
	802.11be EHT40	3	5965	EHT0	-	-	16.50	No Require
		43	6165		-	-	16.50	
		91	6405		-	-	16.50	
	802.11ax HE80	7	5985	HE0	-	-	16.50	
		39	6145		-	-	16.50	
		87	6385		-	-	16.50	
	802.11be EHT80	7	5985	EHT0	-	-	16.50	
		39	6145		-	-	16.50	
		87	6385		-	-	16.50	
	802.11ax HE160	15	6025	HE0	-	-	16.50	
		79	6345		-	-	16.50	
	802.11be EHT160	15	6025	EHT0	-	-	16.50	
		79	6345		-	-	16.50	
	802.11be EHT320	31	6105	EHT0	-	-	16.50	
		63	6265		-	-	16.50	

Note:

- 1) The Average conducted power of WiFi 6.2G is measured with RMS detector.
- 2) The tested channel results are marks in bold.

9. Conducted power measurements of WiFi 6.5G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
6.5G WIFI _1TX _Main Ant	802.11ax HE20	97	6435	HE0	5.50	No Require
		105	6475		5.50	
		113	6515		5.50	
	802.11be EHT20	97	6435	EHT0	5.50	
		105	6475		5.50	
		113	6515		5.50	
	802.11ax HE40	99	6445	HE0	8.50	
		107	6485		8.50	
		115	6525		8.50	
	802.11be EHT40	99	6445	EHT0	8.50	
		107	6485		8.50	
		115	6525		8.50	
	802.11ax HE80	103	6465	HE0	11.50	
		119	6545		11.50	
	802.11be EHT80	103	6465	EHT0	11.50	
		119	6545		11.50	
	802.11ax HE160	111	6505	HE0	14.50	14.11
	802.11be EHT160	111	6505	EHT0	14.00	No Require

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
6.5G WIFI _1TX _Aux Ant	802.11ax HE20	97	6435	HE0	5.50	No Require
		105	6475		5.50	
		113	6515		5.50	
	802.11be EHT20	97	6435	EHT0	5.50	
		105	6475		5.50	
		113	6515		5.50	
	802.11ax HE40	99	6445	HE0	8.50	
		107	6485		8.50	
		115	6525		8.50	
	802.11be EHT40	99	6445	EHT0	8.50	
		107	6485		8.50	
		115	6525		8.50	
	802.11ax HE80	103	6465	HE0	11.50	
		119	6545		11.50	
	802.11be EHT80	103	6465	EHT0	11.50	
		119	6545		11.50	
	802.11ax HE160	111	6505	HE0	13.50	13.11
	802.11be EHT160	111	6505	EHT0	13.00	No Require

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT Main Average Power (dBm)	ANT Aux Average Power (dBm)	Max. Tune up	Total Average Power (dBm)
6.5G WIFI _2TX _Main Ant + Aux Ant	802.11ax HE20	97	6435	HE0	-	-	5.50	No Require
		105	6475		-	-	5.50	
		113	6515		-	-	5.50	
	802.11be EHT20	97	6435	EHT0	-	-	5.50	
		105	6475		-	-	5.50	
		113	6515		-	-	5.50	
	802.11ax HE40	99	6445	HE0	-	-	8.50	
		107	6485		-	-	8.50	
		115	6525		-	-	8.50	
	802.11be EHT40	99	6445	EHT0	-	-	8.50	
		107	6485		-	-	8.50	
		115	6525		-	-	8.50	
	802.11ax HE80	103	6465	HE0	-	-	11.50	
		119	6545		-	-	11.50	
	802.11be EHT80	103	6465	EHT0	-	-	11.50	
		119	6545		-	-	11.50	
	802.11ax HE160	111	6505	HE0	10.64	10.41	14.50	13.54
	802.11be EHT160	111	6505	EHT0	10.58	10.45	14.50	13.53

Note:

- 1) The Average conducted power of WiFi 6.5G is measured with RMS detector.
- 2) The tested channel results are marks in bold.

10. Conducted power measurements of WiFi 6.7G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
6.7G WIFI _1TX _Main _Ant	802.11ax HE20	117	6535	HE0	13.50	No Require
		149	6695		13.50	
		181	6855		13.50	
	802.11be EHT20	117	6535	EHT0	13.50	
		149	6695		13.50	
		181	6855		13.50	
	802.11ax HE40	123	6565	HE0	13.50	
		147	6685		13.50	
		179	6845		13.50	
	802.11be EHT40	123	6565	EHT0	13.50	
		147	6685		13.50	
		179	6845		13.50	
	802.11ax HE80	135	6625	HE0	14.00	13.37
		151	6705		14.00	13.55
		167	6785		14.50	14.13
	802.11be EH80	135	6625	EHT0	13.50	No Require
		151	6705		13.50	
		167	6785		13.50	
	802.11ax HE160	143	6665	HE0	13.50	
	802.11be EH160	143	6665	EHT0	13.50	

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
6.7G WIFI _1TX _Aux _Ant	802.11ax HE20	117	6535	HE0	13.50	No Require
		149	6695		13.50	
		181	6855		13.50	
	802.11be EHT20	117	6535	EHT0	13.50	
		149	6695		13.50	
		181	6855		13.50	
	802.11ax HE40	123	6565	HE0	14.00	13.84
		147	6685		14.00	13.68
		179	6845		14.00	13.79
	802.11be EHT40	123	6565	EHT0	13.50	No Require
		147	6685		13.50	
		179	6845		13.50	
	802.11ax HE80	135	6625	HE0	13.50	
		151	6705		13.50	
		167	6785		13.50	
	802.11be EH80	135	6625	EHT0	13.50	
		151	6705		13.50	
		167	6785		13.50	
	802.11ax HE160	143	6665	HE0	13.50	
	802.11be EH160	143	6665	EHT0	13.50	

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT Main Average Power (dBm)	ANT Aux Average Power (dBm)	Max. Tune up	Total Average Power (dBm)
6.7G WIFI _2TX _Main Ant + Aux Ant	802.11ax HE20	117	6535	HE0	-	-	16.50	No Require
		149	6695		-	-	16.50	
		181	6855		-	-	16.50	
	802.11be EHT20	117	6535	EHT0	-	-	16.50	
		149	6695		-	-	16.50	
		181	6855		-	-	16.50	
	802.11ax HE40	123	6565	HE0	-	-	16.50	
		147	6685		-	-	16.50	
		179	6845		-	-	16.50	
	802.11be EHT40	123	6565	EHT0	-	-	16.50	
		147	6685		-	-	16.50	
		179	6845		-	-	16.50	
	802.11ax HE80	135	6625	HE0	13.25	13.57	17.00	16.42
		151	6705		13.47	13.71	17.00	16.60
		167	6785		14.54	14.72	18.00	17.64
	802.11be EH80	135	6625	EHT0	-	-	16.50	No Require
		151	6705		-	-	16.50	
		167	6785		-	-	16.50	
	802.11ax HE160	143	6665	HE0	-	-	16.50	
	802.11be EH160	143	6665	EHT0	-	-	16.50	

Note:

- 1) The Average conducted power of WiFi 6.7G is measured with RMS detector.
- 2) The tested channel results are marks in bold.

11. Conducted power measurements of WiFi 7.0G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
7.0G WIFI _1TX _Main Ant	802.11ax HE20	185	6875	HE0	5.50	No Require
		209	6995		5.50	
		229	7095		5.50	
		233	7115		-1.00	
	802.11be EHT20	185	6875	EHT0	5.50	
		209	6995		5.50	
		229	7095		5.50	
		233	7115		-1.00	
	802.11ax HE40	187	6885	HE0	8.50	
		211	7005		8.50	
		227	7085		8.50	
	802.11be EHT40	187	6885	EHT0	8.50	
		211	7005		8.50	
		227	7085		8.50	
	802.11ax HE80	183	6865	HE0	11.50	
		199	6945		11.50	
		215	7025		11.50	
	802.11be EHT80	183	6865	EHT0	11.50	
		199	6945		11.50	
		215	7025		11.50	
	802.11ax HE160	207	6985	HE0	13.50	13.06
	802.11be EHT160	207	6985	EHT0	13.50	12.89

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
7.0G WIFI _1TX _Aux Ant	802.11ax HE20	185	6875	HE0	5.50	No Require
		209	6995		5.50	
		229	7095		5.50	
		233	7115		-0.50	
	802.11ax HE20	185	6875	EHT0	5.50	
		209	6995		5.50	
		229	7095		5.50	
		233	7115		-0.50	
	802.11ax HE40	187	6885	HE0	8.50	
		211	7005		8.50	
		227	7085		8.50	
	802.11ax HE40	187	6885	EHT0	8.50	
		211	7005		8.50	
		227	7085		8.50	
	802.11ax HE80	183	6865	HE0	11.50	
		199	6945		11.50	
		215	7025		11.50	
	802.11be EHT80	183	6865	EHT0	11.50	
		199	6945		11.50	
		215	7025		11.50	
	802.11ax HE160	207	6985	HE0	14.50	14.43
	802.11be EHT160	207	6985	EHT0	14.50	14.32

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT Main Average Power (dBm)	ANT Aux Average Power (dBm)	Max. Tune up	Total Average Power (dBm)
7.0G WIFI _2TX _Main Ant + Aux Ant	802.11ax HE20	185	6875	HE0	-	-	5.50	No Require
		209	6995		-	-	5.50	
		229	7095		-	-	5.50	
		233	7115		-	-	-1.50	
	802.11be EHT20	185	6875	EHT0	-	-	5.50	
		209	6995		-	-	5.50	
		229	7095		-	-	5.50	
		233	7115		-	-	-1.50	
	802.11ax HE40	187	6885	HE0	-	-	8.50	
		211	7005		-	-	8.50	
		227	7085		-	-	8.50	
	802.11be EHT40	187	6885	EHT0	-	-	8.50	
		211	7005		-	-	8.50	
		227	7085		-	-	8.50	
	802.11ax HE80	183	6865	HE0	-	-	11.50	
		199	6945		-	-	11.50	
		215	7025		-	-	11.50	
	802.11be EHT80	183	6865	EHT0	-	-	11.50	
		199	6945		-	-	11.50	
		215	7025		-	-	11.50	
	802.11ax HE160	207	6985	HE0	10.99	10.86	14.50	13.94
	802.11be EHT160	207	6985	EHT0	11.01	10.81	14.50	13.92

Note:

- 1) The Average conducted power of WiFi 7.0G is measured with RMS detector.
- 2) The tested channel results are marks in bold.

7.2 SAR TEST RESULTS

General Notes:

- 1) Per KDB447498 D04, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
- 2) Per KDB447498 D04, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- 4) Per KDB941225 D06, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is ≤ 1.2 W/kg, no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing.

WLAN Notes:

1. For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 for 2.4GHZ WIFI single transmission chain operations, the highest measured maximum output power Channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.1 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 for 5GHZ WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed power. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2W/kg. See Section 7.1 for more information.

7.2.1 SAR MEASUREMENT RESULT

1. SAR test results of WiFi 2.4G

Test No.	Band	Mode	Channel	RU Setting	Test Position	Separation Distance (mm)	Ant	Data Rate	Duty Cycle (%)	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 1g SAR (W/kg)
W01	WiFi 2.4G	802.11b	12	-	Back of Screen	25	Main	1	98.73	21.00	20.16	0	≤0.001	≤0.001	≤0.001
W02	WiFi 2.4G	802.11b	12	-	Back of Keyboard	0	Main	1	98.73	21.00	20.16	-0.02	0.509	0.235	0.626
W03	WiFi 2.4G	802.11b	1	-	Back of Keyboard	0	Main	1	98.73	20.00	19.03	0	0.500	0.228	0.633
W04	WiFi 2.4G	802.11b	6	-	Back of Keyboard	0	Main	1	98.73	20.00	19.13	-0.04	0.415	0.190	0.514
W05	WiFi 2.4G	802.11b	11	-	Back of Keyboard	0	Main	1	98.73	20.00	19.16	0.06	0.419	0.195	0.515
W06	WiFi 2.4G	802.11b	13	-	Back of Keyboard	0	Main	1	98.73	19.00	18.38	0.02	0.337	0.156	0.394
W08	WiFi 2.4G	802.11b	11	-	Back of Screen	25	Aux	1	98.73	21.50	20.66	0.07	0.039	0.023	0.048
W09	WiFi 2.4G	802.11b	11	-	Back of Keyboard	0	Aux	1	98.73	21.50	20.66	-0.09	0.825	0.374	1.014
W10	WiFi 2.4G	802.11b	1	-	Back of Keyboard	0	Aux	1	98.73	19.50	18.71	0.04	0.418	0.186	0.508
W11	WiFi 2.4G	802.11b	6	-	Back of Keyboard	0	Aux	1	98.73	19.50	18.69	-0.01	0.478	0.218	0.583
W12	WiFi 2.4G	802.11b	12	-	Back of Keyboard	0	Aux	1	98.73	21.00	20.18	-0.03	0.769	0.351	0.941
W13	WiFi 2.4G	802.11b	13	-	Back of Keyboard	0	Aux	1	98.73	19.00	18.02	0.13	0.456	0.209	0.579
W15	WiFi 2.4G	802.11g	11	-	Back of Screen	25	Main	6	98.73	21.50	21.15	0.02	0.041	0.022	0.045
W16	WiFi 2.4G	802.11g	11	-	Back of Keyboard	0	Main	6	98.73	21.50	21.15	-0.02	0.586	0.270	0.643
W17	WiFi 2.4G	802.11g	6	-	Back of Keyboard	0	Main	6	98.73	21.50	21.06	0	0.524	0.242	0.587
W18	WiFi 2.4G	802.11g	1	-	Back of Keyboard	0	Main	6	98.73	20.50	20.04	-0.03	0.506	0.234	0.570
W20	WiFi 2.4G	802.11n HT40	6	-	Back of Screen	25	Aux	HT0	98.73	22.00	21.53	0.01	0.063	0.032	0.071
W21	WiFi 2.4G	802.11n HT40	6	-	Back of Keyboard	0	Aux	HT0	98.73	22.00	21.53	-0.14	1.020	0.458	1.151
W22	WiFi 2.4G	802.11n HT40	9	-	Back of Keyboard	0	Aux	HT0	98.73	20.00	19.65	-0.02	0.653	0.295	0.717
W23	WiFi 2.4G	802.11n HT40	3	-	Back of Keyboard	0	Aux	HT0	98.73	19.50	19.11	-0.04	0.489	0.221	0.542
W25	WiFi 2.4G MIMO	802.11n HT20	6	-	Back of Screen	25	Main+Aux	HT8	98.73	24.00	23.49	0	≤0.001	≤0.001	≤0.001
W26	WiFi 2.4G MIMO	802.11n HT20	6	-	Back of Keyboard	0	Main+Aux	HT8	98.73	24.00	23.49	0.07	0.854	0.405	0.973
W27	WiFi 2.4G MIMO	802.11n HT20	11	-	Back of Keyboard	0	Main+Aux	HT8	98.73	23.50	23.04	-0.01	0.812	0.384	0.914
W28	WiFi 2.4G MIMO	802.11n HT20	1	-	Back of Keyboard	0	Main+Aux	HT8	98.73	21.50	20.97	0.04	0.405	0.191	0.463

Note: The value with boldface is the maximum SAR Value of each test band.

2. SAR test results of BT

Test No.	Band	Mode	Channel	RU Setting	Test Position	Separation Distance (mm)	Ant	Data Rate	Duty Cycle (%)	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 1g SAR (W/kg)
B01	BLE	BLE(1M)	39	-	Back of Screen	25	Main	1	84.46	15.50	14.66	0	≤0.001	≤0.001	≤0.001
B02	BLE	BLE(1M)	39	-	Back of Keyboard	0	Main	1	84.46	15.50	14.66	0.03	0.118	0.053	0.170
B03	BLE	BLE(1M)	0	-	Back of Keyboard	0	Main	1	84.46	15.50	14.36	-0.02	0.127	0.057	0.196
B04	BLE	BLE(1M)	19	-	Back of Keyboard	0	Main	1	84.46	15.50	14.41	0	0.135	0.061	0.205

Note: The value with boldface is the maximum SAR Value of each test band.

3. SAR test results of WiFi 5G

Test No.	Band	Mode	Channel	RU Setting	Test Position	Separation Distance (mm)	Ant	Data Rate	Duty Cycle (%)	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 1g SAR (W/kg)
W29	WiFi 5.2G	802.11n HT20	48	-	Back of Screen	25	Main	HT0	98.63	21.50	20.90	0	0.129	0.056	0.150
W30	WiFi 5.2G	802.11n HT20	48	-	Back of Keyboard	0	Main	HT0	98.63	21.50	20.90	0	0.989	0.356	1.151
W31	WiFi 5.2G	802.11n HT20	36	-	Back of Keyboard	0	Main	HT0	98.63	21.50	20.77	0.07	0.837	0.299	1.004
W32	WiFi 5.2G	802.11n HT20	40	-	Back of Keyboard	0	Main	HT0	98.63	21.50	20.79	0	0.904	0.331	1.079
W34	WiFi 5.2G	802.11n HT20	48	-	Back of Screen	25	Aux	HT0	98.63	21.50	20.97	0	0.153	0.068	0.175
W35	WiFi 5.2G	802.11n HT20	48	-	Back of Keyboard	0	Aux	HT0	98.63	21.50	20.97	0	0.983	0.357	1.126
W36	WiFi 5.2G	802.11n HT20	36	-	Back of Keyboard	0	Aux	HT0	98.63	21.00	20.34	0	0.789	0.290	0.931
W37	WiFi 5.2G	802.11n HT20	40	-	Back of Keyboard	0	Aux	HT0	98.63	21.50	20.76	0	0.921	0.333	1.107
W39	WiFi 5.2G MIMO	802.11ax HE80	42	484/65	Back of Screen	25	Main+Aux	HE0	98.63	22.00	21.66	0	0.064	0.026	0.070
W40	WiFi 5.2G MIMO	802.11ax HE80	42	484/65	Back of Keyboard	0	Main+Aux	HE0	98.63	22.00	21.66	0	0.542	0.195	0.594
W41	WiFi 5.2G MIMO	802.11ax HE80	42	FULL	Back of Keyboard	0	Main+Aux	HE0	98.63	21.00	20.61	0	0.516	0.187	0.572
W43	WiFi 5.3G	802.11n HT20	52	-	Back of Screen	25	Main	HT0	98.63	20.50	20.40	0	0.198	0.088	0.205
W44	WiFi 5.3G	802.11n HT20	52	-	Back of Keyboard	0	Main	HT0	98.63	20.50	20.40	0	1.030	0.371	1.069
W45	WiFi 5.3G	802.11n HT20	60	-	Back of Keyboard	0	Main	HT0	98.63	20.50	20.34	0	1.000	0.353	1.052
W46	WiFi 5.3G	802.11n HT20	64	-	Back of Keyboard	0	Main	HT0	98.63	20.50	19.80	0	1.060	0.373	1.263
W48	WiFi 5.3G	802.11n HT20	64	-	Back of Screen	25	Aux	HT0	98.63	21.00	20.89	0	0.175	0.078	0.182
W49	WiFi 5.3G	802.11n HT20	64	-	Back of Keyboard	0	Aux	HT0	98.63	21.00	20.89	0	1.000	0.365	1.040
W50	WiFi 5.3G	802.11n HT20	52	-	Back of Keyboard	0	Aux	HT0	98.63	21.00	20.82	0	1.130	0.412	1.194
W51	WiFi 5.3G	802.11n HT20	60	-	Back of Keyboard	0	Aux	HT0	98.63	21.00	20.76	0	1.020	0.370	1.093
W53	WiFi 5.3G MIMO	802.11n HT40	54	-	Back of Screen	25	Main+Aux	HT8	98.63	21.50	21.11	0	0.122	0.052	0.135
W54	WiFi 5.3G MIMO	802.11n HT40	54	-	Back of Keyboard	0	Main+Aux	HT8	98.63	21.50	21.11	0	0.601	0.215	0.667
W55	WiFi 5.3G MIMO	802.11n HT40	62	-	Back of Keyboard	0	Main+Aux	HT8	98.63	20.50	20.03	0	0.573	0.202	0.647
W57	WiFi 5.6G	802.11n HT40	142	-	Back of Screen	25	Main	HT0	98.63	19.50	19.05	0	0.133	0.056	0.150
W58	WiFi 5.6G	802.11n HT40	142	-	Back of Keyboard	0	Main	HT0	98.63	19.50	19.05	0	1.050	0.363	1.181
W59	WiFi 5.6G	802.11n HT40	102	-	Back of Keyboard	0	Main	HT0	98.63	19.50	19.03	0	0.936	0.323	1.057
W60	WiFi 5.6G	802.11n HT40	118	-	Back of Keyboard	0	Main	HT0	98.63	19.50	18.91	0	1.080	0.369	1.254
W61	WiFi 5.6G	802.11n HT40	134	-	Back of Keyboard	0	Main	HT0	98.63	19.50	19.02	0	1.150	0.398	1.302
W63	WiFi 5.6G	802.11n HT40	142	-	Back of Screen	25	Aux	HT0	98.63	20.00	19.93	0	0.152	0.068	0.157
W64	WiFi 5.6G	802.11n HT40	142	-	Back of Keyboard	0	Aux	HT0	98.63	20.00	19.93	0	1.100	0.392	1.133
W65	WiFi 5.6G	802.11n HT40	102	-	Back of Keyboard	0	Aux	HT0	98.63	20.00	19.89	0	1.130	0.408	1.175
W66	WiFi 5.6G	802.11n HT40	118	-	Back of Keyboard	0	Aux	HT0	98.63	20.00	19.86	0	1.040	0.382	1.089
W67	WiFi 5.6G	802.11n HT40	134	-	Back of Keyboard	0	Aux	HT0	98.63	20.00	19.81	0	1.090	0.389	1.155

Test No.	Band	Mode	Channel	RU Setting	Test Position	Separation Distance (mm)	Ant	Data Rate	Duty Cycle (%)	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 1g SAR (W/kg)
W69	WiFi 5.6G MIMO	802.11ax HE80	122	-	Back of Screen	25	Main +Aux	HE0	98.63	22.50	22.27	0	0.212	0.086	0.227
W70	WiFi 5.6G MIMO	802.11ax HE80	122	-	Back of Keyboard	0	Main +Aux	HE0	98.63	22.50	22.27	0	1.130	0.388	1.209
W71	WiFi 5.6G MIMO	802.11ax HE80	106	484/65	Back of Keyboard	0	Main +Aux	HE0	98.63	21.50	21.07	0	0.797	0.289	0.892
W72	WiFi 5.6G MIMO	802.11ax HE80	138	-	Back of Keyboard	0	Main +Aux	HE0	98.63	22.50	22.22	0	1.150	0.393	1.243
W74	WiFi 5.8G	802.11n HT20	157	-	Back of Screen	25	Main	HT0	98.63	18.00	17.42	0	0.089	0.039	0.103
W75	WiFi 5.8G	802.11n HT20	157	-	Back of Keyboard	0	Main	HT0	98.63	18.00	17.42	0	1.000	0.330	1.159
W76	WiFi 5.8G	802.11n HT20	149	-	Back of Keyboard	0	Main	HT0	98.63	18.00	17.42	0	0.951	0.316	1.102
W77	WiFi 5.8G	802.11n HT20	165	-	Back of Keyboard	0	Main	HT0	98.63	18.00	17.31	0	1.130	0.352	1.343
W79	WiFi 5.8G	802.11n HT20	149	-	Back of Screen	25	Aux	HT0	98.63	20.00	19.83	0	0.172	0.077	0.181
W80	WiFi 5.8G	802.11n HT20	149	-	Back of Keyboard	0	Aux	HT0	98.63	20.00	19.83	0	0.926	0.334	0.976
W81	WiFi 5.8G	802.11n HT20	157	-	Back of Keyboard	0	Aux	HT0	98.63	20.00	19.69	0	0.965	0.346	1.051
W82	WiFi 5.8G	802.11n HT20	165	-	Back of Keyboard	0	Aux	HT0	98.63	20.00	19.59	0	1.140	0.404	1.270
W84	WiFi 5.8G MIMO	802.11ax HE20	157	-	Back of Screen	25	Main +Aux	HE0	98.63	21.50	21.11	0	0.162	0.067	0.180
W85	WiFi 5.8G MIMO	802.11ax HE20	157	-	Back of Keyboard	0	Main +Aux	HE0	98.63	21.50	21.11	0	1.000	0.337	1.110
W86	WiFi 5.8G MIMO	802.11ax HE20	149	-	Back of Keyboard	0	Main +Aux	HE0	98.63	21.50	21.07	0	0.921	0.313	1.031
W87	WiFi 5.8G MIMO	802.11ax HE20	165	-	Back of Keyboard	0	Main +Aux	HE0	98.63	21.50	21.01	0	1.090	0.369	1.238
W89	WiFi 5.9G	802.11n HT40	167	-	Back of Screen	25	Main	HT0	98.63	18.50	18.45	0	0.175	0.074	0.179
W90	WiFi 5.9G	802.11n HT40	167	-	Back of Keyboard	0	Main	HT0	98.63	18.50	18.45	0	1.190	0.399	1.220
W91	WiFi 5.9G	802.11n HT40	175	-	Back of Keyboard	0	Main	HT0	98.63	18.50	18.25	0	1.100	0.369	1.181
W93	WiFi 5.9G	802.11n HT40	167	-	Back of Screen	25	Aux	HT0	98.63	19.50	19.17	0	0.174	0.075	0.190
W94	WiFi 5.9G	802.11n HT40	167	-	Back of Keyboard	0	Aux	HT0	98.63	19.50	19.17	0	1.020	0.361	1.116
W95	WiFi 5.9G	802.11n HT40	175	-	Back of Keyboard	0	Aux	HT0	98.63	19.50	19.16	0	1.030	0.364	1.129
W97	WiFi 5.9G MIMO	802.11ac VHT80	171	-	Back of Screen	25	Main +Aux	VHT0	98.63	21.50	21.17	0	0.176	0.075	0.193
W98	WiFi 5.9G MIMO	802.11ac VHT80	171	-	Back of Keyboard	0	Main +Aux	VHT0	98.63	21.50	21.17	0	1.110	0.373	1.214

Note: The value with boldface is the maximum SAR Value of each test band.

4. SAR test results of WiFi 6E

Test No.	Band	Mode	Channel	Test Position	Separation Distance (mm)	Ant	Data Rate	Duty Cycle (%)	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 10g SAR (W/kg)
W99	WiFi 6.2G	802.11ax HE80	87	Back of Screen	25	Main	HE0	97.77	14.50	13.98	0.08	0.033	0.013	0.038
W100	WiFi 6.2G	802.11ax HE80	87	Back of Keyboard	0	Main	HE0	97.77	14.50	13.98	-0.12	0.496	0.162	0.572
W101	WiFi 6.2G	802.11ax HE80	7	Back of Keyboard	0	Main	HE0	97.77	14.50	13.66	0.14	0.410	0.136	0.509
W102	WiFi 6.2G	802.11ax HE80	39	Back of Keyboard	0	Main	HE0	97.77	14.50	13.85	-0.15	0.443	0.144	0.526
W104	WiFi 6.2G	802.11ax HE80	7	Back of Screen	25	Aux	HE0	97.77	15.00	14.46	0.17	0.030	0.013	0.035
W105	WiFi 6.2G	802.11ax HE80	7	Back of Keyboard	0	Aux	HE0	97.77	15.00	14.46	-0.13	0.370	0.127	0.429
W106	WiFi 6.2G	802.11ax HE80	39	Back of Keyboard	0	Aux	HE0	97.77	15.00	14.40	0.01	0.343	0.116	0.403
W107	WiFi 6.2G	802.11ax HE80	87	Back of Keyboard	0	Aux	HE0	97.77	14.50	13.93	0.01	0.365	0.123	0.426
W109	WiFi 6.2G MIMO	802.11ax HE40	91	Back of Screen	25	Main +Aux	HE0	97.77	17.00	16.90	0.01	0.034	0.014	0.036
W110	WiFi 6.2G MIMO	802.11ax HE40	91	Back of Keyboard	0	Main +Aux	HE0	97.77	17.00	16.90	0.06	0.469	0.151	0.491
W111	WiFi 6.2G MIMO	802.11ax HE40	3	Back of Keyboard	0	Main +Aux	HE0	97.77	17.00	16.67	0.04	0.383	0.127	0.423
W112	WiFi 6.2G MIMO	802.11ax HE40	43	Back of Keyboard	0	Main +Aux	HE0	97.77	17.00	16.78	-0.09	0.294	0.100	0.316
W114	WiFi 6.5G	802.11ax HE160	111	Back of Screen	25	Main	HE0	97.77	14.50	14.11	-0.15	0.027	0.011	0.030
W115	WiFi 6.5G	802.11ax HE160	111	Back of Keyboard	0	Main	HE0	97.77	14.50	14.11	0	0.457	0.146	0.511
W117	WiFi 6.5G	802.11ax HE160	111	Back of Screen	25	Aux	HE0	97.77	13.50	13.11	-0.06	0.020	0.008	0.022
W118	WiFi 6.5G	802.11ax HE160	111	Back of Keyboard	0	Aux	HE0	97.77	13.50	13.11	-0.03	0.309	0.106	0.346
W120	WiFi 6.5G MIMO	802.11ax HE160	111	Back of Screen	25	Main +Aux	HE0	97.77	14.50	13.54	0	0.033	0.014	0.042
W121	WiFi 6.5G MIMO	802.11ax HE160	111	Back of Keyboard	0	Main +Aux	HE0	97.77	14.50	13.54	-0.17	0.222	0.070	0.283
W123	WiFi 6.7G	802.11ax HE80	167	Back of Screen	25	Main	HE0	97.77	14.50	14.13	0.07	0.025	0.009	0.028
W124	WiFi 6.7G	802.11ax HE80	167	Back of Keyboard	0	Main	HE0	97.77	14.50	14.13	0.01	0.407	0.132	0.453
W125	WiFi 6.7G	802.11ax HE80	135	Back of Keyboard	0	Main	HE0	97.77	14.00	13.37	0.16	0.423	0.137	0.500
W126	WiFi 6.7G	802.11ax HE80	151	Back of Keyboard	0	Main	HE0	97.77	14.00	13.55	-0.03	0.434	0.141	0.492
W128	WiFi 6.7G	802.11ax HE40	123	Back of Screen	25	Aux	HE0	97.77	14.00	13.84	0.03	0.020	0.008	0.021
W129	WiFi 6.7G	802.11ax HE40	123	Back of Keyboard	0	Aux	HE0	97.77	14.00	13.84	-0.04	0.318	0.111	0.337
W130	WiFi 6.7G	802.11ax HE40	147	Back of Keyboard	0	Aux	HE0	97.77	14.00	13.68	-0.1	0.310	0.109	0.341
W131	WiFi 6.7G	802.11ax HE40	179	Back of Keyboard	0	Aux	HE0	97.77	14.00	13.79	-0.09	0.254	0.086	0.273
W133	WiFi 6.7G MIMO	802.11ax HE80	167	Back of Screen	25	Main +Aux	HE0	97.77	18.00	17.64	-0.08	0.025	0.010	0.028
W134	WiFi 6.7G MIMO	802.11ax HE80	167	Back of Keyboard	0	Main +Aux	HE0	97.77	18.00	17.64	0.03	0.441	0.143	0.490
W135	WiFi 6.7G MIMO	802.11ax HE80	135	Back of Keyboard	0	Main +Aux	HE0	97.77	17.00	16.42	0	0.398	0.130	0.465
W136	WiFi 6.7G MIMO	802.11ax HE80	151	Back of Keyboard	0	Main +Aux	HE0	97.77	17.00	16.60	0	0.410	0.132	0.460

Test No.	Band	Mode	Channel	Test Position	Separation Distance (mm)	Ant	Data Rate	Duty Cycle (%)	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 10g SAR (W/kg)
W138	WiFi 7.0G	802.11ax HE160	207	Back of Screen	25	Main	HE0	97.77	13.50	13.06	-0.08	0.023	0.009	0.026
W139	WiFi 7.0G	802.11ax HE160	207	Back of Keyboard	0	Main	HE0	97.77	13.50	13.06	-0.08	0.463	0.148	0.524
W141	WiFi 7.0G	802.11ax HE160	207	Back of Screen	25	Aux	HE0	97.77	14.50	14.43	-0.06	0.021	0.008	0.022
W142	WiFi 7.0G	802.11ax HE160	207	Back of Keyboard	0	Aux	HE0	97.77	14.50	14.43	-0.01	0.288	0.097	0.299
W144	WiFi 7.0G MIMO	802.11ax HE160	207	Back of Screen	25	Main +Aux	HE0	97.77	14.50	13.94	-0.07	0.021	0.009	0.024
W145	WiFi 7.0G MIMO	802.11ax HE160	207	Back of Keyboard	0	Main +Aux	HE0	97.77	14.50	13.94	0	0.347	0.110	0.404

Note: The value with boldface is the maximum SAR Value of each test band.

5. SAR test results of Power Density

System&Position						DUT& Accessory	SAR									Power Density								
Test No.	Band	Mode	Channel	Test Position	Separation Distance (cm)	Ant	Data Rate	Duty Cycle (%)	Maximum Tune up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 1g SAR	APD W/m² (4cm²)	Grid Step (λ)	Scaling Factor for Measurement Uncertainty	Averaging Area (cm²)	Power Drift (dB)	Normal PsPD (W/m²)	Scaling Normal PsPD (W/m²)	Total PsPD (W/m²)	Scaling Total PsPD (W/m²)	
W100	WiFi 6.2G	802.11ax HE80	87	Back of Keyboard	0	Main	HE0	97.77	14.50	13.98	-0.12	0.496	0.162	0.572	3.7	0.0625	1.55	4	-0.17	4.55	8.13	5.39	9.63	
W105	WiFi 6.2G	802.11ax HE80	7	Back of Keyboard	0	Aux	HE0	97.77	15.00	14.46	-0.13	0.370	0.127	0.429	2.87	0.0625	1.55	4	0.1	3.85	6.91	4.76	8.55	
W110	WiFi 6.2G MIMO	802.11ax HE40	91	Back of Keyboard	0	Main +Aux	HE0	97.77	17.00	16.90	0.06	0.469	0.151	0.491	3.48	0.0625	1.55	4	-0.15	3.91	6.35	5.26	8.54	


Note:

- 1) Chose the worst case of WiFi 6E to test power density.
- 2) This device is in compliance with power density for general population or uncontrolled exposure limits, and has been tested in accordance with the measurement methods and procedures specified in TCBC workshop notes and IEC TR 63170.

7.3 MULTIPLE TRANSMITTER EVALUATION

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB447498 D04 Interim General RF Exposure Guidance v01.

The location of the antennas inside the EUT is shown as below picture:

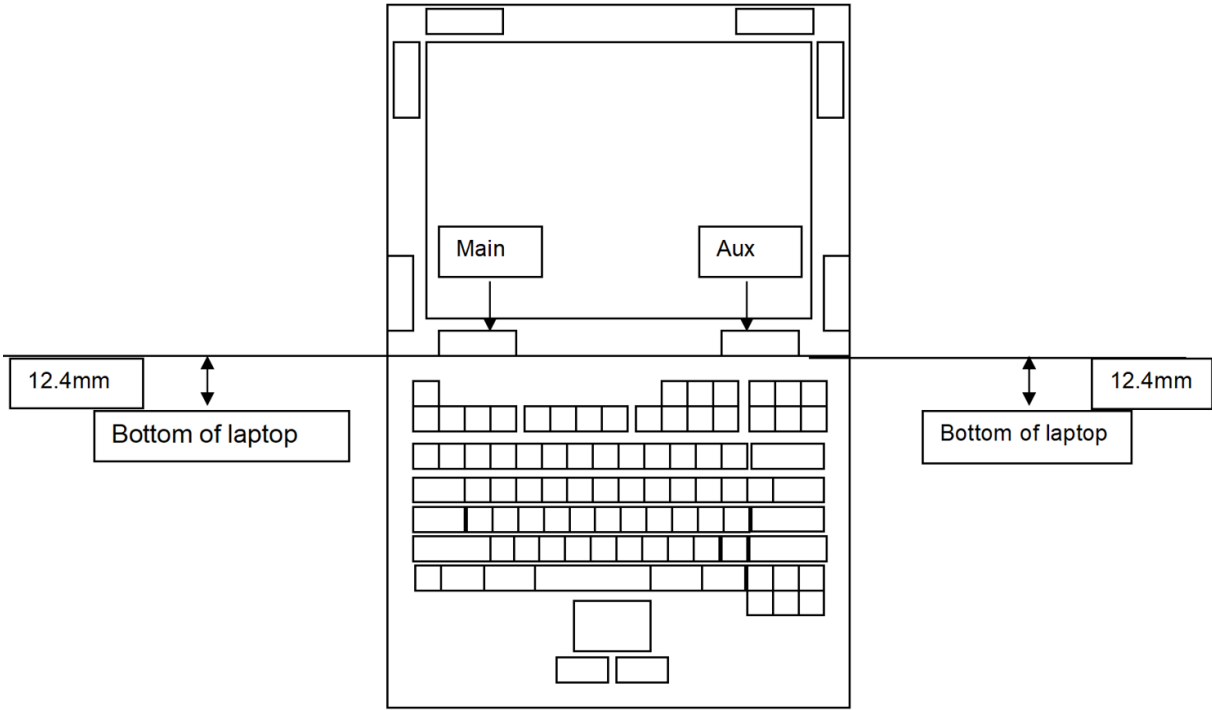

7.3.1 SIMULTANEOUS TRANSMISSION CONDITIONS

Per FCC KDB447498 D04, SAR compliance for simultaneous transmission must be considered when the maximum duration of overlapping transmissions, including network hand-offs, is greater than 30 seconds. This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis.

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	Body
1	WLAN 2.4G Main Ant + WLAN 2.4G Aux Ant	Yes
2	WLAN 5.2G Main Ant + WLAN 5.2G Aux Ant	Yes
3	WLAN 5.3G Main Ant + WLAN 5.3G Aux Ant	Yes
4	WLAN 5.6G Main Ant + WLAN 5.6G Aux Ant	Yes
5	WLAN 5.8G Main Ant + WLAN 5.8G Aux Ant	Yes
6	WLAN 5.9G Main Ant + WLAN 5.9G Aux Ant	Yes
7	WLAN 6.2G Main Ant + WLAN 6.2G Aux Ant	Yes
8	WLAN 6.5G Main Ant + WLAN 6.5G Aux Ant	Yes
9	WLAN 6.7G Main Ant + WLAN 6.7G Aux Ant	Yes
10	WLAN 7.0G Main Ant + WLAN 7.0G Aux Ant	Yes
11	BT Main Ant + WLAN 2.4G Aux Ant	Yes
12	BT Main Ant + WLAN 5.2G Aux Ant	Yes
13	BT Main Ant + WLAN 5.3G Aux Ant	Yes
14	BT Main Ant + WLAN 5.6G Aux Ant	Yes
15	BT Main Ant + WLAN 5.8G Aux Ant	Yes
16	BT Main Ant + WLAN 5.9G Aux Ant	Yes
17	BT Main Ant + WLAN 6.2G Aux Ant	Yes
18	BT Main Ant + WLAN 6.5G Aux Ant	Yes
19	BT Main Ant + WLAN 6.7G Aux Ant	Yes
20	BT Main Ant + WLAN 7.0G Aux Ant	Yes

Note: Only the Main Ant supports BT function.

7.3.2 SAR UMMATION SCENARIO

About WIFI transmit simultaneously:

The results of transmit simultaneous please refer to section 7.2.1.

About WIFI and Bluetooth transmit simultaneously:

Test Position		Back of Screen (2.5cm)	Back of Keyboard (0cm)
SAR _{1g} (W/Kg)			
Main Ant	BT	≤0.001	0.205
Aux Ant	WiFi 2.4G	0.071	1.151
	WiFi 5.2G	0.175	1.126
	WiFi 5.3G	0.182	1.194
	WiFi 5.6G	0.157	1.175
	WiFi 5.8G	0.181	1.270
	WiFi 5.9G	0.190	1.129
	WiFi 6.2G	0.035	0.429
	WiFi 6.5G	0.022	0.346
	WiFi 6.7G	0.021	0.341
	WiFi 7.0G	0.022	0.299
MAX $\sum$ SAR _{1g}		0.190	1.475

Note:

1) Thus SAR_{MAX.total} = 1.475 W/kg < 1.6 W/kg, it is compliant with 1999/519/EC, so Simultaneous SAR are not required for BT and WIFI.

Frequency Band	Standalone Transmission	
	PD Value over 4cm ² (mW/cm ²)	Limit (mW/cm ²)
WIFI 6E	0.963	1.0

Note:

1) This device is in compliance with power density for general population or uncontrolled exposure limits, and has been tested in accordance with the measurement methods and procedures specified in TCBC workshop notes and IEC TR 63170.

2) When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.

APPENDIX


1. TEST LAYOUT

Specific Absorption Rate Test Layout



Liquid depth in the flat Phantom ($\geq 15\text{cm}$ depth)

HSL_600MHz-10000MHz_Body_15.5cm

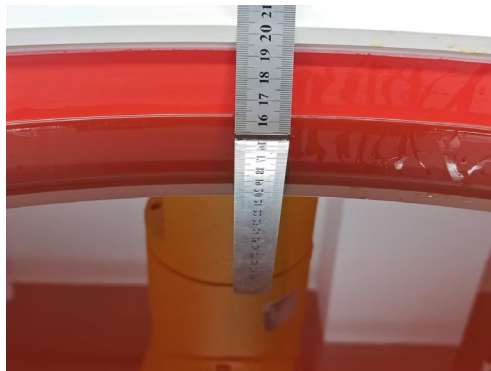

Appendix A. SAR Plots of System Verification

(Pls See BTL-FCC SAR-1-2512C098A_Appendix A.)

Appendix B. SAR Plots of SAR Measurement

(Pls See BTL-FCC SAR-1-2512C098A_Appendix B.)

Appendix C. Calibration Certificate

(Pls See BTL-FCC SAR-1-2512C098A_Appendix C.)

Appendix D. Photographs of the Test Set-Up

(Pls See BTL-FCC SAR-1-2512C098A_Appendix D.)

End of Test Report