



FCC Radio Test Report

FCC ID: RWO-RZ090581

This report concerns: Class II Permissive Change

Project No. : 2512C098A
Equipment : Notebook PC
Brand Name : RAZER
Model Name : RZ09-0581
Applicant : Razer Inc.
Address : 9 Pasteur, Irvine, CA92618, USA.
Manufacturer : Razer Inc.
Address : 9 Pasteur, Irvine, CA92618, USA.
Date of Receipt : Dec. 08, 2025
Date of Test : Dec. 08, 2025 ~ Dec. 29, 2025
Issued Date : Jan. 29, 2026
Test Sample : Sample No.: DG925251208453
Standard(s) : FCC CFR Title 47, Part 15, Subpart E

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan).

Prepared by :

Chella Zheng
Chella Zheng

Approved by :

Chay Cai
Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.
Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	5
1 . APPLICABLE STANDARDS	6
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
2.3 TEST ENVIRONMENT CONDITIONS	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 TEST MODES	13
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
3.4 SUPPORT UNITS	14
3.5 CUSTOMER INFORMATION DESCRIPTION	14
4 . AC POWER LINE CONDUCTED EMISSIONS	15
4.1 LIMIT	15
4.2 TEST PROCEDURE	15
4.3 DEVIATION FROM TEST STANDARD	15
4.4 TEST SETUP	16
4.5 EUT OPERATION CONDITIONS	16
4.6 TEST RESULTS	16
5 . RADIATED EMISSIONS	17
5.1 LIMIT	17
5.2 TEST PROCEDURE	18
5.3 DEVIATION FROM TEST STANDARD	20
5.4 TEST SETUP	20
5.5 EUT OPERATION CONDITIONS	22
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	22
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	22
5.8 TEST RESULTS - ABOVE 1000 MHZ	22
6 . LIST OF MEASURING EQUIPMENTS	23
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	25
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	28
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	33

Table of Contents

Page

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

36

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-6-2512C098A	R00	Original Report.	Jan. 29, 2026	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standard:

ANSI C63.10-2020

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 987594 D02 U-NII 6GHz EMC Measurement v03

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a)	Bandwidth	-----	PASS	NOTE (5)
15.407(a)	Maximum e.i.r.p.	-----	PASS	NOTE (5)
15.407(a)	Maximum Power Spectral Density (e.i.r.p.)	-----	PASS	NOTE (5)
15.407(b)	In-Band Emission (Mask)	-----	PASS	NOTE (5)
15.407(d)	Contention Based Protocol	-----	PASS	NOTE (6)
15.407(g)	Frequency Stability	-----	PASS	NOTE (5)
15.203 15.407(a)	Antenna Requirements	-----	PASS	NOTE (2) NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) The device employ a permanently attached integrated antenna.
- (4) Device Type:
 - ☐ 6ID: Indoor access point
 - ☐ 6PP: Subordinate device (operating under control of a low-power indoor access point)
 - ☒ 6XD: Indoor client (operating under control of a low-power indoor access point)
 - ☐ 6CD: Dual client (operating under control of either a low-power indoor access point or standard power access point)
 - ☐ 6SD: Standard power access point
 - ☐ 6FX: Standard client (operating under control of a Standard power access point)
 - ☐ 6FC: Fixed client (operating under control of a Standard power access point)
- (5) The antenna gain of EUT is smaller than that of the module. So in this report the worst cases of Radiated Emissions and AC Power Line Conducted Emissions were evaluated and recorded. For the test results of all other test items please refer to module test reports.
- (6) The minimum antenna gain of the EUT is larger than the antenna gain when the module tests Contention Based Protocol, so Contention Based Protocol does not need to re-evaluate the test.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U_1 (dB)
DGDLC02	CISPR	150kHz ~ 30MHz	2.66

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U_1 (dB)
DGDLCB03	CISPR	9kHz ~ 30MHz	2.26

Test Site	Method	Measurement Frequency Range	Ant. H / V	U_1 (dB)
DGDLCB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U_1 (dB)
DGDLCB03 (3m)	CISPR	1GHz ~ 6GHz	4.16
		6GHz ~ 18GHz	4.74

Test Site	Method	Measurement Frequency Range	U_1 (dB)
DGDLCB02 (1m)	CISPR	18 ~ 26.5 GHz	4.30
		26.5 ~ 40 GHz	4.74

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	24°C	53%	AC 120V/60Hz	Hayden Chen	Dec. 17, 2025
Radiated Emissions -9kHz to 30MHz	22°C	50%	AC 120V/60Hz	Hayden Chen	Dec. 18, 2025
Radiated Emissions -30MHz to 1000MHz	23°C	48%	AC 120V/60Hz	Calvin Wen	Dec. 19, 2025
Radiated Emissions -Above 1000 MHz	23°C	48%	AC 120V/60Hz	Calvin Wen	Dec. 19, 2025
	23°C	48%	AC 120V/60Hz	Torin Long	Dec. 25, 2025

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Notebook PC
Brand Name	RAZER
Test Model	RZ09-0581
Model Name	RZ09-0581
Model Difference(s)	N/A
Software Version	APF25002_MB
Hardware Version	Windows 11
Power Source	1# DC voltage supplied from AC adapter. 1) Model: ADP-280EB D 2) Model: AM280U-200C 2# Supplied from battery. Model: RC30-0528
Power Rating	1# I/P: 100-240V~ 3.2A 50-60Hz O/P: 20.0V===14.0A 2# 15.56V 5494mAh 85.5Wh
Frequency Range	U-NII 5: 5925 MHz ~ 6425 MHz U-NII 6: 6425 MHz ~ 6525 MHz U-NII 7: 6525 MHz ~ 6875 MHz U-NII 8: 6875 MHz ~ 7125 MHz
Operation Frequency	UNII-5: 5955 MHz ~ 6415 MHz UNII-6: 6425 MHz ~ 6515 MHz UNII-7: 6525 MHz ~ 6875 MHz UNII-8: 6895 MHz ~ 7115 MHz
Modulation Technology	IEEE 802.11ax/be: OFDMA
Transfer Rate	IEEE 802.11ax: up to 2402 Mbps IEEE 802.11be: up to 5764 Mbps

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2. Channel List:

UNII-5							
IEEE 802.11a IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)		IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5955	3	5965	7	5985	15	6025
5	5975	11	6005	23	6065	47	6185
9	5995	19	6045	39	6145	79	6345
13	6015	27	6085	55	6225		
17	6035	35	6125	71	6305		
21	6055	43	6165	87	6385		
25	6075	51	6205				
29	6095	59	6245				
33	6115	67	6285				
37	6135	75	6325				
41	6155	83	6365				
45	6175	91	6405				
49	6195						
53	6215						
57	6235						
61	6255						
65	6275						
69	6295						
73	6315						
77	6335						
81	6355						
85	6375						
89	6395						
93	6415						

UNII-6							
IEEE 802.11a IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)		IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
97	6435	99	6445	103	6465	111	6505
101	6455	107	6485				
105	6475	115	6525				
109	6495						
113	6515						

UNII-7							
IEEE 802.11a IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)		IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
117	6535	123	6565	119	6545	143	6665
121	6555	131	6605	135	6625	175	6825
125	6575	139	6645	151	6705		
129	6595	147	6685	167	6785		
133	6615	155	6725	183	6865		
137	6635	163	6765				
141	6655	171	6805				
145	6675	179	6845				
149	6695						
153	6715						
157	6735						
161	6755						
165	6775						
169	6795						
173	6815						
177	6835						
181	6855						

UNII-8							
IEEE 802.11a IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)		IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
185	6875	187	6885	199	6945	207	6985
189	6895	195	6925	215	7025		
193	6915	203	6965				
197	6935	211	7005				
201	6955	219	7045				
205	6975	227	7085				
209	6995						
213	7015						
217	7035						
221	7055						
225	7075						
229	7095						
233	7115						

IEEE 802.11be(EHT320)							
UNII-5		UNII-6		UNII-7		UNII-8	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
31	6105	95	6425	127	6585	191	6905
63	6265			159	6745		

3. Antenna Specification:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1	Quectel	Y4RRW0MA4CA	PIFA	I-PEXMHF4-L	3.31
2	Quectel	Y4RRW0MA4BA	PIFA	I-PEXMHF4-L	3.80

Note: Ant.1 refers to Main Antenna, Ant.2 refers to Aux Antenna.

3.2 TEST MODES


Test Items	Test Mode	Channel	Note
AC Power Line Conducted Emissions	IEEE 802.11be(EHT160)	79	-
Radiated Emissions -9kHz to 30MHz	IEEE 802.11be(EHT160)	79	-
Radiated Emissions -30MHz to 1000MHz	IEEE 802.11be(EHT160)	79	-
Radiated Emissions -Above 1000MHz	IEEE 802.11be(EHT160)	79	-

Note:

- (1) This Notebook PC has two adapters. Both adapter ADP-280EB D and adapter AM280U-200C had been pre-tested and in this report only recorded the worst case.

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 3.6.

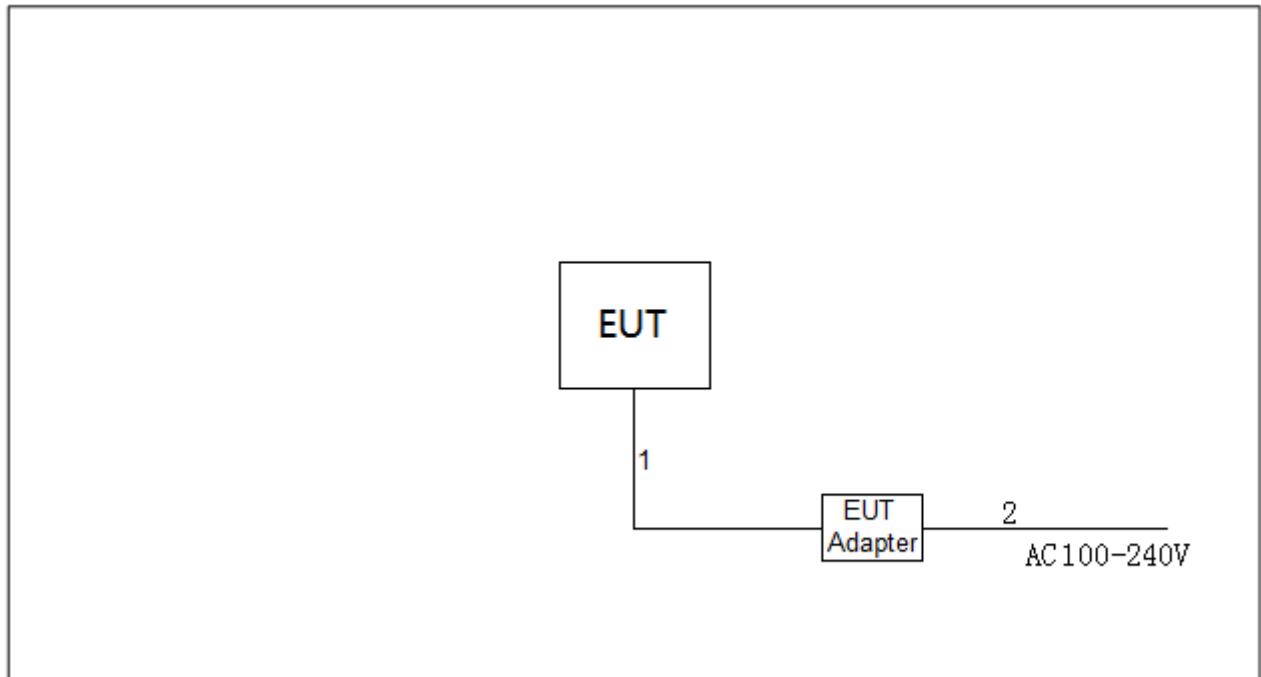

3.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
-	-	-	-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5M
2	AC Cable	NO	NO	1.0M

3.5 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value - Limit Value

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

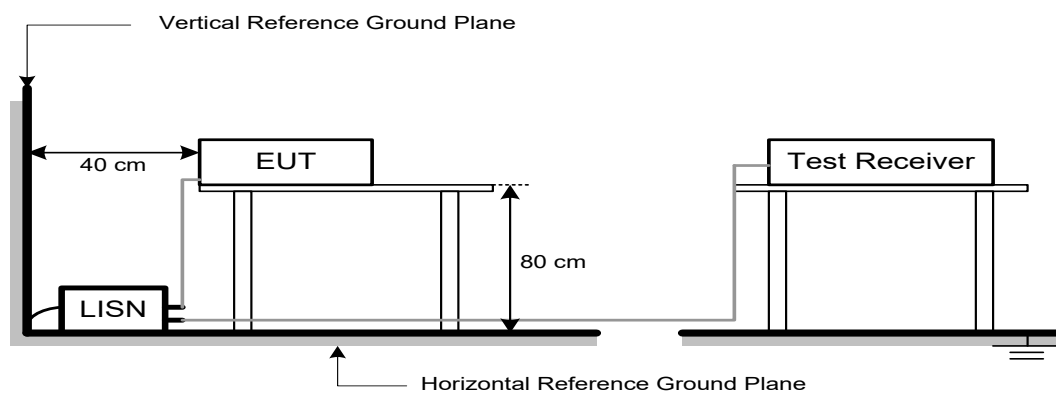

4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

According to 15.407(b)(6) the limits are as follows:

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz) AND UNWANTED EMISSION WITHIN THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Maximum field strength Limit at 3m (dBμV/m)	Maximum field strength Limit at 1m (dBμV/m)
5925-7125	Average: -27	68.2	77.7 (Note 2)

NOTE:

(1) e.i.r.p. Limit (dBuV/m at 3m) = Power Limit(dBm) + 95.2. (Referring to FCC KDB 987594 D02, clause G.2.d)(iii))

(2)

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

$20 \log (d_{\text{limit}}/d_{\text{measure}}) = 20 \log (3/1) = 9.5 \text{ dB}$.

FS_{limit} : Harmonic at 3m Peak and Average limit.

FS_{max} : Harmonic at 1m Peak and Average Maximum value.

d_{limit} : Harmonic at 3m test distance.

d_{measure} : Harmonic Actual test distance.

(3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain (if use)

Margin Level = Measurement Value - Limit Value

5.2 TEST PROCEDURE

For measurements below 30 MHz:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

For measurements 30 MHz to 40 GHz:

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(30MHz to 1GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (30MHz to 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

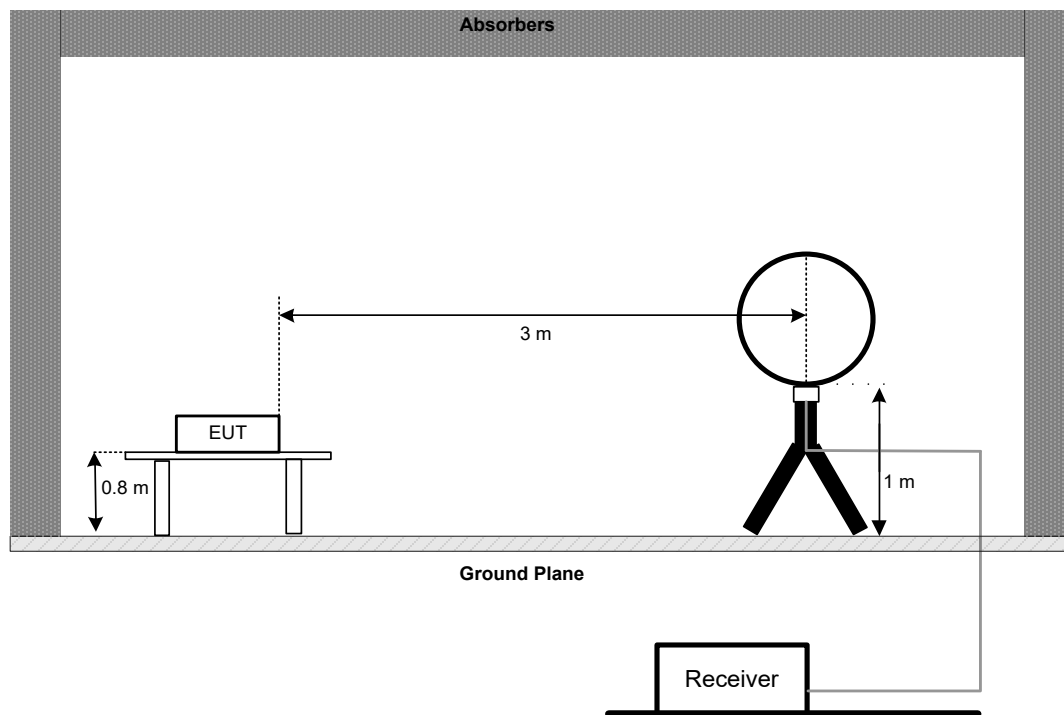


30 MHz to 1 GHz

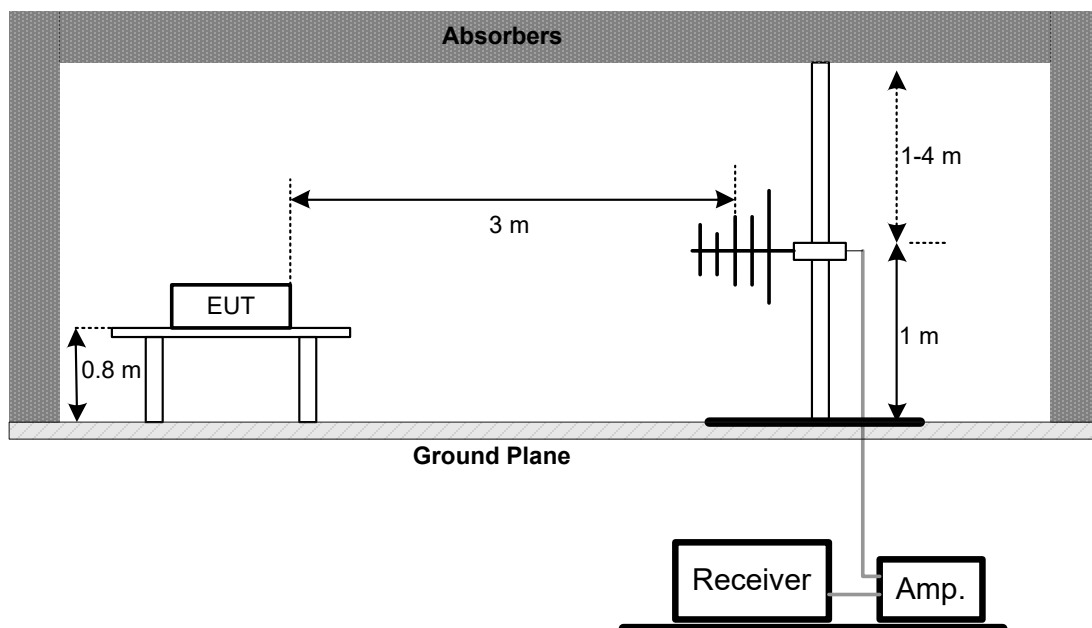

Above 1 GHz
Band edge & Harmonic(1 GHz to 18 GHz)

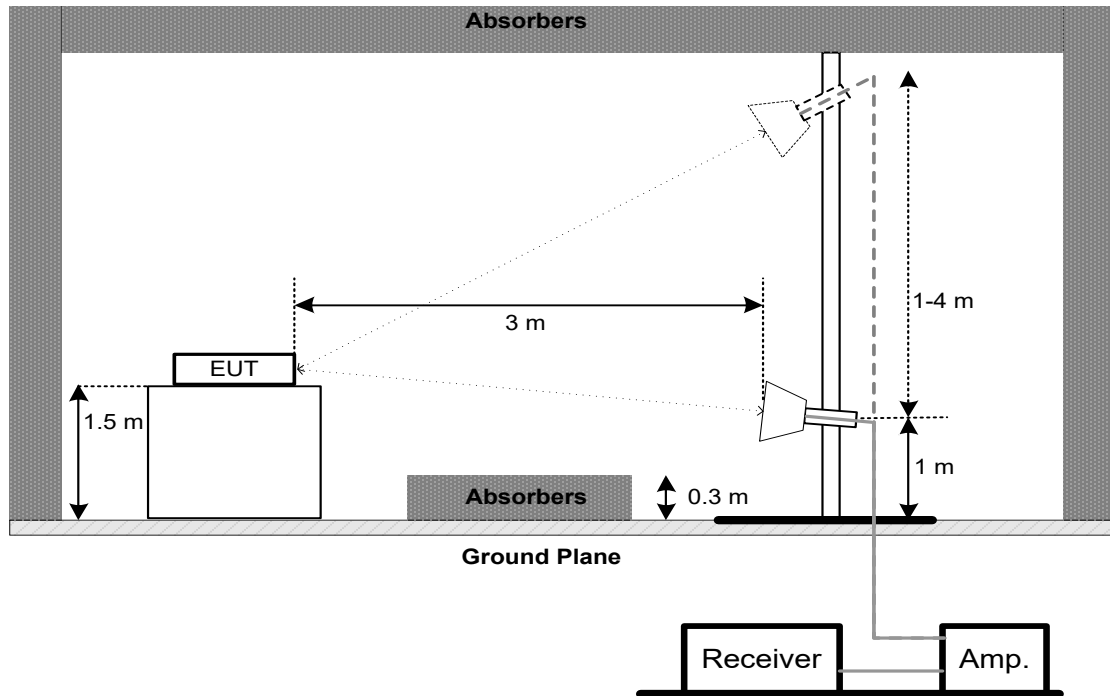

Harmonic(18 GHz to 40 GHz)

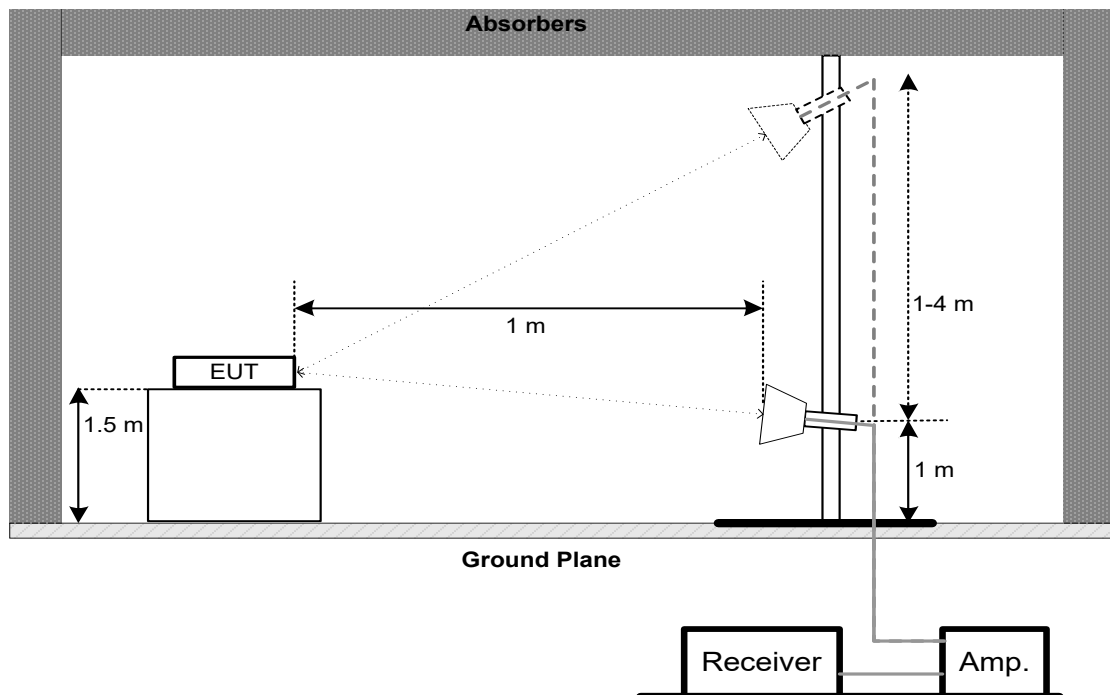

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Nov. 21, 2026
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Nov. 21, 2026
3	BTL_RE_System	BTL	BTL_RE_System	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Jul. 08, 2026
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 01, 2026
2	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
3	Cable	RegalWay	LMR400-NMNM-6m	N/A	Apr. 26, 2026
4	Cable	RegalWay	LMR400-NMRANM-3.5m	N/A	Apr. 26, 2026
5	966 Chamber room	CM	9*6*6	N/A	May 09, 2026
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec. 07, 2026
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 07, 2026
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 17, 2026
4	Cable	RegalWay	LMR400-NMNM-12.5m	N/A	Jun. 04, 2026
5	Cable	RegalWay	LMR400-NMNM-3m	N/A	Jun. 04, 2026
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	Jun. 04, 2026
7	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 15, 2026


Radiated Emissions - 1 GHz to 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2026
2	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980888	Oct. 17, 2026
3	Double Ridged Guide Antenna	ETS	3115	75846	Mar. 02, 2026
4	Cable	RegalWay	RWLP50-4.0A-SMS M-12.5M	N/A	Jun. 29, 2026
5	Cable	RegalWay	RWLP50-4.0A-NM RASM-2.5M	N/A	Jun. 29, 2026
6	Cable	RegalWay	RWLP50-4.0A-NM RASMRA-0.8M	N/A	Jun. 29, 2026
7	966 Chamber room	CM	9*6*6	N/A	May 18, 2026
8	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
9	Filter	COM-MW	ZHPF6-M8000 18000-1331	N/A	Oct. 17, 2026

Radiated Emissions - Above 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Cable	Tonscend	HF160-KMKM-0.5M	N/A	Oct. 21, 2026
2	Cable	Tonscend	HF160-KMKM-5M	N/A	Oct. 21, 2026
3	Pre-Amplifier	EMC INSTRUMENT	EMC184045SE	980409	Nov. 21, 2026
4	DRG Horn Antenna	ETS	3116C	218942	Feb. 28, 2026
5	Positioning Controller	MF	MF-7802	N/A	N/A
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
7	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	May 17, 2026

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX BE(EHT160) Mode Channel 79	Phase	Line
-----------	-------------------------------	-------	------

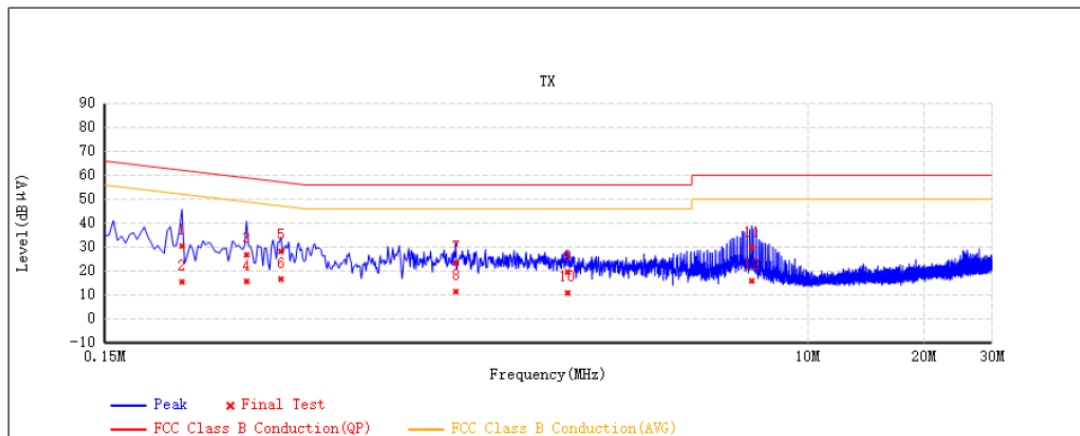


Suspected Note List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content	
1	0.2382	20.07	10.42	30.49	62.16	-31.67	QP		
2	0.2382	5.09	10.42	15.51	52.16	-36.65	AVG		
3	0.3504	16.35	10.45	26.8	58.95	-32.16	QP		
4	0.3504	5.27	10.45	15.72	48.95	-33.23	AVG		
5	0.4298	17.79	10.47	28.26	57.26	-29	QP		
6	0.4298	6.22	10.47	16.68	47.26	-30.58	AVG		
7	1.2221	12.81	10.57	23.39	56	-32.61	QP		
8	1.2221	0.87	10.57	11.45	46	-34.55	AVG		
9	2.3818	8.93	10.67	19.6	56	-36.4	QP		
10	2.3818	0.22	10.67	10.9	46	-35.1	AVG		
11	7.1504	18.52	11.22	29.74	60	-30.26	QP		
12	7.1504	4.67	11.22	15.9	50	-34.1	AVG		

REMARKS:

- (1) Level = Reading + Factor.
- (2) Margin = Level - Limit.

Test Mode	TX BE(EHT160) Mode Channel 79	Phase	Neutral
-----------	-------------------------------	-------	---------

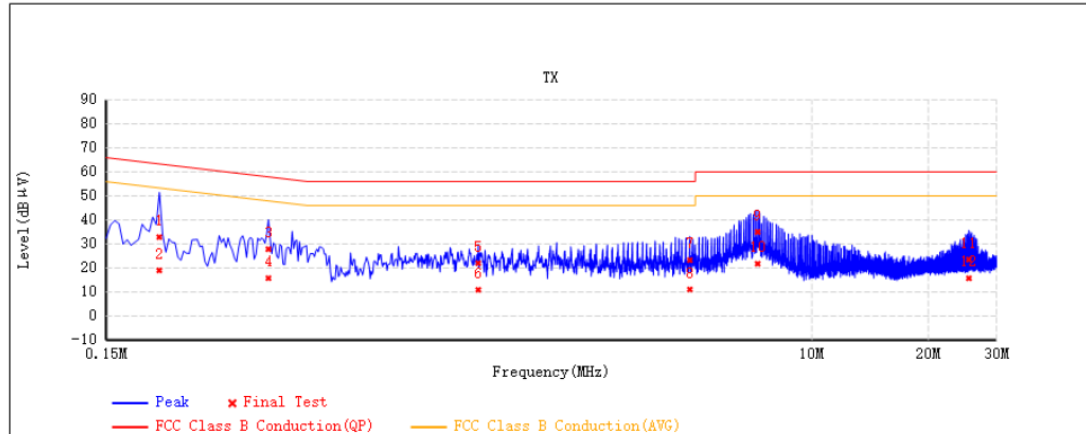


Suspected Note List									
	NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content
	1	0.2058	22.5	10.44	32.94	63.37	-30.43	QP	
	2	0.2058	8.62	10.44	19.06	53.37	-34.32	AVG	
	3	0.3942	17.41	10.49	27.9	57.98	-30.07	QP	
	4	0.3942	5.34	10.49	15.83	47.98	-32.15	AVG	
	5	1.3738	11.47	10.62	22.08	56	-33.92	QP	
	6	1.3738	0.37	10.62	10.98	46	-35.02	AVG	
	7	4.8379	12.14	11.17	23.31	56	-32.69	QP	
	8	4.8379	-0.02	11.17	11.15	46	-34.85	AVG	
*	9	7.2424	23.73	11.34	35.07	60	-24.93	QP	
	10	7.2424	10.51	11.34	21.85	50	-28.15	AVG	
	11	25.4579	8.19	15.39	23.58	60	-36.42	QP	
	12	25.4579	0.4	15.39	15.79	50	-34.21	AVG	

REMARKS:

- (1) Level = Reading + Factor.
- (2) Margin = Level - Limit.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX BE(EHT160) Mode Channel 79	Polarization	Ant 0°
-----------	-------------------------------	--------------	--------

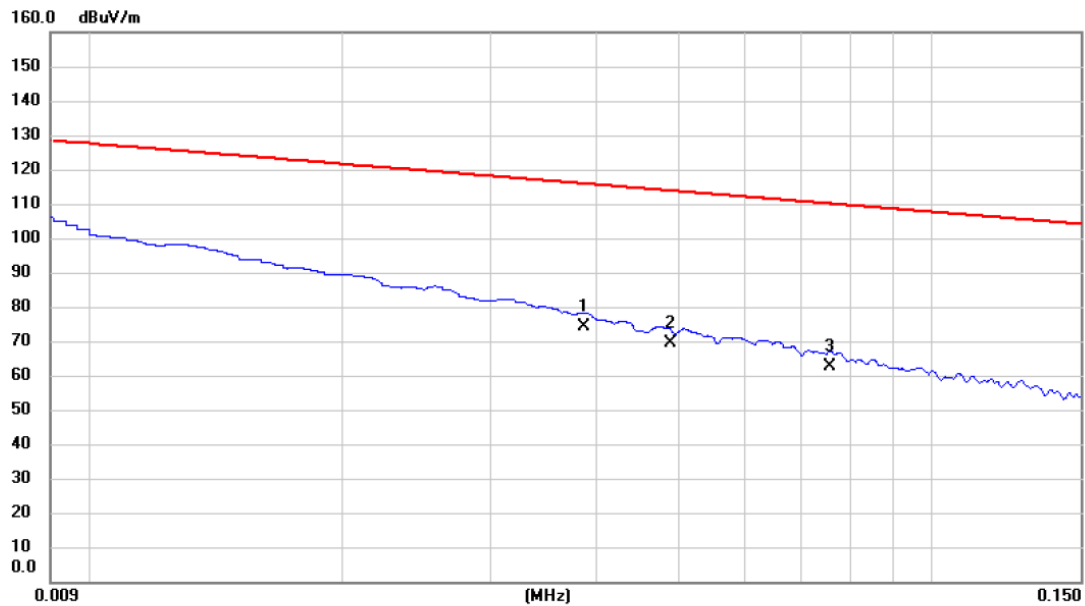


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.039	54.20	20.14	74.34	115.87	-41.53	AVG	
2		0.049	49.28	20.14	69.42	113.80	-44.38	AVG	
3		0.076	42.33	20.14	62.47	110.02	-47.55	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 79	Polarization	Ant 0°
-----------	-------------------------------	--------------	--------

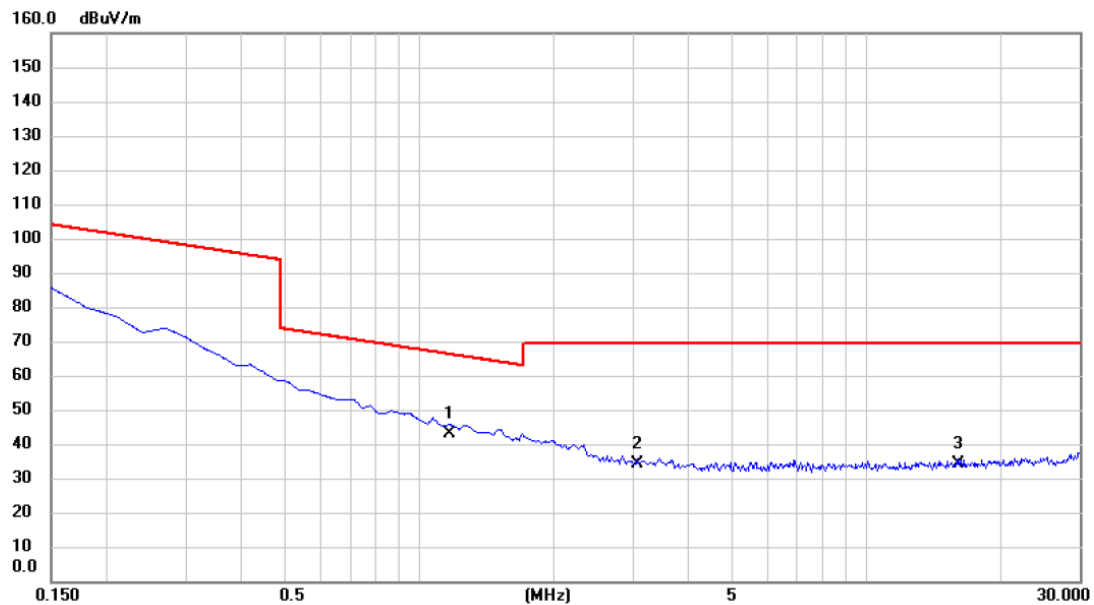


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	1.165	23.14	20.00	43.14	66.28	-23.14	QP	
2	3.075	13.94	20.07	34.01	69.54	-35.53	QP	
3	16.000	13.42	20.62	34.04	69.54	-35.50	QP	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 79	Polarization	Ant 90°
-----------	-------------------------------	--------------	---------

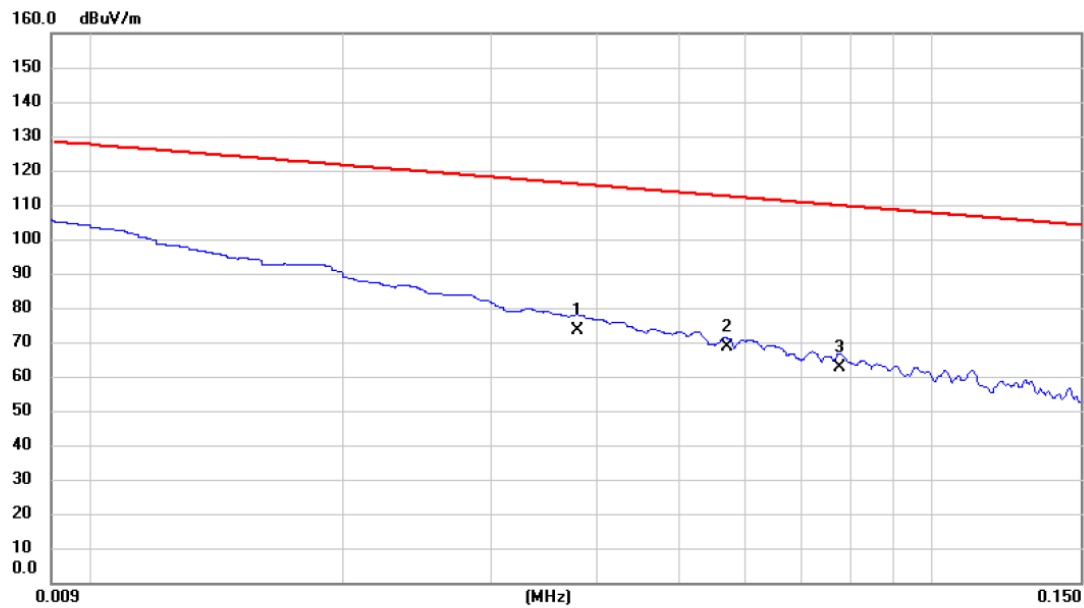


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.038	53.26	20.14	73.40	116.01	-42.61	AVG	
2		0.057	48.51	20.14	68.65	112.49	-43.84	AVG	
3		0.078	42.31	20.14	62.45	109.80	-47.35	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 79	Polarization	Ant 90°
-----------	-------------------------------	--------------	---------

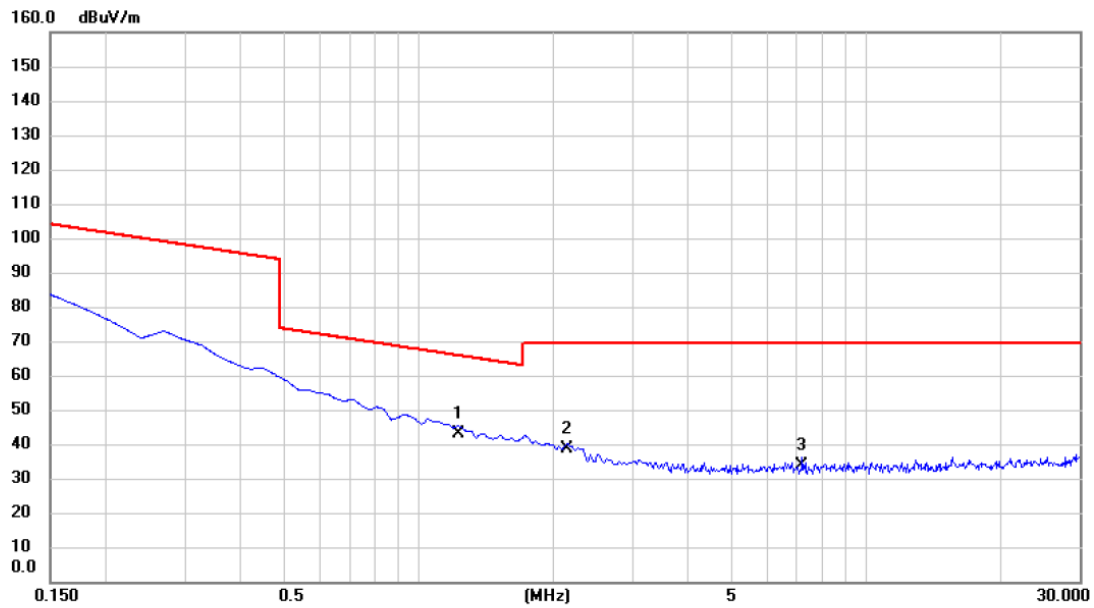

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	1.224	23.14	20.00	43.14	65.85	-22.71	QP	
2	2.150	18.54	20.02	38.56	69.54	-30.98	QP	
3	7.195	13.65	20.30	33.95	69.54	-35.59	QP	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX BE(EHT160) Mode Channel 79	Polarization	Vertical
-----------	-------------------------------	--------------	----------

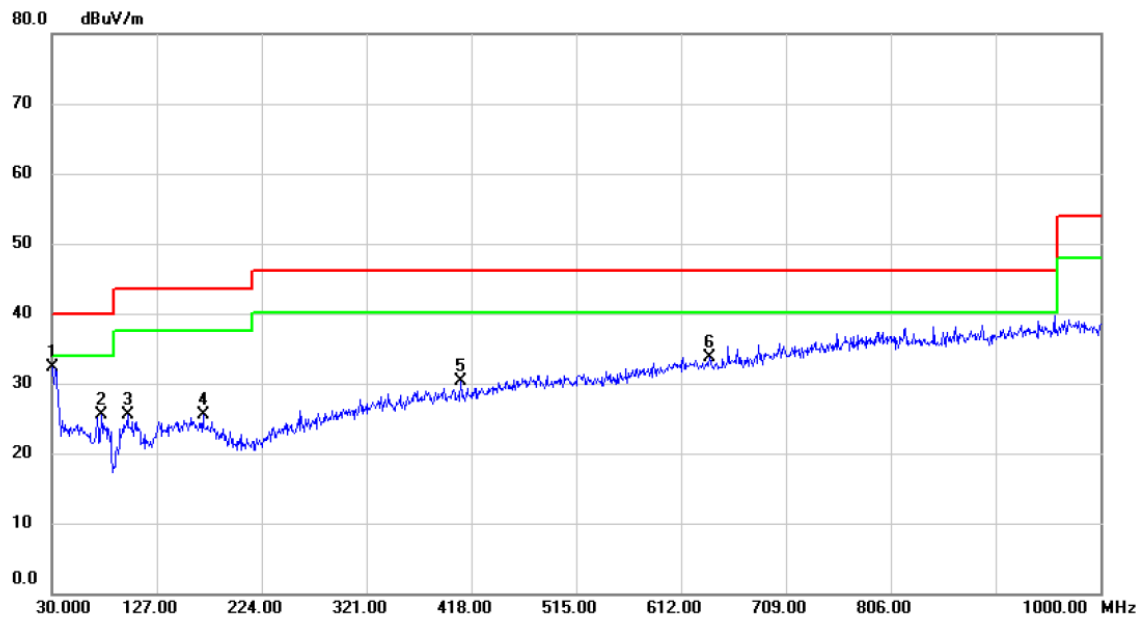


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.000	43.77	-11.44	32.33	40.00	-7.67	peak	
2	75.590	39.66	-14.25	25.41	40.00	-14.59	peak	
3	99.840	40.82	-15.41	25.41	43.52	-18.11	peak	
4	169.680	36.35	-10.87	25.48	43.52	-18.04	peak	
5	408.300	37.71	-7.37	30.34	46.02	-15.68	peak	
6	638.190	36.74	-2.98	33.76	46.02	-12.26	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 79	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

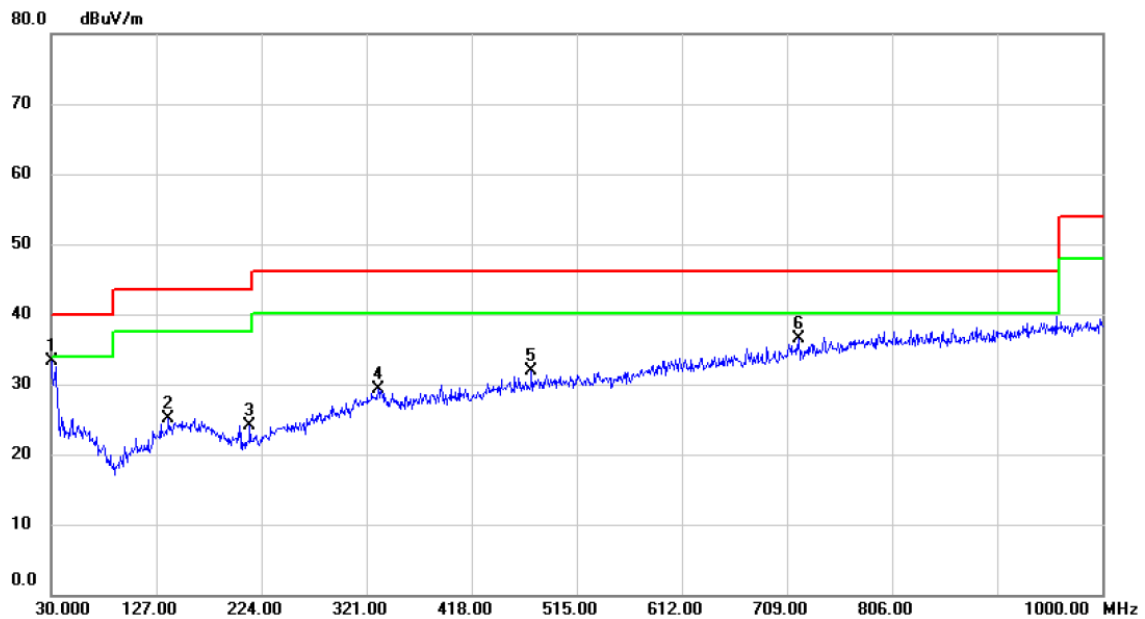

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.000	44.70	-11.44	33.26	40.00	-6.74	peak	
2	138.640	36.50	-11.35	25.15	43.52	-18.37	peak	
3	213.330	38.00	-13.81	24.19	43.52	-19.33	peak	
4	331.670	38.24	-8.88	29.36	46.02	-16.66	peak	
5	473.290	37.73	-5.74	31.99	46.02	-14.03	peak	
6	719.670	38.08	-1.59	36.49	46.02	-9.53	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	TX BE(EHT160) Mode Channel 79	Polarization	Vertical
-----------	-------------------------------	--------------	----------

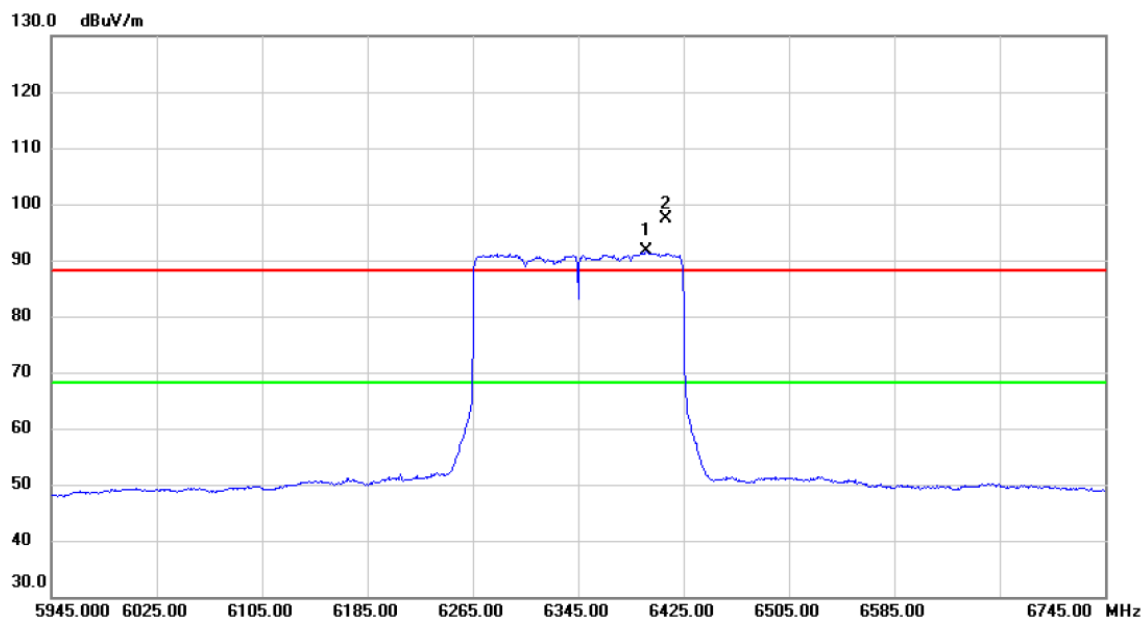


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	6397.000	73.41	18.12	91.53	68.20	23.33	AVG	No Limit
2	X	6411.400	79.22	18.13	97.35	88.20	9.15	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 79	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

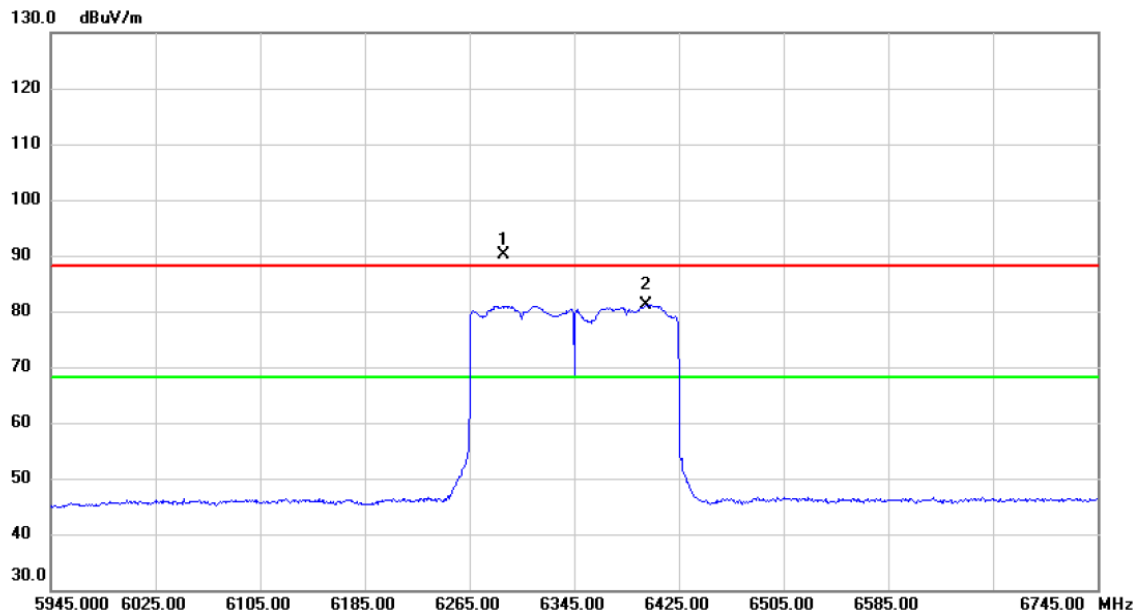


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6291.400	72.06	17.99	90.05	88.20	1.85	peak	No Limit
2	*	6400.200	63.12	18.12	81.24	68.20	13.04	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 79	Polarization	Vertical
-----------	-------------------------------	--------------	----------

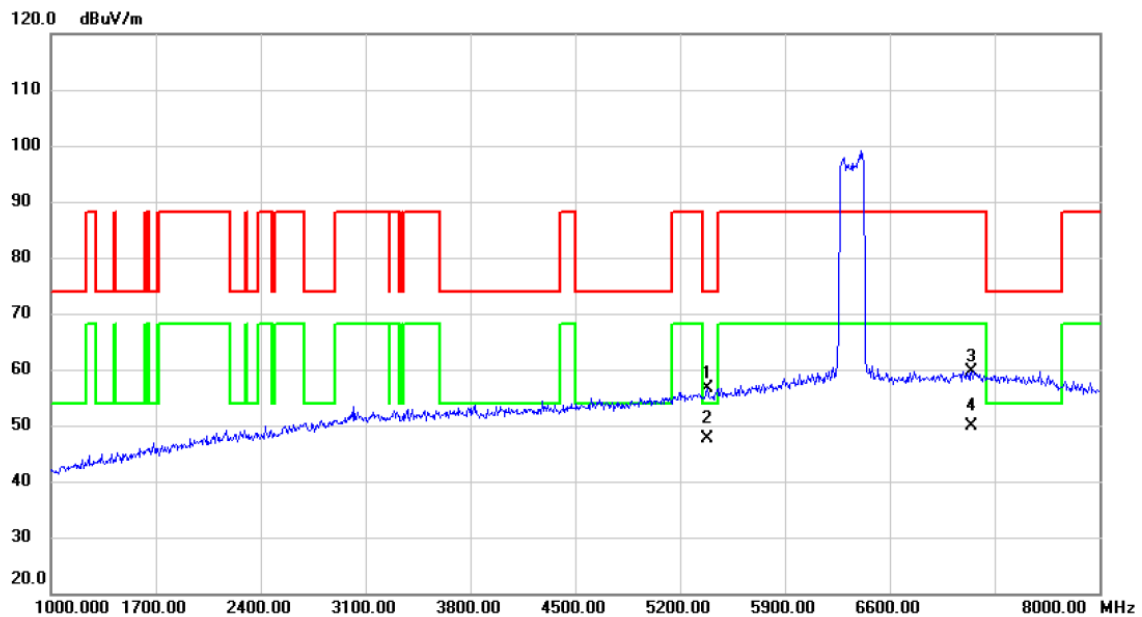


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5382.000	41.00	15.59	56.59	74.00	-17.41	peak	
2 *	5382.000	32.15	15.59	47.74	54.00	-6.26	AVG	
3	7146.000	40.00	19.68	59.68	88.20	-28.52	peak	
4	7146.000	30.14	19.68	49.82	68.20	-18.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 79	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

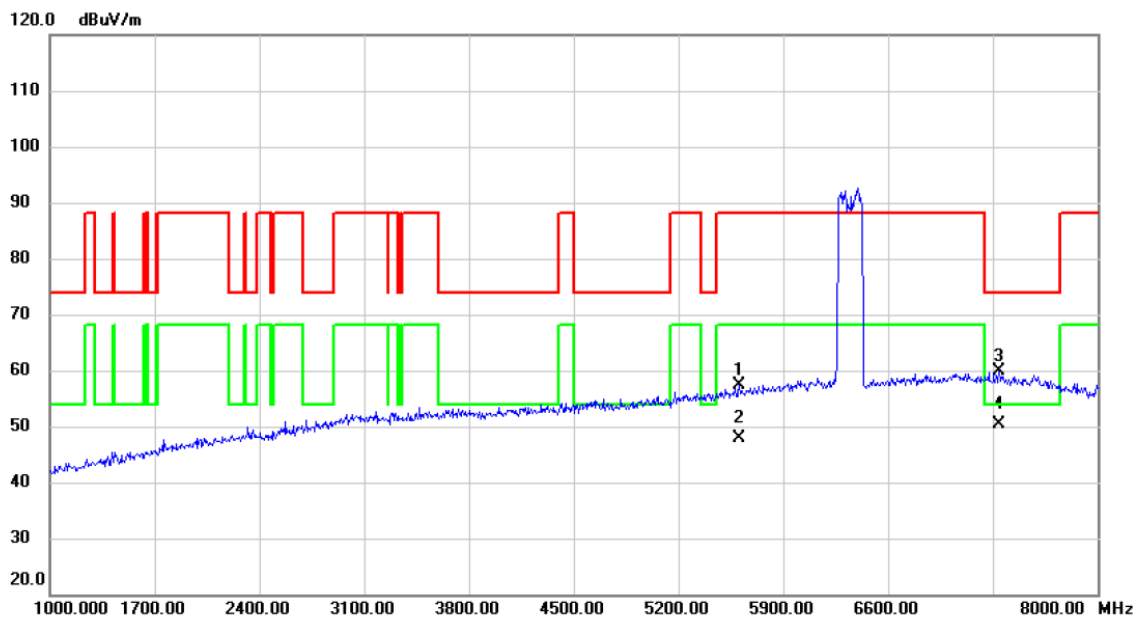


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5606.000	41.22	16.27	57.49	88.20	-30.71	peak	
2	5606.000	31.69	16.27	47.96	68.20	-20.24	AVG	
3	7342.000	40.26	19.52	59.78	74.00	-14.22	peak	
4 *	7342.000	30.84	19.52	50.36	54.00	-3.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 79	Polarization	Vertical
-----------	-------------------------------	--------------	----------

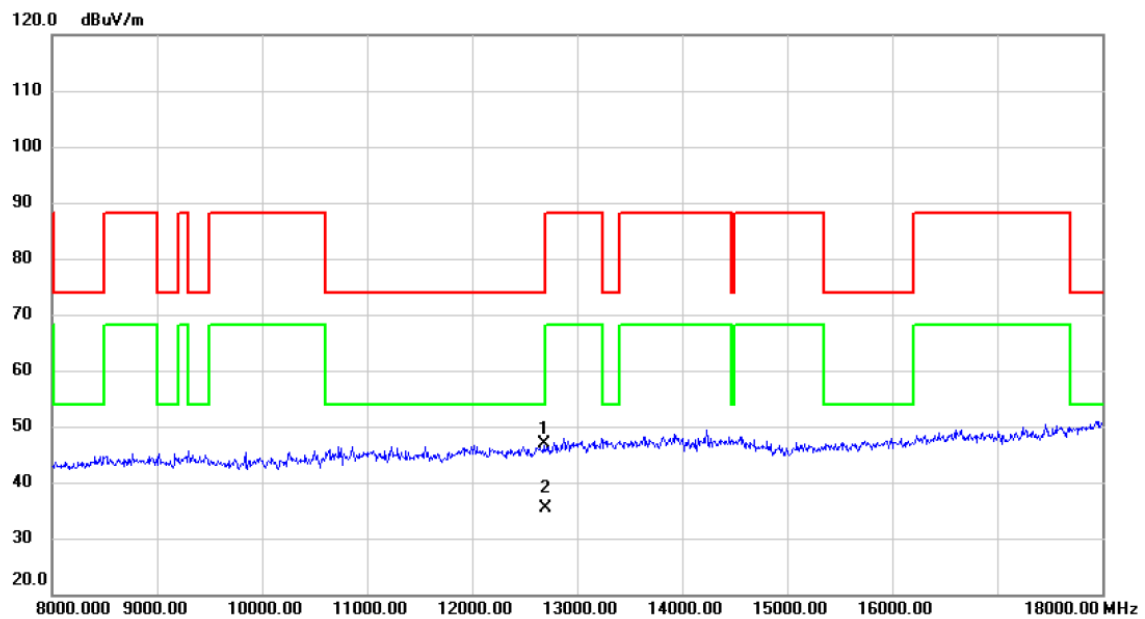


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	12692.680	36.55	10.22	46.77	74.00	-27.23	peak	
2 *	12697.580	25.25	10.23	35.48	54.00	-18.52	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 79	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

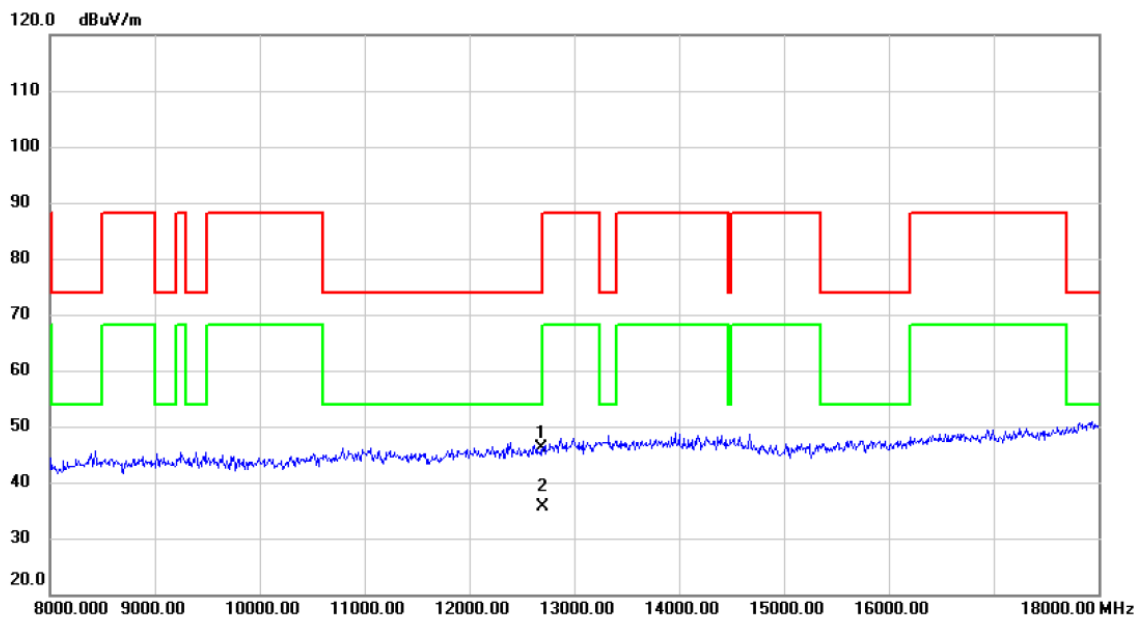


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	12692.400	36.01	10.22	46.23	74.00	-27.77	peak	
2 *	12698.760	25.50	10.23	35.73	54.00	-18.27	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 79	Polarization	Vertical
-----------	-------------------------------	--------------	----------

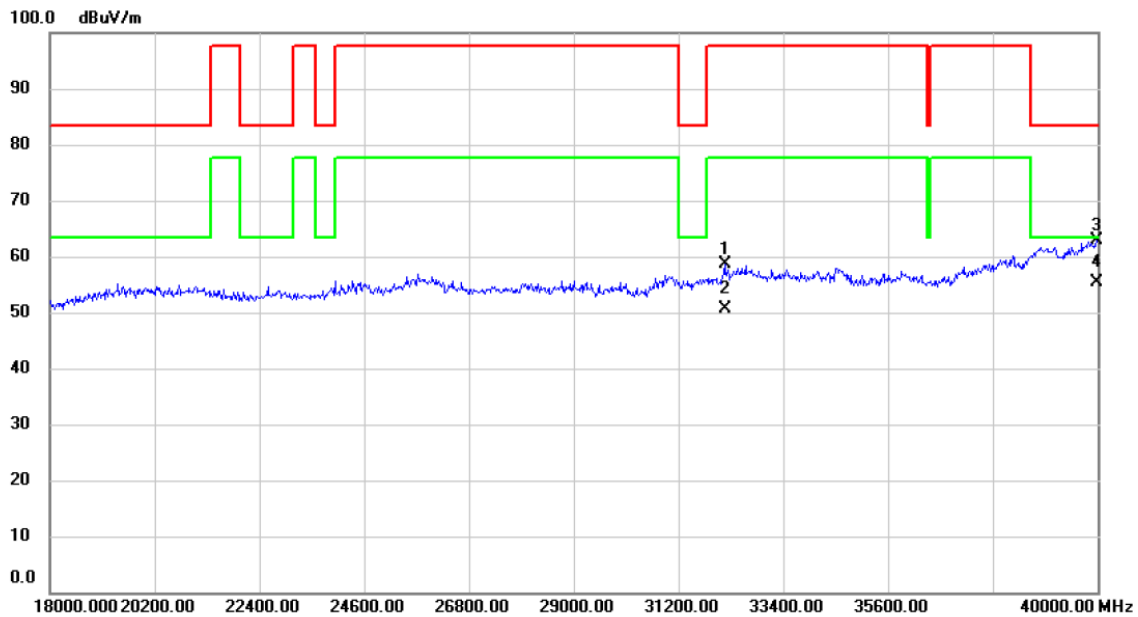


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	32168.000	51.26	7.40	58.66	97.70	-39.04	peak	
2	32168.000	43.25	7.40	50.65	77.70	-27.05	AVG	
3	39978.000	49.99	12.78	62.77	83.50	-20.73	peak	
4 *	39978.000	42.61	12.78	55.39	63.50	-8.11	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 79	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

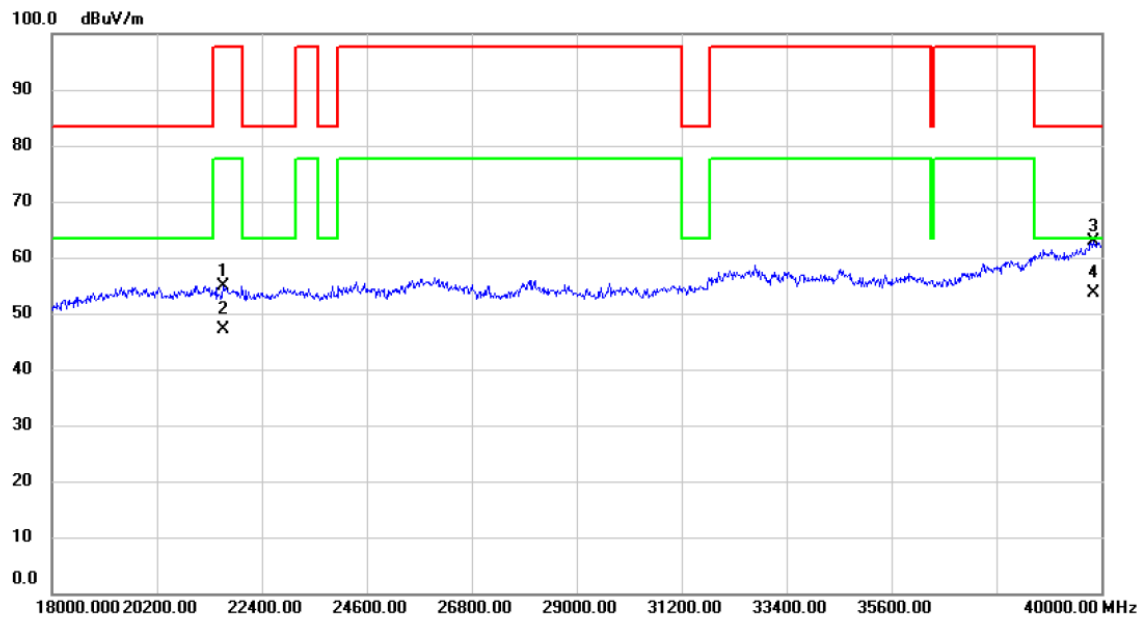

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	21586.000	51.09	3.83	54.92	97.70	-42.78	peak	
2	21586.000	43.25	3.83	47.08	77.70	-30.62	AVG	
3	39824.000	50.44	12.43	62.87	83.50	-20.63	peak	
4 *	39824.000	41.26	12.43	53.69	63.50	-9.81	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

End of Test Report