



FCC TEST REPORT

According to

FCC Rules and Regulations Part 15 Subpart C

Applicant	: Razer Inc.
Address	: 2035 Corte Del Nogal, Suite 101, Carlsbad California 92011
Equipment	: Wireless SmartBand
Model No.	: RZ15-0118
FCC ID	: RWO-RZ150118
Trade Name	: Razer

- The test result refers exclusively to the test presented test model / sample.,
- Without written approval of **CerpPASS Technology Corp.**, the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



Contents

1. Report of Measurements and Examinations	6
1.1 List of Measurements and Examinations	6
2. Test Configuration of Equipment under Test	7
2.1 Feature of Equipment under Test	7
2.2 Carrier Frequency of Channels	7
2.3 Test Mode and Test Software	7
2.4 General Information of Test	8
2.5 Measurement Uncertainty	8
3. Antenna Requirements	9
3.1 Standard Applicable	9
3.2 Antenna Construction and Directional Gain	9
4. Test of Conducted Emission	10
4.1 Test Limit	10
4.2 Test Procedures	10
4.3 Test Result and Data	10
5. Test of Radiated Emission	11
5.1 Test Limit	11
5.2 Test Procedures	11
5.3 Typical Test Setup	12
5.4 Measurement Equipment	12
5.5 Test Result and Data (9kHz ~ 30MHz)	12
5.6 Test Result and Data (30MHz ~ 1GHz)	13
5.7 Test Result and Data (1GHz ~ 25GHz)	15
6. 6dB Bandwidth Measurement Data	21
6.1 Test Limit	21
6.2 Test Procedures	21
6.3 Test Setup Layout	21
6.4 Measurement Equipment	21
6.5 Test Result and Data	21
7. Maximum Peak and Average Output Power	24
7.1 Test Limit	24
7.2 Test Procedures	24
7.3 Test Setup Layout	24
7.4 Measurement Equipment	24
7.5 Test Result and Data	24
8. Power Spectral Density	25
8.1 Test Limit	25
8.2 Test Procedures	25
8.3 Test Setup Layout	25
8.4 Measurement Equipment	25
8.5 Test Result and Data	25
9. Band Edges Measurement	28
9.1 Test Limit	28



9.2	Test Procedure	28
9.3	Test Setup Layout	28
9.4	Measurement Equipment.....	28
9.5	Test Result and Data.....	28
9.6	Restrict Band Emission Measurement Data	31
10.	Restricted Bands of Operation	32
10.1	Labeling Requirement	32
Appendix A. Test Setup Photograph.....		A1 ~ A2
Appendix B. External Photographs of EUT.....		B1 ~ B2
Appendix C. Internal Photographs of EUT.....		C1 ~ C4



History of this test report

☒ ORIGINAL.

☐ Additional attachment as following record:

Attachment No.	Issue Date	Description
TEFQ1402176	May 21, 2014	Original.



CERTIFICATE OF COMPLIANCE

According to

FCC Rules and Regulations Part 15 Subpart C

Applicant	: Razer Inc.
Address	: 2035 Corte Del Nogal, Suite 101, Carlsbad California 92011
Equipment	: Wireless SmartBand
Model No.	: RZ15-0118
FCC ID	: RWO-RZ150118

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 2009, KDB558074 & KDB662911**. The equipment was ***passed*** the test performed according to **FCC Rules and Regulations Part 15 Subpart C (2010)**.

The test was carried out on May 19, 2014 at Cerpass Technology Corp.

Approved by:

Tested by:

Hill Chen
EMC/ RF B.U. Assistant Manager

Aiden Lu
Engineer



1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	Pass
15.207	Conducted Emission	Pass
15.209 15.247(d)	Radiated Emission	Pass
15.247(a)(2)	6dB Bandwidth	Pass
15.247(b)	Maximum Peak Output Power	Pass
15.247(d)	100kHz Bandwidth of Frequency Band Edges	Pass
15.247(e)	Power Spectral Density	Pass
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	Pass



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Frequency Range	2402-2480 MHz
Type of Modulation	GFSK (Bluetooth low energy)
Channel of Bandwidth	2MHz
Type of Antenna	Chip Antenna
Antenna Gain	2.2 dBi
Rating Input	Battery(5V, 170mA)

2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454	--	--
13	2428	27	2456	--	--

2.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- The following test mode was performed for RF test:
 - GFSK: CH 00: 2402MHz, CH 19: 2440MHz, CH 39: 2480MHz.



2.4 General Information of Test

Test Site :	Cerpass Technology Corp. 2F-11, No. 3, Yuan Qu St., (Nankang Software Park), Taipei, Taiwan 115, R.O.C.
Test Site Location (OATS2-SD) :	No.68-1, Shihbachongsi, Shihding Township, Taipei City 223, Taiwan, R.O.C.
FCC Registration Number:	TW1049, TW1061, 390316, 488071
IC Registration Number :	4934B-1, 4934D-1
VCCI Registration Number:	T-1173 for Telecommunication Test C-4139 for Conducted emission test R-3428 for Radiated emission test G-97 for Radiated emission test above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25000MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.
Laboratory Accreditation :	 NVLAP LAB CODE: 200954-0

2.5 Measurement Uncertainty

Measurement Item	Uncertainty
Radiated emission	$\pm 4.11\text{dB}$
Peak Output Power(conducted)	$\pm 1.38\text{dB}$
Peak Output Power(Radiated)	$\pm 1.70\text{dB}$
Power Spectral Density	$\pm 1.39\text{dB}$
Radiated emission(3m)	$\pm 4.11\text{dB}$
Radiated emission(10m)	$\pm 3.89\text{dB}$



3. Antenna Requirements

3.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2 Antenna Construction and Directional Gain

Antenna Type: Chip Antenna

Antenna Gain: 2.2 dBi



4. Test of Conducted Emission

4.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2009 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

*Decreases with the logarithm of the frequency.

4.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

4.3 Test Result and Data

The EUT is powered from battery. This test item is not applicable.



5. Test of Radiated Emission

5.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


5.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




5.3 Typical Test Setup

For radiated emissions below 30MHz

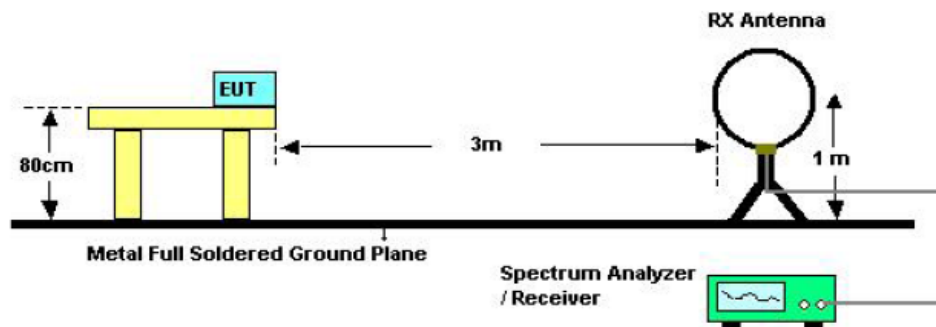

For radiated emissions above 30MHz

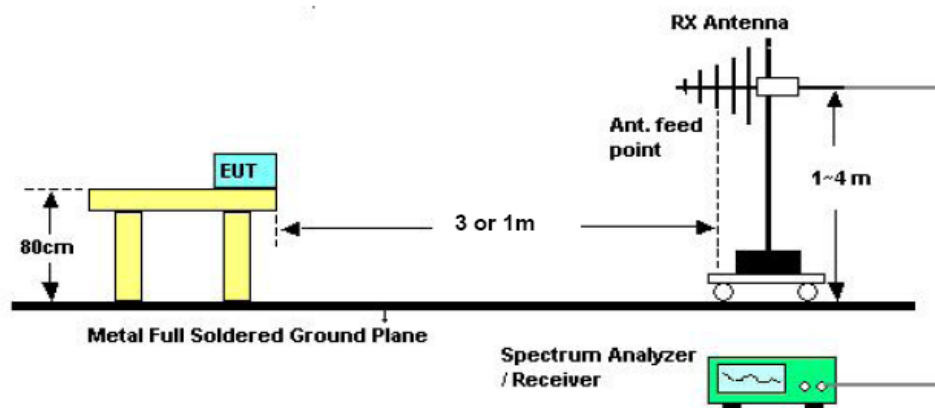

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

5.4 Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB 9168	275	2013/10/01	2014/09/30
Amplifier	QuieTek	AP/0100A	CHM0906075	2013/09/30	2014/09/29
SPECTRUM ANALYZER	R&S	FSP40	100219	2013/09/14	2014/09/13
HORN ANTENNA	EMCO	3115	31601	2013/09/18	2014/09/17
PREAMPLIFIER	MITEQ	AMF-7D-001018 00-30-10P	1835099	2013/12/10	2014/12/09


5.5 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.



5.6 Test Result and Data (30MHz ~ 1GHz)


Power	: DC 5V	Pol/Phase	: VERTICAL
Test Mode	: Transmit	Temperature	: 23 °C
Operation Channel	: 0	Humidity	: 55 %
Modulation Type	: GFSK (1 Mbps)	Atmospheric Pressure	: 989 hPa
Test Date	: May 19, 2014	Memo	:

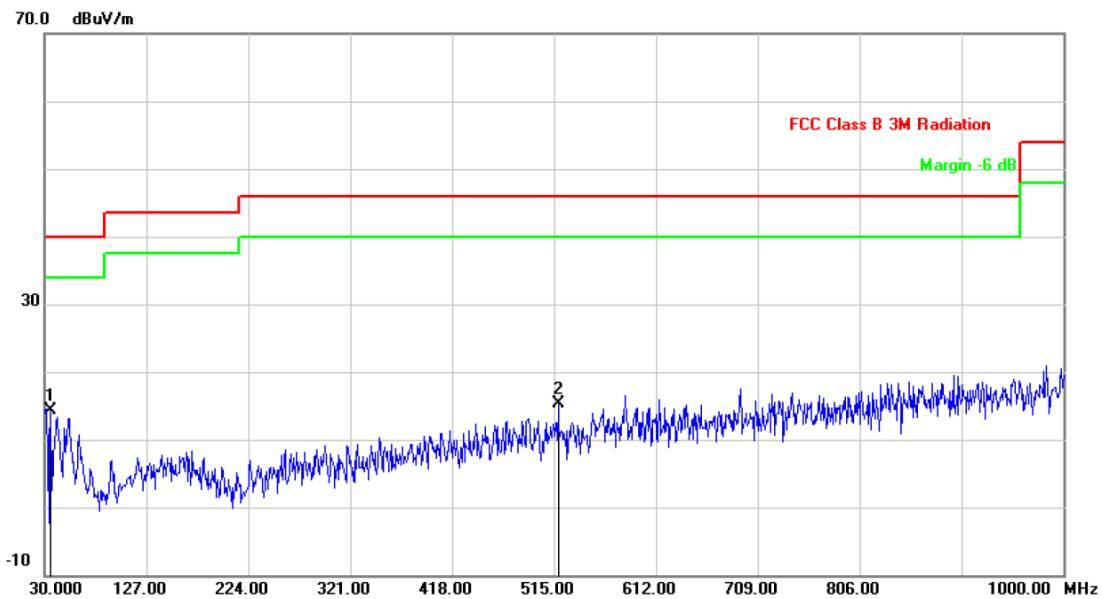

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	35.8200	-18.34	32.66	14.32	40.00	-25.68	peak	100	172
2	518.8800	-12.37	27.60	15.23	46.00	-30.77	peak	100	172



Power	: DC 5V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit	Temperature	: 23 °C
Operation Channel	: 0	Humidity	: 55 %
Modulation Type	: GFSK (1 Mbps)	Atmospheric Pressure	: 989 hPa
Test Date	: May 19, 2014	Memo	:

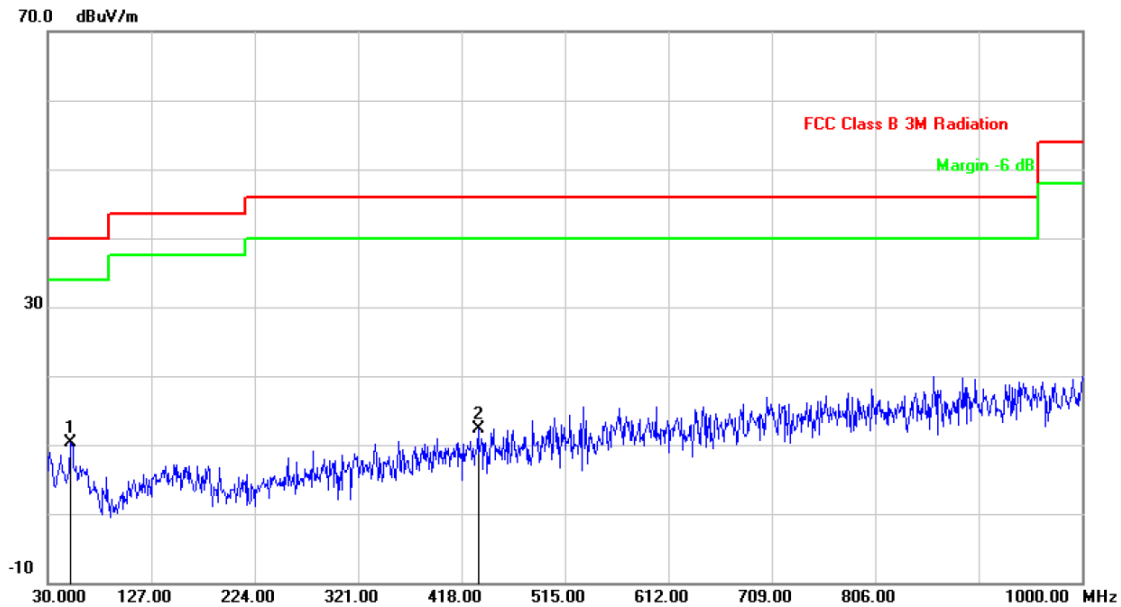


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	51.3400	-18.07	28.47	10.40	40.00	-29.60	peak	100	208
2	433.5200	-14.09	26.47	12.38	46.00	-33.62	peak	100	208



5.7 Test Result and Data (1GHz ~ 25GHz)

Power	: DC 5V	Pol/Phase	: VERTICAL
Test Mode	: Transmit	Temperature	: 23 °C
Operation Channel	: 0	Humidity	: 53 %
Modulation Type	: GFSK (1 Mbps)	Atmospheric Pressure	: 1023 hPa

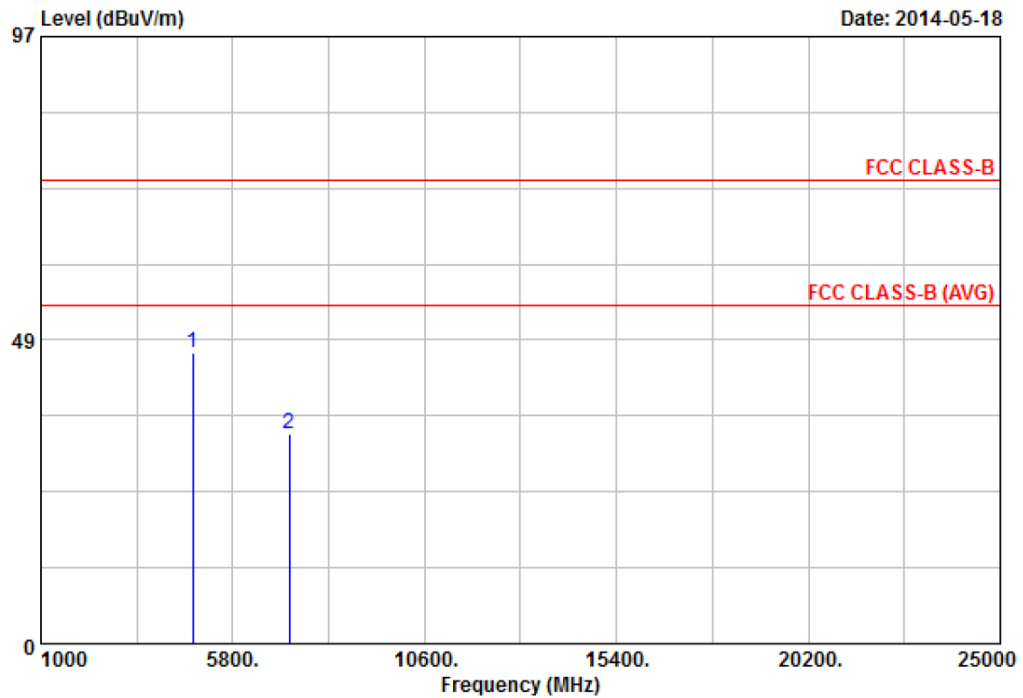


Item	Freq	Read Value	factor	result	limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4804.00	36.97	9.42	46.39	74.00	-27.61	Peak	100	173
2	7206.00	21.90	11.52	33.42	74.00	-40.58	Peak	100	173

Remarks: 1. Result = Read Value + Factor

2. Factor = Antenna factor + Cable loss - Amplifier factor



Power	: DC 5V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit	Temperature	: 23 °C
Operation Channel	: 0	Humidity	: 53 %
Modulation Type	: GFSK (1 Mbps)	Atmospheric Pressure	: 1023 hPa

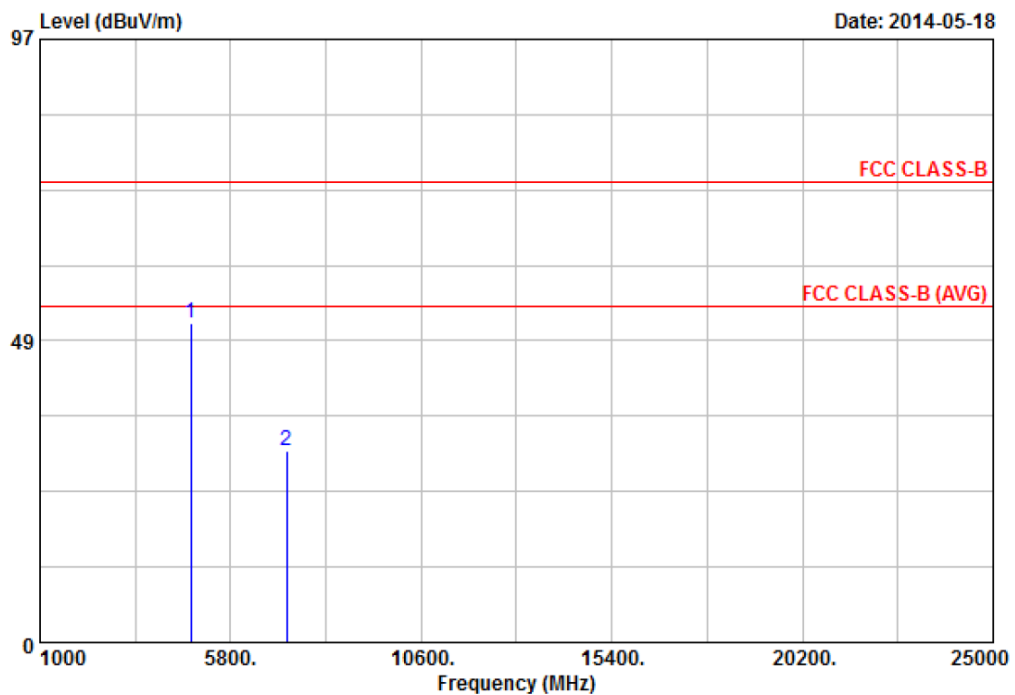


Item	Freq	Read Value	facter	result	limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4804.00	41.99	9.42	51.41	74.00	-22.59	Peak	100	205
2	7206.00	19.32	11.52	30.84	74.00	-43.16	Peak	100	205

Remarks: 1. Result = Read Value + Factor

2. Factor = Antenna factor + Cable loss - Amplifier factor



Power	: DC 5V	Pol/Phase	: VERTICAL
Test Mode	: Transmit	Temperature	: 23 °C
Operation Channel	: 19	Humidity	: 53 %
Modulation Type	: GFSK (1 Mbps)	Atmospheric Pressure	: 1023 hPa

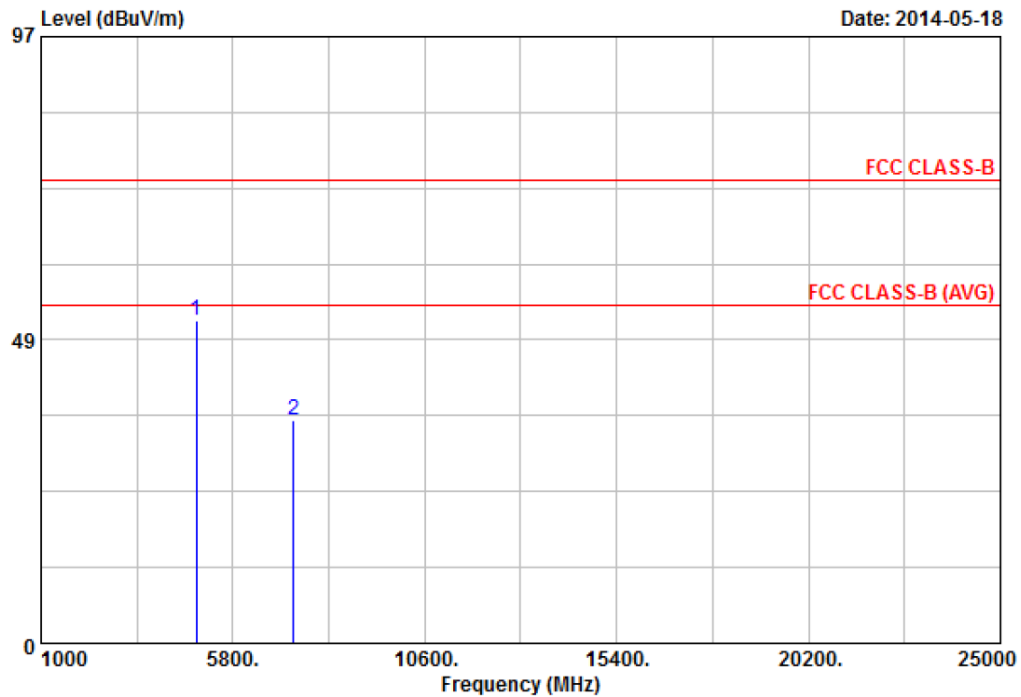


Item	Freq	Read Value	factor	result	limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4880.00	42.24	9.50	51.74	74.00	-22.26	Peak	100	172
2	7320.00	24.03	11.69	35.72	74.00	-38.28	Peak	100	172

Remarks: 1. Result = Read Value + Factor

2. Factor = Antenna factor + Cable loss - Amplifier factor



Power	: DC 5V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit	Temperature	: 23 °C
Operation Channel	: 19	Humidity	: 53 %
Modulation Type	: GFSK (1 Mbps)	Atmospheric Pressure	: 1023 hPa

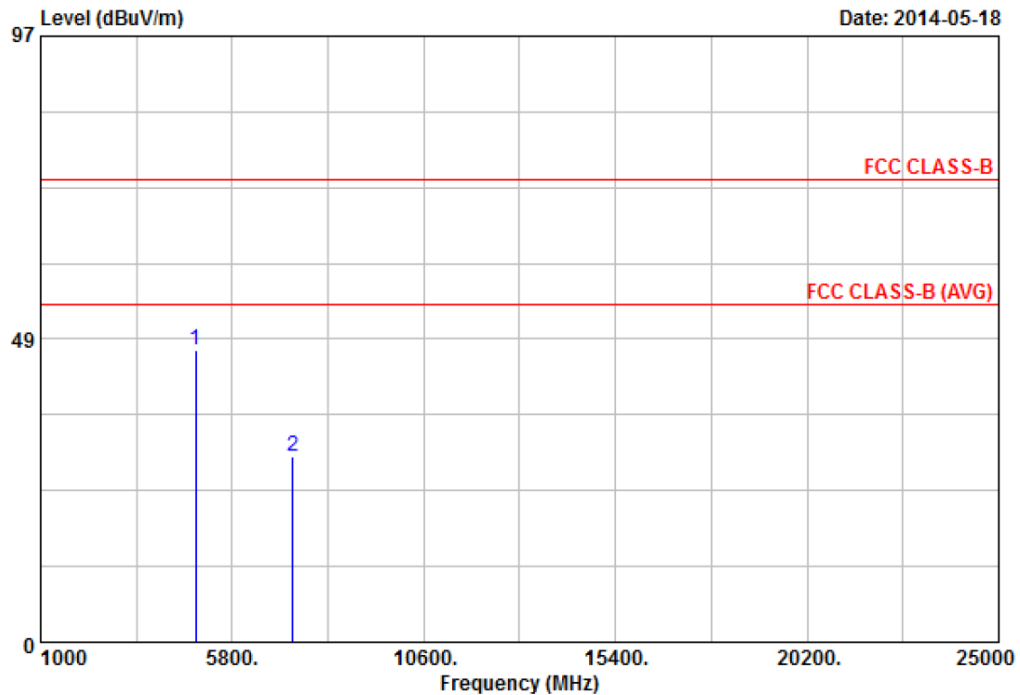


Item	Freq	Read Value	facter	result	limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4880.00	37.24	9.50	46.74	74.00	-27.26	Peak	100	193
2	7320.00	18.08	11.69	29.77	74.00	-44.23	Peak	100	193

Remarks: 1. Result = Read Value + Factor

2. Factor = Antenna factor + Cable loss - Amplifier factor




Power	: DC 5V	Pol/Phase	: VERTICAL
Test Mode	: Transmit	Temperature	: 23 °C
Operation Channel	: 39	Humidity	: 53 %
Modulation Type	: GFSK (1 Mbps)	Atmospheric Pressure	: 1023 hPa

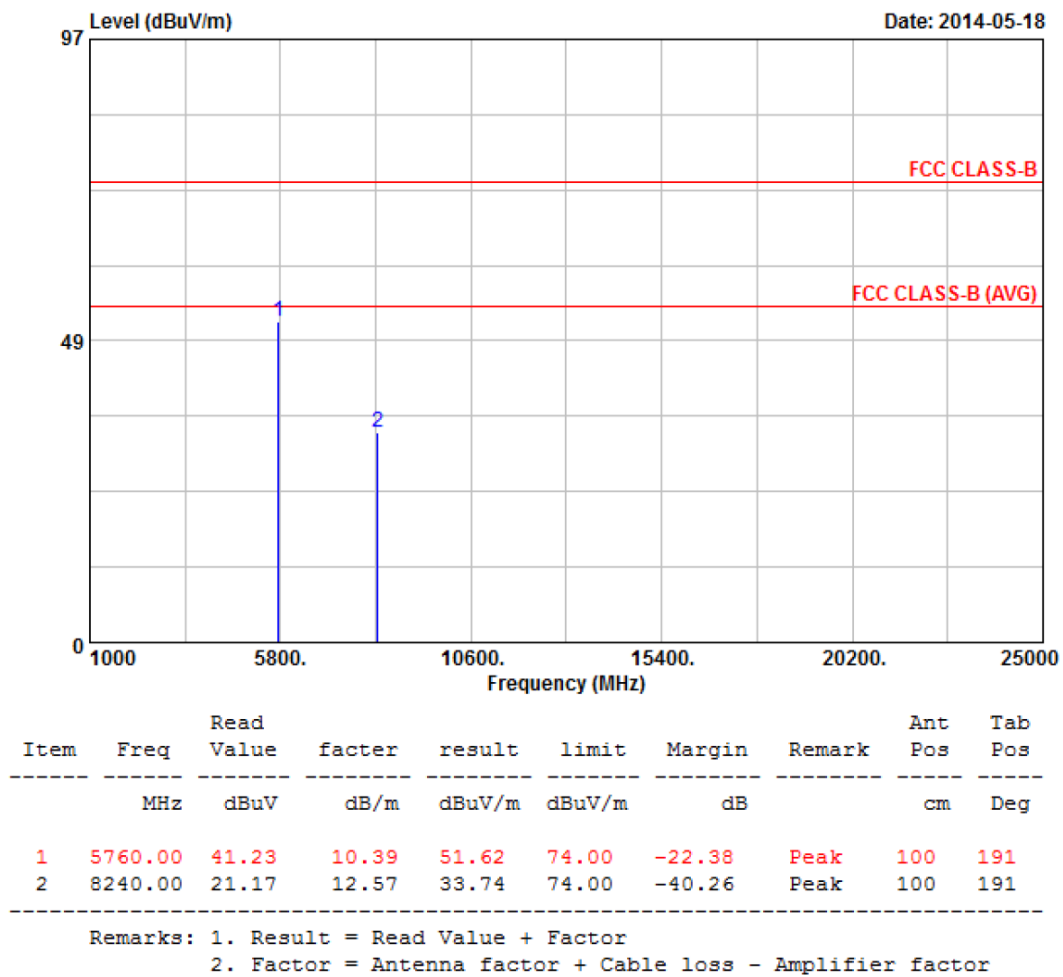



Power	: DC 5V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit	Temperature	: 23 °C
Operation Channel	: 39	Humidity	: 53 %
Modulation Type	: GFSK (1 Mbps)	Atmospheric Pressure	: 1023 hPa

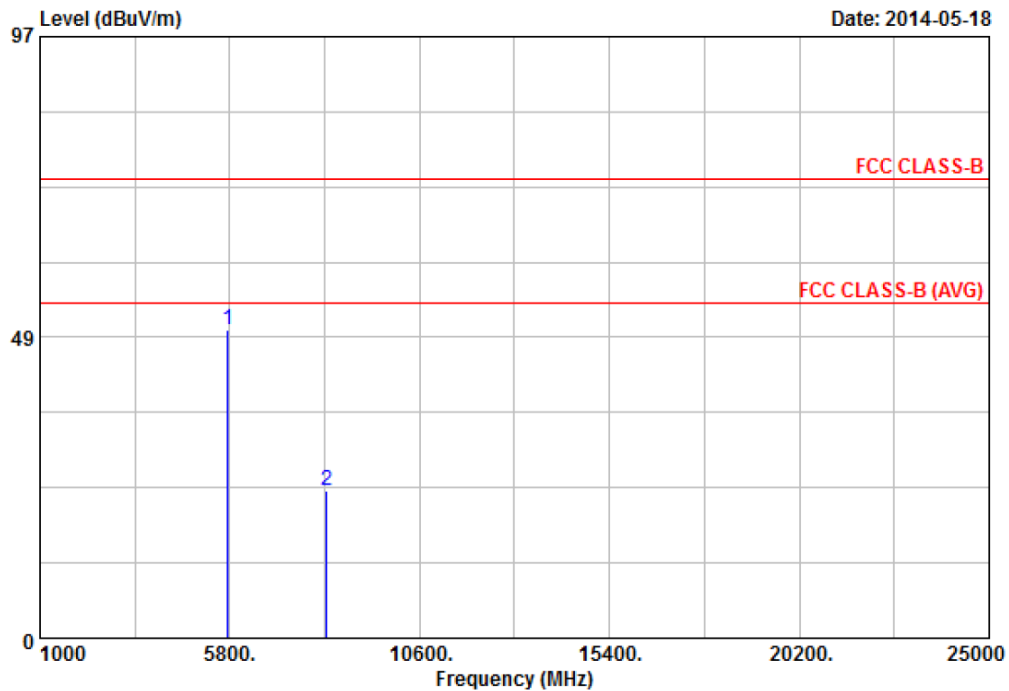

Item	Freq	Read Value	factor	result	limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	5760.00	39.23	10.39	49.62	74.00	-24.38	Peak	100	217
2	8240.00	11.17	12.57	23.74	74.00	-50.26	Peak	100	217

Remarks: 1. Result = Read Value + Factor

2. Factor = Antenna factor + Cable loss - Amplifier factor



6. 6dB Bandwidth Measurement Data


6.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

6.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 1~5% of the emission bandwidth and VBW $\geq 3 \times$ RBW.
- The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- The 6dB Bandwidth was measured and recorded.

6.3 Test Setup Layout



6.4 Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2014/03/27	2015/03/26

6.5 Test Result and Data

Test Date: May 16, 2014

Temperature: 23 °C

Atmospheric pressure: 987 hPa


Humidity: 54 %

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)
GFSK (1Mbps)	00	2402	520
	19	2441	520
	39	2480	520




Modulation Standard: GFSK (1Mbps)

Channel: 00

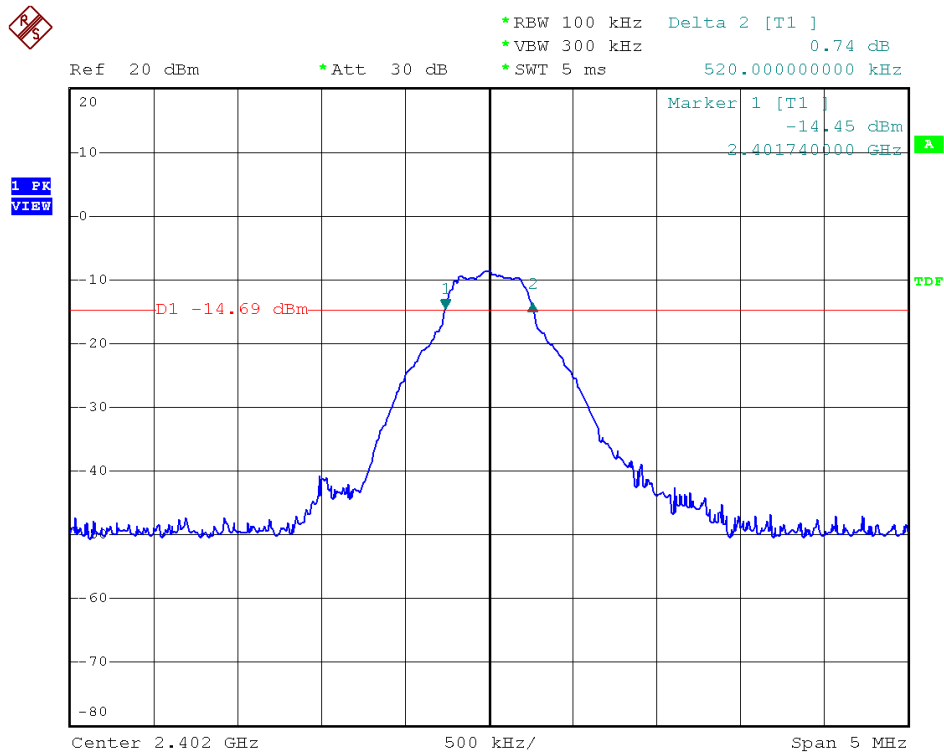


Modulation Standard: GFSK (1Mbps)

Channel: 19

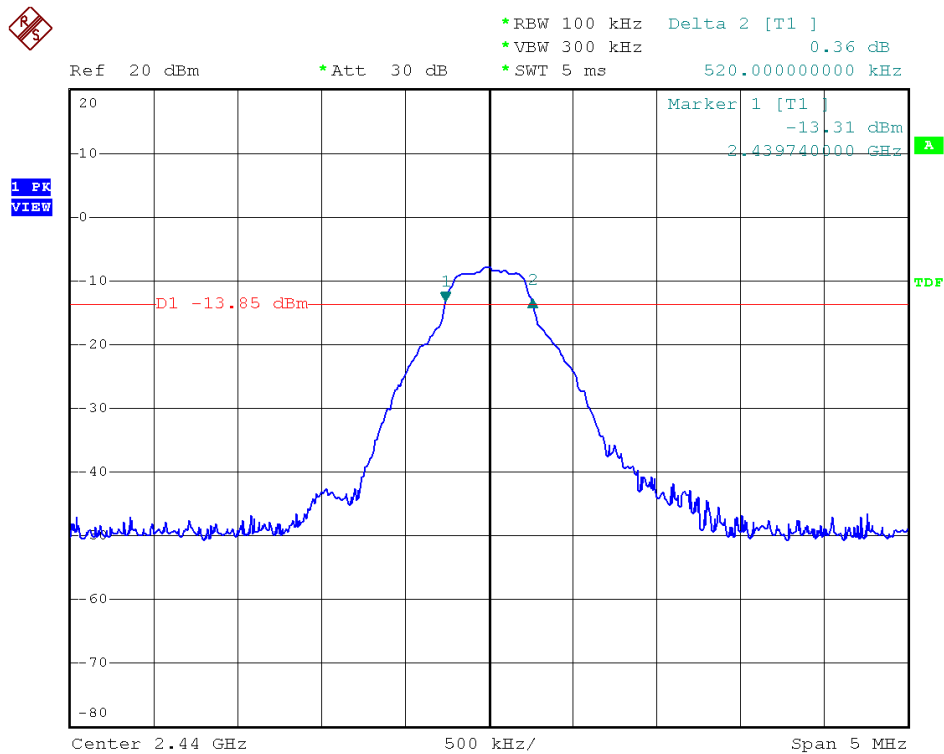



Modulation Standard: GFSK (1Mbps)
Channel: 39

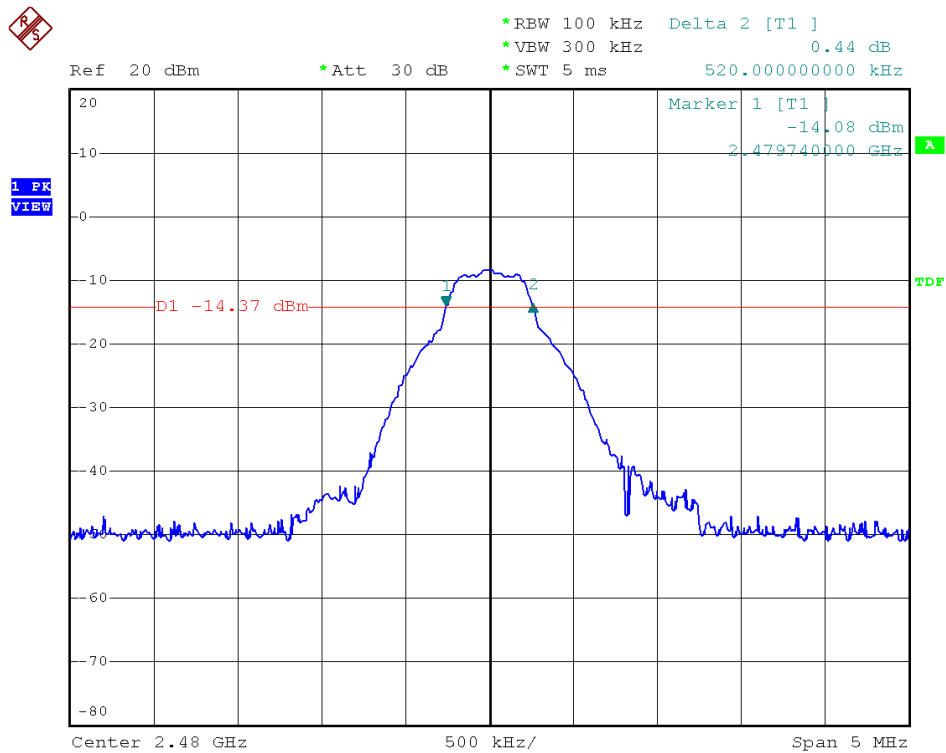



7. Maximum Peak and Average Output Power


7.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

7.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

7.3 Test Setup Layout



7.4 Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2014/03/27	2015/03/26
SERIES POWER METER	ANRITSU	ML2495A	1224005	2014/03/27	2015/03/26
POWER SENSOR	ANRITSU	MA2411B	1207295	2014/03/27	2015/03/26

7.5 Test Result and Data

Test Date: May 19, 2014

Temperature: 23°C

Atmospheric pressure: 989 hPa

Humidity: 55%

Modulation Standard	Channel	Frequency (MHz)	Power Output (dBm)		Power Output (mW)	
			Peak	Avg.	Peak	Avg.
GFSK (1Mbps)	00	2402	-7.82	-9.43	0.165	0.114
	19	2440	-6.95	-8.41	0.202	0.144
	39	2480	-7.56	-9.05	0.175	0.124



8. Power Spectral Density


8.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

8.2 Test Procedures

- The transmitter output was connected to spectrum analyzer.
- The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- The power spectral density was measured and recorded.

8.3 Test Setup Layout



8.4 Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2014/03/27	2015/03/26

8.5 Test Result and Data

Test Date: May 19, 2014

Temperature: 23°C


Atmospheric pressure: 989 hPa

Humidity: 55%


Modulation Standard	Channel	Frequency (MHz)	Maximum Power Density of 3 kHz Bandwidth (dBm)
GFSK (1Mbps)	00	2402	-30.66
	19	2440	-29.71
	39	2480	-29.11



Modulation Standard: GFSK (1Mbps)
Channel: 00

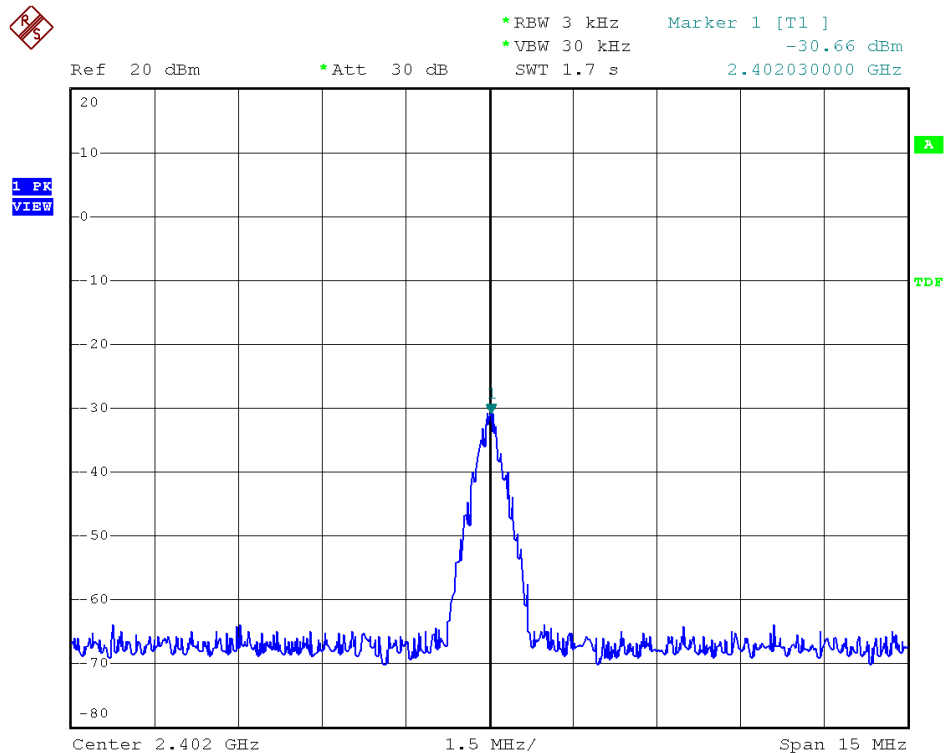


Modulation Standard: GFSK (1Mbps)
Channel: 19

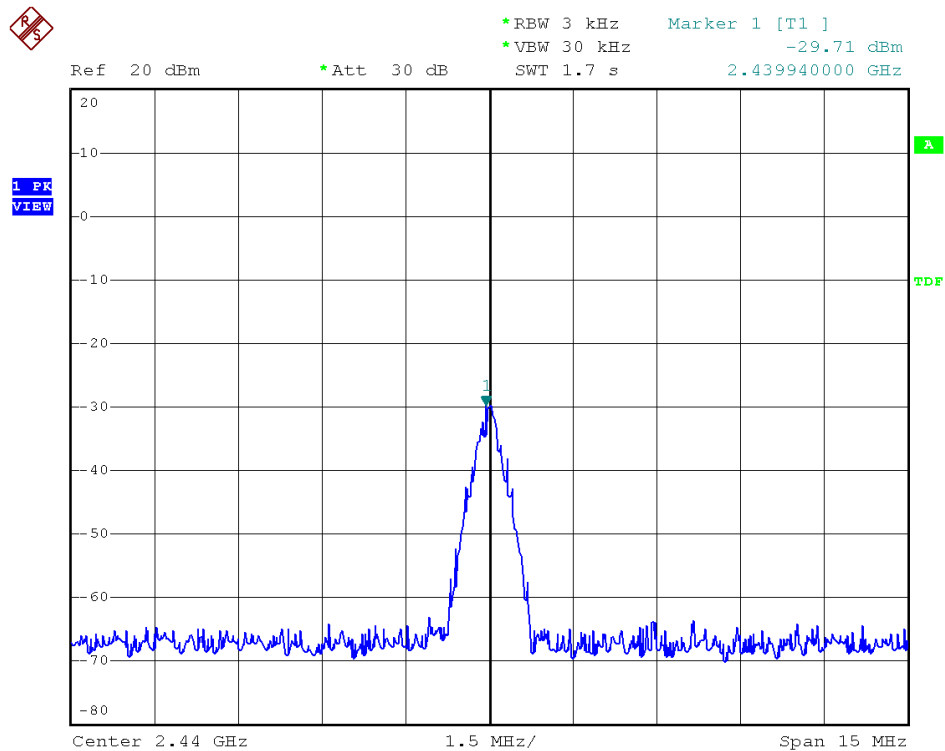



Modulation Standard: GFSK (1Mbps)
Channel: 39

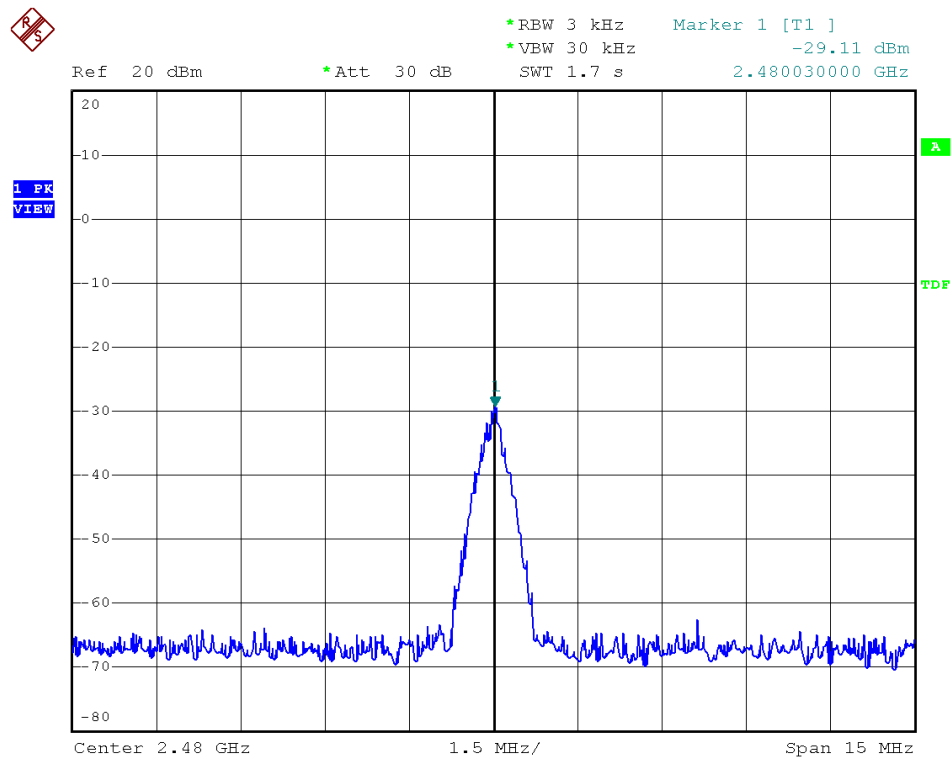



9. Band Edges Measurement


9.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

9.2 Test Procedure

- The transmitter output was connected to the spectrum analyzer via a low lose cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- The band edges was measured and recorded.

9.3 Test Setup Layout



9.4 Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP40	100047	2014/03/27	2015/03/26

9.5 Test Result and Data

Test Date: May 19, 2014

Temperature: 23°C



Atmospheric pressure: 989 hPa

Humidity: 55%

Modulation Standard	Channel	Frequency (MHz)	maximum value in frequency(MHz)	maximum value (dBm)	Limit (dBm)
GFSK (1Mbps)	0	2402	2431.8	-42.34	-28.85
	39	2480	2493.1	-41.82	-27.99





Modulation Standard: GFSK (1Mbps)
Channel: 00

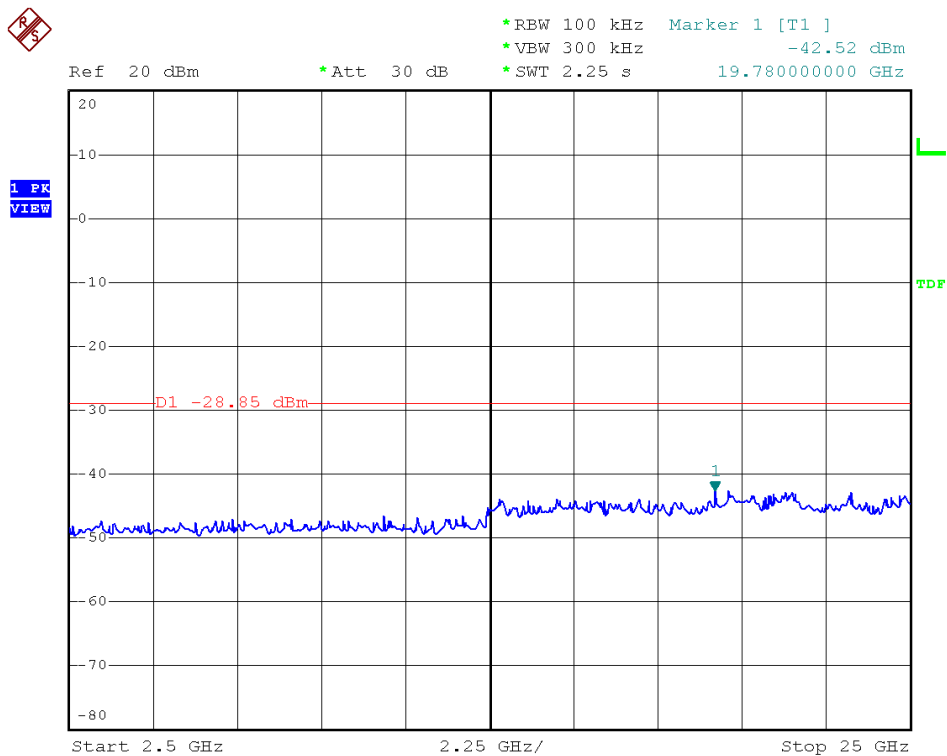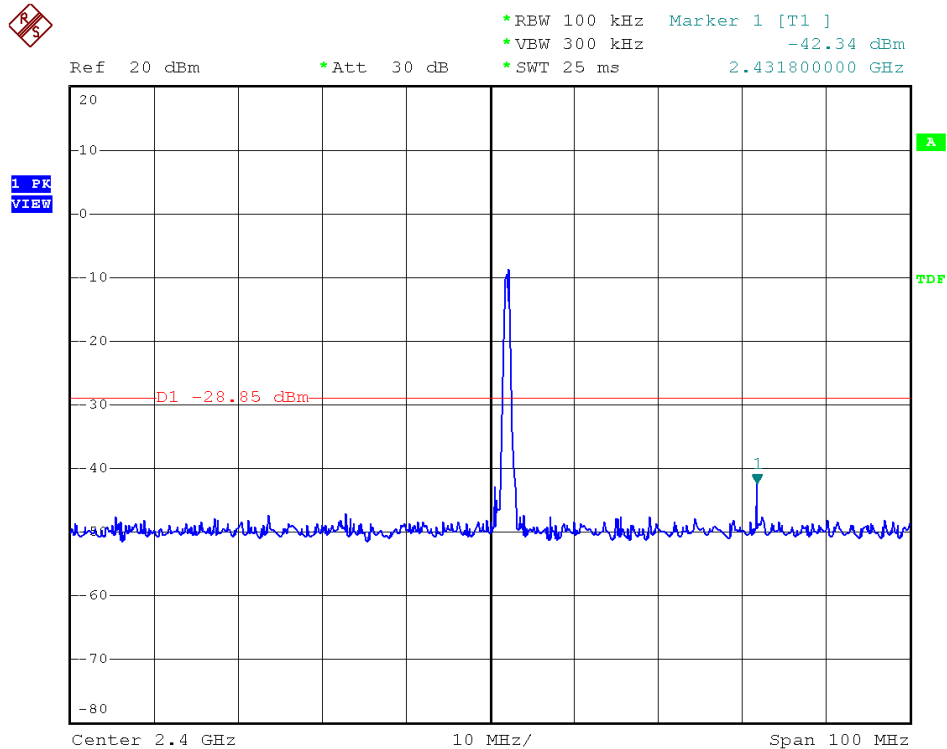



Modulation Standard: GFSK (1Mbps)
Channel: 39

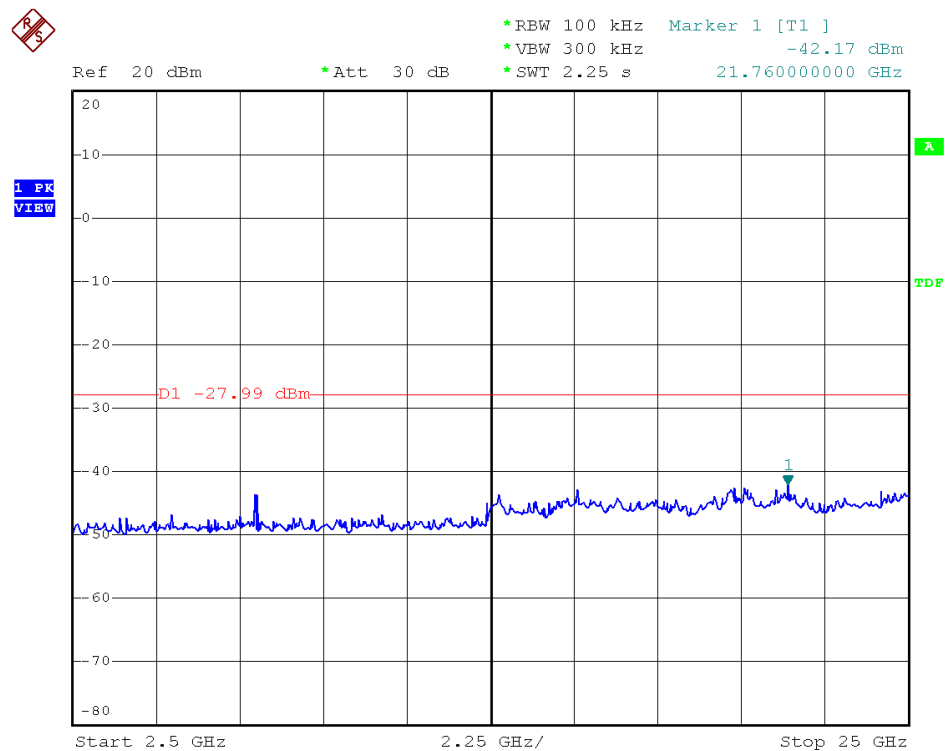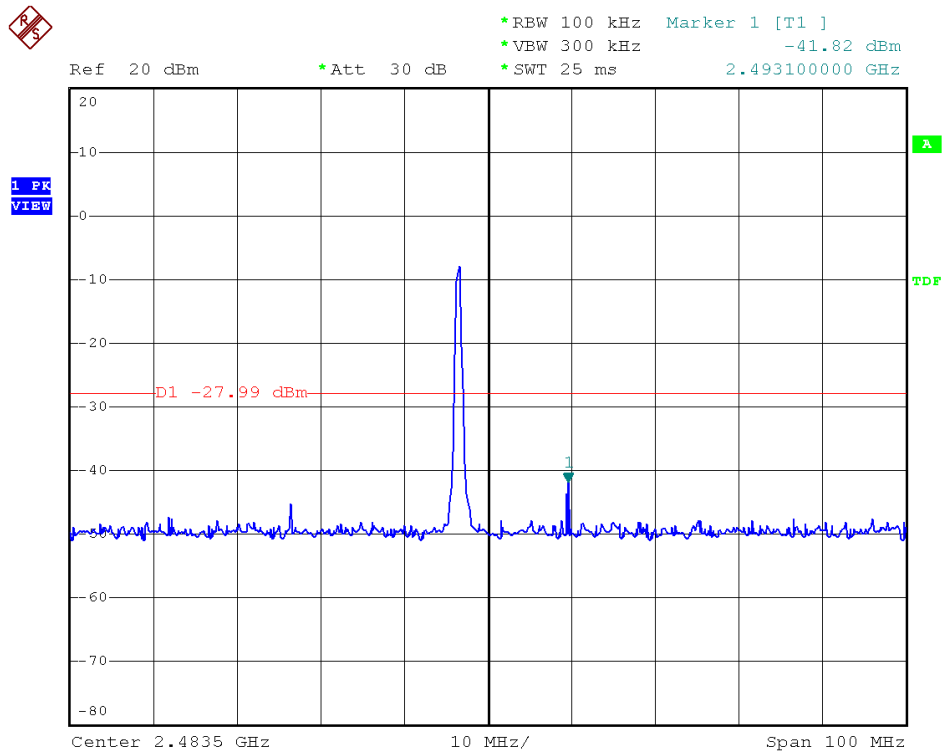



9.6 Restrict Band Emission Measurement Data

Test Date: May 18, 2014

Temperature: 23 °C

Atmospheric pressure: 987 hPa

Humidity: 54 %

Antenna Gain: 2.2dBi

Modulation Standard: GFSK

Channel 1						Fundamental Frequency: 2412 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2374.26	H	46.72	6.48	53.20	Peak	74	54	-20.80	165	1.00
-----	H	-----	-----	-----	Ave	74	54	-----	-----	-----
2374.08	V	46.87	6.48	53.35	Peak	74	54	-20.65	173	1.00
-----	V	-----	-----	-----	Ave	74	54	-----	-----	-----
Channel 11						Fundamental Frequency: 2462 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2486.32	H	45.63	6.64	52.27	Peak	74	54	-21.73	175	1.00
-----	H	-----	-----	-----	Ave	74	54	-----	-----	-----
2484.86	V	45.14	6.64	51.78	Peak	74	54	-22.22	184	1.00
-----	V	-----	-----	-----	Ave	74	54	-----	-----	-----

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector peak mode) for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector sample mode) for Average detection at frequency above 1GHz.



10. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

10.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.