






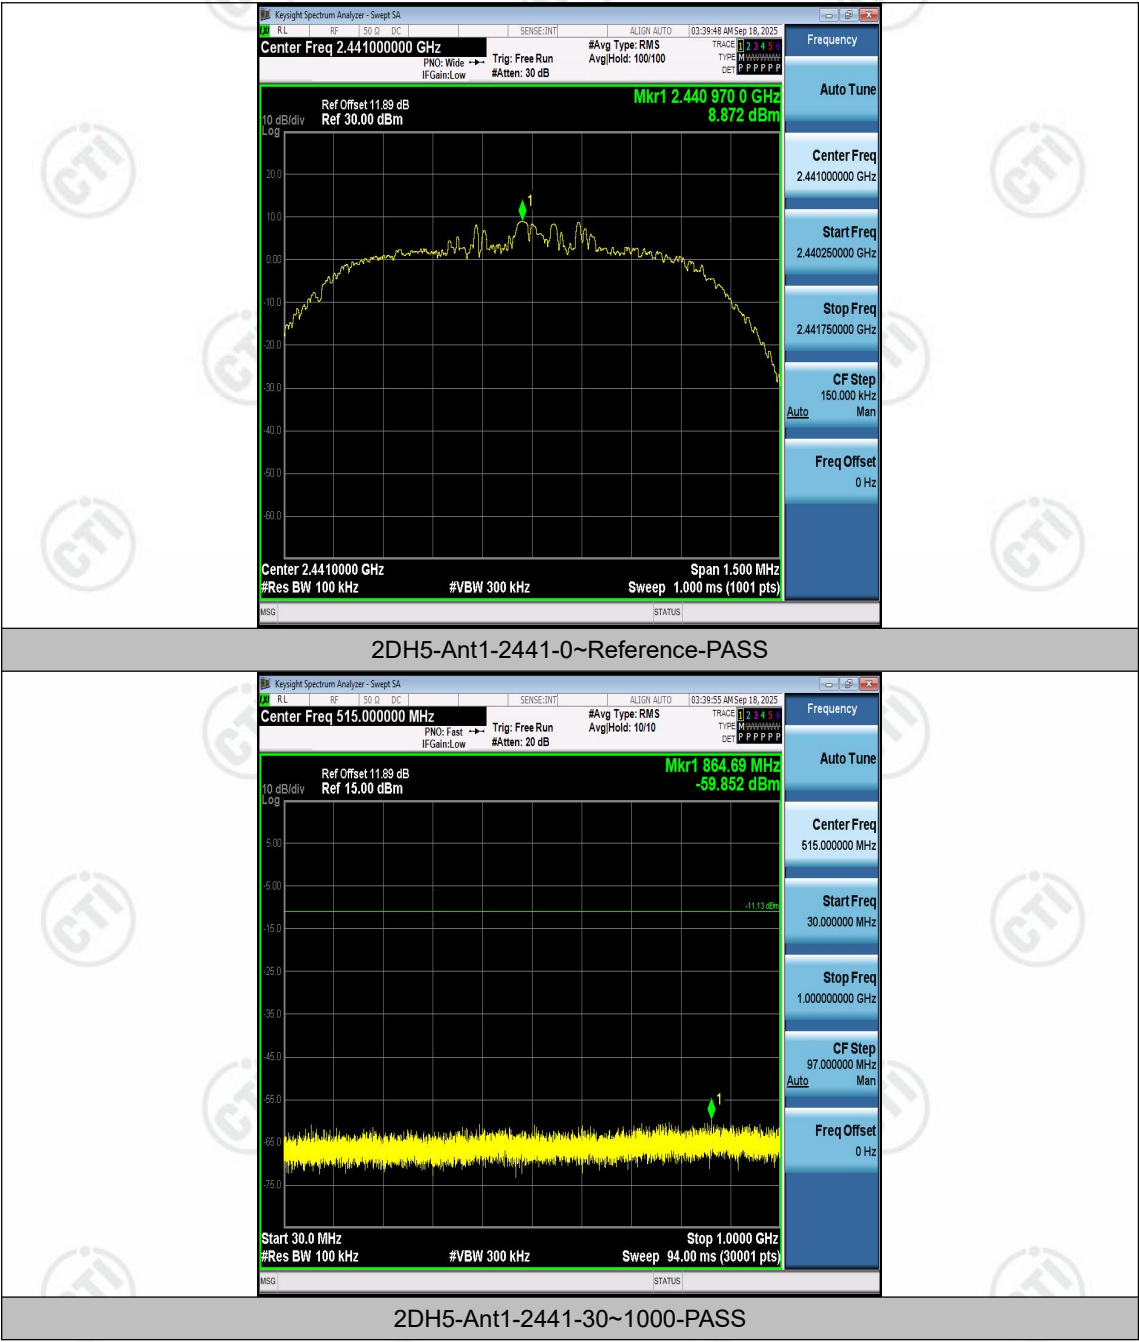


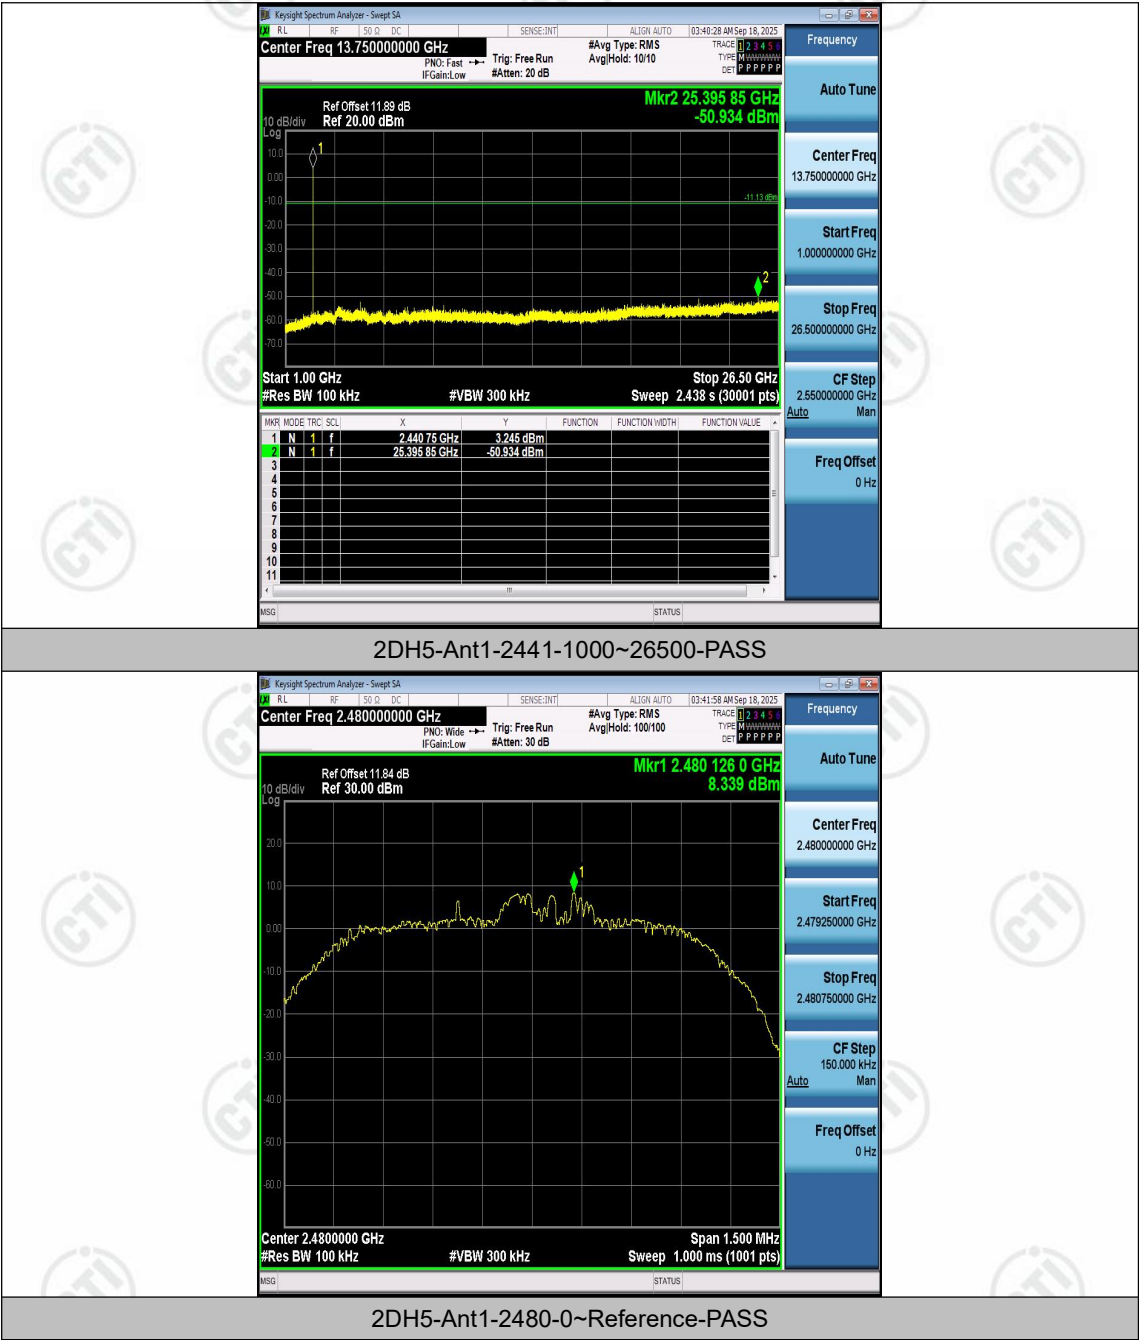


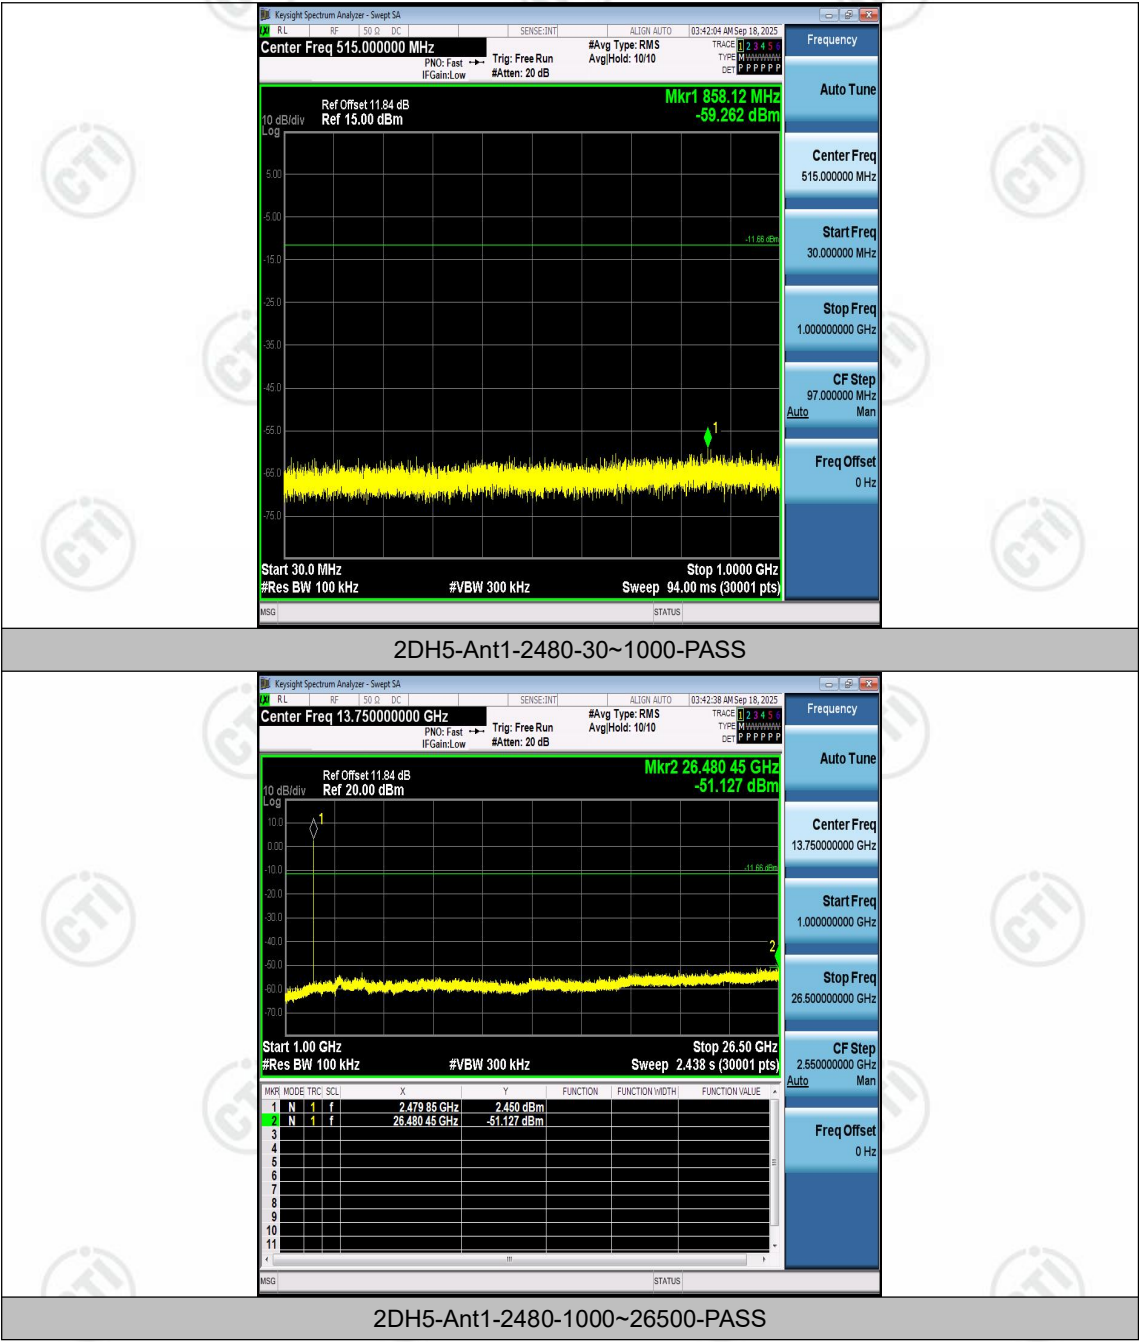


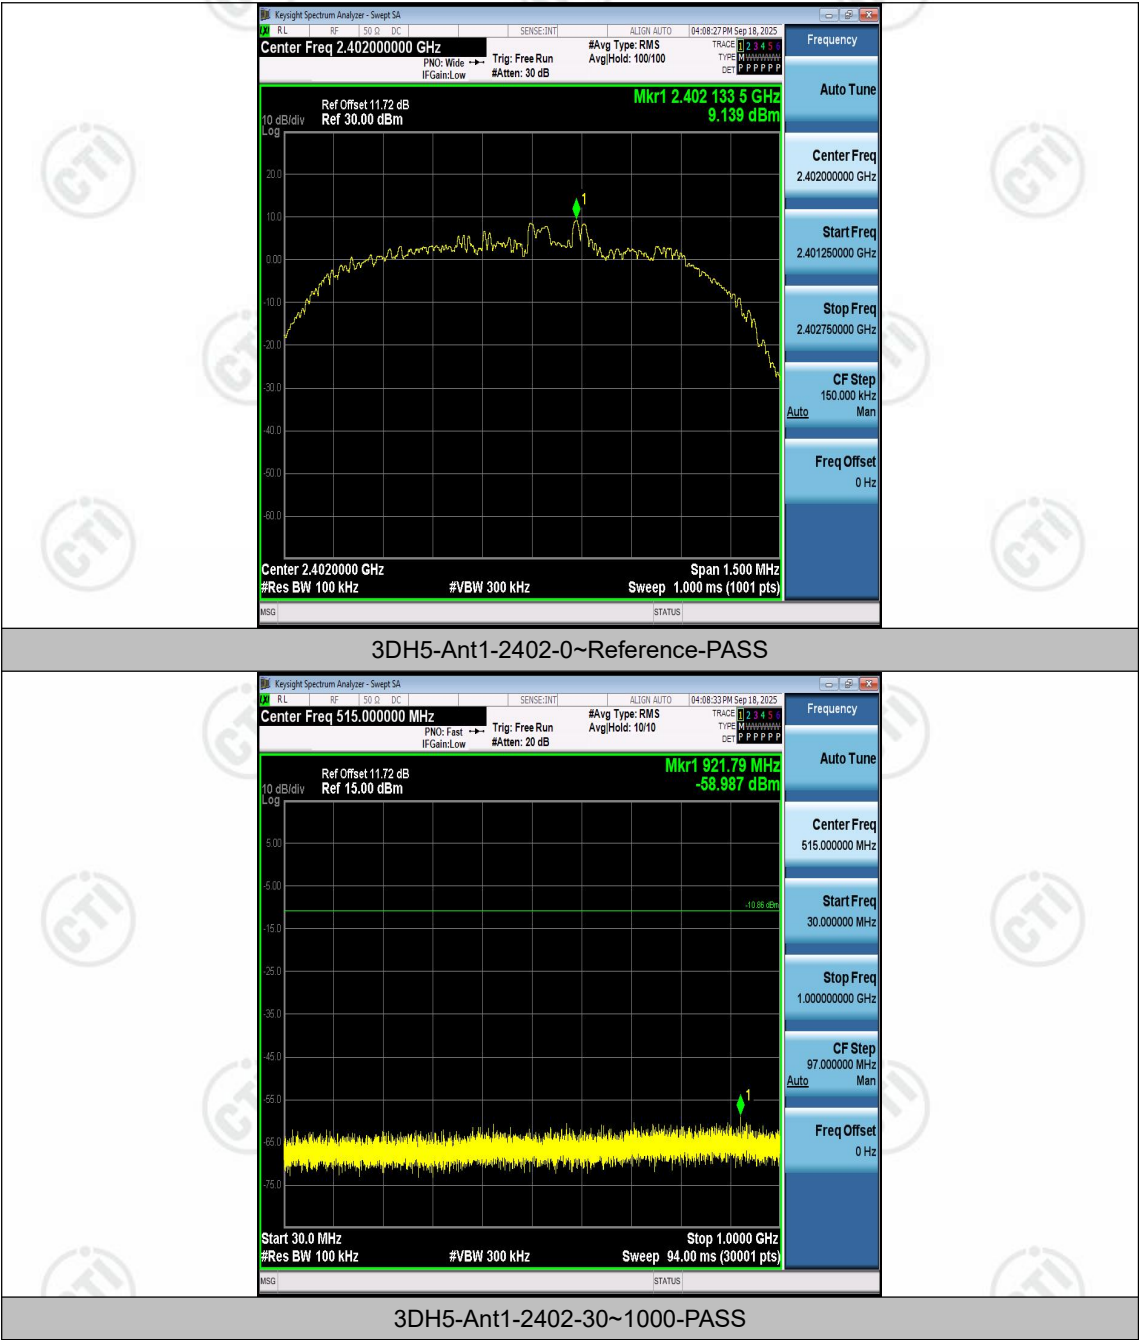

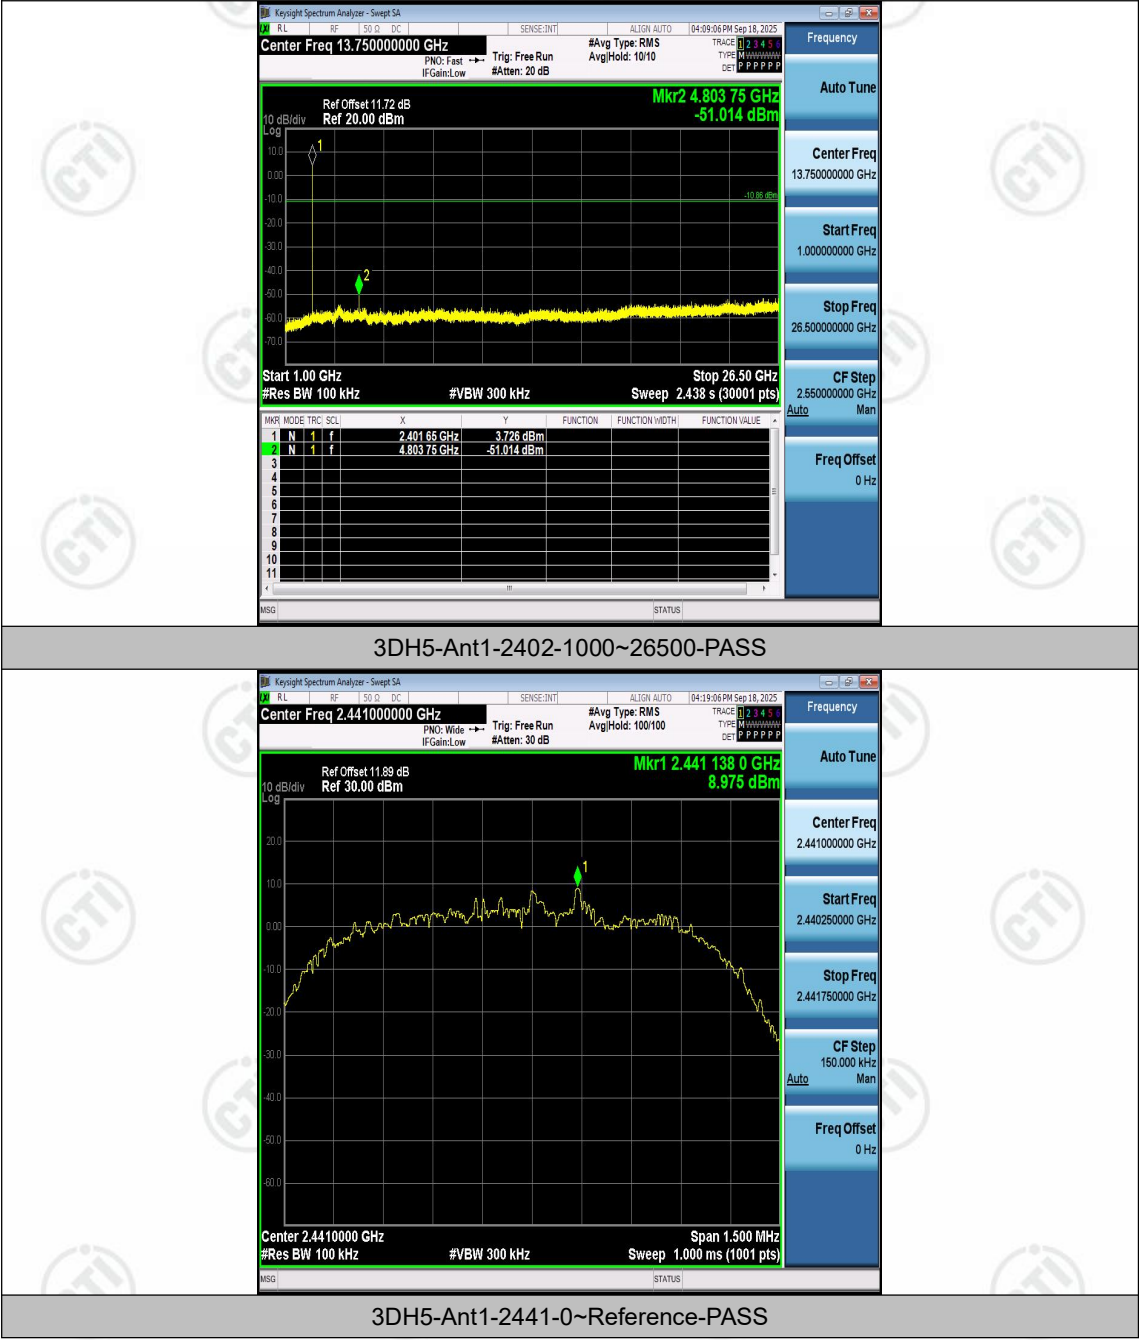

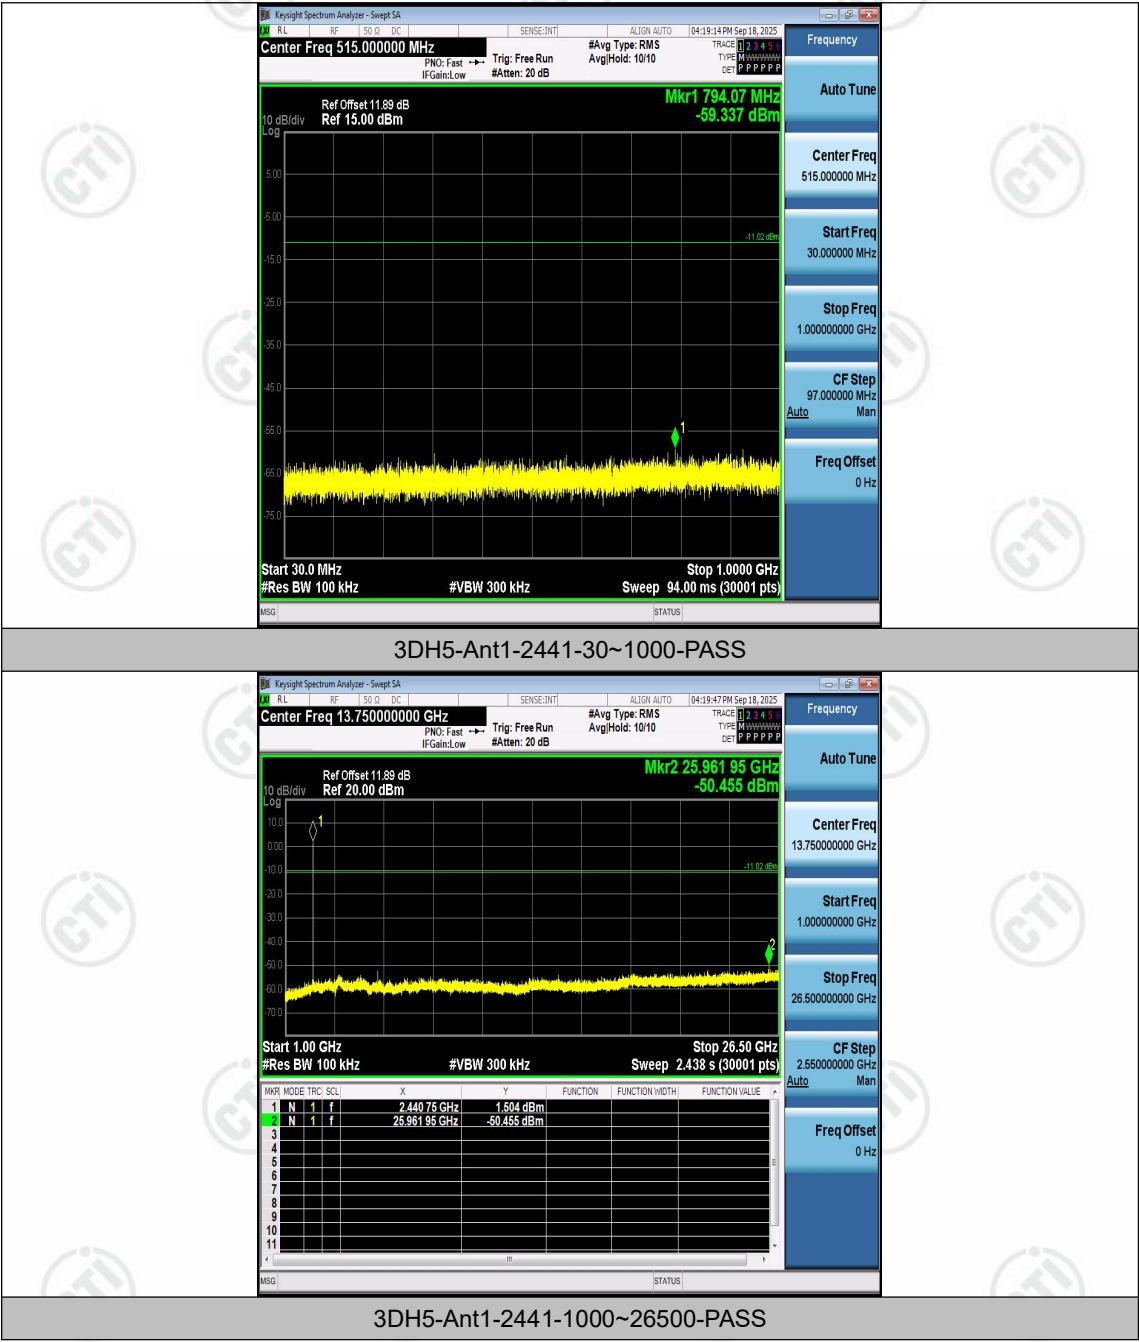

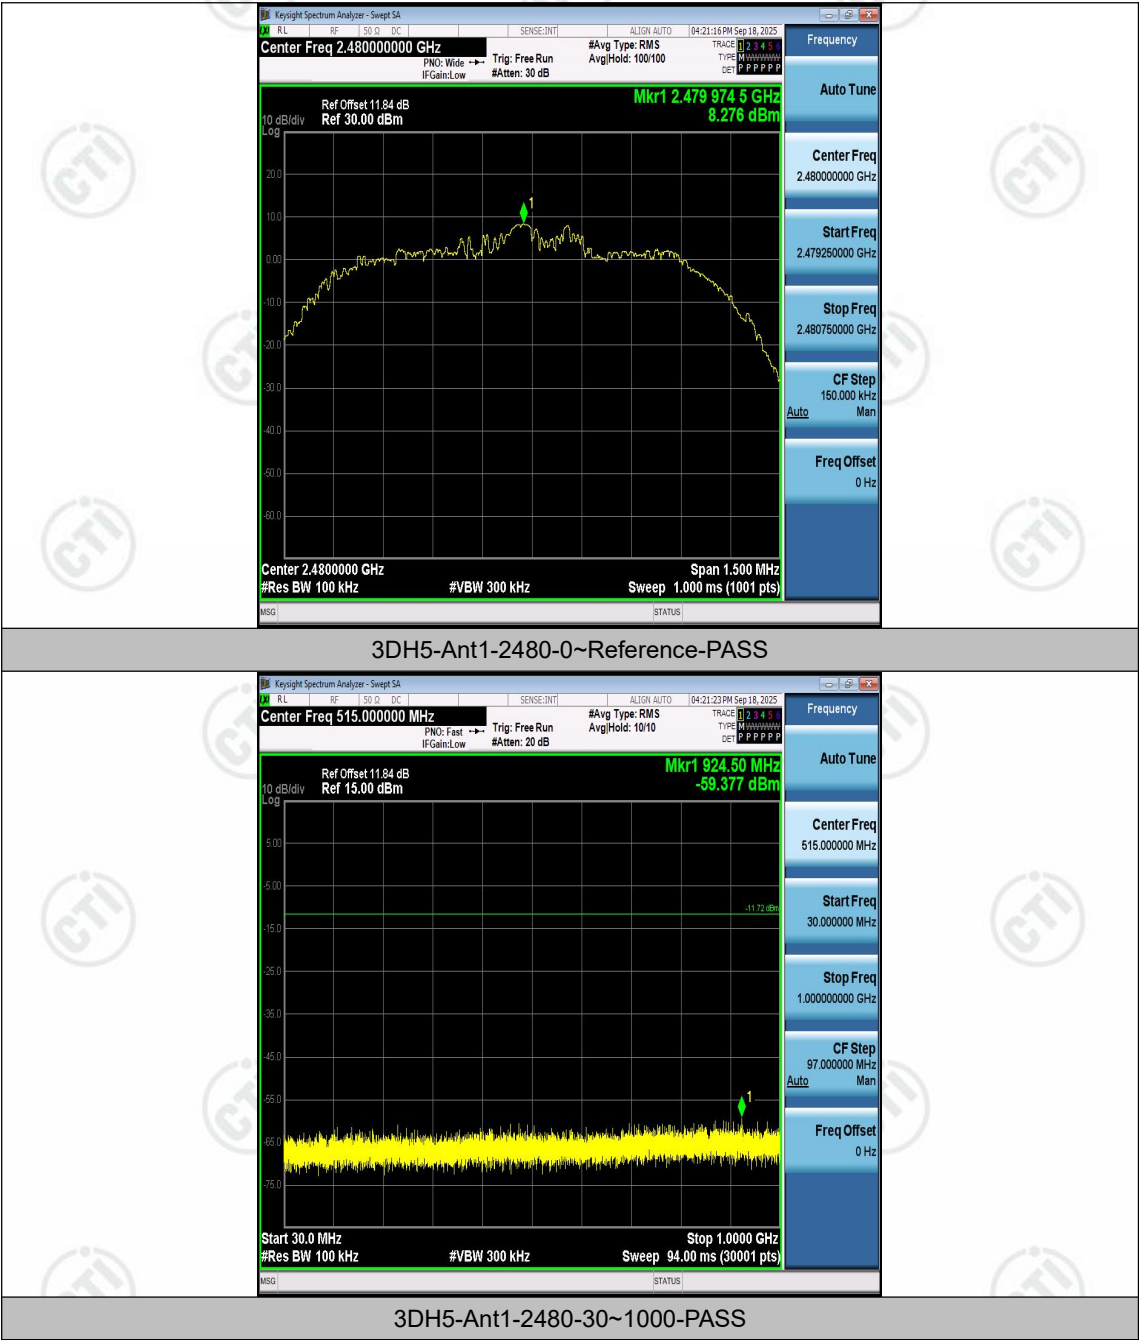

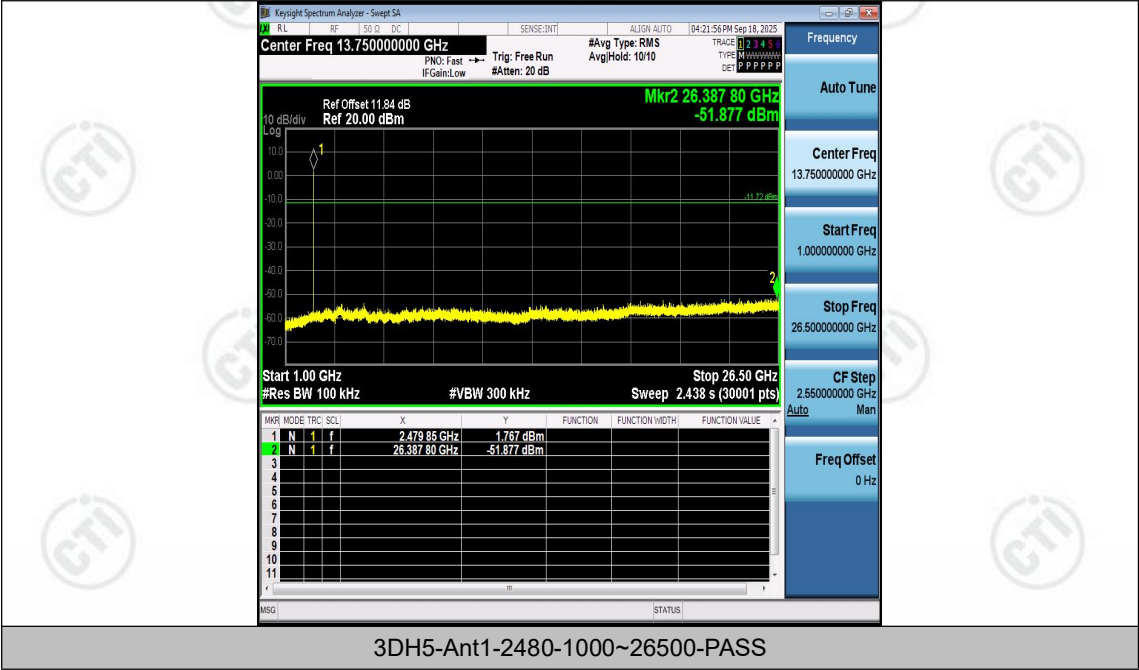



Appendix I: Duty Cycle


Test Result


TestMode	Antenna	Frequency[MHz]	ON Time[ms]	Period[ms]	Duty Cycle[%]	Duty Cycle Factor[dB]
DH5	Ant1	2402	2.89	5.00	57.80	2.38
DH5	Ant1	2441	2.89	5.00	57.80	2.38
DH5	Ant1	2480	2.88	5.00	57.60	2.40
2DH5	Ant1	2402	2.89	5.00	57.80	2.38
2DH5	Ant1	2441	2.89	5.00	57.80	2.38
2DH5	Ant1	2480	2.88	5.00	57.60	2.40
3DH5	Ant1	2402	2.89	5.00	57.80	2.38
3DH5	Ant1	2441	2.89	5.00	57.80	2.38
3DH5	Ant1	2480	2.89	5.00	57.80	2.38


Test Graphs

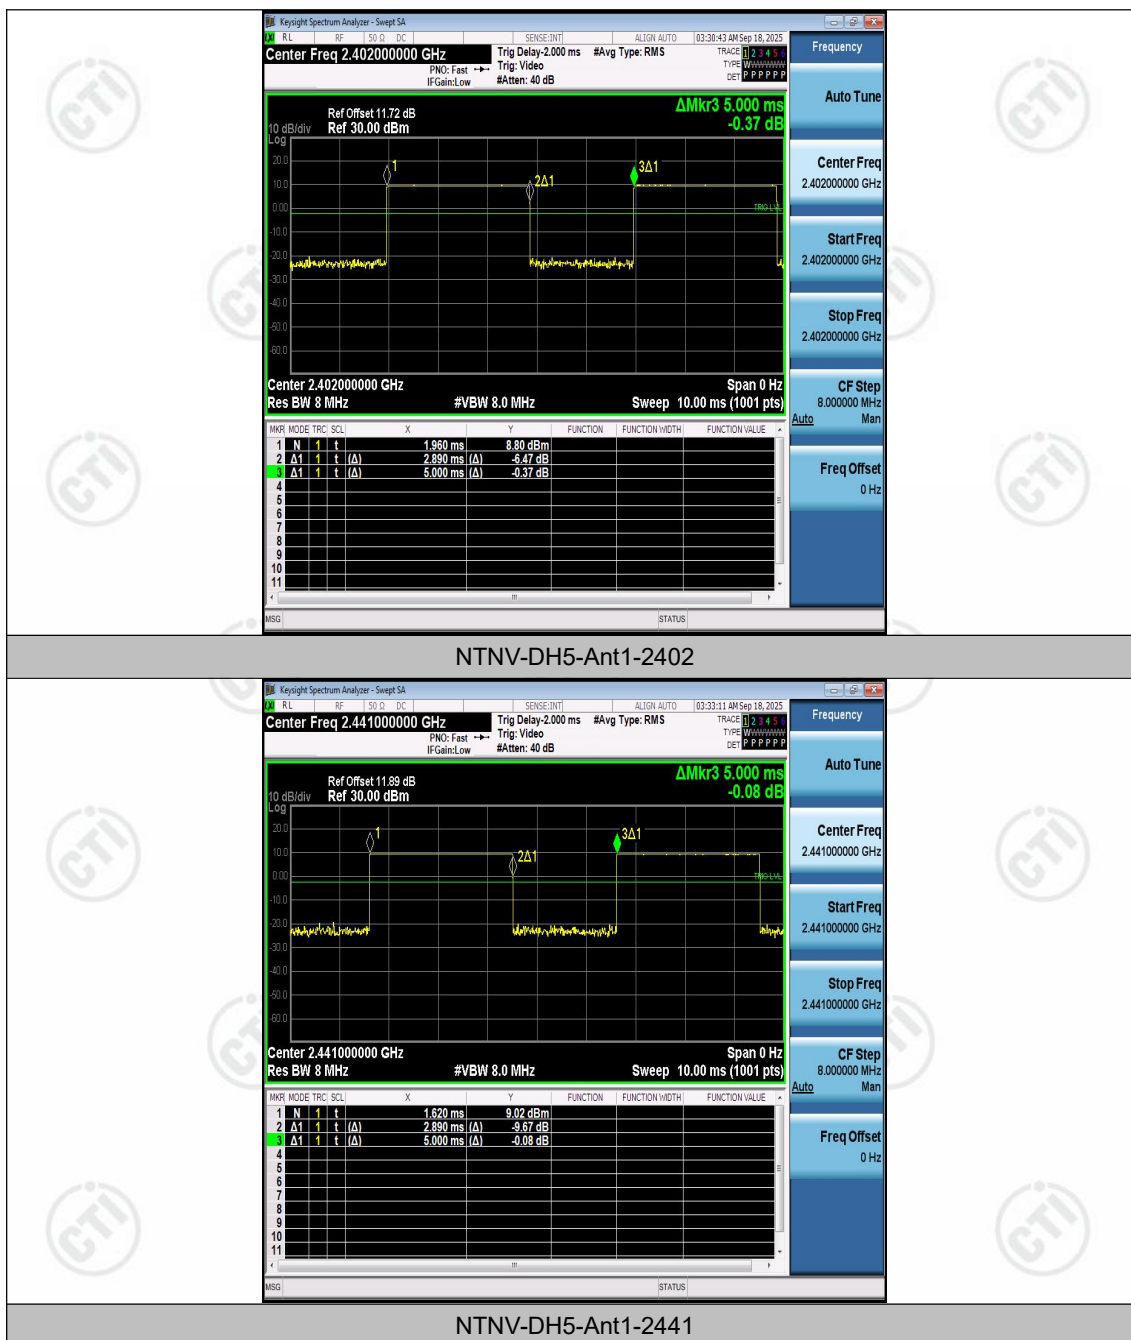

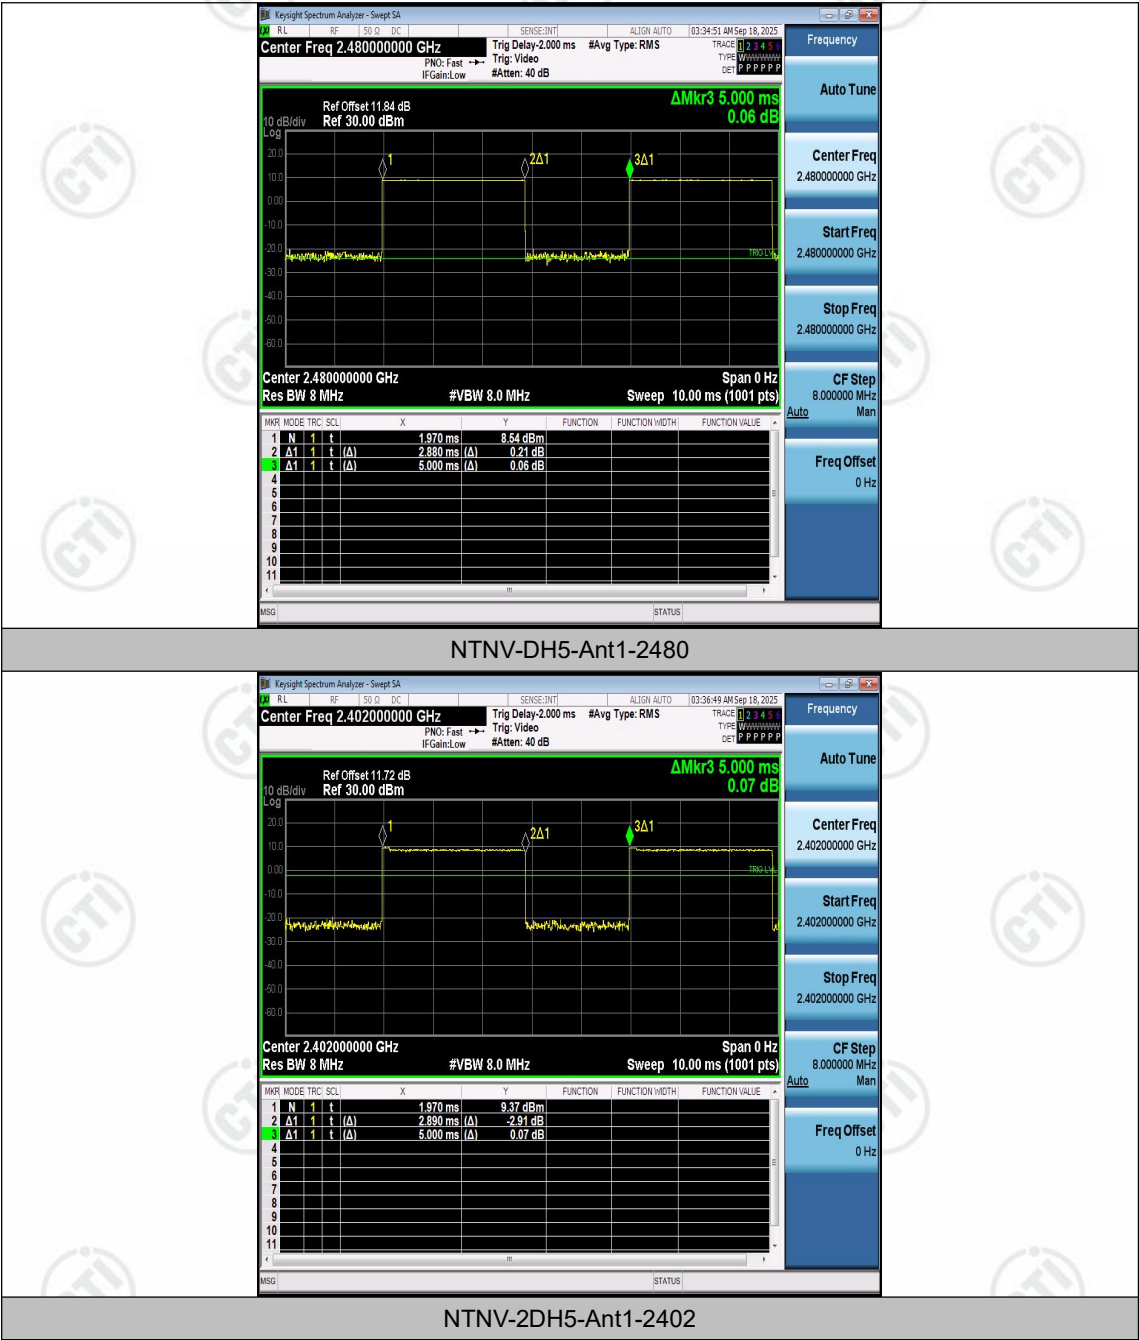

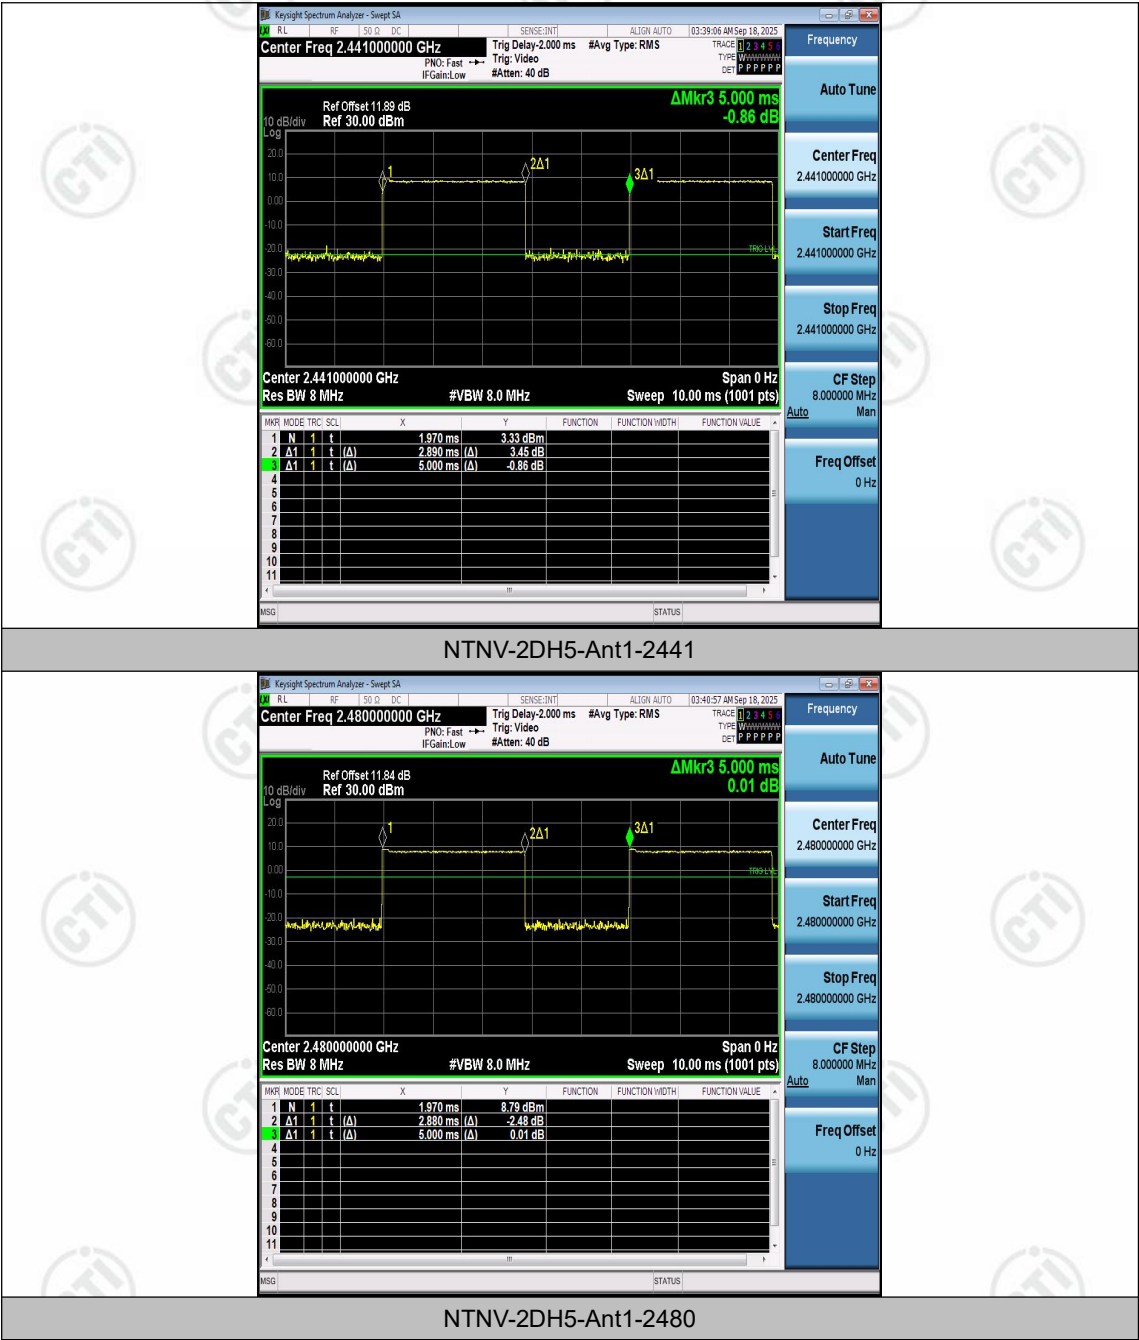

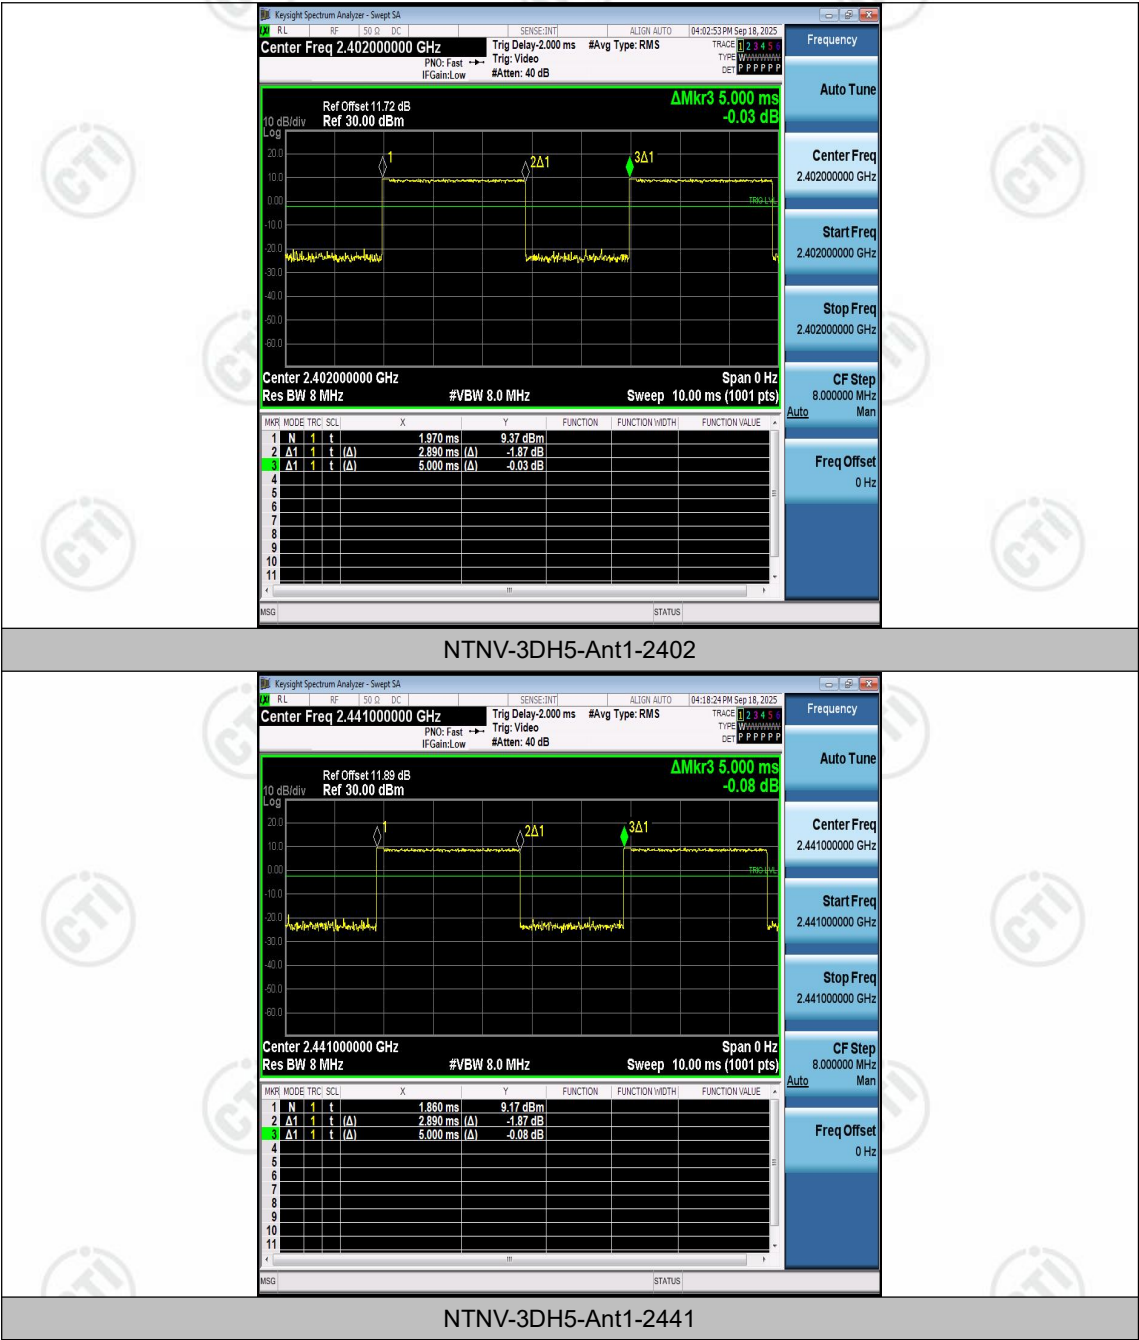

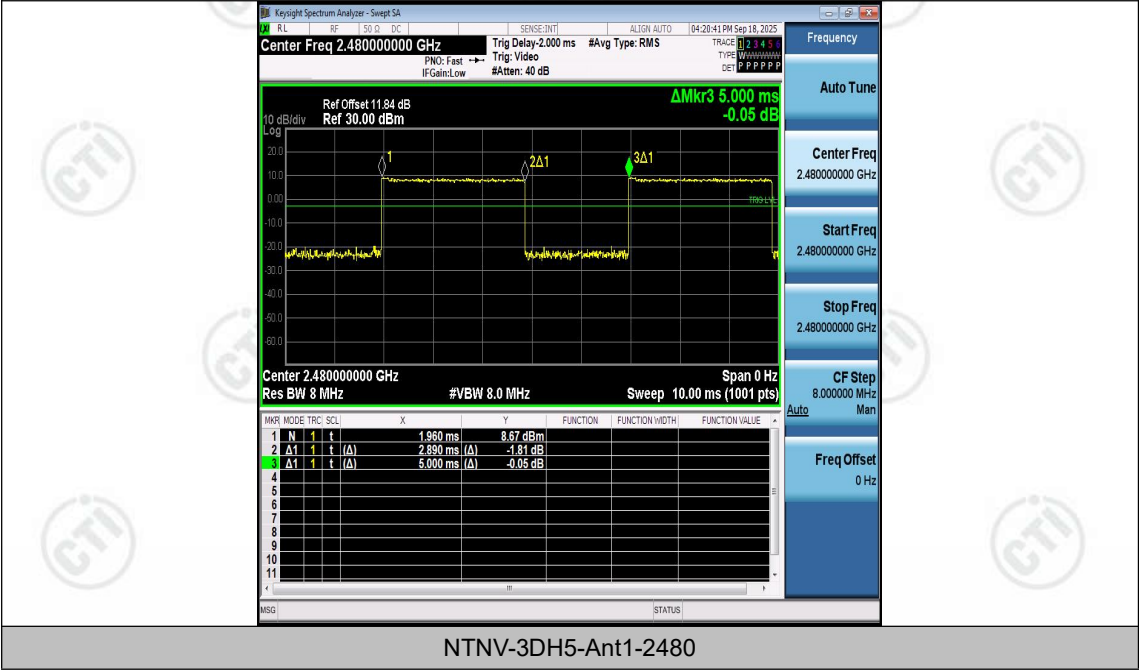

Appendix J: Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Frequenc y[MHz]	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
TestMode	Antenna	ChName	Channel	Detector	Freq	Result	Limit	E	Limit1	Verdict

Note:

- 1. The Antenna Gain is compensated in the graph.
- 2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

*** End of Report ***