



Appendix A. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	2402	10.39	21.00	Pass
	2441	10.62	21.00	Pass
	2480	11.22	21.00	Pass
8DPSK	2402	10.16	21.00	Pass
	2441	10.35	21.00	Pass
	2480	10.76	21.00	Pass

Appendix B. Test Result of Radiated Emission

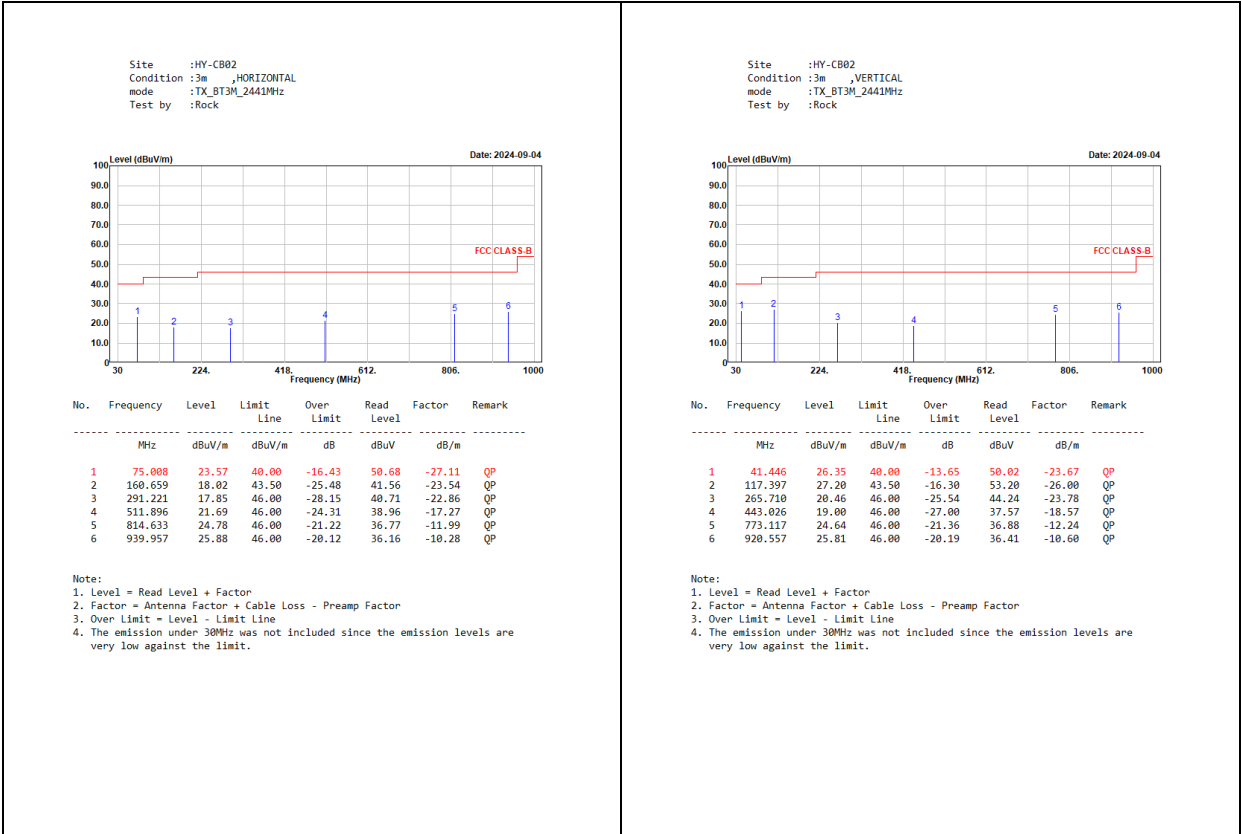

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT1M_2402MHz
Test by :Rock

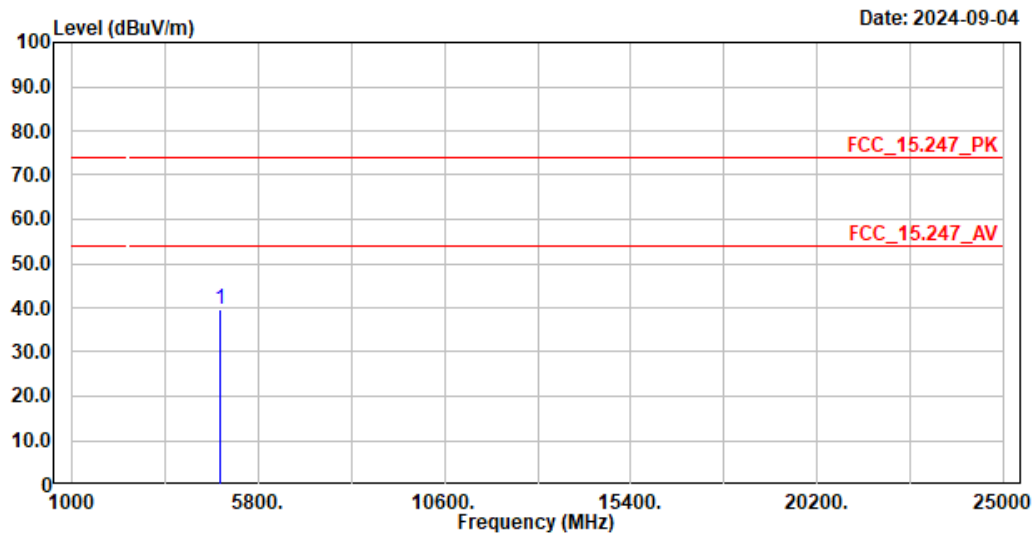


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4804.000	39.73	74.00	-34.27	46.87	-7.14	Peak

Note:

- Level = Read Level + Factor
- Factor = Antenna Factor + Cable Loss - Preamp Factor
- Over Limit = Level - Limit Line
- The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT1M_2402MHz
Test by :Rock

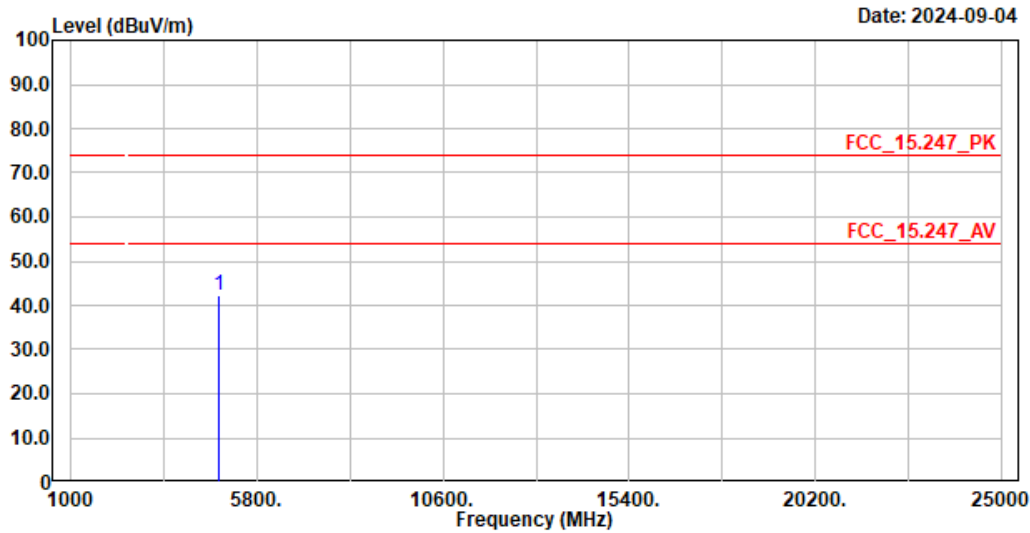

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4804.000	42.09	74.00	-31.91	49.23	-7.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT1M_2441MHz
Test by :Rock

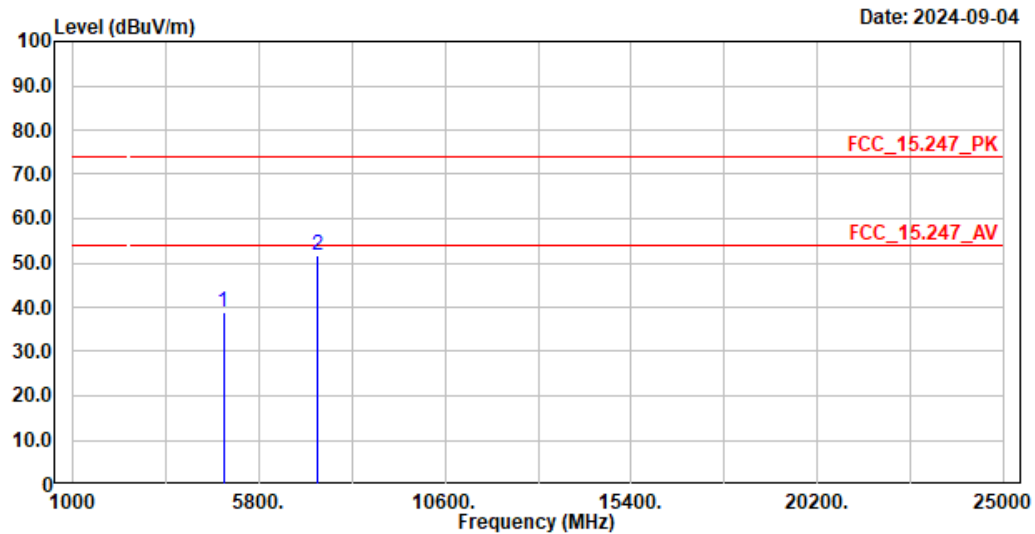


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4882.000	38.82	74.00	-35.18	45.62	-6.80	Peak
2	7323.000	51.75	74.00	-22.25	52.15	-0.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
 Condition :3m ,VERTICAL
 mode :TX_BT1M_2441MHz
 Test by :Rock

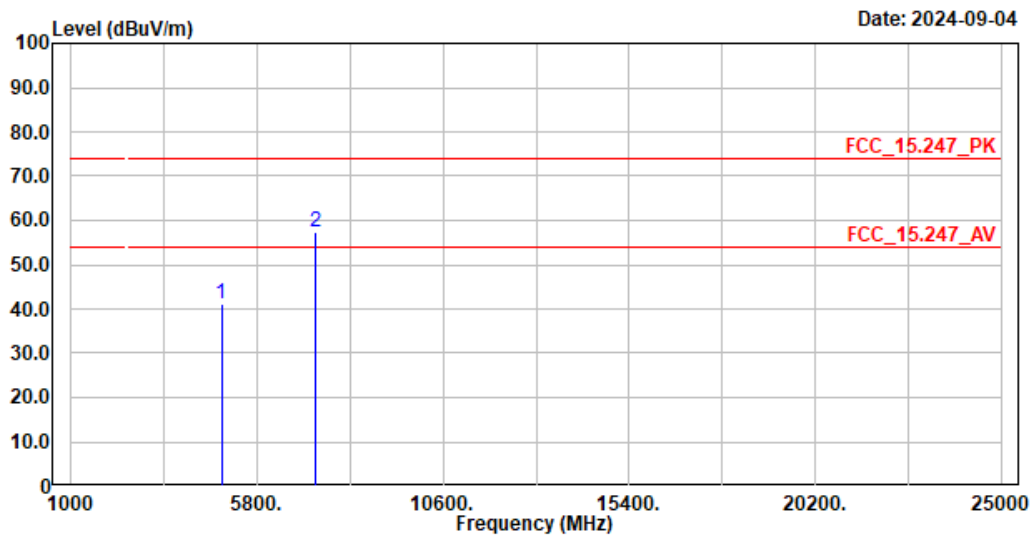

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4882.000	40.95	74.00	-33.05	47.75	-6.80	Peak
2	7323.000	57.22	74.00	-16.78	57.62	-0.40	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
7323	57.22	-24.731	32.489	-21.511	54.000

Site :HY-CB02
 Condition :3m ,HORIZONTAL
 mode :TX_BT1M_2480MHz
 Test by :Rock

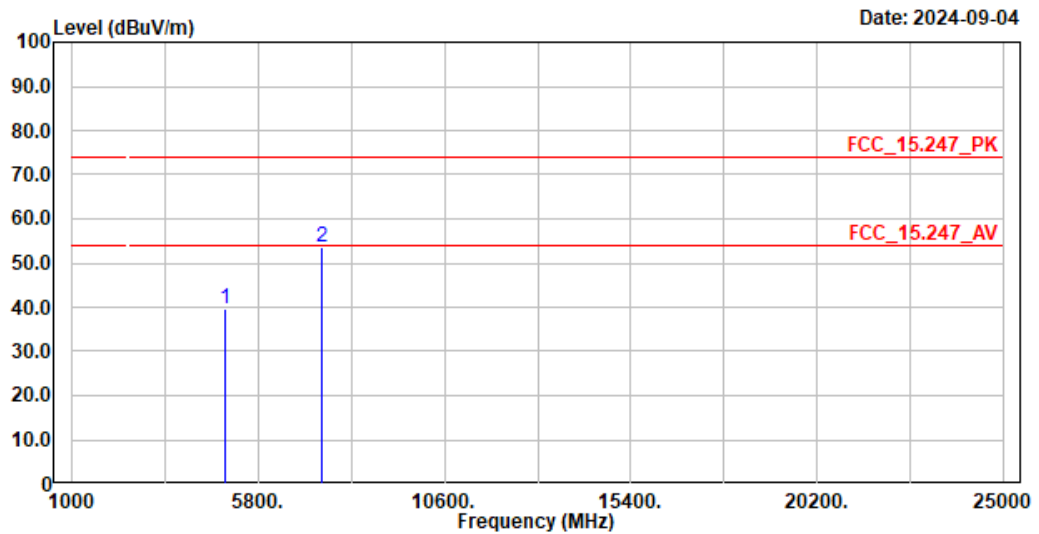


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	39.78	74.00	-34.22	46.29	-6.51	Peak
2	7440.000	53.62	74.00	-20.38	53.93	-0.31	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
 Condition :3m ,VERTICAL
 mode :TX_BT1M_2480MHz
 Test by :Rock

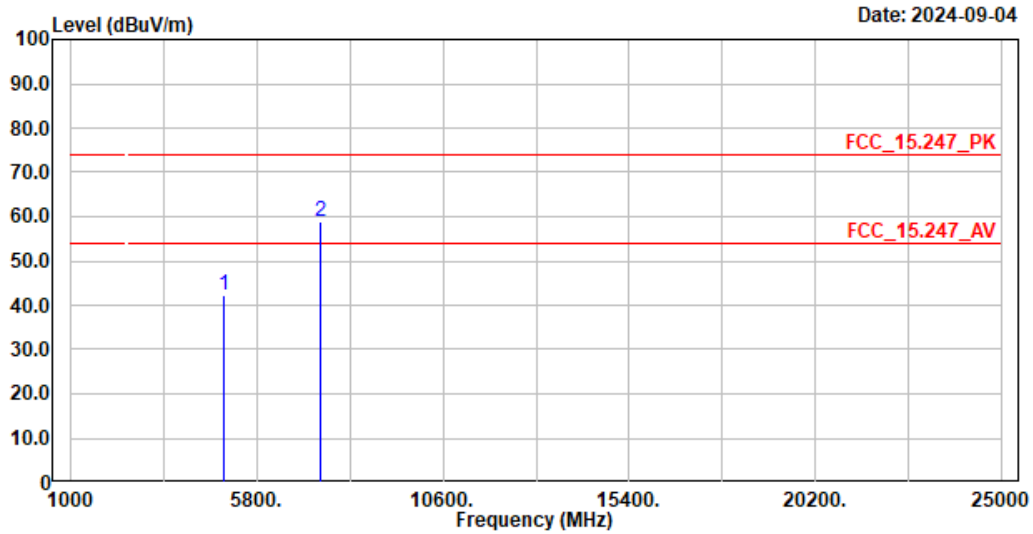

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	42.39	74.00	-31.61	48.90	-6.51	Peak
2	7440.000	58.85	74.00	-15.15	59.16	-0.31	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
7440	58.85	-24.731	34.119	-19.881	54.000

Site :HY-CB02
 Condition :3m ,HORIZONTAL
 mode :TX_BT3M_2402MHz
 Test by :Rock

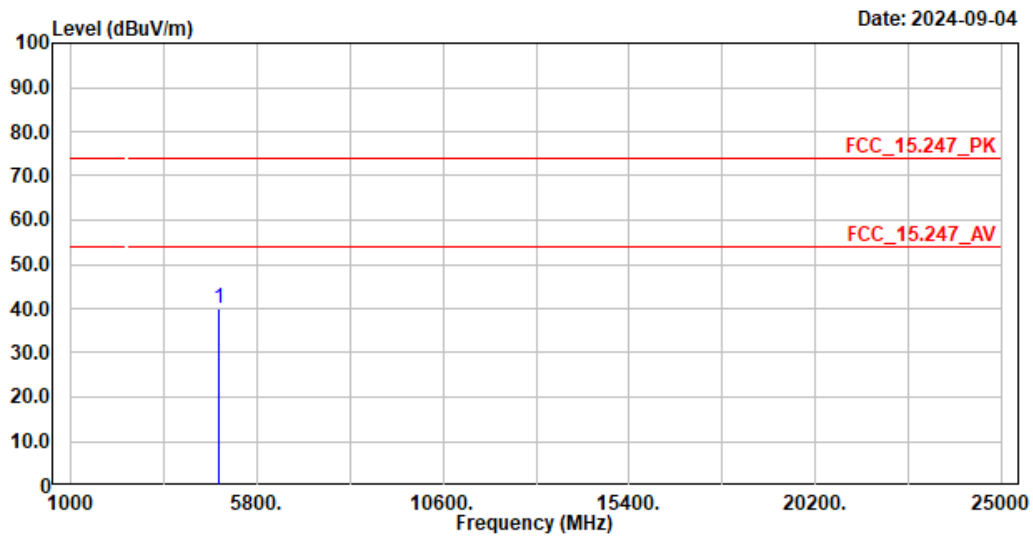


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4804.000	40.05	74.00	-33.95	47.19	-7.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT3M_2402MHz
Test by :Rock

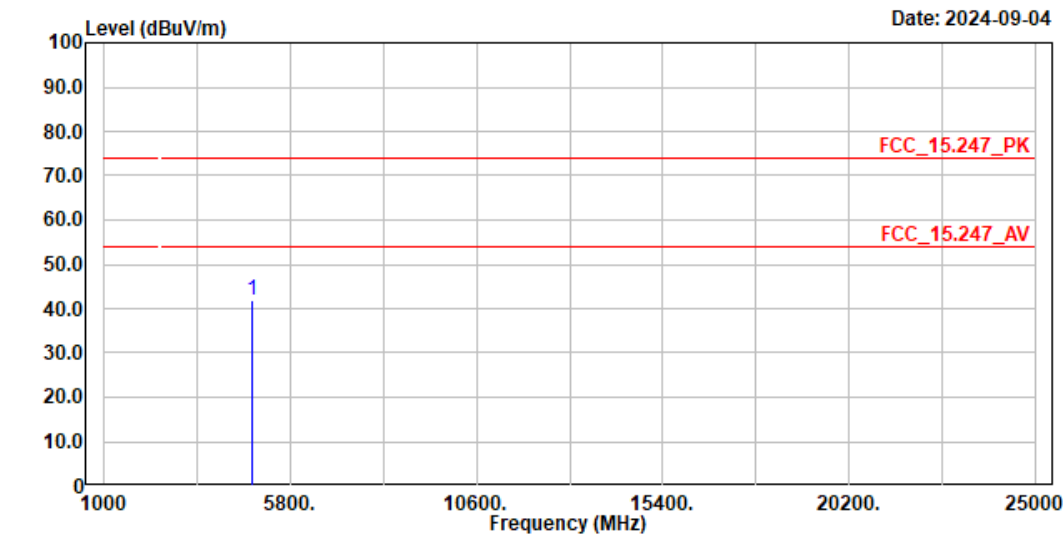

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	4804.000	41.84	74.00	-32.16	48.98	-7.14	Peak

Note:


1. Level = Read Level + Factor

2. Factor = Antenna Factor + Cable Loss - Preamp Factor

3. Over Limit = Level - Limit Line

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT3M_2441MHz
Test by :Rock

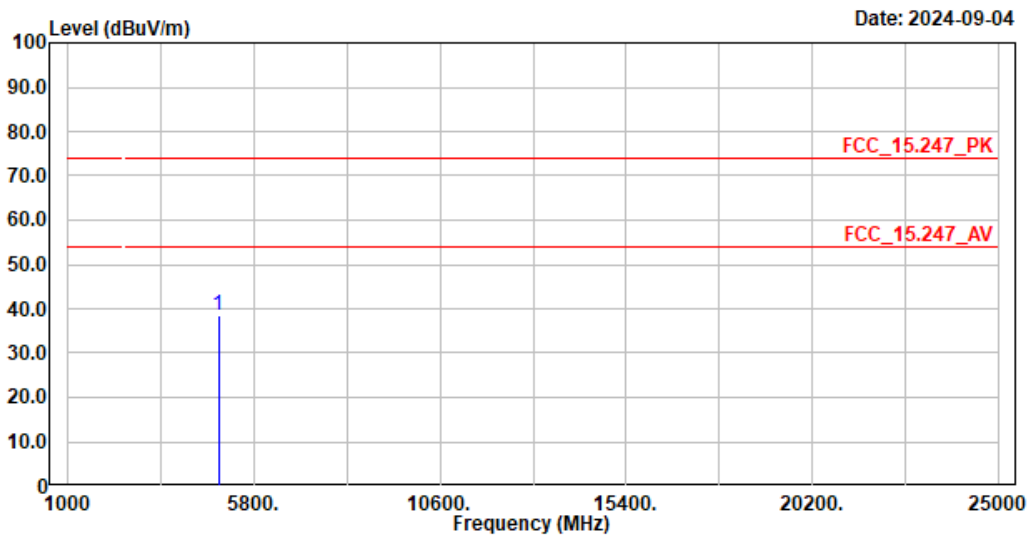

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4882.000	38.39	74.00	-35.61	45.19	-6.80	Peak

Note:


1. Level = Read Level + Factor

2. Factor = Antenna Factor + Cable Loss - Preamp Factor

3. Over Limit = Level - Limit Line

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
 Condition :3m ,VERTICAL
 mode :TX_BT3M_2441MHz
 Test by :Rock

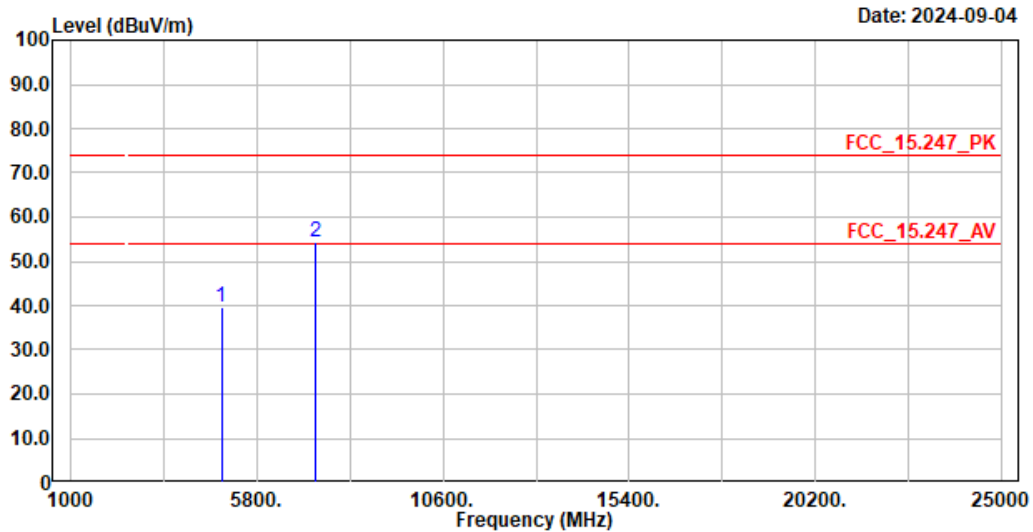

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4882.000	39.74	74.00	-34.26	46.54	-6.80	Peak
2	7323.000	54.41	74.00	-19.59	54.81	-0.40	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
7323	54.41	-24.731	29.679	-24.321	54.000

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT3M_2480MHz
Test by :Rock

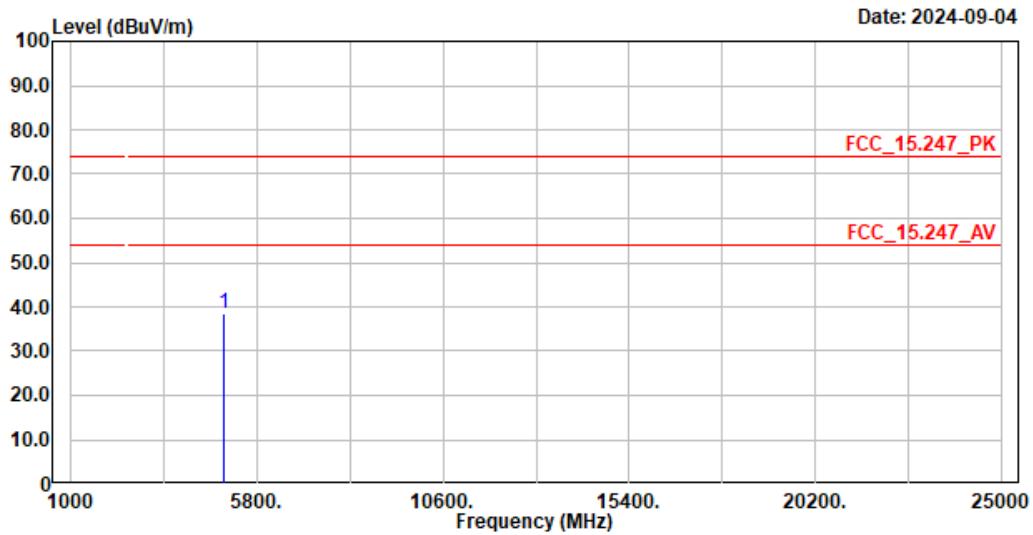


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark

	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	38.33	74.00	-35.67	44.84	-6.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT3M_2480MHz
Test by :Rock

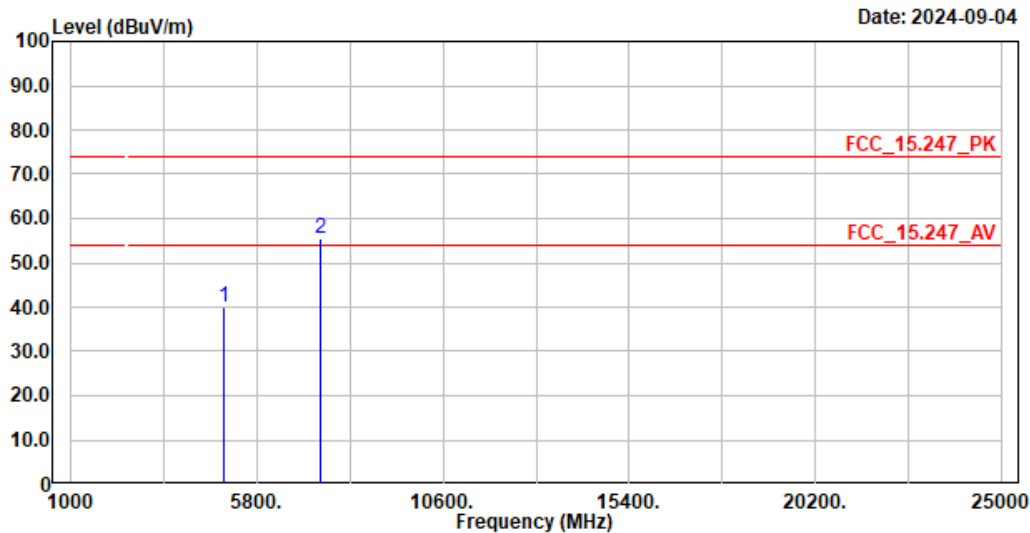

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark

	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	39.85	74.00	-34.15	46.36	-6.51	Peak
2	7440.000	55.34	74.00	-18.66	55.65	-0.31	Peak

Note:

1. Level = Read Level + Factor

2. Factor = Antenna Factor + Cable Loss - Preamp Factor


3. Over Limit = Level - Limit Line

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
7440	55.34	-24.731	30.609	-23.391	54.000

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BT1M_2402MHz
Test by :Rock

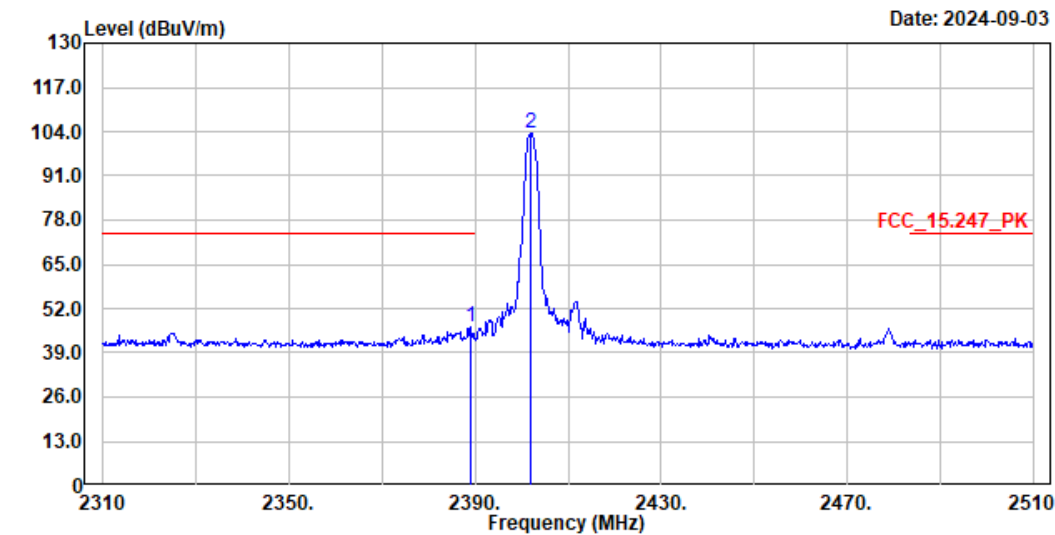

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.200	46.83	74.00	-27.17	40.74	6.09	Peak
2	2402.000	103.36	-----	-----	97.36	6.00	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2389.2	46.83	-24.731	22.099	-31.901	54.000
2402	103.36	-24.731	78.629	--	--

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BT1M_2402MHz
Test by :Rock

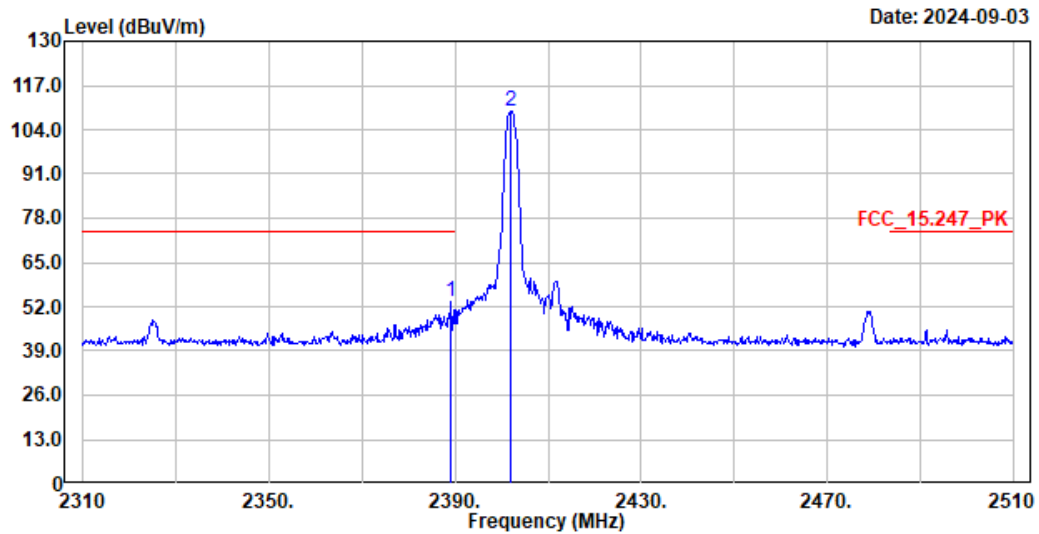

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
			Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.200	53.30	74.00	-20.70	47.21	6.09	Peak
2	2402.000	109.29	-----	-----	103.29	6.00	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2389.2	53.3	-24.731	28.569	-25.431	54.000
2402	109.29	-24.731	84.559	--	--

Site :HY-CB02
 Condition :3m ,Horizontal
 mode :TX_BT1M_2480MHz
 Test by :Rock

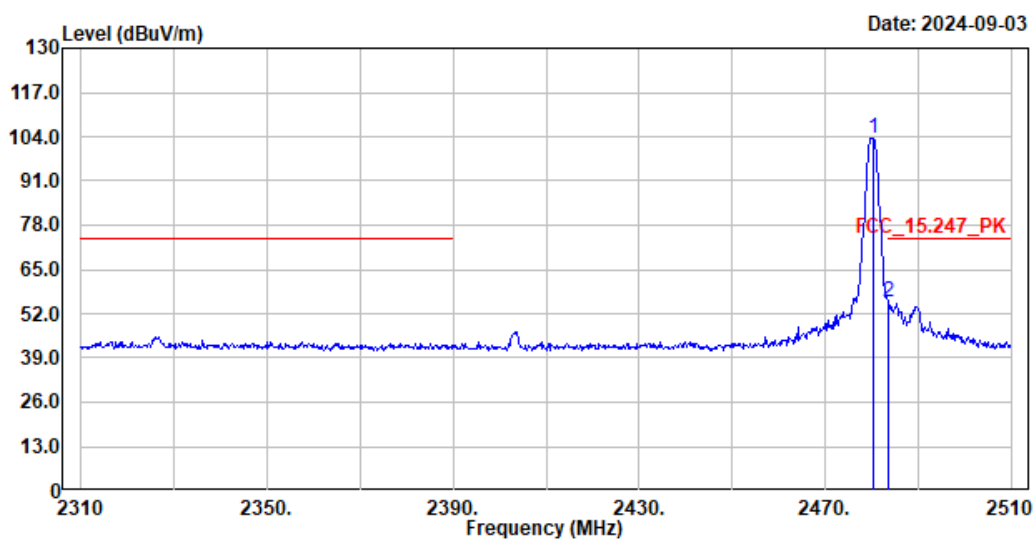

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	103.51	-----	-----	97.57	5.94	Peak
2	2483.600	55.61	74.00	-18.39	49.63	5.98	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	103.51	-24.731	78.779	--	--
2483.6	55.61	-24.731	30.879	-23.121	54.000

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BT1M_2480MHz
Test by :Rock

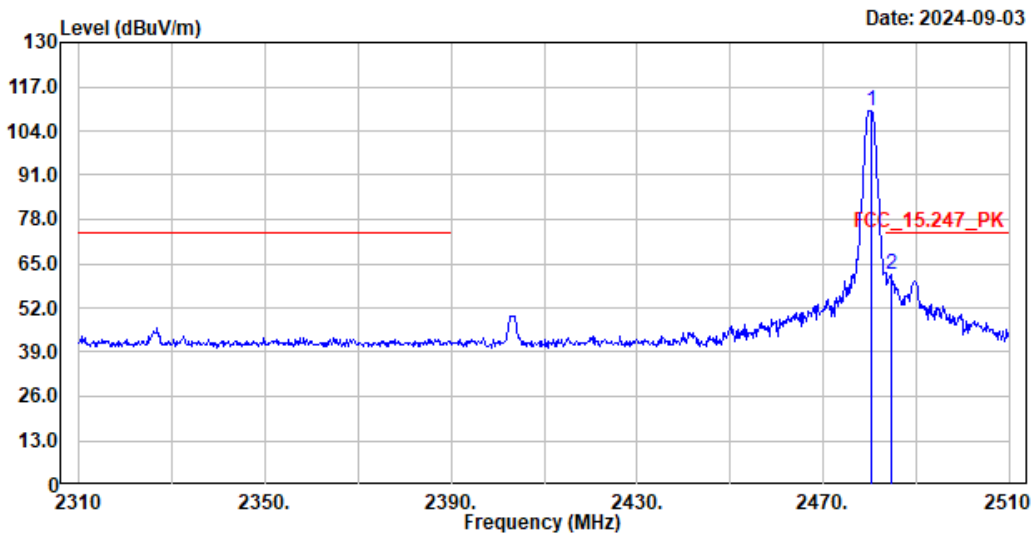

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	109.94	-----	-----	104.00	5.94	Peak
2	2484.600	61.92	74.00	-12.08	55.93	5.99	Peak

Note:

1. Level = Read Level + Factor

2. Factor = Antenna Factor + Cable Loss - Preamp Factor


3. Over Limit = Level - Limit Line

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	109.94	-24.731	85.209	--	--
2484.6	61.92	-24.731	37.189	-16.811	54.000

Site :HY-CB02
 Condition :3m ,Horizontal
 mode :TX_BT3M_2402MHz
 Test by :Rock

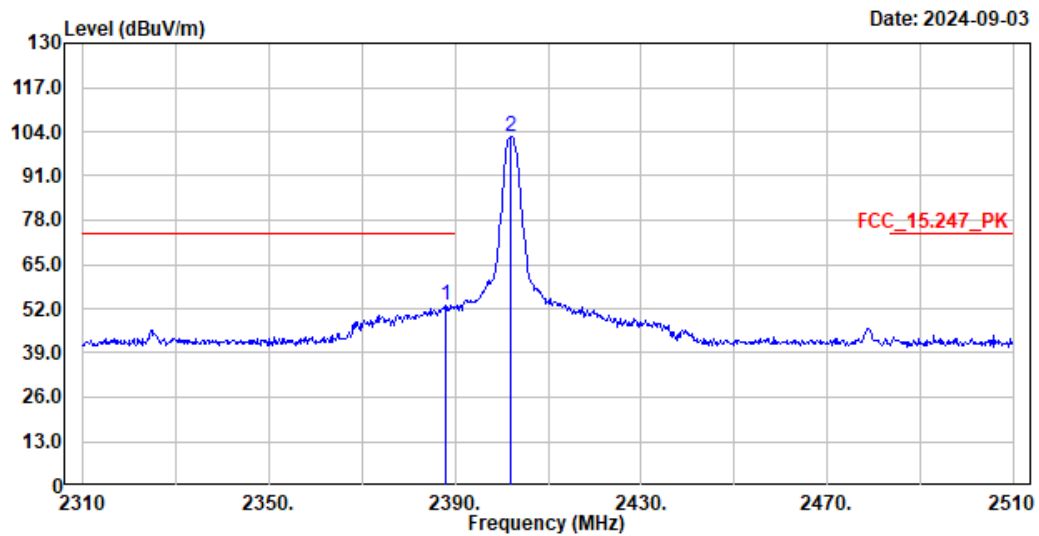

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
			Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.000	53.03	74.00	-20.97	46.94	6.09	Peak
2	2402.000	102.61	-----	-----	96.61	6.00	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2388	53.03	-24.731	28.299	-25.701	54.000
2402	102.61	-24.731	77.879	--	--

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BT3M_2402MHz
Test by :Rock

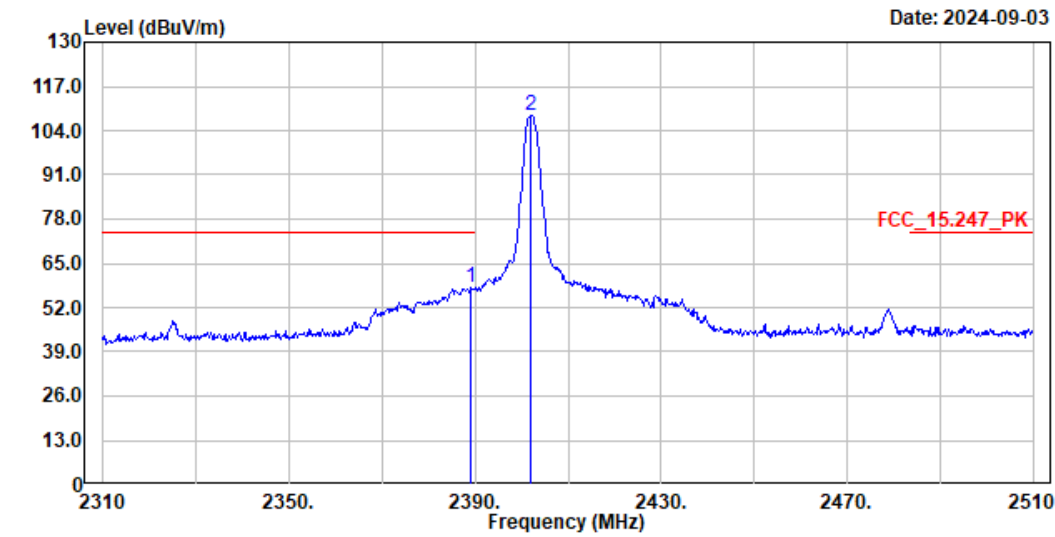

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.000	57.97	74.00	-16.03	51.88	6.09	Peak
2	2402.000	108.51	-----	-----	102.51	6.00	Peak

Note:

1. Level = Read Level + Factor

2. Factor = Antenna Factor + Cable Loss - Preamp Factor


3. Over Limit = Level - Limit Line

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2389	57.97	-24.731	33.239	-20.761	54.000
2402	108.51	-24.731	83.779	--	--

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BT3M_2480MHz
Test by :Rock

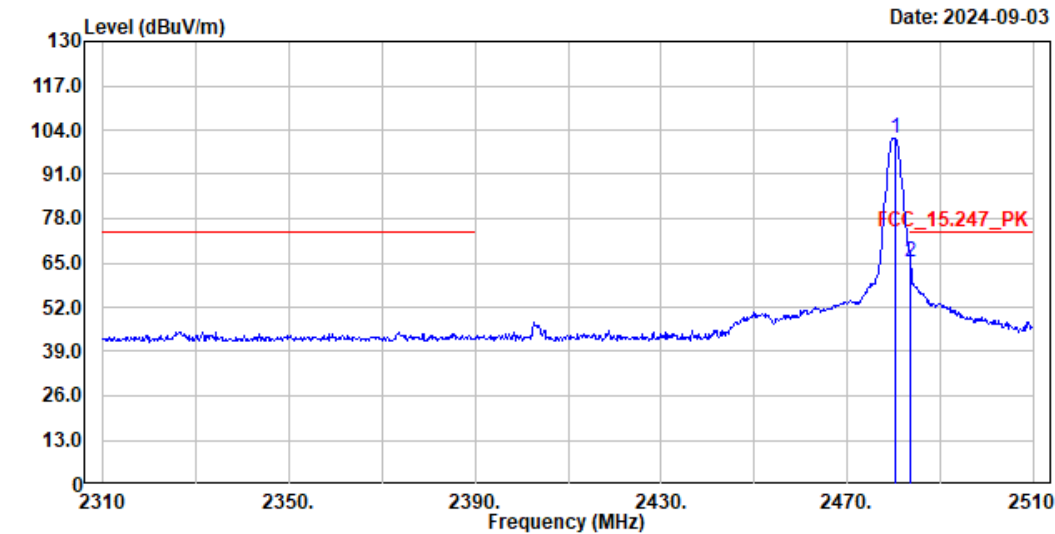

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	101.63	-----	-----	95.69	5.94	Peak
2	2483.600	65.24	74.00	-8.76	59.26	5.98	Peak

Note:

1. Level = Read Level + Factor

2. Factor = Antenna Factor + Cable Loss - Preamp Factor


3. Over Limit = Level - Limit Line

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	101.63	-24.731	76.899	--	--
2483.6	65.24	-24.731	40.509	-13.491	54.000

Site :HY-CB02
 Condition :3m ,Vertical
 mode :TX_BT3M_2480MHz
 Test by :Rock

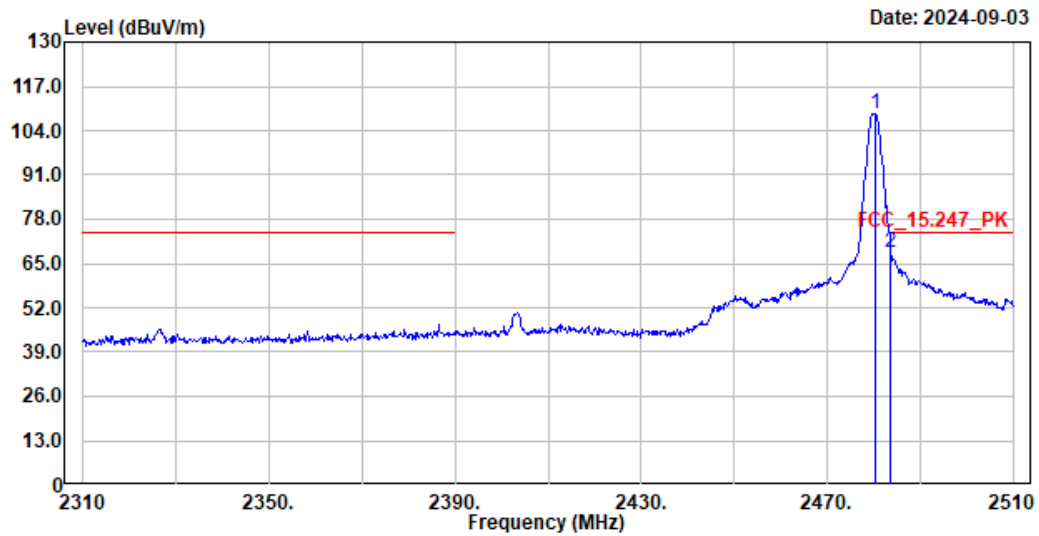

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	109.05	-----	-----	103.11	5.94	Peak
2	2483.600	68.01	74.00	-5.99	62.03	5.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	109.05	-24.731	84.319	--	--
2483.6	68.01	-24.731	43.279	-10.721	54.000