APPENDIX B. Internal Photograph

432309
Li-ion battery
Rechargeable, replaceable
Capacity : 3.7V
1440mAh
Please Charge Battery
With Specified
Chargers Only.
WARNING :
MAY EXPLODE IF
DISPOSED OF IN FIRE.
Caution :
1. Do not expose to
high temperatures.
2. Do not disassemble.
3. Do not short-circuit.
P/N : 4900199
P700BLC00093
2004 4 10

432309
CE0682
INPUT : 5V DC 2A
交通部電信總局審驗合格標籤
審核編號碼 :B92-DG82-0
警語：減少電池波影響，請妥善使用
R31274
P/N : SP067002
IMEI: 350390010800606
P70T10W00055
DSLE
OFF
ON
2004 4 10

432309
CE0682
INPUT : 5V DC 2A
P/N : SP067002
IMEI: 350390010800606
P70T10W00055
DSLE
2004 4 10

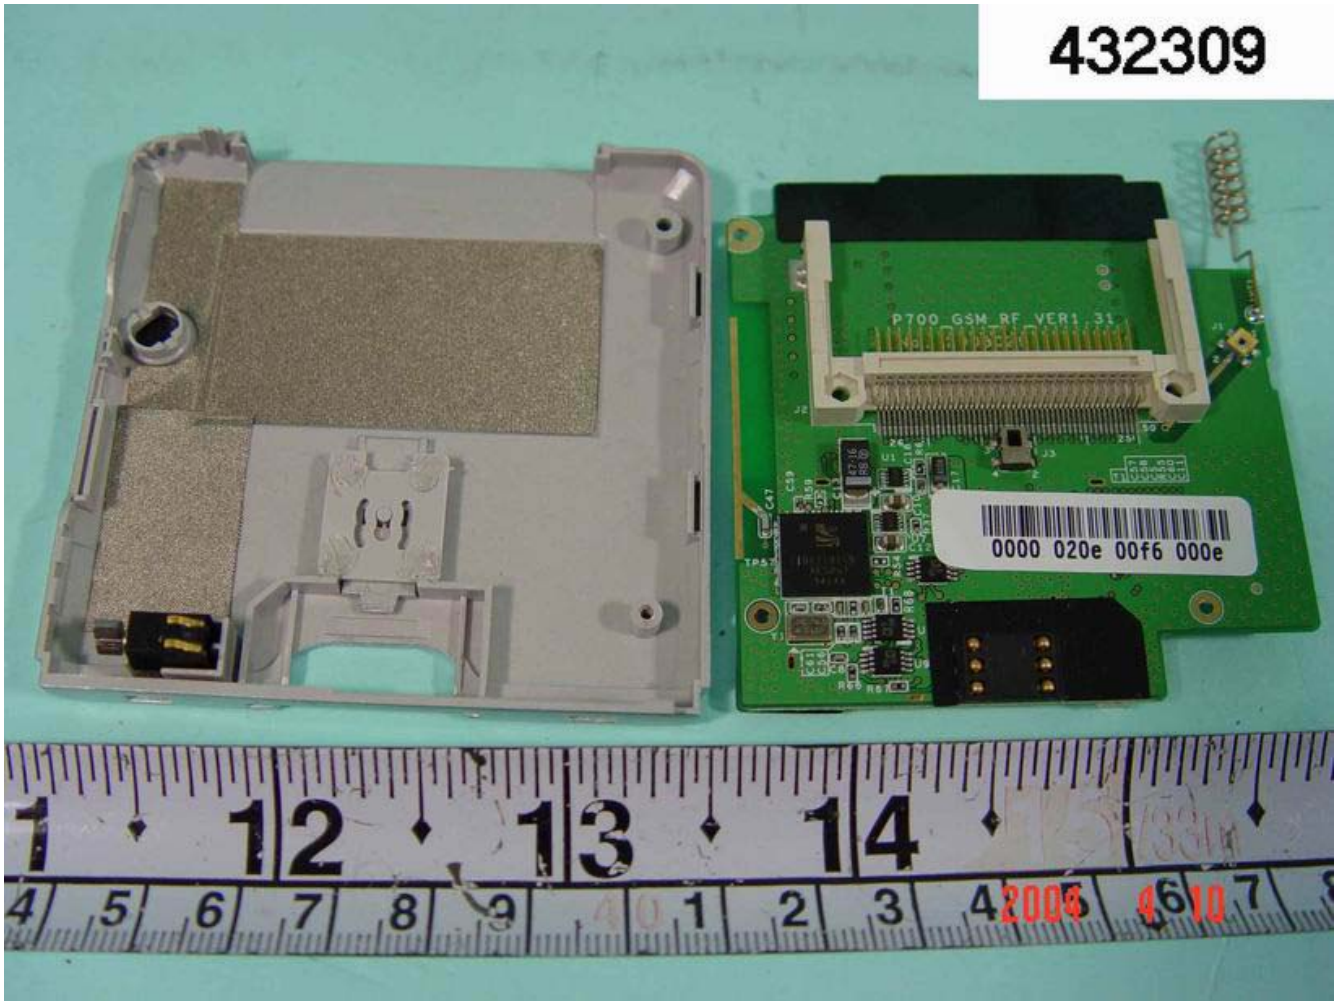
432309
P700_GSM_RF_VER1.31
0000 020e 00f6 000e

432309
P700_GSM_RF_VER1.31
0000 020e 00f6 000e
2004 4 10

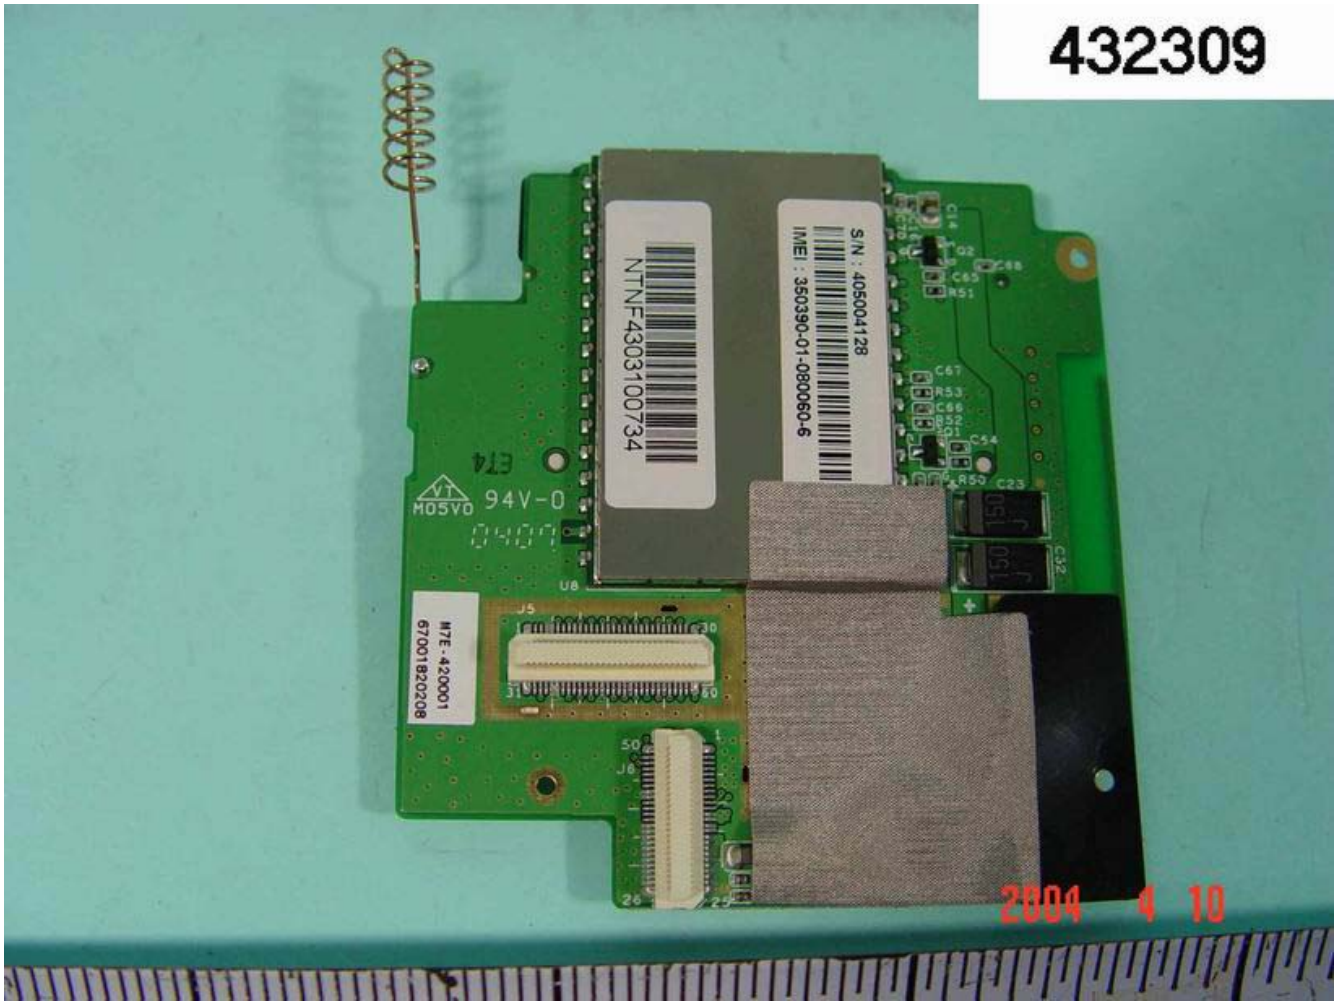
432309
NTNF43031100734
S/N : 405004128
IMEI : 350390-01-080060-6
94V-0
2004 4 10

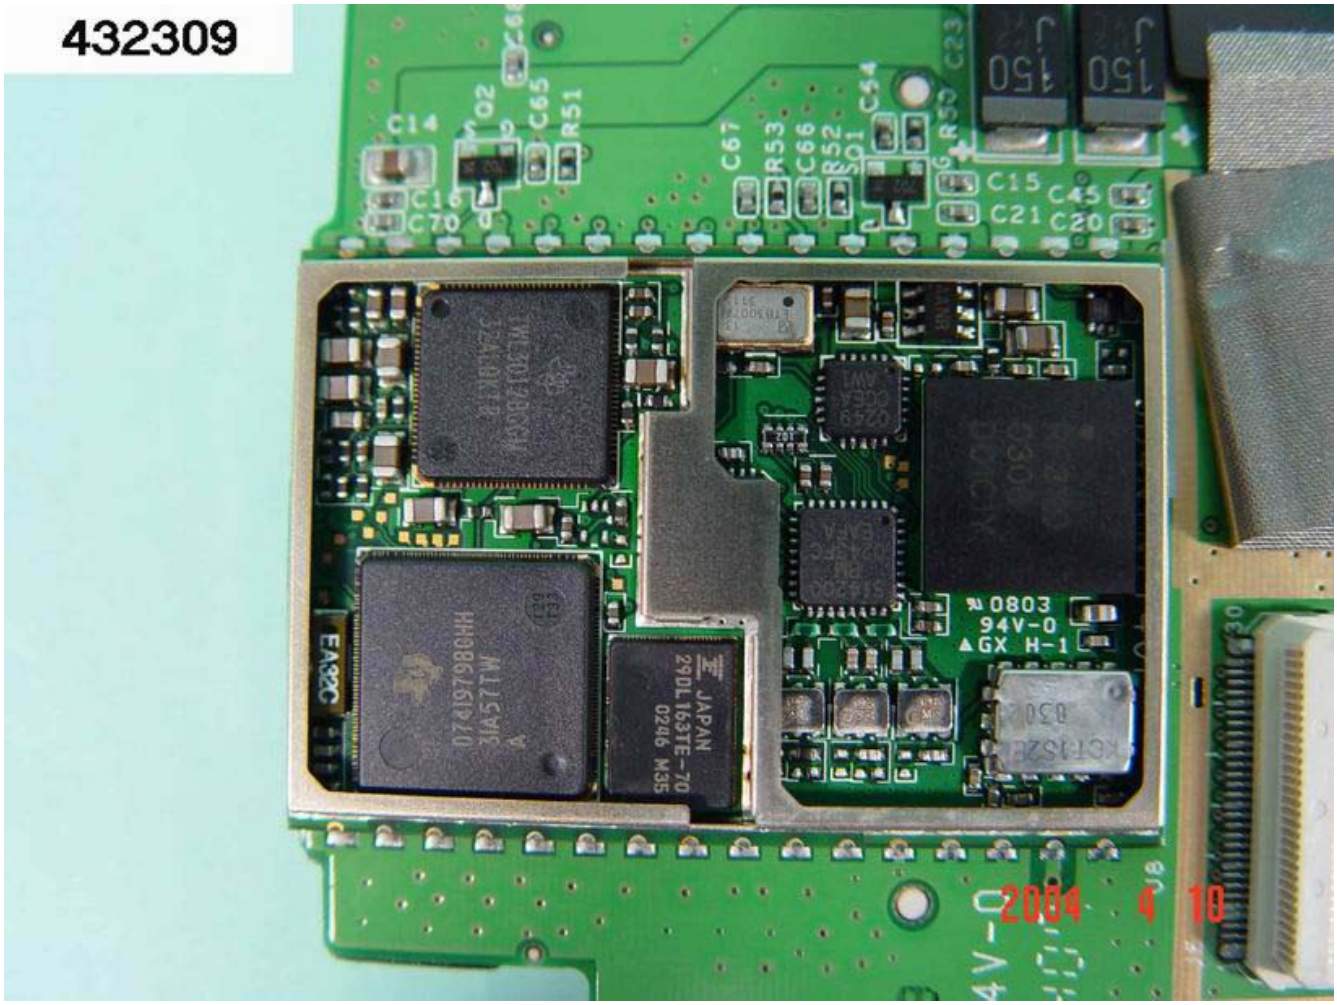
432309
C14
Q2
C65
R51
C67
R53
C66
R52
Q1
C54
R50
C23
150
150
C15
C45
C21
C20
C16
C70
0803
94V-0
GX H-1
JAPAN
29DL163TE-70
0246 M35
EA32C
2004 4 10

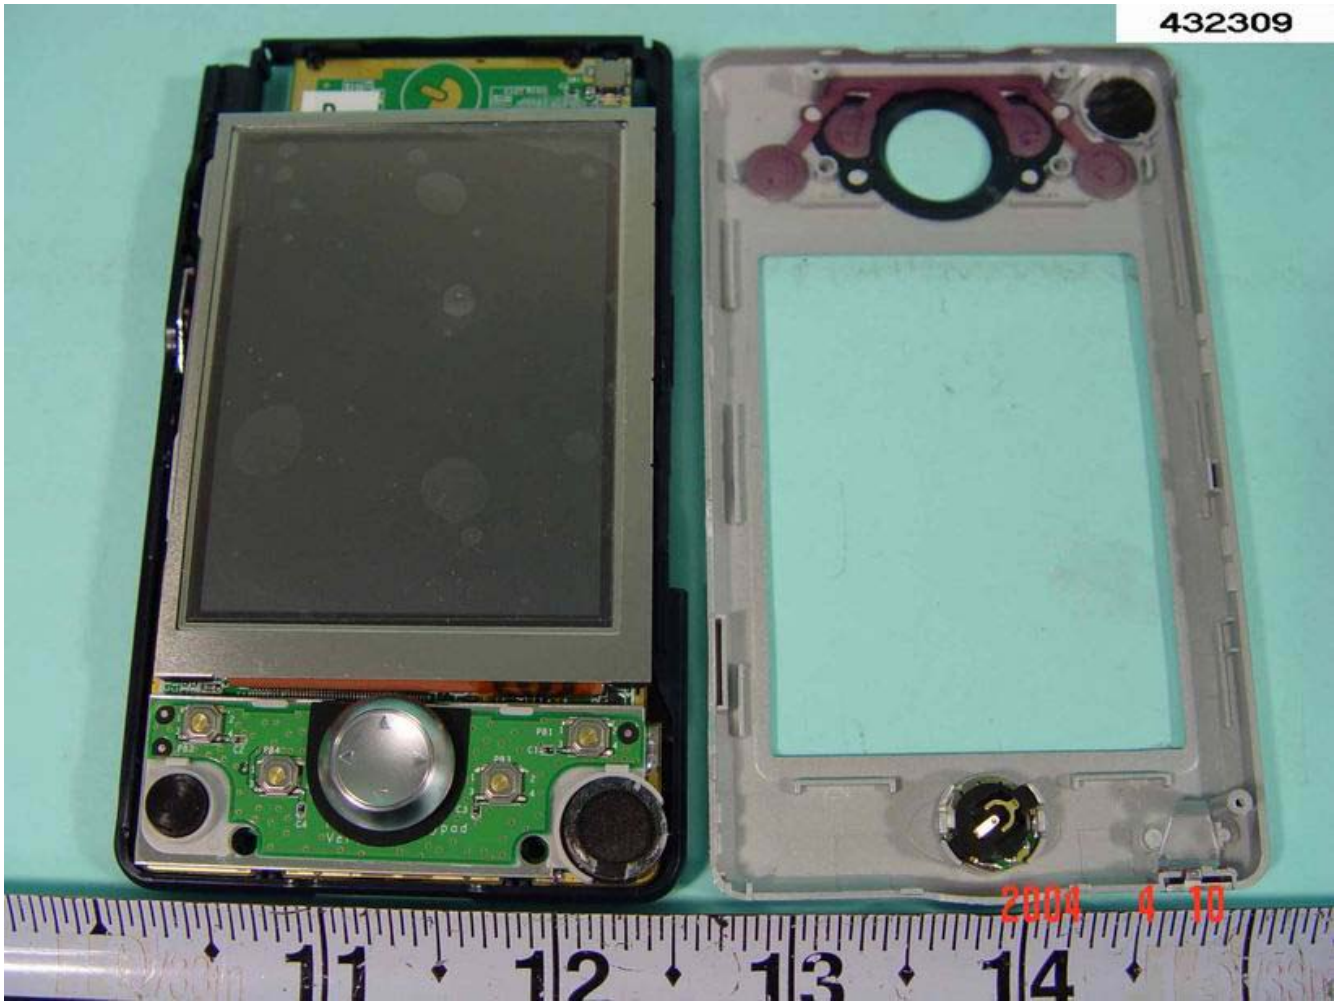
432309
2004 4 10
11
12
13
14

432309
D
P7B4109B0351
1 2 3 4 5 6
7 8 9 10 11 12
Warranty Void If Removed
04 05 Mitsutech
MADE IN JAPAN
LQ035Q7DB02D 36Y0014807C
2004 4 10

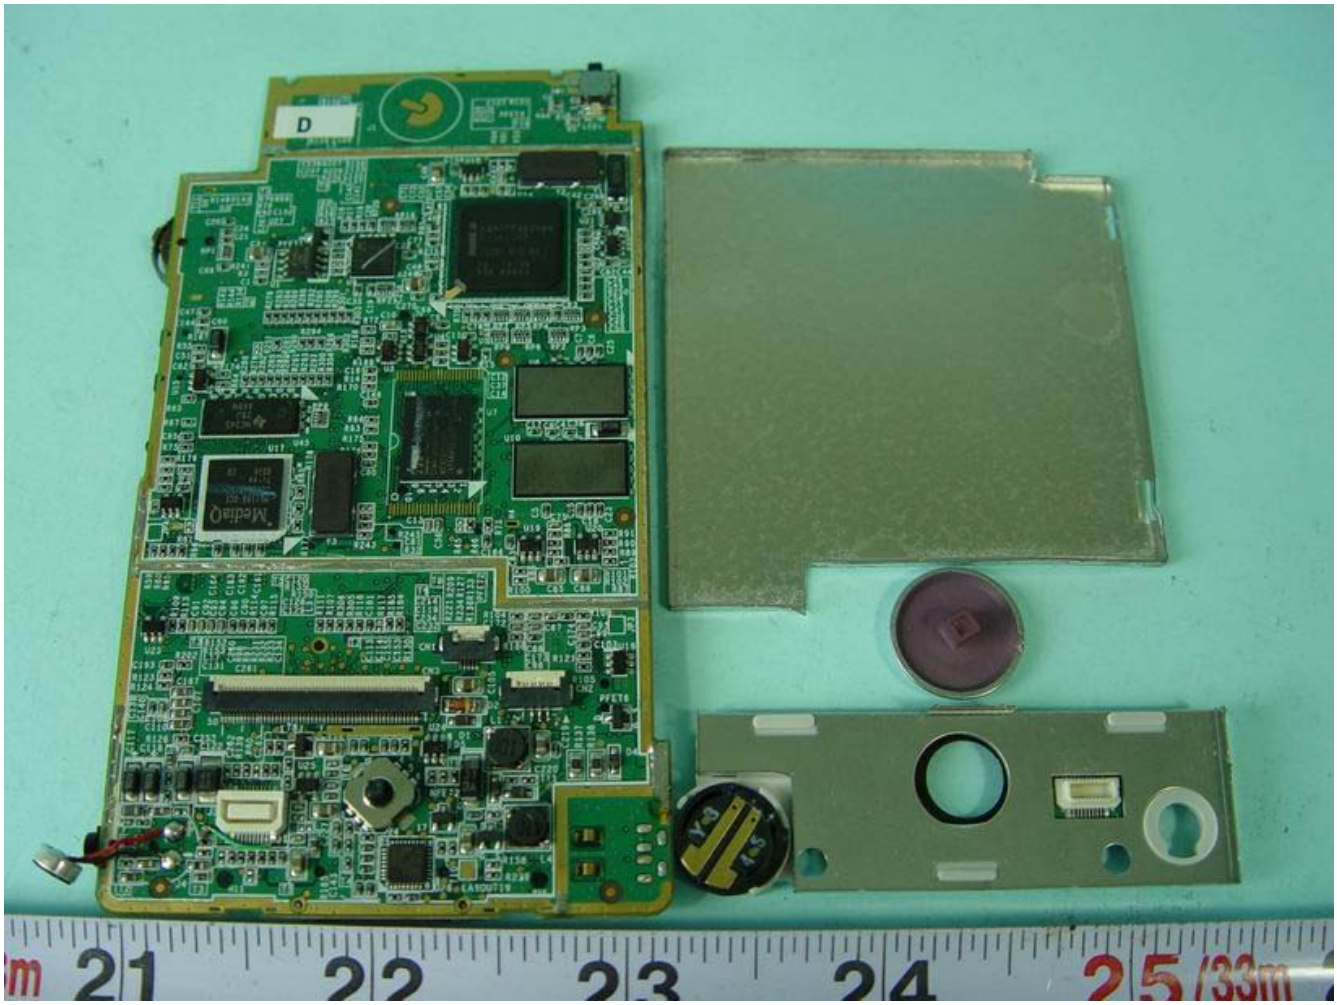
D
21
22
23
24
25

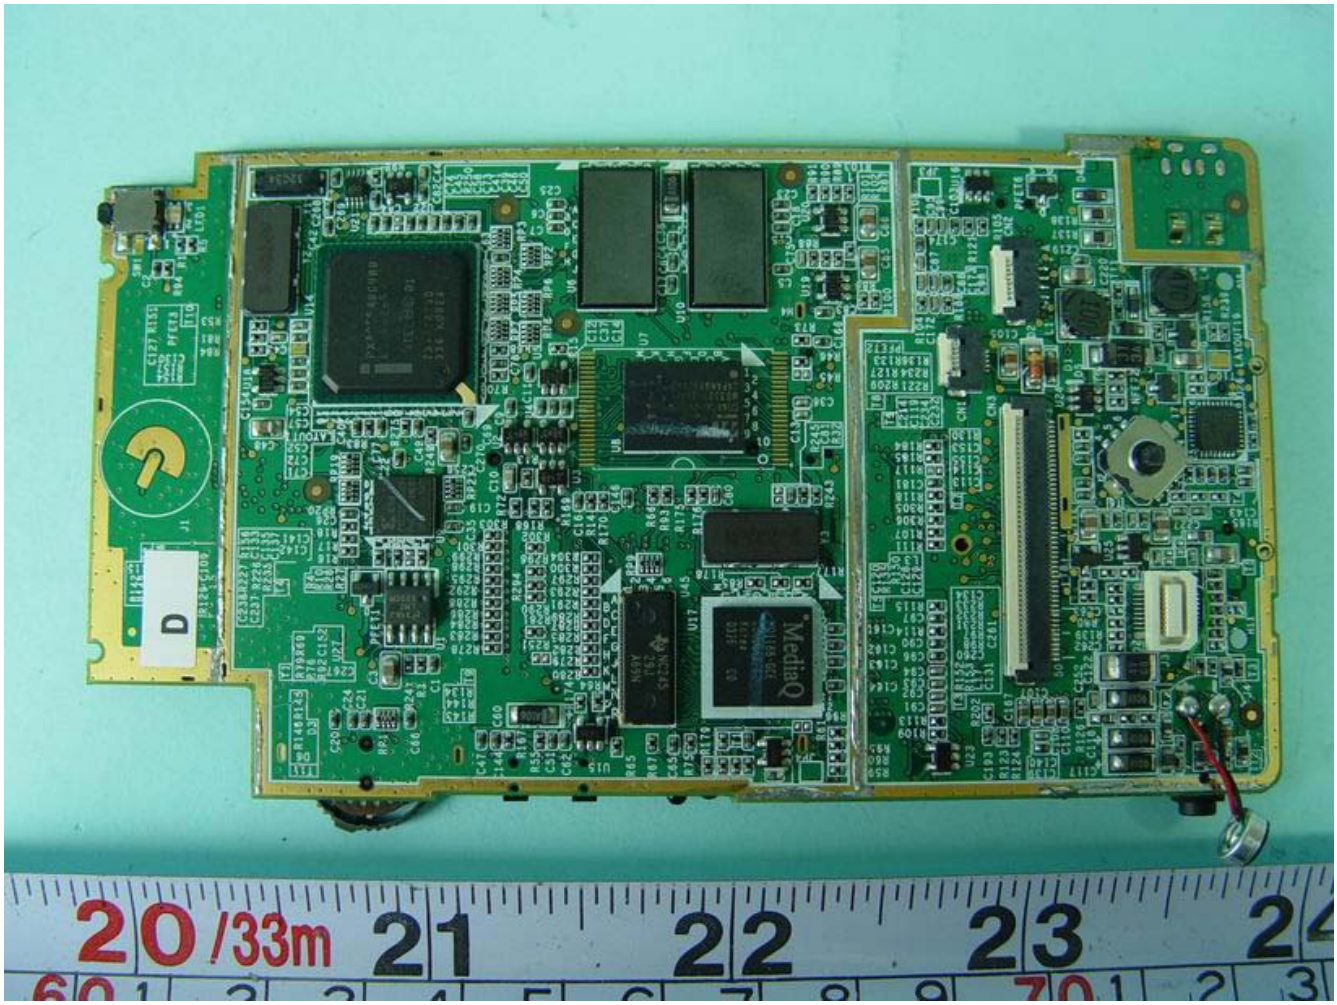
20 /33m 21 22 23

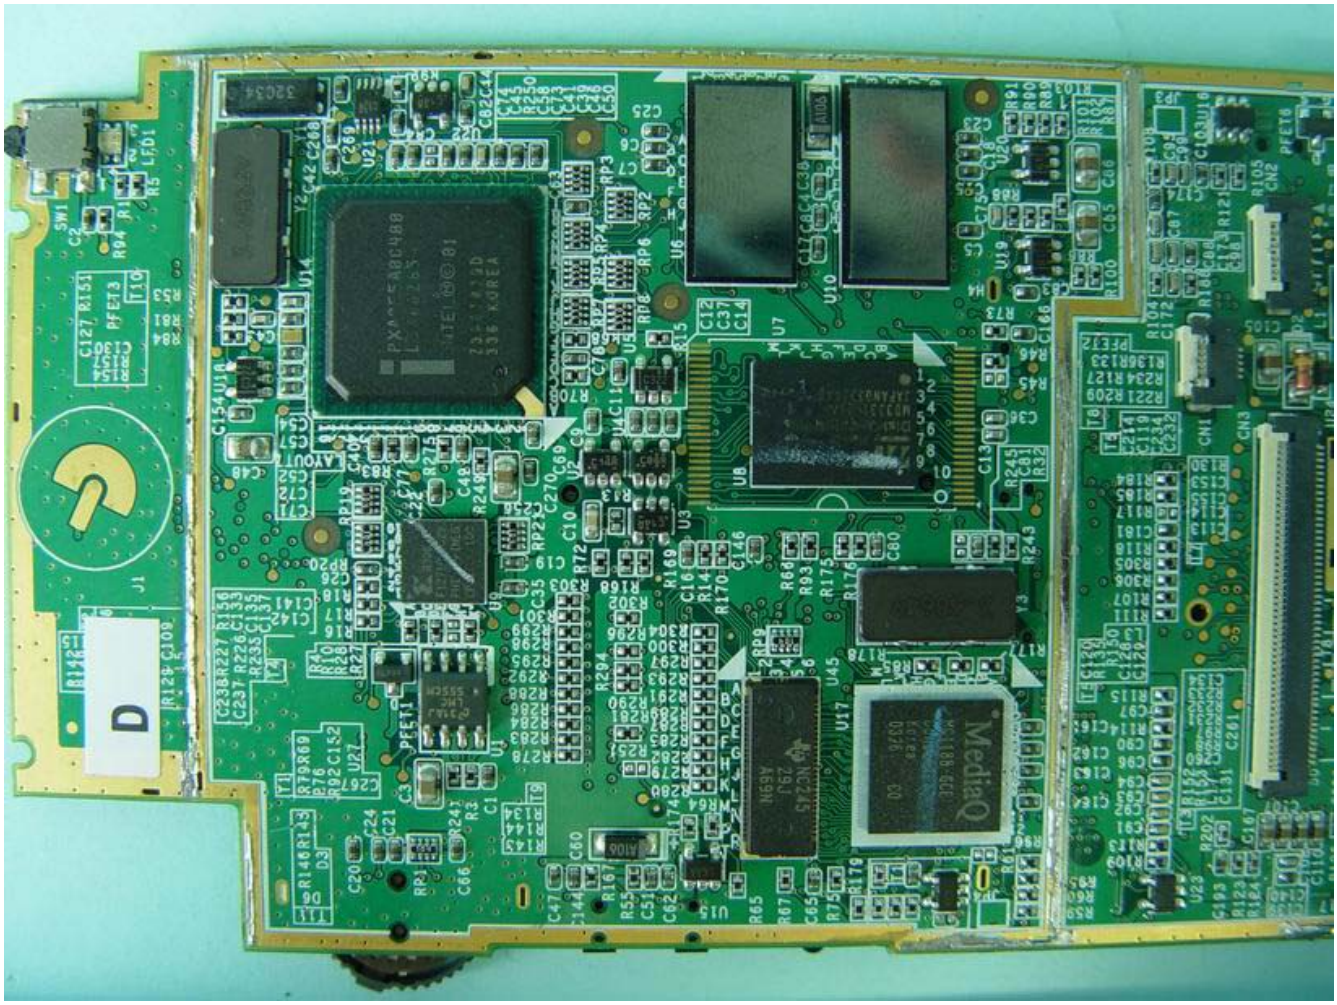

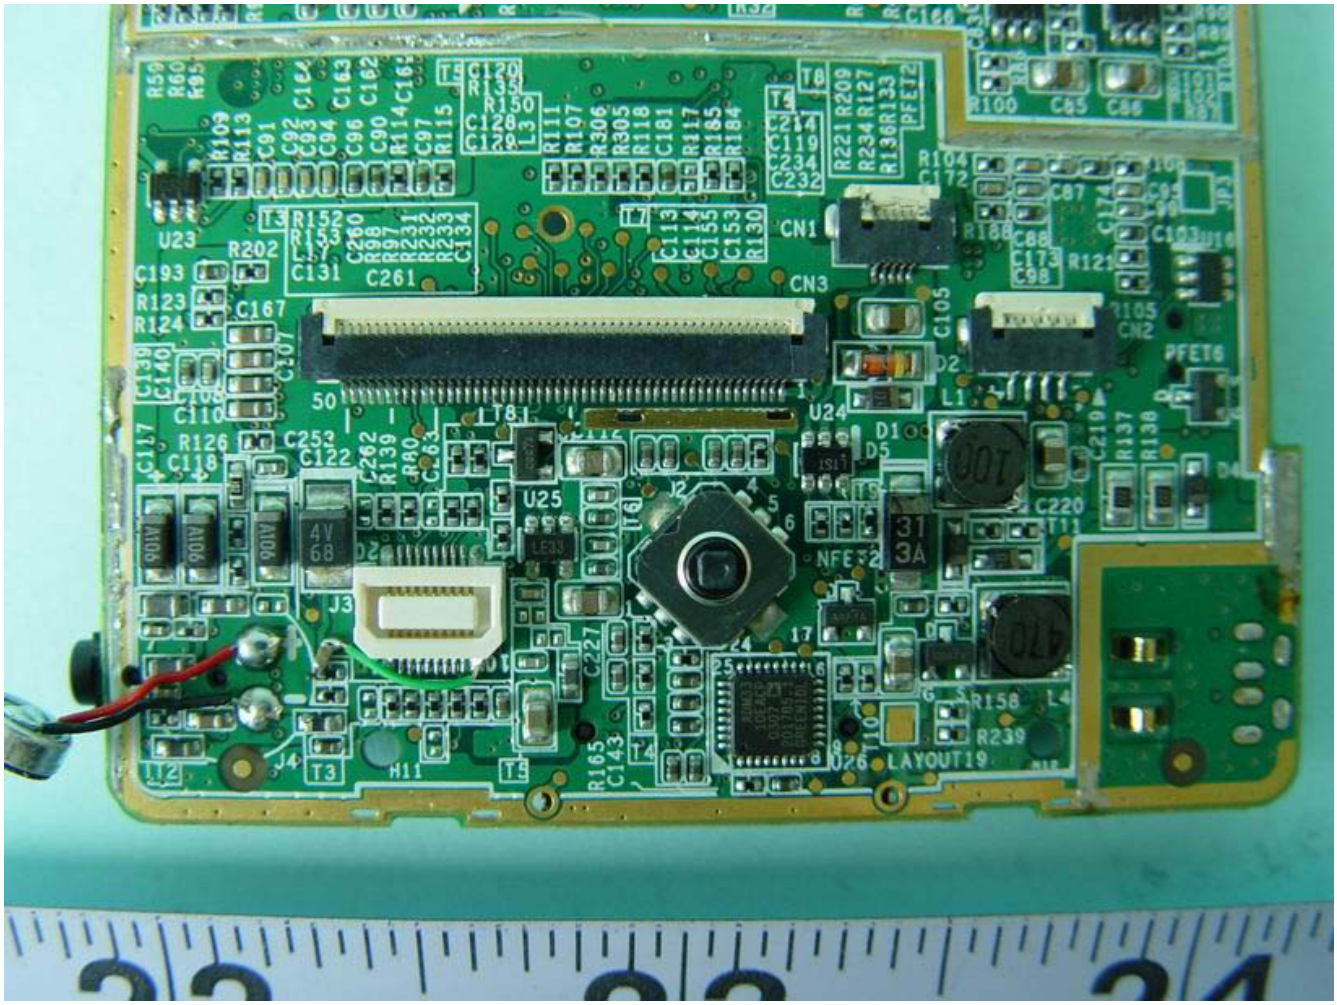
CN1
CN3
CN2
U23
U24
U25
J3
J4
LAYOUT19

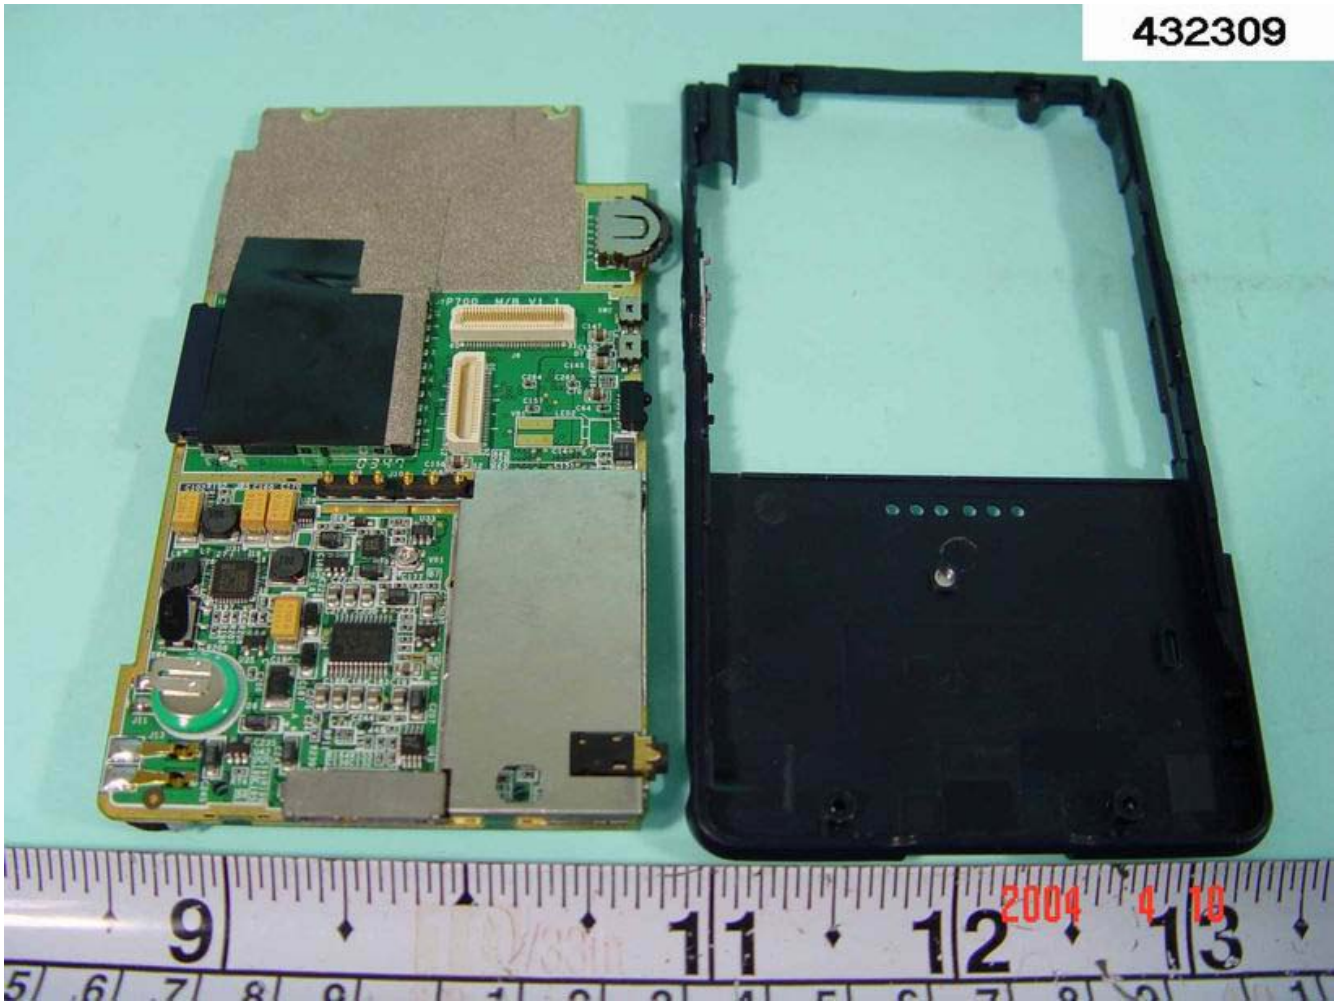
432309
2004 4 10

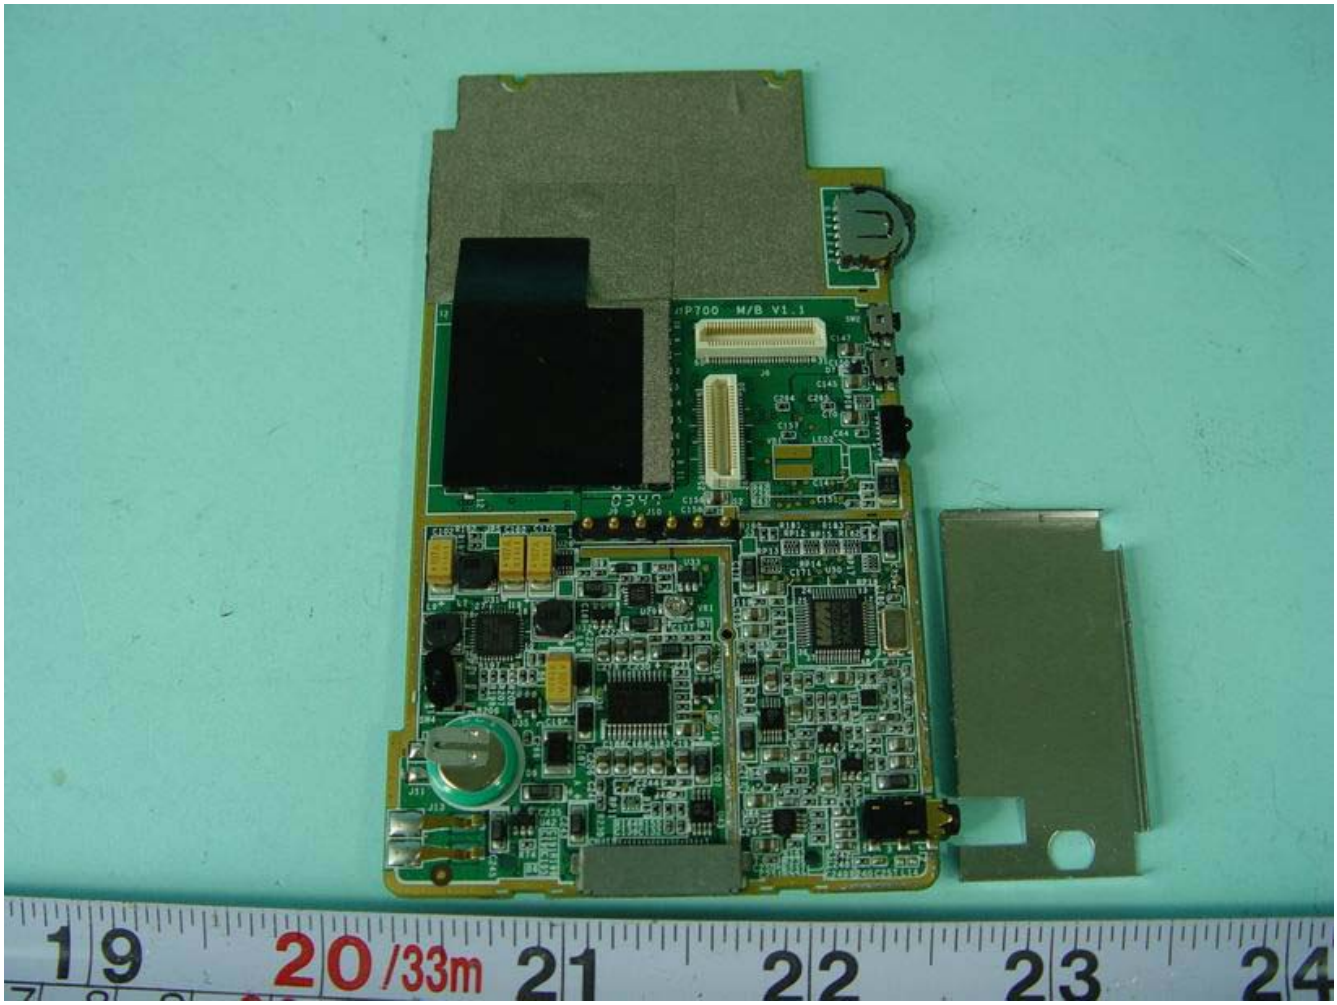
P700 M/B V1.1
19
20/33m
21
22
23
24

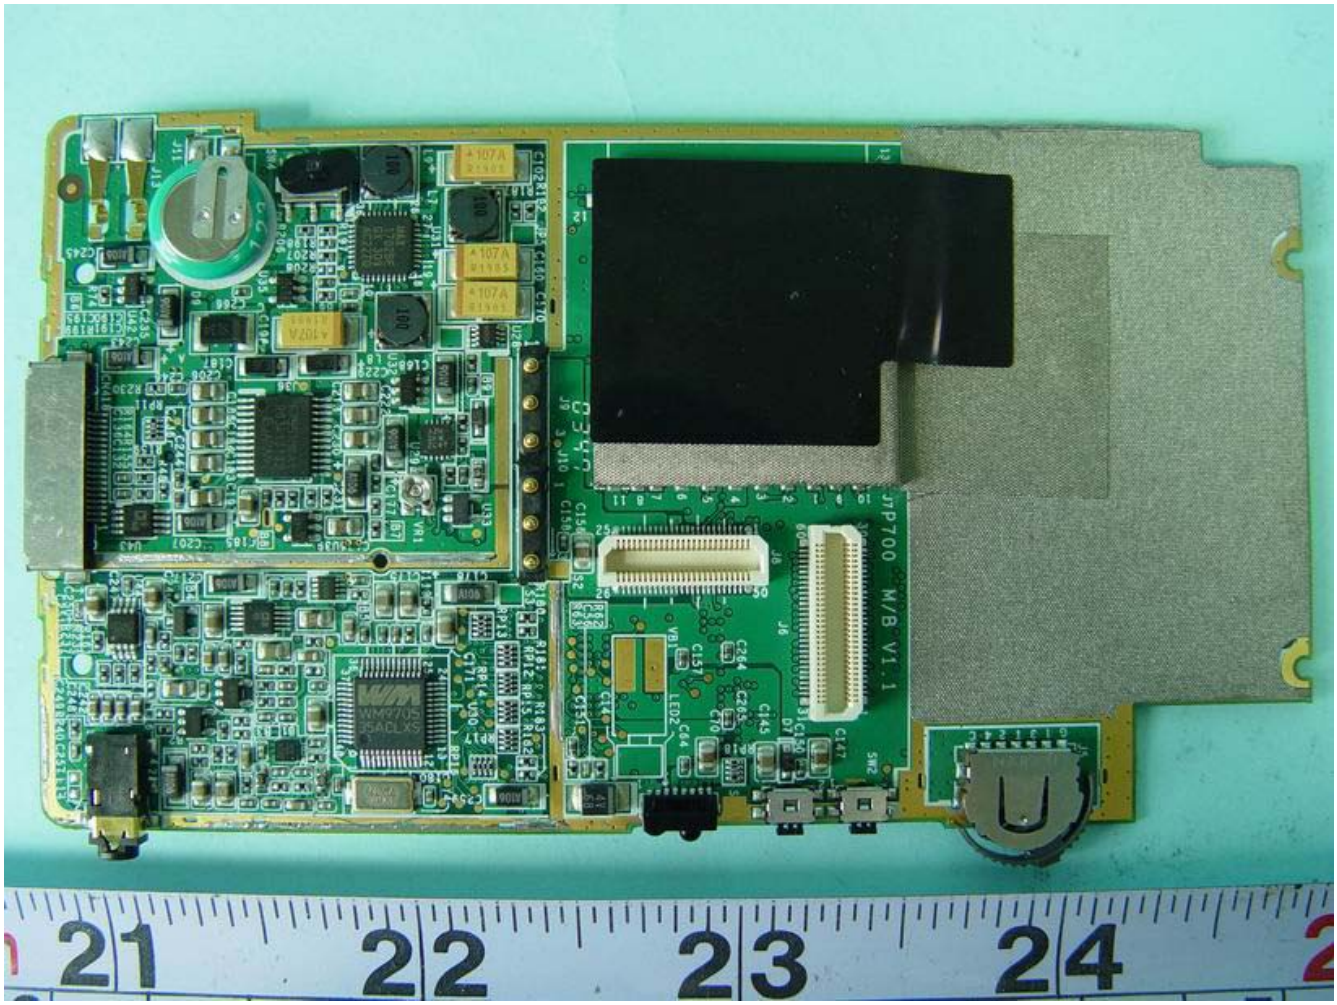
J7P700 M/B V1.1
21
22
23
24

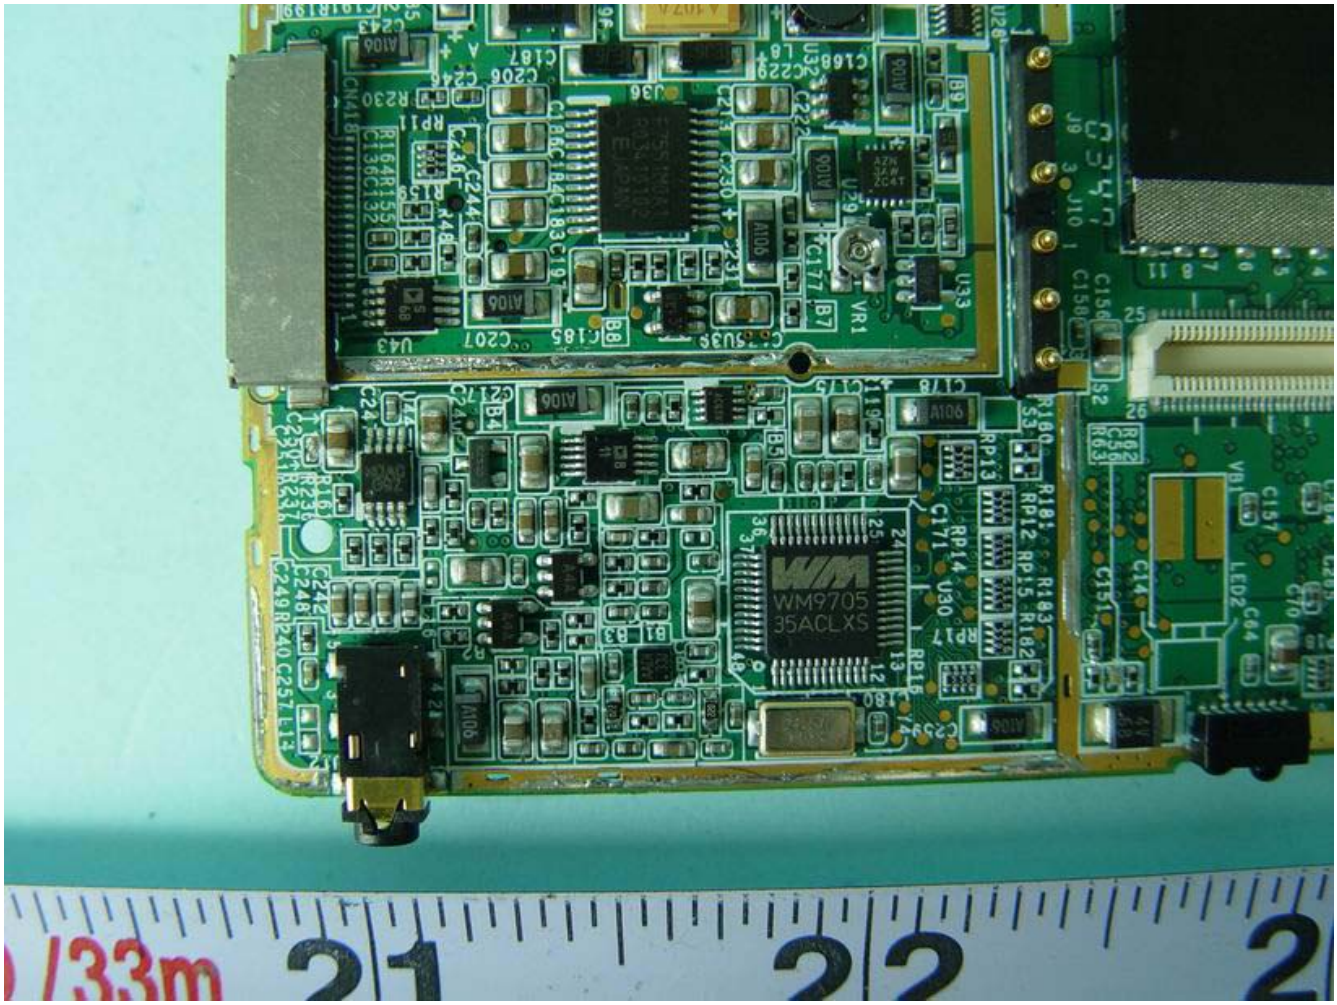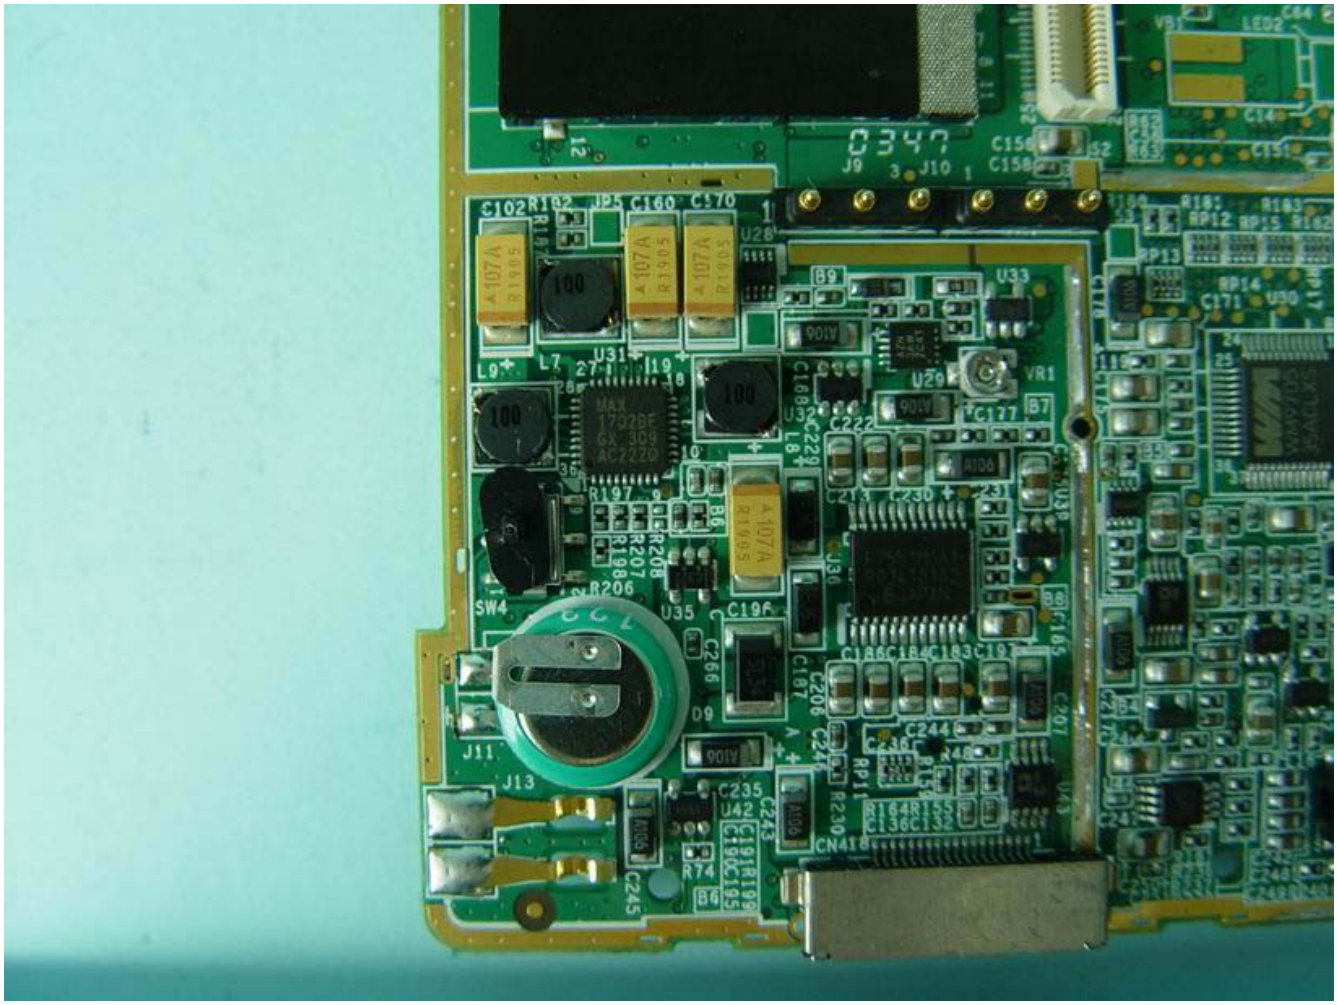
WM9705
35ACLXS
21
22