

FCC Test Report

Equipment : WiFi Dongle
Brand Name : Entone
Model No. : Kamai 500 Dual-band Wi-Fi Adapter
FCC ID : S4A99-970201-00
Standard : 47 CFR FCC Part 15.407
Operating Band : 5150 MHz – 5250 MHz
5250 MHz – 5350 MHz
5470 MHz – 5725 MHz
FCC Classification : NII
Applicant : Entone Technologies (HK) Limited
Level 28, Saxon Tower, 7 Cheung Shun Street,
Lai Chi Kok, HongKong
Manufacturer : XAVi Technologies Corporation
9F, No.129, Hsing Te Rd., Sanchung Dist.,
New Taipei City 241, Taiwan, R.O.C.
Operate Mode : Client without radar detection

The product sample received on Feb. 25, 2013 and completely tested on Jun. 11, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:


Wayne Hsu / Assistant Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Support Equipment.....	8
1.3	Testing Applied Standards	8
1.4	Testing Location Information.....	8
1.5	Measurement Uncertainty	9
2	TEST CONFIGURATION OF EUT	10
2.1	The Worst Case Modulation Configuration	10
2.2	The Worst Case Power Setting Parameter	10
2.3	The Worst Case Measurement Configuration.....	12
2.4	Test Setup Diagram	13
3	TRANSMITTER TEST RESULT	15
3.1	AC Power-line Conducted Emissions	15
3.2	Emission Bandwidth	18
3.3	RF Output Power.....	25
3.4	Peak Power Spectral Density.....	37
3.5	Peak Excursion	46
3.6	Transmitter Radiated Bandedge Emissions.....	48
3.7	Transmitter Radiated Unwanted Emissions	57
3.8	Frequency Stability.....	148
4	TEST EQUIPMENT AND CALIBRATION DATA	150
APPENDIX A. TEST PHOTOS		
APPENDIX B. PHOTOGRAPHS OF EUT		

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.3934400MHz 27.58 (Margin 20.41dB) - AV 38.47 (Margin 19.52dB) - QP	FCC 15.207	Complied
3.2	15.407(a)	Emission Bandwidth	Bandwidth [MHz] 20M:23.85 / 40M:41.84	Information only	Complied
3.3	15.407(a)	RF Output Power (Maximum Conducted Output Power)	Power [dBm] 5150-5250MHz:16.22 5250-5350MHz:15.88 5470-5725MHz:15.82	Power [dBm] 5150-5250MHz:17 5250-5350MHz:24 5470-5725MHz:24	Complied
3.4	15.407(a)	Peak Power Spectral Density	PPSD [dBm/MHz] 5150-5250MHz:3.45 5250-5350MHz:3.73 5470-5725MHz:4.63	PPSD [dBm/MHz] 5150-5250MHz:4 5250-5350MHz:11 5470-5725MHz:11	Complied
3.5	15.407(a)	Peak Excursion	8.91 dB	13 dB	Complied
3.6	15.407(b)	Transmitter Bandedge Emissions	Restricted Bands [dBuV/m at 1.0m]: 5350.030MHz 70.97 (Margin12.57dB) - PK 57.04 (Margin 6.50dB) - AV	Non-Restricted Bands: ≤ -27dBm (68.3dBuV/m@3m) Restricted Bands: FCC 15.209	Complied
3.7	15.407(b)	Transmitter Unwanted Emissions	Restricted Bands [dBuV/m at 1.5m]: 6996.000MHz 61.51 (Margin 22.00dB) - PK 61.44 (Margin 2.10dB) - AV	Non-Restricted Bands: ≤ -27dBm (68.3dBuV/m@3m) Restricted Bands: FCC 15.209	Complied
3.8	15.407(g)	Frequency Stability	6.3075 ppm	Signal shall remain in-band	Complied



SPORTON INTERNATIONAL INC.
TEL : 886-3-327-3456
FAX : 886-3-327-0973

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)	Co-location
5150-5250	a	5180-5240	36-48 [4]	1	11.11	N/A
5250-5350		5260-5320	52-64 [4]	1	10.87	
5470-5725		5500-5700	100-140 [8]	1	10.52	
5150-5250	n (HT20)	5180-5240	36-48 [4]	2	14.85	N/A
5250-5350		5260-5320	52-64 [4]	2	14.61	
5470-5725		5500-5700	100-140 [8]	2	15.82	
5150-5250	n (HT40)	5190-5230	38-46 [2]	2	16.22	N/A
5250-5350		5270-5310	54-62 [2]	2	15.88	
5470-5725		5510-5670	102-134 [3]	2	15.59	
5150-5250	n (HT20)	5180-5240	36-48 [4]	3	13.93	N/A
5250-5350		5260-5320	52-64 [4]	3	15.17	
5470-5725		5500-5700	100-140 [8]	3	15.01	
5150-5250	n (HT40)	5190-5230	38-46 [2]	3	15.28	N/A
5250-5350		5270-5310	54-62 [2]	3	15.93	
5470-5725		5510-5670	102-134 [3]	3	15.84	

Note 1: RF output power specifies that Maximum Conducted Output Power.
 Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
 Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)

1.1.2 Antenna Information

Antenna Category	
☒	Integral antenna (antenna permanently attached)
☒	Temporary RF connector provided
☐	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	Chip	4.60
2	Integral	PIFA	4.42
3	Integral	Chip	4.60

Reminder: The EUT was pre-tested Antenna Port 1, Antenna Port 2 and Antenna Port 3 for single chain, the worst case was Antenna Port 3. Therefore only the test data recorded in this report.

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	☐ Production ; ☒ Pre-Production ; ☐ Prototype
Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
☐	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
☐	Operated normally mode for worst duty cycle
☒	Operated test mode for worst duty cycle
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
☒ 100.00% - IEEE 802.11a	0
☒ 100.00% - IEEE 802.11n (HT20)	0
☒ 100.00% - IEEE 802.11n (HT40)	0

1.1.5 EUT Operational Condition

Supply Voltage	☐ AC mains	☒ DC	
Type of DC Source	☐ Internal DC supply	☒ Host	☐ Battery

1.1.6 DFS and TPC Information

The DFS Related Operating Mode(s) of the Equipment			
☐ Master			
☐ Slave with radar detection			
☒ Slave without radar detection			
Software / Firmware Version		3.1.6.0	
Communication Mode		☒ IP Based	☐ Frame Based
IEEE Std. 802.11	Frequency Range (MHz)	TPC (Transmit Power Control)	Passive Scan
a / n (HT20)	☒ 5250-5350	No	Yes
n (HT40)	☒ 5470-5725	No	Yes
	☐ 5600-5650	-	-

1.2 Support Equipment

Support Equipment- AC Conduction				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	VOSTRO 3350	DoC

Support Equipment- Radiated Emission				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	PP25L	DoC

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009
- ◆ FCC KDB 789033
- ◆ FCC KDB 644545 D01
- ◆ FCC KDB 662911
- ◆ FCC KDB 412172

1.4 Testing Location Information

Testing Location				
☒	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456 FAX : 886-3-327-0973		
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-HY	Shiming	21.8°C / 39%	Jun. 11, 2013
AC Conduction	CO04-HY	Zeus	24.3°C / 56%	Mar. 29, 2013
Radiated Emission	03CH02-HY	Hsiao	22.8°C / 62%	Mar. 28, 2013~ Jun. 08, 2013

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing			
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS
11a,6-54Mbps	1	6-54Mbps	6 Mbps
HT20,M8-15	2	M8-15	M8
HT40,M8-15	2	M8-15	M8
HT20,M16-23	3	M16-23	M16
HT40, M16-23	3	M16-23	M16

2.2 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (5150-5250MHz band)						
Test Software Version	RT3573 QA_V1.0.1.9					
Modulation Mode	N _{TX}	Test Frequency (MHz)				
		NCB: 20MHz			NCB: 40MHz	
		5180	5200	5240	5190	5230
11a,6-54Mbps	1	02	01	01	-	-
HT20,M8-15	2	06/09	06/09	06/09	-	-
HT40,M8-15	2	-	-	-	06/09	06/09
HT20,M16-23	3	05/07/0B	07/09/0C	0C/0E/0F	-	-
HT40, M16-23	3	-	-	-	05/07/0A	0D/0F/12

The Worst Case Power Setting Parameter (5250-5350MHz band)						
Test Software Version	RT3573 QA_V1.0.1.9					
Modulation Mode	N _{TX}	Test Frequency (MHz)				
		NCB: 20MHz			NCB: 40MHz	
		5260	5300	5320	5270	5310
11a,6-54Mbps	1	00	01	02	-	-
HT20,M8-15	2	05/09	05/09	07/09	-	-
HT40,M8-15	2	-	-	-	06/0A	06/09
HT20,M16-23	3	0C/0F/0F	0E/10/0F	10/10/10	-	-
HT40, M16-23	3	-	-	-	0F/11/11	0F/10/0F

The Worst Case Power Setting Parameter (5470-5725MHz band)							
Test Software Version	RT3573 QA_V1.0.1.9						
Modulation Mode	N _{TX}	Test Frequency (MHz)					
		NCB: 20MHz			NCB: 40MHz		
		5500	5580	5700	5510	5550	5670
11a,6-54Mbps	1	0A	0F	10	-	-	-
HT20,M8-15	2	10/0F	13/12	18/15	-	-	-
HT40,M8-15	2	-	-	-	11/10	12/12	17/14
HT20,M16-23	3	17/16/0E	1B/1A/13	1D/18/1B	-	-	-
HT40, M16-23	3	-	-	-	19/18/10	1B/1A/12	1B/18/19


2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	AC Power & Radio link (WLAN)


The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Peak Power Spectral Density, Emission Bandwidth, Peak Excursion
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11a, HT20, HT40

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
User Position	☒ EUT will be placed in fixed position. The worst planes is X.		
	☐ EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes.		
	☐ EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.		
Operating Mode < 1GHz	☒ 1. Transmitter Mode		
Modulation Mode	11a, HT20, HT40		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			


2.4 Test Setup Diagram

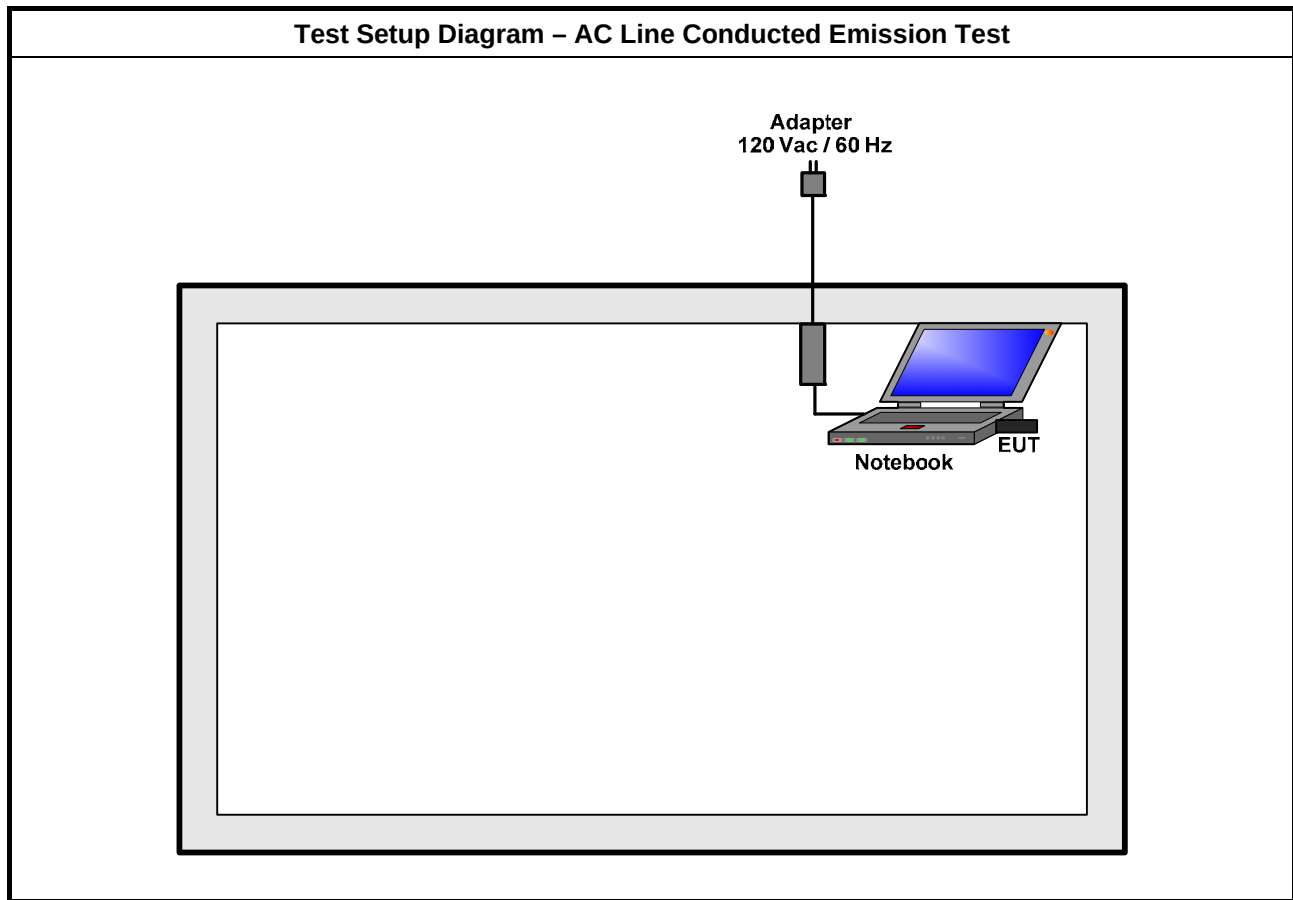

Test Setup Diagram - Radiated Test (Below 1GHz)

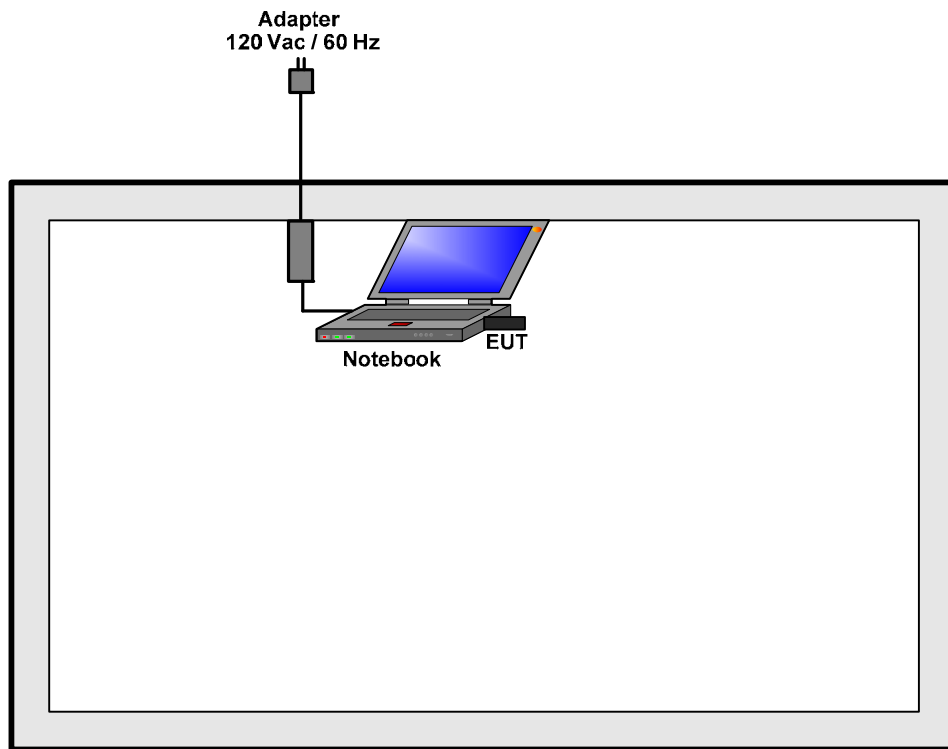

Test Setup Diagram - Radiated Test (Above 1GHz)

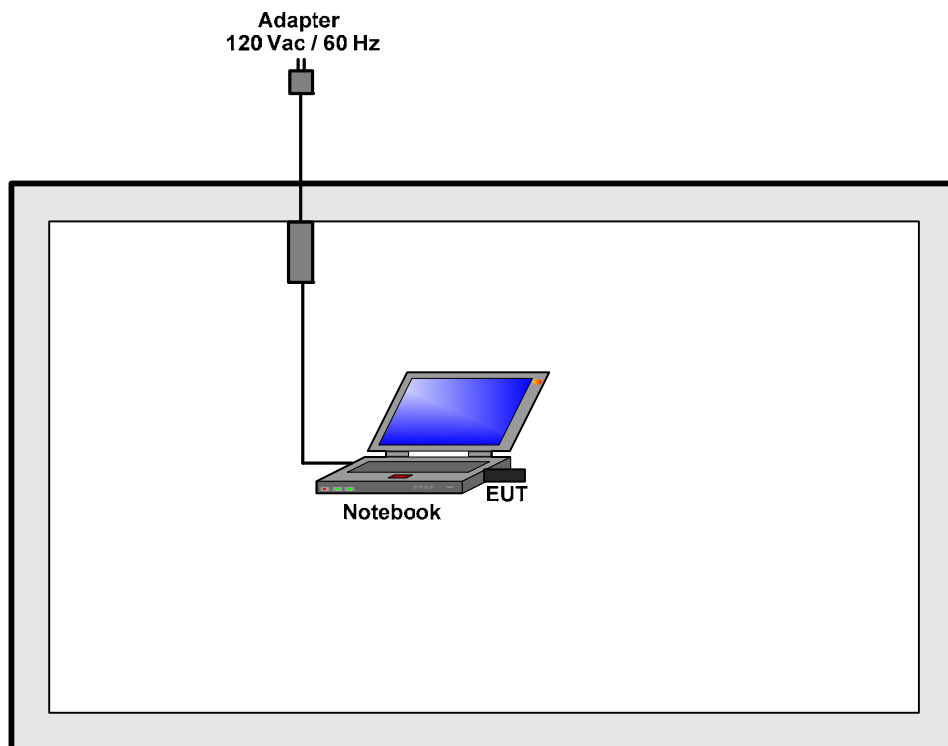

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

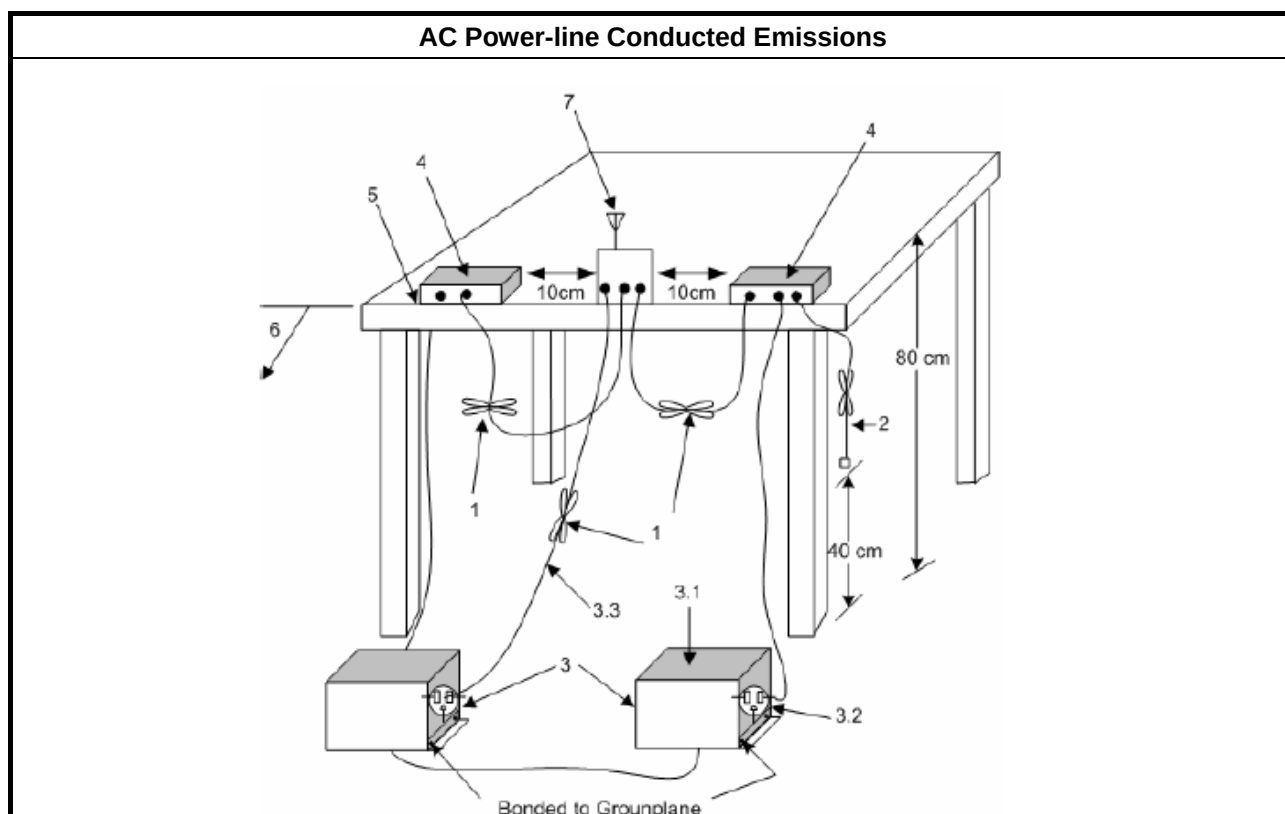


3.1.5 Test Result of AC Power-line Conducted Emissions

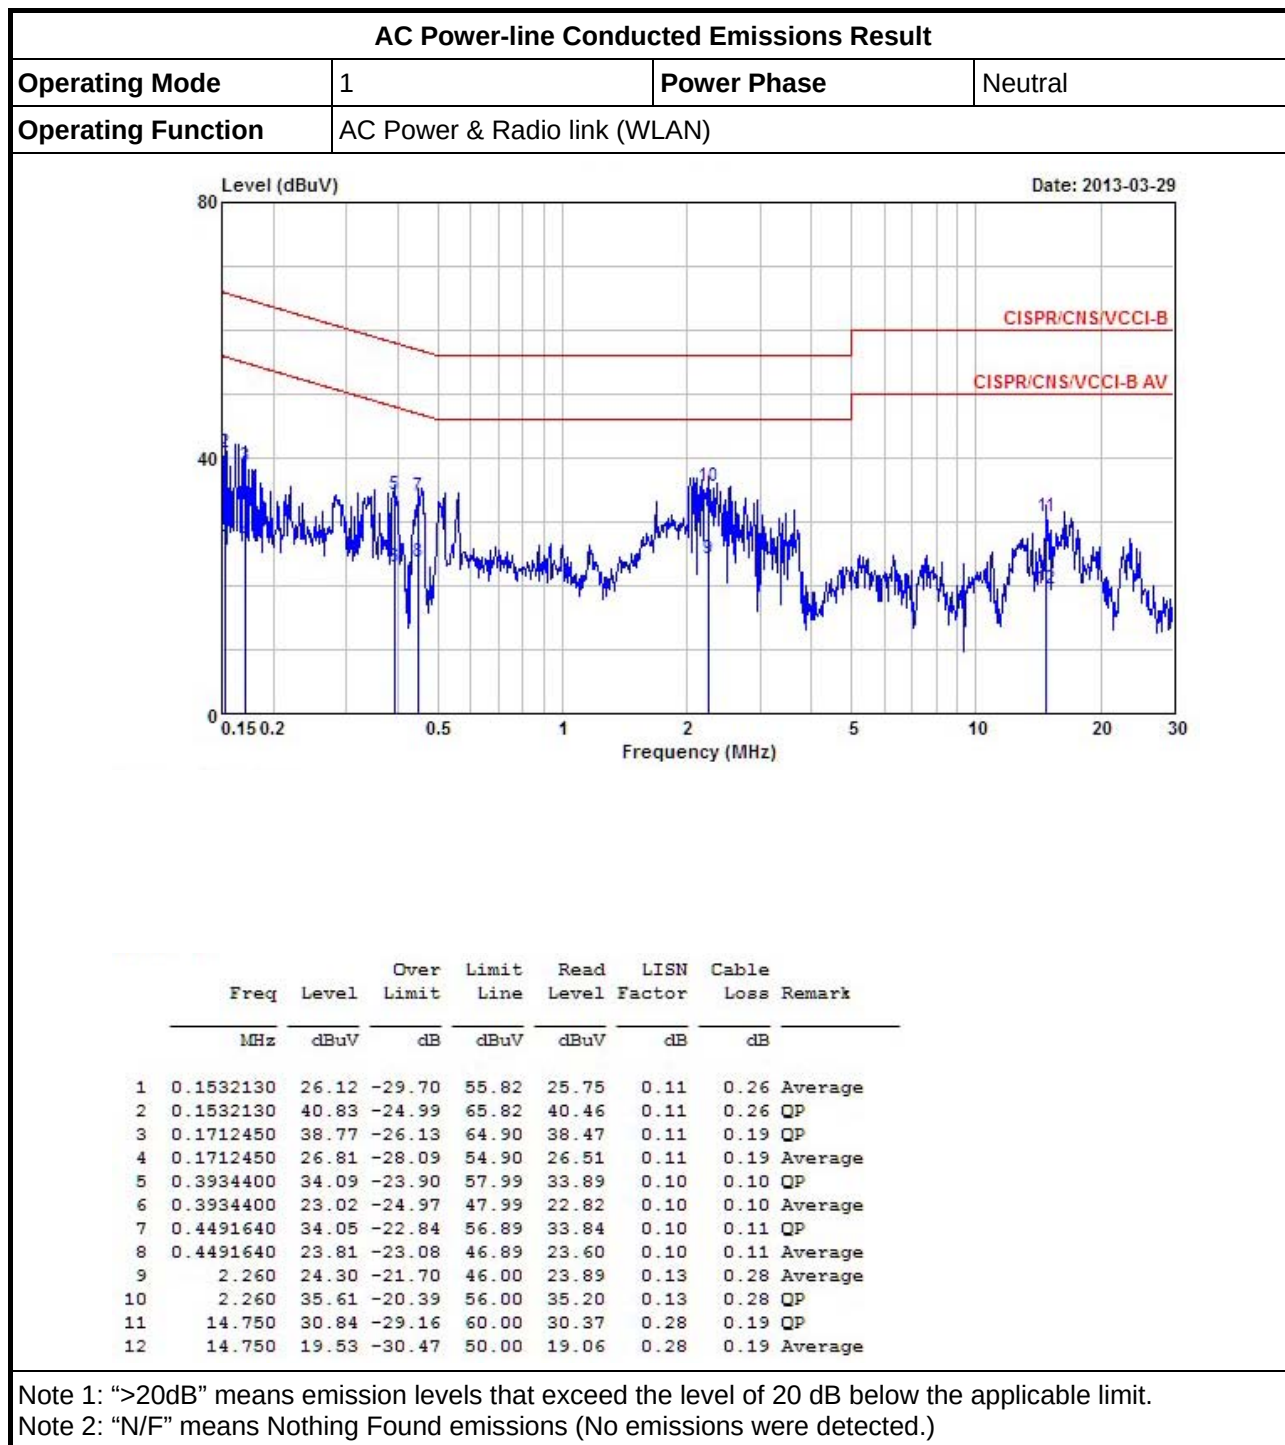

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	AC Power & Radio link (WLAN)		

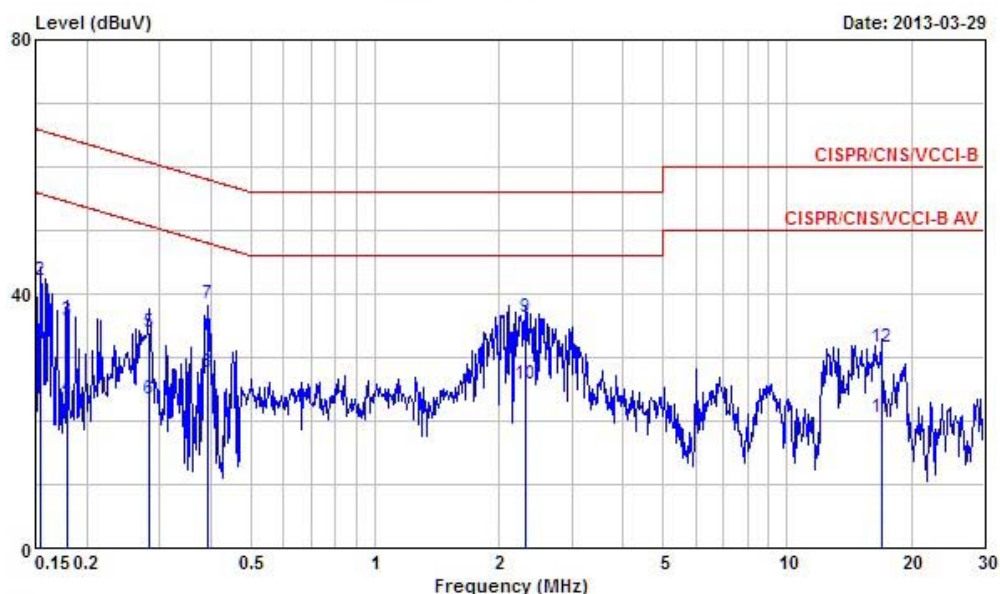

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1540270	26.27	-29.51	55.78	25.78	0.24	0.25	Average
2	0.1540270	42.15	-23.63	65.78	41.66	0.24	0.25	QP
3	0.1786590	35.72	-28.83	64.55	35.32	0.23	0.17	QP
4	0.1786590	23.62	-30.93	54.55	23.22	0.23	0.17	Average
5	0.2832790	34.06	-26.66	60.72	33.74	0.22	0.10	QP
6	0.2832790	23.41	-27.31	50.72	23.09	0.22	0.10	Average
7	0.3934400	38.47	-19.52	57.99	38.15	0.22	0.10	QP
8	0.3934400	27.58	-20.41	47.99	27.26	0.22	0.10	Average
9	2.310	36.25	-19.75	56.00	35.71	0.26	0.28	QP
10	2.310	25.77	-20.23	46.00	25.23	0.26	0.28	Average
11	16.930	20.55	-29.45	50.00	19.82	0.53	0.20	Average
12	16.930	31.62	-28.38	60.00	30.89	0.53	0.20	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth (EBW) Limit

Emission Bandwidth (EBW) Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, the maximum conducted output power shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☐	For the 5.725-5.825 GHz band, the maximum conducted output power shall not exceed the lesser of 1 W or 17 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz
LE-LAN Devices	
☒	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☒	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☒	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.725-5.825 GHz band, the maximum e.i.r.p. shall not exceed 4.0 W or 23 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
☒	For the emission bandwidth shall be measured using one of the options below:
☒	Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☒	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☒	The EUT supports diversity transmitting and the results on transmit chain port 3 is the worst case.
☒	The EUT supports multiple transmit chains using options given below:
☐	Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 3.
☒	Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

3.2.4 Test Setup

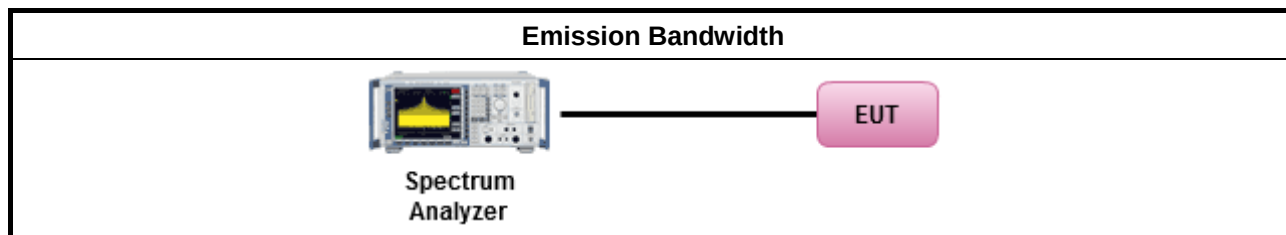

3.2.5 Test Result of Emission Bandwidth


UNII Emission Bandwidth Result (5150-5250MHz band)										
Condition			Emission Bandwidth (MHz)							
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth			26dB Bandwidth			Power Limit	
			Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 1	Chain-Port 2	Chain-Port 3	99% BW	26dB BW
11a	1	5180	16.56	-	-	18.85	-	-	16.19	16.75
11a	1	5200	16.44	-	-	19.77	-	-	16.16	16.96
11a	1	5240	16.44	-	-	18.42	-	-	16.16	16.65
HT20	2	5180	17.56	17.61	-	19.95	19.47	-	16.45	16.89
HT20	2	5200	17.51	17.59	-	19.32	19.87	-	16.43	16.86
HT20	2	5240	17.59	17.66	-	19.65	21.35	-	16.45	16.93
HT40	2	5190	36.18	36.06	-	40.12	39.16	-	19.57	19.93
HT40	2	5230	35.86	36.18	-	38.76	39.24	-	19.55	19.88
HT20	3	5180	17.46	17.54	17.59	19.05	19.47	19.72	16.42	16.80
HT20	3	5200	17.54	17.56	17.61	19.60	19.60	19.75	16.44	16.92
HT20	3	5240	17.56	17.51	17.56	19.25	19.05	19.70	16.43	16.80
HT40	3	5190	35.94	35.98	36.06	39.24	40.40	39.84	19.56	19.94
HT40	3	5230	36.54	36.06	36.18	40.76	39.08	39.20	19.57	19.92
Result			Complied							

UNII Emission Bandwidth Result (5250-5350MHz band)										
Condition			Emission Bandwidth (MHz)							
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth			26dB Bandwidth			Power Limit	
			Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 1	Chain-Port 2	Chain-Port 3	99% BW	26dB BW
11a	1	5260	16.54	-	-	18.75	-	-	20.19	20.73
11a	1	5300	16.79	-	-	20.52	-	-	20.25	21.12
11a	1	5320	16.51	-	-	19.87	-	-	20.18	20.98
HT20	2	5260	17.54	17.71	-	19.35	19.82	-	20.44	20.87
HT20	2	5300	17.64	17.56	-	19.80	19.80	-	20.45	20.97
HT20	2	5320	17.61	17.51	-	19.82	19.02	-	20.43	20.79
HT40	2	5270	35.86	36.10	-	38.80	40.60	-	23.55	23.89
HT40	2	5310	36.10	35.90	-	40.16	40.36	-	23.55	24.04
HT20	3	5260	17.46	17.61	17.59	19.30	19.67	19.35	20.42	20.86
HT20	3	5300	17.59	17.46	17.51	19.95	19.10	19.42	20.42	20.81
HT20	3	5320	17.54	17.44	17.61	19.02	19.15	19.60	20.42	20.79
HT40	3	5270	36.02	36.18	35.90	36.02	36.18	35.90	23.55	23.93
HT40	3	5310	36.02	35.86	36.06	36.02	35.86	36.06	23.55	23.90
Result			Complied							

UNII Emission Bandwidth Result (5470-5725MHz band)										
Condition			Emission Bandwidth (MHz)							
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth			26dB Bandwidth			Power Limit	
			Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 1	Chain-Port 2	Chain-Port 3	99% BW	26dB BW
11a	1	5500	16.56	-	-	18.67	-	-	20.19	20.71
11a	1	5580	16.69	-	-	22.12	-	-	20.22	21.45
11a	1	5700	16.61	-	-	19.27	-	-	20.20	20.85
HT20	2	5500	17.54	17.51	-	19.40	19.22	-	20.43	20.84
HT20	2	5580	17.59	17.69	-	19.47	19.42	-	20.45	20.88
HT20	2	5700	17.71	17.54	-	23.85	19.60	-	20.44	20.92
HT40	2	5510	35.82	36.06	-	39.48	39.56	-	23.54	23.96
HT40	2	5550	36.14	35.74	-	38.56	40.24	-	23.53	23.86
HT40	2	5670	36.22	36.10	-	39.40	39.56	-	23.58	23.95
HT20	3	5500	17.54	17.51	17.61	19.90	19.10	21.60	20.43	20.81
HT20	3	5580	17.49	17.56	17.69	19.67	19.50	19.82	20.43	20.90
HT20	3	5700	17.66	17.51	17.59	19.87	19.12	19.17	20.43	20.81
HT40	3	5510	35.82	36.10	36.22	39.60	39.76	41.84	23.54	23.98
HT40	3	5550	36.22	35.98	35.82	40.16	39.56	39.76	23.54	23.97
HT40	3	5670	35.78	36.06	36.10	39.24	40.48	40.20	23.54	23.94
Result			Complied							


5150-5250MHz - Worst Emission Bandwidth Plots

11a

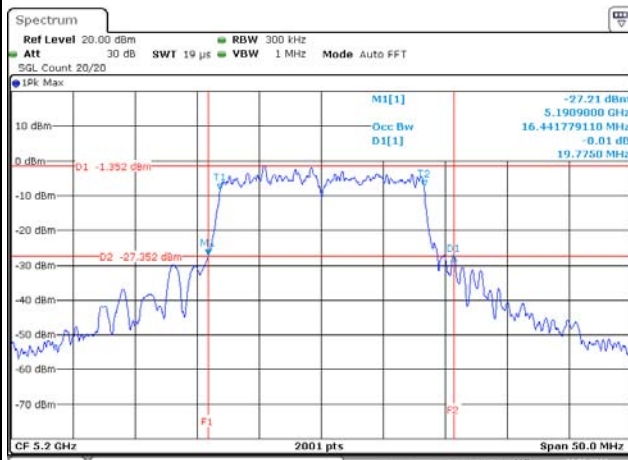


Date: 11. JUN. 2013 20:24:38

HT20

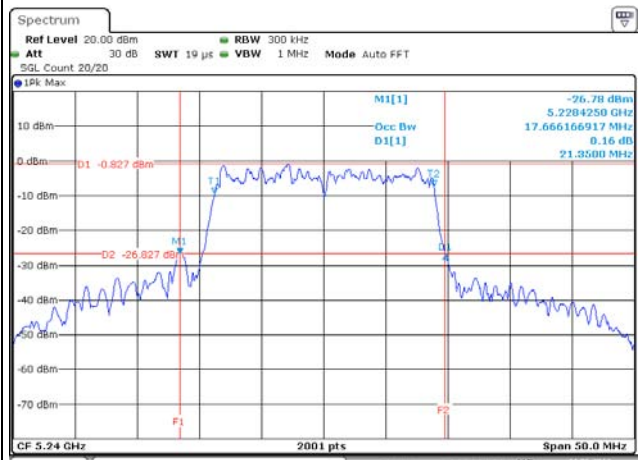

Date: 11. JUN. 2013 20:44:42


HT40

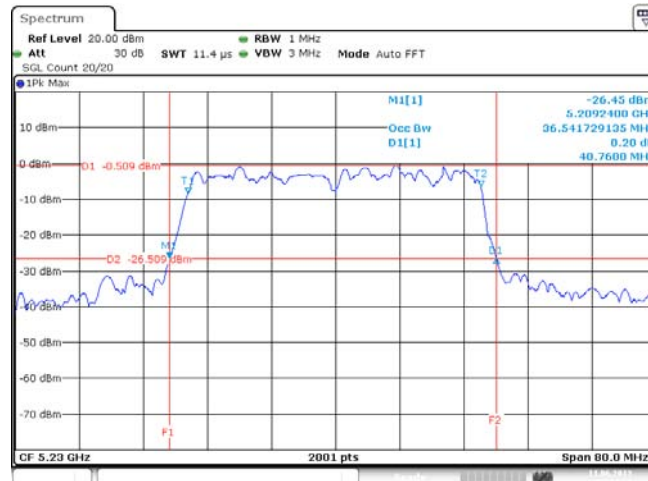


Date: 11. JUN. 2013 22:03:20

5250-5350MHz - Worst Emission Bandwidth Plots


11a

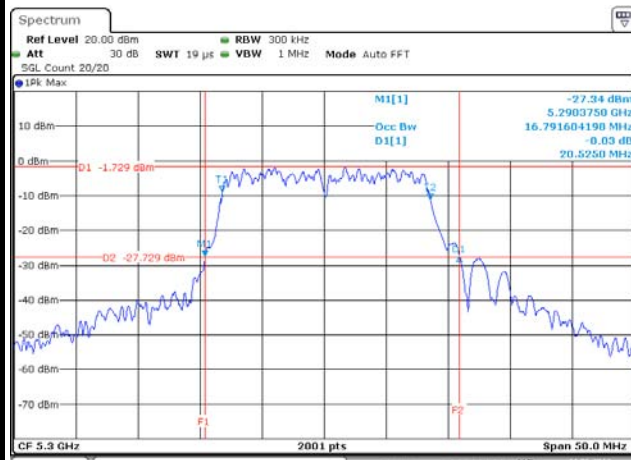

HT20

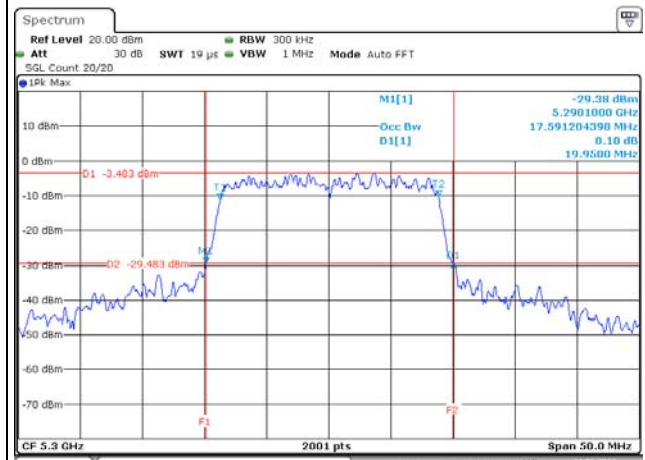


HT40

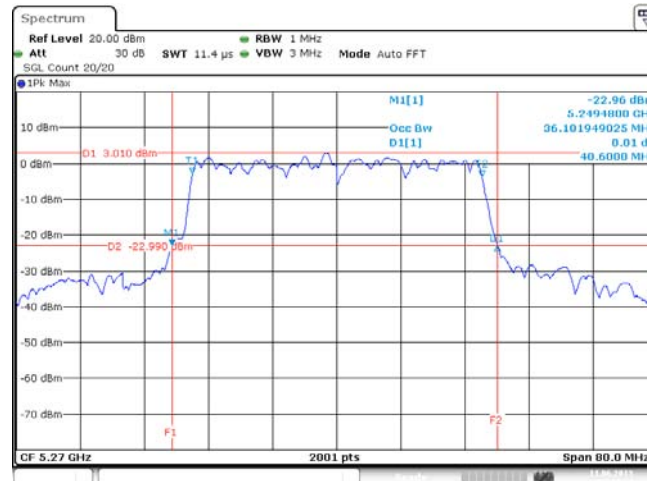


5470-5725MHz - Worst Emission Bandwidth Plots


11a

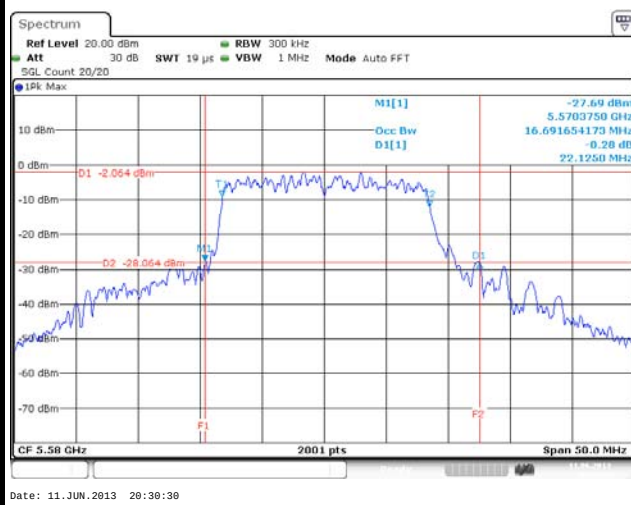

HT20

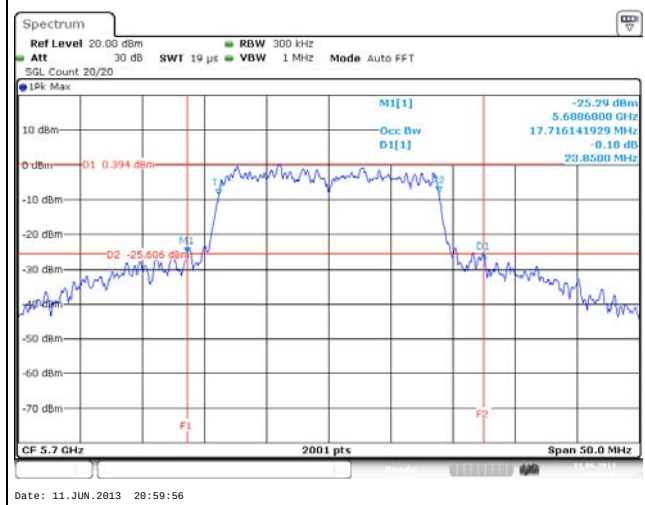

HT40

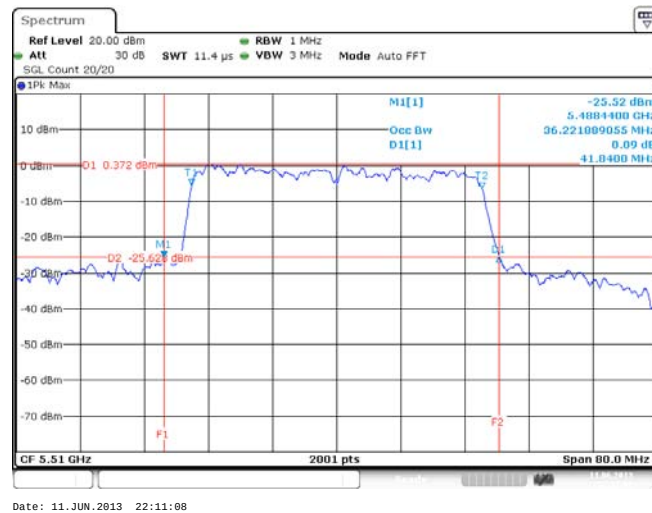

3.3 RF Output Power

3.3.1 RF Output Power Limit

Maximum Conducted Output Power Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.
☒	For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒	For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☐	For the 5.725-5.825 GHz band:
☐	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W or 17 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$.
☐	Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W or 17 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$.
LE-LAN Devices	
☒	For the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☒	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☒	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.725-5.825 GHz band, the maximum e.i.r.p. shall not exceed 4.0 W or 23 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	Point-to-multipoint systems (P2M): the maximum e.i.r.p. shall not exceed 4.0 W or 23 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	Point-to-point systems (P2P): the maximum e.i.r.p. shall not exceed 4.0 W or 23 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. If e.i.r.p. > 36 dBm, $G_{TX} \leq P_{Out}$
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
☒	Maximum Conducted Output Power
	[duty cycle $\geq 98\%$ or external video / power trigger]
☒	Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle $< 98\%$ and average over on/off periods with duty factor
☐	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
☐	Refer as FCC KDB 789033, clause E Method PM (using an RF average power meter).
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☒	The EUT supports diversity transmitting and the results on transmit chain port 3 is the worst case.
☒	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
☒	If multiple transmit chains, EIRP calculation could be following as methods: $P_{\text{total}} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $\text{EIRP}_{\text{total}} = P_{\text{total}} + \text{DG}$

3.3.4 Test Setup

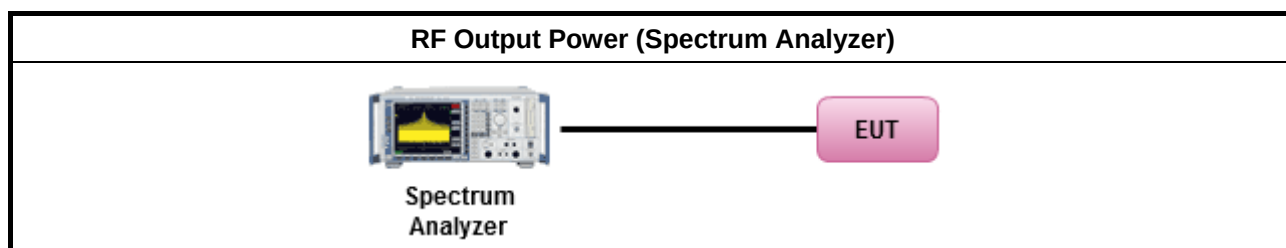

3.3.5 Directional Gain for Power Measurement

Directional Gain (DG) Result					
Transmit Chains No.		1	2	3	-
Maximum G_{ANT} (dBi)		4.60	4.42	4.60	-
Modulation Mode	DG (dBi)	N_{TX}	N_{SS} (Min.)	STBC	Array Gain (dB)
11a,6-54Mbps	4.60	1	1	-	-
HT20,M8-15	4.51 Note 2	2	2	-	-
HT40,M8-15	4.51 Note 2	2	2	-	-
HT20,M16-M23	4.54 Note 2	3	3	-	-
HT40,M16-M23	4.54 Note 2	3	3	-	-
Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows: Any transmit signals are correlated, Directional Gain = $G_{ANT} + 10 \log(N_{TX})$ All transmit signals are completely uncorrelated, Directional Gain = G_{ANT} Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows: Any transmit signals are correlated, Directional Gain = $10 \log[(10^{G_{1/20}} + \dots + 10^{G_{N/20}})^2 / N_{TX}]$ All transmit signals are completely uncorrelated, Directional Gain = $10 \log[(10^{G_{1/10}} + \dots + 10^{G_{N/10}}) / N_{TX}]$ Note 3: For Spatial Multiplexing, Directional Gain (DG) = $G_{ANT} + 10 \log(N_{TX}/N_{SS})$, where N_{SS} = the number of independent spatial streams data. Note 4: For CDD transmissions, directional gain is calculated as power measurements: Directional Gain (DG) = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows: Array Gain = 0 dB (i.e., no array gain) for $N_{TX} \leq 4$; Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{TX};					

3.3.6 Test Result of Maximum Conducted Output Power


Maximum Conducted Output Power (5150-5250MHz band)										
Condition			RF Output Power (dBm)							
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	Chain Port 3	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11a	1	5180	10.84	-	-	10.84	16.75	4.60	15.44	22.19
11a	1	5200	10.85	-	-	10.85	16.96	4.60	15.45	22.16
11a	1	5240	11.11	-	-	11.11	16.65	4.60	15.71	22.16
HT20	2	5180	11.54	11.62	-	14.59	16.89	4.51	19.10	22.45
HT20	2	5200	11.94	11.73	-	14.85	16.86	4.51	19.36	22.43
HT20	2	5240	11.91	11.52	-	14.73	16.93	4.51	19.24	22.45
HT40	2	5190	13.45	12.95	-	16.22	17.00	4.51	20.73	23.00
HT40	2	5230	12.93	12.40	-	15.68	17.00	4.51	20.19	23.00
HT20	3	5180	5.85	5.21	6.44	10.63	16.80	4.54	15.17	22.42
HT20	3	5200	7.85	7.22	8.16	12.53	16.92	4.54	17.07	22.44
HT20	3	5240	9.45	8.62	9.37	13.93	16.80	4.54	18.47	22.43
HT40	3	5190	5.89	5.16	6.26	10.56	17.00	4.54	15.10	23.00
HT40	3	5230	10.45	9.56	11.33	15.28	17.00	4.54	19.82	23.00
Result			Complied							

Maximum Conducted Output Power (5250-5350MHz band)										
Condition			RF Output Power (dBm)							
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	Chain Port 3	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11a	1	5260	10.74	-	-	10.74	20.73	4.60	15.34	26.19
11a	1	5300	10.80	-	-	10.80	21.12	4.60	15.40	26.25
11a	1	5320	10.87	-	-	10.87	20.98	4.60	15.47	26.18
HT20	2	5260	11.66	11.53	-	14.61	20.87	4.51	19.12	26.44
HT20	2	5300	11.10	11.69	-	14.42	20.97	4.51	18.93	26.45
HT20	2	5320	11.33	11.62	-	14.49	20.79	4.51	19.00	26.43
HT40	2	5270	12.82	12.92	-	15.88	23.89	4.51	20.39	27.00
HT40	2	5310	11.47	11.88	-	14.69	24.00	4.51	19.20	27.00
HT20	3	5260	9.20	8.79	9.66	14.00	20.86	4.54	18.54	26.42
HT20	3	5300	9.37	9.73	10.21	14.55	20.81	4.54	19.09	26.42
HT20	3	5320	10.31	9.71	11.07	15.17	20.79	4.54	19.71	26.42
HT40	3	5270	11.16	10.75	11.54	15.93	23.93	4.54	20.47	27.00
HT40	3	5310	10.30	10.29	10.68	15.20	23.90	4.54	19.74	27.00
Result			Complied							

Maximum Conducted Output Power (5470-5725MHz band)										
Condition			RF Output Power (dBm)							
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	Chain Port 3	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11a	1	5500	10.37	-	-	10.37	20.71	4.60	14.97	26.19
11a	1	5580	10.52	-	-	10.52	21.00	4.60	15.12	26.22
11a	1	5700	10.33	-	-	10.33	20.85	4.60	14.93	26.20
HT20	2	5500	11.73	11.92	-	14.84	20.84	4.51	19.35	26.43
HT20	2	5580	11.51	11.57	-	14.55	20.88	4.51	19.06	26.45
HT20	2	5700	12.77	12.84	-	15.82	20.92	4.51	20.33	26.44
HT40	2	5510	12.50	12.66	-	15.59	21.00	4.51	20.10	27.00
HT40	2	5550	11.98	12.33	-	15.17	21.00	4.51	19.68	27.00
HT40	2	5670	12.24	12.83	-	15.56	21.00	4.51	20.07	27.00
HT20	3	5500	9.29	9.84	9.89	14.45	20.81	4.54	18.99	26.43
HT20	3	5580	9.55	9.54	10.15	14.53	20.90	4.54	19.07	26.43
HT20	3	5700	9.64	10.06	10.92	15.01	20.81	4.54	19.55	26.43
HT40	3	5510	10.72	10.83	11.58	15.83	21.00	4.54	20.37	27.00
HT40	3	5550	10.89	10.79	11.49	15.84	21.00	4.54	20.38	27.00
HT40	3	5670	10.22	10.73	11.07	15.46	21.00	4.54	20.00	27.00
Result			Complied							

5150-5250MHz - Worst RF Output Power Plots


11a [Port 1]

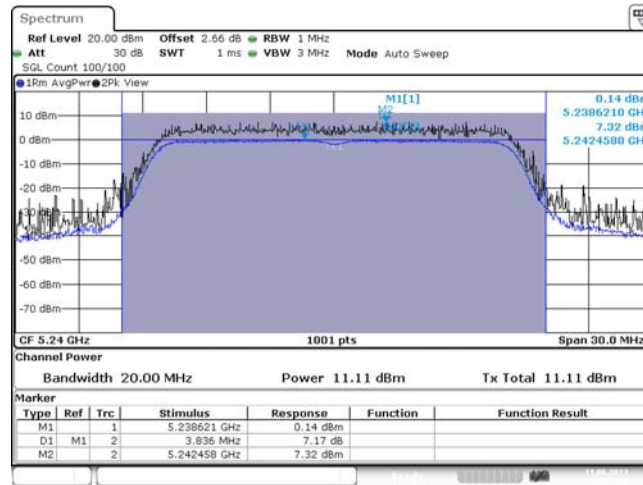


Date: 11.JUN.2013 19:57:54

5150-5250MHz - Worst RF Output Power Plots


HT20 [Port 1]

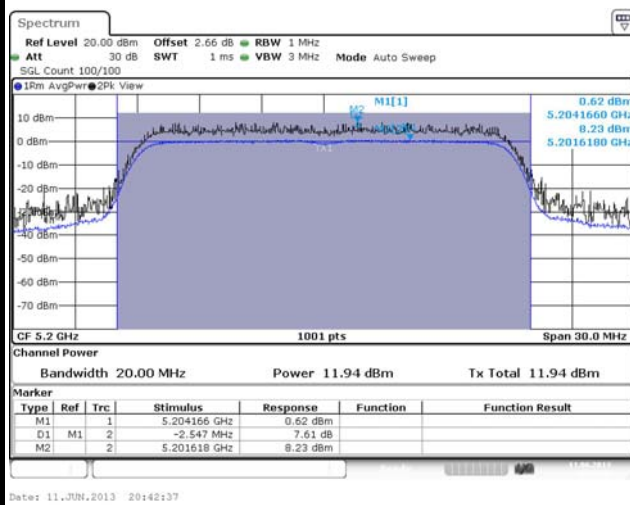


HT40 [Port 1]

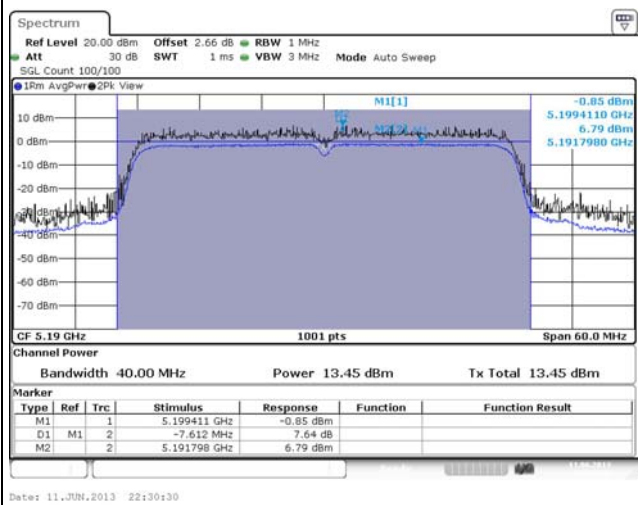


HT20 [Port 2]

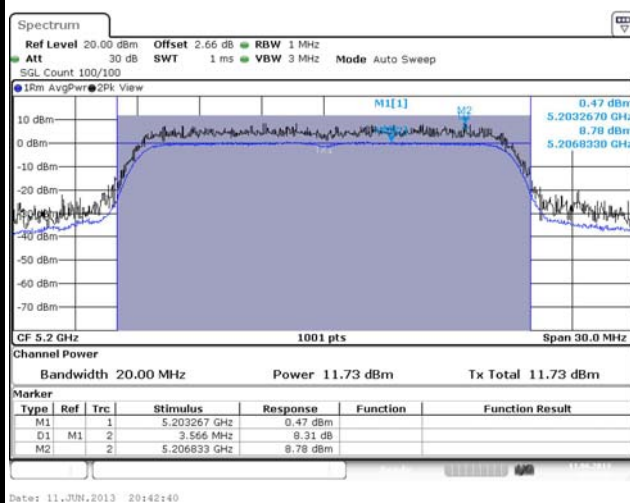


HT40 [Port 2]

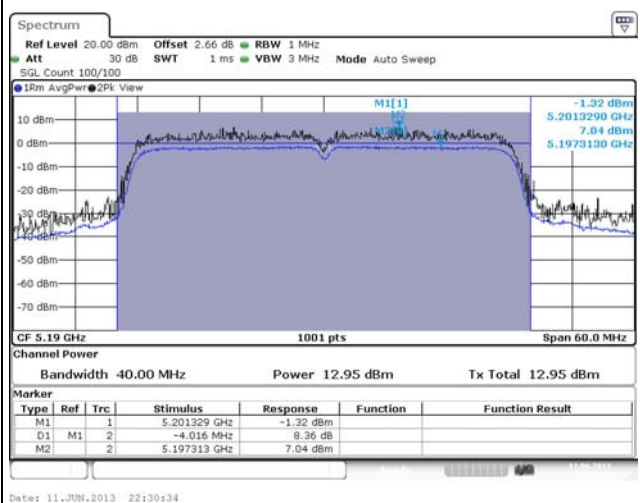

HT20 [Port 3]

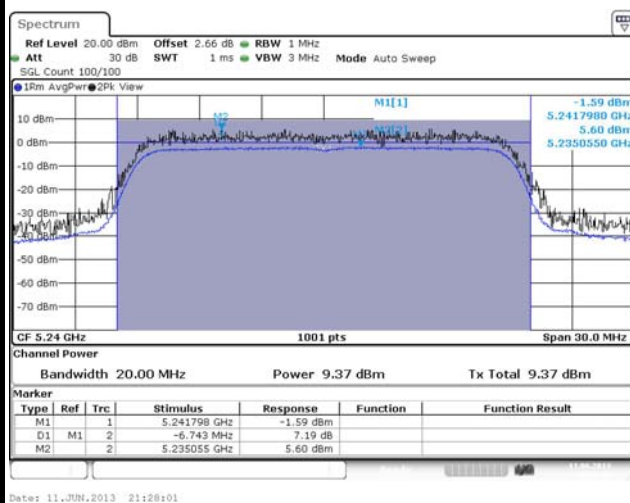


HT40 [Port 3]

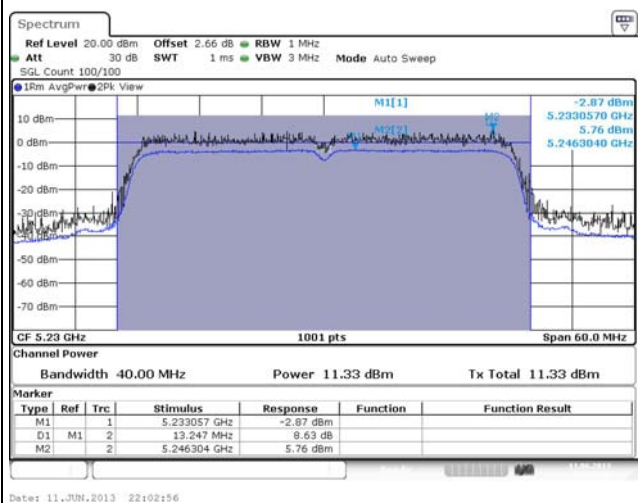




5250-5350MHz - Worst RF Output Power Plots

11a [Port 1]

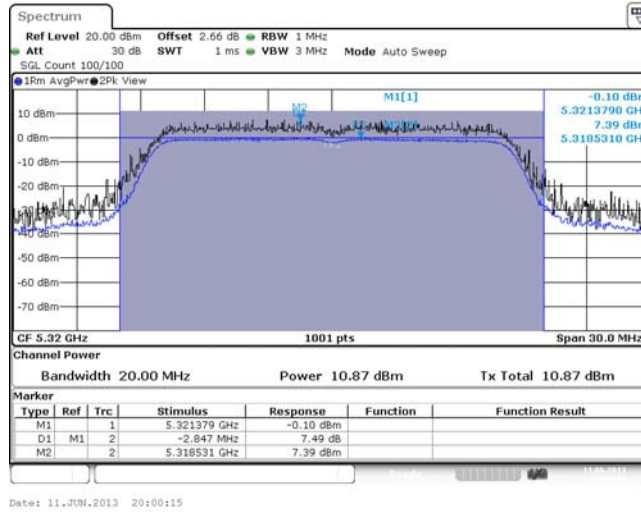


5250-5350MHz - Worst RF Output Power Plots


HT20 [Port 1]

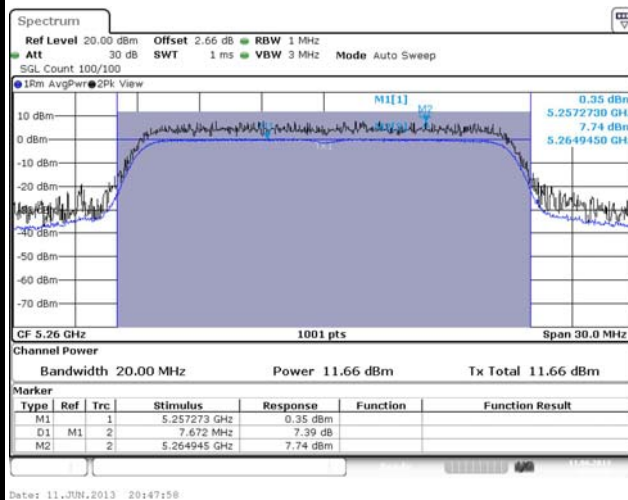


HT40 [Port 1]

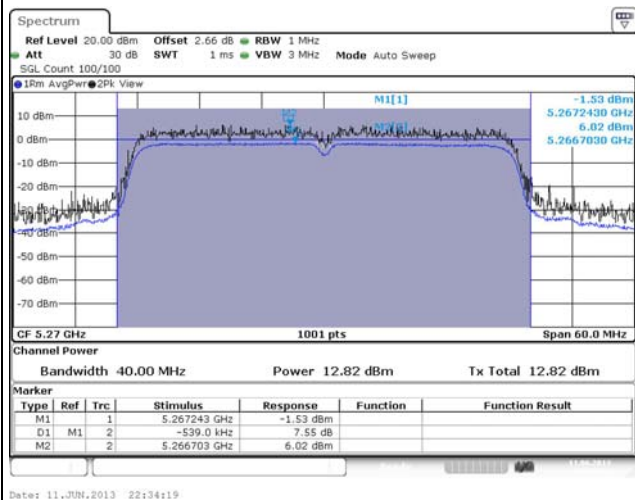


HT20 [Port 2]

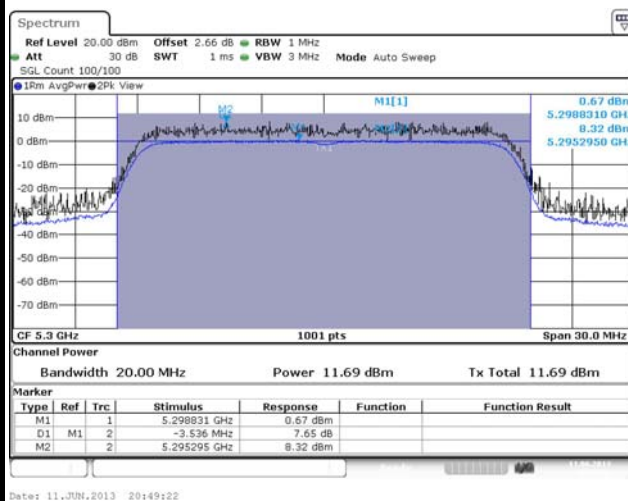


HT40 [Port 2]

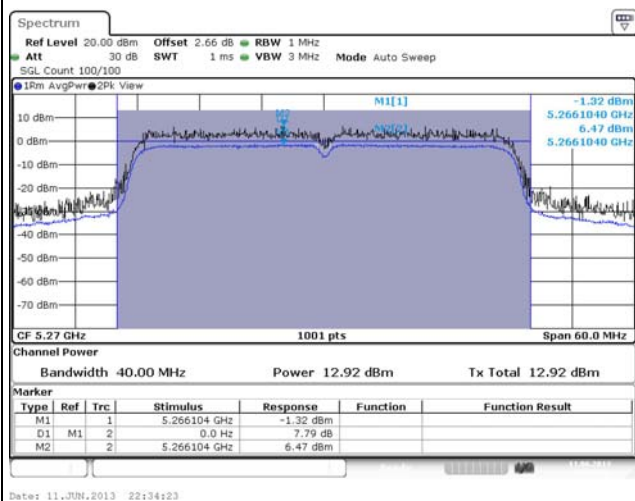

HT20 [Port 3]

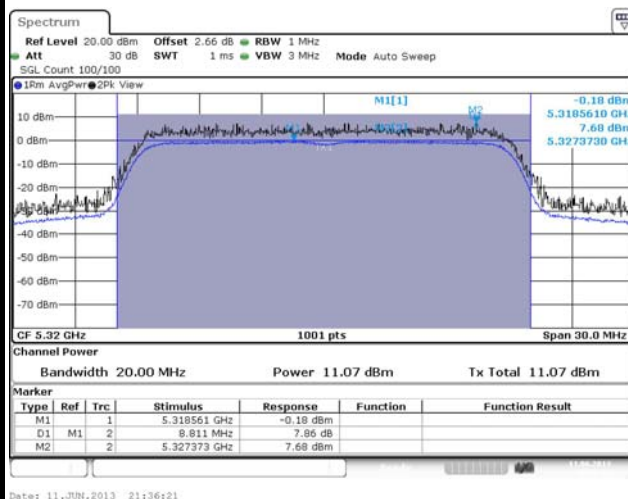


HT40 [Port 3]

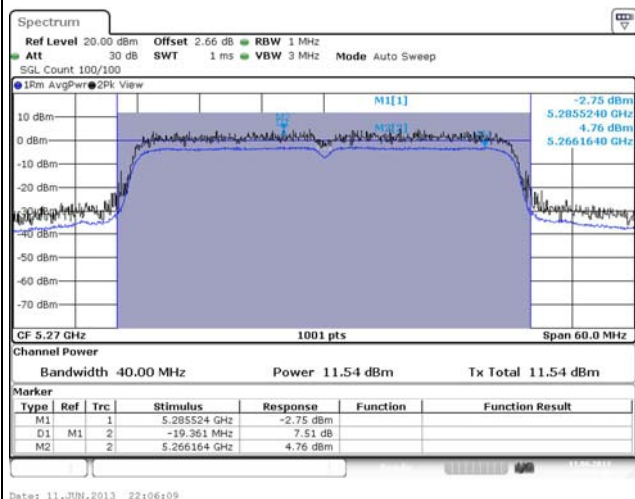


5470-5725MHz - Worst RF Output Power Plots

11a [Port 1]

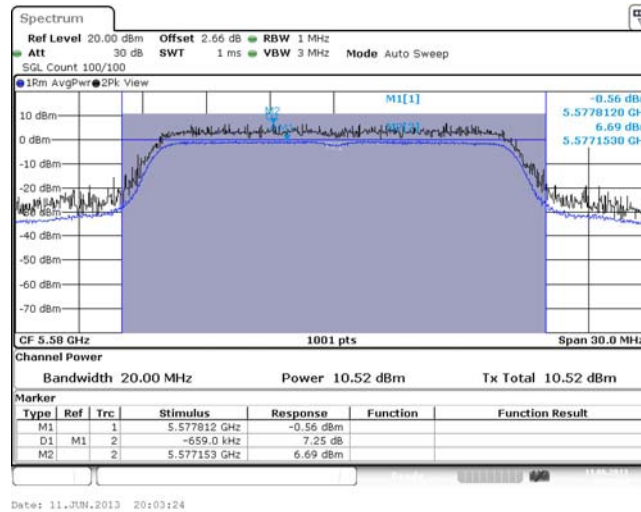


5470-5725MHz - Worst RF Output Power Plots


HT20 [Port 1]

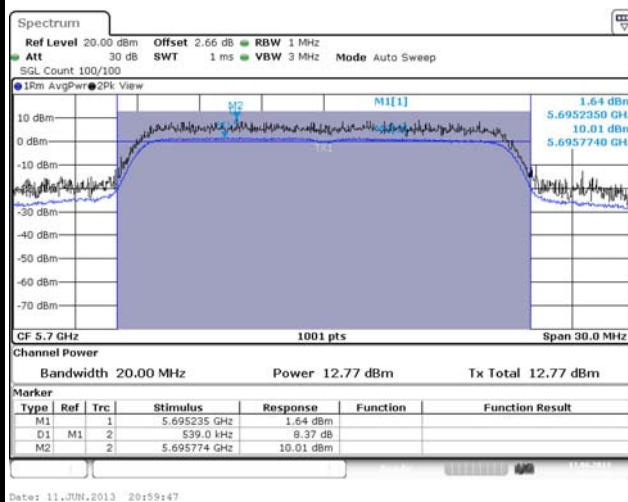


HT40 [Port 1]

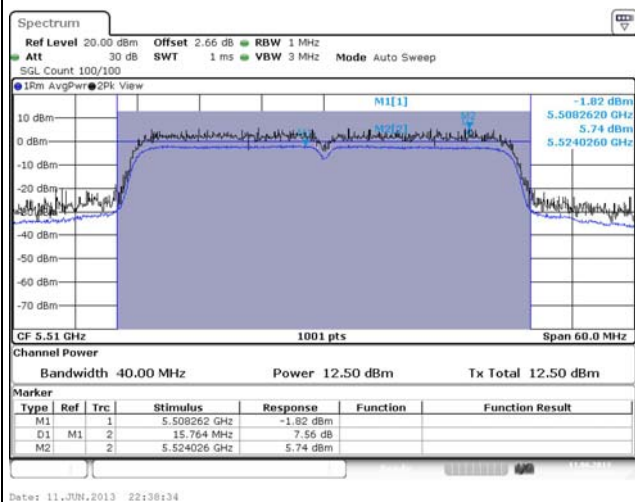


HT20 [Port 2]

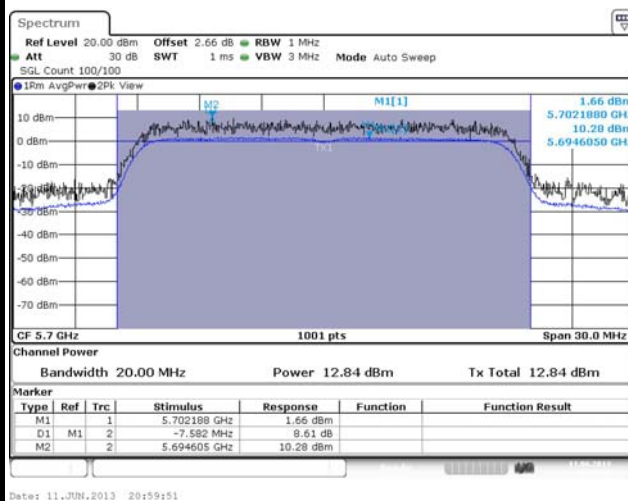


HT40 [Port 2]

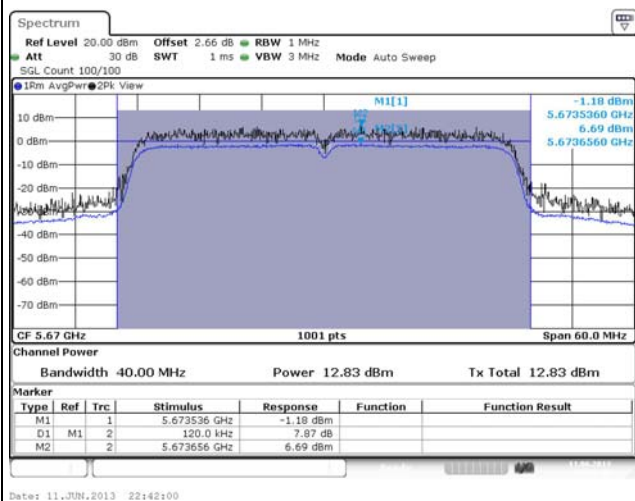

HT20 [Port 3]

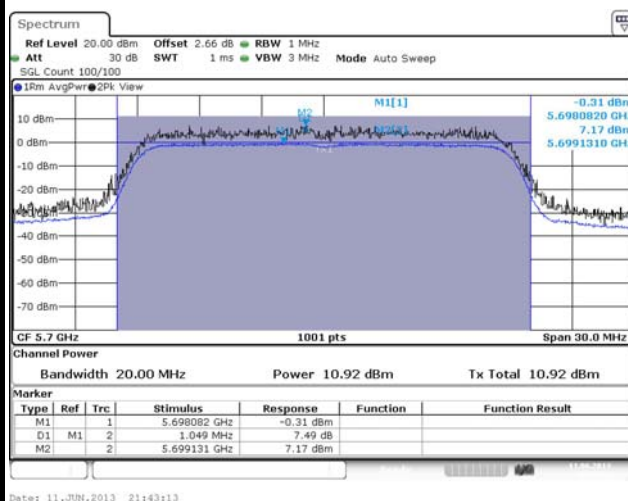

HT40 [Port 3]

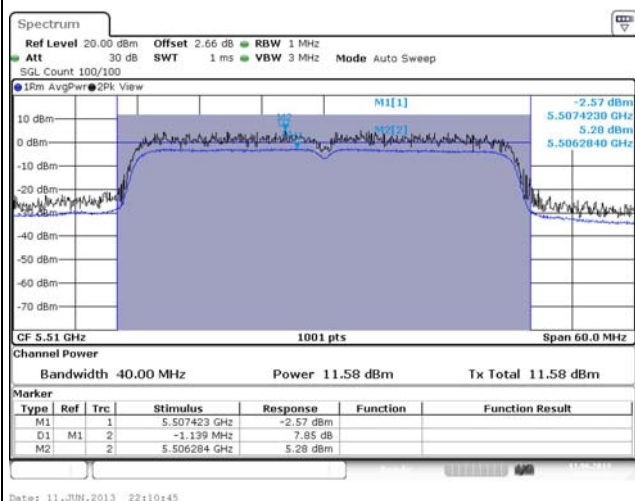

3.4 Peak Power Spectral Density

3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, the peak power spectral density (PPSD) ≤ 4 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 4 - (G_{TX} - 6)$.
☒	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒	For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☐	For the 5.725-5.825 GHz band:
☐	Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 17 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 17 - (G_{TX} - 6)$.
☐	Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 17 dBm/MHz. If $G_{TX} > 23$ dBi, then $PPSD = 17 - (G_{TX} - 23)$.
LE-LAN Devices	
☒	For the 5.15-5.25 GHz band, the peak power spectral density (PPSD) ≤ 4 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 10 dBm/MHz.
☒	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 17 dBm/MHz.
☒	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 17 dBm/MHz.
☐	For the 5.725-5.825 GHz band, the peak power spectral density (PPSD) ≤ 17 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 23 dBm/MHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
☒	Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:
☐	Refer as FCC KDB 789033, F5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
	[duty cycle ≥ 98% or external video / power trigger]
☒	Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
☐	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☒	The EUT supports diversity transmitting and the results on transmit chain port 3 is the worst case.
☒	The EUT supports multiple transmit chains using options given below:
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
☐	Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
☒	If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$
☒	Each individually PPSD plots refer as test report clause 3.3.5 with each individually PPSD plots.

3.4.4 Test Setup

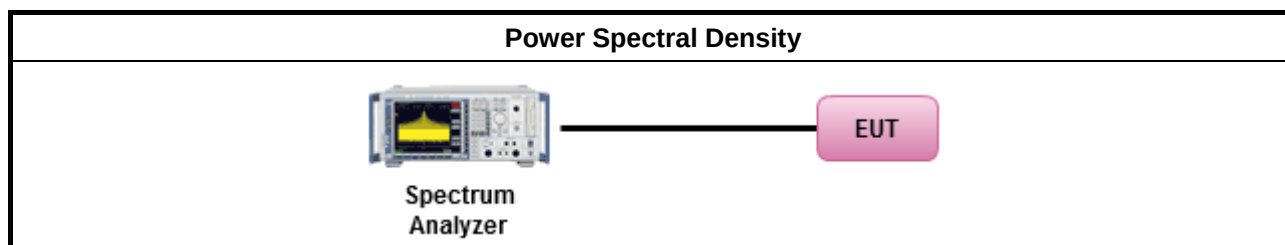

3.4.5 Directional Gain for Power Spectral Density Measurement




Directional Gain (DG) Result					
Transmit Chains No.		1	2	3	-
Maximum G_{ANT} (dBi)		4.60	4.42	4.60	-
Modulation Mode	DG (dBi)	N_{TX}	N_{SS} (Min.)	STBC	Array Gain (dB)
11a,6-54Mbps	4.60	1	1	-	0
HT20,M8-15	4.51 Note 2	2	2		0
HT40,M8-15	4.51 Note 2	2	2		0
HT20,M16-23	4.54 Note 2	3	3	-	0
HT40,M16-23	4.54 Note 2	3	3	-	0
Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows: Any transmit signals are correlated, Directional Gain = $G_{ANT} + 10 \log(N_{TX})$ All transmit signals are completely uncorrelated, Directional Gain = G_{ANT} Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows: Any transmit signals are correlated, Directional Gain = $10 \log[(10^{G_{1/20}} + \dots + 10^{G_{N/20}})^2 / N_{TX}]$ All transmit signals are completely uncorrelated, Directional Gain = $10 \log[(10^{G_{1/10}} + \dots + 10^{G_{N/10}}) / N_{TX}]$ Note 3: For Spatial Multiplexing, Directional Gain (DG) = $G_{ANT} + 10 \log(N_{TX}/N_{SS})$, where N_{SS} = the number of independent spatial streams data. Note 4: For CDD transmissions, directional gain is calculated as power spectral density measurements: Directional Gain (DG) = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows: Array Gain = $10 \log(N_{TX}/N_{SS})$;					




3.4.6 Test Result of Peak Power Spectral Density




Peak Power Spectral Density Result (5150-5250MHz band)							
Condition			Peak Power Spectral Density (dBm/MHz)				
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain	PSD Limit	DG (dBi)	EIRP PSD	EIRP Limit
11a	1	5180	-0.18	4.00	4.60	4.42	10.00
11a	1	5200	-0.10	4.00	4.60	4.50	10.00
11a	1	5240	0.14	4.00	4.60	4.74	10.00
HT20	2	5180	3.09	4.00	4.51	7.60	10.00
HT20	2	5200	3.45	4.00	4.51	7.96	10.00
HT20	2	5240	3.29	4.00	4.51	7.80	10.00
HT40	2	5190	1.83	4.00	4.51	6.34	10.00
HT40	2	5230	1.18	4.00	4.51	5.69	10.00
HT20	3	5180	-0.81	4.00	4.54	3.73	10.00
HT20	3	5200	1.02	4.00	4.54	5.56	10.00
HT20	3	5240	2.61	4.00	4.54	7.15	10.00
HT40	3	5190	-3.84	4.00	4.54	0.70	10.00
HT40	3	5230	0.78	4.00	4.54	5.32	10.00
Result			Complied				

Peak Power Spectral Density Result (5250-5350MHz band)							
Condition			Peak Power Spectral Density (dBm/MHz)				
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain	PSD Limit	DG (dBi)	EIRP PSD	EIRP Limit
11a	1	5260	-0.34	11.00	4.60	4.26	17.00
11a	1	5300	-0.31	11.00	4.60	4.29	17.00
11a	1	5320	-0.10	11.00	4.60	4.50	17.00
HT20	2	5260	3.18	11.00	4.51	7.69	17.00
HT20	2	5300	3.00	11.00	4.51	7.51	17.00
HT20	2	5320	3.09	11.00	4.51	7.60	17.00
HT40	2	5270	1.39	11.00	4.51	5.90	17.00
HT40	2	5310	0.41	11.00	4.51	4.92	17.00
HT20	3	5260	2.60	11.00	4.54	7.14	17.00
HT20	3	5300	3.13	11.00	4.54	7.67	17.00
HT20	3	5320	3.73	11.00	4.54	8.27	17.00
HT40	3	5270	1.37	11.00	4.54	5.91	17.00
HT40	3	5310	0.83	11.00	4.54	5.37	17.00
Result			Complied				

Peak Power Spectral Density Result (5470-5725MHz band)							
Condition			Peak Power Spectral Density (dBm/MHz)				
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain	PSD Limit	DG (dBi)	EIRP PSD	EIRP Limit
11a	1	5500	-0.52	11.00	4.60	4.08	17.00
11a	1	5580	-0.56	11.00	4.60	4.04	17.00
11a	1	5700	-0.67	11.00	4.60	3.93	17.00
HT20	2	5500	3.64	11.00	4.51	8.15	17.00
HT20	2	5580	3.10	11.00	4.51	7.61	17.00
HT20	2	5700	4.63	11.00	4.51	9.14	17.00
HT20	3	5500	3.08	11.00	4.54	7.62	17.00
HT20	3	5580	3.11	11.00	4.54	7.65	17.00
HT20	3	5700	3.59	11.00	4.54	8.13	17.00
HT40	2	5510	1.39	11.00	4.51	5.90	17.00
HT40	2	5550	0.76	11.00	4.51	5.27	17.00
HT40	2	5670	1.44	11.00	4.51	5.95	17.00
HT40	3	5510	1.50	11.00	4.54	6.04	17.00
HT40	3	5550	1.52	11.00	4.54	6.06	17.00
HT40	3	5670	0.98	11.00	4.54	5.52	17.00
Result			Complied				

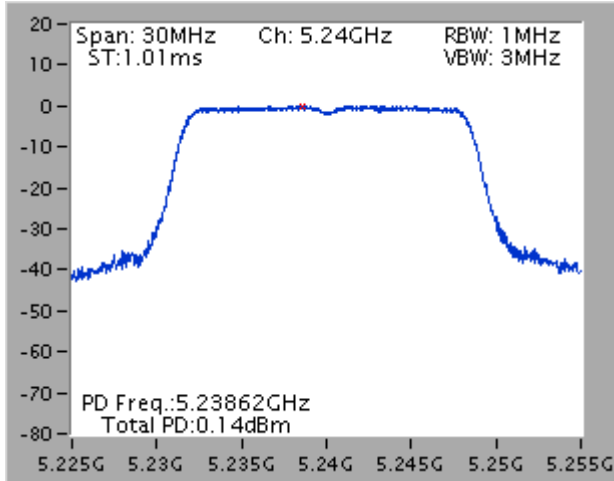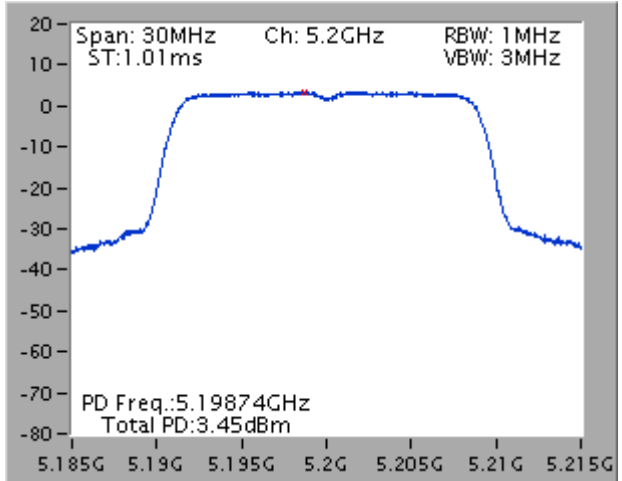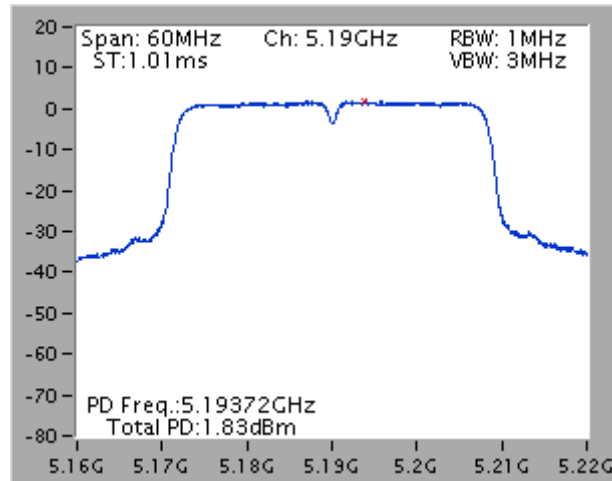5150-5250MHz - Worst Power Spectral Density Plots
11a

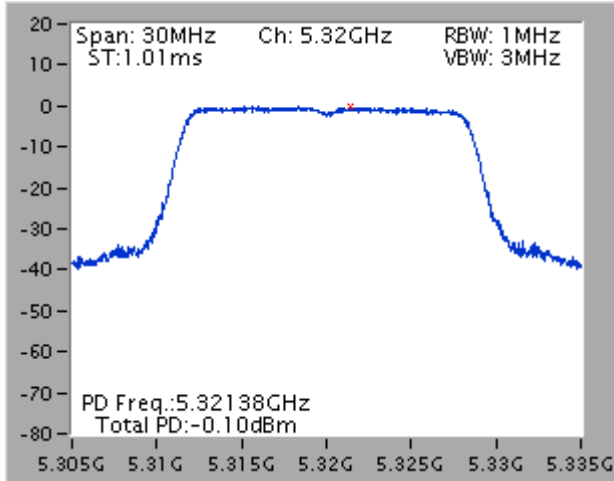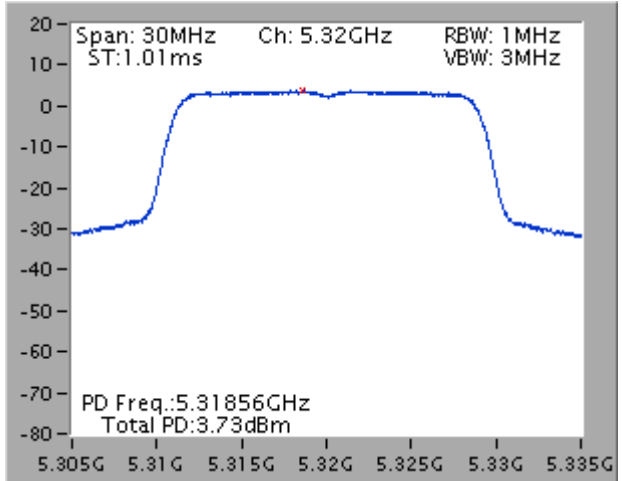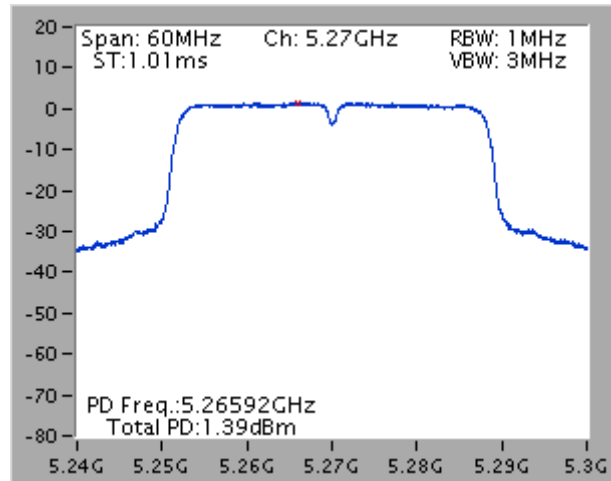HT20

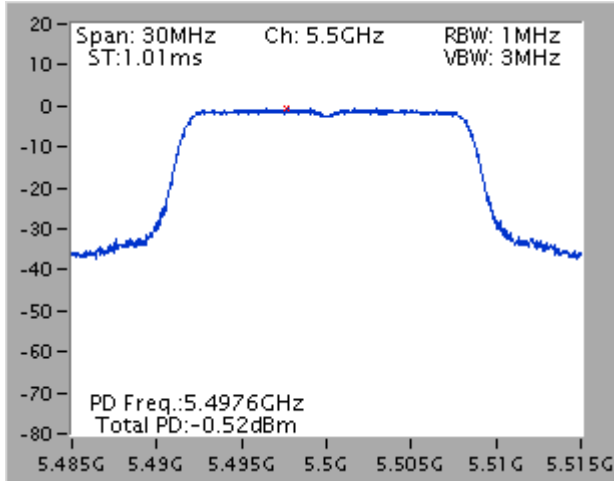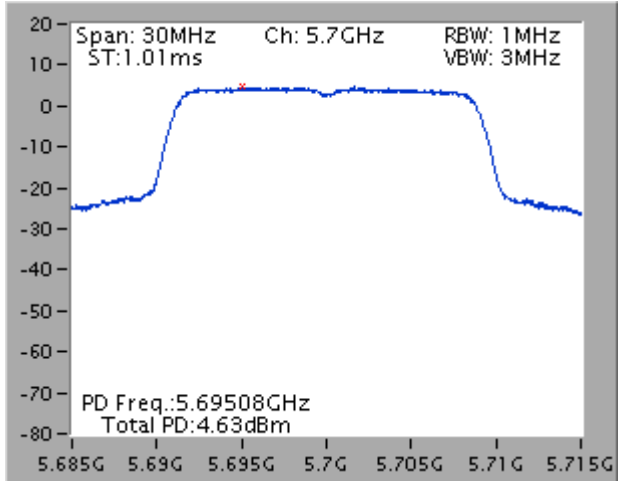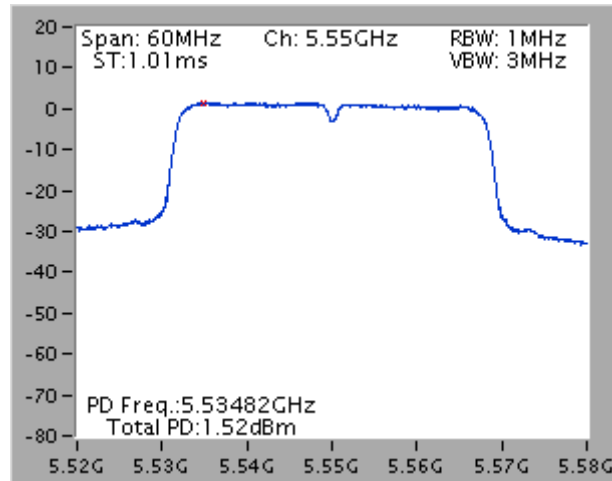HT40


5250-5350MHz - Worst Power Spectral Density Plots
11a

HT20

HT40


5470-5725MHz - Worst Power Spectral Density Plots
11a

HT20

HT40


3.5 Peak Excursion

3.5.1 Peak Excursion Limit

Peak Excursion Limit	
UNII Devices	
☒	Peak excursion ≤ 13 dB. The ratio of the maximum of the peak-max-hold spectrum to the maximum of the average spectrum for continuous transmission does not exceed 13 dB. (Earlier procedures that required computing the ratio of the two spectra at each frequency across the emission bandwidth can lead to unintended failures at band edges and will no longer be required.)
LE-LAN Devices	
☒	N/A


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures



Test Method	
☒	Refer as FCC KDB 789033, clause G peak excursion method.
☒	Testing each modulation mode on a single channel is sufficient to demonstrate compliance with the peak excursion requirement
☒	For conducted measurement.
☒	Testing a single output port is sufficient to demonstrate compliance with the peak excursion.

3.5.4 Test Setup

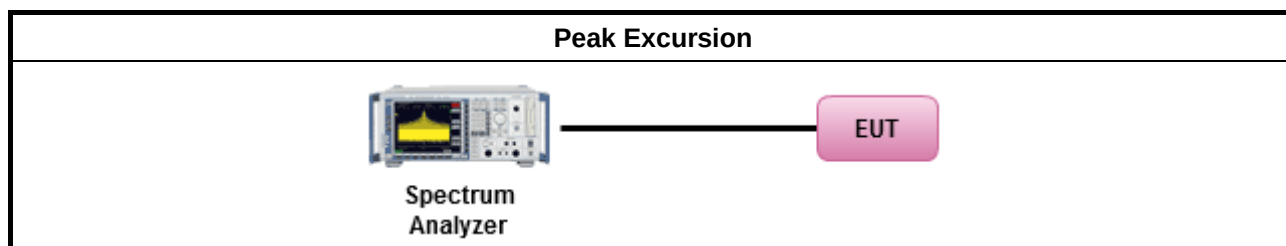



3.5.5 Test Result of Peak Excursion

UNII Peak Excursion Result							
Condition			Peak Excursion (dB)				
Modulation Mode	N _{TX}	Freq. (MHz)	BPSK	QPSK	16QAM	64QAM	Limit
11a	1	5180	7.67	8.45	7.82	8.14	13.0
HT20	2	5180	7.95	7.67	8.30	7.48	13.0
HT40	2	5190	7.64	7.80	7.91	8.12	13.0
HT20	3	5180	8.91	7.75	7.63	7.51	13.0
HT40	3	5190	7.40	7.46	7.77	7.90	13.0
Result			Complied				

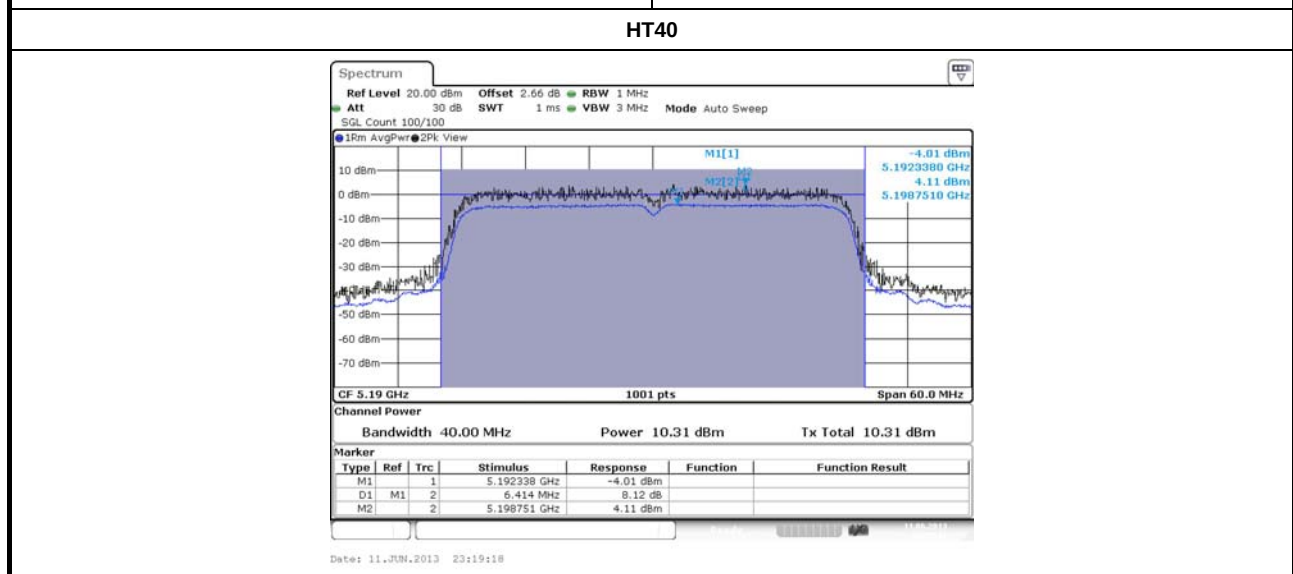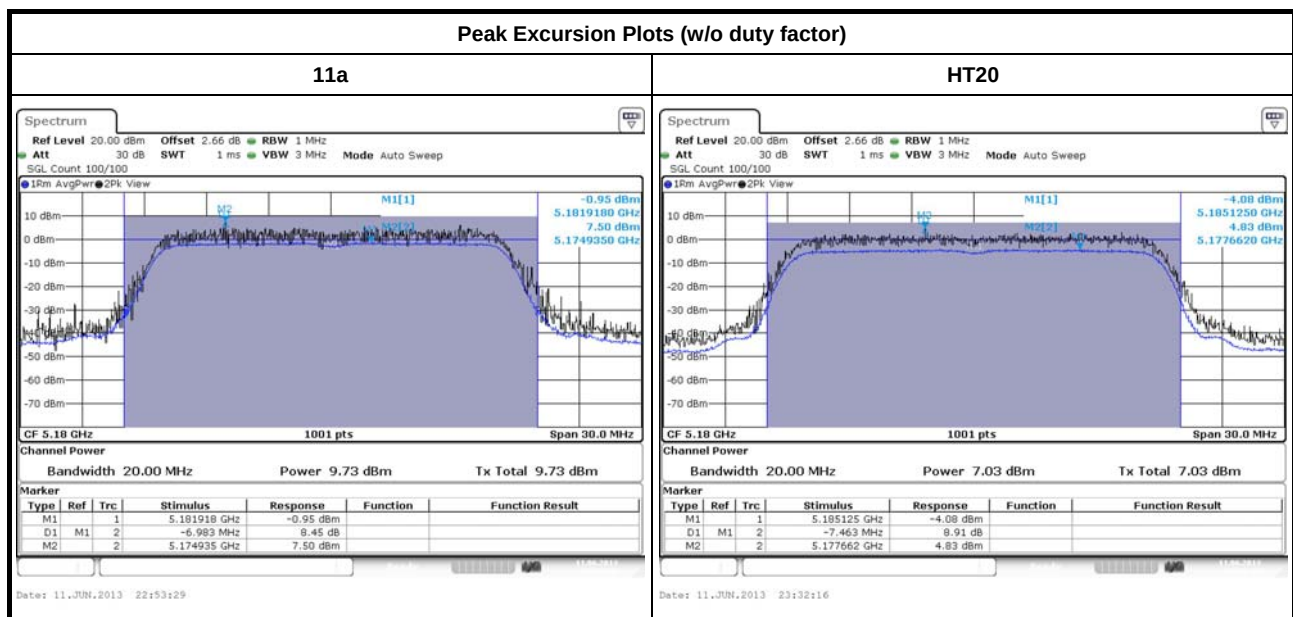


3.6 Transmitter Radiated Bandedge Emissions

3.6.1 Transmitter Radiated Bandedge Emissions Limit

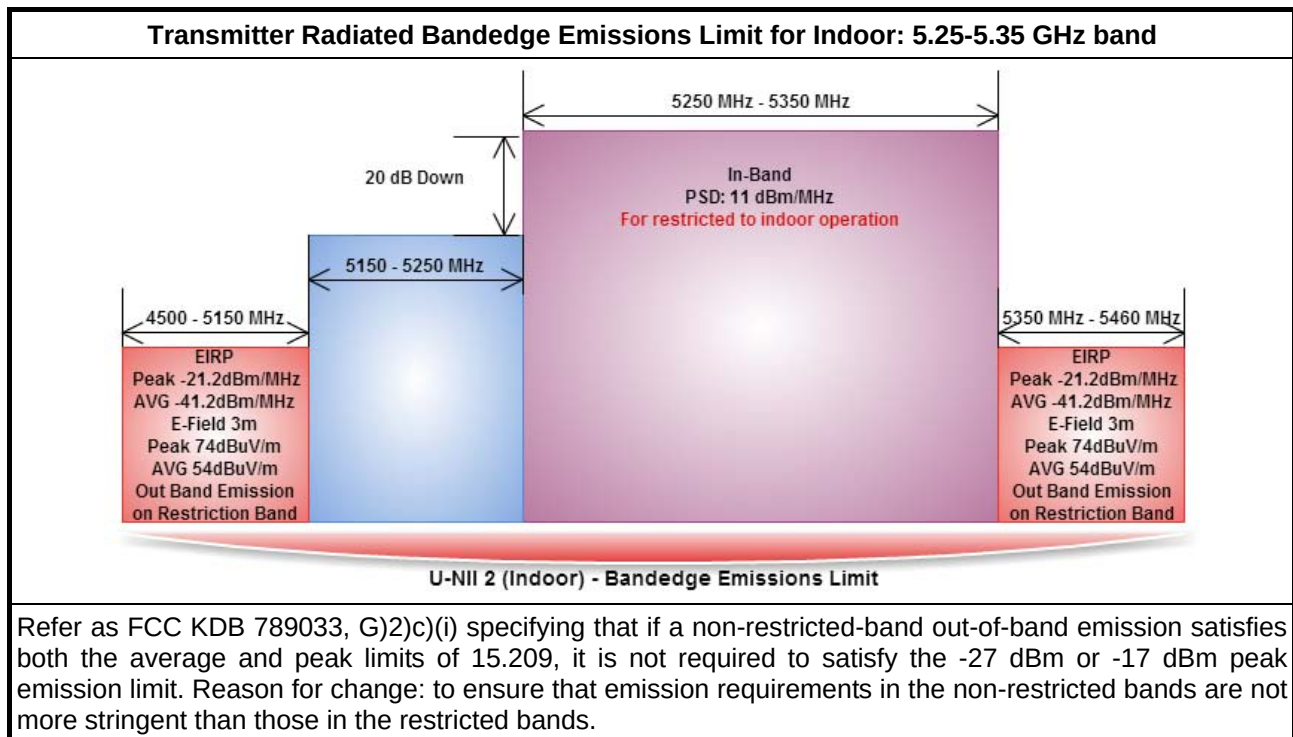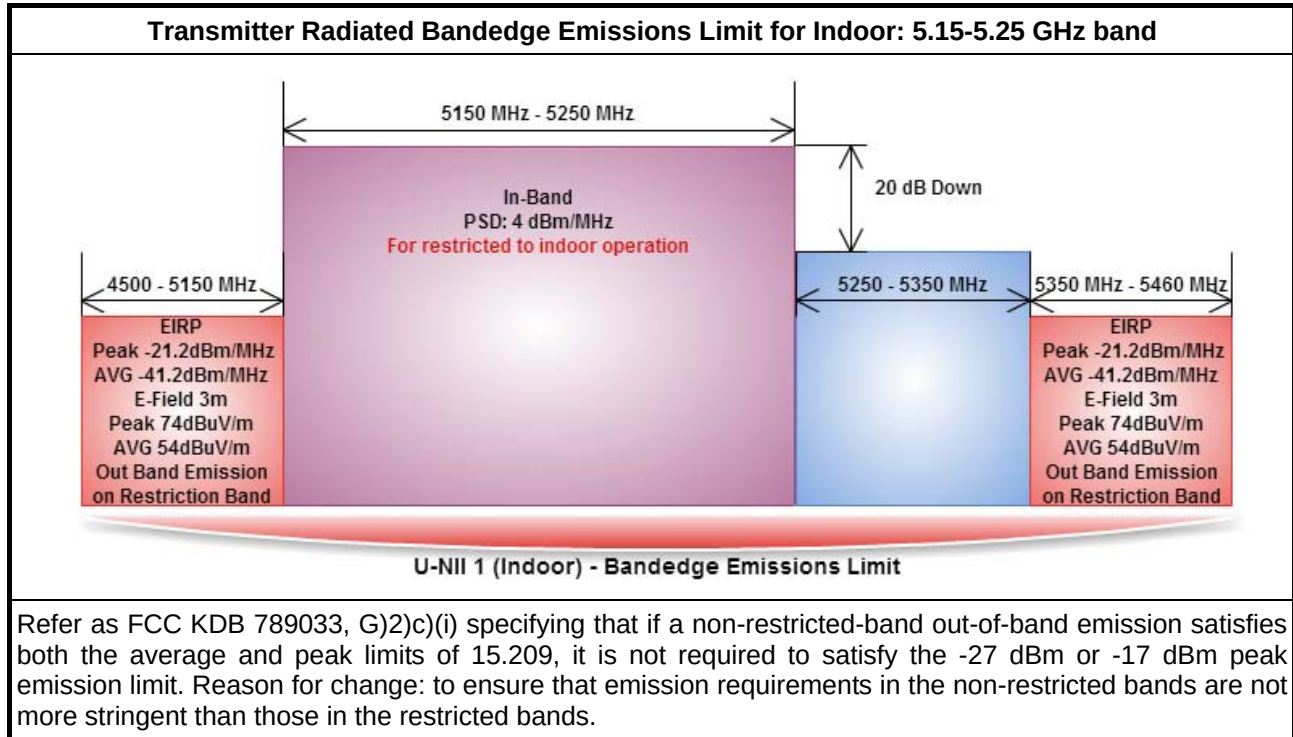

Transmitter Radiated Bandedge Emissions Limit for indoor/outdoor: 5.25-5.35 GHz band

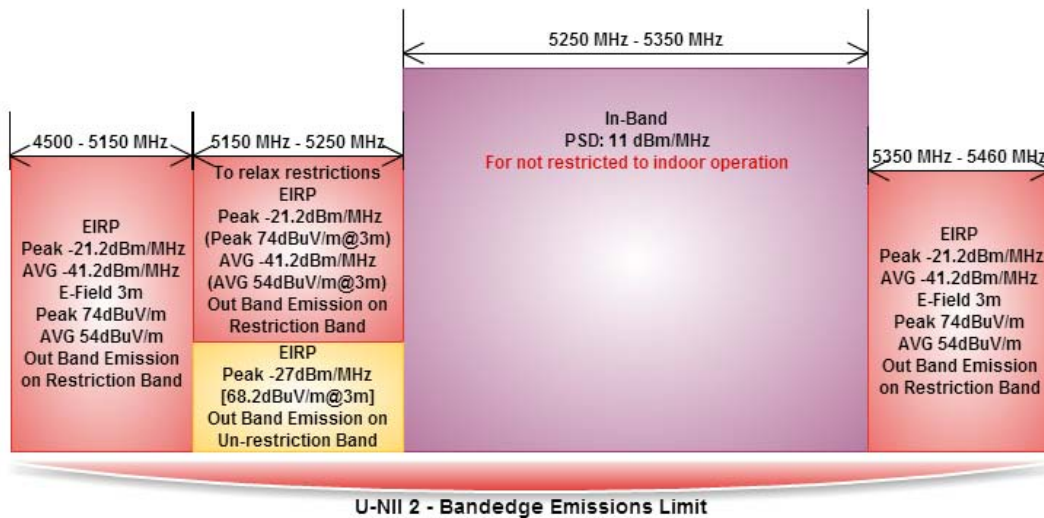

Refer as FCC KDB 789033, G)2)c)(i) specifying that if a non-restricted-band out-of-band emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm or -17 dBm peak emission limit. Reason for change: to ensure that emission requirements in the non-restricted bands are not more stringent than those in the restricted bands.

Transmitter Radiated Bandedge Emissions Limit: 5.47-5.725 GHz band



Refer as FCC KDB 789033, G)2)c)(i) specifying that if a non-restricted-band out-of-band emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm or -17 dBm peak emission limit. Reason for change: to ensure that emission requirements in the non-restricted bands are not more stringent than those in the restricted bands.

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). Measurements in the bandedge are typically made at a closer distance 1.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
☐	If EUT operate in adjacent contiguous bands, bandedge testing performed at the lowest frequency channel at lower-band and highest frequency channel at higher-band. Transmitter in-band emissions will consist of adjacent contiguous bands (e.g., IEEE 802.11ac VHT160 The lowest frequency channel at lower-band and highest frequency channel at higher-band in-band emissions will consist of two adjacent contiguous bands.)
☐	☐ Operating in 5.15-5.25 GHz band (lower-band) and 5.25-5.35 GHz band (higher-band).
☐	☐ Operating in 5.47-5.725 GHz band (lower-band) and 5.725-5.825 GHz band (higher-band).
☐	If EUT operate in individual non-contiguous bands, bandedge testing performed at the lowest frequency channel and highest frequency channel within lower-band and higher-band. (e.g., (e.g., IEEE 802.11ac VHT160)
☐	☐ Operating in 5.25-5.35 GHz band (lower-band) and 5.47-5.725 GHz band (higher-band).
☐	☐ Operating in 5.15-5.25 GHz band (lower-band) and 5.725-5.825 GHz band (higher-band).
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC KDB 789033, clause H)2) for unwanted emissions into non-restricted bands.
☒	Refer as FCC KDB 789033, clause H)1) for unwanted emissions into restricted bands.
☐	☐ Refer as FCC KDB 789033, H)6) Method AD (Trace Averaging).
☐	☐ Refer as FCC KDB 789033, H)6) Method VB (Reduced VBW).
☒	☒ Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
☐	☐ Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
☒	☒ Refer as FCC KDB 789033, clause H)5) measurement procedure peak limit.
☐	☐ Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	For the transmitter bandedge emissions shall be measured using following options below:
☐	☐ Refer as FCC KDB 789033, clause H)3)d) for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
☒	☒ Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
☐	☐ Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
☒	For radiated measurement, refer as ANSI C63.10, clause 6.5 for radiated emissions from above 1 GHz.

Test Method	
☐	For conducted and cabinet radiation measurement, refer as FCC KDB 789033, clause H)3).
☐	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
☐	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
☐	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

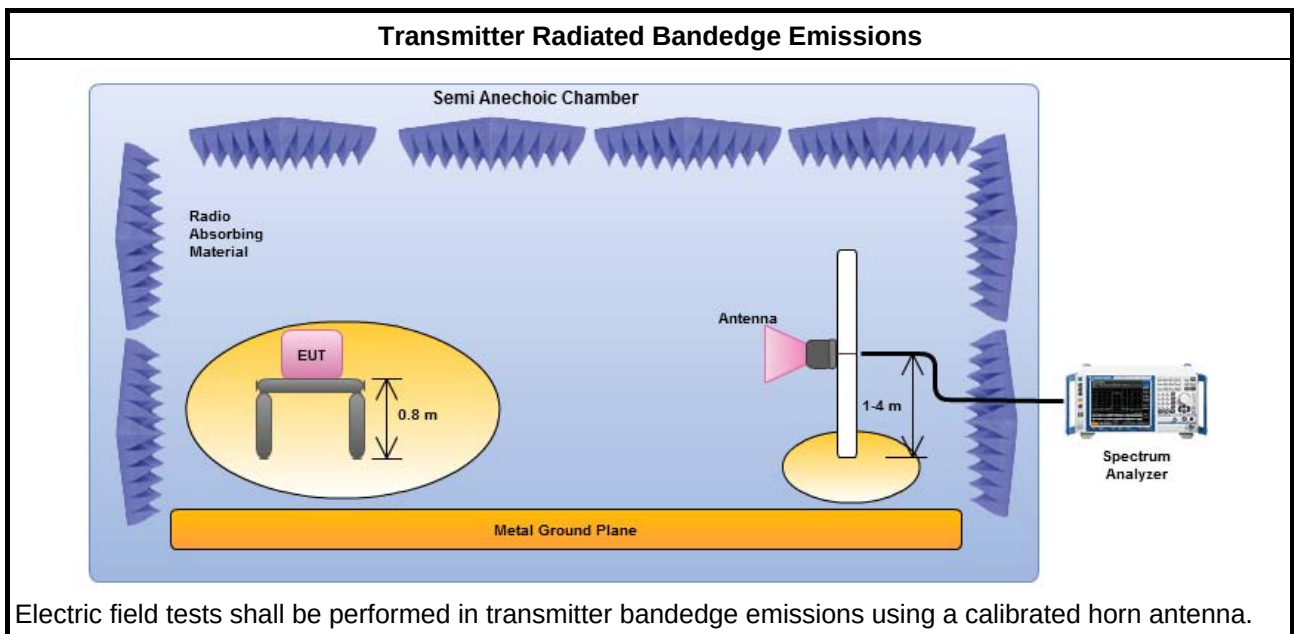

3.6.5 Transmitter Radiated Bandedge Emissions (with Antenna)

U-NII 5150-5250MHz Transmitter Radiated Bandedge (with Antenna)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11a	1	5180	1	5106.600	67.01	83.54	5107.900	53.93	63.54	V
HT20,M8-15	2	5180	1	5101.900	67.55	83.54	5127.900	54.98	63.54	V
HT40,M8-15	2	5190	1	5147.300	68.45	83.54	5150.000	56.04	63.54	V
HT20,M16-23	3	5180	1	5146.600	68.70	83.54	5128.300	54.76	63.54	V
HT40,M16-23	3	5190	1	5110.010	67.96	83.54	5150.000	54.80	63.54	V







Note 1: Measurement worst emissions of receive antenna polarization.

U-NII 5250-5350MHz Transmitter Radiated Bandedge (with Antenna)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11a	1	5320	1	5366.980	67.05	83.54	5378.810	54.10	63.54	V
HT20,M8-15	2	5320	1	5367.260	67.52	83.54	5372.300	54.82	63.54	V
HT40,M8-15	2	5310	1	5353.990	67.66	83.54	5351.470	55.27	63.54	V
HT20,M16-23	3	5320	1	5372.300	67.94	83.54	5371.810	55.40	63.54	V
HT40,M16-23	3	5310	1	5355.070	70.97	83.54	5350.030	57.04	63.54	V

Note 1: Measurement worst emissions of receive antenna polarization.


U-NII 5470-5725MHz Transmitter Radiated Bandedge (with Antenna)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11a	1	5500	1	5430.000	67.91	83.54	5435.040	54.53	63.54	V
11a	1	5700	1	5737.640	68.86	83.54	5729.720	54.97	63.54	V
HT20,M8-15	2	5500	1	5448.720	67.60	83.54	5448.480	55.39	63.54	V
HT20,M8-15	2	5700	1	5726.420	67.59	83.54	5727.320	55.17	63.54	V
HT40,M8-15	2	5510	1	5469.800	68.49	83.54	5470.000	55.37	63.54	V
HT40,M8-15	2	5670	1	5739.900	67.78	83.54	5725.400	55.09	63.54	V
HT20,M16-23	3	5500	1	5469.280	68.84	83.54	5448.400	55.23	63.54	V
HT20,M16-23	3	5700	1	5725.400	69.17	83.54	5725.000	56.64	63.54	V
HT40,M16-23	3	5510	1	5469.100	68.18	83.54	5469.900	56.01	63.54	V
HT40,M16-23	3	5670	1	5729.500	67.98	83.54	5728.700	55.15	63.54	V

Note 1: Measurement worst emissions of receive antenna polarization.

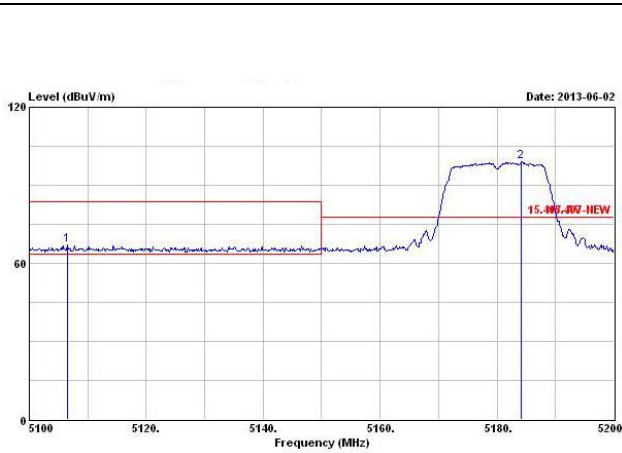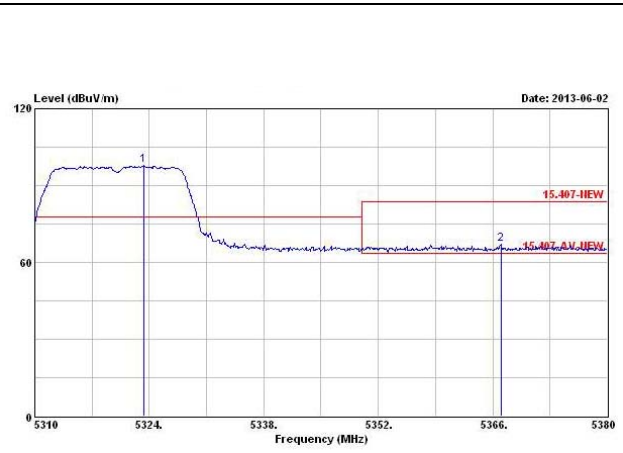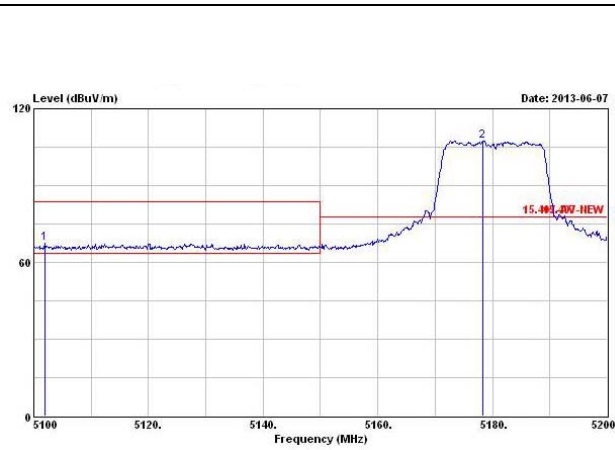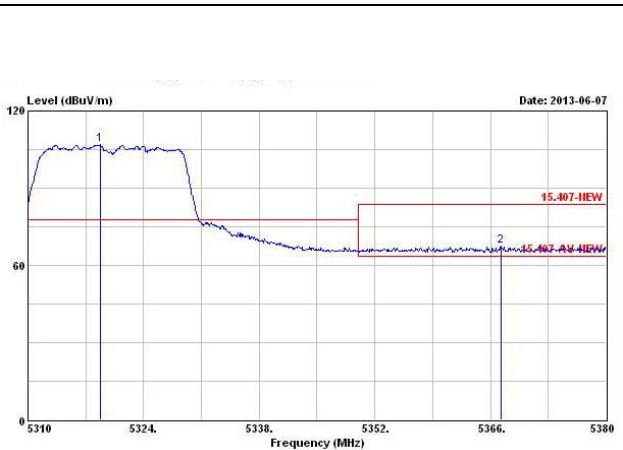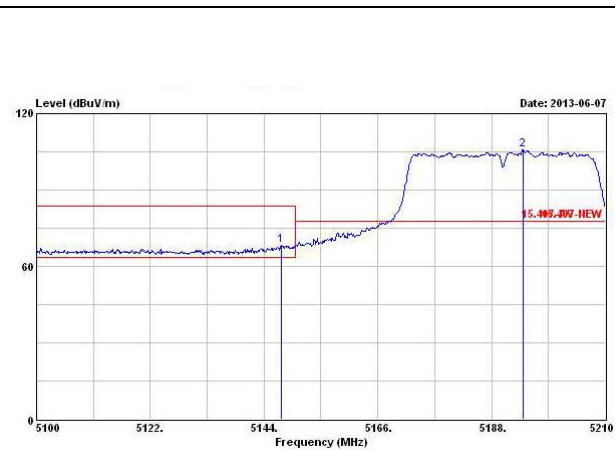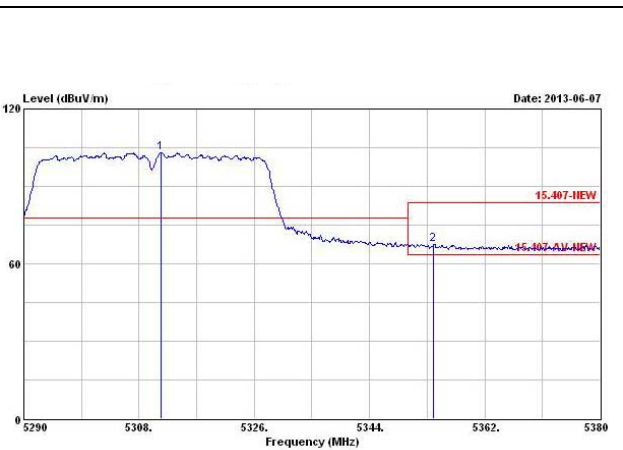
5150-5350MHz - Transmitter Radiated Bandedge Emissions Plots (with Antenna)
11a-(Lowest Ch.)

11a-(Highest Ch.)

HT20,M8-15-(Lowest Ch.)

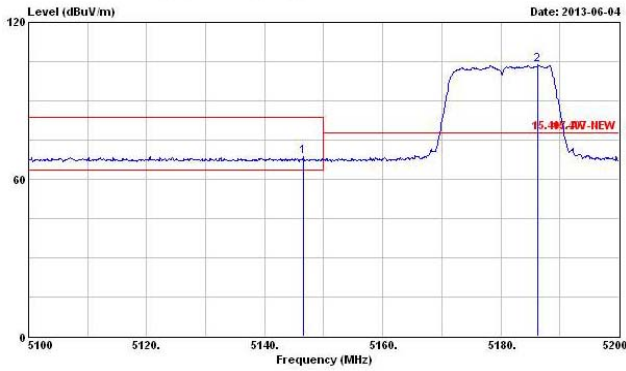HT20,M8-15-(Highest Ch.)

HT40,M8-15-(Lowest Ch.)

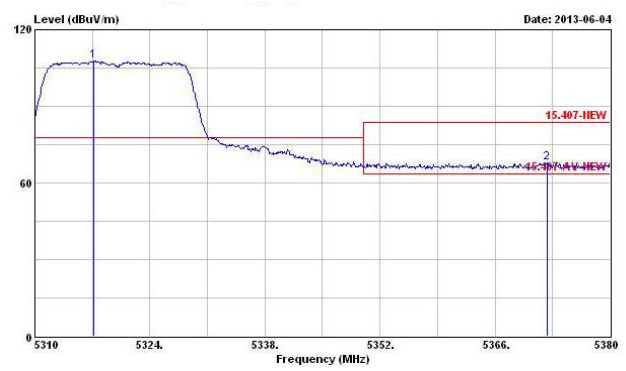HT40,M8-15-(Highest Ch.)


5150-5350MHz - Transmitter Radiated Bandedge Emissions Plots (with Antenna)


HT20,M16-23-(Lowest Ch.)




HT20,M16-23-(Highest Ch.)









HT40,M16-23-(Lowest Ch.)

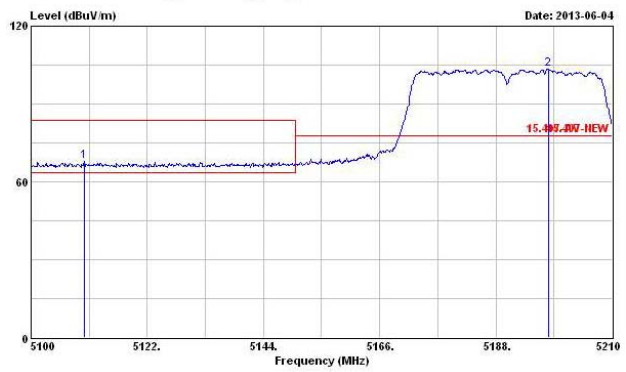


HT40,M16-23-(Highest Ch.)

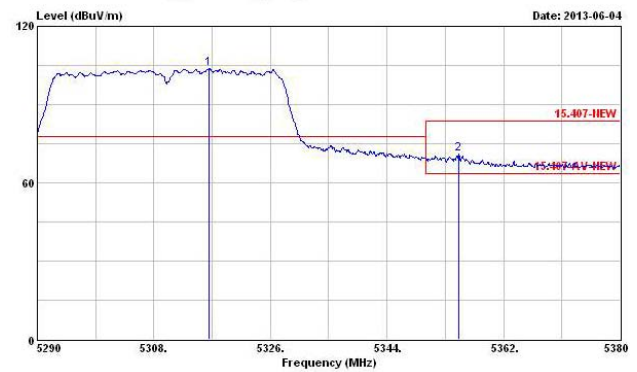

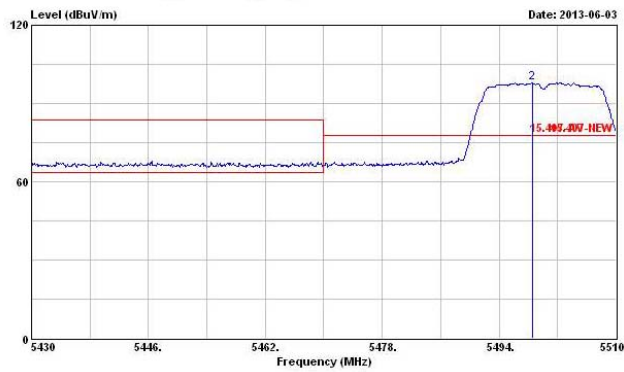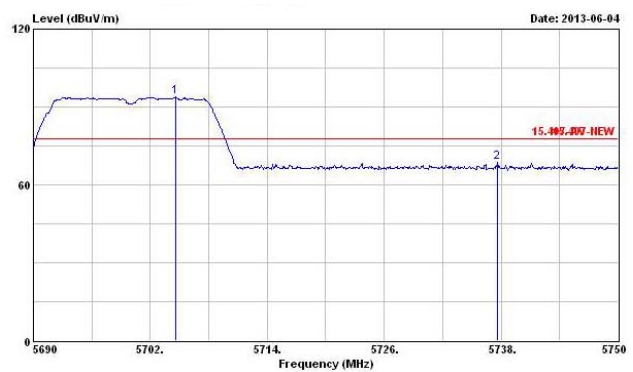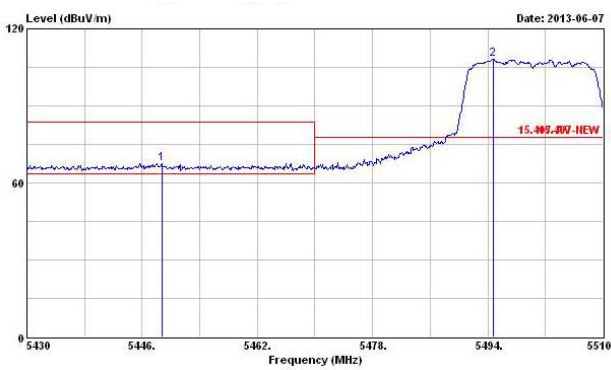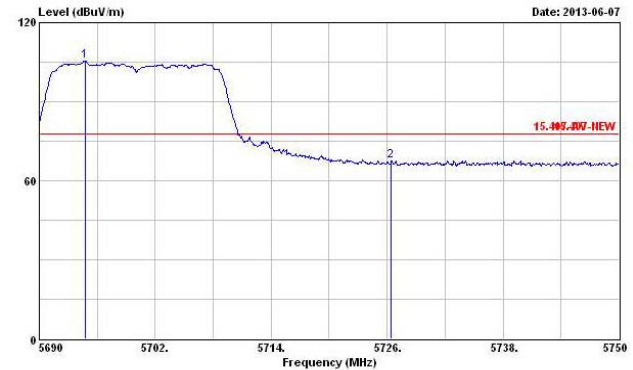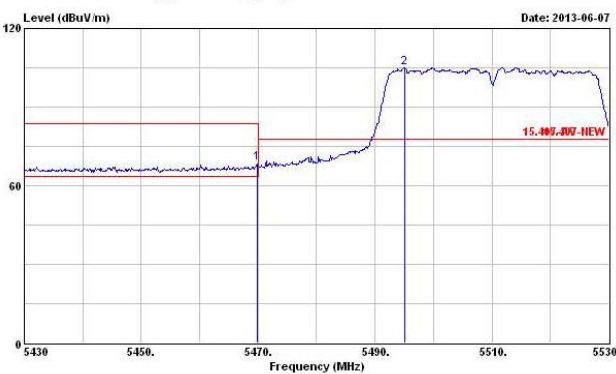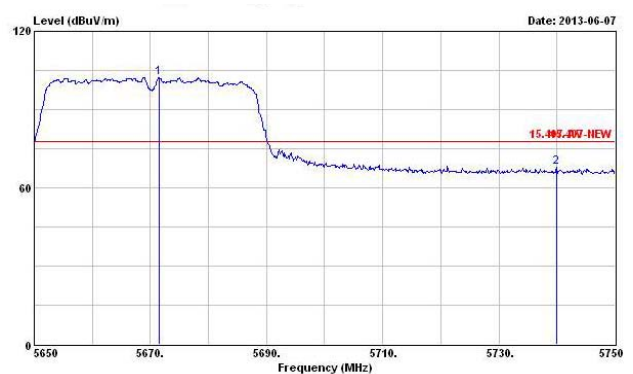
5470-5725MHz - Transmitter Radiated Bandedge Emissions Plots (with Antenna)
11a-(Lowest Ch.)

11a-(Highest Ch.)

HT20,M8-15-(Lowest Ch.)

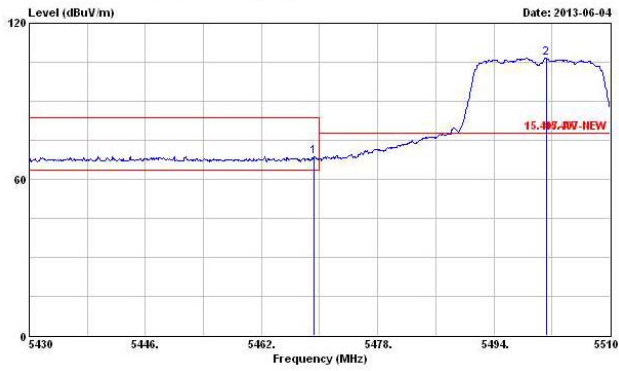HT20,M8-15-(Highest Ch.)

HT40,M8-15-(Lowest Ch.)

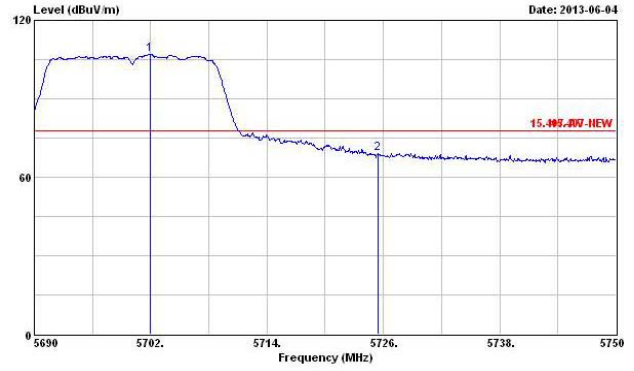HT40,M8-15-(Highest Ch.)


5470-5725MHz - Transmitter Radiated Bandedge Emissions Plots (with Antenna)


HT20,M16-23-(Lowest Ch.)




HT20,M16-23-(Highest Ch.)



HT40,M16-23-(Lowest Ch.)

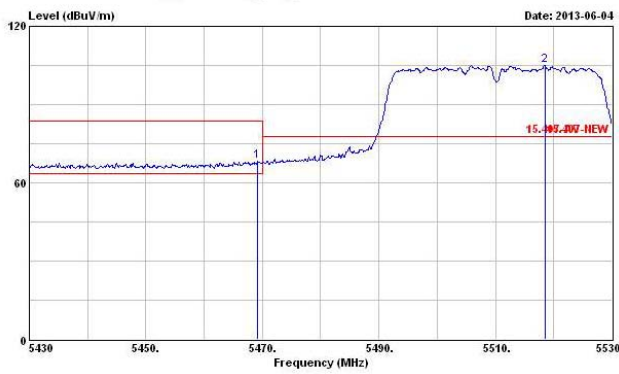

HT40,M16-23-(Highest Ch.)

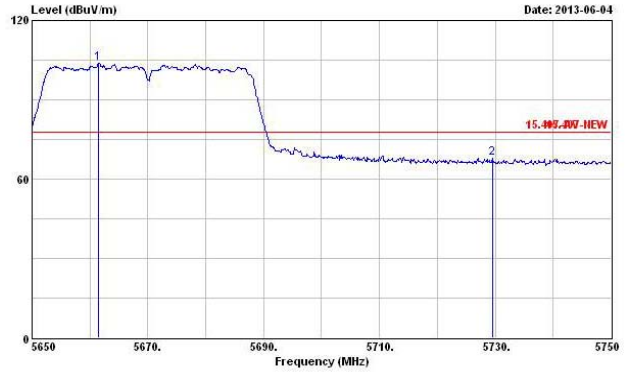

3.7 Transmitter Radiated Unwanted Emissions

3.7.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.825 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.825 5.835 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.7.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.7.3 Test Procedures

Test Method	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
☒	Measurements in the frequency range 5 GHz - 10GHz are typically made at a closer distance 1.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
☒	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
☒	Measurements in the frequency range above 18 GHz - 40GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC KDB 789033, clause H)2) for unwanted emissions into non-restricted bands.
☒	Refer as FCC KDB 789033, clause H)1) for unwanted emissions into restricted bands.
☐	Refer as FCC KDB 789033, H)6) Method AD (Trace Averaging).
☐	Refer as FCC KDB 789033, H)6) Method VB (Reduced VBW).
☒	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
☐	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
☒	Refer as FCC KDB 789033, clause H)5) measurement procedure peak limit.
☐	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	For radiated measurement.
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
☒	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.


Test Method	
☐	For conducted and cabinet radiation measurement, refer as FCC KDB 789033, clause H)3).
☐	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
☐	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
☐	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.7.4 Test Setup

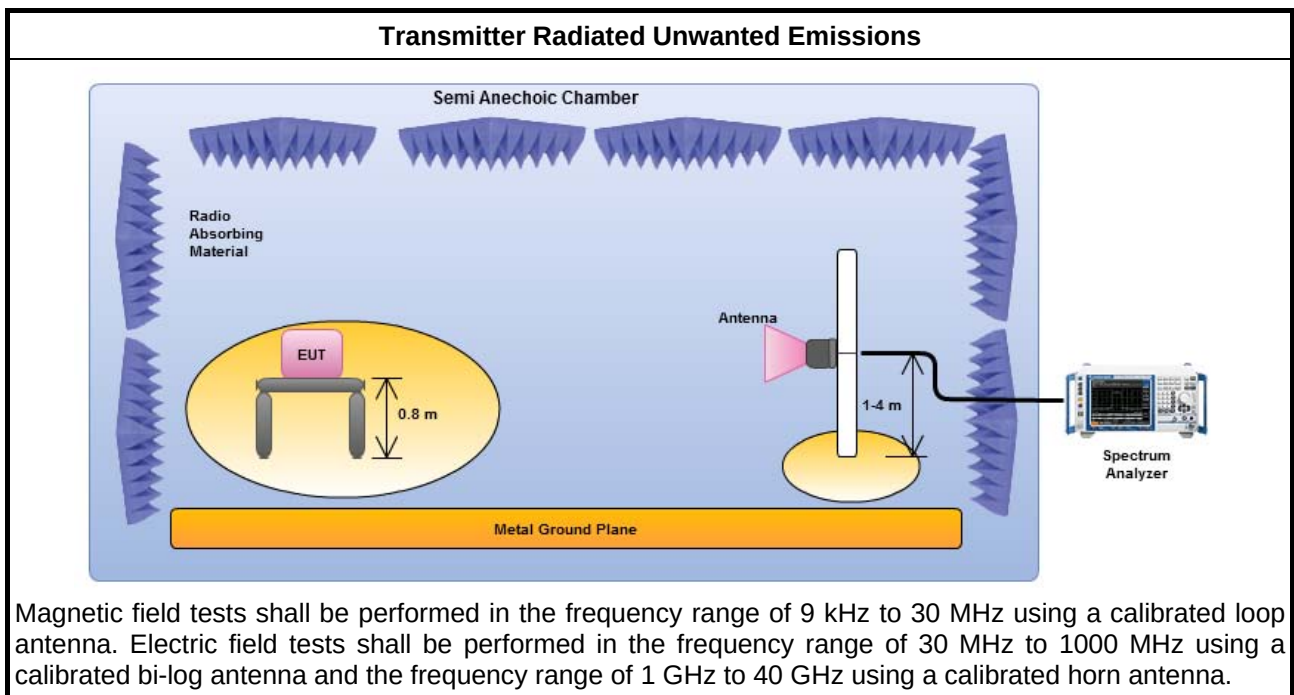


3.7.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

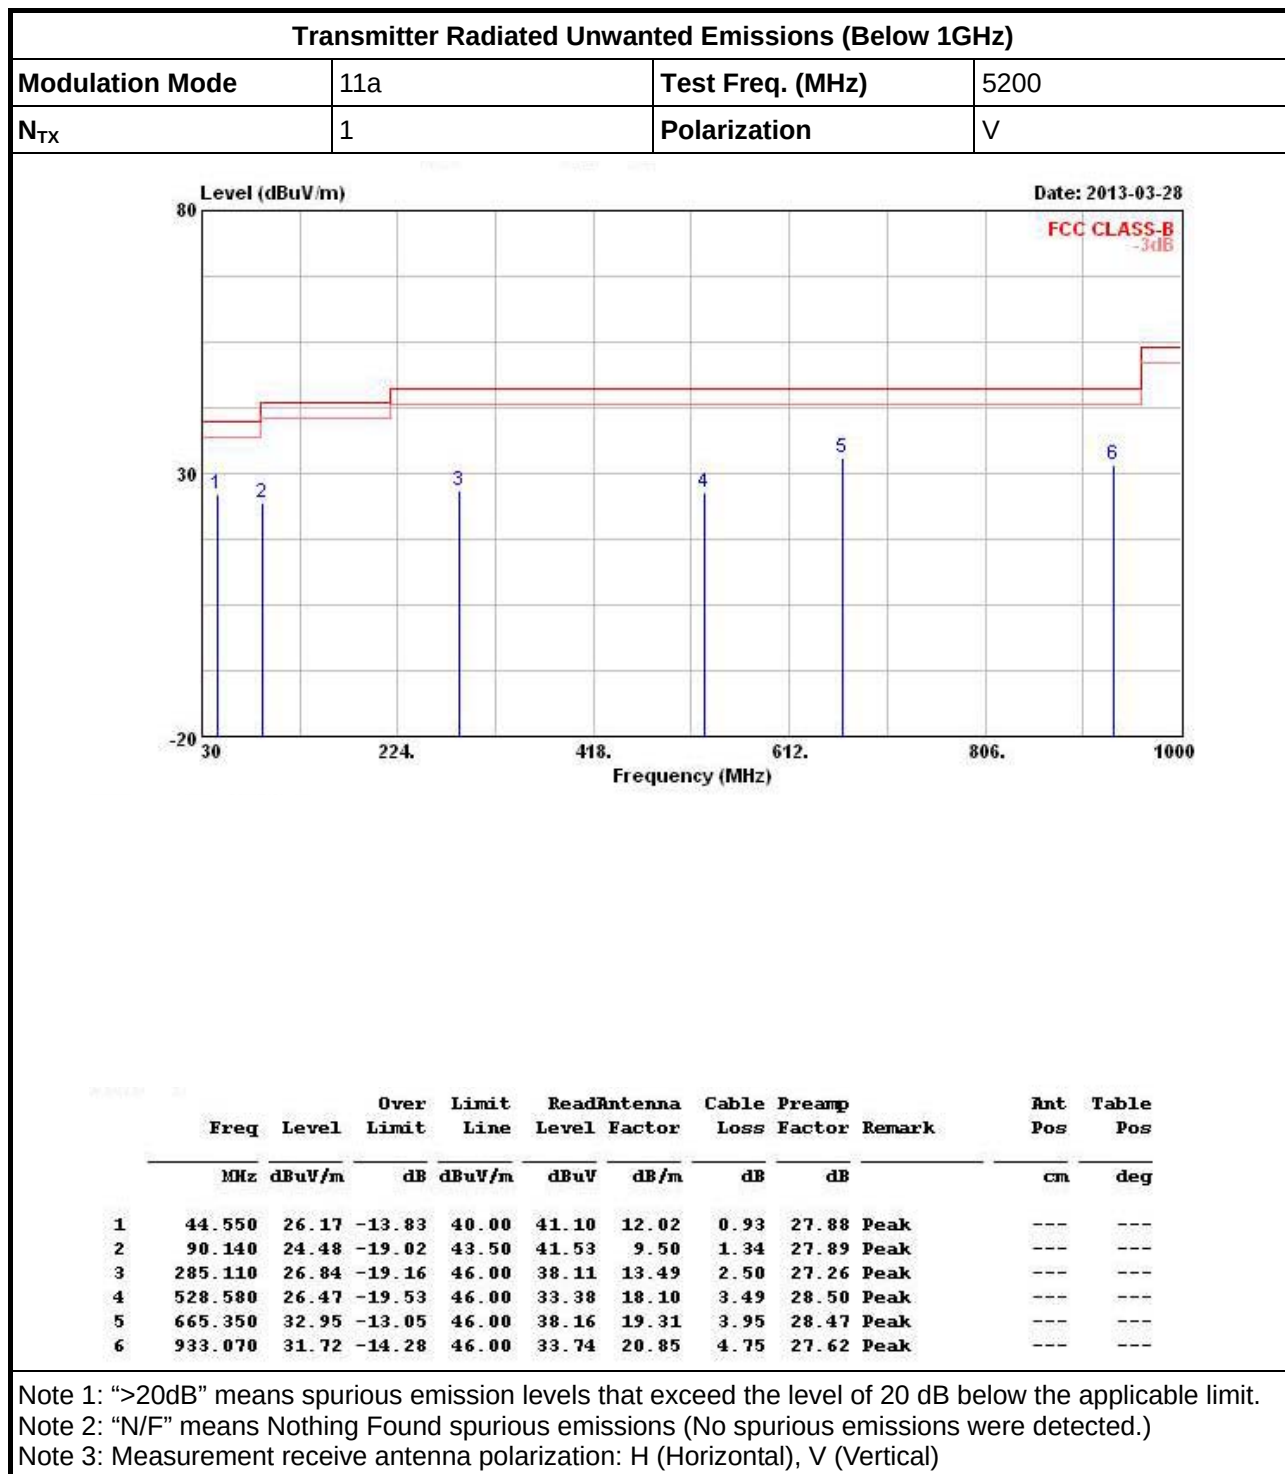3.7.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)


Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	H

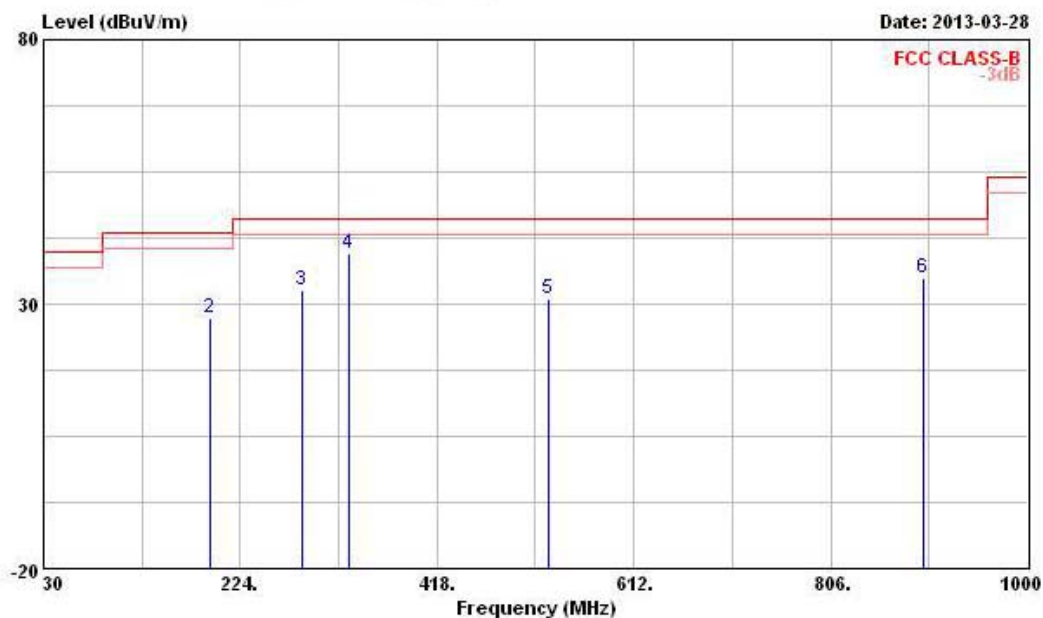


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	30.000	26.31	-13.69	40.00	37.29	16.22	0.78	27.98	Peak	---	---
2	194.900	27.35	-16.15	43.50	41.84	10.99	2.04	27.52	Peak	---	---
3	285.110	32.52	-13.48	46.00	43.79	13.49	2.50	27.26	Peak	---	---
4	331.670	39.56	-6.44	46.00	50.08	14.20	2.72	27.44	Peak	---	---
5	528.580	31.07	-14.93	46.00	37.98	18.10	3.49	28.50	Peak	---	---
6	897.180	34.95	-11.05	46.00	38.10	20.03	4.60	27.78	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5200
N_{TX}	3	Polarization	V

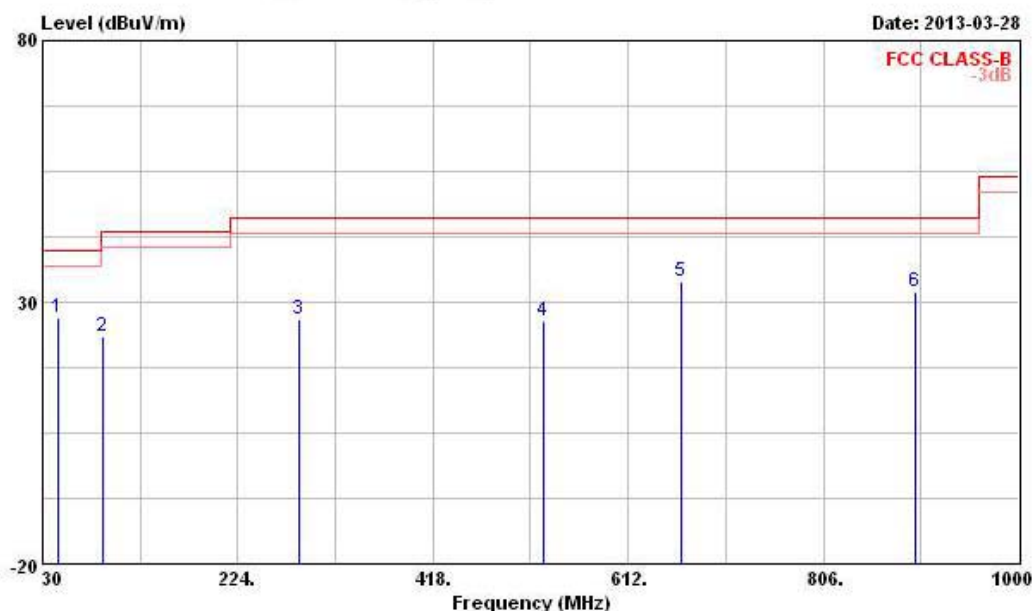

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	44.550	27.10	-12.90	40.00	42.03	12.02	0.93	27.88	Peak	---	---
2	90.140	23.36	-20.14	43.50	40.41	9.50	1.34	27.89	Peak	---	---
3	285.110	26.74	-19.26	46.00	38.01	13.49	2.50	27.26	Peak	---	---
4	528.580	26.44	-19.56	46.00	33.35	18.10	3.49	28.50	Peak	---	---
5	664.380	33.93	-12.07	46.00	39.15	19.32	3.94	28.48	Peak	---	---
6	897.180	31.93	-14.07	46.00	35.08	20.03	4.60	27.78	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5200
N_{TX}	3	Polarization	H

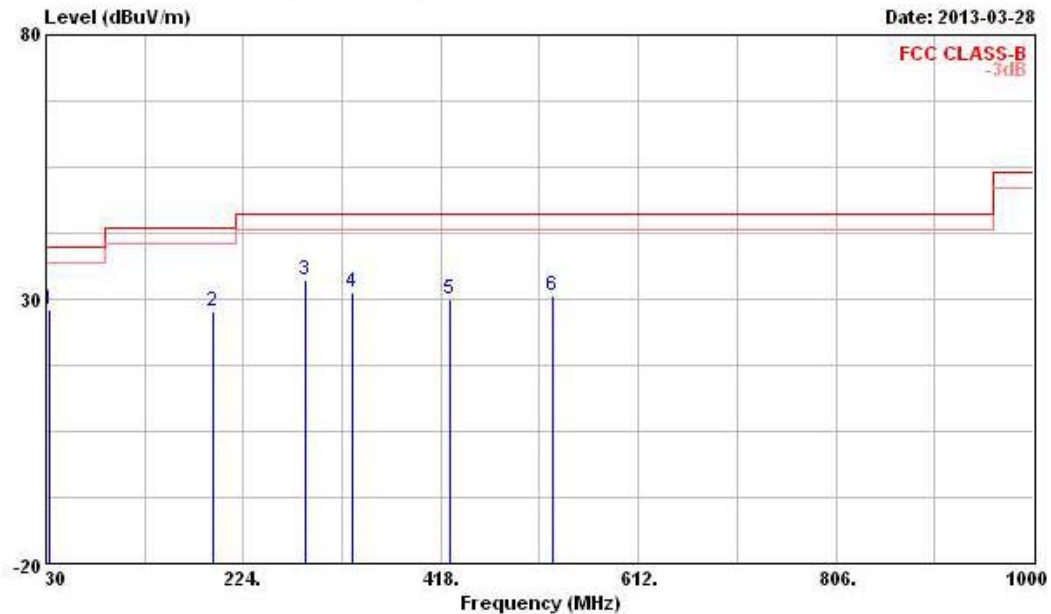

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	32.910	28.06	-11.94	40.00	40.12	15.11	0.79	27.96	Peak	---	---
2	194.900	27.85	-15.65	43.50	42.34	10.99	2.04	27.52	Peak	---	---
3	285.110	33.68	-12.32	46.00	44.95	13.49	2.50	27.26	Peak	---	---
4	330.700	31.45	-14.55	46.00	41.97	14.19	2.72	27.43	Peak	---	---
5	427.700	29.88	-16.12	46.00	39.07	15.82	3.08	28.09	Peak	---	---
6	528.580	30.76	-15.24	46.00	37.67	18.10	3.49	28.50	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5230
N_{TX}	3	Polarization	V

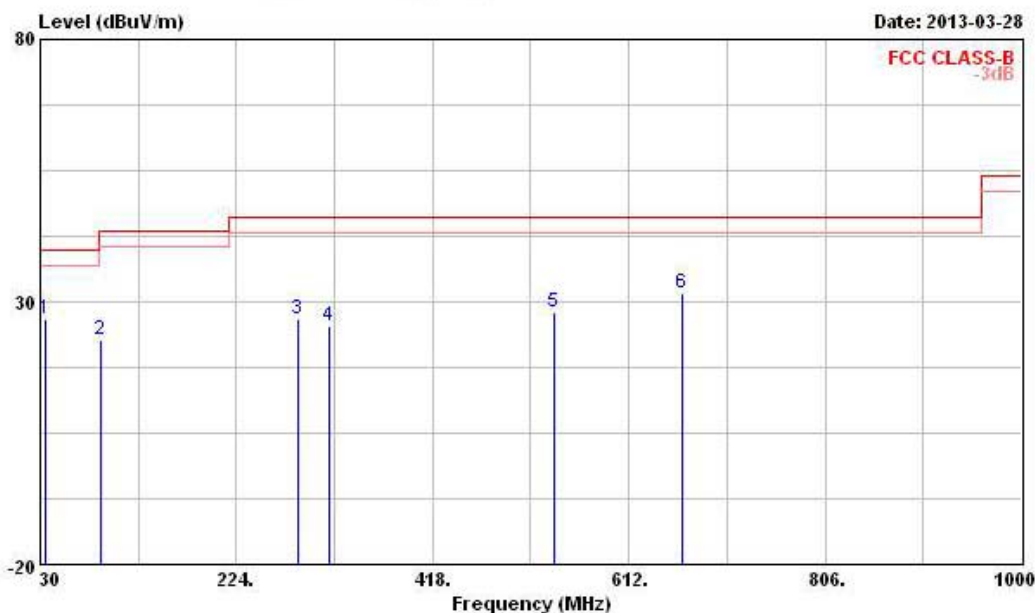


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	35.820	26.74	-13.26	40.00	39.71	14.15	0.82	27.94	Peak	---	---
2	90.140	22.92	-20.58	43.50	39.97	9.50	1.34	27.89	Peak	---	---
3	285.110	26.65	-19.35	46.00	37.92	13.49	2.50	27.26	Peak	---	---
4	315.180	25.35	-20.65	46.00	36.10	13.94	2.63	27.32	Peak	---	---
5	537.310	28.03	-17.97	46.00	34.67	18.35	3.52	28.51	Peak	---	---
6	664.380	31.71	-14.29	46.00	36.93	19.32	3.94	28.48	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5230
N_{TX}	3	Polarization	H

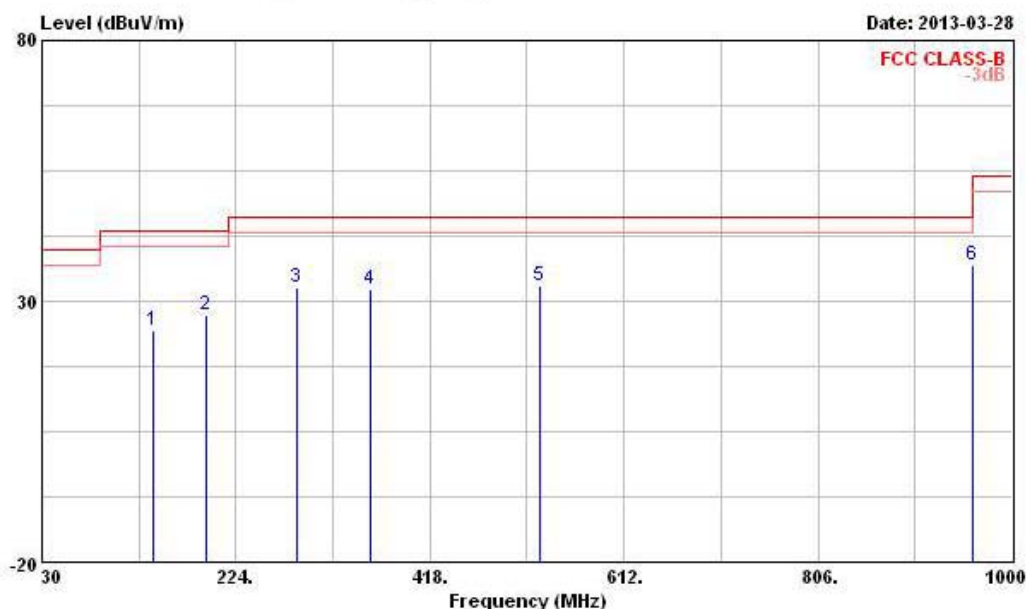


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	141.550	24.33	-19.17	43.50	38.57	11.78	1.71	27.73	Peak	---	---
2	194.900	27.47	-16.03	43.50	41.96	10.99	2.04	27.52	Peak	---	---
3	285.110	32.56	-13.44	46.00	43.83	13.49	2.50	27.26	Peak	---	---
4	357.860	32.14	-13.86	46.00	42.32	14.60	2.85	27.63	Peak	---	---
5	528.580	32.80	-13.20	46.00	39.71	18.10	3.49	28.50	Peak	---	---
6	960.230	36.91	-17.09	54.00	38.04	21.52	4.85	27.50	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

3.7.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5150-5250MHz

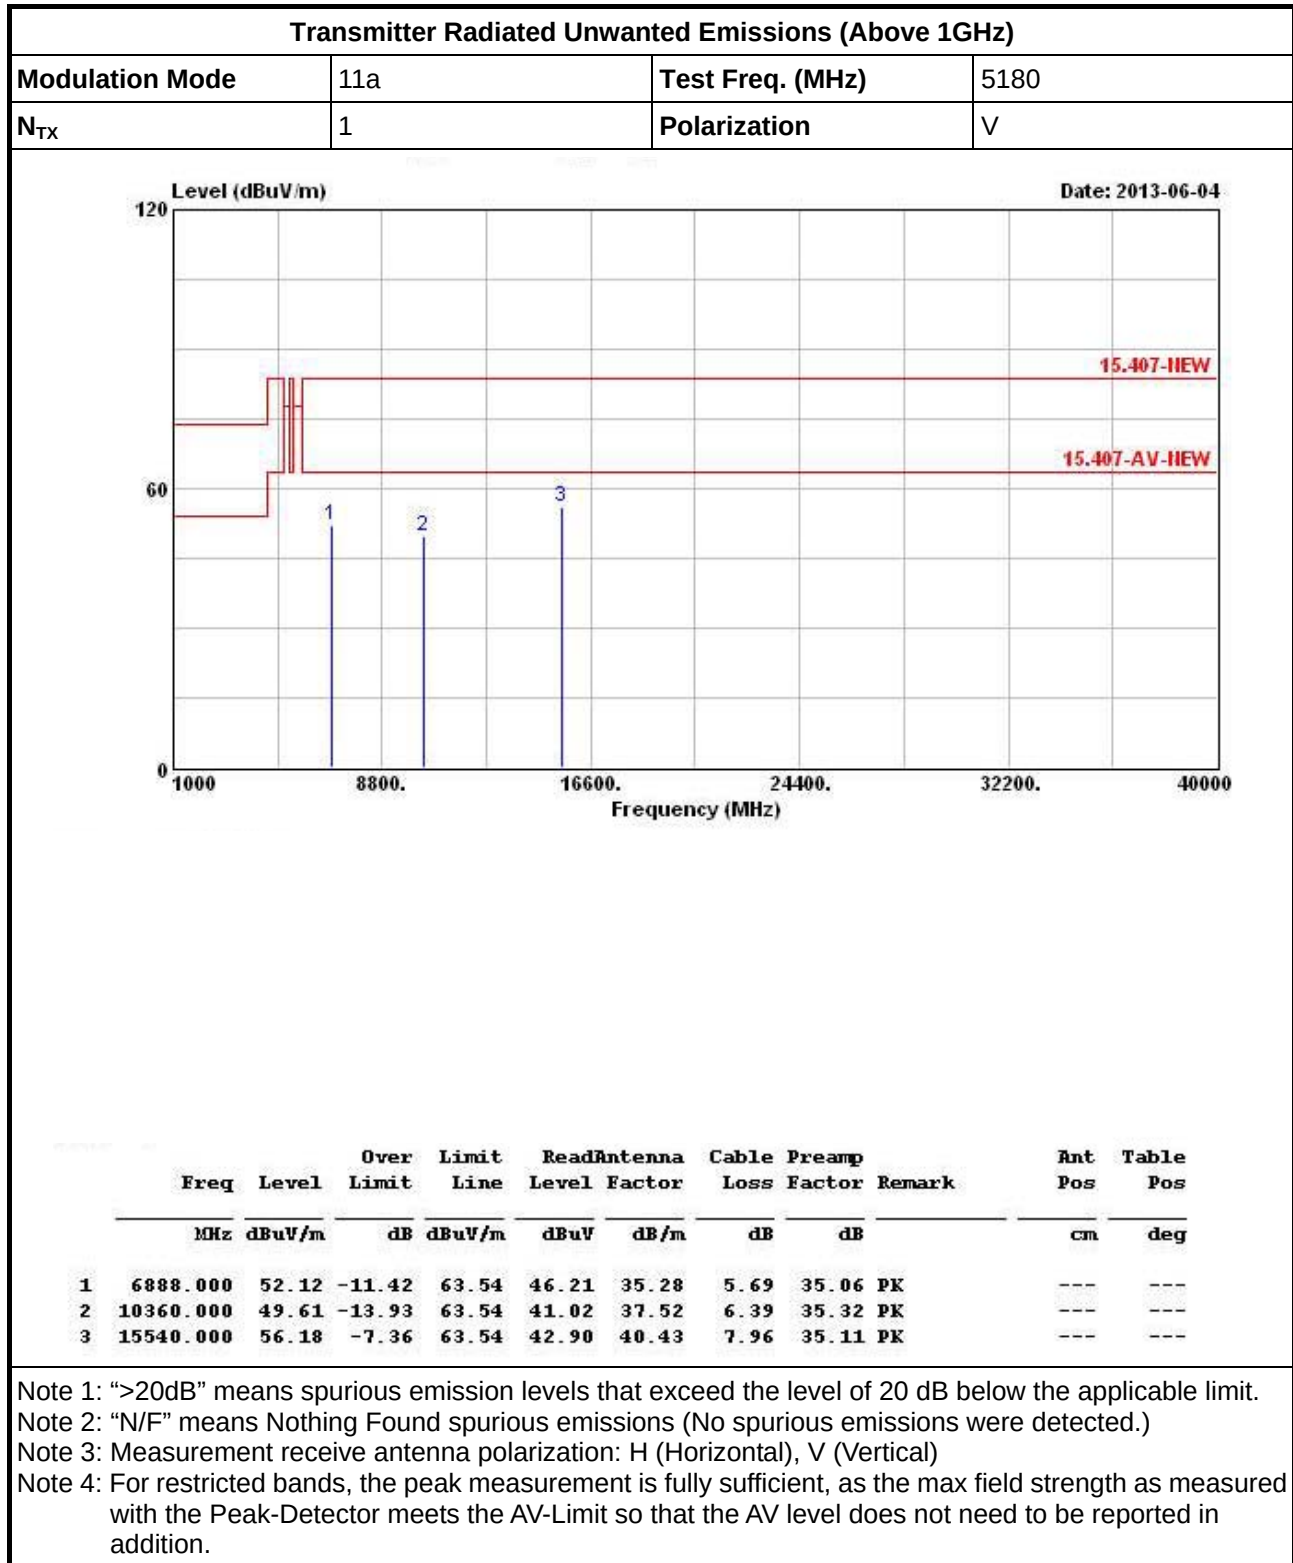

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5180
N_{TX}	1	Polarization	H

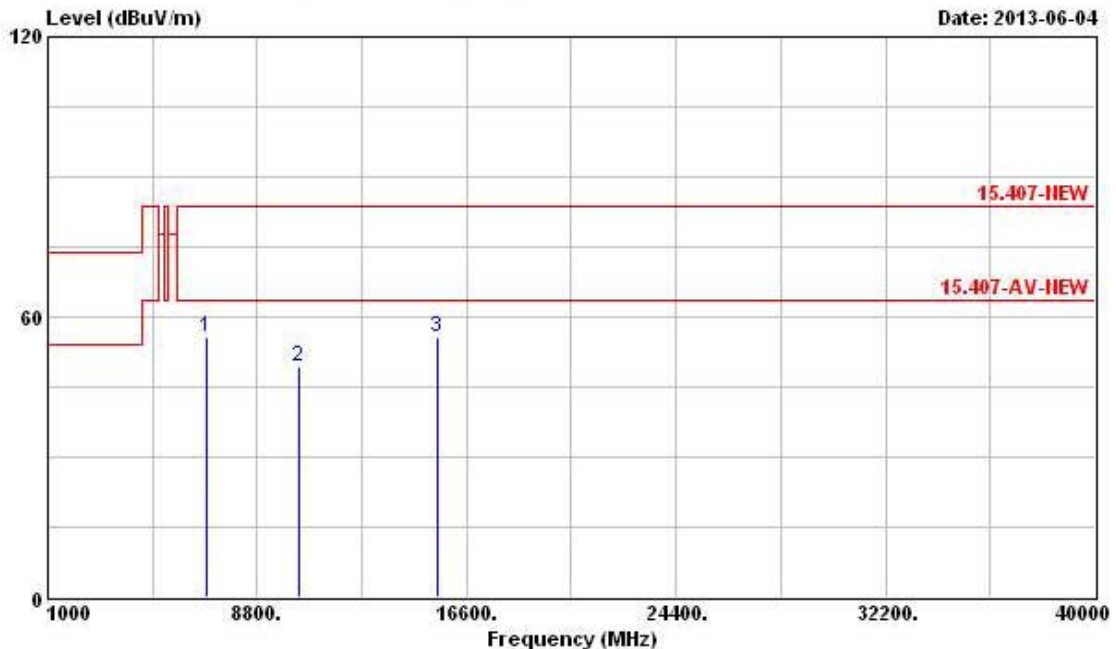


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6888.000	55.47	-8.07	63.54	49.56	35.28	5.69	35.06	PK	---	---
2	10360.000	49.50	-14.04	63.54	40.91	37.52	6.39	35.32	PK	---	---
3	15540.000	55.50	-8.04	63.54	42.22	40.43	7.96	35.11	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	V

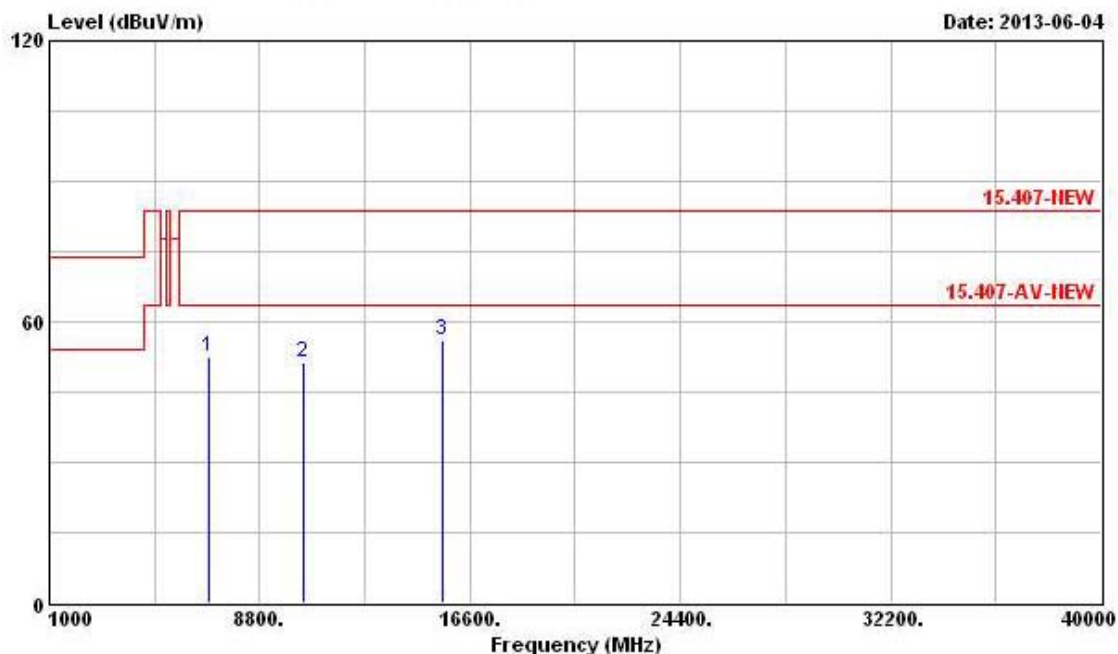

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6900.000	52.31	-11.23	63.54	46.40	35.28	5.69	35.06	PK	---	---
2	10400.000	51.13	-12.41	63.54	42.44	37.54	6.43	35.28	PK	---	---
3	15600.000	56.20	-7.34	63.54	42.88	40.50	8.00	35.18	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5200
N_{TX}	1	Polarization	H

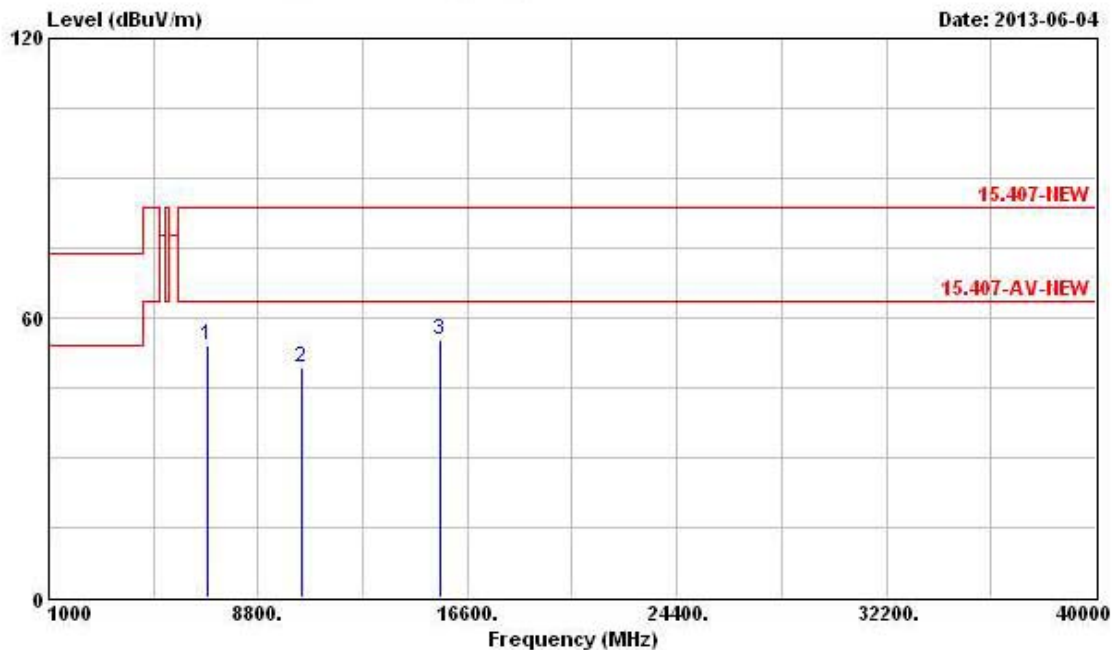


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg
1	6900.000	54.05	-9.49	63.54	48.14	35.28	5.69	35.06	PK	---	---
2	10400.000	49.28	-14.26	63.54	40.59	37.54	6.43	35.28	PK	---	---
3	15600.000	55.46	-8.08	63.54	42.14	40.50	8.00	35.18	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	V

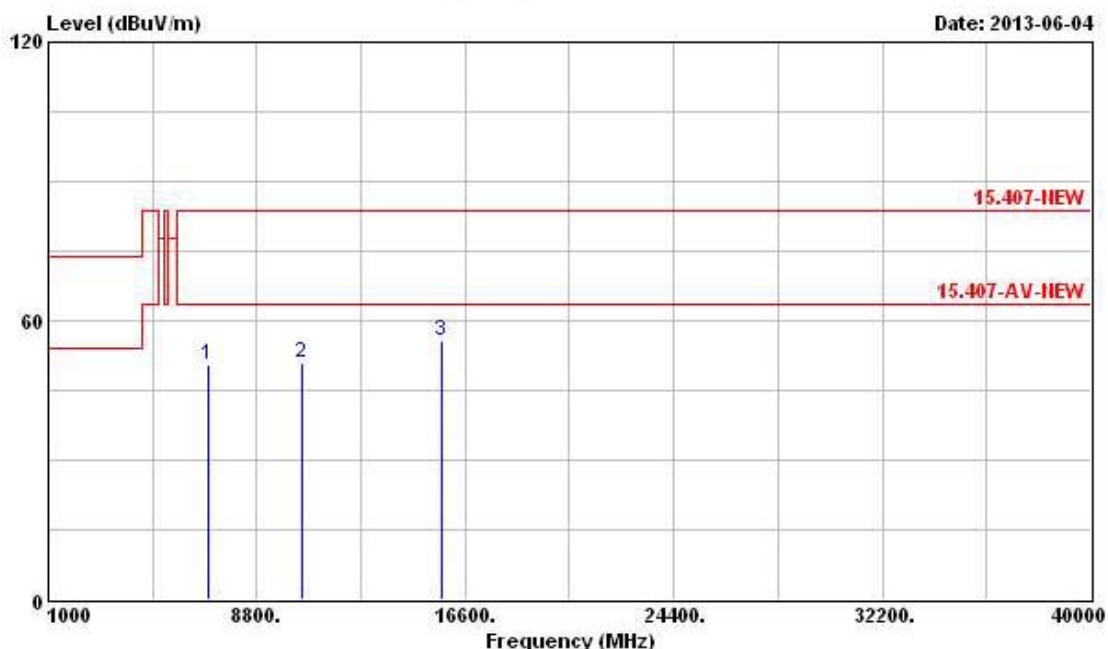

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6984.000	50.51	-13.03	63.54	44.60	35.30	5.70	35.09	PK	---	---
2	10480.000	50.78	-12.76	63.54	41.91	37.59	6.50	35.22	PK	---	---
3	15720.000	55.71	-7.83	63.54	42.26	40.62	8.11	35.28	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5240
N_{TX}	1	Polarization	H

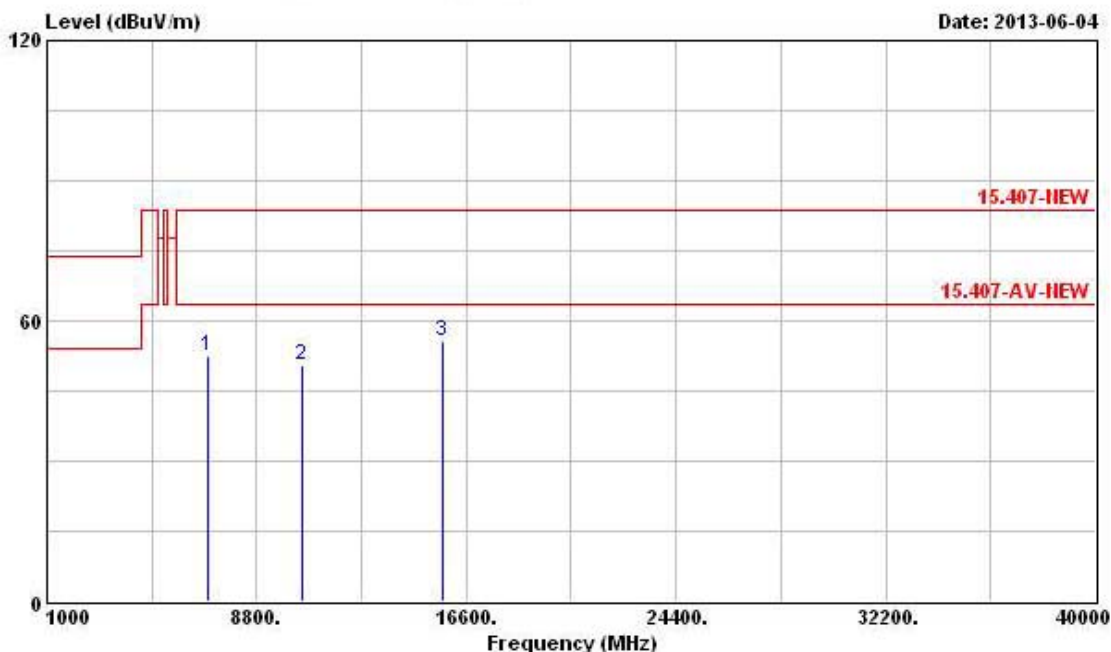

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6984.000	52.31	-11.23	63.54	46.40	35.30	5.70	35.09	PK	---	---
2	10480.000	50.54	-13.00	63.54	41.67	37.59	6.50	35.22	PK	---	---
3	15720.000	55.62	-7.92	63.54	42.17	40.62	8.11	35.28	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5180
N_{TX}	2	Polarization	V

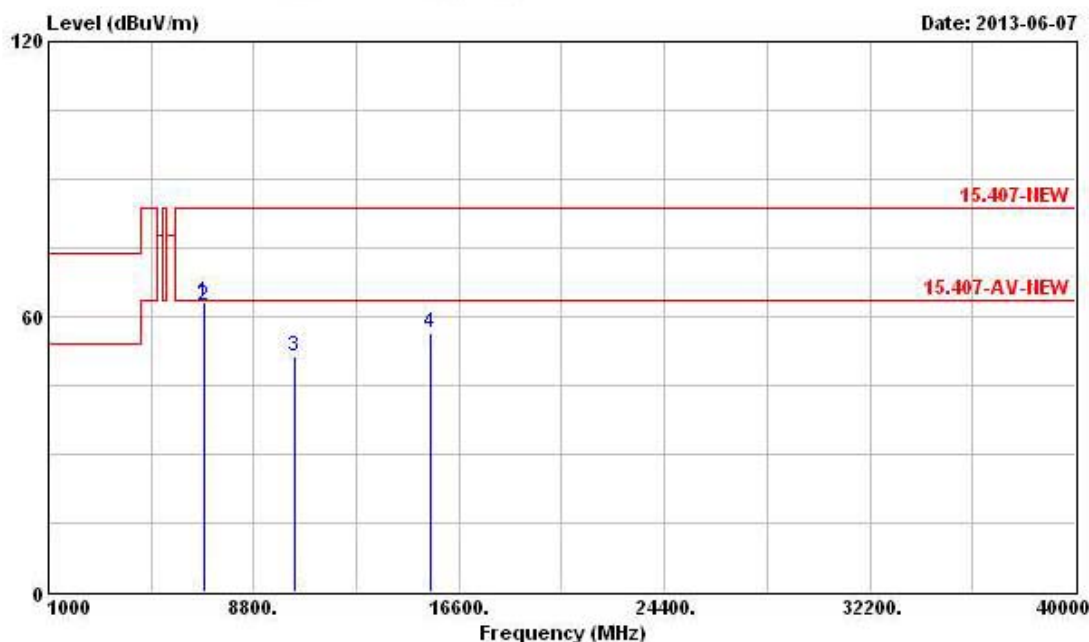

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		cm	deg
1	6888.000	63.07	-20.47	83.54	57.16	35.28	5.69	35.06 Peak	---	---
2 @	6888.000	62.48	-1.06	63.54	56.57	35.28	5.69	35.06 Average	---	---
3	10360.000	51.24	-12.30	63.54	42.65	37.52	6.39	35.32 PK	---	---
4	15540.000	56.64	-6.90	63.54	43.36	40.43	7.96	35.11 PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5180
N_{TX}	2	Polarization	H

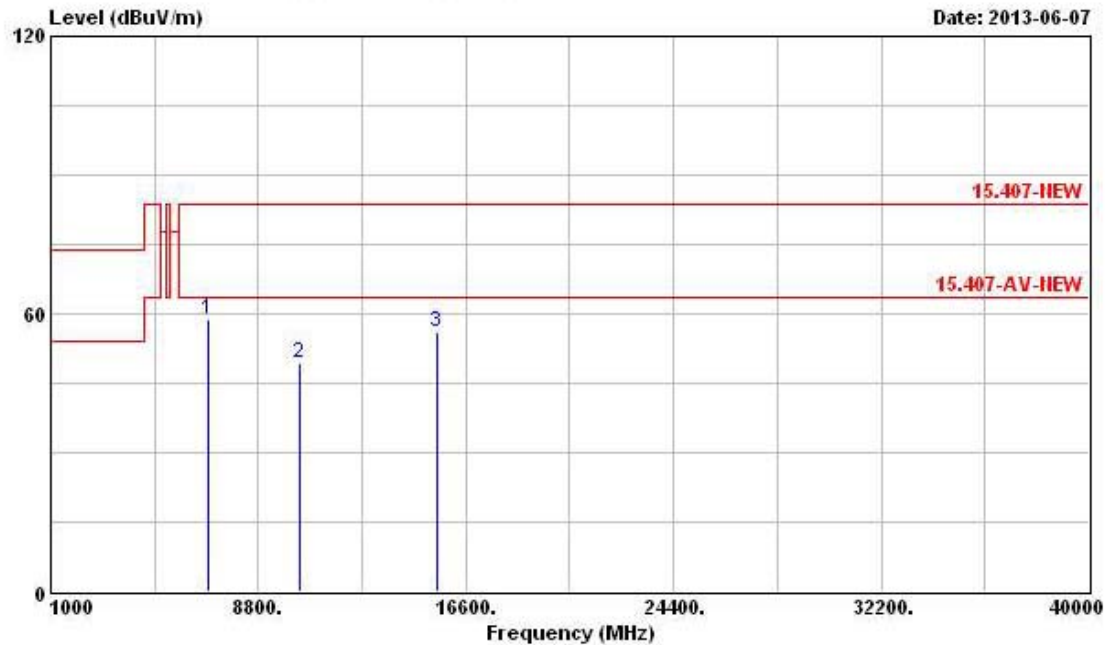

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6888.000	58.72	-4.82	63.54	52.81	35.28	5.69	35.06	PK	---	---
2	10360.000	49.37	-14.17	63.54	40.78	37.52	6.39	35.32	PK	---	---
3	15540.000	56.00	-7.54	63.54	42.72	40.43	7.96	35.11	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5200
N _{TX}	2	Polarization	V

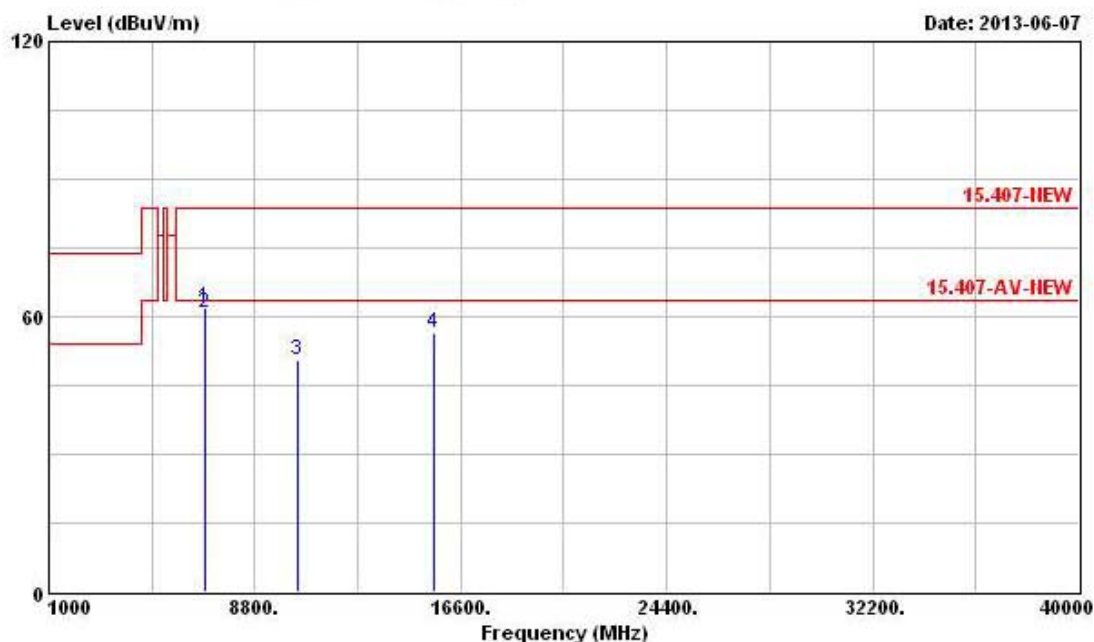

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6900.000	61.87	-21.67	83.54	55.96	35.28	5.69	35.06	Peak	---	---
2	6900.000	60.88	-2.66	63.54	54.97	35.28	5.69	35.06	Average	---	---
3	10400.000	50.63	-12.91	63.54	41.94	37.54	6.43	35.28	PK	---	---
4	15600.000	56.51	-7.03	63.54	43.19	40.50	8.00	35.18	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5200
N_{TX}	2	Polarization	H

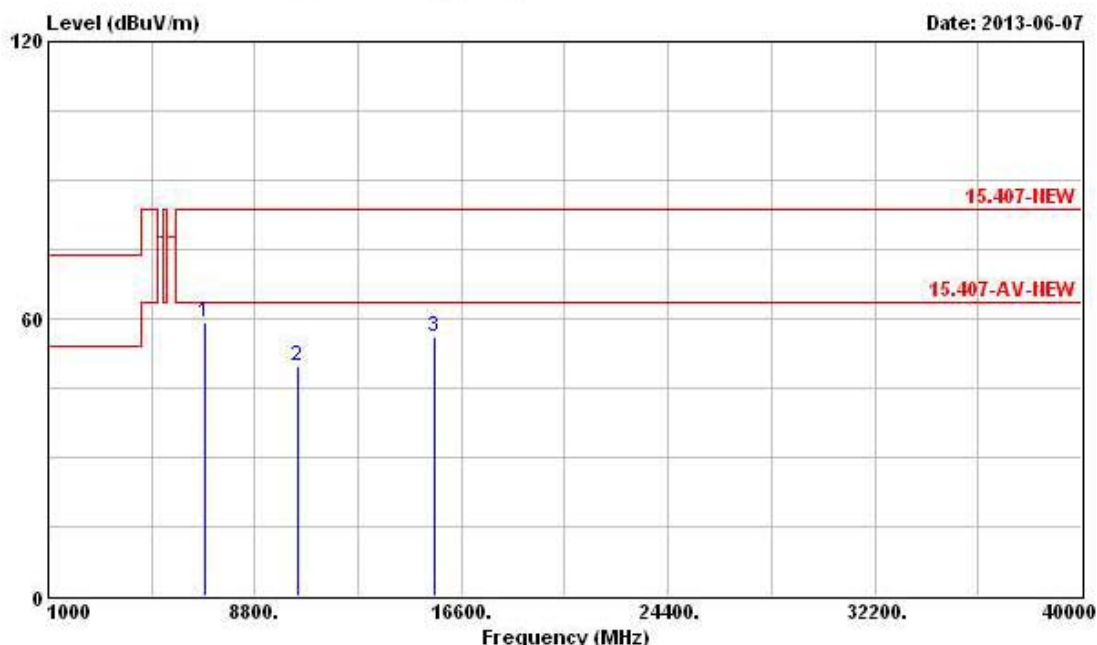

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	6900.000	59.02	-4.52	63.54	53.11	35.28	5.69	35.06	PK	---	---
2	10400.000	49.62	-13.92	63.54	40.93	37.54	6.43	35.28	PK	---	---
3	15600.000	55.90	-7.64	63.54	42.58	40.50	8.00	35.18	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5240
N_{TX}	2	Polarization	V

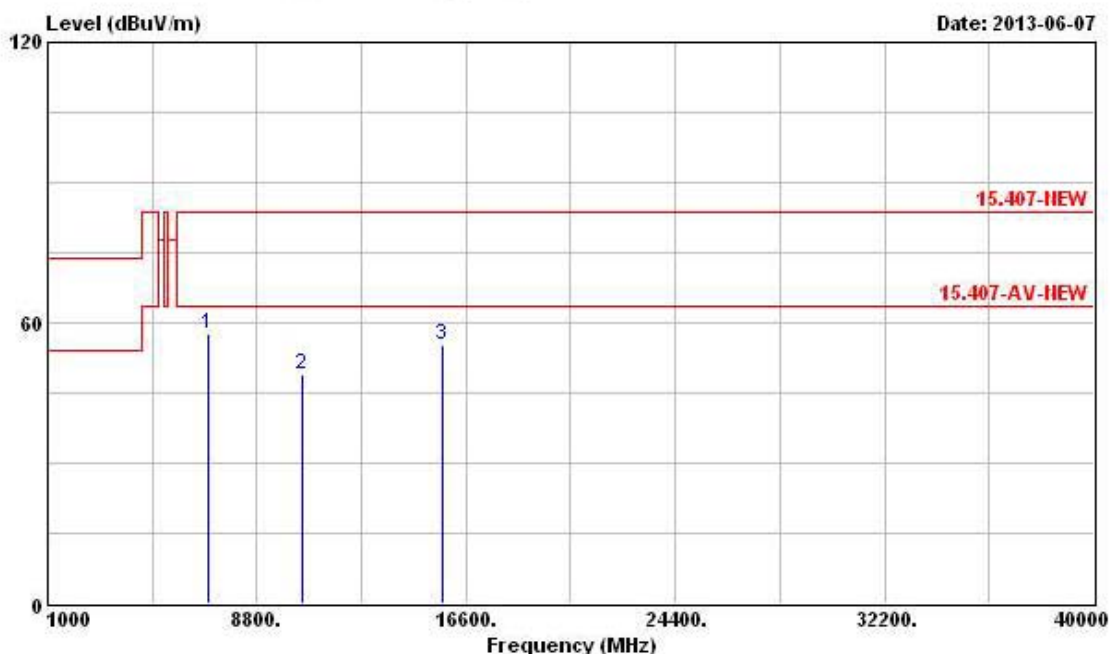

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6984.000	57.67	-5.87	63.54	51.76	35.30	5.70	35.09	PK	---	---
2	10480.000	49.14	-14.40	63.54	40.27	37.59	6.50	35.22	PK	---	---
3	15720.000	55.08	-8.46	63.54	41.63	40.62	8.11	35.28	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5240
N_{TX}	2	Polarization	H

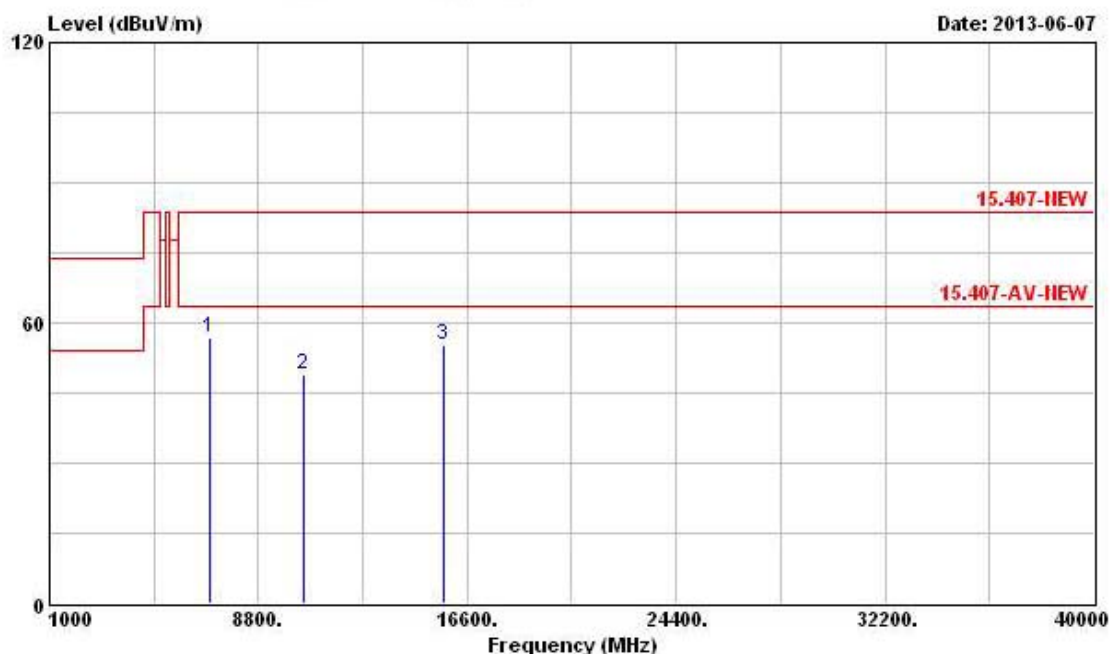

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6984.000	56.99	-6.55	63.54	51.08	35.30	5.70	35.09	PK	---	---
2	10480.000	48.91	-14.63	63.54	40.04	37.59	6.50	35.22	PK	---	---
3	15720.000	55.25	-8.29	63.54	41.80	40.62	8.11	35.28	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5190
N_{TX}	2	Polarization	V

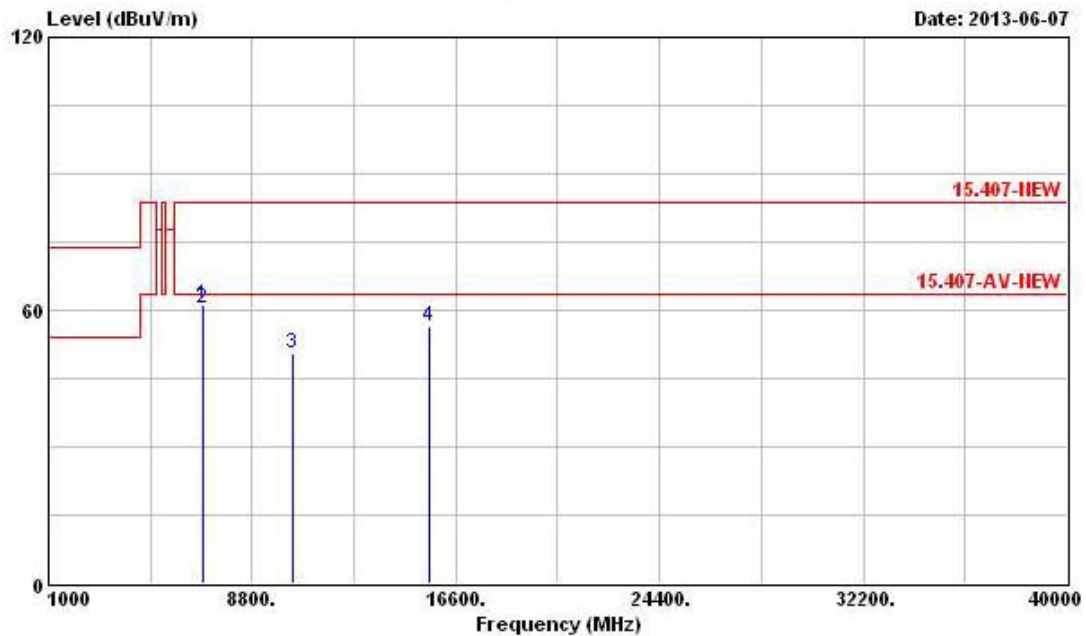

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6900.000	61.35	-22.19	83.54	55.44	35.28	5.69	35.06	Peak	---	---
2	6900.000	60.36	-3.18	63.54	54.45	35.28	5.69	35.06	Average	---	---
3	10380.000	50.42	-13.12	63.54	41.76	37.53	6.43	35.30	PK	---	---
4	15570.000	56.37	-7.17	63.54	43.03	40.47	8.00	35.13	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5190
N_{TX}	2	Polarization	H

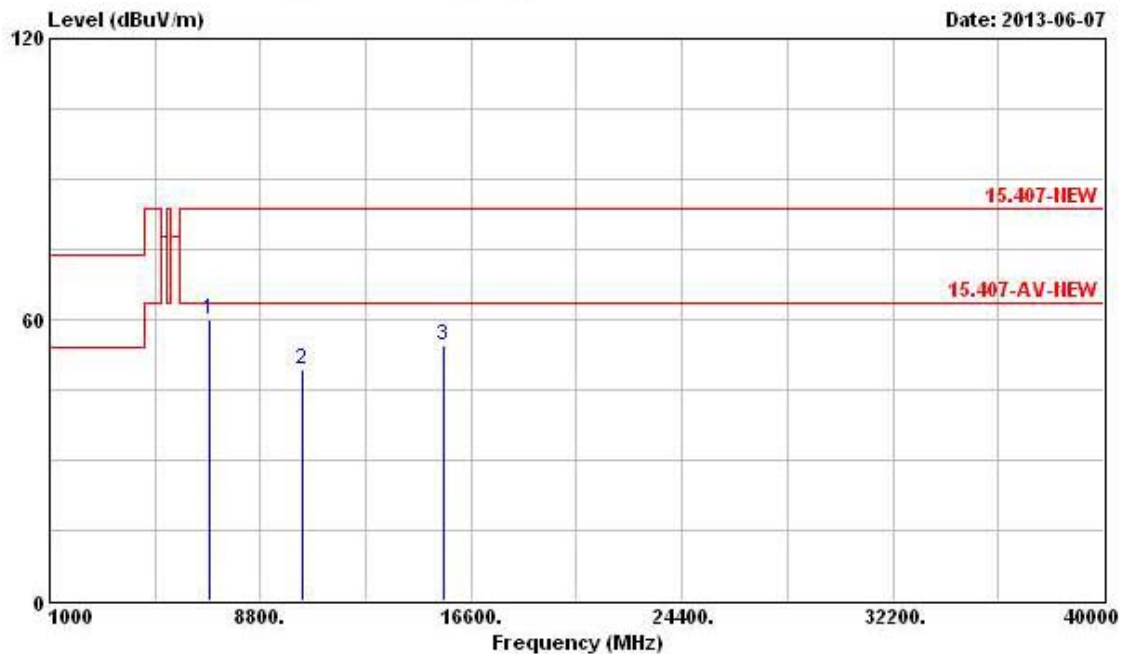


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6900.000	59.93	-3.61	63.54	54.02	35.28	5.69	35.06	PK	---	---
2	10380.000	49.53	-14.01	63.54	40.87	37.53	6.43	35.30	PK	---	---
3	15570.000	54.40	-9.14	63.54	41.06	40.47	8.00	35.13	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5230
N_{TX}	2	Polarization	V

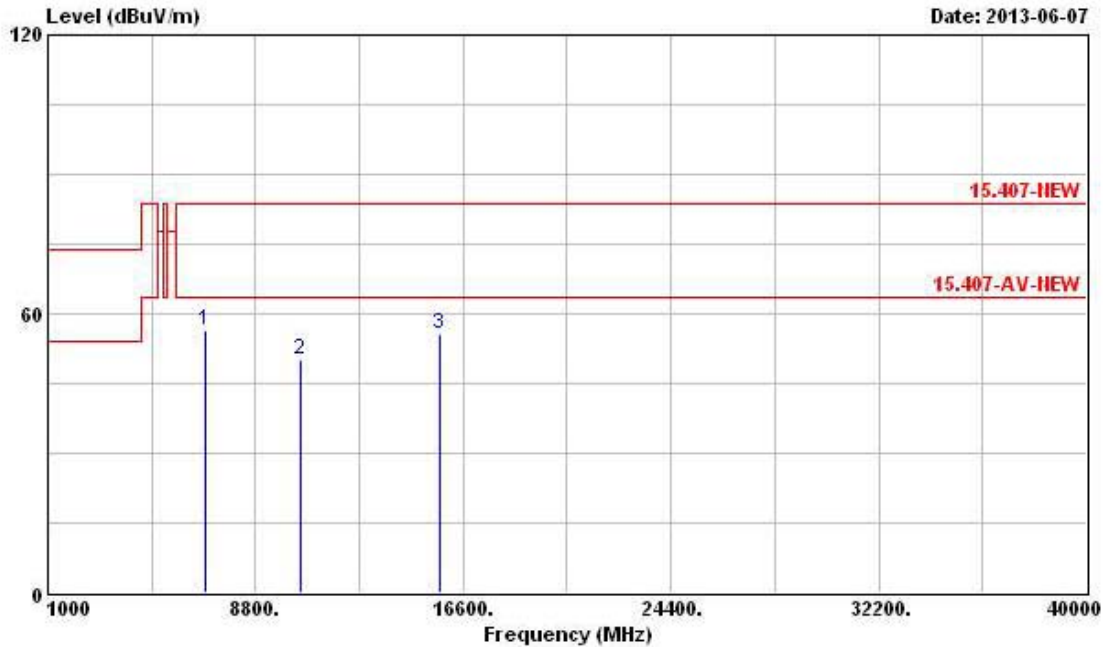


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6948.000	56.35	-7.19	63.54	50.44	35.29	5.70	35.08	PK	---	---
2	10460.000	50.14	-13.40	63.54	41.31	37.57	6.50	35.24	PK	---	---
3	15690.000	55.66	-7.88	63.54	42.22	40.59	8.11	35.26	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5230
N_{TX}	2	Polarization	H

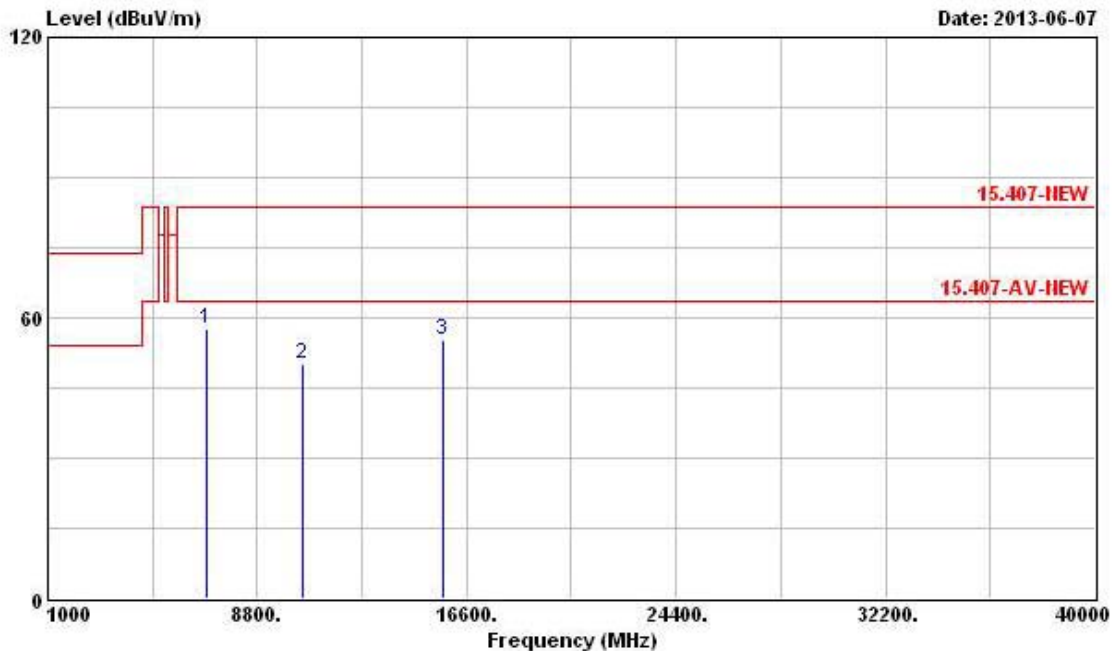

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6948.000	57.51	-6.03	63.54	51.60	35.29	5.70	35.08	PK	---	---
2	10460.000	50.07	-13.47	63.54	41.24	37.57	6.50	35.24	PK	---	---
3	15690.000	55.17	-8.37	63.54	41.73	40.59	8.11	35.26	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5180
N_{TX}	3	Polarization	V

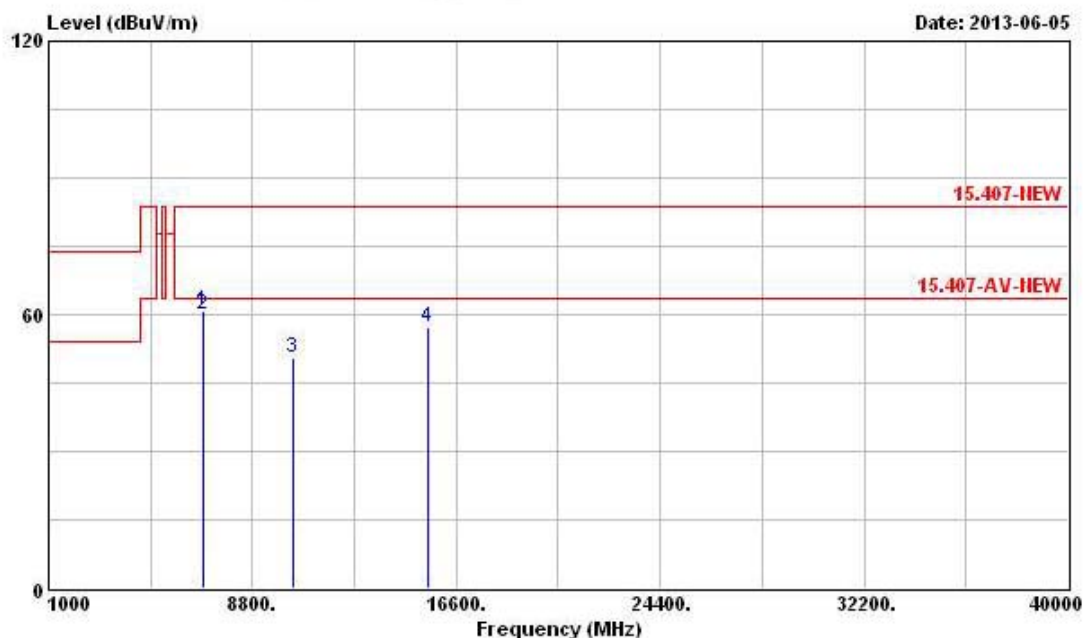

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6888.000	60.70	-22.84	83.54	54.79	35.28	5.69	35.06	Peak	---	---
2	6888.000	59.89	-3.65	63.54	53.98	35.28	5.69	35.06	Average	---	---
3	10360.000	50.42	-13.12	63.54	41.83	37.52	6.39	35.32	PK	---	---
4	15540.000	57.17	-6.37	63.54	43.89	40.43	7.96	35.11	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5180
N_{TX}	3	Polarization	H

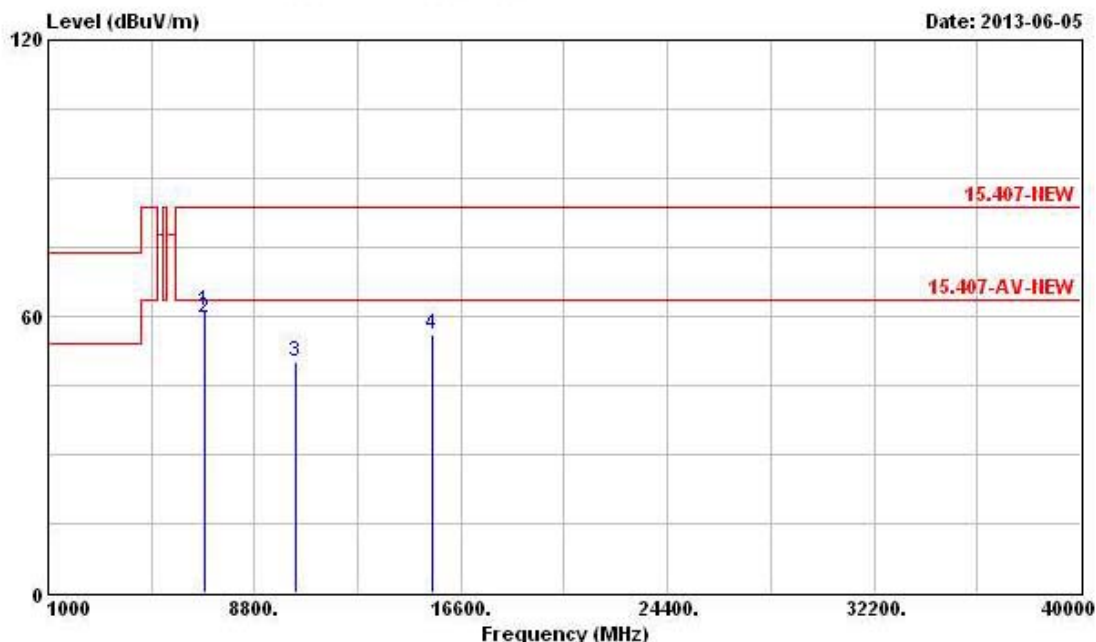

	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp			Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	6888.000	60.99	-22.55	83.54	55.08	35.28	5.69	35.06	Peak	---
2 @	6888.000	59.71	-3.83	63.54	53.80	35.28	5.69	35.06	Average	---
3	10360.000	50.14	-13.40	63.54	41.55	37.52	6.39	35.32	Average	---
4	15540.000	56.18	-7.36	63.54	42.90	40.43	7.96	35.11	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5200
N_{TX}	3	Polarization	V

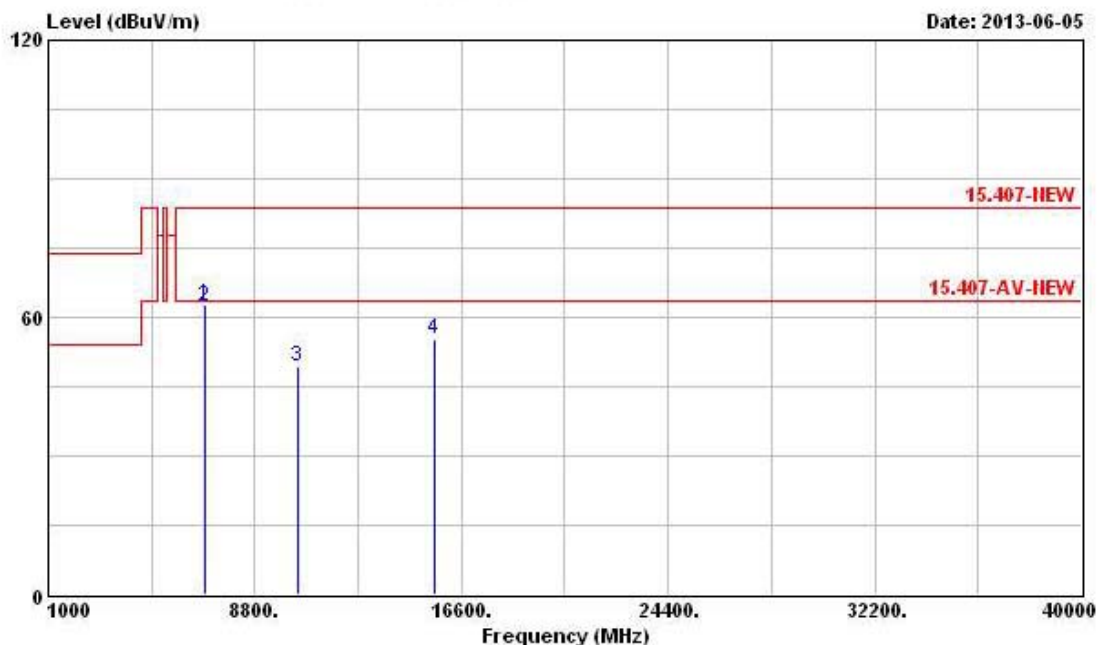

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6900.000	62.84	-20.70	83.54	56.93	35.28	5.69	35.06	Peak	---	---
2	6900.000	62.24	-1.30	63.54	56.33	35.28	5.69	35.06	Average	---	---
3	10400.000	49.34	-14.20	63.54	40.65	37.54	6.43	35.28	PK	---	---
4	15600.000	55.25	-8.29	63.54	41.93	40.50	8.00	35.18	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5200
N_{TX}	3	Polarization	H

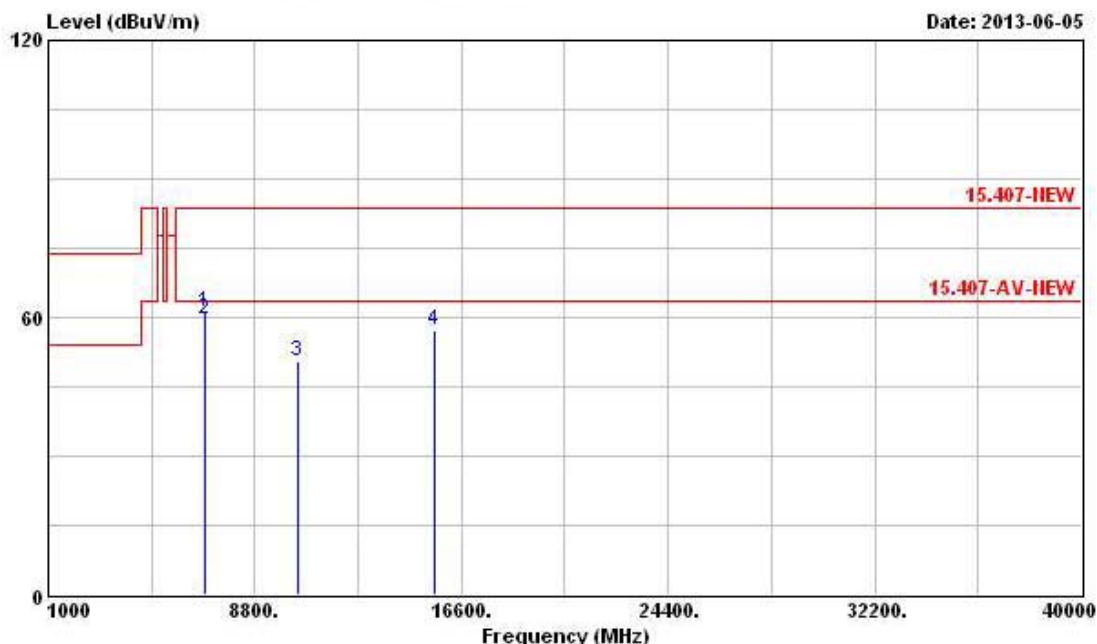

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6900.000	61.04	-22.50	83.54	55.13	35.28	5.69	35.06	Peak	---	---
2	@ 6900.000	59.72	-3.82	63.54	53.81	35.28	5.69	35.06	Average	---	---
3	10400.000	50.68	-12.86	63.54	41.99	37.54	6.43	35.28	PK	---	---
4	15600.000	57.07	-6.47	63.54	43.75	40.50	8.00	35.18	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5240
N_{TX}	3	Polarization	V

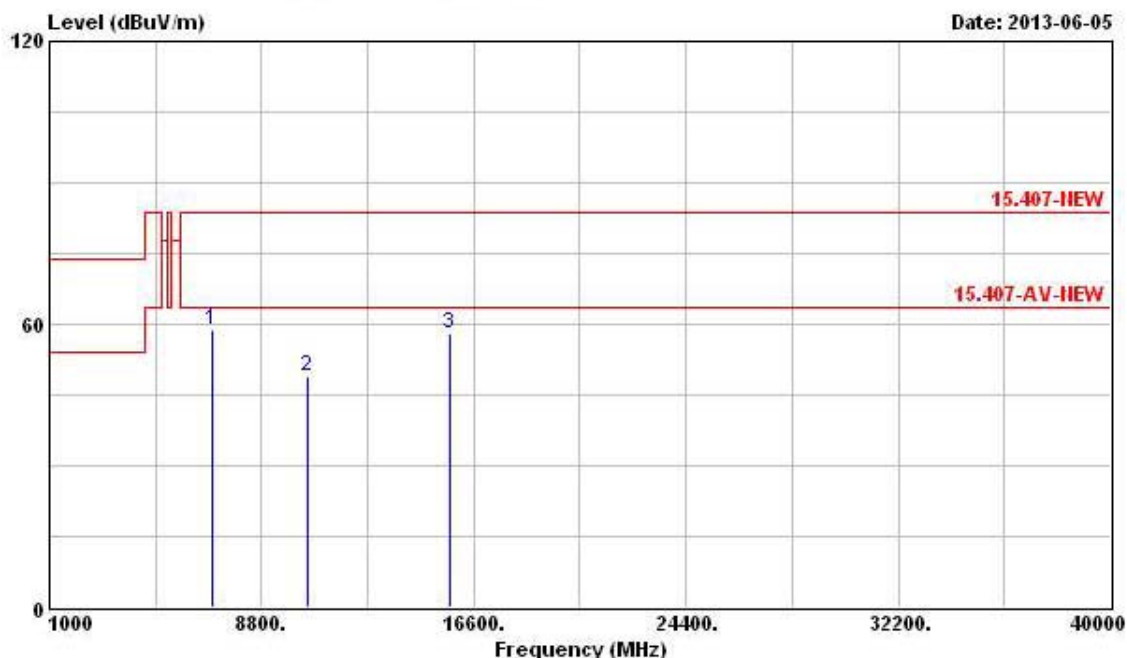

Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @ 6984.000	58.78	-4.76	63.54	52.87	35.30	5.70	35.09	PK	---	---
2 10480.000	49.08	-14.46	63.54	40.21	37.59	6.50	35.22	PK	---	---
3 @ 15720.000	58.09	-5.45	63.54	44.64	40.62	8.11	35.28	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5240
N_{TX}	3	Polarization	H

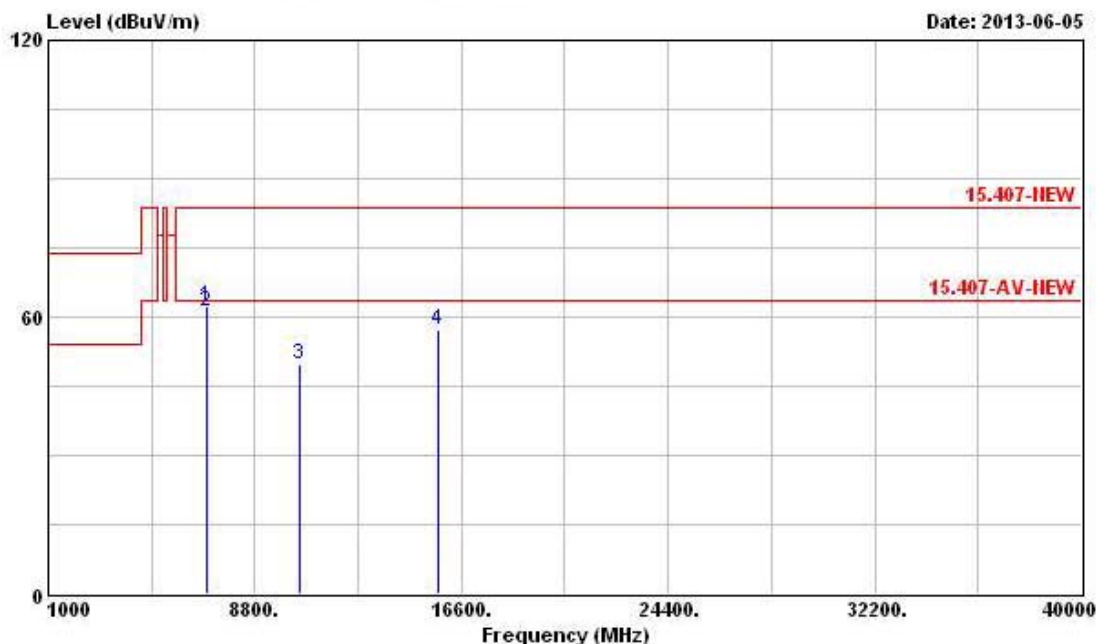

	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp			Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	6984.000	62.30	-21.24	83.54	56.39	35.30	5.70	35.09	Peak	---
2	@ 6984.000	61.13	-2.41	63.54	55.22	35.30	5.70	35.09	Average	---
3	10480.000	49.65	-13.89	63.54	40.78	37.59	6.50	35.22	PK	---
4	15720.000	57.09	-6.45	63.54	43.64	40.62	8.11	35.28	PK	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5190
N_{TX}	3	Polarization	V

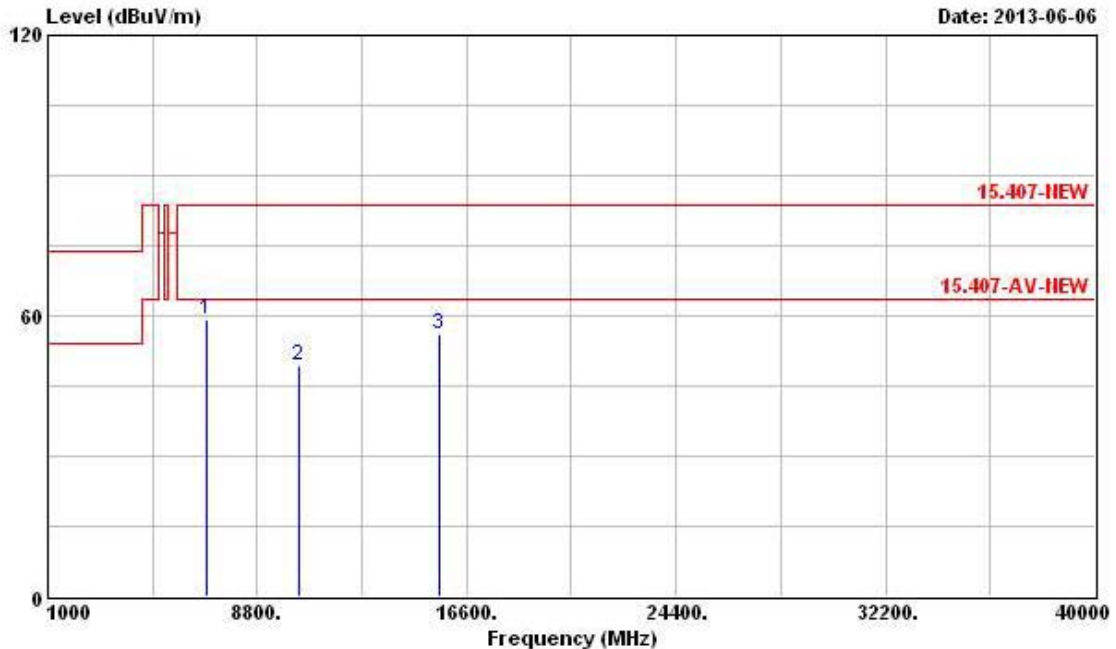

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	6900.000	59.30	-4.24	63.54	53.39	35.28	5.69	35.06	PK	---	---
2	10380.000	49.26	-14.28	63.54	40.60	37.53	6.43	35.30	PK	---	---
3	15570.000	56.00	-7.54	63.54	42.66	40.47	8.00	35.13	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.