

TEST REPORT

Product Name : Remote control
Brand Mark : PHILIPS
Model No. : RF402A
Report Number : BLA-EMC-202001-A3001
Date of Sample Receipt : 2020/1/19
Date of Test : 2020/1/19 to 2020/2/11
Date of Issue : 2020/2/11
FCC ID : S4X-RF402A
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

Shenzhen C&D Electronics Co., Ltd.
Building 2, Xia You Song Mountaintop Industrial Di YouSong Village,
Longhua Town, Bao'an District Shenzhen, Guangdong China 518000

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
IOT Test Centre of BlueAsia
No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen,China
TEL: +86-755-28682673
FAX: +86-755-28682673

Compiled by:

Bason

Review by:

Sweet. Wang

Approved by:

Emen - li

Date:

2020/2/11



REPORT REVISE RECORD

Version No.	Date	Description
00	2020/2/11	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	6
2	GENERAL INFORMATION	7
3	GENERAL DESCRIPTION OF E.U.T.	7
4	TEST ENVIRONMENT	8
5	TEST MODE	8
6	MEASUREMENT UNCERTAINTY	8
7	DESCRIPTION OF SUPPORT UNIT.....	9
8	LABORATORY LOCATION.....	9
9	TEST INSTRUMENTS LIST	10
	RADIATED SPURIOUS EMISSIONS	13
	LIMITS.....	13
	BLOCK DIAGRAM OF TEST SETUP	13
	PROCEDURE	13
	TEST DATA	15
	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	19
	LIMITS.....	19
	BLOCK DIAGRAM OF TEST SETUP.....	19
	PROCEDURE	19
	TEST DATA	21
	ANTENNA REQUIREMENT.....	22
	CONCLUSION.....	22
	CONDUCTED SPURIOUS EMISSIONS.....	23
	LIMITS.....	23
	BLOCK DIAGRAM OF TEST SETUP.....	23
	TEST DATA	24
	CONDUCTED BAND EDGES MEASUREMENT	25
	LIMITS.....	25
	BLOCK DIAGRAM OF TEST SETUP.....	25
	TEST DATA	26

POWER SPECTRUM DENSITY	27
LIMITS.....	27
BLOCK DIAGRAM OF TEST SETUP	27
TEST DATA	27
CONDUCTED PEAK OUTPUT POWER	28
LIMITS.....	28
BLOCK DIAGRAM OF TEST SETUP	28
TEST DATA	29
20DB BANDWIDTH	30
BLOCK DIAGRAM OF TEST SETUP	30
TEST DATA	30
MINIMUM 6DB BANDWIDTH	31
LIMITS.....	31
BLOCK DIAGRAM OF TEST SETUP	31
TEST DATA	31
10 APPENDIX.....	32
10.1 APPENDIXA: DTS BANDWIDTH.....	32
Test Result.....	32
Test Graphs.....	33
10.2 APPENDIXB: OCCUPIED CHANNEL BANDWIDTH	35
Test Result.....	35
Test Graphs.....	36
10.3 APPENDIXC: MAXIMUM CONDUCTED OUTPUT POWER	38
Test Result.....	38
Test Graphs.....	39
10.4 APPENDIXD: MAXIMUM POWER SPECTRAL DENSITY.....	41
Test Result.....	41
Test Graphs.....	42
10.5 APPENDIXE: BAND EDGE MEASUREMENTS	44
Test Result.....	44
Test Graphs.....	45
10.6 APPENDIXF: CONDUCTED SPURIOUS EMISSION	46
Test Result.....	46
Test Graphs.....	47

APPENDIX A: PHOTOGRAPHS OF TEST SETUP	51
APPENDIX B: PHOTOGRAPHS OF EUT	53

BlueAsia

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5 & Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass

2 GENERAL INFORMATION

Applicant	Shenzhen C&D Electronics Co., Ltd.
Address	Building 2, Xia You Song Mountaintop Industrial Di YouSong Village, Longhua Town, Bao'an District Shenzhen, Guangdong China 518000
Manufacturer	Shenzhen C&D Electronics Co., Ltd.
Address	Building 2, Xia You Song Mountaintop Industrial Di YouSong Village, Longhua Town, Bao'an District Shenzhen, Guangdong China 518000
Factory	Shenzhen C&D Electronics Co., Ltd.
Address	Building 2, Xia You Song Mountaintop Industrial Di YouSong Village, Longhua Town, Bao'an District Shenzhen, Guangdong China 518000
Product Name	Remote control
Test Model No.	RF402A

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	V1.1
Spectrum Spread Technology:	DSSS
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK
Channel Spacing:	2MHz
Number of Channels:	40
Antenna Type:	Integral Antenna
Antenna Gain:	2dBi

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
1010mpa	26	1.5V*2(AAA)

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode
TX mode (SE) below 1G	Keep the EUT in transmitting mode
TX mode (SE) Above 1G	Keep the EUT in transmitting mode
Remark: Only the data of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission	±4.34dB
Radiated Emission	±4.24dB
Radiated Emission	±4.68dB
AC Power Line Conducted Emission	±3.45dB

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
--	--	--	--	--

Note:

--" means no any support device during testing.

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
IOT Test Centre of BlueAsia
No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	5/8/2018	5/7/2021
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Receiver	R&S	ESR7	101199	5/7/2019	5/6/2020
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	7/14/2018	7/13/2020
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	7/14/2018	7/13/2020
Amplifier	SKET	LNPA-0118-45	N/A	7/4/2019	7/3/2020
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2/14/2019	2/13/2020

Test Equipment Of Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	5/8/2018	5/7/2021
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Receiver	R&S	ESR7	101199	5/7/2019	5/6/2020
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	7/14/2018	7/13/2020
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	7/14/2018	7/13/2020
Amplifier	SKET	LNPA-0118-45	N/A	7/4/2019	7/3/2020
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2/14/2019	2/13/2020

Test Equipment Of Conducted Spurious Emissions

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

Test Equipment Of Conducted Band Edges Measurement

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

Test Equipment Of Power Spectrum Density

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

Test Equipment Of Conducted Peak Output Power

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020

Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

Test Equipment Of 20dB Bandwidth

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

Test Equipment Of Minimum 6dB Bandwidth

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

RADIATED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX mode (SE) below 1G;TX mode (SE) Above 1G
Test Mode (Final Test)	TX mode (SE) below 1G;TX mode (SE) Above 1G
Tester:	Eason
Temperature	23℃
Humidity	48%

LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

BLOCK DIAGRAM OF TEST SETUP

PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on

the top of a variable-height antenna tower.

d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

j. Repeat above procedures until all frequencies measured was complete.

Remark:

1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Preamplifier Factor

3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

TEST DATA

[TestMode: TX mode (SE) Above 1G]						
Test channel:lowest						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	52.33	2.38	54.71	74	-19.29	Vertical
7206.00	51.87	4.36	56.23	74	-17.77	Vertical
9608.00	50.68	5.17	55.85	74	-18.15	Vertical
4804.00	58.4	2.38	60.78	74	-13.22	Horizontal
7206.00	57.91	4.36	62.27	74	-11.73	Horizontal
9608.00	57.06	5.17	62.23	74	-11.77	Horizontal
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	46.57	2.38	48.95	54	-5.05	Vertical
7206.00	46.11	4.36	50.47	54	-3.53	Vertical
9608.00	45.68	5.17	50.85	54	-3.15	Vertical
4804.00	48.88	2.38	51.26	54	-2.74	Horizontal
7206.00	46.73	4.36	51.09	54	-2.91	Horizontal
9608.00	45.91	5.17	51.08	54	-2.92	Horizontal
Test channel:Middle						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	51.93	0.17	52.1	74	-21.9	Vertical
7323.00	51.28	2.56	53.84	74	-20.16	Vertical
9764.00	50.74	3.41	54.15	74	-19.85	Vertical
4882.00	59.53	0.17	59.7	74	-14.3	Horizontal
7323.00	58.44	2.56	61	74	-13	Horizontal
9764.00	57.63	3.41	61.04	74	-12.96	Horizontal
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	46.55	0.17	46.72	54	-7.28	Vertical

7323.00	45.67	2.56	48.23	54	-5.77	Vertical
9764.00	45.05	3.41	48.46	54	-5.54	Vertical
4882.00	51.99	0.17	52.16	54	-1.84	Horizontal
7323.00	48.77	2.56	51.33	54	-2.67	Horizontal
9764.00	46.51	3.41	49.92	54	-4.08	Horizontal
Test channel:Highest						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4960.00	51.34	1.04	52.38	74	-21.62	Vertical
7440.00	49.52	2.51	52.03	74	-21.97	Vertical
9920.00	47.64	3.04	50.68	74	-23.32	Vertical
4960.00	57.23	1.04	58.27	74	-15.73	Horizontal
7440.00	55.74	2.51	58.25	74	-15.75	Horizontal
9920.00	55.18	3.04	58.22	74	-15.78	Horizontal
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4960.00	44.87	1.04	45.91	54	-8.09	Vertical
7440.00	44.29	2.51	46.8	54	-7.2	Vertical
9920.00	43.82	3.04	46.86	54	-7.14	Vertical
4960.00	49.45	1.04	50.49	54	-3.51	Horizontal
7440.00	47.74	2.51	50.25	54	-3.75	Horizontal
9920.00	46.73	3.04	49.77	54	-4.23	Horizontal
Test Result: Pass						

[TestMode: TX mode (SE) below 1G]; [Polarity: Horizontal]

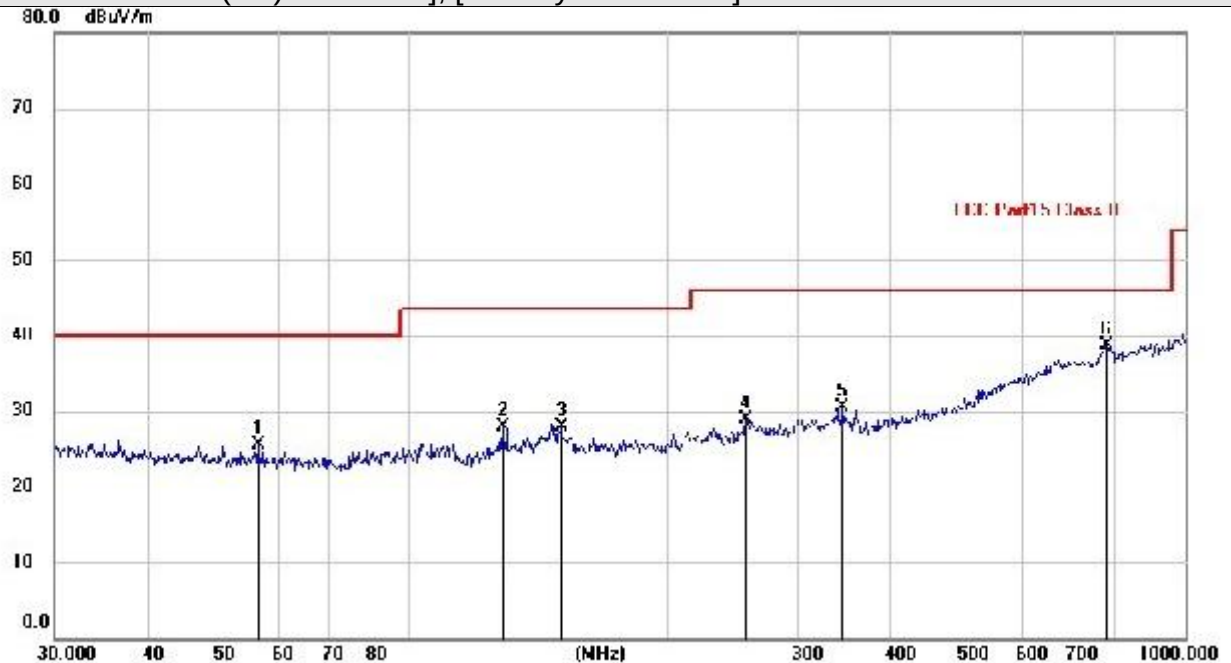


Site: Polarization: **Horizontal** Temperature:
Limit: FCC Part15 Class B Power:
EUT: Remote control Distance: 3m Humidity: %
M/N: RF402A
Mode: TX-L mode
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		56.3947	11.79	13.67	25.46	40.00	-14.54	QP		
2		120.2766	15.32	12.58	27.90	43.50	-15.60	QP		
3		144.3348	14.79	13.16	27.95	43.50	-15.55	QP		
4		255.6230	16.11	12.84	28.95	46.00	-17.05	QP		
5		345.5951	15.43	15.14	30.57	46.00	-15.43	QP		
6	*	782.3452	14.88	23.86	38.74	46.00	-7.26	QP		

Test Result: Pass

[TestMode: TX mode (SE) below 1G]; [Polarity: Vertical]

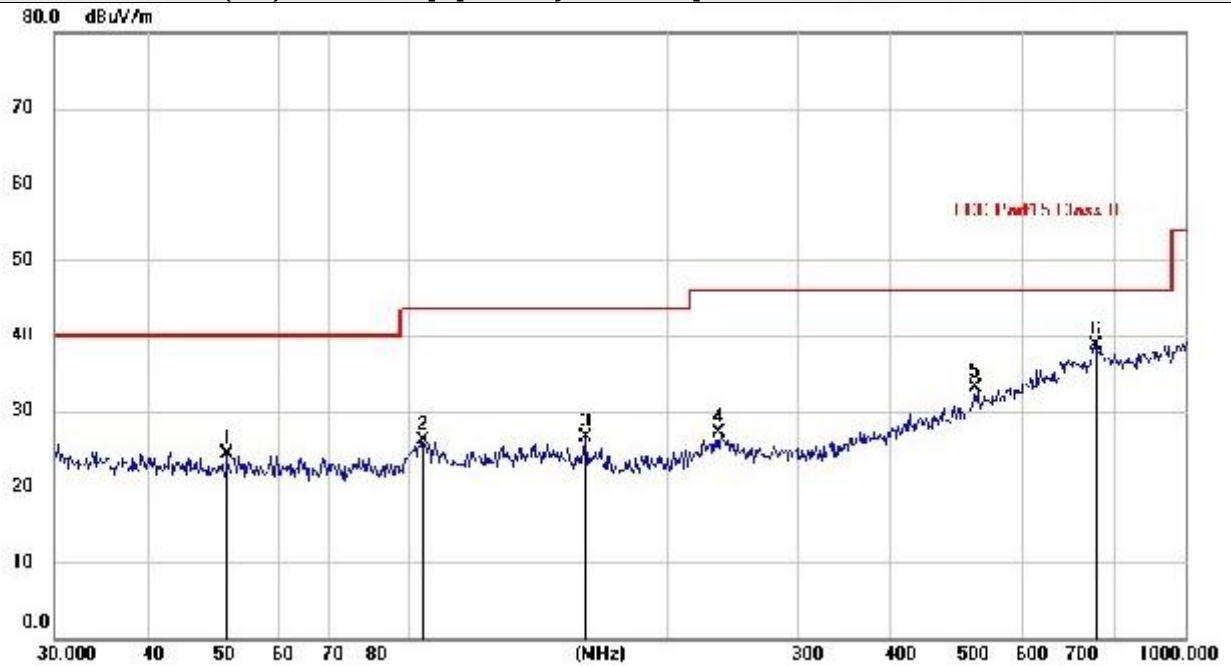

Site Polarization: **Vertical** Temperature:

Limit: FCC Part15 Class B Power: Humidity: %

EUT: Remote control Distance: 3m

M/N: RF402A

Mode: TX-L mode

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		51.3004	9.98	14.23	24.21	40.00	-15.79	QP		
2		93.7685	16.17	9.88	26.05	43.50	-17.45	QP		
3		155.9100	13.30	13.12	26.42	43.50	-17.08	QP		
4		234.9909	14.50	12.53	27.03	46.00	-18.97	QP		
5		520.8881	13.73	19.33	33.06	46.00	-12.94	QP		
6	*	755.3872	15.30	23.45	38.75	46.00	-7.25	QP		

Test Result: Pass

RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX mode (SE) below 1G;TX mode (SE) Above 1G
Test Mode (Final Test)	TX mode (SE) Above 1G
Tester	Eason
Temperature	23℃
Humidity	48%

LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

BLOCK DIAGRAM OF TEST SETUP

PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on

the top of a variable-height antenna tower.

d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamplifier Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

TEST DATA

[TestMode: TX mode (SE) Above 1G]; [Polarity: Horizontal]						
Test channel:lowest						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	49.72	-4.2	45.52	74	-28.48	Horizontal
2390	64.14	-3.88	60.26	74	-13.74	Horizontal
2310	48.64	-4.49	44.15	74	-29.85	Vertical
2390	56.98	-4.21	52.77	74	-21.23	Vertical
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor(dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	40.72	-4.2	36.52	54	-17.48	Horizontal
2390	54.37	-3.88	50.49	54	-3.51	Horizontal
2310	40.11	-4.49	35.62	54	-18.38	Vertical
2390	48.12	-4.21	43.91	54	-10.09	Vertical
Test channel:Highest						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	72.13	-3.38	68.75	74	-5.25	Horizontal
2500	57.04	-3.3	53.74	74	-20.26	Horizontal
2483.5	64.69	-3.77	60.92	74	-13.08	Vertical
2500	57.25	-3.7	53.55	74	-20.45	Vertical
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor(dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	54.67	-3.38	51.29	54	-2.71	Horizontal
2500	45.94	-3.3	42.64	54	-11.36	Horizontal
2483.5	53.6	-3.77	49.83	54	-4.17	Vertical
2500	46.25	-3.7	42.55	54	-11.45	Vertical
Test Result: Pass						

ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11

CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.


CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	23°C
Humidity	48%

LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

BLOCK DIAGRAM OF TEST SETUP

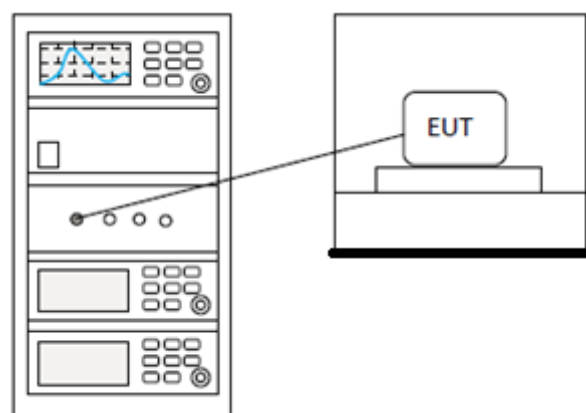

TEST DATA**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia


CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	23°C
Humidity	48%

LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

BLOCK DIAGRAM OF TEST SETUP

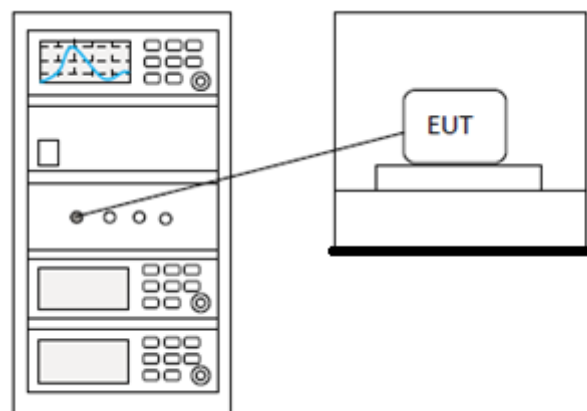

TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	23°C
Humidity	48%

LIMITS

Limit:	$\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission
---------------	--

BLOCK DIAGRAM OF TEST SETUP

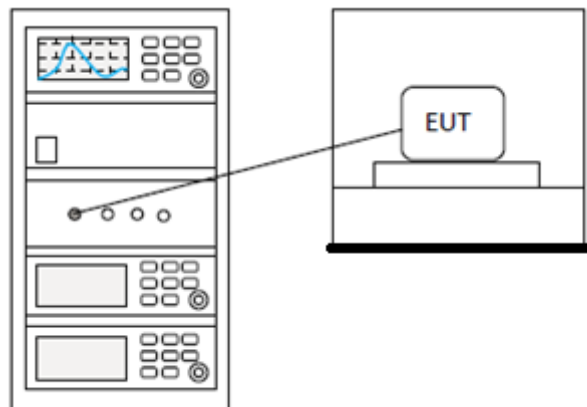

TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5 & Section 11.9.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	23°C
Humidity	48%

LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq \text{hopping channels} < 50$
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

BLOCK DIAGRAM OF TEST SETUP

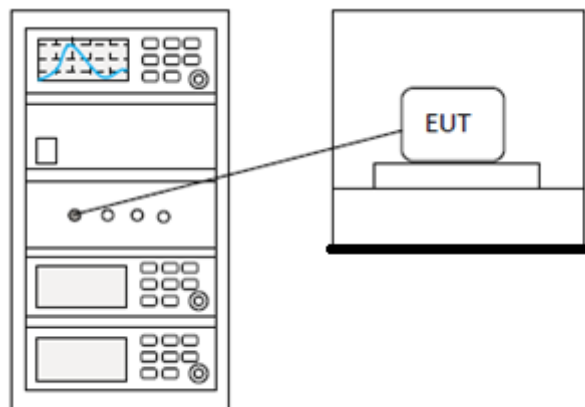

TEST DATA


Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.9
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	23°C
Humidity	48%

BLOCK DIAGRAM OF TEST SETUP

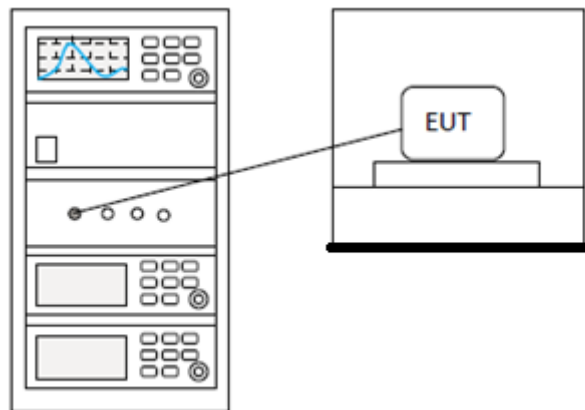

TEST DATA

N/A


MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	23°C
Humidity	48%

LIMITS

Limit:	≥ 500 kHz
--------	----------------

BLOCK DIAGRAM OF TEST SETUP

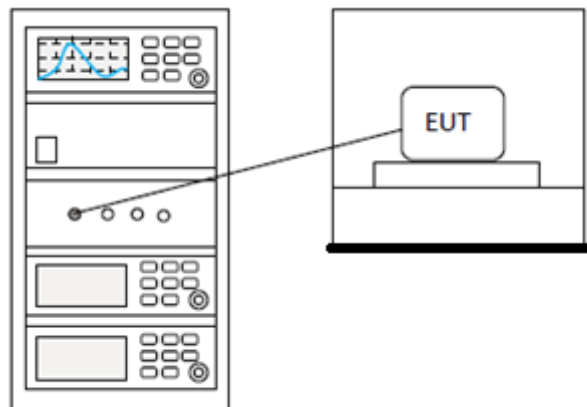

TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

10 APPENDIX

Appendix1


10.1 APPENDIX A: DTS BANDWIDTH

Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_BT4.0	Ant1	2402	1.032	2401.616	2402.648	≥ 0.5	PASS
		2442	0.848	2441.604	2442.452	≥ 0.5	PASS
		2480	0.768	2479.604	2480.372	≥ 0.5	PASS

Test Graphs



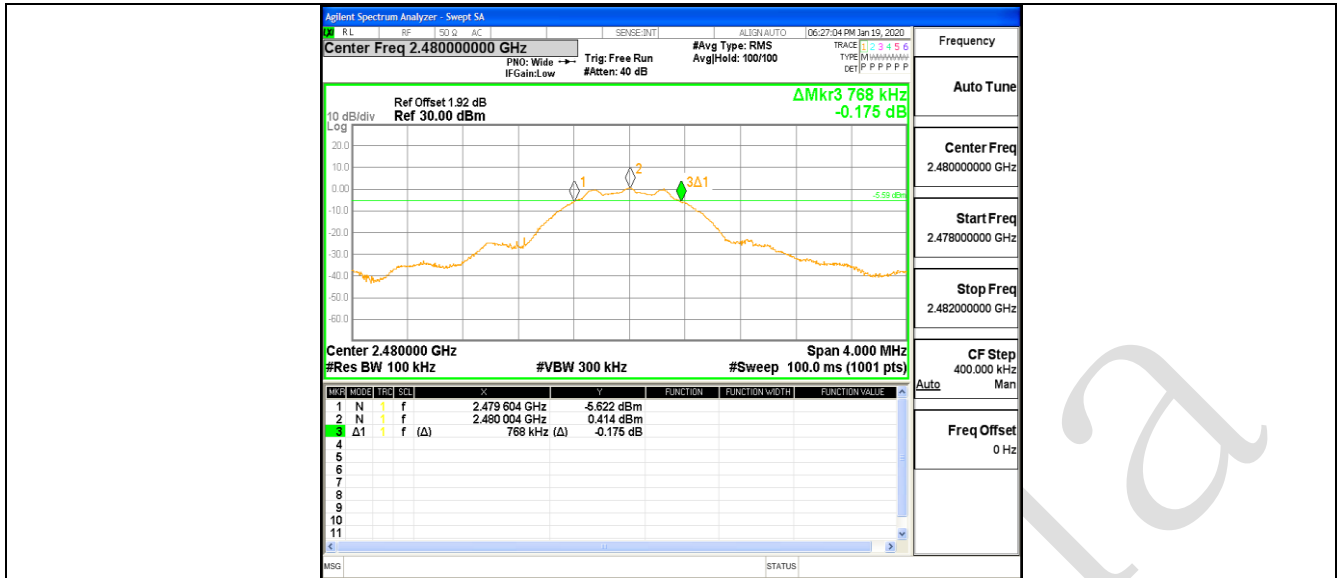


10.2 APPENDIX B: OCCUPIED CHANNEL BANDWIDTH**Test Result**

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_BT4.0	Ant1	2402	2.4760	2400.662	2403.138	---	PASS
		2442	1.8011	2441.048	2442.849	---	PASS
		2480	1.1544	2479.416	2480.571	---	PASS

Test Graphs




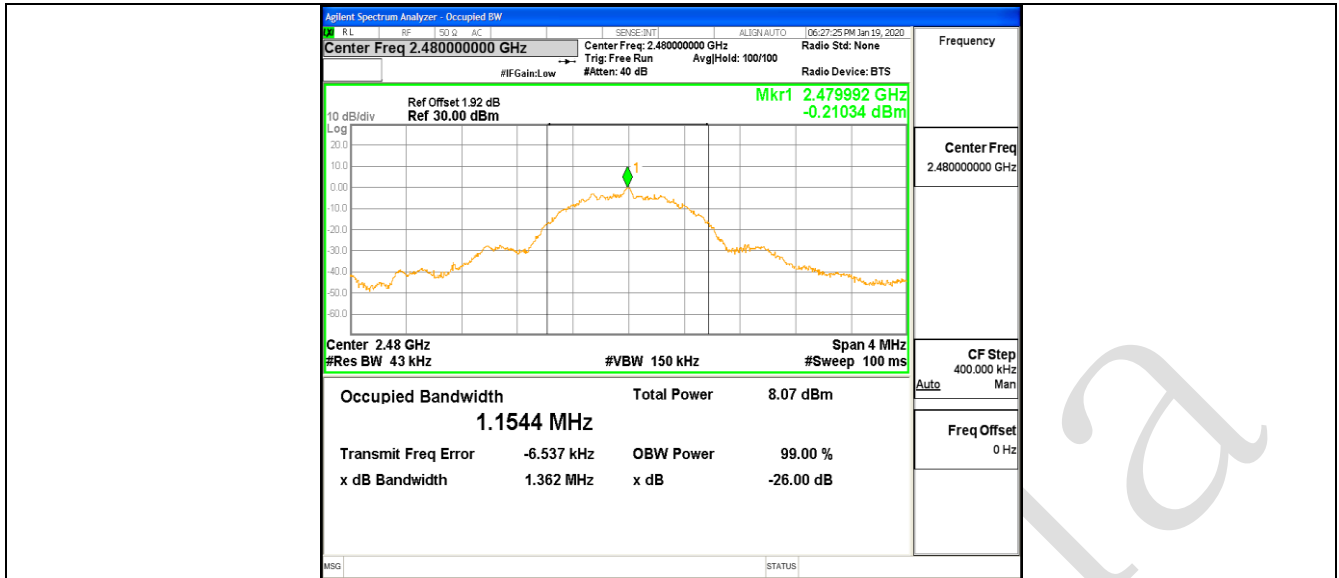


10.3 APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER**Test Result**

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_BT4.0	Ant1	2402	-0.36	<=30	PASS
		2442	0.31	<=30	PASS
		2480	0.49	<=30	PASS

Test Graphs

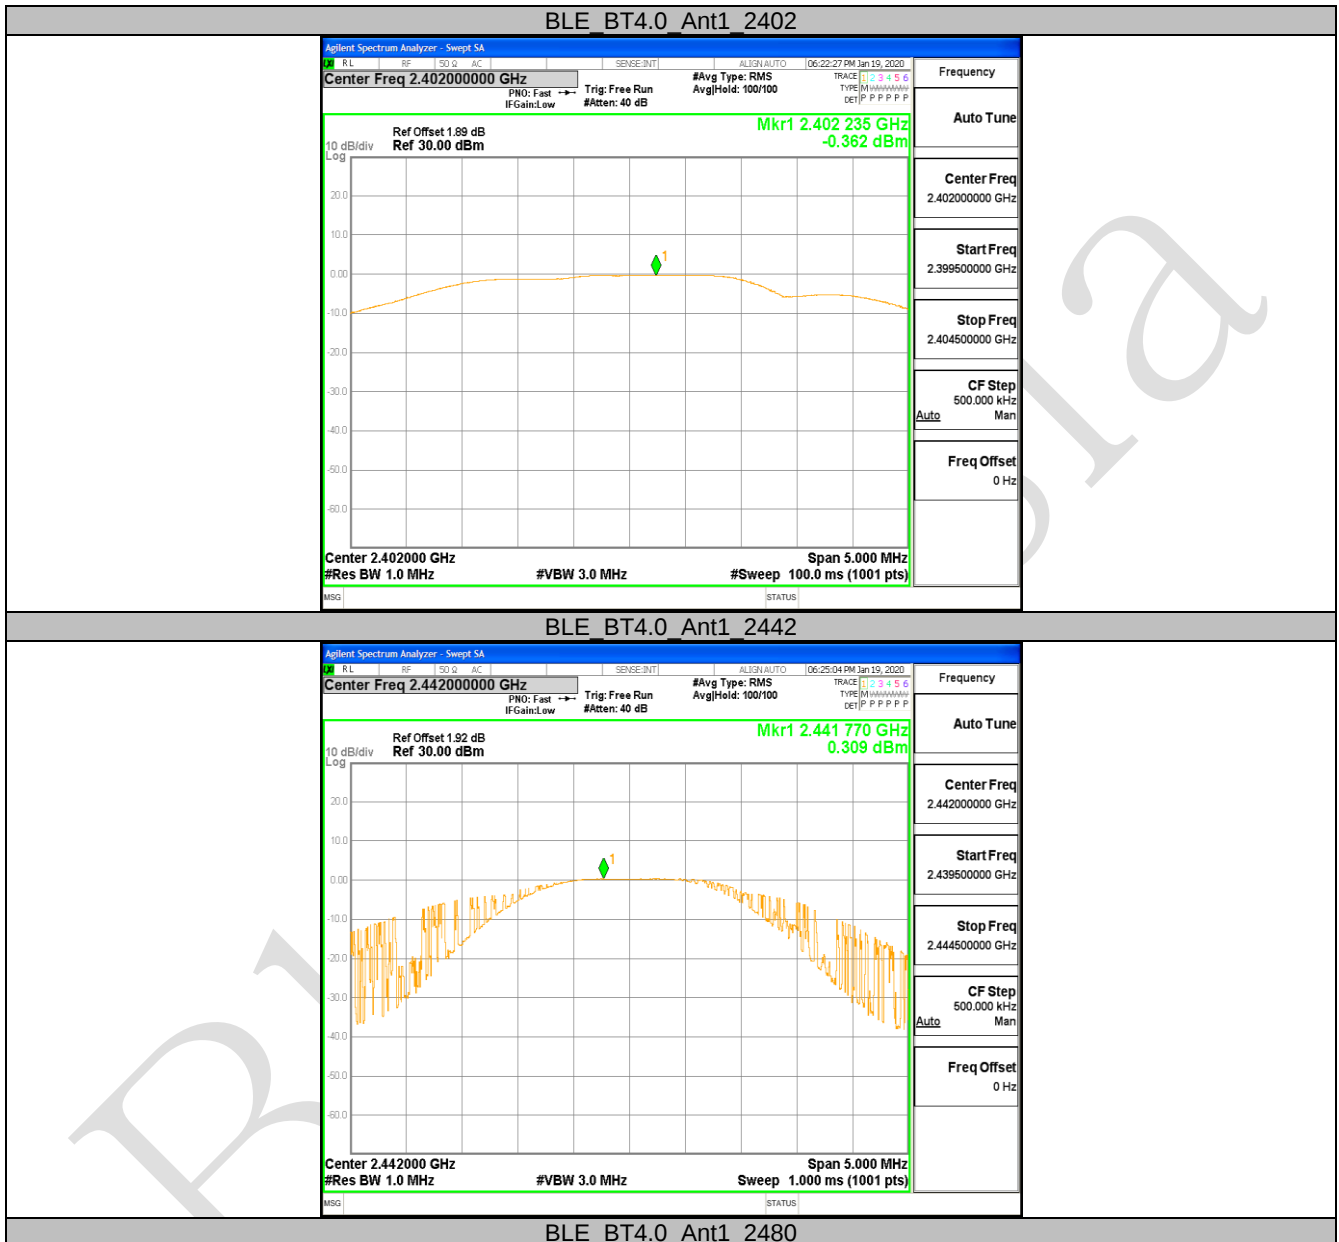


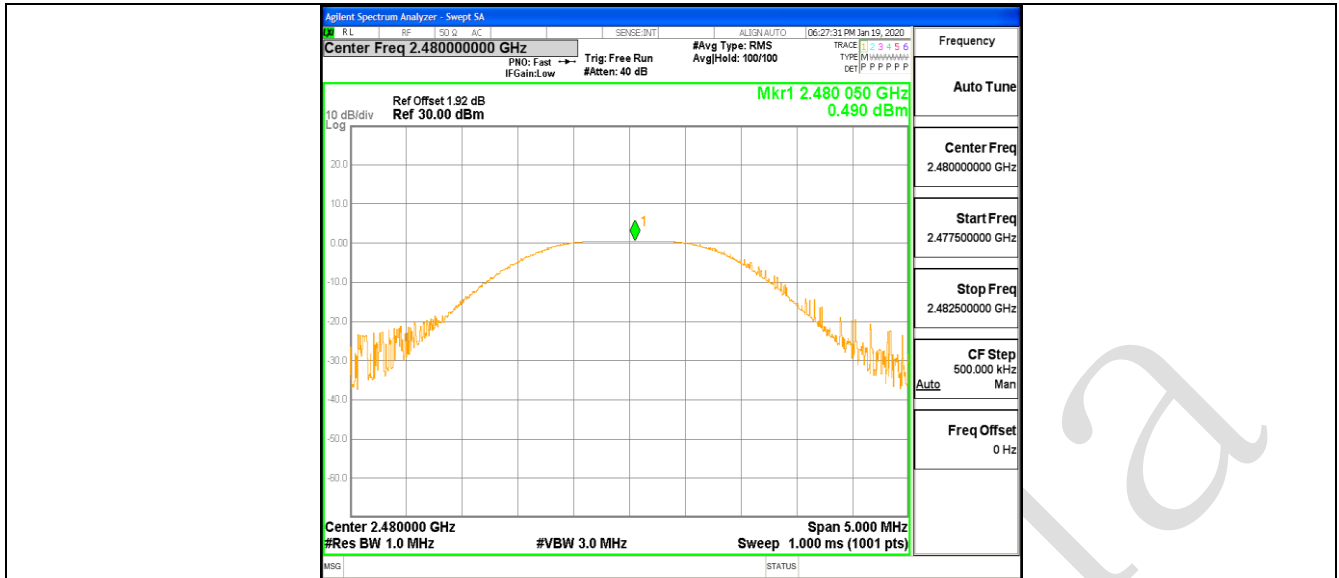


10.4 APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY**Test Result**

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_BT4.0	Ant1	2402	-9.5	<=8	PASS
		2442	-9.46	<=8	PASS
		2480	-7.91	<=8	PASS

Test Graphs

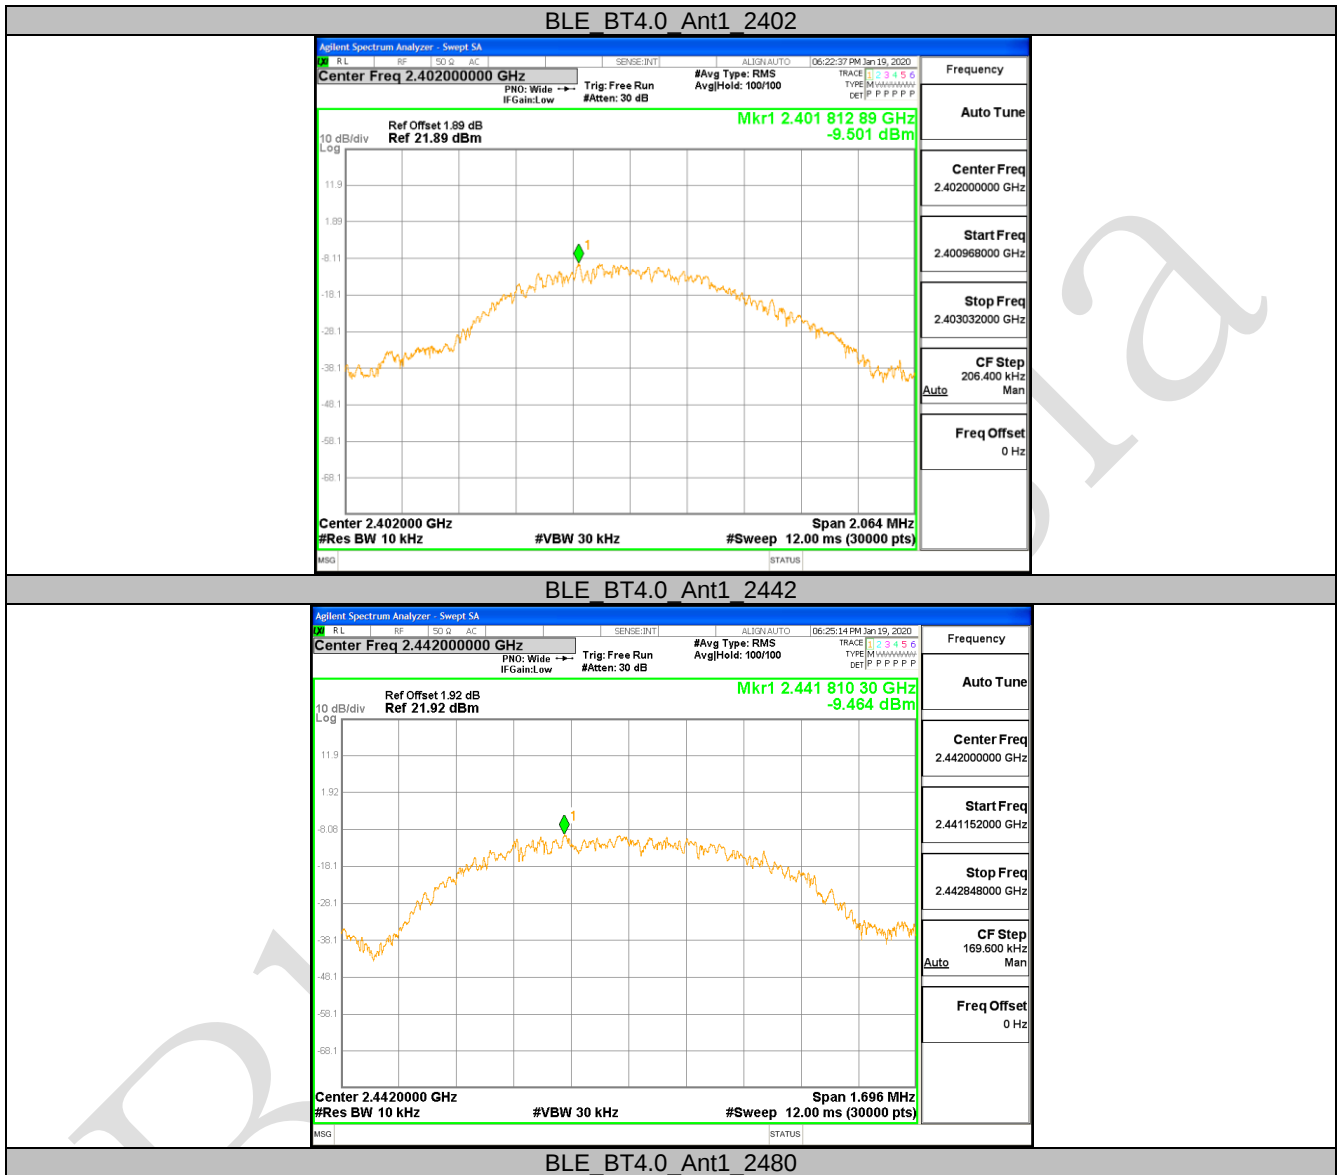


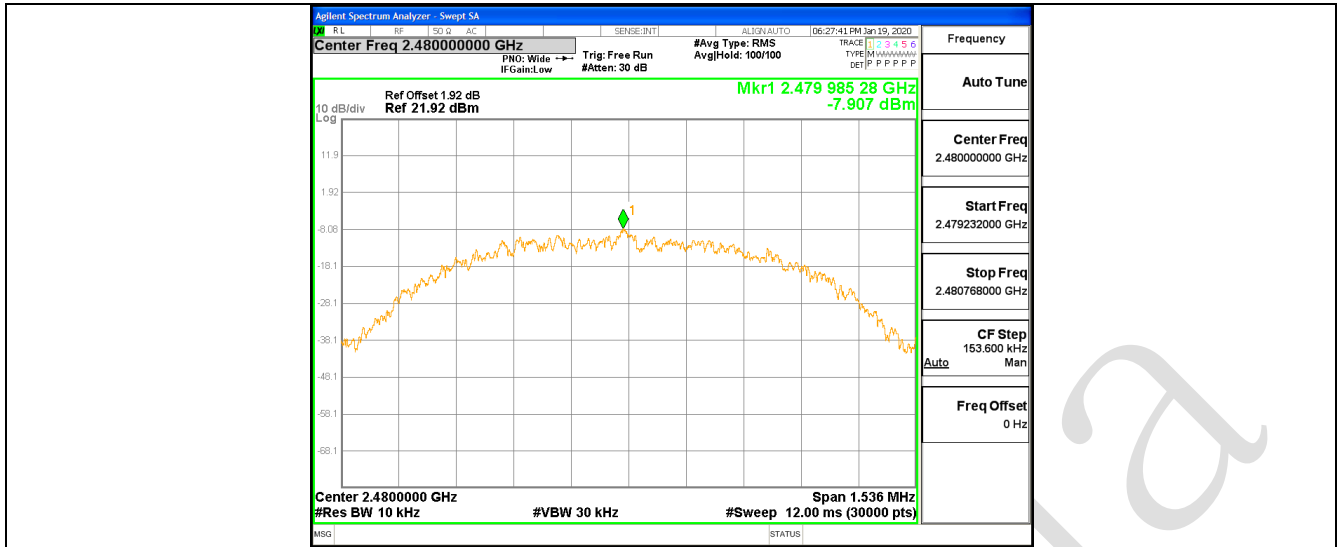

10.5 APPENDIX E: BAND EDGE MEASUREMENTS**Test Result**

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_BT4.0	Ant1	Low	2402	-0.91	-55.63	<=-20.91	PASS
		High	2480	0.48	-55.23	<=-19.52	PASS

Test Graphs

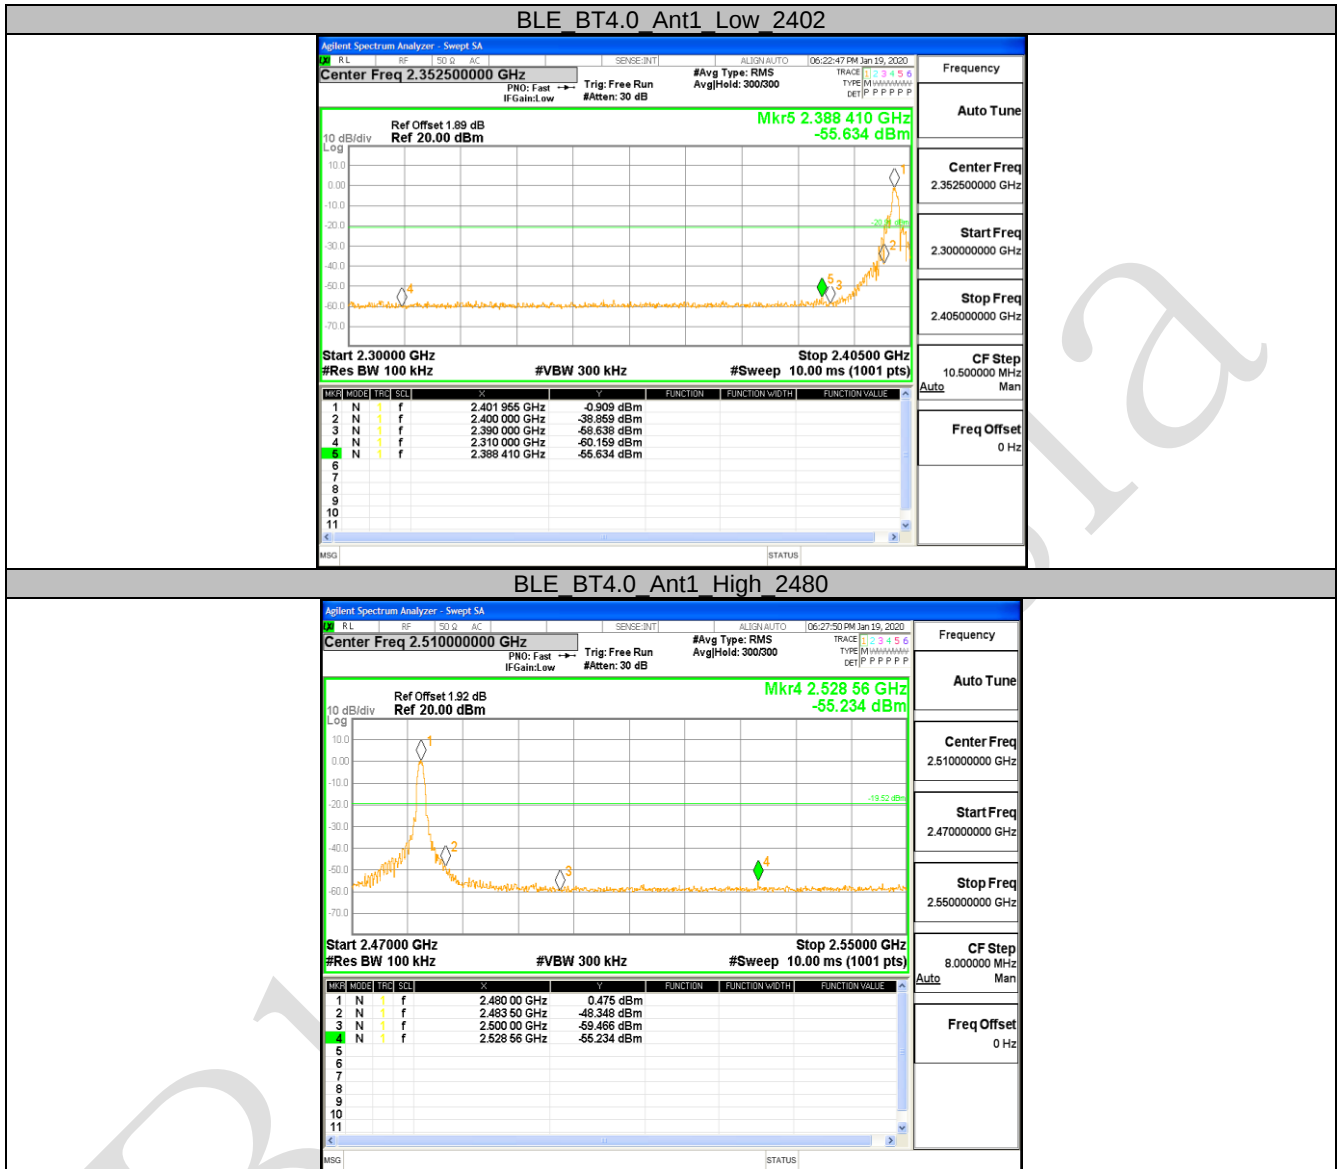


10.6 APPENDIX F: CONDUCTED SPURIOUS EMISSION

Test Result


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_BT4.0	Ant1	2402	Reference	-0.89	-0.89	---	PASS
			30~1000	30~1000	-68.139	<=-20.888	PASS
			1000~26500	1000~26500	-53.789	<=-20.888	PASS
		2442	Reference	-0.12	-0.12	---	PASS
			30~1000	30~1000	-66.824	<=-20.12	PASS
			1000~26500	1000~26500	-54.388	<=-20.12	PASS
		2480	Reference	0.35	0.35	---	PASS
			30~1000	30~1000	-67.663	<=-19.649	PASS
			1000~26500	1000~26500	-34.735	<=-19.649	PASS

Test Graphs




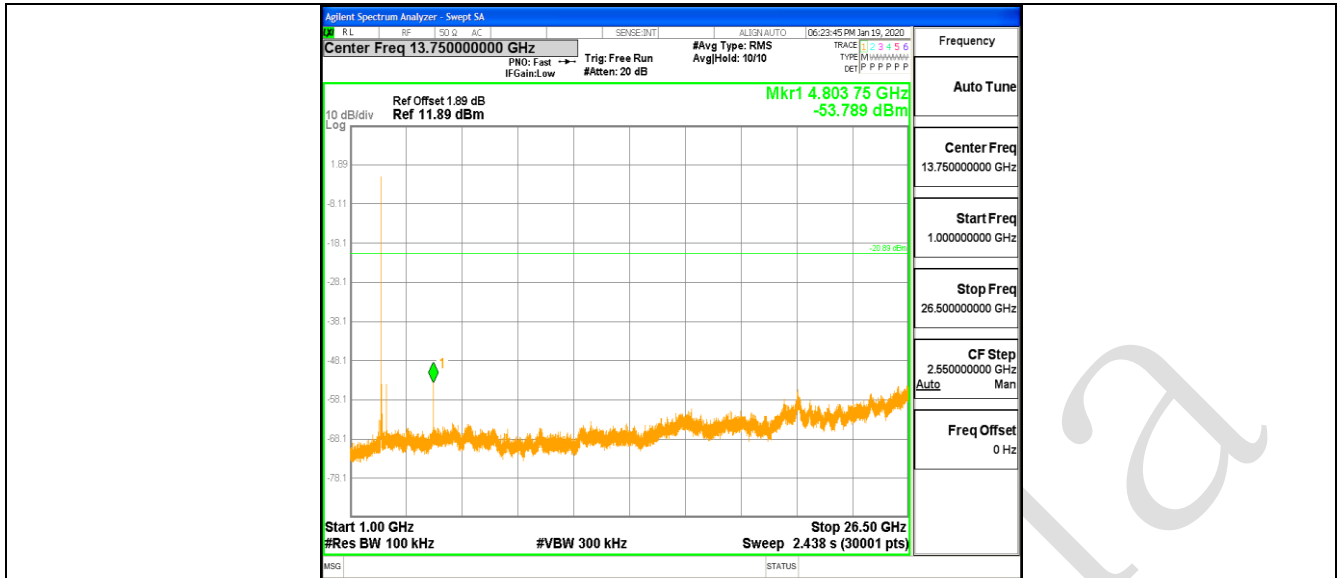


BLE BT4.0 Ant1 2442 0-Reference

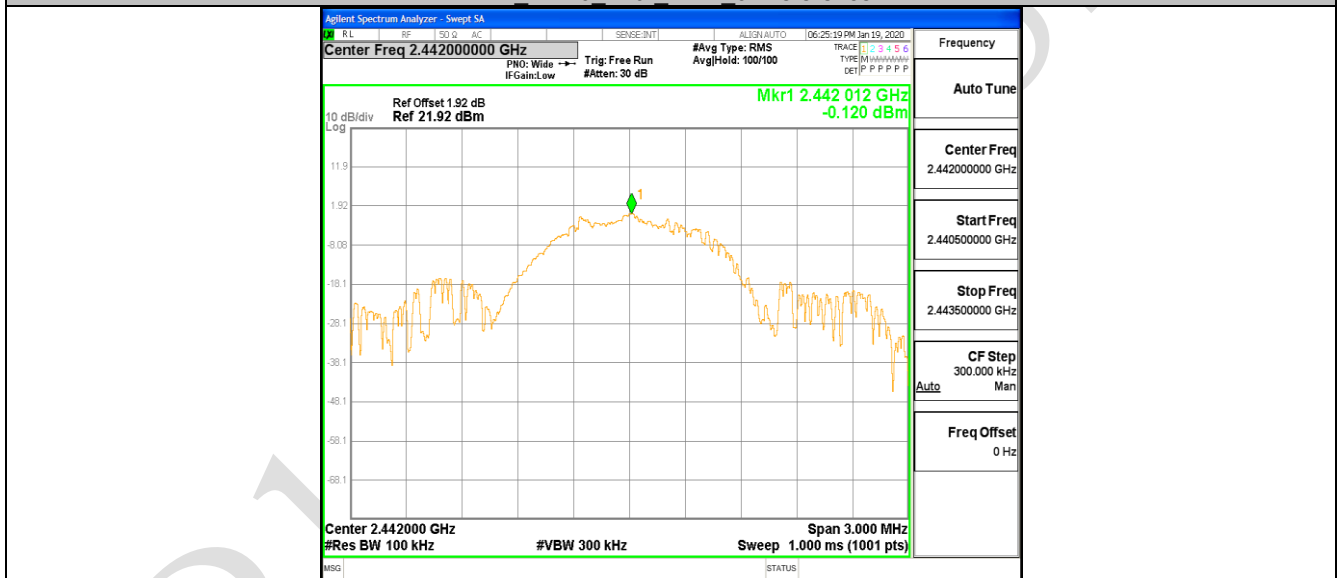


BLE BT4.0 Ant1 2442 30-1000

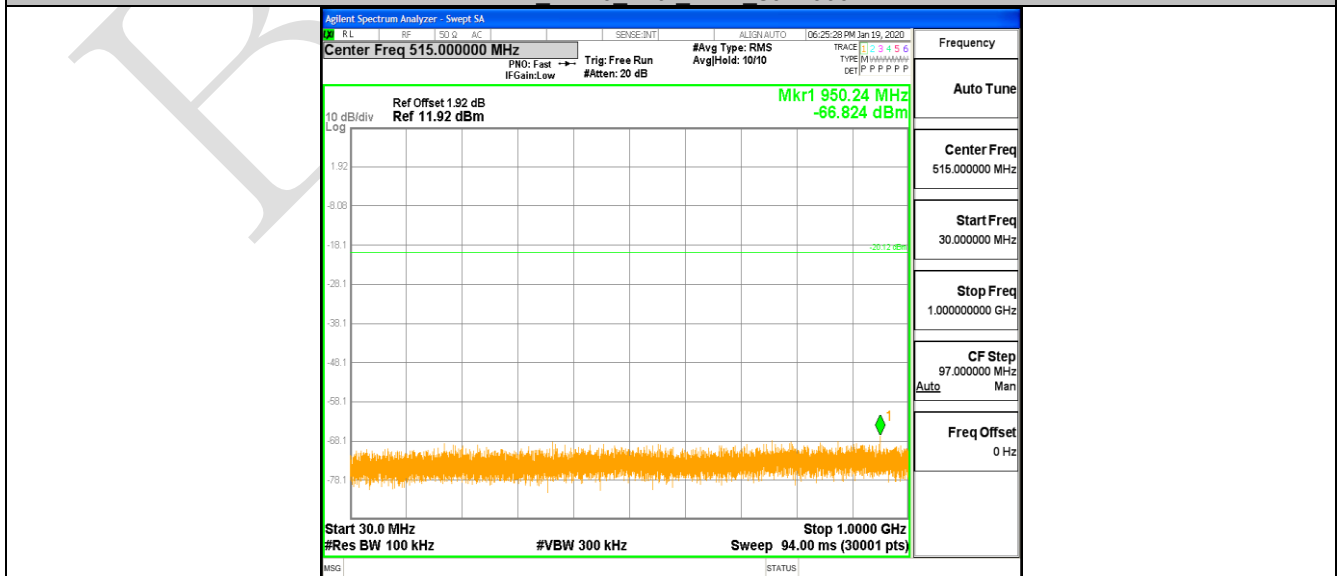


BLE BT4.0 Ant1 2442 1000-26500

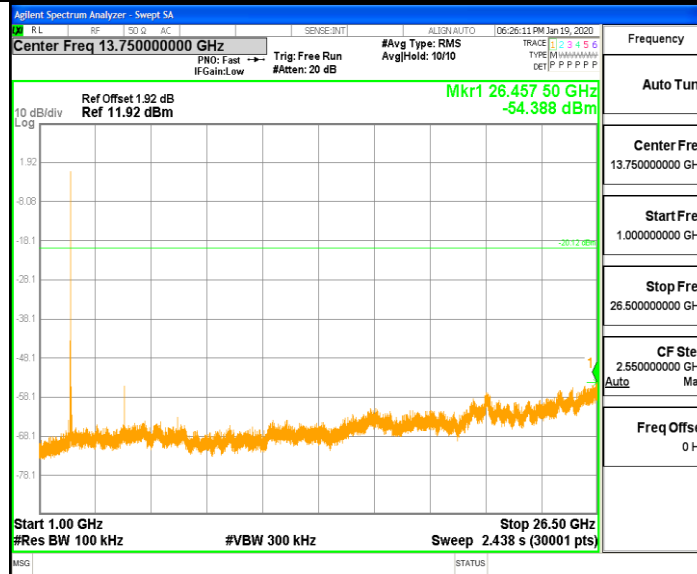

BLE BT4.0 Ant1 2480 0~Reference

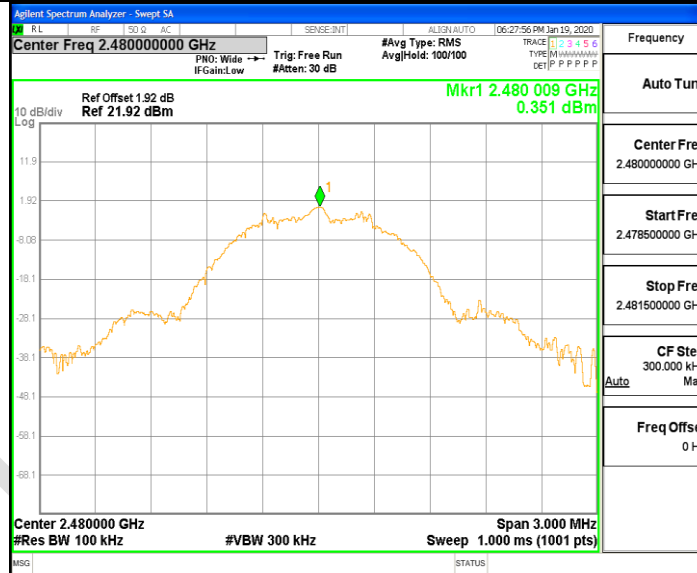


BLE BT4.0 Ant1 2480 30~1000

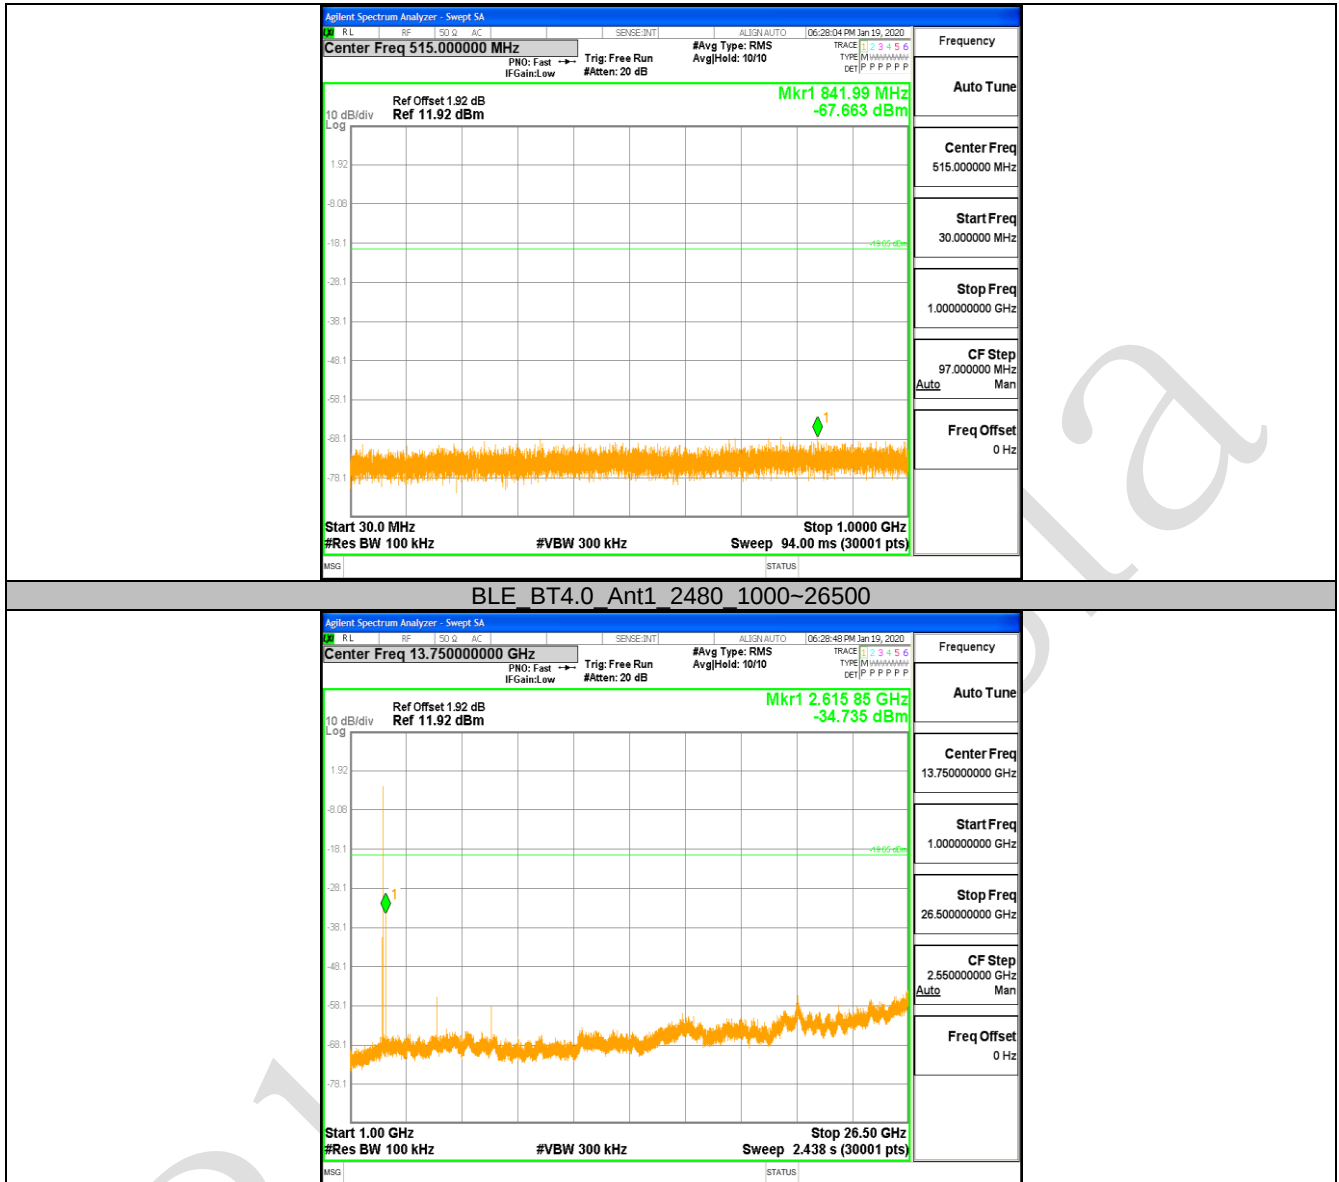


APPENDIX A: PHOTOGRAPHS OF TEST SETUP


Radiated Spurious Emissions

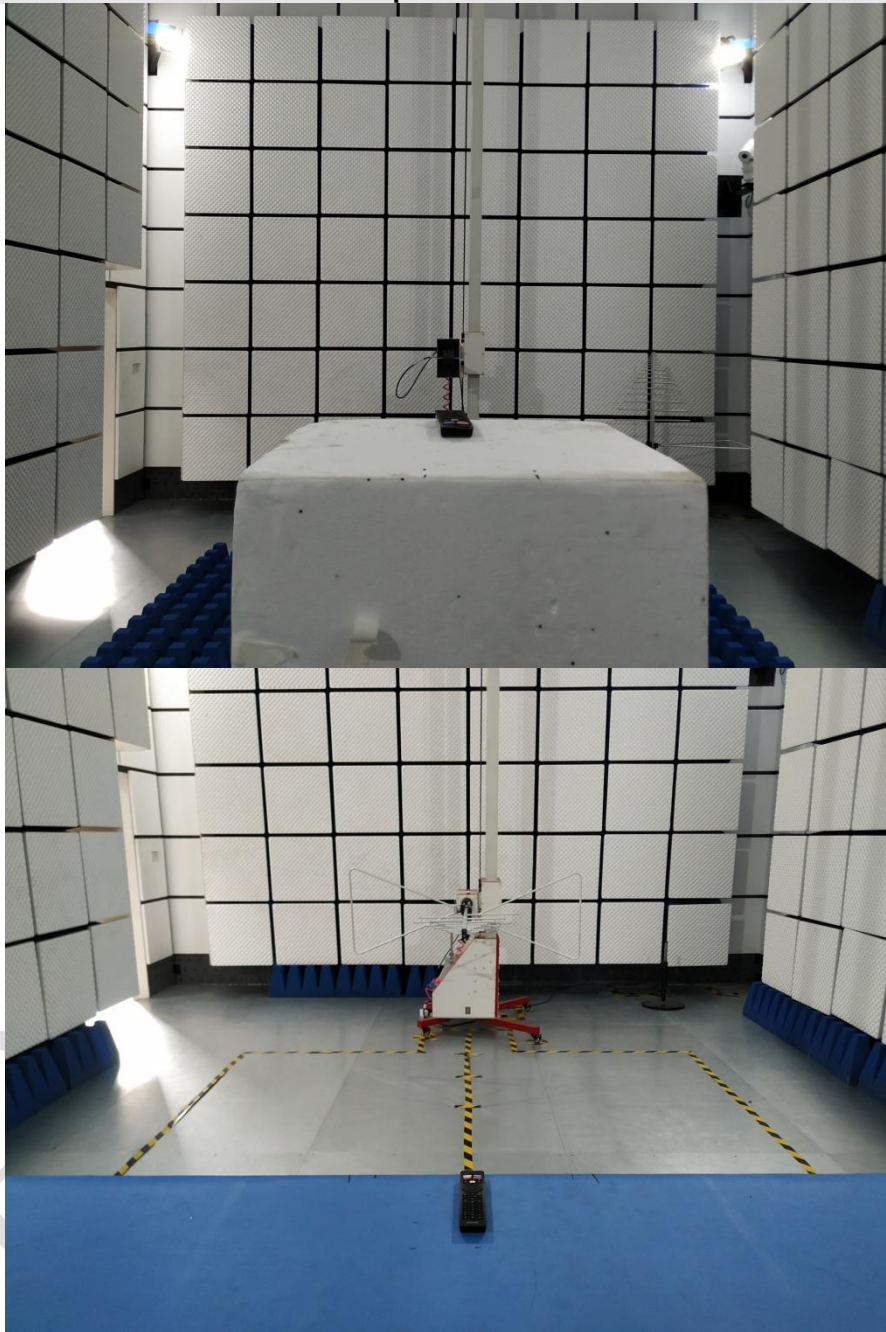



Antenna Requirement


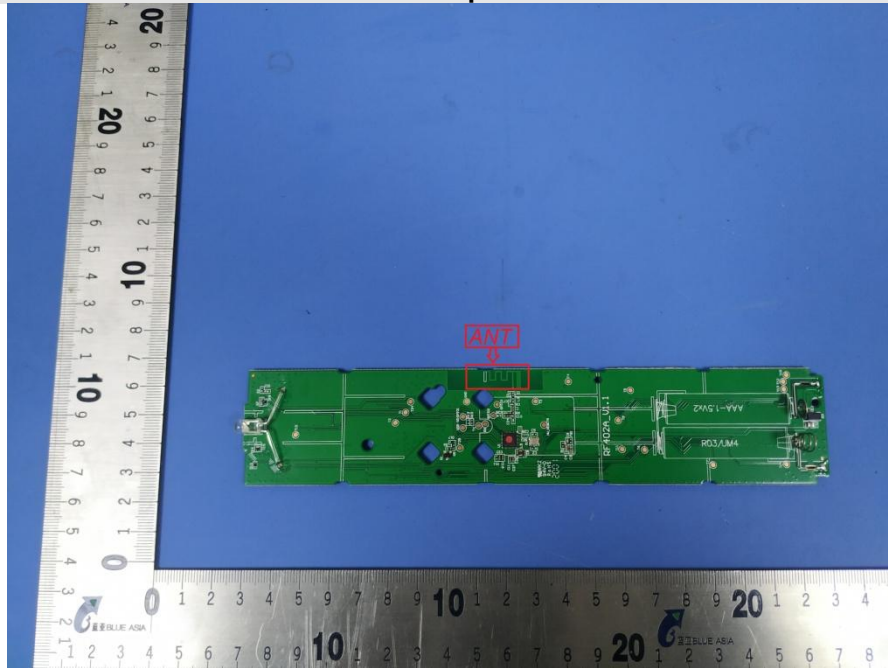




APPENDIX B: PHOTOGRAPHS OF EUT

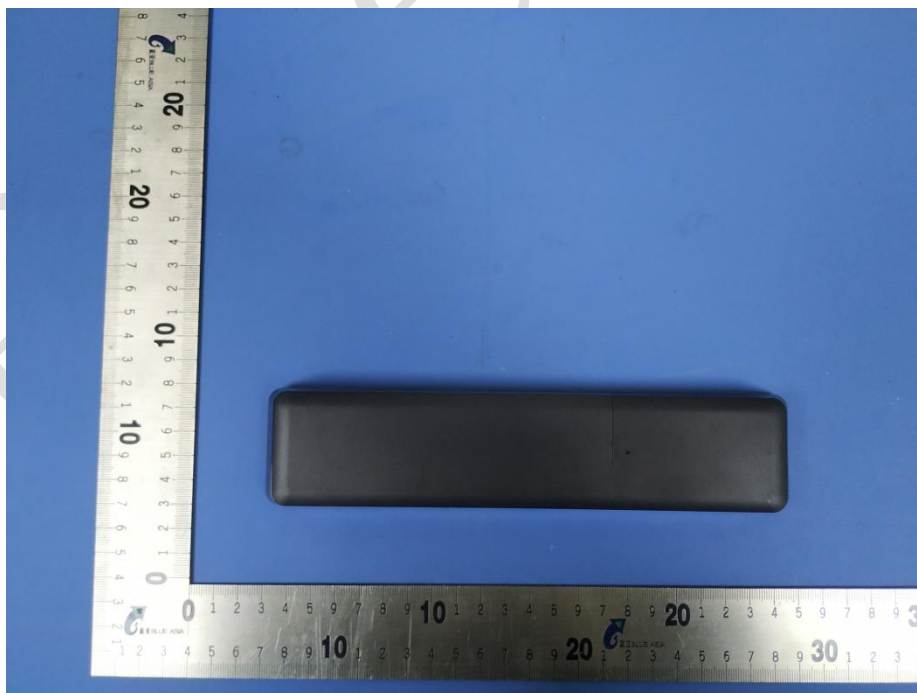

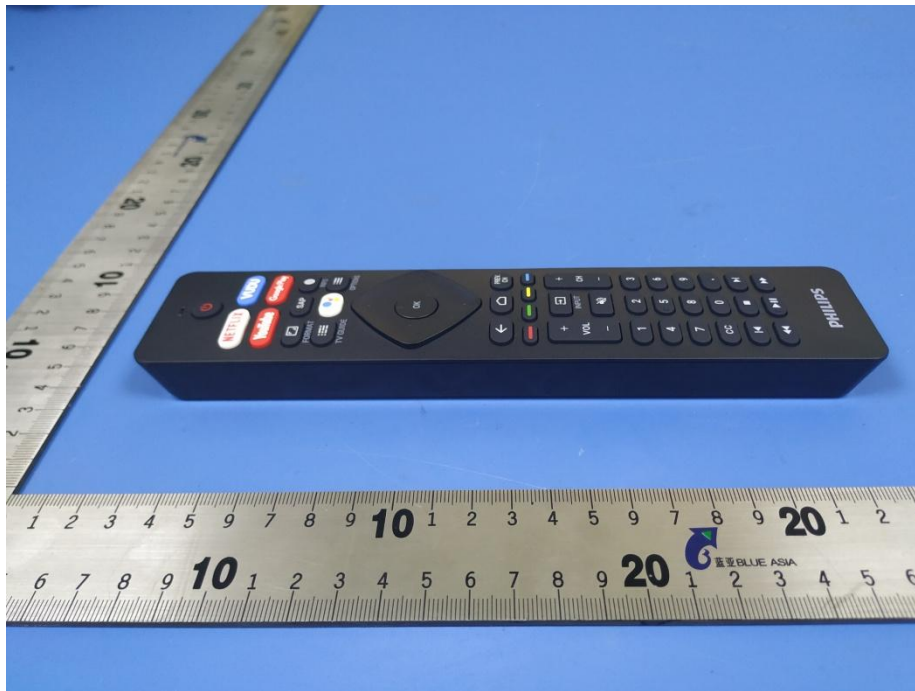

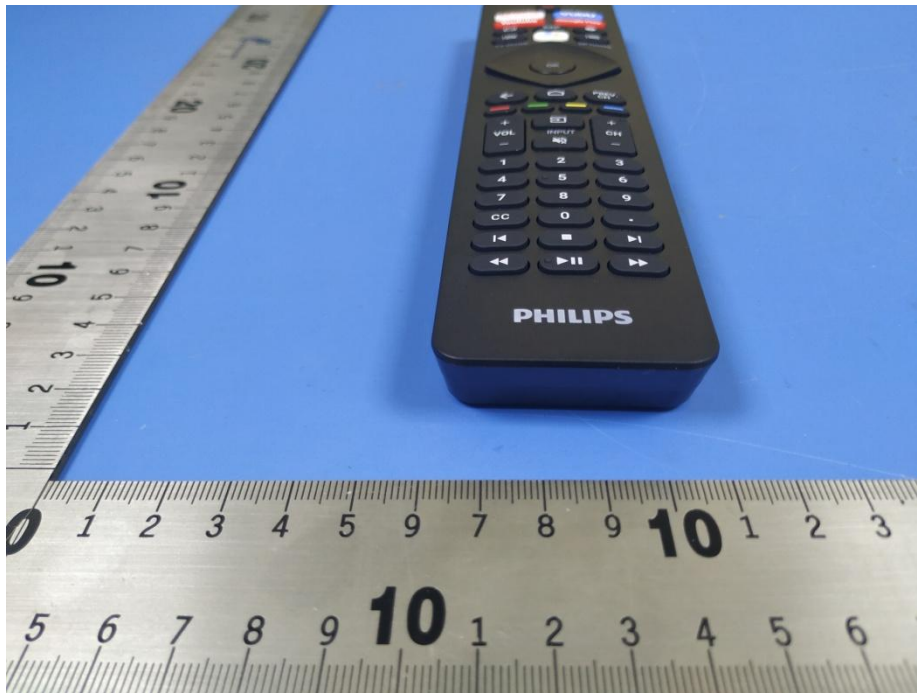

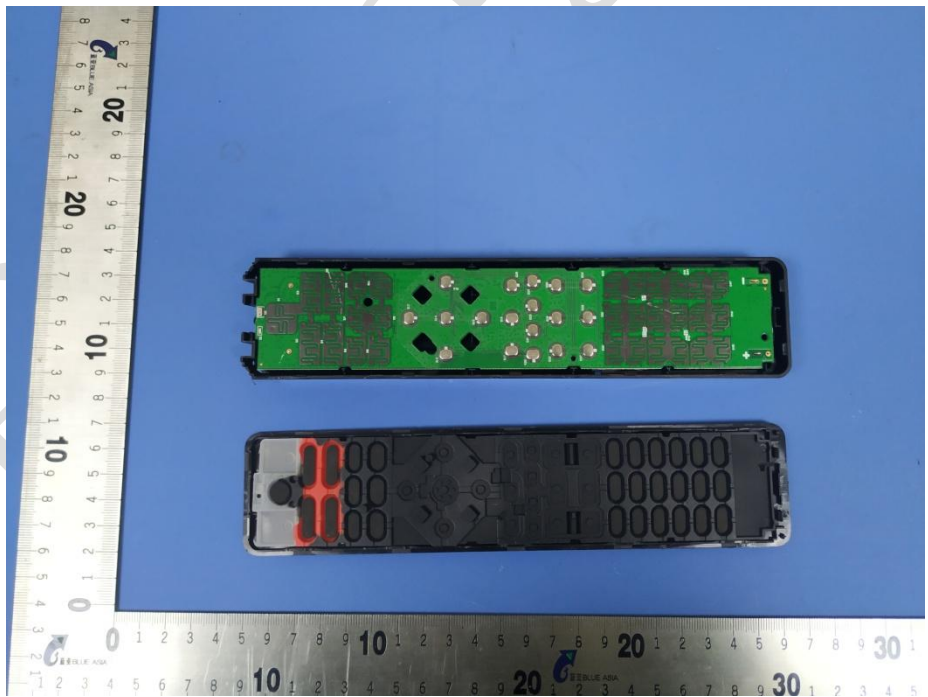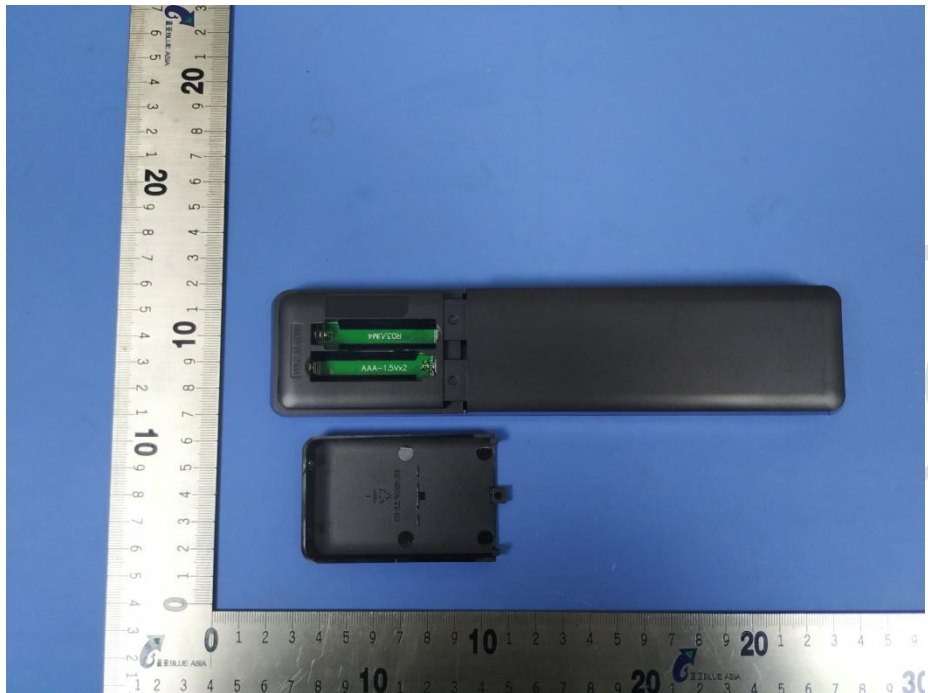

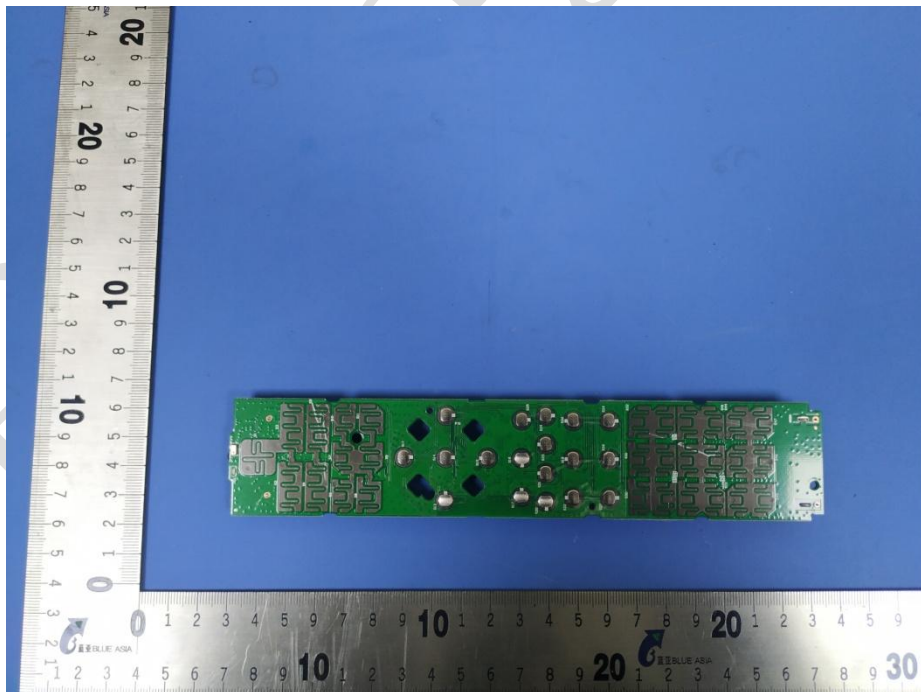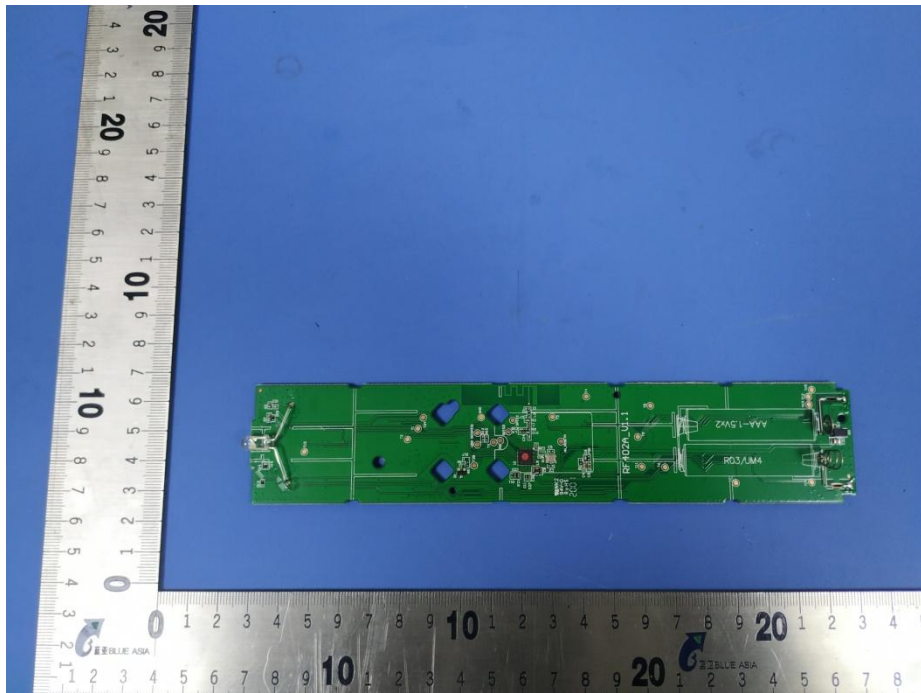

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia