

Produkte
Products

Prüfbericht - Nr.:	19660369 001	Seite 1 von 44
<i>Test Report No.:</i>		<i>Page 1 of 44</i>

Auftraggeber: <i>Client:</i>	Honeywell Technology Solution Lab, Devarabisanahalli Village, KR Puram Hobli, Bangalore, Karnataka – 560103, India
--	---

Gegenstand der Prüfung: <i>Test item:</i>	Generation X radio module
---	----------------------------------

Bezeichnung: <i>Identification:</i>	Gen X radio Module (GXRM)	Serien-Nr.: <i>Serial No.</i>	415085
---	--------------------------------------	---	---------------

Wareneingangs-Nr.: <i>Receipt No.:</i>	1803300194	Eingangsdatum: <i>Date of receipt:</i>	26-02-2018
--	-------------------	--	-------------------

Prüfort: <i>Testing location:</i>	Refer Page 5 of 44 for Test site details
---	---

Prüfgrundlage: <i>Test specification:</i>	FCC Part 15 Subpart C 15.247, RSS 247 Issue 2 ANSI C63.10- 2013
---	--

Prüfergebnis: <i>Test Result:</i>	Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n). <i>The test items passed the test specification(s).</i>
---	---

Prüflaboratorium: <i>Testing Laboratory:</i>	TÜV Rheinland (India) Pvt. Ltd. 27 / B, 2nd Cross, Electronic city Phase I, Bengaluru - 560100, India FCC Test Site Registration no.: 496599 ; IC Test Site Registration no.: 3466E-1
--	--

geprüft / tested by:	kontrolliert / reviewed by:												
<table border="0" style="width: 100%;"> <tr> <td style="width: 20%;">07-03-2018</td> <td style="width: 30%;">Santhosh S K</td> <td style="width: 50%; text-align: center;"></td> </tr> <tr> <td></td> <td>Engineer</td> <td></td> </tr> </table>	07-03-2018	Santhosh S K			Engineer		<table border="0" style="width: 100%;"> <tr> <td style="width: 20%;">13-06-2018</td> <td style="width: 30%;">Saibaba Siddapur</td> <td style="width: 50%; text-align: center;"></td> </tr> <tr> <td></td> <td>Assistant Manager</td> <td></td> </tr> </table>	13-06-2018	Saibaba Siddapur			Assistant Manager	
07-03-2018	Santhosh S K												
	Engineer												
13-06-2018	Saibaba Siddapur												
	Assistant Manager												
<table border="0" style="width: 100%;"> <tr> <td style="width: 20%;">Datum</td> <td style="width: 30%;">Name/Stellung</td> <td style="width: 50%;">Unterschrift</td> </tr> <tr> <td><i>Date</i></td> <td><i>Name/Position</i></td> <td><i>Signature</i></td> </tr> </table>	Datum	Name/Stellung	Unterschrift	<i>Date</i>	<i>Name/Position</i>	<i>Signature</i>	<table border="0" style="width: 100%;"> <tr> <td style="width: 20%;">Datum</td> <td style="width: 30%;">Name/Stellung</td> <td style="width: 50%;">Unterschrift</td> </tr> <tr> <td><i>Date</i></td> <td><i>Name/Position</i></td> <td><i>Signature</i></td> </tr> </table>	Datum	Name/Stellung	Unterschrift	<i>Date</i>	<i>Name/Position</i>	<i>Signature</i>
Datum	Name/Stellung	Unterschrift											
<i>Date</i>	<i>Name/Position</i>	<i>Signature</i>											
Datum	Name/Stellung	Unterschrift											
<i>Date</i>	<i>Name/Position</i>	<i>Signature</i>											

Sonstiges / Other Aspects:	FCC ID: S5751454941 & IC:573W-51454941 On receipt, the equipment was in good condition.
-----------------------------------	--

Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet	Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested
---	--

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.

This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.

Test Summary

FCC Section	IC Section	Test item	Result	Remarks
15.247(a)(2)	RSS 247 5.2 (a)	6dB Bandwidth	PASS	Occupied Bandwidth doesn't have limit
-	RSS Gen 6.7	99% Bandwidth	N/A*	
15.247(b)	RSS 247 5.4 (d)	Power output measurement	PASS	
15.247(e)	RSS 247 5.2 (b)	Power spectral density	PASS	
15.247(d)	RSS 247 5.5	Emission in non Restricted frequency bands	PASS	
15.247 (d) / 15.209 & 15.205	RSS Gen 8.9 & 8.10	Radiated spurious emission & restricted bands of operation	PASS	
15.207	RSS Gen 8.8	Conducted Emission on A.C mains lines	N/A*	EUT is exclusively battery operated device

N/A*- Not applicable

Table of Contents

1 GENERAL REMARKS.....	4
1.1 Complimentary Materials	4
2 TEST SITES.....	5
2.1 Testing Facilities	5
2.2 List of Test and Measurement Instruments	5
3 GENERAL PRODUCT INFORMATION.....	6
3.1 Product Function and Intended Use	6
3.2 Ratings and System Details	6
3.3 Antenna Details and Power level settings used	7
3.4 Measurement Uncertainty	7
4 OPERATIONAL DESCRIPTIONS	8
5 TEST SET-UP AND OPERATION MODE.....	8
5.1 Principle of Configuration Selection	8
5.2 Test Operation and Test Software	8
5.3 Special Accessories and Auxiliary Equipment	8
5.4 Countermeasures to achieve EMC Compliance	8
6 ANTENNA PORT TEST CASES.....	9
6.1 DTS Bandwidth and OBW	9
6.2 Maximum peak conducted output power	13
6.3 Maximum power spectral density	19
6.4 Emissions in non- restricted frequency bands	22
7 RADIATED TEST METHODOLOGY	29
7.1 Radiated Emission Test	29
7.1.1 Test Setup Configuration	29
8 TEST RESULTS.....	32
8.1 Restricted bands of Emissions & Restricted Bands of Operation	32
8.1.1 Test results for GXRM Module	33
9 LIST OF TABLES.....	43
10 LIST OF FIGURES	43
11 LIST OF TEST GRAPHS	44

1 GENERAL REMARKS

1.1 Complimentary Materials

All attachments are integral part of this test report with the following appendixes:

Appendix 1: Test setup photos

Appendix 2: EUT external photos

Appendix 3: EUT internal photos

Appendix 4: FCC label and location details

Appendix 5: Block diagram

Appendix 6: Specification of EUT

Appendix 7: Schematics

Appendix 8: Bill of Materials

Appendix 9: User Manual

Appendix 10: Maximum permissible exposure calculation

2 TEST SITES

2.1 Testing Facilities

TUV Rheinland (India) Private Limited
 108 , Beside ISBR Business School,
 Electronic city Phase I
 Bangalore - 560 100.

2.2 List of Test and Measurement Instruments

Table 1: Test and measurement instrument used

Equipment	Manufacturer	Model Name	Serial Number	Calibration Due Date	Periodicity	Used for Test Items
Signal Analyzer	Rohde & Schwarz	FSV7	101644	15-12-2018	Yearly	Conducted measurement
Spectrum Analyser	Agilent	E4407B	US41192772	29-03-2019	Yearly	
EMI Test Receiver	Rohde & Schwarz	ESU 40	100288	24-10-2018	Yearly	Radiated Spurious measurement
Active loop antenna	Frankonia	LAX-10	LAX-10-800	15-01-2019	Yearly	
Baloon and Biconical Antenna	Schwarzbeck mess-elektronik	VHBB-9124 / BBA-9106	9124-656	09-01-2019	Yearly	
Log-Periodic Antenna	Schwarzbeck mess-elektronik	VUSLP-9111B	9111B-111	16-01-2019	Yearly	
Broadband Horn Antenna	Frankonia	HAX-18	HAX18-802	16-09-2018	Yearly	
Semi Anechoic Chamber	Frankonia	-	-	-	-	

3 GENERAL PRODUCT INFORMATION

3.1 Product Function and Intended Use

The 802.15.4 Intrinsically Safe Gen X Radio Module from Honeywell is a second-generation Radio Module combines a high-performance RF solution with the market's premier ISA100 Wireless and Wireless HART stacks. The module comes with configurable transmit power levels: from -5 dBm to +20 dBm, and can accommodate variable range and performance requirements. The small footprint makes it suitable for a wide range of ISA100 Wireless, Wireless HART or ZigBee applications

Note: Report contains only ZigBee radio related test cases.

3.2 Ratings and System Details

Table 2: Ratings and System Details

Operating Frequency Band	2400 MHz – 2483.5 MHz;
Radio Protocol	ZigBee
Data rate	250 kbps
Channel Spacing	5 MHz
Modulation	DSSS (O-QPSK)
Number of antennas supports	Refer Table 3 : Antenna Details
Antenna Gain & Type	Refer Table 3 : Antenna Details
Supply Voltage to Product	3.3 VDC
Dimensions	1.5 inch (L) x 0.075 inch (W) x 1.170 inch (H)
Environmental conditions	Operating: -40 °C to +85 °C; 5 % to 95 % RH non-condensing

3.3 Antenna Details and Power level settings used

Table 3 : Antenna Details and power level settings used

Antenna Type: External				
Sl.No	Antenna	Antenna gain	Power level settings	Module supported antenna
1	Centurion MAF94152 Omni Antenna	-2	16	Yes
2	L-COM HG2402RDR-RSP "Rubber-Duck" Omni Antenna	2	14	Yes
3	EM-B14503-MMP-Z6	4	14	Yes
4	L-COM HGV-2404U Omni Antenna	4	14	Yes
5	L-COM HGV-2409U Omni Antenna	8	10	Yes
6	L-COM HG-2414D remote Dish Antenna	14	6	Yes

3.4 Measurement Uncertainty

Table 4: Measurement Uncertainty

Parameter	Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3 dB
Unwanted Emissions, conducted	±3 dB
All emissions, radiated	±6 dB
Temperature	±3 °C
Supply Voltages	±3 %

4 OPERATIONAL DESCRIPTIONS

The radio module intrinsically safe designed implements ISA100 Wireless, WirelessHART ,ZigBee Protocols. The module is ready to use in any industrial wireless field sensors.

5 TEST SET-UP AND OPERATION MODE

5.1 Principle of Configuration Selection

Transmission was enabled with continuous transmission on low, mid and high channel with 100ms and 100% duty cycle to obtain maximum worst-case emissions

The product was tested with TUV Label **1803300194 – 1** and **1803306376 – 2**.

5.2 Test Operation and Test Software

Testing software was used to enable the continuous transmission on low/mid/high channels on the EUT for the tests in this report.

Software Simulator used : Putty and Tera term

Firmware Version : OW310.1 24.1.1

Hardware Version : 51454941-001

Part Number : 51454941

5.3 Special Accessories and Auxiliary Equipment

- UART Converter and Power Cable were used during testing,

5.4 Countermeasures to achieve EMC Compliance

- None

Table 5: List of Center Frequencies


Frequency Band (MHz)	Channel Number	Channel Frequency (MHz)
2400 – 2483.5	01	2405
	02	2410
	03	2415
	04	2420
	05	2425
	06	2430
	07	2435
	08	2440
	09	2445
	10	2450
	11	2455
	12	2460
	13	2465
	14	2470
	15	2475

6 ANTENNA PORT TEST CASES

6.1 DTS Bandwidth and OBW

Result
Pass


Test Specification	FCC part 15 Subpart C Section 15.247 (a) {2} / RSS 247 5.2 (a)
Test Method	Section 8.2 of KDB 558074 D01 DTS Meas Guidance v04
Detector	Peak
Requirement	DTS Bandwidth shall be at least 500 kHz / 0.5 MHz

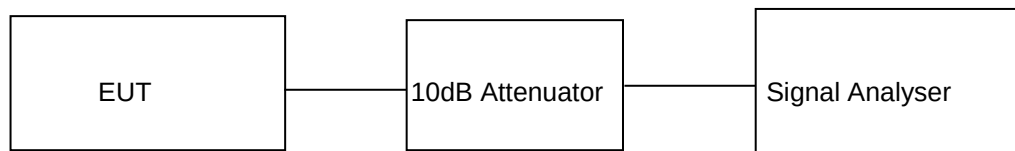Test Setup:

Test Result:

Attenuator (10.48 dB) + cable loss (0.25 dB) = 10.73 dB Considered in the test result.


Table 6: DTS Bandwidth and OBW test results

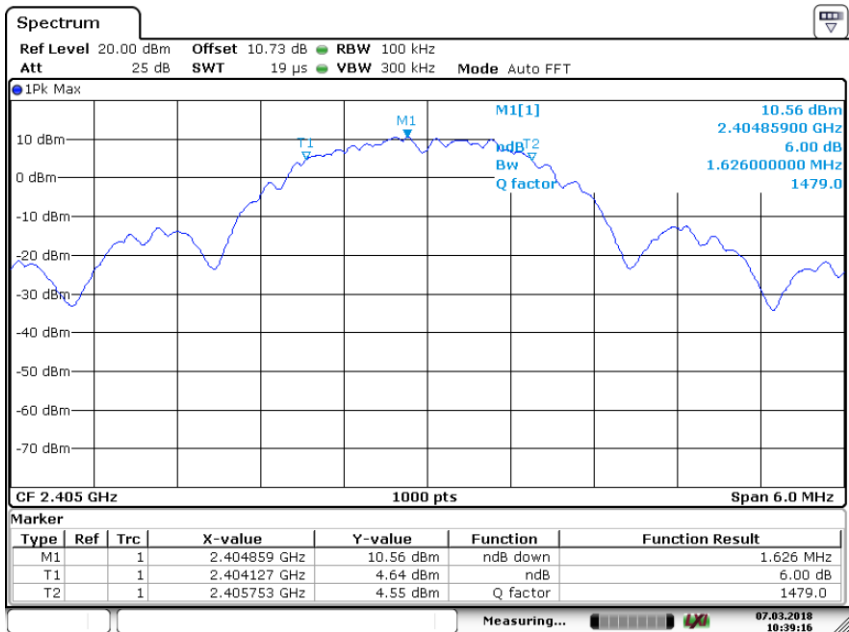IEEE 802.15.4			
Data Rate (kbps)	Channel Frequency (MHz)	DTS Bandwidth (MHz)	99% OBW (MHz)
250	2405	1.63	2.35
	2440	1.62	2.34
	2475	1.62	2.36




Date: 7.MAR.2018 10:39:16

Test Graph 1: 2405 MHz DTS Bandwidth

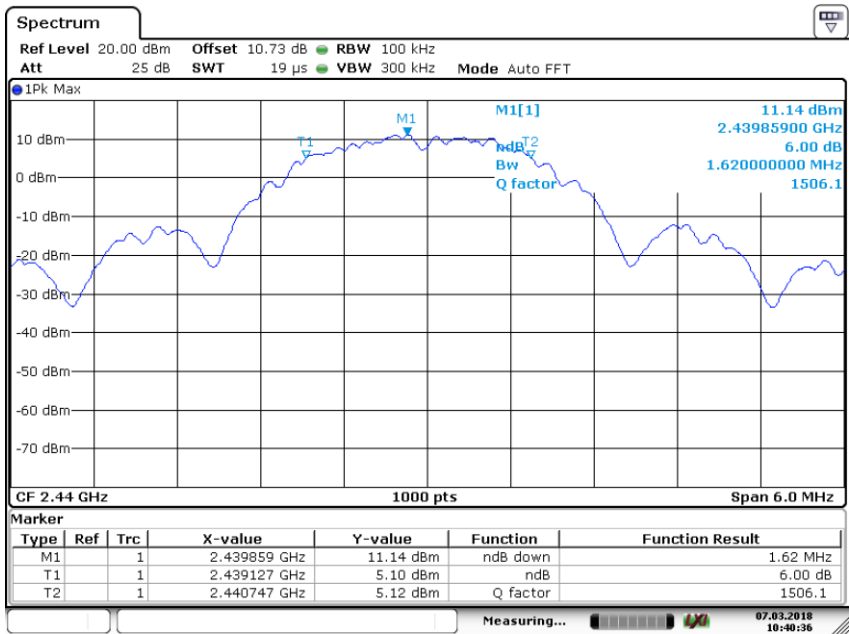


Date: 7.MAR.2018 10:40:36

Test Graph 2: 2440 MHz DTS Bandwidth

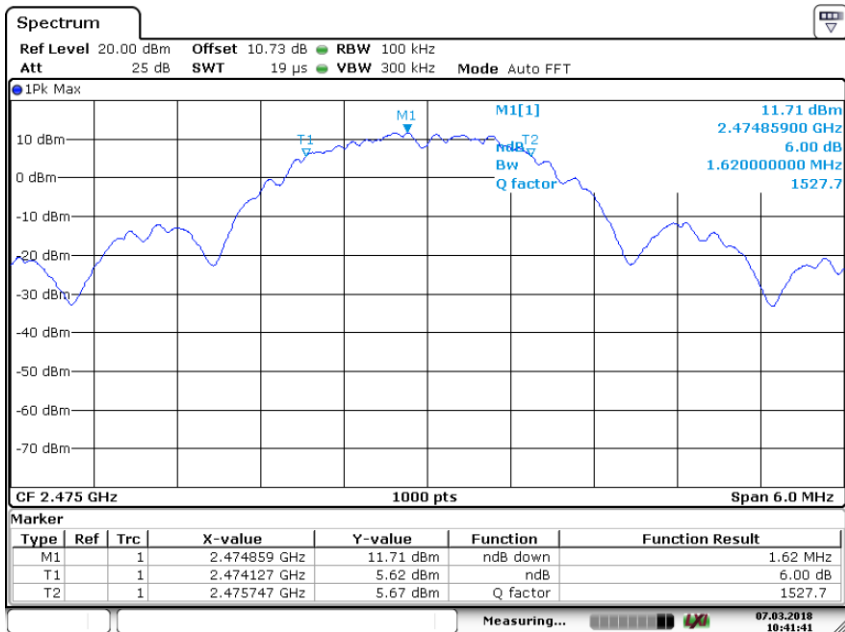


Date: 7.MAR.2018 10:41:41

Test Graph 3: 2475 MHz DTS Bandwidth

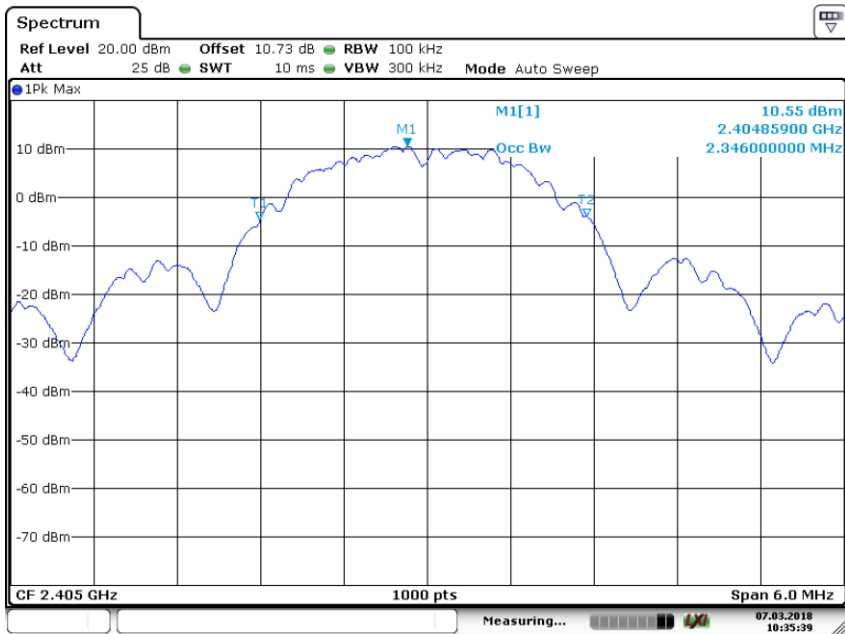


Date: 7.MAR.2018 10:35:39

Test Graph 4: 2405 MHz OBW

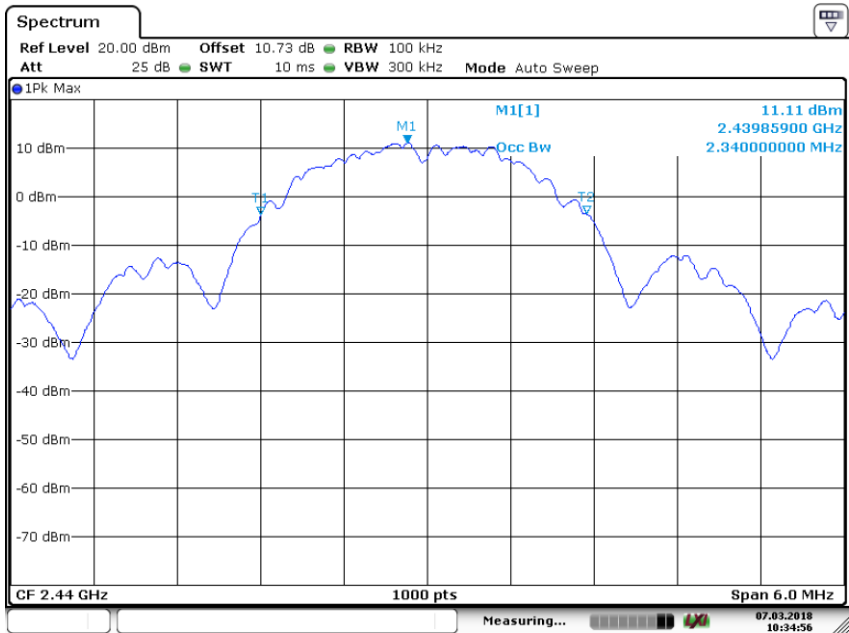

Date: 7. MAR 2018 10:34:56

Test Graph 5: 2440 MHz OBW

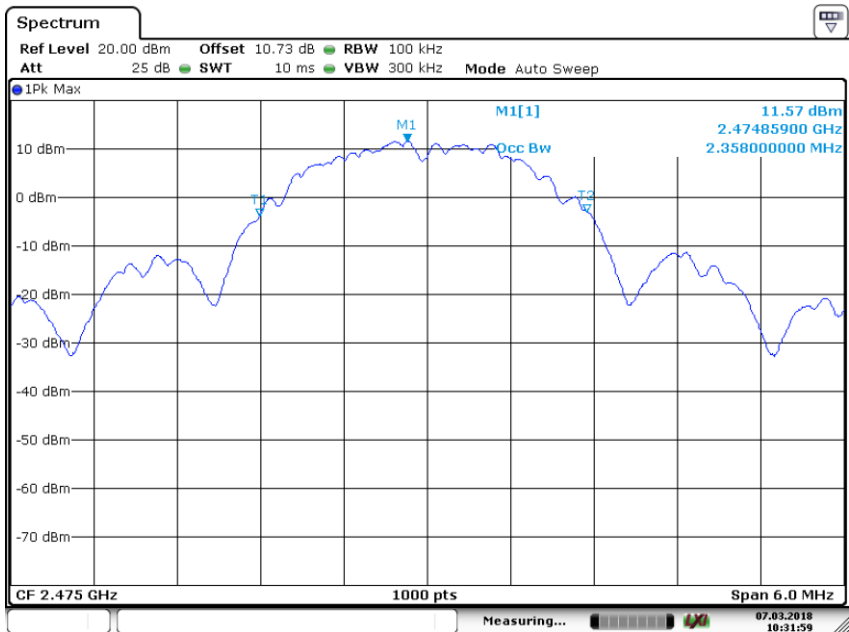


Date: 7. MAR 2018 10:31:59

Test Graph 6: 2475 MHz OBW

6.2 Maximum peak conducted output power

Result
Pass

Test Specification	FCC part 15 Subpart C Section 15.247 (b) {3} / RSS 247 5.4 (d)
Test Method	Section 9.1.1 of KDB 558074 D01 DTS Meas Guidance v04
Detector	Peak
Requirement	Conducted output power shall be ≤ 1 Watt (30 dBm)

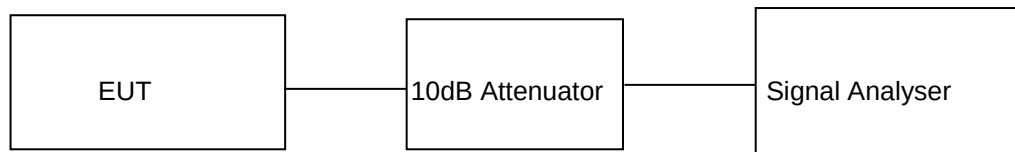
Test Setup:

Test Result:

Attenuator (10.48 dB) + cable loss (0.25 dB) = 10.73 dB Considered in the test result.

Table 7: Maximum peak conducted output power


- 1) 16 dB Power level and -2 dBi antenna gain combination

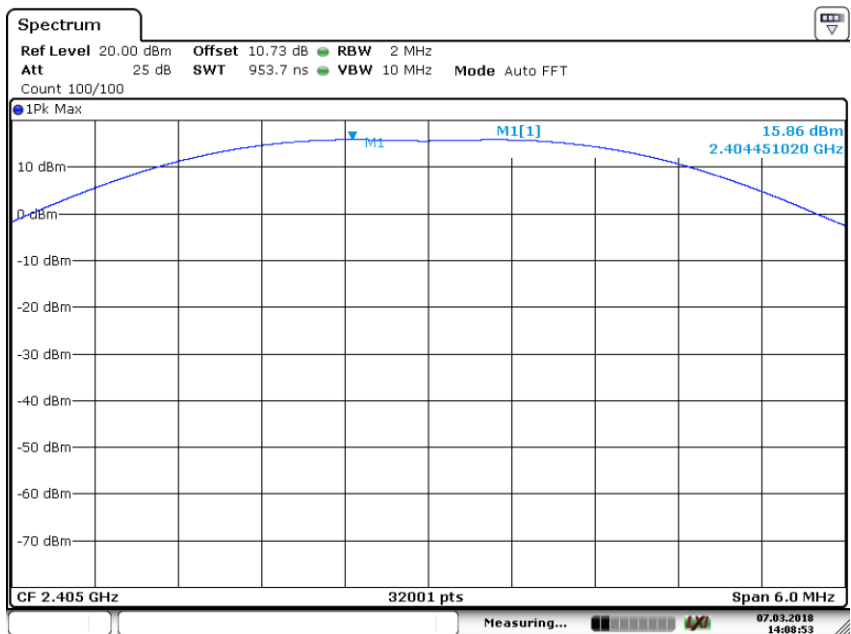IEEE 802.15.4			
Data Rate (kbps)	Channel Frequency (MHz)	Maximum peak conducted output power (dBm)	Limit (dBm)
250	2405	15.86	30
	2440	16.23	30
	2475	16.59	30




Date: 7.MAR.2018 14:08:53

Test Graph 7: 2405 MHz power for 16 dBm power level setting

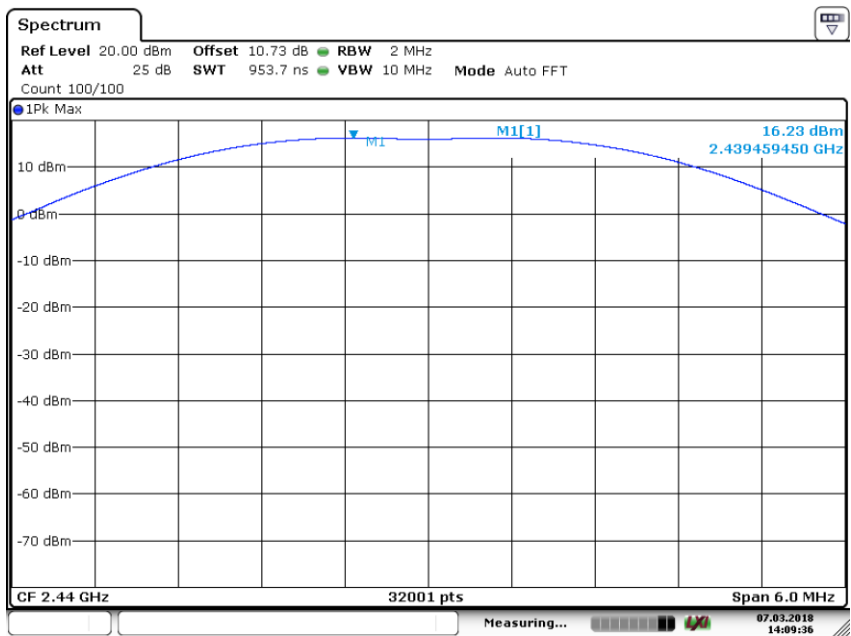

Date: 7.MAR.2018 14:09:36

Test Graph 8: 2440 MHz power for 16 dBm power level setting

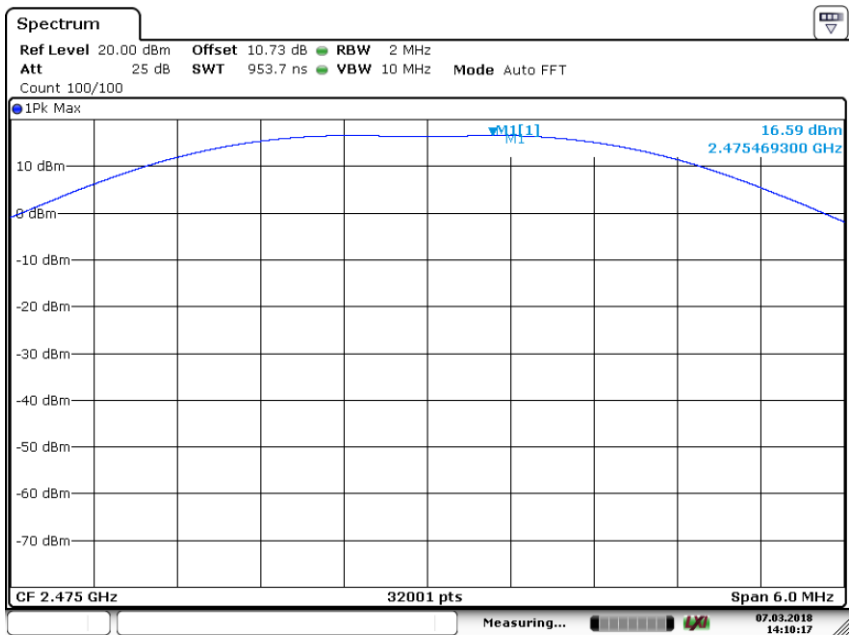


Date: 7.MAR.2018 14:10:17

Test Graph 9: 2475 MHz power for 16 dBm power level setting


2) 10 dB Power level and 8 dBi antenna gain combination

IEEE 802.15.4			
Data Rate (kbps)	Channel Frequency (MHz)	Maximum peak conducted output power (dBm)	Limit (dBm)
250	2405	8.52	28
	2440	9.86	28
	2475	11.38	28

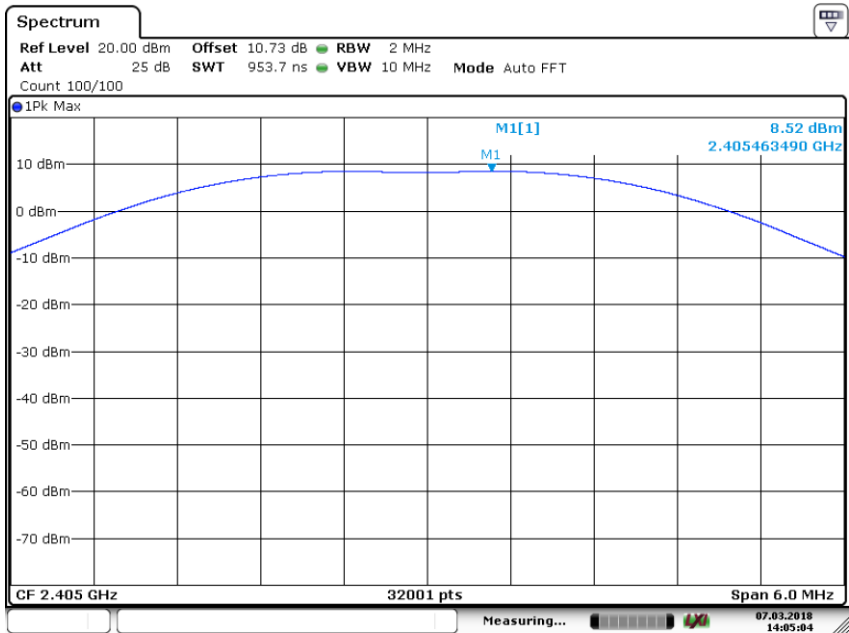


Date: 7.MAR.2018 14:05:04

Test Graph 10: 2405 MHz power for 10dBm power level setting

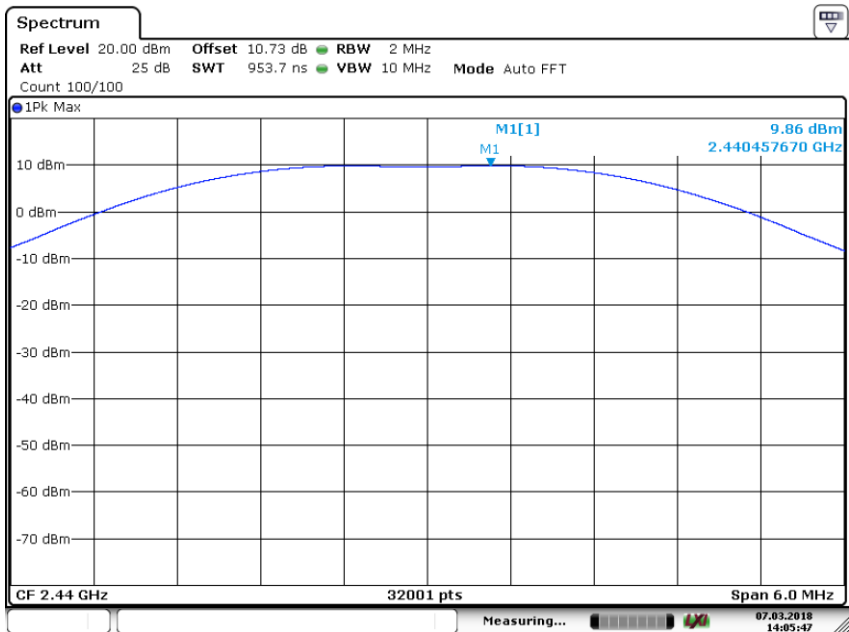

Date: 7.MAR.2018 14:05:48

Test Graph 11: 2440 MHz power for 10 dBm power level setting

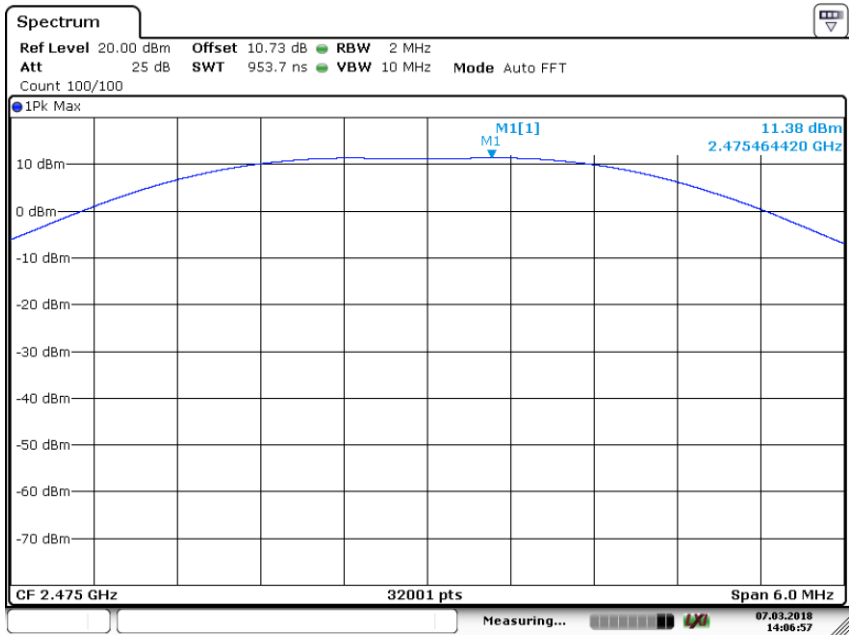


Date: 7.MAR.2018 14:06:57

Test Graph 12: 2475 MHz power for 10 dB power level setting

3) 6 dB Power level and 14 dBi antenna gain combination

IEEE 802.15.4			
Data Rate (kbps)	Channel Frequency (MHz)	Maximum peak conducted output power (dBm)	Limit (dBm)
250	2405	3.51	22
	2440	4.76	22
	2475	6.37	22

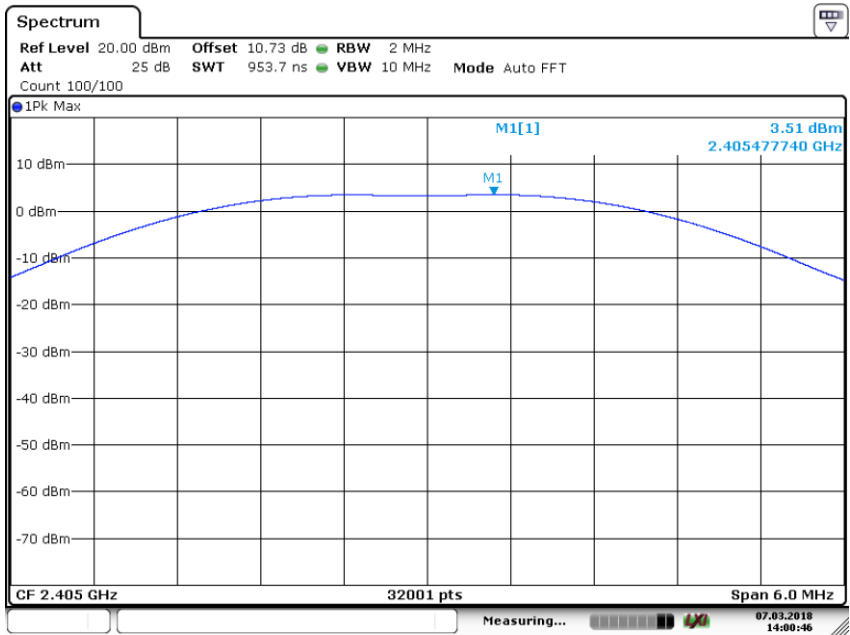

Date: 7.MAR.2018 14:00:46

Test Graph 13: 2405 power for 6 dBm power level setting

6.3 Maximum power spectral density

Result
Pass

Test Specification

FCC part 15 Subpart C Section 15.247 (e) / RSS 247 5.2 (b)

Test Method


Section 10.2 of KDB 558074 D01 DTS Meas Guidance v04

Detector

Peak

Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm.

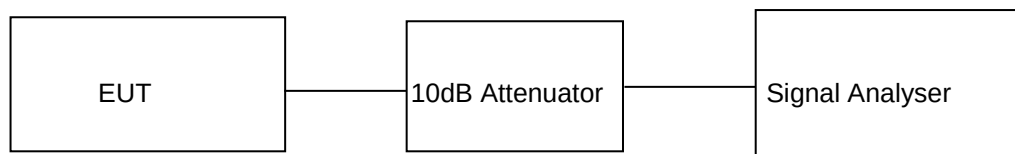
Test Setup:

Test Result:

Attenuator (10.48 dB) + cable loss (0.25 dB) = 10.73 dB Considered in the test result.

Table 8: Peak PSD


IEEE 802.15.4				
Data Rate (kbps)	Channel Frequency (MHz)	Measured Peak PSD (dBm) at 30kHz	Peak PSD (dBm) at 3kHz	Limit (dBm)
250	2405	6.08	-3.92	8
	2440	6.64	-3.36	8
	2475	7.06	-2.94	8

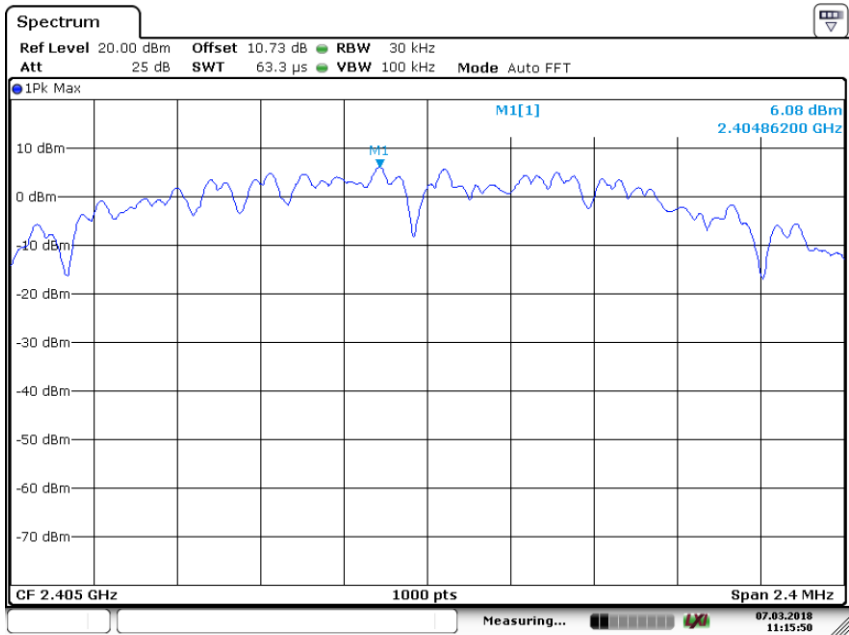Note: -10dB is considered as the conversion factor to convert measured PSD at 30 kHz in to 3 kHz.




Date: 7.MAR.2018 11:15:50

Test Graph 14: 2405 MHz Peak PSD

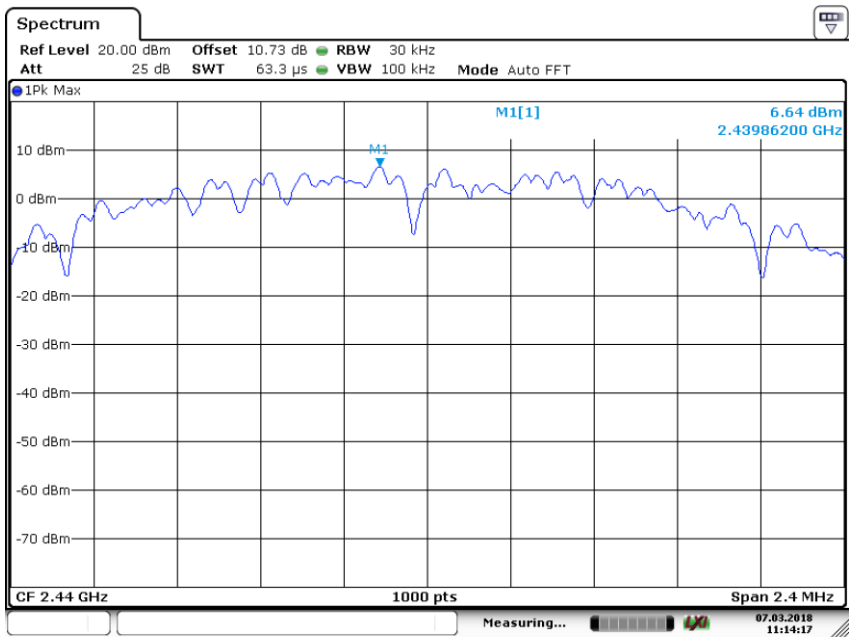

Date: 7.MAR.2018 11:14:17

Test Graph 15: 2440 MHz Peak PSD

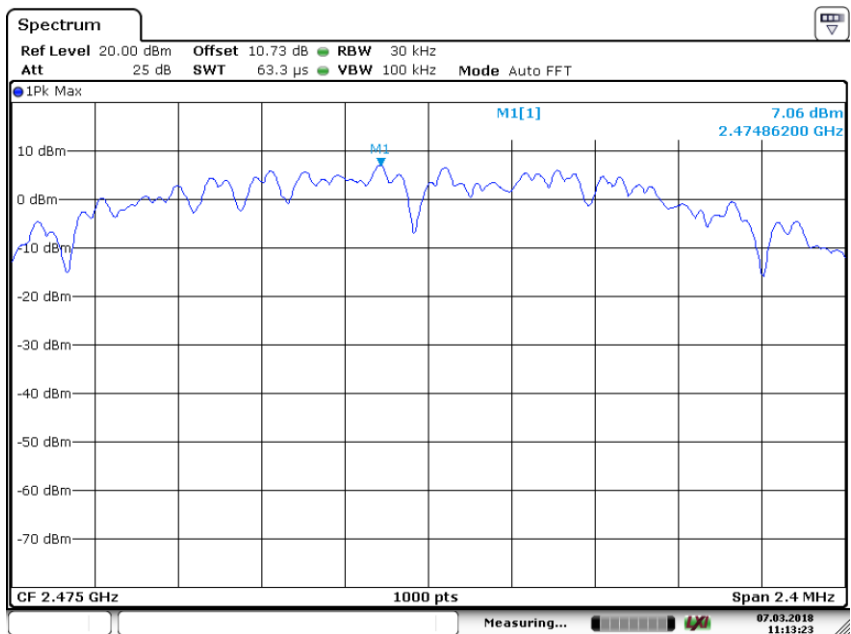

Date: 7.MAR.2018 11:13:23

Test Graph 16: 2475 MHz Peak PSD

6.4 Emissions in non- restricted frequency bands

Result
Pass

Test Specification

FCC part 15 Subpart C Section 15.247 (d) / RSS 247 5.5

Test Method


Section 11.2 and 11.3 of KDB 558074 D01 DTS Meas Guidance v04

Detector

Peak

Requirement


In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits

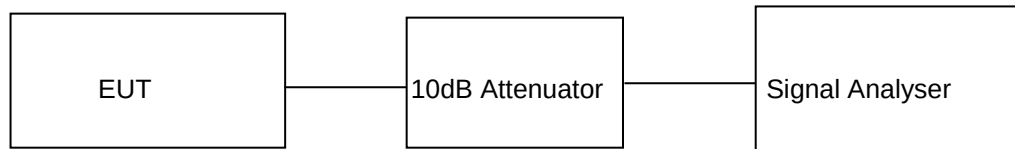Test Setup:

Test Result:

Attenuator (10.48 dB) + cable loss (0.25 dB) = 10.73 dB Considered in the test result.


Table 9: Reference level measurement

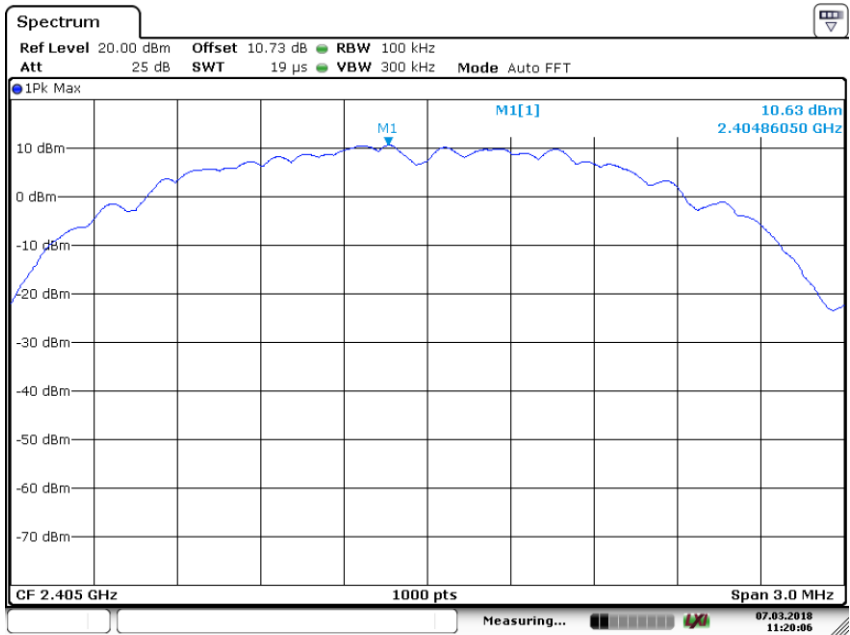Channel Frequency (MHz)	Measured reference level (dBm)
2405	10.63
2475	11.67



Date: 7.MAR.2018 11:20:06

Test Graph 17: 2405 MHz Reference level

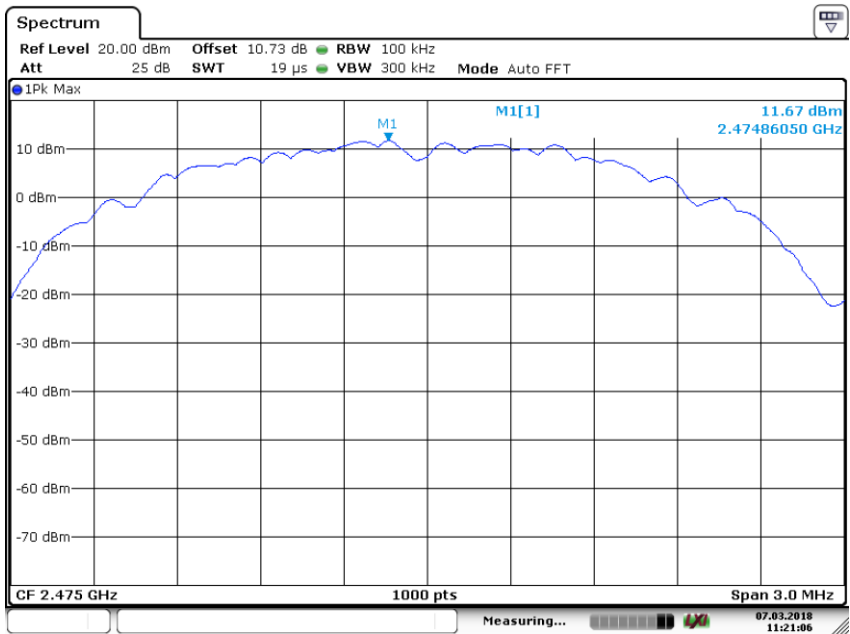


Date: 7.MAR.2018 11:21:07

Test Graph 18: 2475 MHz Reference level


Table 10: Emissions in non- restricted frequency bands / Emission level measurement

Channel Frequency (MHz)	Value at Band Edge		Reference Value B (dBm)	Band Edge Value A~B (dB)	Limit (dB)
	Frequency (MHz)	Value A (dBm)			
2405	2400	-33.93	10.63	-44.56	-20
2475	2483.5	-50.37	11.67	-62.04	-20
	2483.8	-43.31	11.67	-54.98	-20

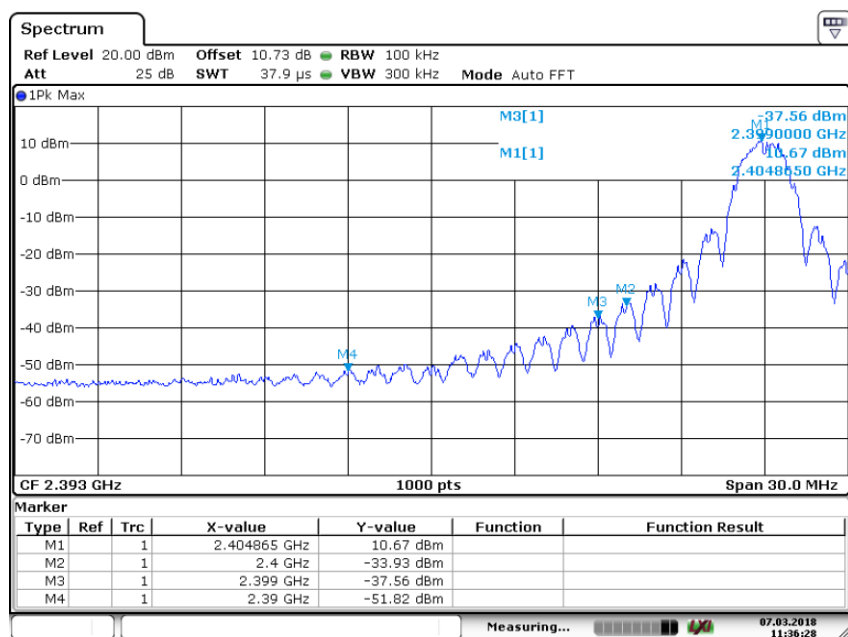

Date: 7.MAR.2018 11:36:28

Test Graph 19: 2405 MHz Band edge level

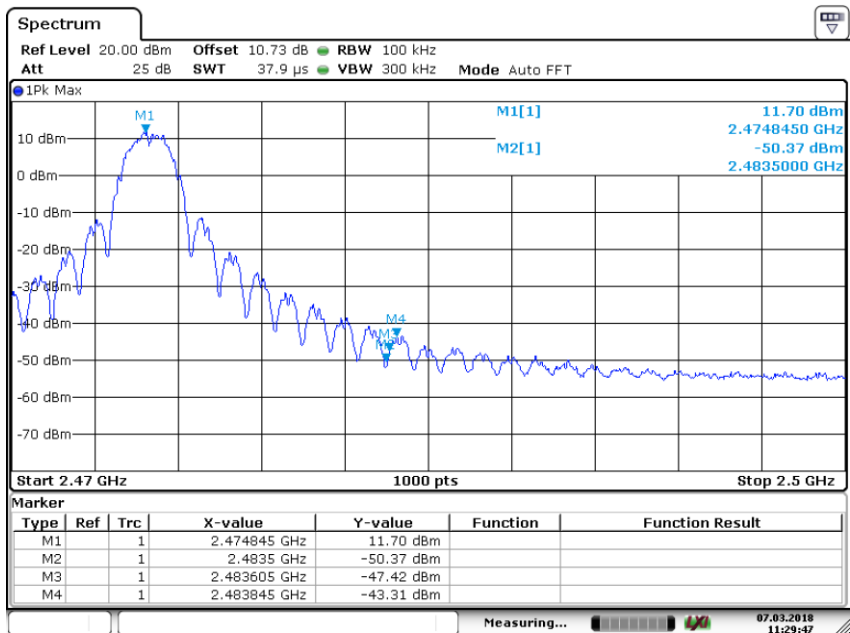


Date: 7.MAR.2018 11:29:47

Test Graph 20: 2475 MHz Band edge level


Table 11: Emissions in non- restricted frequency bands / Emission level measurement with 2 MHz span

Channel Frequency (MHz)	Value at Band Edge		Limit
	Frequency (MHz)	Value (dBm)	(dB)
2400	2400	-32.43	-20
2483.5	2483.5	-43.88	-20

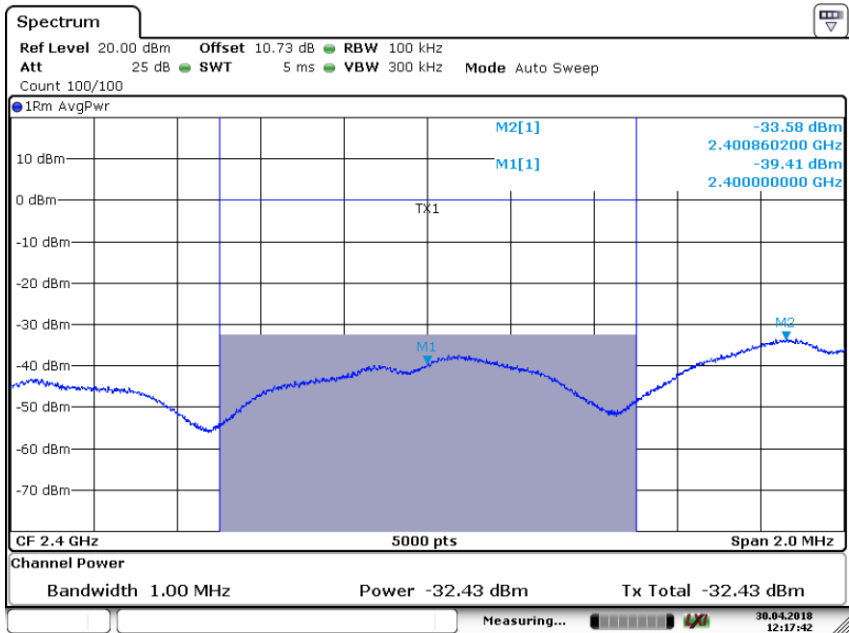

Date: 30.APR.2018 12:17:42

Test Graph 21: 2405 MHz Band edge level with 2MHz span

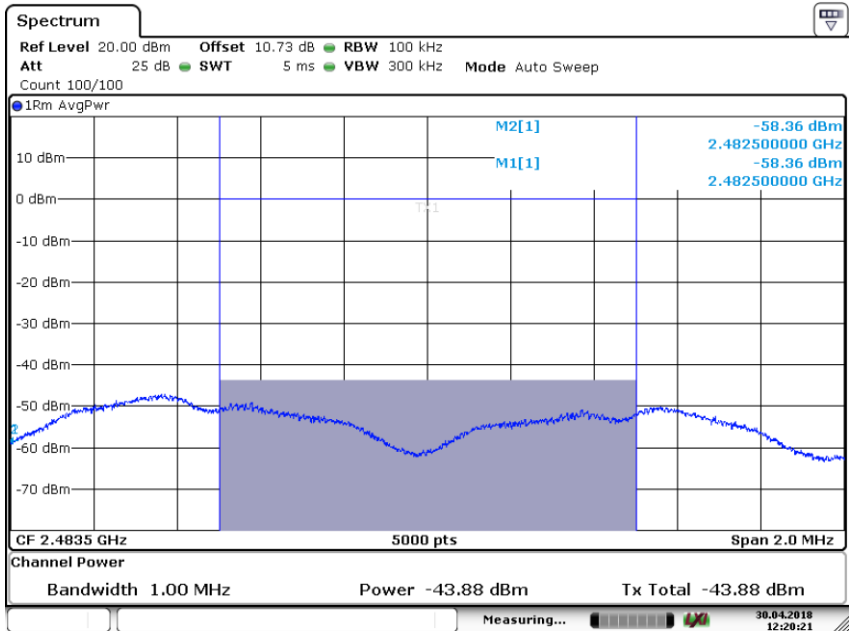


Date: 30.APR.2018 12:20:22


Test Graph 22: 2475 MHz Band edge level with 2MHz span

Conducted spurious emission


Frequency range 30 MHz to 26.5 GHz span

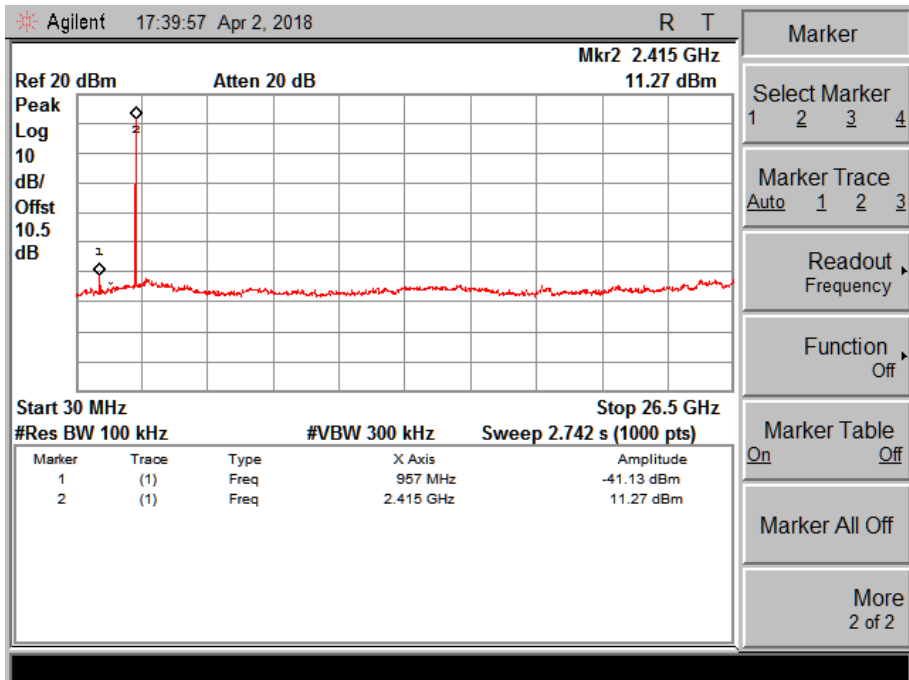

Test Graph 23: 2405 MHz - 30 MHz to 26.5 GHz spurious emission

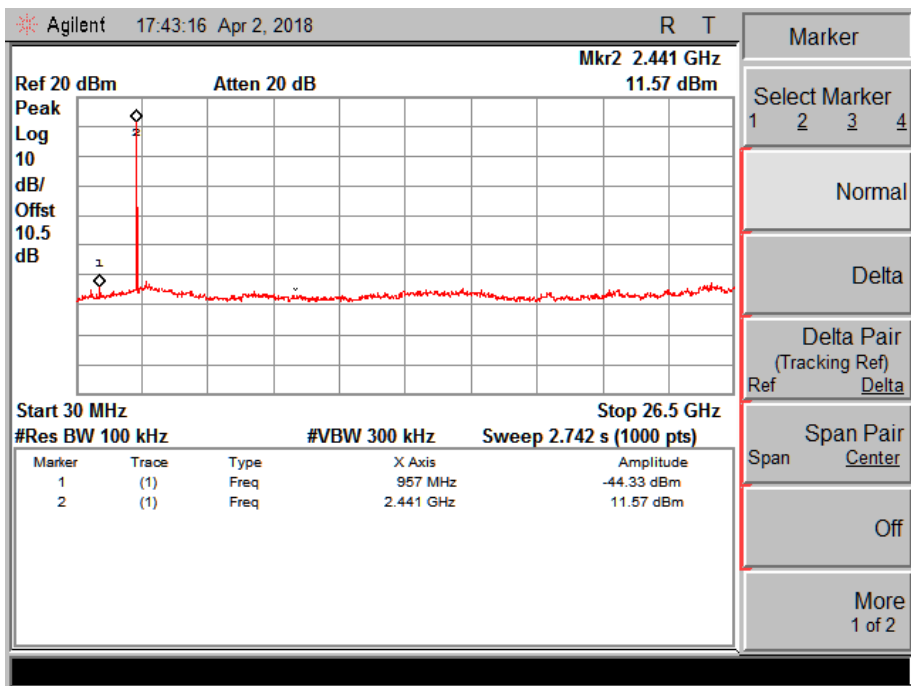

Test Graph 24: 2440 MHz - 30 MHz to 26.5 GHz spurious emission

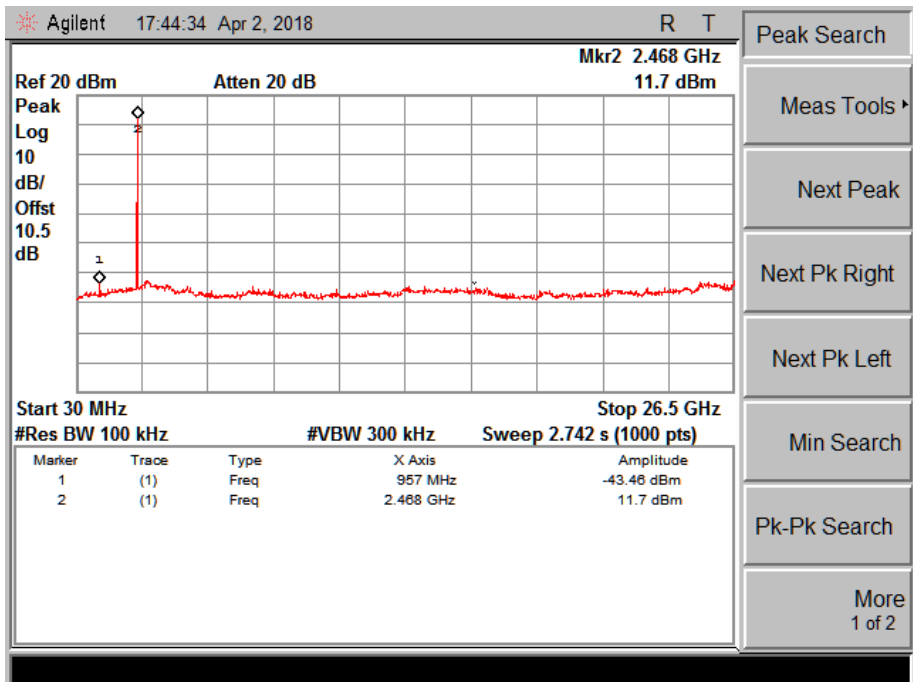

Test Graph 25: 2475 MHz – 30 MHz to 26.5 GHz spurious emission

7 RADIATED TEST METHODOLOGY


7.1 Radiated Emission Test

The radiated emission measurement was performed according to the procedures in ANSI C63.10-2013. The equipment under test (EUT) was placed at the middle of the 80 cm high turntable for below 1 GHz & 1.5 m height for above 1 GHz measurement, and the EUT is 3 meters far from the measuring antenna. The turntable was rotated 360° for obtaining the maximum emission. The height of the measuring antennas was scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained. The measurement above 1000 MHz was performed by horn antenna, the measurement below 30 MHz was performed by loop antenna, Measurement from 30 MHz to 200 MHz was performed by Baloon and Biconical Antenna, and measurement from 200 MHz to 1000 MHz was performed by Log-Periodic Antenna

The EUT was rotated around the X-, Y-, and Z-Axis and the results from worst case axis are recorded.

7.1.1 Test Setup Configuration

Figure 1: Frequency Range 9 kHz- 30 MHz

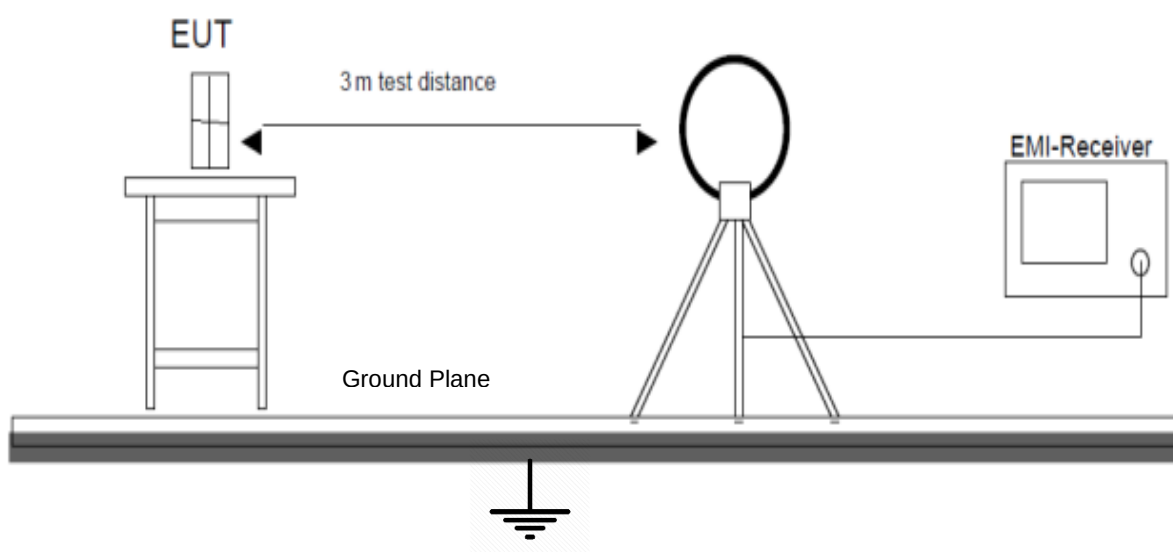

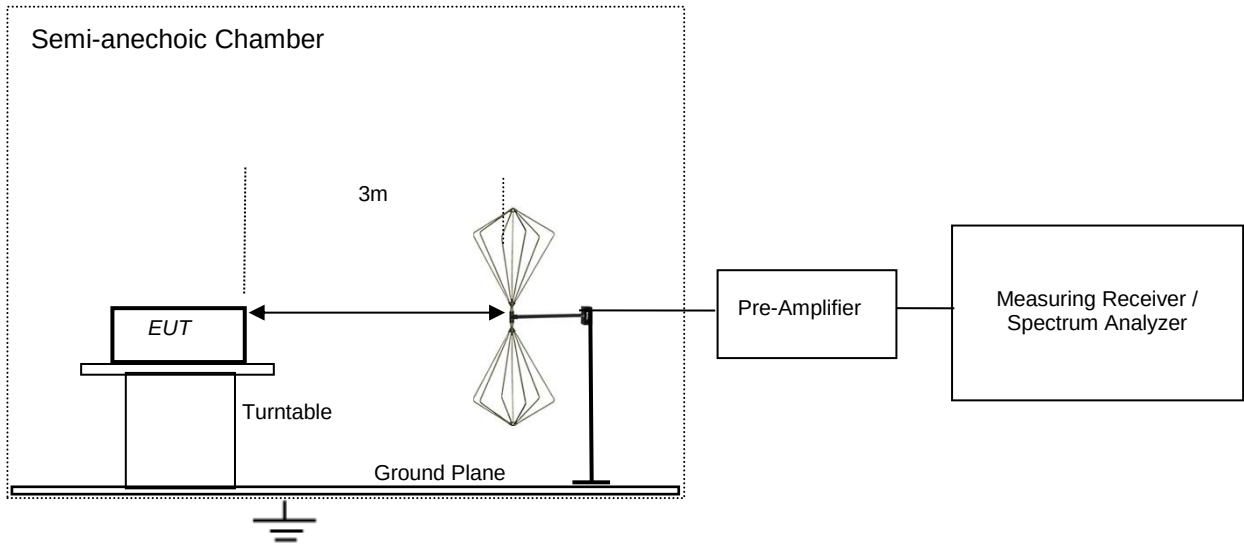


Figure 2: Frequency Range 30 MHz – 200 MHz

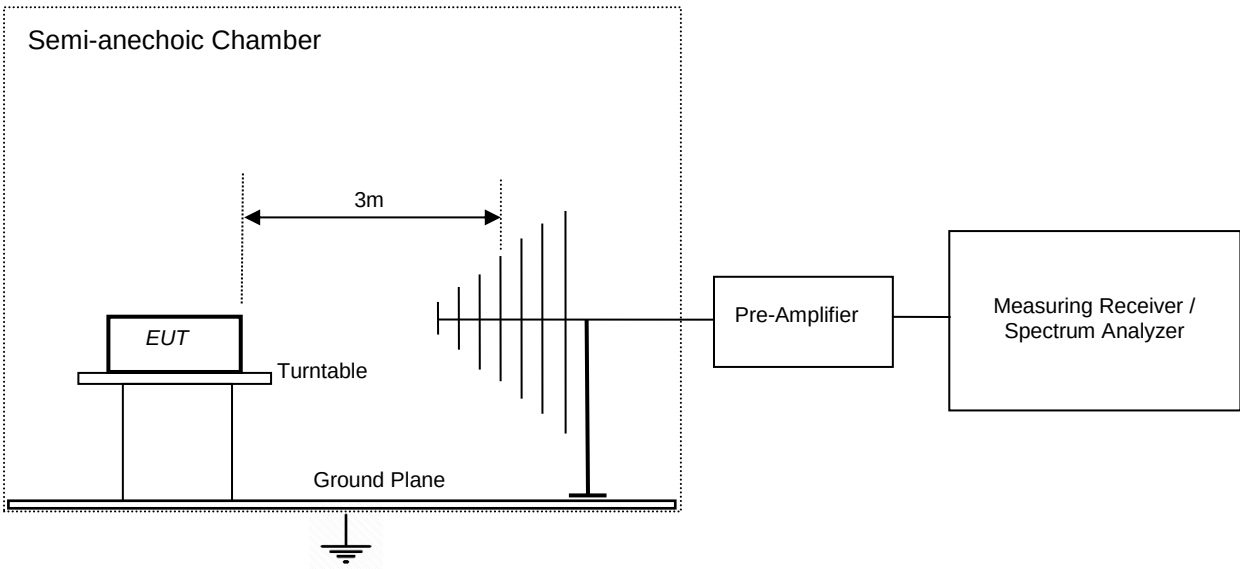


Figure 3: Frequency Range above 200 MHz – 1000 MHz

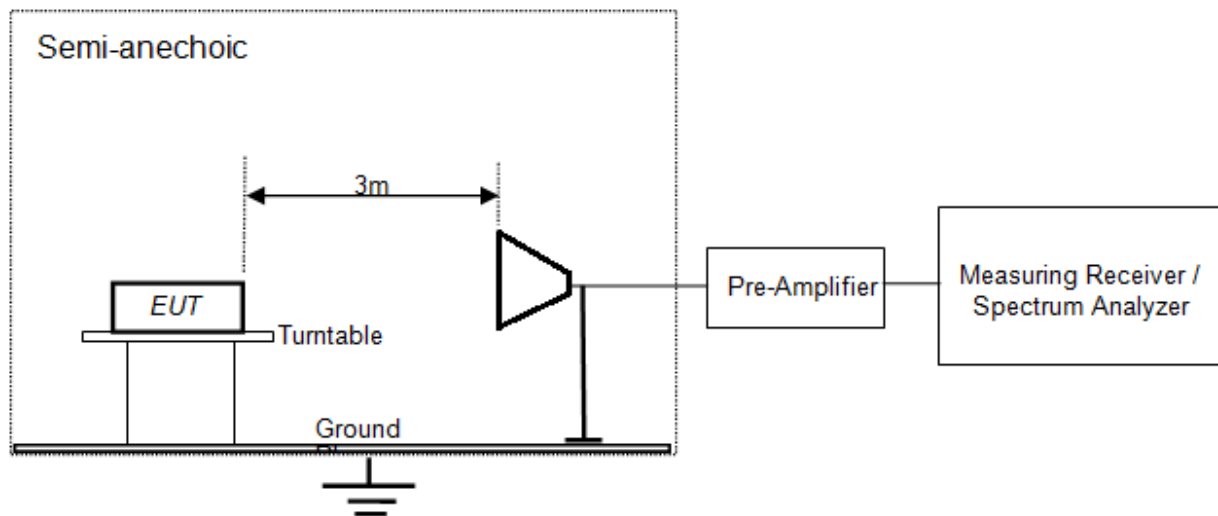


Figure 4: Frequency range above 1000 MHz

8 TEST RESULTS

8.1 Restricted bands of Emissions & Restricted Bands of Operation

Result
Pass

Test Specification	FCC part 15 Subpart C Section 15.247 (d) / (15.209 & 15.205) / RSS Gen 8.9 and 8.10
Test Method	ANSI C 63.10 - 2013
Measurement Location	Semi Anechoic Chamber
Measuring Distance	3 m
Detector	QP for frequency below 1 GHz, average for frequency above 1 GHz
Requirement	As per the limits mentioned in the below table

Table 12: Transmitter limits for Radiated emission of Section 15.209, RSS Gen 8.9 and 8.10.

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Distance of Measurement (m)
0.009 – 0.490	2400/F(kHz)	48.50 – 13.80	300*
0.490 – 1.705	24000/F(kHz)	33.80 – 23.00	30*
1.705 -30	30	29.54	30*
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Remark: * The limit shows in the table above of frequency range 0.009 – 0.490, 0.490 – 1.705 MHz and 1.705-30MHz is at 300 meter, 30 meter and 30 meter range respectively, which corresponds to 128.51 – 93.80, 73.80 – 62.96 and 69.54dBμV/m at 3m range by extrapolation calculation and the measurement of loop antenna.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

Test Conditions:

Supply Voltage: 3.3V DC

Environmental conditions:

Temperature: +25.9 °C RH: 62.46 %

8.1.1 Test results for GXRM Module

No emissions found in frequency 9 kHz to 30 MHz

Frequency Range 30 MHz – 200 MHz

Table 13: Test Results for frequency range 30 MHz to 200 MHz

Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	39.265	19.6	40	-20.4
	46.4	18.7	40	-21.3
	47.34	20.21	40	-19.79
	57.59	33.46	40	-6.54
	120.03	22.48	43.5	-21.02
	148.3	25.68	43.5	-17.82
	194.45	32.28	43.5	-11.22
	198.56	33.76	43.5	-9.74
Horizontal	71.63	21.01	40	-18.99
	121.22	16.39	43.5	-27.11

Frequency Range 200 MHz – 1000 MHz

Table 14: Test Results for frequency range 200 MHz to 1 GHz

Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	875.28	34.14	46	-11.86
	884	36.33	46	-9.67
	956.08	40.02	46	-5.98
Horizontal	884	35.23	46	-10.77
	956.6	36.75	46	-9.25

Frequency range above 1 GHz to 26.5 GHz

Table 15: Test results for Antenna -2 dBi and 16 dBm power level

Polarization	Operating Frequency (MHz)	Measured Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Vertical	2405.00	2316.5 (Pk)	63.79	74.00	-10.21
		2316.5 (Av)	44.44	54.00	-9.56
		2390 (Pk)	49.23	74.00	-24.77
		2390 (Av)	40.65	54.00	-13.35
		2405 (Pk)	118.21	-	*
		2405 (Av)	114.72	-	*
		4810 (Pk)	55.10	74.00	-18.90
		4810 (Av)	46.04	54.00	-7.96
		7215 (Pk)	59.30	74.00	-14.70
		7215 (Av)	49.25	54.00	-4.75
Horizontal		2365.5 (Pk)	60.02	74.00	-13.98
		2365.5 (Av)	41.76	54.00	-12.24
		2390 (Pk)	46.92	74.00	-27.08
		2390 (Av)	37.94	54.00	-16.06
		2405 (Pk)	110.37	-	*
		2405 (Av)	106.98	-	*
		4810 (Pk)	53.89	74.00	-20.11
		4810 (Av)	44.42	54.00	-9.58
		7215 (Pk)	59.41	74.00	-14.59
		7215 (Av)	48.21	54.00	-5.79
Vertical	2440.00	2440 (Pk)	115.28	-	*
		2440 (Av)	111.97	-	*
		4880 (Pk)	54.94	74.00	-19.06
		4880 (Av)	45.30	54.00	-8.70
		7320 (Pk)	61.50	74.00	-12.50
		7320 (Av)	52.18	54.00	-1.82
Horizontal		2440 (Pk)	111.07	-	*
		2440 (Av)	107.70	-	*
		4880 (Pk)	55.10	74.00	-18.90
		4880 (Av)	45.56	54.00	-8.44
		7320 (Pk)	60.54	74.00	-13.46
		7320 (Av)	50.10	54.00	-3.90

* - Fundamental frequency

Vertical	2475.00	2483.5 (Pk)	61.89	74.00	-12.11
		2483.5 (Av)	52.07	54.00	-1.93
		2475 (Pk)	115.75	-	*
		2475 (Av)	112.45	-	*
		4950 (Pk)	54.15	74.00	-19.85
		4950 (Av)	44.78	54.00	-9.22
		7425 (Pk)	62.03	74.00	-11.97
		7425 (Av)	52.27	54.00	-1.73
Horizontal		2483.5 (Pk)	57.16	74.00	-16.84
		2483.5 (Av)	47.20	54.00	-6.80
		2475 (Pk)	115.38	-	*
		2475 (Av)	111.94	-	*
		4950 (Pk)	52.75	74.00	-21.25
		4950 (Av)	42.88	54.00	-11.12
		7425 (Pk)	61.23	74.00	-12.77
		7425 (Av)	50.07	54.00	-3.93

* - Fundamental frequency

Table 16: Test results for Antenna 2 dBi and 16 dBm power level

Polarization	Operating Frequency (MHz)	Measured Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Vertical	2405.00	2390 (Pk)	47.83	74.00	-26.17
		2390 (Av)	38.38	54.00	-15.62
		2405 (Pk)	112.40	-	*
		2405 (Av)	108.92	-	*
		4810 (Pk)	56.21	74.00	-17.79
		4810 (Av)	46.24	54.00	-7.76
		7215 (Pk)	62.13	74.00	-11.87
		7215 (Av)	48.41	54.00	-5.59
Horizontal		2390 (Pk)	43.05	74.00	-30.95
		2390 (Av)	32.35	54.00	-21.65
		2405 (Pk)	104.40	-	*
		2405 (Av)	101.00	-	*
		4810 (Pk)	56.98	74.00	-17.02
		4810 (Av)	47.29	54.00	-6.71
		7215 (Pk)	61.82	74.00	-12.18
		7215 (Av)	48.37	54.00	-5.63

* - Fundamental frequency

Vertical	2440.00	2440 (Pk)	110.85	-	*
		2440 (Av)	107.52	-	*
		4880 (Pk)	56.69	74.00	-17.31
		4880 (Av)	46.95	54.00	-7.05
		7320 (Pk)	62.83	74.00	-11.17
		7320 (Av)	48.72	54.00	-5.28
Horizontal		2440 (Pk)	104.38	-	*
		2440 (Av)	100.99	-	*
		4880 (Pk)	57.18	74.00	-16.82
		4880 (Av)	48.15	54.00	-5.85
		7320 (Pk)	62.08	74.00	-11.92
		7320 (Av)	48.65	54.00	-5.35
Vertical	2475.00	2483.5 (Pk)	61.81	74.00	-12.19
		2483.5 (Av)	52.37	54.00	-1.63
		2475 (Pk)	114.29	-	*
		2475 (Av)	110.99	-	*
		4950 (Pk)	56.89	74.00	-17.11
		4950 (Av)	46.99	54.00	-7.01
		7425 (Pk)	62.76	74.00	-11.24
		7425 (Av)	49.25	54.00	-4.75
Horizontal		2483.5 (Pk)	52.87	74.00	-21.13
		2483.5 (Av)	48.29	54.00	-5.71
		2475 (Pk)	106.97	-	*
		2475 (Av)	103.61	-	*
		4950 (Pk)	57.01	74.00	-16.99
		4950 (Av)	48.12	54.00	-5.88
		7425 (Pk)	63.00	74.00	-11.00
		7425 (Av)	49.23	54.00	-4.77

* - Fundamental frequency

Table 17: Test Results for Antenna 4 dBi (EM-B14503-MMP-Z6) and 14 dBm power level

Polarization	Operating Frequency (MHz)	Measured Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Vertical	2405.00	2390 (Pk)	47.77	74.00	-26.23
		2390 (Av)	37.30	54.00	-16.70
		2405 (Pk)	110.65	-	*
		2405 (Av)	107.25	-	*
		4810 (Pk)	53.84	74.00	-20.16
		4810 (Av)	42.18	54.00	-11.82
		7215 (Pk)	61.66	74.00	-12.34
		7215 (Av)	48.09	54.00	-5.91
Horizontal		2390 (Pk)	43.03	74.00	-30.97
		2390 (Av)	33.11	54.00	-20.89
		2405 (Pk)	103.97	-	*
		2405 (Av)	100.71	-	*
		4810 (Pk)	54.32	74.00	-19.68
		4810 (Av)	43.58	54.00	-10.42
		7215 (Pk)	61.52	74.00	-12.48
		7215 (Av)	48.11	54.00	-5.89
Vertical	2440.00	2440 (Pk)	111.55	-	*
		2440 (Av)	108.15	-	*
		4880 (Pk)	54.95	74.00	-19.05
		4880 (Av)	44.19	54.00	-9.81
		7320 (Pk)	62.33	74.00	-11.67
		7320 (Av)	48.56	54.00	-5.44
Horizontal		2440 (Pk)	104.86	-	*
		2440 (Av)	101.42	-	*
		4880 (Pk)	55.01	74.00	-18.99
		4880 (Av)	44.94	54.00	-9.06
		7320 (Pk)	62.89	74.00	-11.11
		7320 (Av)	48.58	54.00	-5.42

* - Fundamental frequency

Prüfbericht - Nr.:
Test Report No.:
19660369 001
Seite 38 von 44
Page 38 of 44

Vertical	2475.00	2483.5 (Pk)	60.04	74.00	-13.96
		2483.5 (Av)	50.77	54.00	-3.23
		2475 (Pk)	113.03	-	*
		2475 (Av)	109.61	-	*
		4950 (Pk)	55.31	74.00	-18.69
		4950 (Av)	44.55	54.00	-9.45
Horizontal		7425 (Pk)	62.85	74.00	-11.15
		7425 (Av)	49.87	54.00	-4.13
		2483.5 (Pk)	54.79	74.00	-19.21
		2483.5 (Av)	44.89	54.00	-9.11
		2475 (Pk)	107.33	-	*
		2475 (Av)	103.96	-	*
		4950 (Pk)	55.97	74.00	-18.03
		4950 (Av)	45.03	54.00	-8.97
		7425 (Pk)	63.02	74.00	-10.98
		7425 (Av)	49.29	54.00	-4.71

* - Fundamental frequency

Table 18: Test Results for Antenna 4 dBi (HGV- 2404U) and 14 dBm Power level

Polarization	Operating Frequency (MHz)	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	2405.00	2390 (Pk)	46.65	74.00	-27.35
		2390 (Av)	38.21	54.00	-15.79
		2405 (Pk)	109.53	-	*
		2405 (Av)	108.16	-	*
		4810 (Pk)	52.72	74.00	-21.28
		4810 (Av)	43.09	54.00	-10.91
		7215 (Pk)	60.54	74.00	-13.46
		7215 (Av)	49.00	54.00	-5.00
Horizontal		2390 (Pk)	41.91	74.00	-32.09
		2390 (Av)	34.02	54.00	-19.98
		2405 (Pk)	102.85	-	*
		2405 (Av)	101.62	-	*
		4810 (Pk)	53.20	74.00	-20.80
		4810 (Av)	44.49	54.00	-9.51
		7215 (Pk)	60.40	74.00	-13.60
		7215 (Av)	49.02	54.00	-4.98

* - Fundamental frequency

Vertical	2440.00	2440 (Pk)	110.43	-	*
		2440 (Av)	109.06	-	*
		4880 (Pk)	53.83	74.00	-20.17
		4880 (Av)	45.10	54.00	-8.90
		7320 (Pk)	61.21	74.00	-12.79
		7320 (Av)	49.47	54.00	-4.53
Horizontal		2440 (Pk)	103.74	-	*
		2440 (Av)	102.33	-	*
		4880 (Pk)	53.89	74.00	-20.11
		4880 (Av)	45.85	54.00	-8.15
		7320 (Pk)	61.77	74.00	-12.23
		7320 (Av)	49.49	54.00	-4.51
Vertical	2475.00	2483.5 (Pk)	58.92	74.00	-15.08
		2483.5 (Av)	51.68	54.00	-2.32
		2475 (Pk)	111.91	-	*
		2475 (Av)	110.52	-	*
		4950 (Pk)	54.19	74.00	-19.81
		4950 (Av)	45.46	54.00	-8.54
Horizontal		7425 (Pk)	61.73	74.00	-12.27
		7425 (Av)	50.78	54.00	-3.22
		2483.5 (Pk)	53.67	74.00	-20.33
		2483.5 (Av)	45.80	54.00	-8.20
		2475 (Pk)	106.21	-	*
		2475 (Av)	104.87	-	*
		4950 (Pk)	54.85	74.00	-19.15
		4950 (Av)	45.94	54.00	-8.06
		7425 (Pk)	61.90	74.00	-12.10
		7425 (Av)	50.20	54.00	-3.80

* - Fundamental frequency

Table 19: Test Results for Antenna 8 dBi and 10 dBm power level

Polarization	Operating Frequency (MHz)	Measured Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	
Vertical	2405.00	2390 (Pk)	46.59	74.00	-27.41	
		2390 (Av)	36.50	54.00	-17.50	
		2405 (Pk)	109.50	-	*	
		2405 (Av)	106.21	-	*	
		4810 (Pk)	52.71	74.00	-21.29	
		4810 (Av)	42.62	54.00	-11.38	
		7215 (Pk)	58.05	74.00	-23.23	
		7215 (Av)	44.31	54.00	-14.43	
Horizontal		2390 (Pk)	39.83	74.00	-34.17	
		2390 (Av)	28.34	54.00	-25.66	
		2405 (Pk)	94.95	-	*	
		2405 (Av)	91.64	-	*	
		4810 (Pk)	50.77	74.00	-23.23	
		4810 (Av)	39.57	54.00	-14.43	
Vertical		2440.00	7215 (Av)	44.31	54.00	-9.69
			2440 (Pk)	110.33	-	*
	2440 (Av)		106.89	-	*	
	4880 (Pk)		53.41	74.00	-20.59	
	4880 (Av)		42.92	54.00	-11.08	
	7320 (Pk)		58.71	74.00	-15.29	
	7320 (Av)		44.91	54.00	-9.09	
	Horizontal		2440 (Pk)	95.98	-	*
			2440 (Av)	95.28	-	*
			4880 (Pk)	51.19	74.00	-22.81
4880 (Av)			37.38	54.00	-16.62	
7320 (Pk)			58.89	74.00	-15.11	
7320 (Av)			44.83	54.00	-9.17	

* - Fundamental frequency

Vertical	2475.00	2483.5 (Pk)	61.33	74.00	-12.67
		2483.5 (Av)	51.87	54.00	-2.13
		2475 (Pk)	114.16	-	*
		2475 (Av)	110.79	-	*
		4950 (Pk)	51.63	74.00	-22.37
		4950 (Av)	40.22	54.00	-13.78
		7425 (Pk)	59.09	74.00	-14.91
		7425 (Av)	45.09	54.00	-8.91
Horizontal		2483.5 (Pk)	47.01	74.00	-26.99
		2483.5 (Av)	37.08	54.00	-16.92
		2475 (Pk)	98.35	-	*
		2475 (Av)	94.99	-	*
		4950 (Pk)	50.94	74.00	-23.06
		4950 (Av)	37.96	54.00	-16.04
		7425 (Pk)	59.20	74.00	-14.80
		7425 (Av)	45.40	54.00	-8.60

* - Fundamental frequency

Table 20: Test Results for Antenna 14 dBi and 6 dBm power level

Polarization	Operating Frequency (MHz)	Measured Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Vertical	2405.00	2390 (Pk)	45.87	74.00	-28.13
		2390 (Av)	35.78	54.00	-18.22
		2405 (Pk)	110.83	-	*
		2405 (Av)	107.84	-	*
		4810 (Pk)	51.99	74.00	-22.01
		4810 (Av)	41.90	54.00	-12.10
		7215 (Pk)	57.33	74.00	-23.65
		7215 (Av)	43.59	54.00	-16.86
Horizontal		2390 (Pk)	59.84	74.00	-29.70
		2390 (Av)	41.86	54.00	-12.14
		2405 (Pk)	96.94	-	*
		2405 (Av)	93.46	-	*
		4810 (Pk)	50.35	74.00	-23.65
		4810 (Av)	37.14	54.00	-16.86
		7215 (Pk)	58.09	74.00	-15.91
		7215 (Av)	44.30	54.00	-9.70

* - Fundamental frequency

Vertical	2440.00	2440 (Pk)	111.73	-	*
		2440 (Av)	108.44	-	*
		4880 (Pk)	55.57	74.00	-18.43
		4880 (Av)	42.89	54.00	-11.11
		7320 (Pk)	60.81	74.00	-13.19
		7320 (Av)	48.19	54.00	-5.81
Horizontal		2440 (Pk)	99.84	-	*
		2440 (Av)	96.66	-	*
		4880 (Pk)	56.15	74.00	-17.85
		4880 (Av)	43.57	54.00	-10.43
		7320 (Pk)	61.39	74.00	-12.61
		7320 (Av)	48.87	54.00	-5.13
Vertical	2475.00	2483.5 (Pk)	58.86	74.00	-15.14
		2483.5 (Av)	49.44	54.00	-4.56
		2475 (Pk)	112.59	-	*
		2475 (Av)	109.20	-	*
		4950 (Pk)	55.53	74.00	-18.47
		4950 (Av)	44.64	54.00	-9.36
		7425 (Pk)	62.96	74.00	-11.04
		7425 (Av)	49.14	54.00	-4.86
Horizontal		2483.5 (Pk)	50.17	74.00	-23.83
		2483.5 (Av)	39.48	54.00	-14.52
		2475 (Pk)	100.70	-	*
		2475 (Av)	97.42	-	*
		4950 (Pk)	56.16	74.00	-17.84
		4950 (Av)	44.26	54.00	-9.74
		7425 (Pk)	61.88	74.00	-12.12
		7425 (Av)	49.43	54.00	-4.57

* - Fundamental frequency

Note: Field Strength = Measured Field Strength + Antenna Factor + Cable loss – Preamp Gain

9 LIST OF TABLES

Table 1: Test and measurement instrument used	5
Table 2: Ratings and System Details	6
Table 3 : Antenna Details and power level settings used.....	7
Table 4: Measurement Uncertainty.....	7
Table 5: List of Center Frequencies.....	8
Table 6: DTS Bandwidth and OBW test results.....	9
Table 7: Maximum peak conducted output power.....	13
Table 8: Peak PSD	19
Table 9: Reference level measurement.....	22
Table 10: Emissions in non- restricted frequency bands / Emission level measurement	24
Table 11: Emissions in non- restricted frequency bands / Emission level measurement with 2 MHz span.....	25
Table 12: Transmitter limits for Radiated emission of Section 15.209, RSS Gen 8.9 and 8.10	32
Table 13: Test Results for frequency range 30 MHz to 200 MHz	33
Table 14: Test Results for frequency range 200 MHz to 1 GHz.....	33
Table 15: Test results for Antenna -2 dBi and 16 dBm power level	34
Table 16: Test results for Antenna 2 dBi and 16 dBm power level	35
Table 17: Test Results for Antenna 4 dBi (EM-B14503-MMP-Z6) and 14 dBm power level	37
Table 18: Test Results for Antenna 4 dBi (HGV- 2404U) and 14 dBm Power level	38
Table 19: Test Results for Antenna 8 dBi and 10 dBm power level	40
Table 20: Test Results for Antenna 14 dBi and 6 dBm power level	41

10 LIST OF FIGURES

Figure 1: Frequency Range 9 kHz- 30 MHz	29
Figure 2: Frequency Range 30 MHz – 200 MHz.....	30
Figure 3: Frequency Range above 200 MHz – 1000 MHz	30
Figure 4: Frequency range above 1000 MHz	31

11 List of Test graphs

Test Graph 1: 2405 MHz DTS Bandwidth	10
Test Graph 2: 2440 MHz DTS Bandwidth	10
Test Graph 3: 2475 MHz DTS Bandwidth	11
Test Graph 4: 2405 MHz OBW	11
Test Graph 5: 2440 MHz OBW	12
Test Graph 6: 2475 MHz OBW	12
Test Graph 7: 2405 MHz power for 16 dBm power level setting	14
Test Graph 8: 2440 MHz power for 16 dBm power level setting	14
Test Graph 9: 2475 MHz power for 16 dBm power level setting	15
Test Graph 10: 2405 MHz power for 10dBm power level setting	16
Test Graph 11: 2440 MHz power for 10 dBm power level setting	16
Test Graph 12: 2475 MHz power for 10 dB power level setting	17
Test Graph 13: 2405 power for 6 dBm power level setting	18
Test Graph 14: 2405 MHz Peak PSD.....	20
Test Graph 15: 2440 MHz Peak PSD.....	20
Test Graph 16: 2475 MHz Peak PSD.....	21
Test Graph 17: 2405 MHz Reference level	23
Test Graph 18: 2475 MHz Reference level	23
Test Graph 19: 2405 MHz Band edge level	24
Test Graph 20: 2475 MHz Band edge level	25
Test Graph 21: 2405 MHz Band edge level with 2MHz span.....	26
Test Graph 22: 2475 MHz Band edge level with 2MHz span.....	26
Test Graph 23: 2405 MHz - 30 MHz to 26.5 GHz spurious emission	27
Test Graph 24: 2440 MHz - 30 MHz to 26.5 GHz spurious emission	27
Test Graph 25: 2475 MHz – 30 MHz to 26.5 GHz spurious emission.....	28

*****END OF TEST REPORT*****